

UNCLASSIFIED

AD 269 502

*Reproduced
by the*

**ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA**




UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

THE EFFECT OF MISMATCHING IN THE MEASUREMENT
OF THE AIR-EARTH CURRENT-DENSITY

by

Lothar H. Ruhnke



October 1961

U.S. ARMY SIGNAL RESEARCH AND DEVELOPMENT LABORATORY

FORT MONMOUTH, N. J.

269 502

62-1-6

JAN 18 1962
THOR

U. S. ARMY SIGNAL RESEARCH AND DEVELOPMENT LABORATORY
FORT MONMOUTH, NEW JERSEY

October 1961

USASRDL Technical Report 2232 has been prepared under the supervision of the Director, Surveillance Department, and is published for the information and guidance of all concerned. Suggestions or criticisms relative to the form, contents, purpose, or use of this publication should be referred to the Commanding Officer, U. S. Army Signal Research and Development Laboratory, Fort Monmouth, New Jersey, Attn: Chief, Atmospheric Physics Branch, Meteorological Division.

J. M. KIMBROUGH, Jr.
Colonel, Signal Corps
Commanding

OFFICIAL:

J. W. LINDSTROM, Jr.
CWO, W-3, USA
Assistant Adjutant

DISTRIBUTION:

Special

ASTIA Availability Notice

Qualified requestors may obtain copies of this report from ASTIA.

October 1961

USASRDL Technical Report 2232

THE EFFECT OF MISMATCHING IN THE MEASUREMENT
OF THE AIR-EARTH CURRENT-DENSITY

Lothar H. Ruhnke

DA Task 3A99-27-005-03

U. S. ARMY SIGNAL RESEARCH AND DEVELOPMENT LABORATORY
FORT MONMOUTH, NEW JERSEY

ABSTRACT

The errors are analyzed which arise when using Kasemir's method to measure air-earth current-density. Step function, ramp function, and periodic functions in the current as well as in the time-constant θ of the air are discussed.

CONTENTS

Abstract	1
INTRODUCTION	1
DISCUSSION	2
Derivation of the Differential Equation	2
The Step Function and the Ramp Function	4
Periodic Functions	9
REFERENCES	10

Figures

1. The equivalent circuit diagram for measuring current-density	2
2. Circuit with operational amplifier to measure current-density	3
3. Circuit response to current-changes for three different matching conditions	5
4. Circuit response to a ramp function in the current	7
5. Circuit response to theta-changes for three different matching conditions	8
6. Circuit response to periodic current-changes	11
7. Error in the current-measurement due to periodic changes in the time-constant	12

THE EFFECT OF MISMATCHING IN THE MEASUREMENT OF THE AIR-EARTH CURRENT-DENSITY

INTRODUCTION

Successful measurements of the air-earth current density started in 1906 when Wilson¹ introduced his well-known method which was based on time sampling and was not directly suitable for continuous recording. The difficulty in making a continuous recording was the effect of the potential gradient on the current measurement. In 1933 Scrase² tried a method of compensating for this effect, but he did not really succeed although his method is feasible. Adamson³ rearranged the method of Scrase and used a modern field mill to overcome the sluggishness of the polonium collector used by Scrase. A much simpler circuit for continuous current measurement was introduced in 1955 by Kasemir,⁴ who compensated for the displacement current generated by fluctuations of the field in an ingenious way. The errors of this method and the limitations for practical use are discussed in detail in this report.

The three electric parameters most often used to determine atmospheric electric occurrence in fair weather are the field strength F , the sum of the polar conductivities λ , and the conduction current density i . They are combined in the Ohm's law which has, in the three-dimensional case, the form

$$i = \lambda \cdot F. \quad (1)$$

Normally it is sufficient to continuously record two of these quantities in order to determine all three. However, since the measuring instruments, and sometimes the method used, give the measured parameters with a more or less significant error, it should be noted that a measurement of all three variables is necessary to have a continuous check of proper functioning.

One of the most significant errors comes from the influence of the displacement current in air on a conduction-current measurement. This report shows theoretically the expected error when using Kasemir's method of compensation. Starting from the general differential equation, two cases will be treated separately. One is the case when all fluctuations originate from changes in the current density, and the other is the case when all fluctuations come from changes in the conductivities. It is possible to treat these variables separately because the current and the conductivity can be taken in approximation as independent variables.

In discussing the solution of differential equations, it is practical to consider given time functions for the variables. A step function and a ramp function are chosen because they demonstrate the mismatching condition adequately. A step function is chosen because it represents sudden changes in the variables; and a ramp function, which is a function increasing linearly with time, is chosen to represent slow changes. In addition, a frequency-amplitude discussion for periodic fluctuations of the variables is set forth. Frequency-amplitude diagrams in a double logarithmic scale as introduced by Bode⁵ are used to interpret the results.

DISCUSSION

Derivation of the Differential Equation

Kasemir's method of current measurement consists of an insulated antenna that is exposed to the atmosphere. This current sensor is grounded by a resistor with a suitable capacitor in parallel. The current through the resistor is measured by a sensitive current meter. The necessary conditions for a true measurement of the conduction current are: the measuring resistor is so small that the voltage drop over it is small compared with the open loop voltage at the antenna, and the time constant T of the RC circuit is at all times equal to the time constant of the air. In practice these conditions are fulfilled in approximation only, even for measurements at the ground. Special difficulties arise when current densities are to be measured as a function of height with balloon soundings because the conductivity of the air is changing exponentially with height. Kasemir,⁶ who made the first current measurements with balloons, has made a detailed analysis of the measuring technique involved.

For the antenna, the equivalent circuit diagram as given by Kasemir and Ruhnke⁷ is used. It is shown in Fig. 1 where F is the field strength, h the effective height of the antenna, c the antenna capacity, and r the internal resistance of the antenna. The product rc is equal to the time constant θ of the air surrounding the antenna. The condition that the measuring resistance R should be small is equivalent to the condition that the current measured is the short circuit current in the diagram of Fig. 1. This is normally fulfilled to a satisfactory extent with a measuring resistance of 10^9 ohm because

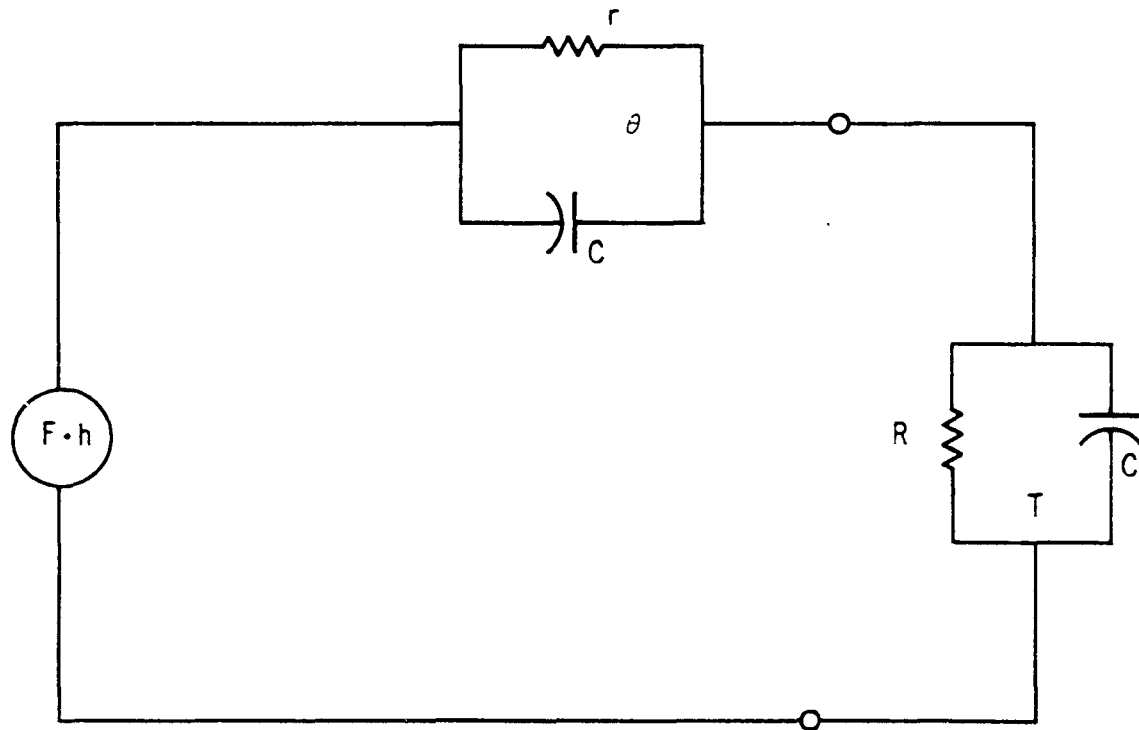


Fig. 1. The equivalent circuit diagram for measuring current density.

the internal resistance r of the current antenna will be in the range of 10^{13} ohms when measured at the ground. A more elegant way to satisfy this condition lies in the use of the analog computer technique. An operational amplifier with an electrometer input with the RC network in the feedback loop replaces the current meter and the RC network of Kasemir's method. This arrangement is especially practical if current densities are to be measured in balloon and rocket soundings since, with the exponential increase of conductivity in high altitudes, the short circuit condition is easier fulfilled than with the traditional arrangement. The equivalent circuit diagram for this method is shown in Fig. 2 where the gain A of the operational amplifier for convenience is assumed infinite. Practical values of A are between 60 db and 120 db. It can be shown that the effective input impedance of this circuit at the input of the amplifier is $1/A$ times the feedback impedance.

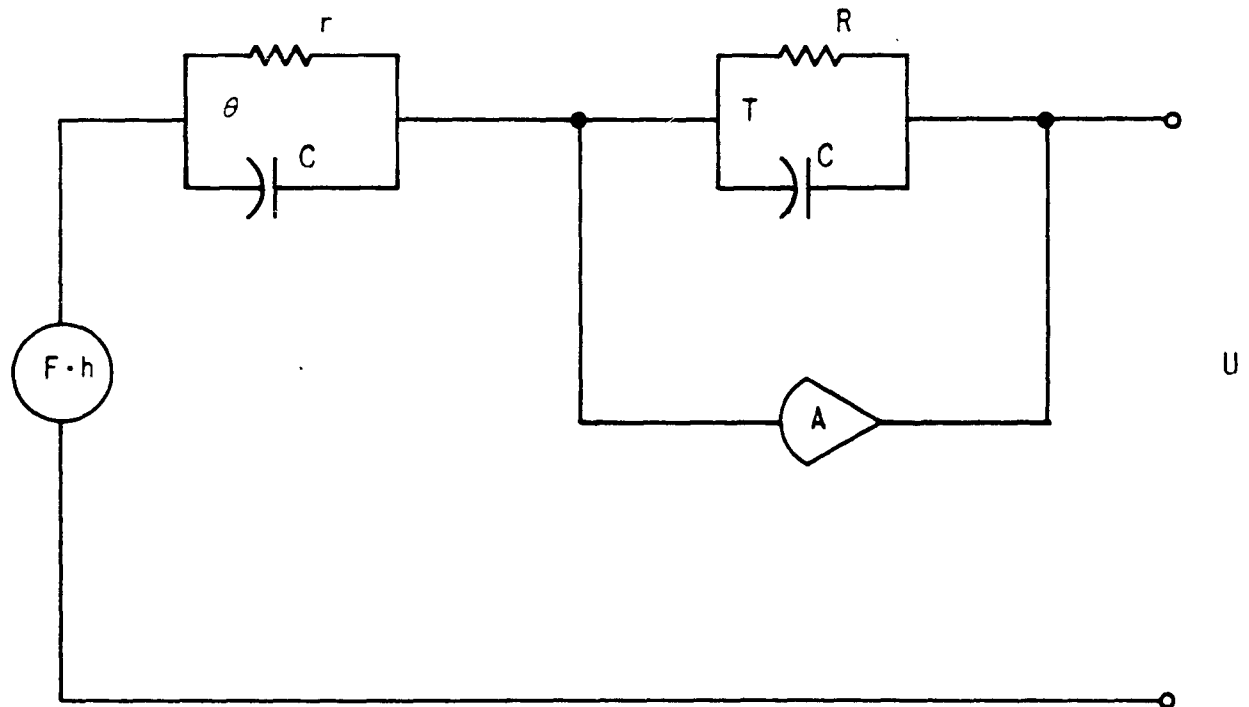


Fig. 2. Circuit with operational amplifier to measure current-density.

One more definition is necessary to set up the general differential equation for this circuit; namely, the desired conduction current density i and a factor M which has the dimension of an area and means the effective area of the antenna. The open-loop voltage Fh is related to the conduction component Mi of the short-circuit current by the internal resistance r .

$$Fh/Mi = r. \quad (2)$$

The differential equation governing this circuit is then given by

$$U/R + C \, dU/dt = -(Fh/r + C \, dFh/dt). \quad (3)$$

With equation (2) and with the relation for the time constant, the differential equation can be rearranged.

$$U/R + C \, dU/dt = -(M_i + M \, di\theta/dt). \quad (4)$$

This equation is valid for homogeneous conductivity and current density in the neighborhood of the antenna. The current as well as the conductivity may, however, be functions of time. The general solution with no initial charges assumed may be expressed by

$$U = -M_i r - \frac{MR}{T} \exp(-\frac{t}{T}) \int_0^t \left[i \frac{d\theta}{dt} + (\theta - T) \frac{di}{dt} \right] \exp(\frac{t}{T}) dt. \quad (5)$$

It can be seen that for $\theta = T = \text{constant}$, the so-called matching condition, U is proportional to the current density i for any time function of i . This is no longer the case if the conductivity changes. Then, $d\theta/dt$ is no longer zero and this term introduces an error term into the measurement. But in addition θ is no longer equal to T , and any current change di/dt brings an additional deviation from the true measurement. The (1) solution of equation (4) for the time functions in question will be obtained by using the Laplace transformation.

The Step Function and the Ramp Function

To demonstrate the influence of mismatching and conductivity fluctuations, a step function for the current i or the time constant θ , respectively, is assumed. In the first case let $\theta = \text{constant}$ and the current jump from the value i to $i + \Delta i$ at t equal zero. The Laplace transformation for this case is given by

$$\frac{U(s)}{R} + sU(s) \, C - \frac{T}{R} U_{t=0} = -Mi(s) - sM\theta i(s) + Mi_{t=0} \theta \quad (6)$$

with

$$i(s) = \frac{i + \Delta i}{s}; \quad i_{t=0} = i; \quad U_{t=0} = -M_i r.$$

As a matter of convenience let the equation be normalized to a dimensionless one with the help of the relation

$$V = \frac{U}{-M_i r}. \quad (7)$$

Now the Laplace equation can be easily solved for $V(s)$:

$$V(s) = \frac{(1 + \frac{\Delta i}{i})}{s} + \frac{\Delta i}{i} \frac{(\theta - T)}{(1 + sT)}. \quad (8)$$

The time relation $V(t)$ will be obtained after back transformation into the time domain. It contains all transients for the given initial conditions and represents the normalized output.

$$\begin{aligned} V(t) &= 1 + \frac{\Delta i}{i} + \frac{\Delta i}{i} \frac{(\theta - T)}{T} \exp(-t/T) & t > 0 \\ V(t) &= 1 & t < 0 \end{aligned} \quad (9)$$

This expression means generally that changes of the current which occur fast compared to the time constant T are either exaggerated or damped in the recorded output, depending on the matching condition.

In Fig. 3, relation (9) is plotted against time for three different matching conditions: $\theta = T$; $\theta = 1/2T$; $\theta = 2T$.

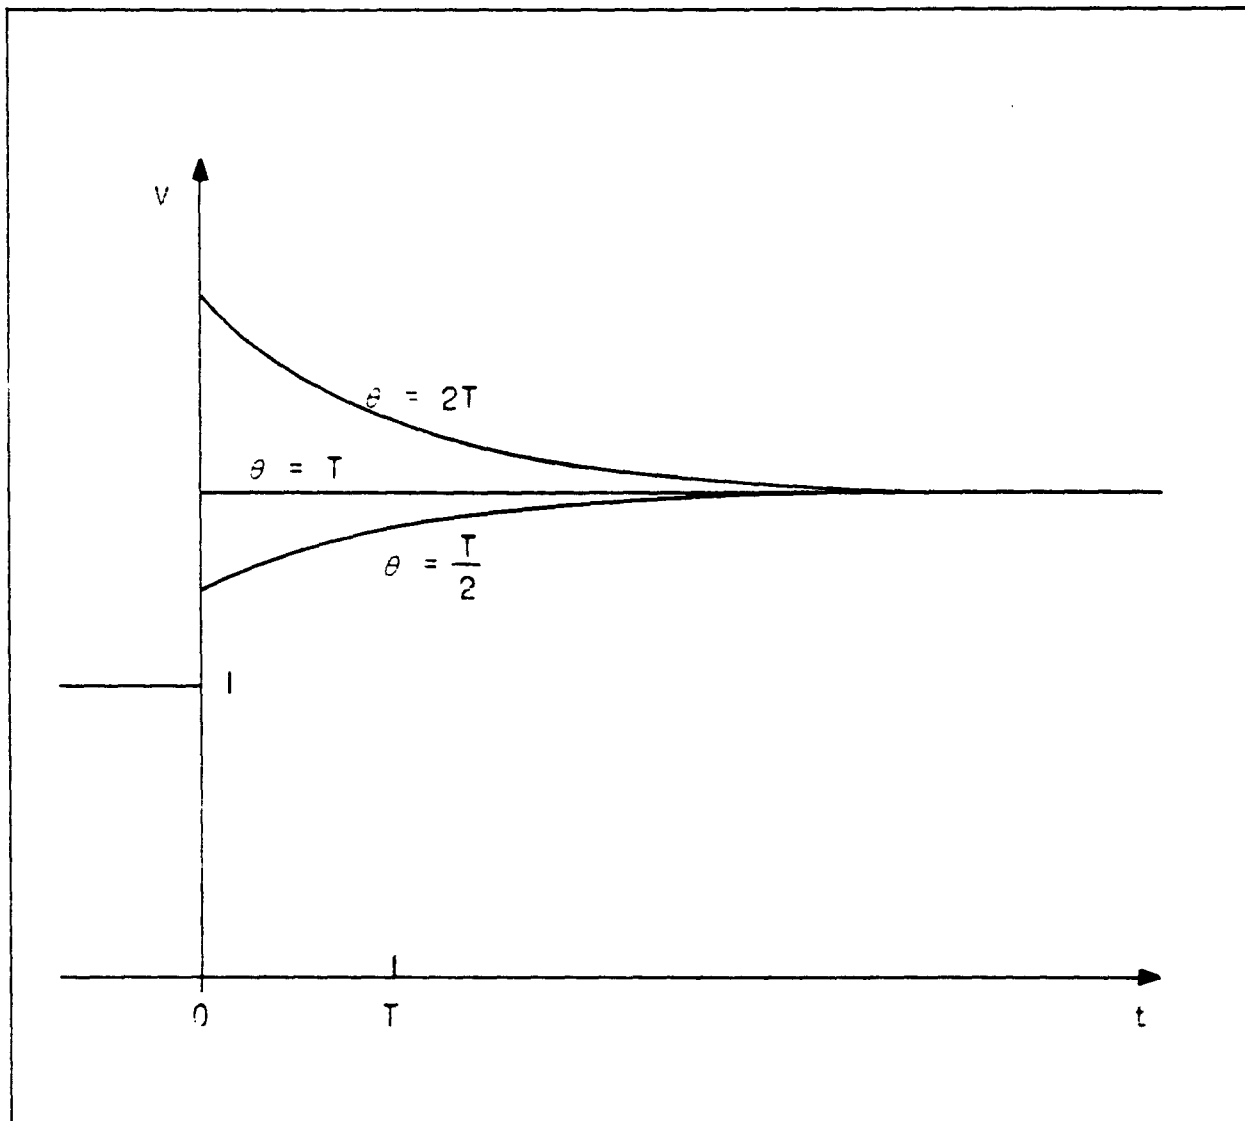


Fig. 3. Circuit response to current-changes for three different matching conditions.

Errors due to changes of the current slow to the time constant T can be treated by assuming a ramp function of the current. Let $i(t)$ be equal to $i + \Delta i/\Delta t t$, with $\Delta i/\Delta t$ the rate of current change per time unit. The Laplace transformation then is

$$i(s) = \frac{i}{s} + \frac{1}{s^2} \frac{\Delta i}{\Delta t}. \quad (10)$$

The initial conditions are given by:

$$i(t)_{t=0} = i$$

$$U(t)_{t=0} = -MiR$$

If this is applied to equation (6), and $V(s)$ is solved for,

$$V(s) = \frac{1}{s} + \frac{1}{s^2} \frac{\Delta i}{\Delta t i} + \frac{1}{s} \frac{(\theta - T)}{i} \frac{\Delta i}{\Delta t} + \frac{T(T - \theta)}{(1 + sT)} \frac{\Delta i}{i \Delta t}. \quad (11)$$

In the time domain this equation reads:

$$V(t) = 1 + \frac{\Delta i}{\Delta t} \frac{t}{i} + \frac{(\theta - T)}{i} \frac{\Delta i}{\Delta t} + \frac{(T - \theta)}{i} \frac{\Delta i}{\Delta t} \exp(-t/T). \quad (12)$$

The first two terms represent the true current component. The term $(\theta - T) \Delta i / \Delta t$ is an error component and means that the current measurement is changed in an amount proportional to $(\theta - T)$ and to the rate of current change. The last term represents the transient. Summarizing, fast current changes are exaggerated in the reading by the factor $(\theta - T)/T$ and slow changes bring a constant error of the amount $(\theta - T) \Delta i / \Delta t$.

In Fig. 4 relation (12) is plotted to show the influence of slow current changes. Again the following matching conditions are used: $\theta = T$, $\theta = 1/2T$, and $\theta = 2T$.

In the next case let i be constant and the time constant θ of the air change at $t = 0$ in a sudden jump from the value θ to $\theta + \Delta\theta$. Equation (5) can then in its normalized form be expressed for this special time function by

$$V = 1 + \Delta\theta/T \exp(-t/T) \quad t \geq 0 \quad (13)$$

$$V = 1 \quad t < 0$$

Values of T , $1/2T$, and $2T$ are assumed for $\Delta\theta$ and the output is plotted in Fig. 5.

It is interesting to notice that the error term of equation (13) is no longer zero for $\theta = T$, but completely independent from the case of matching. The constant part of the time constant θ does not even appear in equation (13). The magnitude of the error is proportional to the change of θ and inversely proportional to the time constant T of the measuring device. Changes of θ , small compared to the time constant T , will not affect the current reading appreciably. In practice the conductivity has strong fluctuations if measured with a Gerdien tube of conventional size. However, the current antenna has an appreciable area and the mean value of the conductivity over this area is responsible for the error term in equation (13). In practice this mean value of the conductivity shows no rapid fluctuations, and the error term is neglectable if current antennas with effective areas over 10 m^2 are used.

For slow changes of θ , again a ramp function is assumed of the form $\theta(t) = \theta + \Delta\theta/\Delta t t$. By using the Laplace transformation, the normalized solution of equation (4) is obtained as

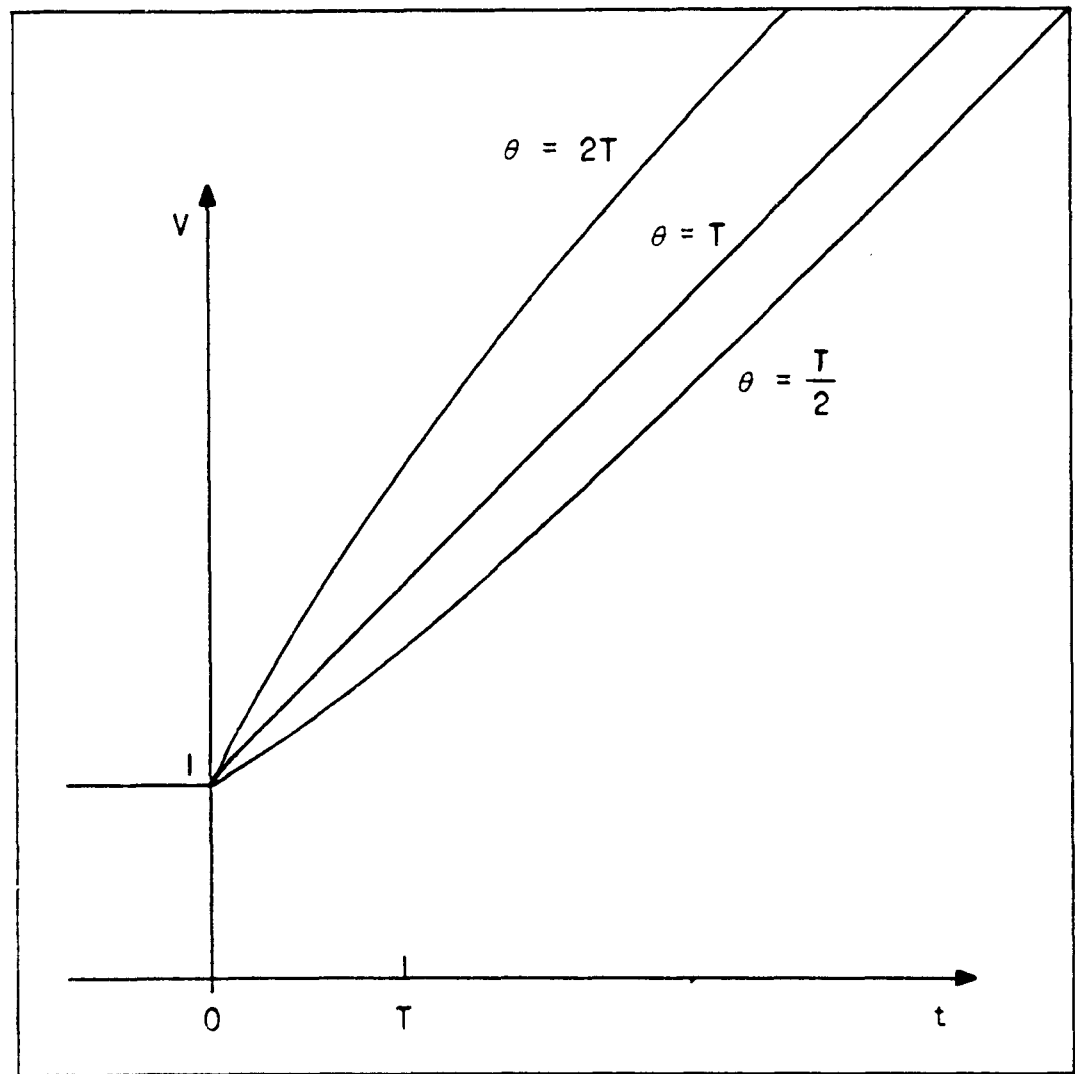


Fig. 4. Circuit response to a ramp function in the current.

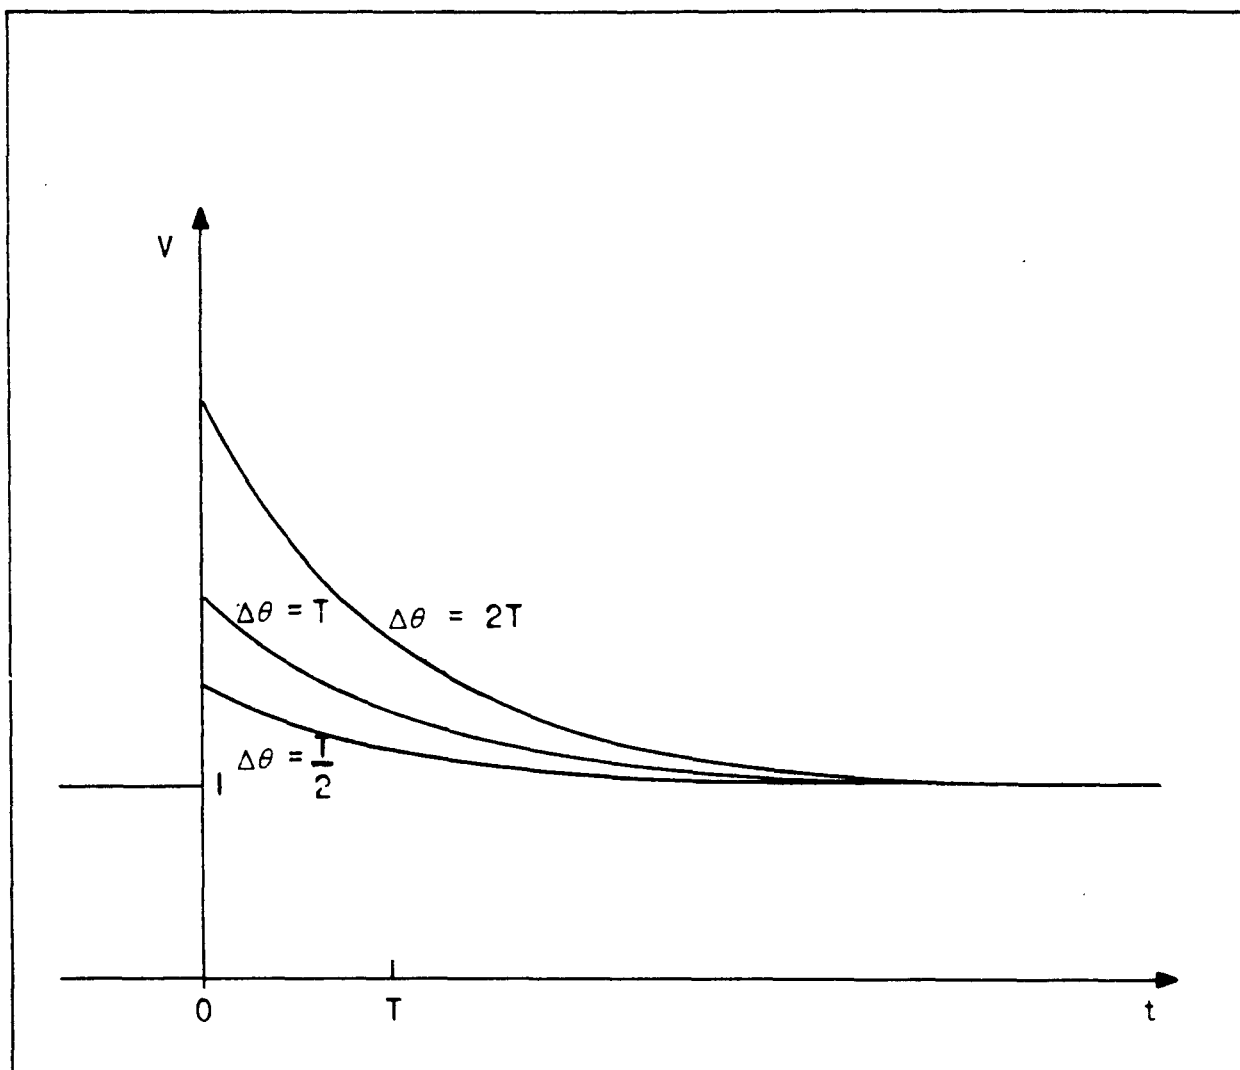


Fig. 5. Circuit response to theta-changes for three different matching conditions.

$$V(t) = 1 + \frac{\Delta\theta}{\Delta t} (1 - \exp -t/T). \quad (14)$$

Again there is no matching possible, and the error is proportional to the rate of change of the time constant $\Delta\theta/\Delta t$.

Periodic Functions

The discussion of a step function and a ramp function provides a good demonstration of the effects, but is not sufficient to describe the actual behavior, since random fluctuations may occur in the current as much as in the conductivities with no similarities to step or ramp functions. A more precise description of the phenomena involved is given by a complex frequency characteristic of the system. There are often quasi periodic fluctuations observed in the recordings of atmospheric electric parameters, and with the known frequency characteristic of the system it is easy to estimate the existing error for a specific frequency. The sine wave is probably of all time functions the one which best approximates the measured fluctuations. Besides this, it is possible to present any time function by its spectrum obtained by Fourier analysis. The spectrum of the output is then equal to the spectrum of the input times the frequency characteristic $V(j\omega)$ of the system. The error term of the system is given by the deviation of the transfer characteristic from unity. In other words, a correct current measurement is obtained if $V(j\omega)$ is equal to unity for all frequencies.

To obtain the transfer function of the system, assume periodic functions of i and θ and consider the solution of equation (4) after decay of the transients. To do so, make use of solving differential equations with the help of the Laplace transformation. The transformed equation itself acquires for periodic functions of i the significance of a frequency characteristic when the complex variable s is substituted for by the cyclic frequency $j\omega$. However, the transfer characteristic is not obtained so easily when periodic functions of θ are assumed and the current remains constant. It is therefore preferable to derive the transfer function in the exact manner. The Laplace transformation of equation (4) for the case $\theta = \text{constant}$, then, is

$$U(s)(1+sT) - TU_{t=0} = -MRi(s) - MR\theta si(s) + MR\theta i_{t=0}. \quad (15)$$

The initial conditions are $U_{t=0}$ and $i_{t=0} = 0$. The current as a periodic function may be expressed as

$$i(t) = i \exp(j\omega t) \quad (16)$$

and its transformation as

$$i(s) = i/(s - j\omega). \quad (17)$$

The transformed differential equation then has the appearance:

$$U(s) = -MRi (1 + s\theta)/(1 + sT) (s - j\omega). \quad (18)$$

By using the standardizing relation (7), and after decay of the transients, the time relation after inverse transformation is obtained.

$$V = (1 + j\omega\theta)/(1 + j\omega T) \exp(j\omega t). \quad (19)$$

This equation can now be discussed. $\theta = T$ is the matched condition and for this $|V| = 1$. For any other value of the time constants there is a frequency dependence of V . In Fig. 6 the absolute value of V is plotted against the inverse frequency (cycle length) in a double logarithmic scale. The amplitude is expressed in decibels and the circuit is matched when the conductivity has a value of 10^{-14} ohm $^{-1}$ m $^{-1}$.

For cycle lengths long compared to $2\pi T$ or $2\pi\theta$, $|V|$ is unity and no errors exist. For cycle lengths short compared to $2\pi T$ or $2\pi\theta$, $|V|$ is constant and has the value θ/T . For cycle lengths between $2\pi T$ and $2\pi\theta$ there is a smooth transition from unity to θ/T .

For the case that i is constant and θ is the variable, the transformation of equation (4) is obtained:

$$U/R (1 + sT) - T/R \cdot U_{t=0} = -Mi/s - sMi \theta (s) + Mi\theta_{t=0}. \quad (20)$$

with $U_{t=0} = -MiR$, $\theta (s) = \theta/(s - j\omega)$.

Again normalize this equation and neglect the transients. Transforming this equation back into the time domain,

$$V = 1 + j\omega\theta/(1 + j\omega T) \exp(j\omega t). \quad (21)$$

The absolute value of the error term is plotted in Fig. 7. For periodic changes of θ which have a cycle length long compared to $2\pi\theta$, $|V|$ approaches unity and there is no influence of conductivity changes on current measurements. For a cycle length short compared to $2\pi T$, an error term of the absolute value θ/T and with the cyclic frequency ω is obtained. This error term is superimposed on the constant current.

How much conductivity changes affect the current recording in practical cases cannot be stated definitively without knowing the average spectrum of the conductivity fluctuations. However, examination of simultaneous current and conductivity recordings does not show any clear transfer of conductivity fluctuations on the current reading. This is an indication that the spectrum of the conductivity has no significant component in the cycle length region short compared to $2\pi\theta$.

REFERENCES

1. Wilson, C. T. R., "On the Measurement of the Air-Earth Current and on Origin of Atmospheric Electricity." Proc. Camb. Phil. Soc. 13, 363-382, 1906.
2. Scrase, F. J., "The Air-Earth Current at Kew Observatory," Geophys. Mem., 67, London, 1933.

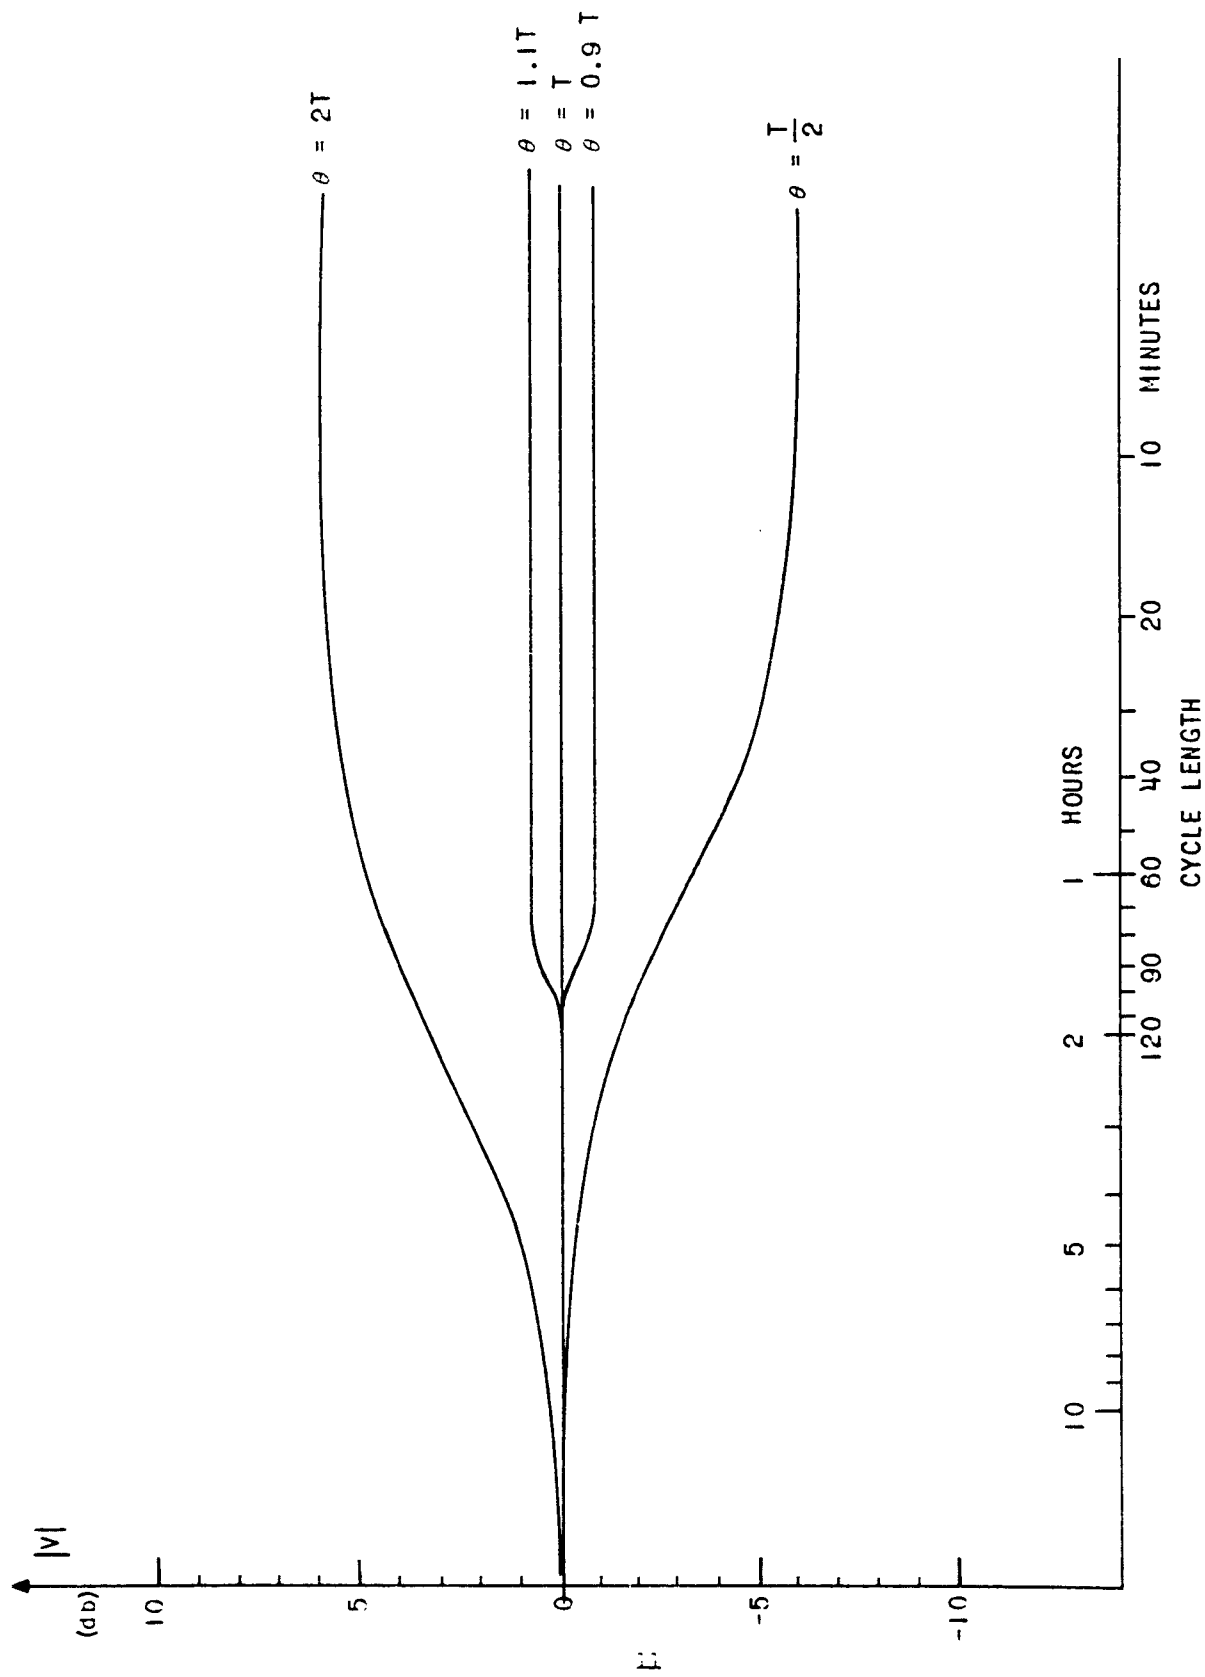


FIG. 6. Circuit response to periodic current changes.

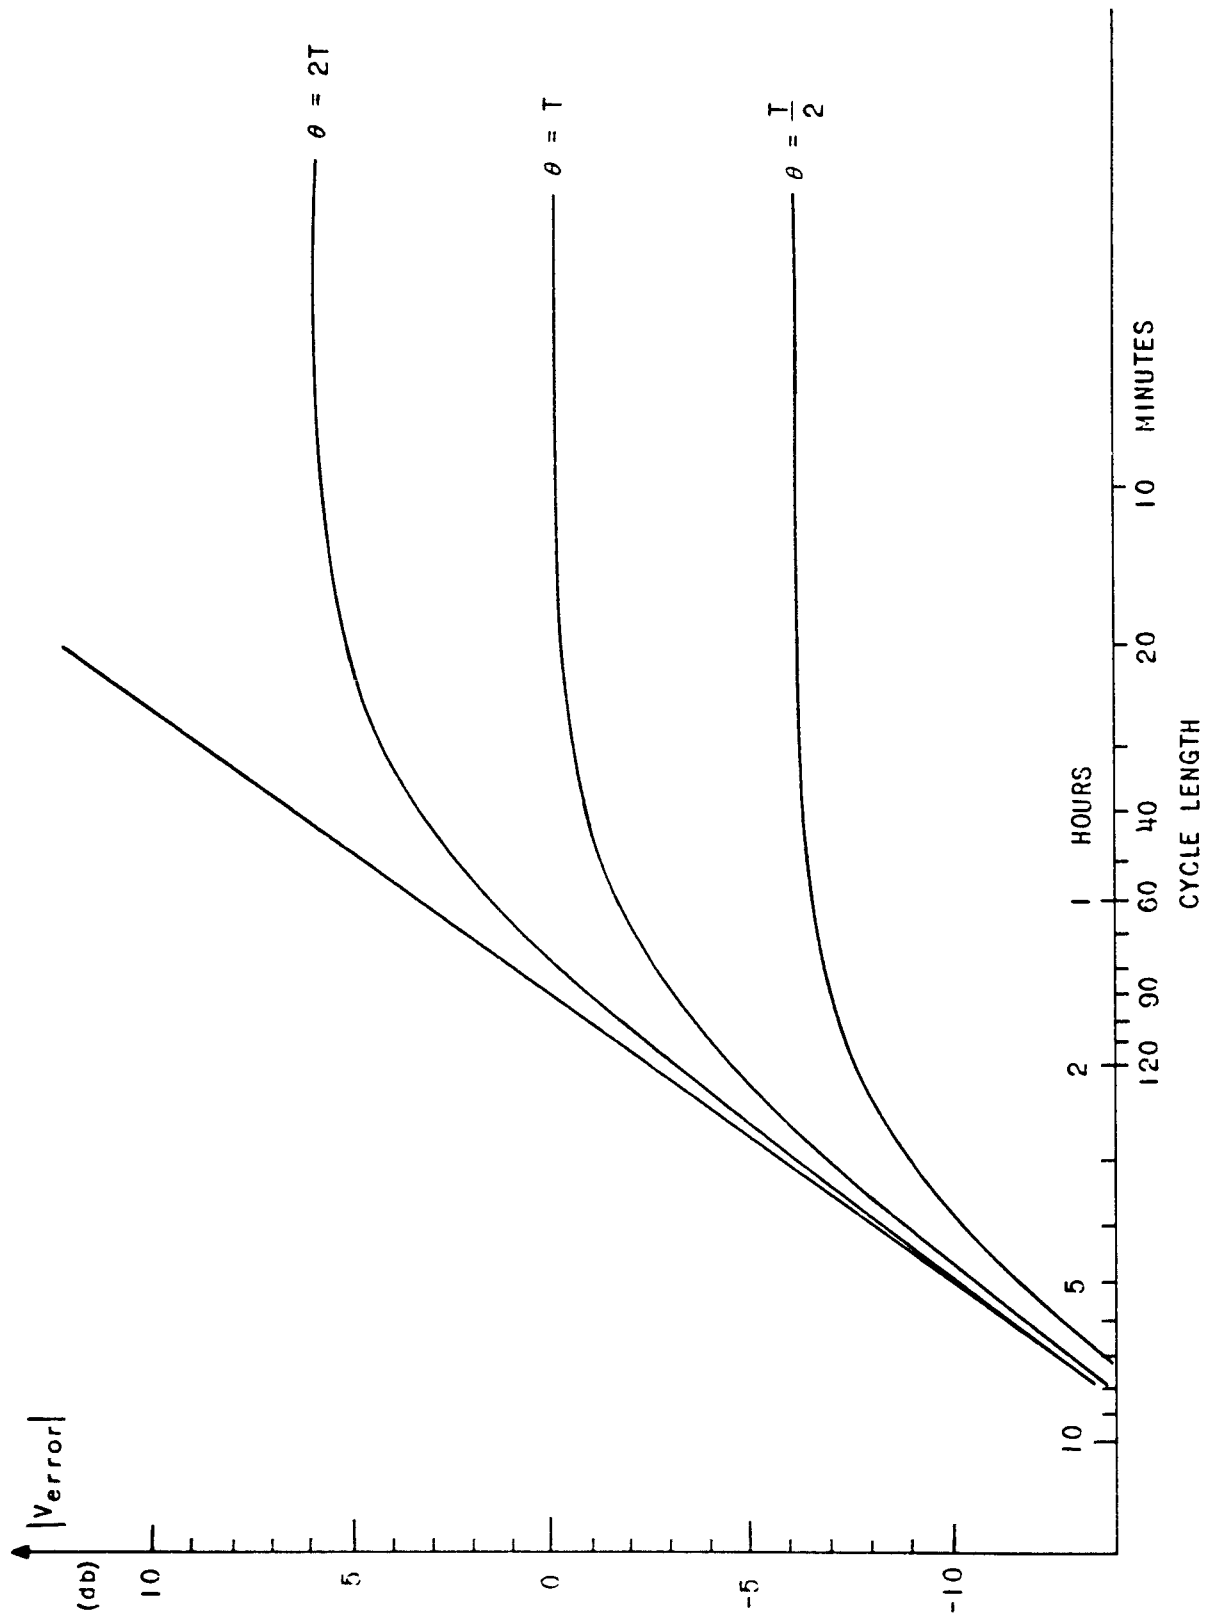


Fig. 7. Error in the current-measurement due to periodic changes in the time constant.

3. Adamson, J., "The Compensation of the Effects of Potential Gradient Variations in the Measurement of the Atmospheric Air-Earth Current," Quart. Journ. Roy. Met. Soc., 86, 368, 1960.

4. Kasemir, H. W., "Measurement of the Air-Earth Current Density," Proceedings on the conference on atmospheric electricity held at Wentworth, N. H., in May 1954 (ARDC Geophysical Research Paper #42).

5. Bode, H. W., Network Analysis and Feedback Amplifiers, Van Nostrand, Princeton, N. J. 1945

6. Kasemir, H. W., "A Radiosonde for Measuring the Air-Earth Current Density," USASRDL Technical Report 2125, Jun 60.

7. Kasemir, H. W., and Ruhnke, L. H., "Antenna Problems of Measurement of the Air-Earth Current," Recent Advances in Atmospheric Electricity, L. G. Smith, Pergamon Press, 1958.

DISTRIBUTION

No. of Copies

Chief Signal Officer ATTN: SIGRD, Department of the Army Washington 25, D. C.	1
Chief Signal Officer ATTN: SIGPD-8bl, Department of the Army Washington 25, D. C.	2
U. S. Army Research Office, Research Analysis Division ATTN: Dr. Hoyt Lemons Arlington Hall Station, Virginia	1
Office of Assistant Secretary of Defense (R and E) ATTN: Technical Library, Room 3E1065, The Pentagon Washington 25, D. C.	1
Chief, United States Army Security Agency ATTN: ACoS, G4, (Technical Library) Arlington Hall Station, Arlington 12, Virginia	1
Commanding General, U. S. Army Electronic Proving Ground ATTN: Meteorological Department, Fort Huachuca, Arizona	1
Commanding General, U. S. Army Electronic Proving Ground ATTN: SIGPG-DCGM, Fort Huachuca, Arizona	2
Commanding General, U. S. Army Electronic Proving Ground ATTN: Technical Library, Fort Huachuca, Arizona	1
Commanding Officer, U. S. Army Signal Missile Support Agency ATTN: SIGWS-AJ, White Sands Missile Range, New Mexico	1
Commanding Officer, U. S. Army Signal Materiel Support Agency ATTN: USASL-5A/ADJ, Fort Monmouth, New Jersey	1
Directorate of Intelligence, Hq, United States Air Force ATTN: AFOLN-1bl, Washington 25, D. C.	2
Commander, Rome Air Development Center ATTN: RAOIL-2, Griffiss Air Force Base, New York	1
Commanding General Hq, Ground Electronics Engineering Installations Agency ATTN: ROZNS, Griffiss Air Force Base, New York	1
Commander, Aeronautical Systems Division ATTN: ASAPRL, Wright-Patterson Air Force Base, Ohio	1
Commander, Air Force Electronic Systems Division ATTN: CCRR and CCSD, L. G. Hanscom Field, Bedford, Mass.	2

DISTRIBUTION (contd)

No. of Copies

Commander, U. S. Air Force Security Service ATTN: Directorate of Systems Engineering (ESD) DCS/Communications-Electronics San Antonio, Texas	1
Commander-in-Chief, Strategic Air Command ATTN: DOCER, Offutt Air Force Base, Nebraska	1
Commander, Air Proving Ground Center ATTN: ADJ/Technical Reports Branch Eglin Air Force Base, Florida	1
Commander, Air Force Cambridge Research Laboratories ATTN: CRO, L. G. Hanscom Field, Bedford, Mass.	2
Chief of Naval Research, ATTN: Code 427 Department of the Navy, Washington 25, D. C.	1
Bureau of Ships Technical Library ATTN: Code 312, Main Navy Building, Room 1528 Washington 25, D. C.	1
Chief, Bureau of Ships, ATTN: Code 454 Department of the Navy Washington 25, D. C.	1
Chief, Bureau of Ships, ATTN: Code 686B Department of the Navy Washington 25, D. C.	1
Director, ATTN: Code 2027 U. S. Naval Research Laboratory, Washington 25, D. C.	1
Commanding Officer and Director, ATTN: Library U. S. Navy Electronics Laboratory San Diego 52, California	1
Commander, U. S. Naval Ordnance Laboratory White Oak, Silver Spring 19, Maryland	1
Director, ATTN: Technical Documents Center U. S. Army Engineer Research and Development Laboratories Fort Belvoir, Virginia	1
Commanding Officer, ATTN: Technical Library, Bldg. 330 U. S. Army Chemical Warfare Laboratories Army Chemical Center, Maryland	1
Commander, Armed Services Technical Information Agency ATTN: TIPCR, Arlington Hall Station Arlington 12, Virginia	10

DISTRIBUTION LIST (contd)

No. of Copies

Signal Corps Liaison Officer, Ordnance Tank Automotive Command U. S. Army Ordnance Arsenal, Detroit, Center Line, Michigan	1
Army Liaison Officer, ATTN: Code 1071 Naval Research Laboratory, Washington 25, D. C.	1
U. S. Army Signal Liaison Officer, ATTN: ASDL-9 Aeronautical Systems Division Wright-Patterson Air Force Base, Ohio	2
Signal Corps Liaison Officer, Massachusetts Institute of Technology Building 26, Room 131, 77 Massachusetts Avenue Cambridge 39, Massachusetts	1
Signal Corps Liaison Officer, Lincoln Laboratory P. O. Box 73, Lexington, Massachusetts	1
Signal Corps Liaison Officer, Rome Air Development Center ATTN: RAOL, Griffiss Air Force Base, New York	1
USASRDL Liaison Officer, Hq, U. S. Continental Army Command Fort Monroe, Virginia	1
USASIMSA Liaison Engineer, Signal Section, Eighth U. S. Army APO 301, San Francisco, California	1
Chairman, U. S. Army Chemical Corps Meteorological Committee Fort Detrick, Frederick, Maryland	1
Director, U. S. Army Chemical Corps Operations Research Group Army Chemical Center, Edgewood, Maryland	1
Director, Atmospheric Sciences Programs National Science Foundation, Washington 25, D. C.	1
Director, Bureau of Research and Development Federal Aviation Agency, Washington 25, D. C.	1
Director, Bureau of Research and Development Federal Aviation Agency National Aviation Facilities Experimental Center ATTN: Technical Library, Bldg. 3, Atlantic City, New Jersey	1
Chief, Fallout Studies Branch, Division of Biology and Medicine Atomic Energy Commission, Washington 25, D. C.	1
Chief, Bureau of Naval Weapons (FAME) U. S. Navy Department, Washington 25, D. C.	1

DISTRIBUTION (contd)	<u>No. of Copies</u>
Officer-in-Charge, Meteorological Curriculum U. S. Naval Post Graduate School, Monterey, California	1
Chief of Naval Operations (OP07) U. S. Navy Department, Washington 25, D. C.	1
Office of Naval Research, U. S. Navy Department Washington 25, D. C.	1
U. S. Naval Research Laboratory, ATTN: Code 7110 Washington 25, D. C.	1
AFSC Liaison Office Naval Air Research and Development Activities Command Johnsville, Pa.	1
Chief of Research and Development, Department of the Army Washington 25, D. C.	2
Marshall Space Flight Center, Aeroballistic Division Aerophysics Branch (Aero-G), ATTN: William Vaughn Huntsville, Alabama	1
Office of U. S. Naval Weather Service U. S. Naval Station, Washington 25, D. C.	1
Officer-in-Charge, U. S. Naval Weather Research Facility U. S. Naval Air Station, Norfolk, Virginia	1
U. S. Army Corps of Engineers Snow, Ice, and Permafrost Research Establishment 1215 Washington Avenue, Wilmette, Illinois	1
U. S. Army Corps of Engineers, Waterways Experiment Station Vicksburg, Mississippi	1
Office of the Chief of Ordnance, Department of the Army Washington 25, D. C.	1
Chief, Aerophysics Branch, Aeroballistics Laboratory Army Ballistic Missile Agency, Redstone Arsenal, Alabama	1
Chief, West Coast Office U. S. Army Signal Research and Development Laboratory Bldg 13, 75 South Grand Avenue Pasadena 2, California	1
Commanding Officer, ATTN: Technical Information Section Picatinny Arsenal, Dover, New Jersey	1
Chief, Meteorology Division, U. S. Army Chemical Corps Proving Ground Dugway Proving Ground, Utah	1

DISTRIBUTION (contd)	<u>No. of Copies</u>
New Mexico Institute of Mining and Technology ATTN: Mr. M. Brook, Socorro, New Mexico	1
Cornell Aeronautical Laboratory, ATTN: Mr. S. Chapman Buffalo, New York	1
AVCO Research and Advanced Development ATTN: Mr. S. C. Coroniti, Boston, Mass.	2
U. S. Forest Service, ATTN: Mr. D. Fuquay Missoula, Montana	1
Institute of Geophysics, ATTN: Mr. R. E. Holzer University of California, Los Angeles, California	1
Meteorology Research, ATTN: Mr. P. B. MacCready Pasadena, California	1
Commander, Air Force Command and Control Development Division Geophysics Research Directorate, ATTN: Mr. R. C. Sagalyn L. G. Hanscom Field, Bedford, Mass.	1
Munitalp Foundation, Inc. ATTN: Mr. V. J. Schaefer Schenectady, New York	1
U. S. Naval Research Laboratory, ATTN: Mr. H. A. Taylor, Jr. Washington 25, D. C.	1
Arthur D. Little, Inc., ATTN: Mr. B. Vonnegut Cambridge, Mass.	1
USASMSA Liaison Office, Room 4D117, USASRDL	1
Corps of Engineers Liaison Officer, Room 4D123, USASRDL	1
Marine Corps Liaison Officer, Room 4D119, USASRDL	1
U. S. CONARC Liaison Officer, USASRDL, Rm 4D115, USASRDL	3
Commanding Officer, U. S. Army Signal Research Activity, Evans Area	1
USASRDL Technical Documents Center, Evans Area	1
Mail File and Records, File Unit No. 3, Evans Area	1
Chief, Technical Information Division, Hq, USASRDL	6
Chief Scientist, USASRDL	1
Director, Meteorological Division, Surveillance Department	1

DISTRIBUTION (contd)	<u>No. of Copies</u>
Chief, Atmospheric Physics Branch, Meteorological Division	50
Chief, Meteorological Systems Branch, Meteorological Division	1
Chief, Meteorological Instrumentation Branch, Met. Div.	1
Technical Reports Unit, Meteorological Division	1
General Mills Electronics Group, ATTN: Mr. L. H. Ruhnke Minneapolis, Minn.	20

AD _____ Div. _____	UNCLASSIFIED	AD _____ Div. _____	UNCLASSIFIED
Army Signal Research and Development Laboratory, Fort Monmouth, N. J.	1. Step function 2. Ramp function 3. Periodic functions	Army Signal Research and Development Laboratory, Fort Monmouth, N. J.	1. Step function 2. Ramp function 3. Periodic functions
THE EFFECT OF MISMATCHING IN THE MEASUREMENT OF THE AIR-EARTH CURRENT-DENSITY by Lothar E. Rubnke. October 1961, 13 pp incl. illus, 7 ref. (USASRL Technical Report 2232) (DA Task 3499-27-005-03) (Unclassified Report)	I. Rubnke, Lothar E. II. Army Signal Research and Development Laboratory, Fort Monmouth, N. J. III. DA Task 3499-27- 005-03.	THE EFFECT OF MISMATCHING IN THE MEASUREMENT OF THE AIR-EARTH CURRENT-DENSITY by Lothar E. Rubnke. October 1961, 13 pp incl. illus, 7 ref. (USASRL Technical Report 2232) (DA Task 3499-27-005-03) (Unclassified Report)	I. Rubnke, Lothar E. II. Army Signal Research and Development Laboratory, Fort Monmouth, N. J. III. DA Task 3499-27- 005-03.
The errors are analyzed which arise when using Kasemir's method to measure air-earth current- density. Step function, ramp function, and perio- dic functions in the current as well as in the time-constant theta of the air are discussed.	UNCLASSIFIED	The errors are analyzed which arise when using Kasemir's method to measure air-earth current- density. Step function, ramp function, and perio- dic functions in the current as well as in the time-constant theta of the air are discussed.	UNCLASSIFIED
AD _____ Div. _____	UNCLASSIFIED	AD _____ Div. _____	UNCLASSIFIED
Army Signal Research and Development Laboratory, Fort Monmouth, N. J.	1. Step function 2. Ramp function 3. Periodic functions	Army Signal Research and Development Laboratory, Fort Monmouth, N. J.	1. Step function 2. Ramp function 3. Periodic functions
THE EFFECT OF MISMATCHING IN THE MEASUREMENT OF THE AIR-EARTH CURRENT-DENSITY by Lothar E. Rubnke. October 1961, 13 pp incl. illus, 7 ref. (USASRL Technical Report 2232) (DA Task 3499-27-005-03) (Unclassified Report)	I. Rubnke, Lothar E. II. Army Signal Research and Development Laboratory, Fort Monmouth, N. J. III. DA Task 3499-27- 005-03.	THE EFFECT OF MISMATCHING IN THE MEASUREMENT OF THE AIR-EARTH CURRENT-DENSITY by Lothar E. Rubnke. October 1961, 13 pp incl. illus, 7 ref. (USASRL Technical Report 2232) (DA Task 3499-27-005-03) (Unclassified Report)	I. Rubnke, Lothar E. II. Army Signal Research and Development Laboratory, Fort Monmouth, N. J. III. DA Task 3499-27- 005-03.
The errors are analyzed which arise when using Kasemir's method to measure air-earth current- density. Step function, ramp function, and perio- dic functions in the current as well as in the time-constant theta of the air are discussed.	UNCLASSIFIED	The errors are analyzed which arise when using Kasemir's method to measure air-earth current- density. Step function, ramp function, and perio- dic functions in the current as well as in the time-constant theta of the air are discussed.	UNCLASSIFIED
AD _____ Div. _____	UNCLASSIFIED	AD _____ Div. _____	UNCLASSIFIED
Army Signal Research and Development Laboratory, Fort Monmouth, N. J.	1. Step function 2. Ramp function 3. Periodic functions	Army Signal Research and Development Laboratory, Fort Monmouth, N. J.	1. Step function 2. Ramp function 3. Periodic functions
THE EFFECT OF MISMATCHING IN THE MEASUREMENT OF THE AIR-EARTH CURRENT-DENSITY by Lothar E. Rubnke. October 1961, 13 pp incl. illus, 7 ref. (USASRL Technical Report 2232) (DA Task 3499-27-005-03) (Unclassified Report)	I. Rubnke, Lothar E. II. Army Signal Research and Development Laboratory, Fort Monmouth, N. J. III. DA Task 3499-27- 005-03.	THE EFFECT OF MISMATCHING IN THE MEASUREMENT OF THE AIR-EARTH CURRENT-DENSITY by Lothar E. Rubnke. October 1961, 13 pp incl. illus, 7 ref. (USASRL Technical Report 2232) (DA Task 3499-27-005-03) (Unclassified Report)	I. Rubnke, Lothar E. II. Army Signal Research and Development Laboratory, Fort Monmouth, N. J. III. DA Task 3499-27- 005-03.
The errors are analyzed which arise when using Kasemir's method to measure air-earth current- density. Step function, ramp function, and perio- dic functions in the current as well as in the time-constant theta of the air are discussed.	UNCLASSIFIED	The errors are analyzed which arise when using Kasemir's method to measure air-earth current- density. Step function, ramp function, and perio- dic functions in the current as well as in the time-constant theta of the air are discussed.	UNCLASSIFIED

