

UNCLASSIFIED

AD NUMBER	
AD024953	
CLASSIFICATION CHANGES	
TO:	unclassified
FROM:	confidential
LIMITATION CHANGES	
TO:	Approved for public release, distribution unlimited
FROM:	Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; NOV 1953. Other requests shall be referred to U.S. Naval Proving Ground, Dahlgren, VA.
AUTHORITY	
USNSWC ltr, 7 Feb 1978; USNSWC ltr, 7 Feb 1978	

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED

AD_ 24 953

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION ALEXANDRIA VIRGINIA

**CLASSIFICATION CHANGED
TO: UNCLASSIFIED
FROM: CONFIDENTIAL
AUTHORITY:**

U.S.N.S.W.C. Notice 7 Feb. 78

UNCLASSIFIED

**NOTICE: THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE
NATIONAL DEFENSE OF THE UNITED STATES WITHIN THE MEANING
OF THE ESPIONAGE LAWS, TITLE 18, U.S.C., SECTIONS 793 and 794.
THE TRANSMISSION OR THE REVELATION OF ITS CONTENTS IN
ANY MANNER TO AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW.**

U. S. NAVAL PROVING GROUND
DAHLGREN, VIRGINIA

REPORT NO. 1209

AIRCRAFT GUN PROJECTILES

3rd Partial Report

ARMOR PENETRATION TESTS OF 20MM API PROJECTILE EX-5

FINAL Report

Copy No. 9

Task

Assignment MPG-R-3b-234-1-53

Classification CONFIDENTIAL
SECURITY INFORMATION

CONFIDENTIAL

NPO REPORT NO. 1209

Armor Penetration Tests of 20mm API Projectile Ex-5

PART A

SYNOPSIS

1. This report summarizes armor penetration tests conducted on the 20mm API Projectile Ex-5, now designated the 20mm API Projectile Mk 13 Mod 0, from initial development tests in September 1952 up to and including tests of the first two production lots performed in July 1953. These tests were conducted for the following purposes: to determine the armor piercing characteristics of the 20mm API Projectile Ex-5; to determine comparative penetration characteristics of the various types of 20mm API Ex-5, the 20mm APM95, and Caliber .50 APM2 projectiles; to establish penetration test velocities for the 20mm API Projectile Ex-5 for use in specification OS-2806.
2. On the basis of armor penetration, the 20mm API Projectile Ex-5 can be considered a satisfactorily effective projectile for service use.
3. The 20mm API Projectile Ex-5 is not quite as effective as the 20mm APM95 projectile in overall armor penetrating characteristics.
4. Except for an inferior performance by the unhardened body ZAL type, no significant difference in the overall terminal ballistic performance of the various types of 20mm API Ex-5 projectiles was noted.
5. Proposed specification velocities for acceptance testing of 20mm API Ex-5 projectiles have been determined and are given.

Armor Penetration Tests of 20mm API Projectile Ex-5
-----TABLE OF CONTENTS

	<u>Page</u>
SYNOPSIS	1
TABLE OF CONTENTS.	2
AUTHORITY.	3
REFERENCES	3
BACKGROUND	3
OBJECT OF TEST	3
PERIOD OF TEST	4
REPRESENTATIVES PRESENT.	4
DESCRIPTION OF ITEM UNDER TEST	5
DESCRIPTION OF TEST EQUIPMENT.	6
PROCEDURE.	6
RESULTS AND DISCUSSION	6
CONCLUSIONS.	11
APPENDIX A - NPG PHOTOGRAPH.	FIGURE 1
APPENDIX B - SUMMARY OF BALLISTIC RESULTS.	TABLES I-VI (Incl)
APPENDIX C - NPG PHOTOGRAPHS	FIGURES 2-12 (Incl)
APPENDIX D - FIRING RECORDS.	1-42 (Incl)
APPENDIX E - DISTRIBUTION.	1-2 (Incl)

Armor Penetration Tests of 20mm API Projectile Ex-5

PART B

INTRODUCTION

1. AUTHORITY:

The subject tests were conducted under reference (a), Task Assignment NPG-Re3b-236-1-53, as authorized by references (b), (c), (d), (e), and (f).

2. REFERENCES:

- a. BUORD Rest ltr Re3b-AAF:mt NP9 of 30 July 1952
- b. BUORD Rest ltr Re3b-AAF:mt NP9 of 11 August 1952
- c. BUORD Rest ltr Re3b-AAF:mt NORD 11694 of 9 October 1952
- d. BUORD Rest ltr Re3b-AAF:mt NORD 11694 of 6 January 1953
- e. BUORD Rest ltr Re3b-AAF:mt NORD 11694 of 14 March 1953
- f. BUORD Conf ltr Re3b-AAF:hjk S78-1(20mm) Ser 55883 of 28 April 1953
- g. NAVPROV Rest ltr OTK:TWT:dmf X1-2a-20mm Ser 35050 of 25 August 1953 to BUORD

3. BACKGROUND:

Since September 1952 the Naval Proving Ground has been conducting tests of various models of the 20mm API Projectile Ex-5. Results of all tests were reported informally to the Bureau of Ordnance thereby facilitating the release of this projectile to production. The projectile, now designated the 20mm API Projectile Mk 13 Mod 0, is to be used in service with the 20mm Gun Mk 12. This report formally covers all the armor penetration tests performed on the 20mm API Projectile Ex-5 as requested by references (b), (c), (d), (e), and (f).

4. OBJECT OF TEST:

These tests were conducted for the following purposes:

- a. To determine the armor piercing characteristics of the 20mm API Projectile Ex-5.
- b. To determine comparative penetration characteristics of the various types of 20mm API Ex-5, the 20mm APM95, and Caliber .50APM2 projectiles.
- c. To establish penetration test velocities for the 20mm API Projectile Ex-5 for use in specification OS-2806.

CONFIDENTIAL

NPG REPORT NO. 1209

Armor Penetration Tests of 20mm API Projectile Ex-5

5. PERIOD OF TEST:

a. Dates of Directives	11 August 1952 9 October 1952 6 January 1953 14 March 1953 28 April 1953
b. First Test Reported Here	4 September 1952
c. Last Test Reported Here	27 July 1953

6. REPRESENTATIVES PRESENT:

The following representatives were present to witness portions of the tests reported herein:

A. A. Famiglietti	Bureau of Ordnance Re3b
A. N. Boardslee	Bureau of Ordnance Re3d
C. L. Mosler	AINSMAT, Reading Pa.
W. R. Powl	Armstrong Cork Company
J. R. Konold	Armstrong Cork Company
L. E. Killian	Armstrong Cork Company
G. A. Reinhard, Jr.	Armstrong Cork Company
H. M. Yohn	Armstrong Cork Company

Armor Penetration Tests of 20mm API Projectile Ex-5

PART C

DETAILS OF TEST

7. DESCRIPTION OF ITEM UNDER TEST:

The following projectiles were tested:

a. 20mm API Projectiles Ex-5 manufactured by Armstrong Cork Company of the types identified below:

<u>Type</u>	<u>Date</u>	<u>Body-Adapter Assembly</u>	<u>Body Hardening</u>
IVEBX	Sep 1952	Original design hot shrunk through die.	Hardened
IVEAL	Sep 1952	Original design hot shrunk only.	Not hardened
IVCB5	Nov 1952	Body adapter joint modified.	Hardened No. 5 grain size.
IVCB6	Nov 1952	Mechanically same as IVCB5.	Hardened No. 6 grain size.
IVCB7	Nov 1952	Mechanically same as IVCB5.	Hardened No. 7 grain size.
E2BLT	Jan 1953	New E2BT design.	Hardened
E2BLT-C	Mar 1953	E2BT design.	Hardened No. 2-1/2 grain size.
E2BLT-M	Mar 1953	E2BT design.	Hardened No. 5-1/2 grain size.
E2BLT-F	Mar 1953	E2BT design.	Hardened No. 7-1/2 grain size.
EX-5A8	May 1953	E2BT design.	Hardened
Mk 13 Mod 0	July 1953	E2BT design.	Hardened (see Figure 1)

Appendix (A), Figure 1 shows a cross section of the most recent type Ex-5 projectile obtained from the pilot lot of Mk 13 Mod 0 projectiles.

b. For comparative purposes 20mm APM95 projectiles from lot NP-3-24-45 and Caliber .50APM2 projectiles from lot SL-53925.

Armor Penetration Tests of 20mm API Projectile Ex-5

8. DESCRIPTION OF TEST EQUIPMENT:

a. Guns:

20mm Tube No. 34492
20mm Accuracy Barrels No. PAD-1 and Ex-178
Caliber .50 Accuracy Barrel No. 299

b. Cases and Powder:

20mm M21A1 Primed Case with IND 32774 Powder
20mm Mk 5-O Case with Mk 47-O Primer and IMR 6962
lot DSZA 8 Powder.
Caliber .50 Primed Case with RAD-20055 Powder

c. Armor:

1/2" and 3/4" Face Hardened Armor Carburized and
Pluramelt types
3/4" Homogeneous Armor (STS)
1" Homogeneous Armor (STS)
1-1/4" Homogeneous Armor (STS)

d. A 160' range with armor plate butt and velocity measuring equipment.

9. PROCEDURE:

The various types of 20mm API Projectiles Ex-5 listed in paragraph 7a were inert loaded to weight (1700 grains) with the exception of the EX-5A8 type and fired versus armor targets as listed in paragraph 8c. Ballistic limits were established for most of the conditions of test.

10. RESULTS AND DISCUSSION:

a. The ballistic results are summarized in Tables I to VI, Appendix (B), and are given in detail in Appendix (D) for each projectile-plate-obliquity combination. Photographs of typical projectiles after impact are contained in Figures 2 through 12, Appendix (C).

CONFIDENTIAL

NPG REPORT NO. 1209

Armor Penetration Tests of 20mm API Projectile Ex-5

b. In the initial phase Caliber .50 APM2, 20mm APM95 and 20mm API Ex-5 projectiles of types EBX and EAL were tested against the same armor targets. To establish some comparison among these projectiles, limit penetration coefficients were calculated using the following formula:

$$P(e/d, \theta) = \frac{41.57 M^{1/2} VP50 \cos \theta}{e^{1/2} d}$$

$P(e/d, \theta)$ is limit penetration coefficient

e is the plate thickness in inches

d is the diameter of the projectile body in inches

M is the mass of projectile body in pounds

$VP50$ is the mean protection limit velocity in feet per second

θ is the obliquity (angle between trajectory and normal to plate at impact)

Characteristics of the projectiles were as follows:

<u>Projectile</u>	<u>Diameter of Core or Body Inches</u>	<u>Weight of Core or Body</u>
Caliber .50 APM2	.4272	.0560 pounds
20mm APM95	.7686	.2529 pounds
20mm API Ex-5 (Original Design)	.7686	*.1643 pounds

* Body weight of original design types EBX, EAL, and CB. The body weight of the new E2BT design was only .1613 pounds to provide for heavier adapter.

CONFIDENTIAL

NPG REPORT NO. 1209

Armor Penetration Tests of 20mm API Projectile Ex-5

Performances are compared in the table below:

<u>Conditions of Test</u>	<u>Projectile</u>	<u>"VP50" Limit ft./sec.</u>	<u>Limit Penetration Coefficient P(e/d.e)</u>	<u>Limit Coefficient in terms of % of 20mm APM95 Limit</u>
1/2" Face Hardened 30°	Cal.50APM2	2502	70,000	131
"	20mm APM95	1639	53,450	100
"	20mm API Ex-5 (EBX)	1909	50,150	94
3/4" Homo. 30°	Cal.50APM2	2342	54,200	110
"	20mm APM95	1805	49,350	100
"	20mm API Ex-5 (EBX)	2691	59,300	120
1" Homo. 0°	Cal.50APM2	2404	55,750	103
"	20mm APM95	1972	54,000	100
"	20mm API Ex-5 (EBX)	2626	58,000	107
1-1/4 Homo. 0°	20mm APM95	>3006	>73,300	100
"	20mm API Ex-5 (EBX)	3115	61,250	<84

The above results indicate that the 20mm API Ex-5 (EBX) projectile requires less energy than the Caliber .50 APM2 or 20mm APM95 to penetrate 1/2" face hardened armor at 30° obliquity, but requires more energy to penetrate 3/4" homogeneous armor at 30° obliquity and 1" homogeneous armor at 0° obliquity than either the Caliber .50APM2 or 20mm APM95. Against 1-1/4" homogeneous at 0° obliquity the 20mm API Ex-5 (EBX) was able to penetrate but the 20mm APM95 could not. A possible explanation is that the long M95 body with soft base is upset during penetration where as the short relatively hard Ex-5 body does not deform during penetration. The 20mm Ex-5 (EAL) projectile with unhardened body showed poor armor penetrating characteristics as expected and as evident from the high ballistic limits obtained (Appendix (D)).

CONFIDENTIAL
SECURITY INFORMATION

Armor Penetration Tests of 20mm API Projectile Ex-5

c. In the second phase three types of 20mm Ex-5 projectiles identified as CB-5, 6 and 7 were tested. These projectiles were identical mechanically and varied only insofar as the heat treated grain size in the bodies. The bodies were No. 5, No. 6, and No. 7 grain size respectively which is not considered much variation. No difference in the armor penetration performance was noted against either 1/2" face hardened armor at 30° obliquity or 1" homogeneous armor at 0° obliquity.

d. Type E2BLT Ex-5 projectiles with a new strengthened body-adapter design to facilitate security of parts were next tested for penetration. These projectiles gave a similar penetration performance to types CB-5, 6 and 7 tested previously against both 1/2" face hardened armor at 30° obliquity and 1" homogeneous armor at 0° obliquity.

e. Three types of 20mm Ex-5 projectiles of the new body-adapter design with a wide spread in body grain size were given penetration tests. These projectiles were the E2BLT-C with a No. 2-1/2 (coarse) grain size, the E2BLT-M with a No. 5-1/2 (medium) grain size, and the E2BLT-F with a No. 7-1/2 (fine) grain size. Four ballistic tests were conducted in an attempt to detect the influence of this considerable variation in grain size. Tests against 1" and 1-1/4" homogeneous armor at 0° obliquity and against 3/4" face hardened armor at 20° obliquity did not distinguish between the three types. A test made with the projectiles at subzero temperature (-65°F) against 3/4" homogeneous armor at 30° obliquity showed a slightly poorer performance for the E2BLT-C coarse grain type. However, the differences among the three types of projectiles in overall ballistic penetration properties are not considered significant.

f. Two hundred 20mm EX-5A8 projectiles, incendiary loaded by National Fireworks Ordnance Corporation, were tested at the four different conditions of test to be included in the specifications. The results obtained are summarized in Appendix (B) along with the results obtained on the pilot lot and first two acceptance lots of 20mm Mk 13 Mod 0 projectiles. As regards acceptance ballistic testing of the Ex-5 projectiles, the following agreements were made at a meeting in the Bureau of Ordnance on 18 June 1953:

(1) That the present method given in OS-2806 of listing numerical velocities for a particular condition was satisfactory.

(2) That the Naval Proving Ground would furnish velocities for the desired conditions of test, to be listed in an amended OS-2806.

Armor Penetration Tests of 20mm API Projectile Ex-5

(3) That the protection criterion for complete penetration will be employed in the specification. Complete penetration will be considered to have occurred when a hole is produced in a 1/16" mild steel plate mounted approximately 6" behind and parallel to the armor plate, provided a through hole is evident in the armor.

(4) That the Bureau of Ordnance would authorize the Naval Proving Ground to obtain limit velocities on test plates with standard and acceptance lots of projectiles under the amended specification.

The following table lists the average performance to date for each condition of test and compares these average values with the velocities proposed in reference (g):

<u>Conditions of Test</u>	<u>No. Limits Determined</u>	<u>Average WVP50M Limit (Corrected to Nominal Thickness)</u>	<u>Specifi- cation Value Proposed</u>	<u>Specification value in Terms of % of Average Limit</u>
1/2" Face Hardened Pluramelt at 30°	5	2143 f.s.	2225 f.s.	103.8
1/2" Homo. 30°	6	1994 f.s.	2075 f.s.	104.1
3/4" Homo. 30°	6	2714 f.s.	2850 f.s.	105.0
1" Homo 0°	13	2687 f.s.	2800 f.s.	104.2

In view of the above results the proposed values should prove satisfactory for acceptance testing under OS-2806.

Armor Penetration Tests of 20mm API Projectile Ex-5
-----PART DCONCLUSIONS

11. It is concluded that:

a. On the basis of armor penetration the 20mm API Projectile Ex-5 can be considered a satisfactorily effective projectile for service use.

b. The 20mm API Projectile Ex-5 is not quite as effective as the 20mm APM95 projectile in overall armor penetrating characteristics.

c. Except for an inferior performance by the unhardened body EAL type, no significant difference in the overall terminal ballistic performance of the various types of 20mm API Ex-5 projectiles was noted.

d. Proposed specification velocities for acceptance testing of 20mm API Ex-5 projectiles have been determined.

CONFIDENTIAL

NPG REPORT NO. 1209

Armor Penetration Tests of 20mm API Projectile Ex-5

The tests upon which this report is based were conducted by:

T. W. TRUSLOW, Lieutenant (jg), USNR-R
Firing Officer
Light Armor Battery
Terminal Ballistics Department


This report was prepared by:

J. J. GLANCY, Ordnance Engineer
Light Armor Battery Officer
Terminal Ballistics Department

This report was reviewed by:

R. H. LYDDANE, Director of Research
Terminal Ballistics Department
W. B. ROBERTSON, Lieutenant Commander, USN
Terminal Ballistics Officer
Terminal Ballistics Department
C. C. BRAMBLE, Director of Research, Ordnance Group

APPROVED: J. F. BYRNE
Captain, USN
Commander, Naval Proving Ground



E. A. RUCKNER
Captain, USN
Ordnance Officer
By direction

CONFIDENTIAL

NPG REPORT NO. 1209

**U. S. NAVAL PROVING GROUND
Dahlgren, Virginia**

**Third Partial Report
on
Aircraft Gun Projectiles**

**Final Report
on
Armor Penetration Tests of
20mm API Projectile Ex-5**

X

**Project No.: NPG-Re3b-236-1-53
Copy No.: 9
No. of Pages: 12**

Date: NOV 25 1953

**CONFIDENTIAL
SECURITY INFORMATION**

AUG. 1953

HARDNESS DISTRIBUTION AND MACROSECTION OF 20MM AP PROJECTILE MK 13-0 PILOT LOT

Hardness Values: Vickers Pyramid (50kg.)

Etch: Ammonium Persulfate

CONFIDENTIAL

Security Information

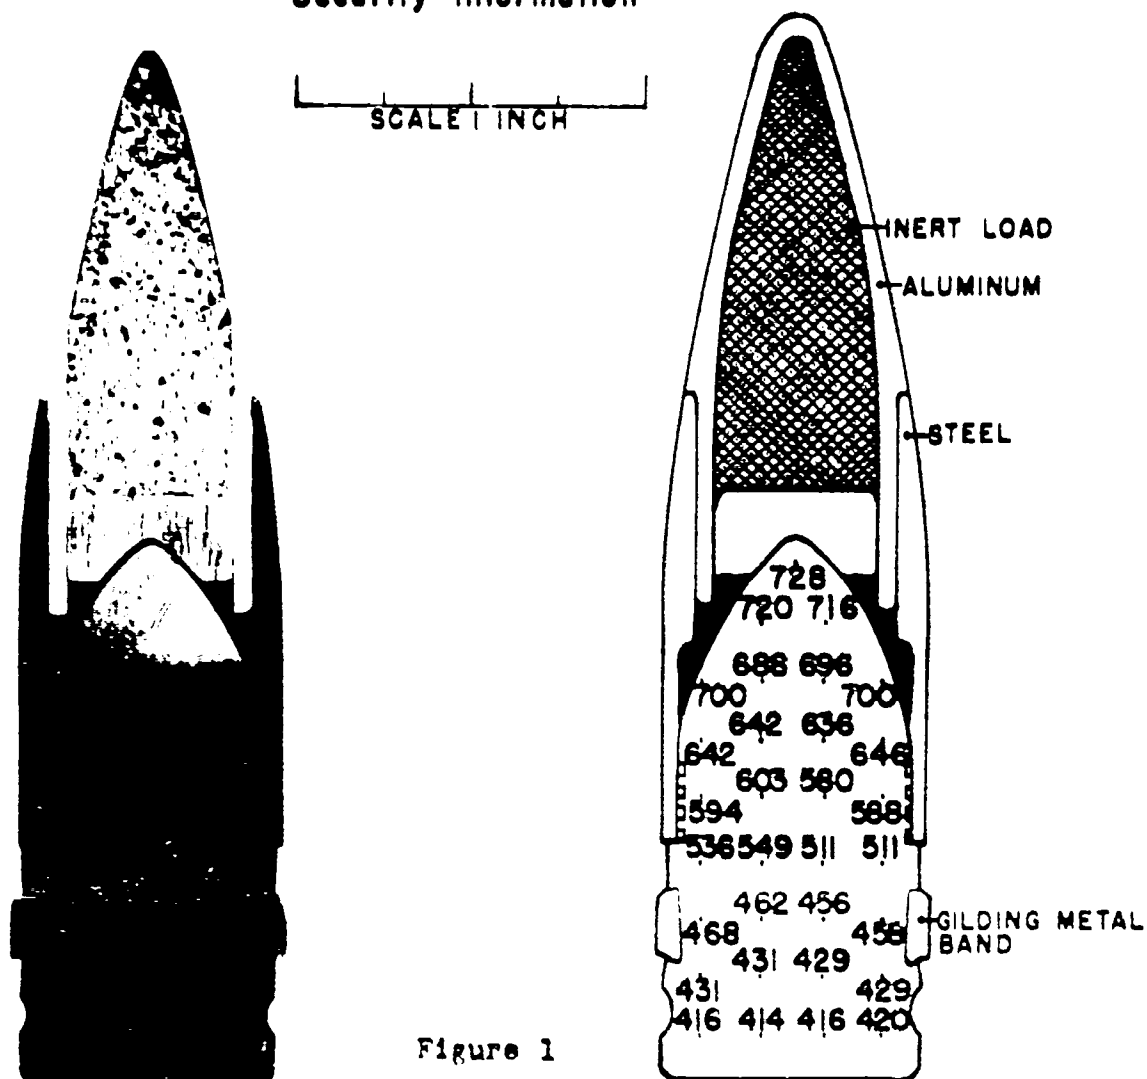


Figure 1

TABLE I

SUMMARY OF BALLISTIC RESULTS 1/2" FACE HARDENED ARMOR 30° ON INCLINITY

Appendix (D) Page No.	Projectile	Type	Plate	Thickness	"VPMIN" Limit Ft./sec.	"VPSO" Limit Ft./sec.	Remarks
1	20mm Ex-5	EMK	Diston- Carburized	0.522	1909	1909	Reported NPG Report No. 478 of 19 January 1950.
4	20mm Ex-5	EAL	Diston- Carburized	0.522	2440	2440	
7	20mm APMS6	--	Diston- Carburized	0.522	1639	1639	
--	Cal. 50APM2	--	Diebold- Carburized	0.508	--	2502	
12	20mm Ex-5	CB-5	Diston- Carburized	0.516	1817	1842	
14	20mm Ex-5	CB-6	Diston- Carburized	0.516	1811	1830	
16	20mm Ex-5	CB-7	Diston- Carburized	0.516	1828	1864	
18	20mm Ex-5	E2HLT	Diston- Carburized	0.516	1856	1862	
37-38	20mm Ex-5	A-8	Diston- Carburized	0.496	1934	1995	
39-40	20mm Ex-6	A-8	Reading- Pluramelt	0.506	2203	2242	
41	20mm Ex-6	A-8	Reading- Pluramelt	0.506	2030	2044	
--	20mm Mk 13 Mod 0	Pilot Lot	Reading- Pluramelt	0.506	2126	2257	
--	20mm Mk 13 Mod 0	Lot 1-3	Reading- Pluramelt	0.506	2102	2169	Reported in Refer- ence (g).
--	20mm Mk 13 Mod 0	Lot 2-3	Reading- Pluramelt	0.506	2087	2087	

CONFIDENTIAL
SECURITY INFORMATION

APPENDIX B

TABLE II

SUMMARY OF BALLISTIC RESULTS 3/4" HOMOGENEOUS ARMOR 30° ORBLIQUITY

Appendix (D) Page No.	Projectile	Type	Plate	Thickness	"VPMIN" Limit Pt./sec.	"VPSO" Limit Pt./sec.	Remarks
1-2	20mm Ex-5	EHL	Carnegie ST8	0.742	2691	2691	
4-5	20mm Ex-5	EAL	"	0.742	2874	2874	
7-8	20mm APMS5	--	"	0.742	1805	1805	
11	Cal. 50APM2	--	"	0.742	2294	2342	
26-27	20mm Ex-5	E2HLT-C	"	0.739	2701	2808	Projectiles at sub-zero temp. (-65°F)
28	20mm Ex-5	E2HLT-M	"	0.739	2665	2733	"
29-30	20mm Ex-5	E2HLT-P	"	0.739	2800	2708	"
34	20mm Ex-5	A-8	"	0.736	2723	2723	"
35-36	20mm Ex-5	A-8	"	0.736	2599	2692	"
--	20mm Mk 13 Mod 0	Pilot Lot	"	0.737	2753	2753	Reported in Reference (8).
--	20mm Mk 13 Mod 0	Lot 1-3	"	0.737	2643	2661	"
--	20mm Mk 13 Mod 0	Lot 2-3	"	0.737	2578	2633	"

TABLE III

SUMMARY OF BALLISTIC RESULTS 1" HOMOGENEOUS ARMOR 0° OBLIQUITY

Appendix (D) Page No.	Projectile	Type	Plate	Thickness	"VPMH" Limit Ft./sec.	"VP50" Limit Ft./sec.	Remarks
2-3	20mm Ex-5	EHX	Carnegie STS	0.986	2612	2626	
6	20mm Ex-5	EAL	"	0.986	2997	2997	
8	20mm APMS5	--	"	0.986	1972	1972	
10	Cal. 50APM2	--	"	0.986	2404	2404	
13	20mm Ex-5	CB-5	"	0.986	2630	2630	
15	20mm Ex-5	CB-6	"	0.986	2653	2653	
17	20mm Ex-5	CB-7	"	0.986	2631	2631	
19	20mm Ex-5	E2HLT	"	0.982	2626	2644	
20-21	20mm Ex-5	E2HLT-C	"	0.982	2652	2661	
23	20mm Ex-5	E2HLT-M	"	0.982	2646	2646	
24	20mm Ex-5	E2HLT-P	"	0.989	2674	2674	
42	20mm Ex-5	A-8	"	0.989	2694	2694	
--	20mm Mk 13 Mod 0	Pilot Lot	"	0.989	2721	2725	Reported in Reference (g).
--	20mm Mk 13 Mod 0	Pilot Lot	"	0.985	2665	2683	"
--	20mm Mk 13 Mod 0	Lot 1-3	"	0.989	2712	2712	"
--	20mm Mk 13 Mod 0	Lot 2-3	"	0.989	2699	2699	"

CONFIDENTIAL
SECURITY INFORMATION

APPENDIX B

TABLE IV

SUMMARY OF BALLISTIC RESULTS 1-1/4" HOMOGENEOUS ARMOR AT 0° OBLIQUITY

Appendix (D) Page No.	Projectile	Type	Plate	Thickness	"VPMIN" Limit Ft./sec.	"VPMAX" Limit Ft./sec.	Remarks
3	20mm Ex-5	EHX	Carnegie ST3	1 1/2 1/4	3115	3115	
9	20mm APMS6	--	"	1 1/2 1/4	> 3006	> 3008	
21	20mm Ex-5	E2HLT-C	"	1 1/2 1/4	3223	3223	
23	20mm Ex-5	E2HLT-M	"	1 1/2 1/4	3241	3241	
25	20mm Ex-5	E2HLT-F	"	1 1/2 1/4	3261	3261	

TABLE V

SUMMARY OF BALLISTIC RESULTS 3/4" FACE HARDENED ARMOR AT 20° OBLIQUITY

Appendix (D) Page No.	Projectile	Type	Plate	Thickness	"VPMIN"		"VP50"		Remarks
					Limit	Ft./sec.	Limit	Ft./sec.	
20	20mm Ex-5	E2BLT-C	Reading- Fluoromelt	0.766	2342		2342		
22	20mm Ex-5	E2BLT-M	"	0.766	2283		2306		
24	20mm Ex-5	E2BLT-F	"	0.766	2312		2339		

TABLE VI

SUMMARY OF BALLISTIC RESULTS 1/2" HOMOGENEOUS ARMOR AT 30° OBLIQUITY

Appendix (D) Page No.	Projectile	Type	Plate	Thickness	"VPHM" Limit Ft./sec.	"VP60" Limit Ft./sec.	Remarks
31	20mm Ex-5	A-8	Carnegie STS	0"501	1939	1939	
32	20mm Ex-5	A-8	"	0"499	2013	2013	
33	20mm Ex-5	A-8	"	0"498	1978	1978	
--	20mm Mk 13 Mod 0	Pilot Lot	"	0"501	1972	1972	Reports in Refer- ences (g).
--	20mm Mk 13 Mod 0	Lot 1-3	"	0"499	2031	2031	"
--	20mm Mk 13 Mod 0	Lot 2-3	"	0"499	2025	2025	"

AP M95



1



2



3



5



6



7




AP M95



1




2



6



7



AP M95



1

4

5

9

11

12



EAL



1

5


7

8

10

11

EBX

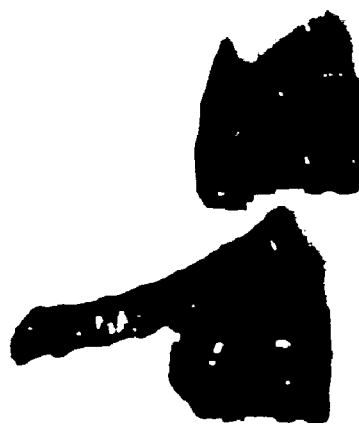

1

2

3

5

9

11



EAL



1

2

3

4

EBX



1

5

7

10

12

13



EAL



3

4

EBX



1

2

4

5

7

10



EBX



2 5 7




CB5




1 3 4 6 9 11

CB6

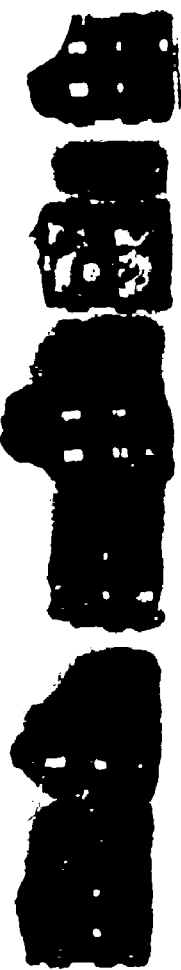


1 3 5 6 7 13

CB7

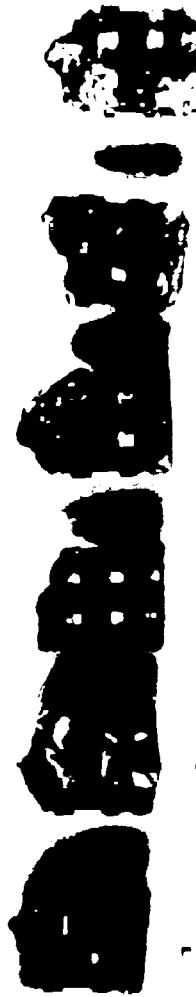

1 2 3 6 12 13



CB5



2 3 4 6

CB6




3 4 10


CB7



3 4 5



E2BLT



E2BLT



1 2 7



NAVAL PROVING GROUND
LIGHT ARMOR BATTERY
Temperature

PROJECTILE FIRING RECORD

SHEET NO. 1
Encl. ()

Anneal :
Norm :
Harden :
Quench :
Draw :

Time YP:
TS:
EL:
RA:

Proj : 20MM API 20MM API 20MM API
Gun : FAD-1 FAD-1 FAD-1
Range :
Plate :
Gauge :
Obl. :
Req : 25
LC :
HI :
Limit :

C :
Mn :
S :
P :
Si :
Ni :
Cr :
Mo :

3,8
Date : 4 SEPT 1952
Mfr : ARMSTRONG CORP
Contr : EXPERIMENTAL
Specs :
Proj : 20MM API EXS (4-50K)
Group : 450K - HARDENED CORP
Heat :
Steel : -

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet	Condition of Bullet
1	20MM API	1695grains	300	1983	30°	0	X-R	Nose chipped off 3/8" Pen
2	"	"	300	1970	30°	0	X-R	Nose chipped off 1/2" Pen
3	"	"	260	1808	30°	0	T-R	" " " SB
4	"	"	280	1884	30°	0	T-R	Not Recurred SB
5	"	"	290	1970	30°	0	X-R	Nose chipped off 3/8" Pen
6	"	"	285	1916	30°	0	X-R	" " " 1/2" Pen
7	"	"	285	1963	30°	0	Diagonal split old round	
8	"	"	280	1884	30°	0	T-R	Nose chipped off SB
9	"	"	285	1903	30°	0	T-R	" " " Pen 5/8"
10	"	"	285	1854	30°	Slight	T-R	" " " SB
11	"	"	285	1915	30°	0	X-R	" " " 1/2" Pen
12	"	"	285	1858	30°	0	T-R	" " " SB
13	"	"	285	1885	30°	0	T-R	" " " SB
14	"	"	285	1901	30°	0	T-R	" " " Pen 5/8"
Plate 1554								
1	450K	1695grains	340	2185	30°	0	T-R	Intact HB
2	CONFIDENTIAL		2370	30°	0	T-R	Broken up	HB
3	SECURITY INFORMATION		2182	30°	0	T-R	Intact	HB

NAVAL PROVING GROUND

PROJECTILE FIRING RECORD

SHEET NO. _____

PROJECTILE

S78-1(54-20mm

Encl. ()

20MM API-EX5
EBX

36226-14

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet.	Condition of Bullet
4	EX5-EBX	16956gms	400	2267	30	0	T-RJ	Intact HB
5	"	"	430	2411	30	0	T-RJ	Nose off HB
6	"	"	500	2672	30	0	I-CIP	Intact HB 5/8"
7	"	"	540	2819	30	0	X-RJ	Nose off 3/4" Hole
8	"	"	540	2824	30	0	Disregard	hit primed.
9	"	"	540	2742	30	0	X-RJ	Nose off 3/4" Hole
10	"	"	520	2846	30	0	C-R	Nose off 3/4" Hole
11	"	"	500	2631	30	0	I-CIP	Intact HB 1 1/8"
12	"	"	500	2709	30	0	X-FIP	Nose off 1 1/8" Hole
13	"	"	510	2722	30	0	X-FIP	Nose off 3/4" Hole
14	"	"	490	2662	30	0	I-FIP	Nose broken. Pin 5/8"
15	"	"	490	2641	30	0	I	

Plate 1068-ST5

1	EX5-EBX	1695	540	2813	0	0	C	Intact 3/4" Hole
2	"	"	500	2707	0	0	C	Intact 3/4" Hole
3	"	"	480	2553	0	0	I-CIP	Intact 1/2" Nose
4	"	"	490	2624	0	0	C	Intact 3/4" Hole
5	"	"	480	2727	0	0	C	Intact 3/4" Hole
6	"	"	480	2600	0	0	I-CIP	Intact 7/8" Nose
7	CONFIDENTIAL		480	2667	0	0	C	Intact 3/4" Hole
8	SECURITY INFORMATION		480	2628	0	0	I-CIP	Intact 1" Nose

Page 2

SHEET NO. _____

Encl. ()

8 Sept 1952

[illegible]

Page 3

NAVAL PROVING GROUND
LIGHT ARMOR BATTERY
Temperature

PROJECTILE FIRING RECORD

SHEET NO. 1
Encl. ()

Anneal :
Norm :
Harden :
Quench :
Draw :

YP:
TS:
EL:
RA:

Time

Proj : 20MM API-EA EA-20MM EA-20MM
Gun : FAD-1 FAD-1 FAD-1
Range :
Plate : M.H. DISTON 575-1554 575-1069
Gauge : 0.522 0.742 0.996
Obl. : 30° 300 00
Req ± 25 :
LC : 2480 2994 3012
HI : 2400 2974 2972
Limit : 2440 2974 2997

C :
Mn :
S :
P :
Si :
Ni :
Cr :
Mo :

5, 9,
Date : 4 SEPT 1952
Mfr : ARMSTRONG CORP
Contr : EXPERIMENTAL
Specs :
Proj : 20MM API EX-5 (4FA-5)
Group : EA-EAL-DIMARTINCO
Heat :
Steel : -

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet	Condition of Bullet
1	20MM API-EA	1692 ± 10-7	290	1882	30°	0	T-R	Nose chipped off SB
2	"	"	300	2066	30°	0	T-R	Bulging SB
3	"	"	320	2094	30°	0	T-R	Nose chipped off SB
4	"	"	340	2148	30°	0	Diagonal hit & nose chipped off	
5	"	"	380	2382	30°	0	T-R	Bulging 30° E.P.
6	"	"	420	2403	30°	0	Diagonal hit & nose chipped off 1 1/4" PL	
7	"	"	430	2518	30°	0	X-R	Nose chipped off 3/4" PL
8	"	"	420	2480	30°	0	X-R	Nose off 3/4" PL
9	"	"	400	2473	30°	0	Diagonal hit & nose chipped off	
10	"	"	380	2263	30°	0	T-R	Nose off SB
11	"	"	400	2400	30°	0	T-R	Nose off MB
Plate 575-1554								
1	EAL	1692	600	3044	30°	0	C	Nose chipped off 1 1/4" PL
2	"	"	500	2802	30°	0	T-R	Nose chipped off 1 1/4" PL
3	"	"	500	2694	30°	0	T-R	Nose chipped off HB
4	"	"	520	2740	30°	0	T-R	Nose chipped off HB
CONFIDENTIAL								
6	SECURITY INFORMATION	5740	2874	30°	0	X-R	Nose off 3/4" PL	

Page 4

SHEET NO. _____

Encl. ()

426291-14

Page 5

SHEET NO. _____

Encl. ()

PLATE 1" STS - 0° - No 1068

[illegible]

Page 6

NAVAL PROVING GROUND
LIGHT ARMOR BATTERY
Temperature

PROJECTILE FIRING RECORD

SHEET NO. 1
Encl. ()

Time

Anneal :
Norm :
Harden :
Quench :
Draw :

YP:
TS:
EL:
RA:

CORE WT-1770

Proj : 20MM APMS 20MM M5 20MM M195
Gun : 8057 : 34492 : 34492
Range : 2
Plate : 1 (Paschard) STS : STS-1068
Gauge : 0.522 : 0.742 : 0.986
Obl. : 30° : 30° : 0°
Req ± 25 :
LC : 1639 : 1805 : 1978
HI : 1639 : 1805 : 1965
Limit : 1639 : 1805 : 1972

C :
Mn :
S :
P :
Si :
Ni :
Cr :
Mo :

5, 8,
Date : 4, Sept 1952
Mfr : National Pneumatic
Contr : EXP. TEST.
Specs :
Proj : 20MM APMS
Group : Lot 3-24-45
Heat :
Steel :

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet	Condition of Bullet
1	20MM APMS 1980 Gms	1289 Gms	200	1432	30°	0	I	NR - 1/8"
2	"		250	1639	30	0	C	NR - 1/8" x 1/8" C Pen
3	"		230	1545	30	0	I	RI - Pen 5 3/4"
4	"		230	1563	30	0	I	RI - Pen 5 3/4"
5	"		235	1533	30	0	RI	RI - Pen 5 3/4"
6	"		230	1521	30	0	I	RI - 5/8"
7	"		235	1510	30	0	I	RI - 1/8"
8	"		240	1500	30	0	I	RI - 1/8"
9	"		250	1533	30	0	I	RI - 1/8"
10	"		275	1639	30	0	I	RI - 5/8"
11	"		300	1785	30	0	C	NR - 3/4" x 1/8" C Pen
12	"		275	1675	30	0	C	NR - 5/8" x 3/4" C Pen
STS-A-1554								
1	20MM APMS		310	1919	30°	0	X RIP	Broken up 3/4" 1/8"
2	"		290	1764	30°	0	I RIP	Broken up Pen 5/8"
3	"		300	1805	30°	0	X RIP	Nose off 3/4" 1/8"
4	"		300	1805	30°	0	I RIP	Intact 1/8" Nose
5	"		295	1777	30°	0	I RIP	Nose off 1/8" Nose

SHEET NO. _____

Encl. ()

575 - 1068 - 0"986

Page 8

SHEET NO. _____

Encl. ()

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet.	Condition of Bullet
1	44 SM 45	1980 GRAMS	500	2792	0	0	I RND UP	MB
2	"	"	520	2903	0	0	I RND UP	MB
3	"	"	510	2843	0	0	I RND UP	MB
4	"	"	540	2711	0	0	I RND UP	MB
5	"	"	580	2862	0	0	I RND UP	MB
6	"	"	600	2943	0	0	I RND UP	MB
7	"	"	610	3006	0	0	I RND UP	MB
8	"	"	500	2594	0	0	I RND UP	MB
9	"	"	480	2535	0	0	I RND UP	MB
10	"	"	480	2460	0	0	I RND UP	MB
11	"	"	480	2551	0	0	I RND UP	MB
12	"	"	480	2475	0	0	I RND UP	MB

Page 9

NAVAL PROVING GROUND
LIGHT ARMOR BATTERY

PROJECTILE FIRING RECORD

SHEET NO. 1
Encl. ()

Anneal :
Norm :
Harden :
Quench :
Draw :

Temperature

Time

YP:
TS:
EL:
RA:

Proj : Cal 50 M2 : Cal 50 M2
Gun : 299 : 299
Range : 1 : 1
Plate : 975-10000 : 975-1554
Gauge : 0.986 : 0.742
Obl. : 0 : 30
Req ± 25 : 0 : 30
LC : 2409 : 2295
HI : 2399 : 2292
Limit : 2404 : 2294

C :
Mn :
S :
P :
Si :
Ni :
Cr :
Mo :

Date : 5, 8, Sept 1952
Mfr :
Contr : EXP.
Specs :
Proj : Cal 50 APM2
Group :
Heat :
Steel :

+36236-1.4

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet	Condition of Bullet
1	Cal 50 M2	1068	15.4	2668	0	0	C	Not Penetrated 7/16" Hole
2	"		14.9	2545	0	0	C	Not Penetrated 7/16" Hole
3	"		14.0	2391	0	0	5 B	" 1/8" Hole
4	"		14.5	2568	0	0	C	" 7/16" Hole
5	"		14.2	2493	0	0	C	" 7/16" Hole
6	"		14.2	2459	0	0	C	" 7/16" Hole
7	"		14.0	2493	0	0	C	" 7/16" Hole
8	"		13.8	2387	0	0	D	Not Penetrated 7/16" Hole
9	"		14.0	2409	0	0	C	Not Penetrated 7/16" Hole
10	"		13.8	2381	0	0	I CR	1" Hole
11	"		13.8	2477	0	0	C	Not Penetrated 7/16" Hole
12	"		13.6	2399	0	0	I CR	1/2" Hole
13	"		13.6	2391	0	0	I CR	1" Hole
Plate No A-1554								
1	Cal 50 M2		14.9	2577	30	0	C	NR 7/16" Hole
2	"		13.8	2391	30	0	I CR	1/2" Hole
3	"		14.9	2449	30	0	C	NR 7/16" Hole
4	"		13.6	2393	30	0	C	NR 7/16" Hole

CONFIDENTIAL

SECURITY INFORMATION

(Page 10)

SHEET NO. _____

Encl. ()

8 Sept 1952

Page 11

NAVAL PROVING GROUND
LIGHT ARMOR BATTERY

PROJECTILE FIRING RECORD

SHEET NO. 1
Encl. ()

Anneal :
Norm :
Harden :
Quench :
Draw :

Time

YP:
TS:
EL:
RA:

Proj : 5X-5 CB-3
Gun : FAD-1
Range : 1
Plate : F.M. 2000 ft
Gauge : 0.516
Obl. : 30°
Req ± 25 : 1829
LC : 1805
HI : 1817
Limit : 1812

C :
Mn :
S :
P :
Si :
Ni :
Cr :
Mo :

Date : 5, 6, NOV. 1952
Mfr : ARMSTRONG CORP
Contr : EXA
Specs : --
Proj : 20MM API EX-3
Group : IX CB-3
Heat : --
Steel : --

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet	Condition of Bullet
1	EX-3	1695	285	1782	30	0	T R	SB
2			285	2042	30	0	X	SB
3			270	1892	30	0	X	SB
4			260	1887	30	0	X	SB
5			245	1741	30	0	T R	SB
6			250	1805	30	0	T R	SB
7			255	1858	30	0	T R	SB
8			255	1843	30	0	X	SB
9			253	1798	30	0	T R	SB
10			258	1835	30	0	T R	SB
11			260	1829	30	0	X	SB
12			260	1849	30	0	T R	SB
13			258	1793	30	0	T R	SB
14			258	1839	30	0	T R	SB
15			255	1803	30	0	T R	SB
16	V	V	255	1778	30	0	T R	SB

CONFIDENTIAL

SECURITY INFORMATION

SHEET NO. 1
Encl. ()

Date : 5, 6, Nov. 1952
Mfr : ARMSTRONG CORP
Contr: EXPT
Specs: —
Proj : 20MM APX EX-5
Group: IX C D-5
Heat : —
Steel: —

Temperature

Time

Encl. ()

YP:
TS:
EL:
RA:

Proj	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
Gun	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
Range	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
Plate	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
Gauge	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
Obl.	1	2	3	4	5	6	7																																																																																													

C :
Mn:
S :
P :
Si:
Ni:
Cr:
Mo:

Date : 5, 6, Nov. 1952
Mfr : ARMSTRONG CORP.
Contr: EXP.
Specs: —
Proj : 2000M EX-5 (473)
Group: ~~IX~~ C B 6
Heat : —
Steel:

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet	Condition of Bullet
1	FX-5 255A6 JENERT	1615X106m	295	1993	30	0	X	3/4" CRW 11x2 1/2"
2			270	1925	30	0	X	3/4" CRW
3			270	1910	30	0	X	3/4" CRW
4			260	1873	30	0	X	3/4" CRW
5			250	1806	30	0	I R3	SB
6			255	1830	30	0	I R3	SB
7			255	1816	30	0	X	1/2" CRW
8			255	1774	30	0	I R3	SB
9			255	1777	30	0	I R3	MB
10			258	1795	30	0	I R3	PUN 5 3/16"
11			260	1840	30	0	X	7/8" CRW
12			255	1819	30	0	I R3	SB
13	✓	✓	258	1847	30	0	I R3	PUN 5 1/8"

CONFIDENTIAL

SECURITY INFORMATION

NAVAL PROVING GROUND
LIGHT ARMOR BATTERY
Temperature

PROJECTILE FIRING RECORD

SHEET NO. 1
Encl. ()

Time

Anneal :
Norm :
Harden :
Quench :
Draw :

YP:
TS:
EL:
RA:

Proj : EX-3 SEC-4
Gun : FAD-1
Range : 1
Plate : STS-C-1048
Gauge : C 1986
Obl. : 12
Req : 25
LC : 12453
HT : 12453
Limit : 12453 2453

C :
Mn:
S :
P :
Si:
Ni:
Cr:
Mo:

Date : 36 Nov. 1952
Mfr : ARMSTRONG CORP.
Contr : EXP
Specs :
Proj : 20MM APF EX-3
Group : IX C 56
Heat :
Steel : -

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet	Condition of Bullet
1	EX-3 1986	11453200	490	2626	0	0	I up	Inner 70% N 60
2			490	2674	0	0	I up	Inner 70% N 60
3			490	2670	0	0	C	Inner 70% N 60
4			495	2676	0	0	C	Inner 70% N 60
5			490	2631	0	0	I up	Inner 70% N 60
6			490	2636	0	0	I up	Inner 70% N 60
7			490	2653	0	0	I up	Inner 70% N 60
8			490	2645	0	0	I up	Inner 70% N 60
9			490	2629	0	0	I up	Inner 70% N 60
10			490	2653	0	0	C	Inner 70% N 60

CONFIDENTIAL

SECURITY INFORMATION

NAVAL PROVING GROUND
LIGHT ARMOR BATTERY

PROJECTILE FIRING RECORD

SHEET NO. 1
Encl. ()

Anneal :
Norm :
Harden :
Quench :
Draw :

Time

YP:
TS:
EL:
RA:

Proj : ~~EX-5~~
Gun : ~~AP-1~~
Range :
Plate : ~~EX-5~~
Gauge : 0.516
Obl. : 30°
Req : 25
LC : 1929
HI : 1916
Limit : 1920

C :
Mn :
S :
P :
Si :
Ni :
Cr :
Mo :

Date : 5, 6, Nov. 1952
Mfr : ARMSTRONG CORP.
Contr : EXP
Specs :
Proj : 30mm EX-5 (APF)
Group : C-8-7
Heat :
Steel : —

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet	Condition of Bullet
1	EX-5	14952	265	2053	30°	0	X	3/8" CR
2			270	1901	30°	0	I R3	Pen 5 1/2"
3			270	1903	30°	0	X	3/8" CR
4			260	1876	30	0	X	7/8" CR
5			250	1812	30	0	I R3	3/8" RWS
6			255	1816	30	0	I R3	Pen 5 1/2"
7			255	1853	30	0	X	3/4" CR
8			253	1781	30	0	I R3	SB
9			255	1843	30	0	I R3	MB
10			258	1794	30	0	I R3	SB
11			265	1909	30	0	X	5/8" CR
12			253	1813	30	0	I R3	SB
13			258	1839	30	0	X	3/4" CR
14			260	1814	30	0	I R3	SB
15			257	1840	30	0	I R3	SB
16	N	✓	265	1897	30	0	X	7/8" CR

CONFIDENTIAL

SECURITY INFORMATION

Rev. 16

NAVAL PROVING GROUND
LIGHT ARMOR BATTERY

PROJECTILE FIRING RECORD

SHEET NO. 1
Encl. ()

Anneal :
Norm :
Harden :
Quench :
Draw :

Temperature :
Time :
YP :
TS :
EL :
RA :

Proj : EX-5 EX-57
Gun : FAD-1
Range : 1
Plate : 875 C-100
Gauge : 0.7986
Obl. : 0
Req : 25
LC : 2641
HI : 2621
Limit : 2601 2601

C :
Mn :
S :
P :
Si :
Ni :
Cr :
Mo :
Date : 56 NOV. 1952
Mfr : ARMSTRONG CORK
Contr : EXR
Specs :
Proj : 20MM EX-5 (AFI)
Group : IX-C 87
Heat :
Steel : -

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet	Condition of Bullet
1	EX-5 CB-2	490	2650	0	0			Penet 11" 0.10"
2		490	2619	0	0			3/4" 11" 0.10"
3		490	2648	0	0			3/4" 11" 0.10"
4		490	2641	0	0			3/4" 11" 0.10"
5		490	2665	0	0			3/4" 11" 0.10"
6		478	2621	0	0			1/2" 11" 0.10"
7		478	2614	0	0			1/2" 11" 0.10"

CONFIDENTIAL

SECURITY INFORMATION

NAVAL PROVING GROUND
LIGHT ARMOR BATTERY
Temperature

PROJECTILE FIRING RECORD

SHEET NO. 1
Encl. ()

Anneal :
Norm :
Harden :
Quench :
Draw :
Time

YP:
TS:
EL:
RA:

Proj : **EX-5 B2BLT**
Gun : **34492**
Range : **1**
Plate : **PN300004**
Gauge : **0.516**
Obl. : **30°**
Req : 25
LC : **117**
HI : **112**
Limit : **158**

C :
Mn:
S :
P :
Si:
Ni:
Cr:
Mo:

Date : **15 FEB 1953**
Mfr : **ARMSTRONG CORP**
Contr : **EXR NORDEN**
Specs :
Proj : **EX-5(AS) TYPE B2BLT**
Group : **REC'D JAN-53**
Heat :
Steel :

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet	Condition of Bullet
1	EX-5 B2BLT	1700	280	1795	30	0	I	Lost
2	"	"	290	1796	30	0	I	Drunk up
3	"	"	300	1846	30	0	X	Lost
4	"	"	290	1792	30	0	I	Drunk up
5	"	"	295	1864	30	0	I	Drunk up
6	"	"	295	1891	30	0	X	Drunk up
7	"	"	293	1836	30	0	I	Drunk up
8	"	"	295	1857	30	0	X	"
9	"	"	295	1876	30	0	X	"
10	"	"	295	1860	30	0	I	"
11	"	"	295	1900	30	0	X	"
12	"	"	295	1855	30	0	I	"
13	"	"	295	1886	30	0	X	"
14	"	"	295	1866	30	0	I	"

CONFIDENTIAL

SECURITY INFORMATION

NAVAL PROVING GROUND
LIGHT ARMOR BATTERY

PROJECTILE FIRING RECORD

SHEET NO. 1
Encl. ()

Anneal :
Norm :
Harden :
Quench :
Draw :

Time

YP:
TS:
EL:
RA:

Proj : Ex-5 E2BLT
Gun : 34492
Range : 1
Plate : STS-1000
Gauge : 0.986
Obl. : 0
Req : 25
IC : 2638
HI : 2614
Limit : 2626

C :
Mn:
S :
P :
Si:
Ni:
Cr:
Mo:

Date : 5 FEB. 1953
Mfr : ARMSTRONG CORP
Contr: EXA NORTHGATE
Specs: —
Proj : EX 5 (AP3) TYPE E2BLT
Group: RECD JAN - 1953
Heat : —
Steel: —

T 26234.14

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet	Condition of Bullet
1	Ex-5	1700±20	430	2662	0	0	C	Intact 3 1/2" Nose
2	"	"	415	2553	0	0	I (CP)	Intact 1 1/2" Nose
3	"	"	420	2612	0	0	I (CP)	Intact 3 1/2" Nose
4	"	"	422	2592	0	0	I (CP)	Intact 1 1/2" Nose
5	"	"	425	2597	0	0	Disrupted	hit olded
6	"	"	427	2610	0	0	I (CP)	Intact 3 1/2" Nose
7	"	"	430	2638	0	0	C	Intact 3 1/2" Nose
8	"	"	425	2614	0	0	I (CP)	Intact 7 1/2" Nose
9	"	"	427	2614	0	0	I (CP)	Intact 5 1/2" Nose
10	"	"	430	2600	0	0	I (CP)	Intact 1 1/2" Nose
11	"	"	430	2607	0	0	I (CP)	Intact 7 1/2" Nose
12	"	"	430	2645	0	0	I (CP)	Intact 1 1/4" Nose
13	"	"	430	2648	0	0	I (CP)	Intact 1 1/2" Nose

CONFIDENTIAL

SECURITY INFORMATION

Page 19

NAVAL PROVING GROUND
LIGHT ARMOR BATTERY
Temperature

PROJECTILE FIRING RECORD
Time

SHEET NO. 1
Encl. ()

Anneal :
Norm :
Harden :
Quench :
Draw :

YP:
TS:
EL:
RA:

Proj : 5 E 282 T C
Gun : 21.5 : 21.5 : 21.5
Range : 11.117 : 11.117 : 11.117
Plate : 11.117 : 11.117 : 11.117
Gauge : 0.766 : 0.766 : 0.766
Obl. : 20° : 0° : 0°
Req ± 25 : 25 : 25 : 25
LC : 2342 : 2342 : 2342
HI : 2342 : 2342 : 2342
Limit : 2342 : 2342 : 2342

C :
Mn :
S :
P :
Si :
Ni :
Cr :
Mo :
Date : 18 MARCH 1953
Mfr : ACME TRICORP CO.
Contr : EXP.
Specs : EXP.
Proj : EX-3 AP
Group : COARSE GRAIN SIZE 2 1/2
Heat :
Steel :

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet	Condition of Bullet
1	562074	GRAINS 1700	325	1923	20°	-	T, RT	Has channel of penetration
2	"	"	350	2073	"	-	T, RT	" " " " " "
3	"	"	400	2185	"	-	T, RT	" " " " " "
4	"	"	450	2402	"	-	X, RT	Has channel off to band of
5	"	"	440	2376	"	-	X, RT	Has channel off to band of
6	"	"	430	2332	"	-	T, RT	Has channel off to band of
7	"	"	435	2342	"	-	T, RT	Has channel off to band of
8	"	"	438	2353	"	-	X, RT	" " " " " "
9	"	"	435	2342	"	-	X, RT	" " " " " "
10	"	"	430	2328	"	-	T, RT	Has channel off to band of
11	"	"	432	2343	"	-	T, RT	Has channel off to band of

PLATE 2 - 1068 1"

1	562074	GRAINS 1700	500	2626	0°	-	T, RT	"
2	"	"	510	2684	0°	-	T, RT	"
3	"	"	505	2648	0°	-	T, RT	"
4	"	"	505	2650	0°	-	T, RT	"
5	"	"	507	2665	0°	-	T, RT	"

CONFIDENTIAL

SECURITY INFORMATION

NAVAL PROVING GROUND

PROJECTILE FIRING RECORD

SHEET NO. _____

PROJECTILE

~~SECRET~~

Encl. ()

5E2BLT-C (CONT)

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet.	Condition of Bullet
6	5E2BLT-C	GRAINS 1700520	507	2665	0	-	T, C, I, R	INTACT
7	"	"	507	2650	0	-	T, C, I, R	"
8	"	"	507	2653	0	-	C	"
9	"	"	507	2662	0	-	C	"

PLATE 3 STS 14"

1	5E2BLT-C	"	662	3Y14	0°	SUBT	T, C, I, R	3" Hole, INTACT
2	"	"	662	3Y61	0°	"	C	INTACT, disc cracked
3	"	"	662	3Y68	0	"	C	"
4	"	"	660	3Y57	0	0°	C	"
5	"	"	655	3Y61	0	SUBT	C	" , Hole cracked
6	"	"	655	3Y31	0	"	C	" " "
7	"	"	652	3Y42	0	"	C	"
8	"	"	650	3Y31	0	"	C	" , disc cracked

CONFIDENTIAL

SECURITY INFORMATION

Page 21

NAVAL PROVING GROUND
LIGHT ARMOR BATTERY
Temperature

PROJECTILE FIRING RECORD
~~CONFIDENTIAL~~

SHEET NO. 1
Encl. ()

Anneal :
Norm :
Harden :
Quench :
Draw :

YP:
TS:
EL:
RA:

5 E 2 8 L T-M

Proj : 2X-5 2X-5 2X-5
Gun : 2A178 2A178 2A178
Range : 1,160 FT 1 1
Plate : 99235-03 1068, 875 875
Gauge : 0.766 0.782 1.244
Obl. : 20° 0° 0°
Req ± 25 :
LC : 2296 2643 3250
HI : 2269 2643 3231
Limit : 2253 2646 3241

C :
Mn :
S :
P :
Si :
Ni :
Cr :
Mo :

Date : 18 MARCH 1953
Mfr : ARMSTRONG CORP CO.
Contr : EXR
Specs : EXR
Proj : EX-5 API
Group : MEDIUM GROW SIZE 5 1/2
Heat :
Steel :

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet	Condition of Bullet
1	2X-5	GRAINS 174.324	325	2130	20°	-	T. M	Has band to band
2	"	"	350	1932	20°	-	T. M	" " " " " "
3	"	"	400	2168	20°	-	T. M	Has band off to band
4	"	"	435	2212	20°	-	T. M	Has band off to band
5	"	"	441	2361	20°	-	X. M	Has band off to band
6	"	"	435	2349	20°	-	X. M	Has band off to band
7	"	"	432	2376	20°	-	X. M	" " " " " "
8	"	"	430	2330	20°	-	X. M	" " " " " "
9	"	"	430	2324	20°	-	X. M	" " " " " "
10	"	"	428	2312	20°	-	X. M	" " " " " "
11	"	"	425	2296	20°	-	X. M	" " " " " "
12	"	"	425	2303	20°	-	T. M	" " " " " "
13	"	"	422	MISS	20°	-	X. M	" " " " " "
14	"	"	422	2307	20°	-	T. M	" " " " " "
15	"	"	420	2256	20°	-	T. M	Has band off to band
16	"	"	424	2305	20°	-	T. M	Has band off to band
17	"	"	424	2319	20°	-	T. M	Has band off to band

CONFIDENTIAL

SECURITY INFORMATION

SHEET NO. _____

Encl. ()

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet.	Condition of Bullet
Plate 2 - 1068 1"								
1	500 FM	GRAINS 1710 ± 20	500	2612	0	-	I CIP	Intact
2	"	"	510	2626	0	-	I CIP	"
3	"	"	510	2681	0	-	C	"
4	"	"	505	2643	0	-	I CIP	"
5	"	"	507	2667	0	-	C	"
6	"	"	507	2629	0	-	I CIP	"
7	"	"	507	2655	0	-	C	"
8	"	"	507	2660	0	-	C	"
9	"	"	505	2648	0	-	C	"
Plate 3 575 1 1/4"								
1	500 FM	GRAINS 1700 ± 20	662	3757	0	Slight C		Tip 4 lines off
2	"	"	662	M.S.S.	0	0 C		" " " "
3	"	"	662	3750	0	0 C		Intact
4	"	"	655	3731	0	0	DISCHARGED. NITROD. IMPACT	Intact
5	"	"	655	3731	0	Slight I CIP		5" Hole
6	"	"	655	3721	0	0 I CIP		1/2" Hole
CONFIDENTIAL								
SECURITY INFORMATION								
Page 23								

NAVAL PROVING GROUND
LIGHT ARMOR BATTERY
Temperature

PROJECTILE FIRING RECORD
Time

SHEET NO. 1
Encl. ()

Anneal :
Norm :
Harden :
Quench :
Draw :

YP:
TS:
EL:
RA:

Proj : 5E 28LT-F
Gun : 12.5 12.5 12.5
Range : 12.5 12.5 12.5
Plate : 12.5 12.5 12.5
Gauge : 12.5 12.5 12.5
Obl. : 12.5 12.5 12.5
Req : 25
LC : 12.5 12.5 12.5
HI : 12.5 12.5 12.5
Limit : 12.5 12.5 12.5

C :
Mn :
S :
P :
Si :
Ni :
Cr :
Mo :

Date : 15 MARCH 1953
Mfr : REMINGTON CORP CO.
Contr : EXP
Specs : EXP
Proj : EX-5 API
Group : FINE GRAIN S&S 7K
Heat :
Steel :

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet	Condition of Bullet
1	GRAINS	12.5	375	2128	20°	-	RT	Very clean to sand cut
2	"	"	350	1998	20°	-	RT	" " " " " "
3	"	"	400	2125	20°	-	RT	Very clean off to sand cut
4	"	"	435	2338	20°	-	RT	Very clean off to sand cut
5	"	"	440	2365	20°	-	RT	Very clean off to sand cut
6	"	"	435	2347	20°	-	RT	Very clean off to sand cut
7	"	"	435	2367	20°	-	RT	" " " " " "
8	"	"	432	2327	20°	-	RT	" " " " " "
9	"	"	430	2332	20°	-	RT	" " " " " "
10	"	"	425	2296	20°	-	RT	" " " " " "
11	"	"	430	2271	20°	-	RT	" " " " " "
12	"	"	430	2349	20°	-	RT	Base split
13	"	"	428	Miss	20°	-	RT	Same as 12
14	"	"	428	2332	20°	-	RT	Very clean off to sand cut
15	"	"	425	2272	20°	-	RT	" " " " " "
16	"	"	428	2349	20°	-	RT	NOT Recovered
17	CONFIDENTIAL							
18	CONFIDENTIAL							
19	CONFIDENTIAL							
20	CONFIDENTIAL							
21	CONFIDENTIAL							
22	CONFIDENTIAL							
23	CONFIDENTIAL							
24	CONFIDENTIAL							
25	CONFIDENTIAL							
26	CONFIDENTIAL							
27	CONFIDENTIAL							
28	CONFIDENTIAL							
29	CONFIDENTIAL							
30	CONFIDENTIAL							
31	CONFIDENTIAL							
32	CONFIDENTIAL							
33	CONFIDENTIAL							
34	CONFIDENTIAL							
35	CONFIDENTIAL							
36	CONFIDENTIAL							
37	CONFIDENTIAL							
38	CONFIDENTIAL							
39	CONFIDENTIAL							
40	CONFIDENTIAL							
41	CONFIDENTIAL							
42	CONFIDENTIAL							
43	CONFIDENTIAL							
44	CONFIDENTIAL							
45	CONFIDENTIAL							
46	CONFIDENTIAL							
47	CONFIDENTIAL							
48	CONFIDENTIAL							
49	CONFIDENTIAL							
50	CONFIDENTIAL							
51	CONFIDENTIAL							
52	CONFIDENTIAL							
53	CONFIDENTIAL							
54	CONFIDENTIAL							
55	CONFIDENTIAL							
56	CONFIDENTIAL							
57	CONFIDENTIAL							
58	CONFIDENTIAL							
59	CONFIDENTIAL							
60	CONFIDENTIAL							
61	CONFIDENTIAL							
62	CONFIDENTIAL							
63	CONFIDENTIAL							
64	CONFIDENTIAL							
65	CONFIDENTIAL							
66	CONFIDENTIAL							
67	CONFIDENTIAL							
68	CONFIDENTIAL							
69	CONFIDENTIAL							
70	CONFIDENTIAL							
71	CONFIDENTIAL							
72	CONFIDENTIAL							
73	CONFIDENTIAL							
74	CONFIDENTIAL							
75	CONFIDENTIAL							
76	CONFIDENTIAL							
77	CONFIDENTIAL							
78	CONFIDENTIAL							
79	CONFIDENTIAL							
80	CONFIDENTIAL							
81	CONFIDENTIAL							
82	CONFIDENTIAL							
83	CONFIDENTIAL							
84	CONFIDENTIAL							
85	CONFIDENTIAL							
86	CONFIDENTIAL							
87	CONFIDENTIAL							
88	CONFIDENTIAL							
89	CONFIDENTIAL							
90	CONFIDENTIAL							
91	CONFIDENTIAL							
92	CONFIDENTIAL							
93	CONFIDENTIAL							
94	CONFIDENTIAL							
95	CONFIDENTIAL							
96	CONFIDENTIAL							
97	CONFIDENTIAL							
98	CONFIDENTIAL							
99	CONFIDENTIAL							
100	CONFIDENTIAL							

SHEET NO. _____

Encl. ()

5E2BLT-F (CONT)

[illegible]

NAVAL PROVING GROUND
LIGHT ARMOR BATTERY

PROJECTILE FIRING RECORD

SHEET NO. 1
Encl. ()

Anneal :
Norm :
Harden :
Quench :
Draw :

Temperature

Time

YF:
TS:
EL:
RA:

5E2BLT-C

Proj : EX-5
Gun : EX-178
Range : 1,160 FT
Plate : 671-1155Y
Gauge : 0.789
Obl. : 30°
Req : 25
LC : 2701
HI : 2701
Limit : 2701

C :
Mn :
S :
P :
Si :
Ni :
Cr :
Mo :

Date : 6 APRIL 1963
Mfr : ARASTING C.R.K. CO.
Contr : EXP.
Specs : EXP.
Proj : EX-5
Group : E2BLT-C (Common Ground)
Heat :
Steel :

Projectiles Fired at - 65° E. Powder Ambient

Rd.	Bullet	Proj. Wt. GRAMS	Charge	Str. Vel.	Obl.	Yaw	Penet	Condition of Bullet
1	5E2BLT-C	1720	600	3018	30°	-	C	None off to armor
2	"	"	575	2957	30°	-	C	None off to armor
3	"	"	550	2953	30	-	I CIP	None off, 3/4" Hole
4	"	"	565	2912	30	-	I CIP	None off, 3/4" Hole
5	"	"	570	2918	30	-	C	None off, 3/4" Hole
6	"	"	565	2921	30	-	C	None off, 3/4" Hole
7	"	"	565	2927	30	-	C	None off, 3/4" Hole
8	"	"	560	2901	30	-	C	None off, 3/4" Hole
9	"	"	555	2886	30	-	I CIP	None off, 3/4" Hole
10	"	"	500	2650	30	-	I CIP	None off, 3/4" Hole
11	"	"	500	2643	30	-	I CIP	None off, 3/4" Hole
12	"	"	555	2876	30	-	I CIP	None off, 3/4" Hole
13	"	"	555	2886	30	-	I CIP	None off, 3/4" Hole
14	"	"	510	2658	30	-	I CIP	None off, 3/4" Hole
15	"	"	520	2701	30	-	I CIP	None off, 3/4" Hole
16	"	"	520	2752	30	-	C	None off, 3/4" Hole
17	"	"	520	2643	30	-	I CIP	None off, 3/4" Hole
18	"	"	520	2706	30	-	I CIP	None off, 3/4" Hole

CONFIDENTIAL

SECURITY INFORMATION

Page 2/6

SHEET NO. _____

Encl. ()

[illegible]

CONFIDENTIAL

SECURITY INFORMATION

Page 27

NAVAL PROVING GROUND
LIGHT ARMOR BATTERY
Temperature

PROJECTILE FIRING RECORD
Time

SHEET NO. 1
Encl. ()

Anneal :
Norm :
Harden :
Quench :
Draw :

YP:
TS:
EL:
RA:

582 BLT. M

Proj EX-5 :
Gun Mx-178 :
Range 1,160 FT :
Plate 675-A153 :
Gauge 5:739 :
Obl. 180 :
Req ± 25 :
LC 2681 :
HI 2645 V₉₀ :
Limit 2665 7153 :

C :
Mn:
S :
P :
Si:
Ni:
Cr:
Mo:

Date 6 APRIL 1953
Mfr ARMSTRONG CORP CO
Contr EXP
Specs EXP
Proj EX-5
Group 2 BLT-M (MEDIUM GRAIN)
Heat :
Steel:

PROJECTILES FIRED AT -65°F: POWDER AMBIENT

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet	Condition of Bullet
1	KNOWEN	GRAMS 1700 ± 20	600	3024	30°	—	2	Exit Hole Knocked Haze off to Band
2	"	"	575	2945	30	—	1	Instead - HIT old IMPACT
3	"	"	550	2856	30	—	2	Exit Hole Hole off to Band SENT
4	"	"	540	2800	30	—	2	Exit Hole Fractured Base, Upset
5	"	"	525	2727	30	—	2	CIP Exit Hole
6	"	"	535	2789	30	—	2	Exit Hole INTACT, SLIGHTLY upset
7	"	"	530	2762	30	—	2	Hole split off to ADAPT. KNOCKED EXIT HOLE
8	"	"	525	2752	30	—	2	CIP INTACT, Exit Hole
9	"	"	520	2727	30	—	2	CIP Exit Hole
10	"	"	500	2648	30	—	2	NO Hole off to BAND SENT
11	"	"	500	2643	30	—	2	RS " " " "
12	"	"	525	2757	30	—	2	RI " "
13	"	"	545	2740	30	—	2	CIP Hole off
14	"	"	520	2681	30	—	2	DISREGARD. HIT Previous impact
15	"	"	520	2681	30	—	2	Hole off to BAND SENT
16	"	"	530	2745	30	—	2	CIP Exit Hole Hole off
17	CONFIDENTIAL	"	545	2745	30	—	2	RS Hole off to Band SENT
18	SECURITY INFORMATION	"	525	2636	30	—	2	RS Hole off to Band SENT

```
Anneal :
Norm :
Harden :
Quench :
Draw :
```

Tim

Encl. ()

```
Anneal :
Norm :
Harden :
Quench :
Draw :
```

YP:
TS:
EL:
RA:

Proj	:	5 E2 PLT- F
Gun	:	5X-5
Range	:	5X-75
Plate	:	1; 100 ft
Gauge	:	575-8150
Obl.	:	07759
Req # 25	:	30°
LC	:	2600
HI	:	2600
Limit	:	2600 1700

C :
Mn :
U :
P :
B1 :
N1 :
Cr :
Mo :

Date : 6 APRIL 1953
Mfr : ARMSTRONG CORK Co.
Contr: EXP
Specs: EXP
Proj : EX-5 ADZ
Group: FINE GRANN 742 E230
Heat :
Steel:

Rd.	Bullet	Prs.	Wt.	Charge	Str.	Vel.	Obl.	Yaw	Penet	Condition of Bullet
1	600	CRAINS	1700	600	3037	30°	—	0		OFF TO ADAPTER KNUR
2	"	"	"	575	2937	30°	—	0		NO OFF TO BAND SENT
3	"	"	"	585	2960	30°	—	0		NO OFF TO BAND SENT
4	"	"	"	580	2966	30°	—	0		NO CRIPPED AND CRACKED
5	"	"	"	580	2969	30°	—	0		NO CRACKED AND SPLIT
6	"	"	"	575	2945	30°	—	0		NO CRACKED
7	"	"	"	572	2939	30°	—	0		NO CRACKED
8	"	"	"	570	2939	30°	—	0		NO CRACKED
9	"	"	"	565	2992	30°	—	0		NO CRACKED
10	"	"	"	500	2643	30°	—	0		NO CRACKED
11	"	"	"	500	2648	30°	—	0		NO CRACKED
12	"	"	"	500	2660	30°	—	0		NO CRACKED
13	"	"	"	495	2742	30°	—	0		NO CRACKED
14	"	"	"	520	2694	30°	—	0		NO CRACKED
15	"	"	"	530	2740	30°	—	0		NO CRACKED
16	"	"	"	530	2748	30°	—	0		NO CRACKED
17	"	"	"	530	2643	30°	—	0		NO CRACKED
18	"	"	"	500	2600	30°	—	0		NO CRACKED

SHEET NO. _____

Encl. ()

(CONT)

[illegible]

Page 30

SHEET NO. 1
Encl. ()

YP:
TS:
EL:
RA:

Proj	20mm FX-57	20mm FX-57	20mm FX-57
Gun	34482	34472	34492
Range	160FT	160FT	160FT
Plate	2 - 253048	2 - 254048	23 - 253841
Gauge	0.301	0.499	0.498
Obl.	30°	30°	30°
Req ± 25			
LC	1958	2017	1978
HI	1919	2018	1978
Limit	1939	2013	1978

C :
Mn:
S :
P :
Si:
Ni:
Cr:
Mo:

Date : 21 MAY 1953
Mfr :
Contr: 22055TING CORK. LAMDED 17
Specs: EXP. NATIONAL C.A.
Proj: EXP
Group: EX-5
Heat: A-8
Steel:

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet	Condition of Bullet
1	EX5	GRAINS 1700T30	290	1836	30°	—	—	BASE IN PLATE
2	"	"	260	1666	30°	—	I RT	BASE IN PLATE
3	"	"	275	1731	30°	—	I RT	BASE IN PLATE
4	"	"	285	1798	30°	—	I RT	BASE IN PLATE
5	"	"	295	1876	30°	—	I RT	BASE IN PLATE
6	"	"	305	1919	30°	—	I RT	BASE IN PLATE
7	"	"	315	2006	30°	—	C FCIP	BASE IN PLATE
8	"	"	320	2022	30°	—	C FCIP	BASE IN PLATE
9	"	"	325	2088	30°	—	C FCIP	BASE IN PLATE
10	"	"	310	1958	30°	—	C FCIP	BASE IN PLATE
11	"	"	322	2042	30°	—	C FCIP	BASE IN PLATE
12	"	"	322	2052	30°	—	C FCIP	BASE IN PLATE
13	"	"	322	2051	30°	—	C FCIP	BASE IN PLATE
14	"	"	322	2033	30°	—	C FCIP	BASE IN PLATE
15	"	"	322	2056	30°	—	C FCIP	BASE IN PLATE
16	"	"	322	2035	30°	—	C FCIP	BASE IN PLATE
17	CONFIDENTIAL	CONFIDENTIAL	2051	30°	—	C FCIP	BASE IN PLATE	
18	SECURITY INFORMATION	CONFIDENTIAL	2026	30°	—	C FCIP	BASE IN PLATE	

Page 31

NAVAL PROVING GROUND

PROJECTILE FIRING RECORD

SHEET NO. _____

PROJECTILE

S78-1(54-20mm)

Encl. ()

PLATE 1 (CONT)

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet.	Condition of Bullet
19	EX-5	GRAMS 1700 EXO	322	2051	30°	—	C FAIR	BASE IN PLATE Hole in Box
20	"	"	322	2060	30°	—	C FAIR	same as Rd 19
PLATE 2								
1	EX-5	1700 EXO	310	1921	30°	—	T	Base in Box Hole in Box
2			315	1987		—	T	Base in Box
3			320	2030		—	C FAIR	BASE IN PLATE
4			318	2025		—	C FAIR	same as Rd 3
5			316	2008		—	T	BASE REJECTED Hole in Box
6			317	2017		—	C FAIR	BASE IN PLATE Hole in Box
7			330	2106		—	C	3 1/2" Hole BASE IN BOX
8			330	2102		—	C	3 1/2" Hole - Box PROJ BRKLY
9			330	2085		—	C	3 1/2" Hole - Box PROJ BRKLY
10			330	2108		—	C	3 1/2" Hole INTACT Hole in Box
11			330	2094		—	C	BASE IN BOX Hole in Box
12			330	2097		—	T	BASE IN BOX Hole in Box
13			330	2105		—	C	BASE IN BOX Hole in Box
14			330	2087		—	DISREGARD	Hole in Box
15			330	2096		—	C	BASE LOST Hole in Box
16			330	2194		—	C FAIR	BASE IN BOX Hole in Box
17	CONFIDENTIAL		Y103			—	C FAIR	BASE IN BOX Hole in Box

SECURITY INFORMATION

NAVAL PROVING GROUND

PROJECTILE FIRING RECORD

SHEET NO. _____

PROJECTILE

878-1(54-20mm)

Encl. ()

PLATE 3

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet.	Condition of Bullet
1	EX-5	GRAINS 1200570	310	1970	30°	—	T	HOSE BETWEEN BOX AND PLATE
2			310	1934		—	T	HOSE BETWEEN PLATE AND BOX
3			315	2022		—	C	HOSE IN BOX
4			312	1987		—	T	HOSE BETWEEN PLATE AND BOX
5			314	2001		—	C	HOSE IN BOX
6			313	1978		—	C	HOSE IN BOX
7			311	1978		—	T	HOSE BETWEEN PLATE AND BOX
8			328	2079		—	C	HOSE BETWEEN PLATE AND BOX
9			328	2080		—	C	HOSE IN BOX
10			328	2102		—	C	BROKEN - IN BOX
11			328	2079		—	C	HOSE IN BOX
12			328	2085		—	C	HOSE IN BOX
13			328	2082		—	C	INTACT
14			328	2088		—	C	HOSE IN BOX
15			328	2121		—	C	BROKEN - IN BOX
16			328	2089		—	C	HOSE IN BOX
17			328	2106		—	C	HOSE IN BOX

CONFIDENTIAL

SECURITY INFORMATION

NAVAL PROVING GROUND
LIGHT ARMOR BATTERY
Temperature

PROJECTILE FIRING RECORD

SHEET NO. 1
Encl. ()

Anneal :
Norm :
Harden :
Quench :
Draw :

3/4" ANNO

YP:
TS:
EL:
RA:

Proj : EX-5
Gun : 6mm EX-171
Range : 1160 FT
Plate : 1/4" 265MM
Gauge : 101 717
Obl. : 30°
Req ± 25 :
LC : 1272
HI : 1274
Limit : 1272

C :
Mn :
B :
P :
Si :
Ni :
Cr :
Mo :

Date : 101 MAY 1953
Mfr : ARNSTEIN CO. NATIONAL BATTERY
Contr : EXP
Specs : EXP
Proj : EX-5
Group : A-8
Heat :
Steel :

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet	Condition of Bullet
1	EX-5	GRAINS 1700 ± 20	550	2867	30°	—		DISCARDED
2			570	2854		—	C	1/2" Hole
3			550	2867		—	C	1/4" Hole, 20mm
4			530	2789		—	C	Base in plate
5			520	2742		—	C	Base in plate, data torn off
6			500	2633		—	C	Base in plate, data torn off
7			510	2662		—	C	Base in plate, data torn off
8			510	2665		—	C	Base in plate, data torn off
9			515	2704		—	C	Base in plate, data torn off
10			548	2842		—	C	Base in plate, data torn off
11			550	2854		—	C	Base in plate, data torn off
12			548	2842		—	C	Base in plate, data torn off
13			550	2881		—	C	Base in plate, data torn off
14			549	2856		—	C	Base in plate, data torn off
15			549	2873		—	C	Base in plate, data torn off
16			549	2870		—	C	Base in plate, data torn off
17			549	2864		—	C	Base in plate, data torn off
18			549	2861		—	C	Base in plate, data torn off

CONFIDENTIAL

SECURITY INFORMATION

NAVAL PROVING GROUND

PROJECTILE FIRING RECORD

SHEET NO. _____

PROJECTILE

878-1(54-20mm)

Encl. ()

PLATE 4 (CONT)

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet.	Condition of Bullet
19	AX-5	GRAINS 1700 JYD	549	2867	30	- C		Base in Plate Hole thru and out
PLATE 5								
1	AX-5	1700 I 20	430	2624	30	- C		Base in Box Hole in Plate Base in Plate
2			400	2475		- I		Hole in Plate Base Rejected
3			415	2551		- I		Hole off - 80mm H Base in Plate
4			440	2580		- I		Base in Plate Hole in Plate
5			445	2592		- I		CIP 1/2"
6			428	2607		- I		RT 1/2" Pen ST. Base Rejected
7			430	2605		- C		Hole Broken
8			427	2590		- I		RT 1/2" Pen ST. Base Rejected
9			455	2706		- C		Base in Box Hole in Plate
10			457	2719		- C		Base in Box Hole in Plate
11			457	2714		- I		CIP 1/2" Pen ST
12			457	2717		- C		Hole Broken Base in Box
13			457	2699		- I		Hole in Plate - Hit in Box Base Rejected
14			457	2711		- I		Hole in Plate - Hit in Box Base Rejected
15			457	2717		- C		Hole in Box Base in Plate
16			457	2699		- C		Hole in Box Base in Plate
17			457	2714		- C		Hole in Box Base in Plate
18			457	2706		- C		Hole in Box Base in Plate
19			457	2719		- I		CIP 1/2" Pen ST

CONFIDENTIAL

SECURITY INFORMATION

PROJECTILE

S78-1(54-20)

Encl. ()

PLATE 5 (CONT)

[illegible]

NAVAL PROVING GROUND
LIGHT ARMOR BATTERY
Temperature

PROJECTILE FIRING RECORD
Time

SHEET NO. 1
Encl. ()

Anneal :
Norm :
Harden :
Quench :
Draw :

YP:
TS:
EL:
RA:

Proj 20MM EX-5 181-5 121-5 C :
Gun 54442 134492 84492 Mn:
Range 11,160 11,160 11,160 E :
Plate 26 (65) 27 (65) 27 (65) P :
Gauge 10.496 10.505 10.506 S1:
Obl. 130° 130° 130° N1:
Req : 25 1 1 1 Cr:
LC 1026 12207 1087 Mo:
NI 1026 12207 1087
Limit 1026 12207 1087

Date : 4 JUNE 1953
Mfr Armstrong Cork Co. - National
Contr: EXP
Specs: EXP
Proj: EX-5
Group: A-B
Heat :
Steel:

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet	Condition of Bullet
1	EX-5	Grains 1200 120	280	Miss	30°	—	I RJ	Nose off To Band S.
2			280	1767		—	I RJ	" " "
3			300	1881		—	I RJ	5/8" Pun.
4			310	1965		—	C	5/8" Pun in Box, No. 1
5			305	1924		—	I RJ	1/2" Pun st.
6			308	1969		—	C (RJ)	1/2" Pun in Box
7			307	1940		—	C (RJ)	1/2" Pun in Box
8			306	1924		—	I RJ	Nose off To Band S.
9			306	1936		—	C RJ	3/4 x 3/4" Pun Th - open
10			308	1932		—	I RJ	Nose off To Band S.
11			320	2022		—	C (RJ)	5/8 x 3/4" Pun In Box
12			322	2060		—	C (RJ)	Nose off To Band S.
13			321	2044		—	C (RJ)	5/16 x 1/2 Pun In Box
14			320	2036		—	C (RJ)	Nose off To Band S.
15			320	2027		—	C (RJ)	1/2 x 1/2 Pun In Box
16			320	2033		—	I RJ	Nose off To Band S.
17	CONFIDENTIAL		2051			—	C (RJ)	Nose off To Band S.
18	SECURITY INFORMATION		2030			—	I RJ	3/4 Pun Th - Not in

NAVAL PROVING GROUND

PROJECTILE FIRING RECORD

SHEET NO. _____

PROJECTILE

S78-1(54-20mm)

Encl. ()

PLATE # 6 (CONT)

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet.	Condition of Bullet
19	EX-5	1700 EXO GRAINS	370	2015	30°	—	C (PT)	9" X 5" 7" in Box
20	"	"	370	2015	"	—	C (PT)	" " " " " "
21	EX-5	1700 EXO	355	2258	30°	—	C (PT)	7" in Box. Nose off
22			370	2388		—	C (PT)	7" in Box. Nose off
23			380	2398		—	C	7" in Box. Nose off
24			380	2372		—	C (PT)	7" in Box. Nose off
25			360	2316		—	C (PT)	7" in Box. Nose off
26			380	2427		—	C (PT)	7" in Box. Nose off
27			380	2475		—	C (PT)	7" in Box. Nose off
28			390	2475		—	C (PT)	7" in Box. Nose off
29			390	2482		—	C (PT)	7" in Box. Nose off
30			400	2530		—	C (PT)	7" in Box. Nose off
31			375	2396		—	C (PT)	7" in Box. Nose off
32			475	2633		—	C	7" in Box. Nose off
33			410	2548		—	C	7" in Box. Nose off
34			375	2409		—	C (PT)	7" in Box. Nose off
35			372	2396		—	C (PT)	7" in Box. Nose off
36			400	2522		—	C (PT)	7" in Box. Nose off
37			405	2535		—	C (PT)	7" in Box. Nose off

PROJECTILE

878-1(54-20)

Encl. ()

~~CONFIDENTIAL~~

NAVAL PROVING GROUND

PROJECTILE FIRING RECORD

SHEET NO. _____

PROJECTILE

S78-1(54-20mm)

Encl. ()

PLATE # 7 (CONT)

Rd.	Bullet	Proj. Wt.	Charge	Str. Vel.	Obl.	Yaw	Penet.	Condition of Bullet
1	EX-5	1700±20	360	2316	30°	—	C (PT)	7/8 x 1/4 Ann. Upd in
2				2298		—	C (PT)	Nose off to base
3				2280		—	T PT	7/8" D.H. 37
4				2312		—	C (PT)	Nose off to base
5				2340		—	C (PT)	Nose off to base
6				2316		—	C (PT)	Nose off to base
7	✓	✓	✓	2320	✓	—	C (PT)	Nose off to base
8			390	2421		—	C. SAID	Nose off to base
9			410	2537		—	C	Nose off to base
10			400	2484		—	C	Nose off to base
11			395	MISS		—	DISPOSED	
12			395	2480		—	C	DISPOSED
13			393	2355		—	DISPOSED	DISPOSED
14			393	2460		—	C (PT)	Nose off to base
15			400	2530		—	C (PT)	Nose off to base
16			420	2600		—	C	Nose off to base
17			440	2662		—	C	Nose off to base
18			430	2645		—	C	Nose off to base
19			11A	2553	✓	—	C	Nose off to base

CONFIDENTIAL

SECURITY INFORMATION

Page 40

PROJECTILE

878-1(54-20mm)

Encl. ()

PLATE 9

[illegible]

NAVAL PROVING GROUND
LIGHT ARMOR BATTERY
Temperature

PROJECTILE FIRING RECORD
FIRE

SHEET NO. 1
Ensl. ()

Anneal :
Norm :
Harden :
Quench :
Draw :

YF:
TF:
EL:
RA:

Proj : 100-5
Gun : 100-5
Range : 100-5
Plate : 100-5
Gauge : 100-5
Obl. : 100-5
Req : 25
V : 100-5
HI : 100-5
Limit : 100-5

C :
M :
A :
P :
B :
N :
O :
M :

Date : 15 June 1953
M :
C :
S :
P :
H :
S :

Id.	Bullet	Proj. Wt.	Charge	Str. Vol.	Obl.	Yaw	Penetration	Condition of Bullet
1	100-5	600	425	2552	0	-	100	100% Intact, G.
2			440	2658		-	100	100% Intact, G.
3			450	2676		-	100	100% Intact, G.P.
4			465	2760		-	100	100% Intact, G.
5			460	2722		-	100	100% Intact, G.
6			455	2727		-	100	100% Intact, G.
7			455	2711		-	100	100% Intact, G.
8			452	2714		-	100	100% Intact, G.
9			490	2831		-	100	100% Intact, G.
10			488	2804		-	100	100% Intact, G.
11			488	2828		-	100	100% Intact, G.P., Intact
12			488	2804		-	100	100% Intact, G.P.
13			488	2825		-	100	100% Intact, G.P.
14			488	2856		-	100	100% Intact, G.P., Intact
15			488	2836		-	100	100% Intact, G.P.
16			488	2853		-	100	100% Intact, G.P., Intact
17			488	2853		-	100	100% Intact, G.P.
18			488	2842		-	100	100% Intact, G.P.

CONFIDENTIAL

SECURITY INFORMATION