

UNCLASSIFIED

AD NUMBER

AD004085

CLASSIFICATION CHANGES

TO: **unclassified**

FROM: **restricted**

LIMITATION CHANGES

TO:
**Approved for public release, distribution
unlimited**

FROM:

AUTHORITY

**E.O. 10501, 5 Nov 1953; AFAL ltr, 17 Aug
1979**

THIS PAGE IS UNCLASSIFIED

✓
71-2864

UNCLASSIFIED
Per E.O. 10501 5 Nov 53

4085

CATALOGED BY ASTIA
AS AD NO. 4085

✓
WADC TECHNICAL REPORT 52-137

SECURITY INFORMATION

Classification cancelled in accordance with
Executive Order 10501 issued 5 November 1950
Lois L. Farley 11/1/54
Document Service Center
Armed Services Tech. Info. Center

RECEIVED
TECHNICAL REPORT
COMMUNICATIONS
SECTION
JUL 10 1952

LABORATORY TESTS OF INTERFERENCE BLANKER MX-(XA-115)/U
WITH NAVIGATIONAL EQUIPMENTS

RAYMOND R. HOLBERGER
HERBERT M. BARTMAN

COMMUNICATION AND NAVIGATION LABORATORY

JULY 1952

WRIGHT AIR DEVELOPMENT CENTER

PLEASE RETURN THIS
ARMED SERVICES TECHNICAL IN-
DOCUMENT SERVICE C.L.
Knott Building, Dayton 2, O.
Because of our limited supply you are req.
this copy as soon as it has served your purp.
it may be made available to others for ref.
Your cooperation will be appreciated.

RECEIVED

20010620057

NOTICES

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

The information furnished herewith is made available for study upon the understanding that the Government's proprietary interests in and relating thereto shall not be impaired. It is desired that the Judge Advocate (WCJ), Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, be promptly notified of any apparent conflict between the Government's proprietary interests and those of others.



This document contains information affecting the National defense of the United States within the meaning of the Espionage Laws, Title 18, U.S.C., Sections 793 and 794. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

RESTRICTED

WADC TECHNICAL REPORT 52-137

SECURITY INFORMATION

**LABORATORY TESTS OF INTERFERENCE BLANKER MX-(XA-115)/U
WITH NAVIGATIONAL EQUIPMENTS**

*Raymond R. Holberger
Herbert M. Bartman*

Communication and Navigation Laboratory

July 1952

RDO No. 112-28

Wright Air Development Center
Air Research and Development Command
United States Air Force
Wright-Patterson Air Force Base, Ohio

RESTRICTED

RESTRICTED

FOREWORD

The USAF activity discussed in this report has been performed by the Communication and Navigation Laboratory, Weapons Components Division, Wright Air Development Center, under RDO No. 112-28, entitled "Flight Research on Atmospheric Electricity and Development of Means to Reduce Precipitation Static." Tests were conducted by Mr. R. R. Holberger and Mr. H. M. Bartman, assisted by personnel from units responsible for the equipments under test. Project Engineer: Mr. H. C. Storeck.

The tests were performed in the Laboratory prior to construction of models to be used in flight tests.

RESTRICTED

ABSTRACT


Laboratory tests of Interference Blanker MX-(XA-115) in conjunction with Radar Sets AN/APN-9 and AN/APN-70 (Loran Equipment), with Converter CV-89/URA-8 and Teletypewriter TT-4/TG(XC-5), with a Hallicrafter's Radio Receiver Type SX-28, with a Stoddard NM 10A Radio Interference and Field Intensity Meter, and with an AN/PRM-1 Noise Meter are described and test data tabulated. Also, initial tests were conducted on the AN/ARN-6 Radio Compass. These tests were deemed necessary prior to the fabrication of three flight test models of the Interference Blanker MX-(XA-125)/U. The results point out a considerable alleviation of the effects of precipitation static upon received signals which would make possible communication and direction-finding fixes otherwise impossible. It is concluded that the development of the beam-deflection switching tube (described in WADC Technical Report No. 52-65) will be necessary in order to further lower the amplitude of switching transients so that radio receivers of higher orders of sensitivity may be employed; that already formulated anti-cross modulation plans and circuits will be needed to further advance the usefulness of the blanker; that flight tests of the blanker with the above equipments, and others, should be made; and that, according to laboratory tests, even the present model of the blanker would offer sufficient improvement to reception to merit consideration as an interim equipment.

The security classification of the title of this report is UNCLASSIFIED.

PUBLICATION REVIEW

This report has been reviewed and is approved.

FOR THE COMMANDING GENERAL:


for CHARLES U. BROMBACH
Colonel, USAF
Chief, Comm and Nav Laboratory
Weapons Components Division

RESTRICTED

CONTENTS

	Page
SECTION I INTRODUCTION.....	1
SECTION II GENERAL FACTUAL DATA.....	1
Communication Receivers.....	1
Loran Receivers.....	11
Teletype Communication.....	16
Radio Compass.....	21
SECTION III CONCLUSIONS.....	21
SECTION IV RECOMMENDATIONS.....	22
BIBLIOGRAPHY.....	23

ILLUSTRATIONS

Figure

1. General Layout of High Voltage Laboratory, Antenna Termination and Corona Current Measuring System.....	2
2. Diagram for Blanker Performance Test Set-Up.....	3
3. Minimum R-F Signal vs Corona Current.....	4
4. Minimum R-F Signal vs Corona Current.....	5
5. Db Improvement Ratio vs Corona Current.....	6
6. Db Improvement Ratio vs Corona Current.....	7
7. Blanker Performance Data at 50 Microamperes Corona, Stoddard NM-10A Receiver.....	9
8. MX(XA-115)/U Performance at 50 Microamperes Corona, Stoddard NM-10A Receiver.....	10
9. Set-Up for Testing Interference Blanker with Loran Equipments.....	12
10. AN/APN-70 Loran Presentation, No Blanker in Use.....	13
11. AN/APN-70 Loran Presentation with MX-(XA-115)/U Interference Blanker.....	13
12. AN/APN-70 Loran Presentation with Interference Blanker.....	14
13. AN/APN-70 Presentation with Interference Blanker.....	14
14. Set-Up for Testing Interference Blanker with Teletype Equipments.....	15
15. FSK Teletype Presentation Frequency 2.62 MC - Antenna Goes Into Corona at the Word "Deemed". Blanker Not in Use. 40 Microvolt Signal.....	16
16. FSK Teletype Presentation Frequency 2.62 MC - Blanker Not Operating 40 Microvolt Signal - 110 Microamps Corona Current.....	17
17. FSK Teletype Presentation Frequency 2.62 MC - Blanker in Operation at Receiving Antenna 40 Microvolt Signal and 110 Microamps Corona Current.....	18
18. On-Off Teletype Presentation Frequency - 25 KC - Blanker in Operation a. No Corona Current b. 4 Microamps Corona Current.....	19
19. On-Off Teletype Presentation Frequency - 25 KC - Blanker in Operation a. 30 Microamps Corona Current b. 45 Microamps Corona Current....	20

RESTRICTED

SECTION I

INTRODUCTION

The reader is referred to the Bibliography for details regarding precipitation static, corona, blander theory, and results. WADC Technical Report No. 52-65 especially is cited for such information. Low, medium, and high frequency receivers are especially vulnerable to precipitation static interference. These are represented mainly by communications equipment, Loran, FSK, and "On-Off" type teletype equipments, and the radio compass. Some modification is necessary for use of the blander with the radio compass, and this work has not yet been completed. Nomenclature of Interference Blander MX-(XA-125)/U has been assigned for three models of Interference Blander MX-(XA-115)/U being fabricated for flight test use.

SECTION II

GENERAL FACTUAL DATA

In general, the tests were conducted as shown on Figures 1, 2, 9, and 14. Negative corona was drawn from the receiving antenna by means of the high voltage generator. Corona current (of the order of microamperes) was measured as one parameter; signal voltage to the receiving antenna as the other.

Communications Receivers

A Hallicrafter's Communication Radio Receiver Model SK-28, with an external meter to indicate second detector diode current, and Noise Meter AN/PRM-1 were used as representing medium and high frequency receivers and a Stoddard NM 10A Radio Interference and Field Intensity Meter was used to represent low frequency receivers. Signal intelligibility was determined by the arbitrary formula:

$$S + N = 2N$$

where S = Signal voltage at the receiving antenna.

N = Impulse Noise, i.e., noise due only to corona.

a. Noise Meter AN/PRM-1: The test set-up used is shown in Figure 2. The curves of Figures 3 and 4 show the improvement in minimum usable signal due to the Interference Blander for several frequencies and corona currents. Figures 5 and 6 show the improvement in noise level obtained with the blander.

The arbitrary formula used for determining minimum usable signal appears to be valid when receiving CW, but voice reception requires a slightly higher signal to noise ratio.

b. Hallicrafter's Receiver SK-28: Blander operation on voice reception was tested using a standard broadcast signal. Radio Station WING (1410kc) with a signal voltage of about 50 microvolts on the screened room antenna (with a 200 ohm termination) was chosen for the voice tests. The corona current was increased until the signal, in the opinion of three people, could no longer be read. It was

RESTRICTED

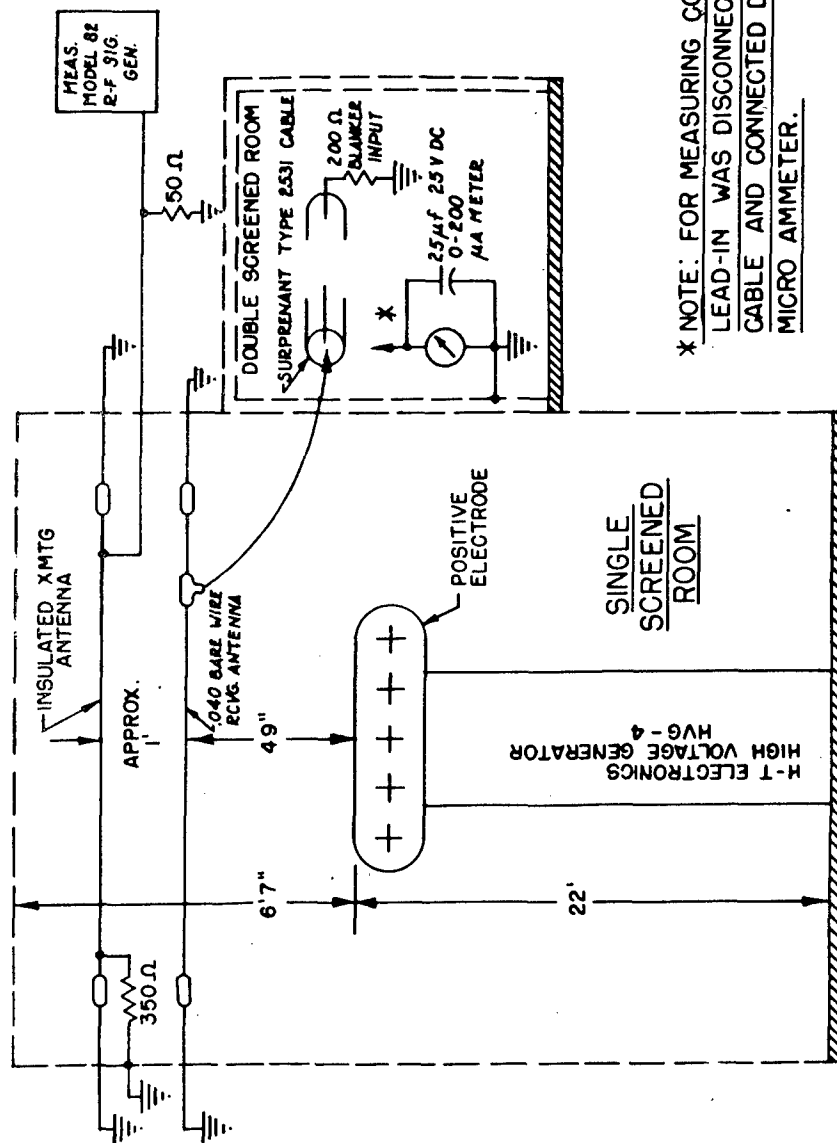


FIG. 1 GENERAL LAYOUT OF HIGH VOLTAGE LABORATORY, ANTENNA TERMINATION AND CORONA CURRENT MEASURING SYSTEM.

RESTRICTED

RESTRICTED

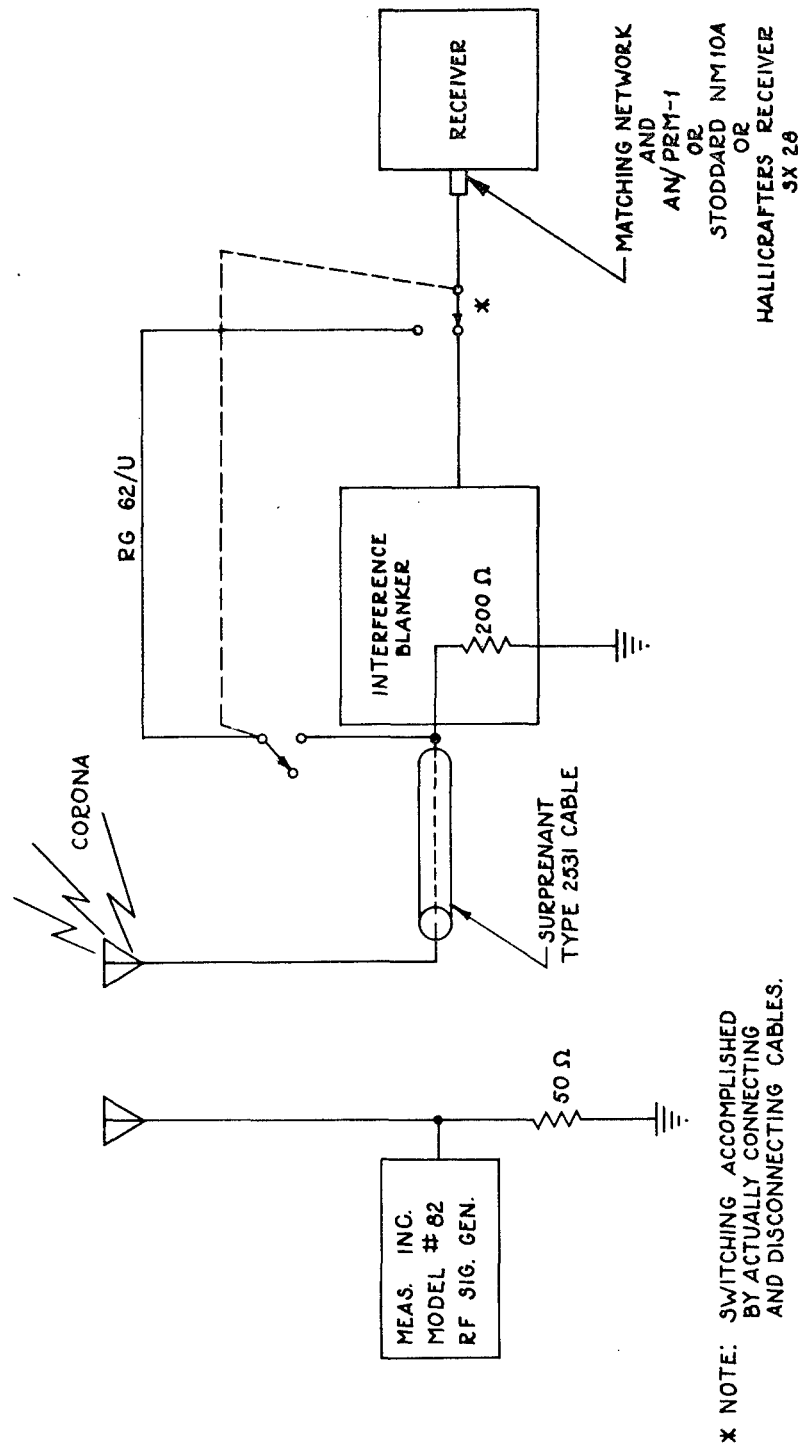


FIGURE 2 DIAGRAM FOR BLANKER PERFORMANCE TEST SET-UP.

RESTRICTED

RESTRICTED

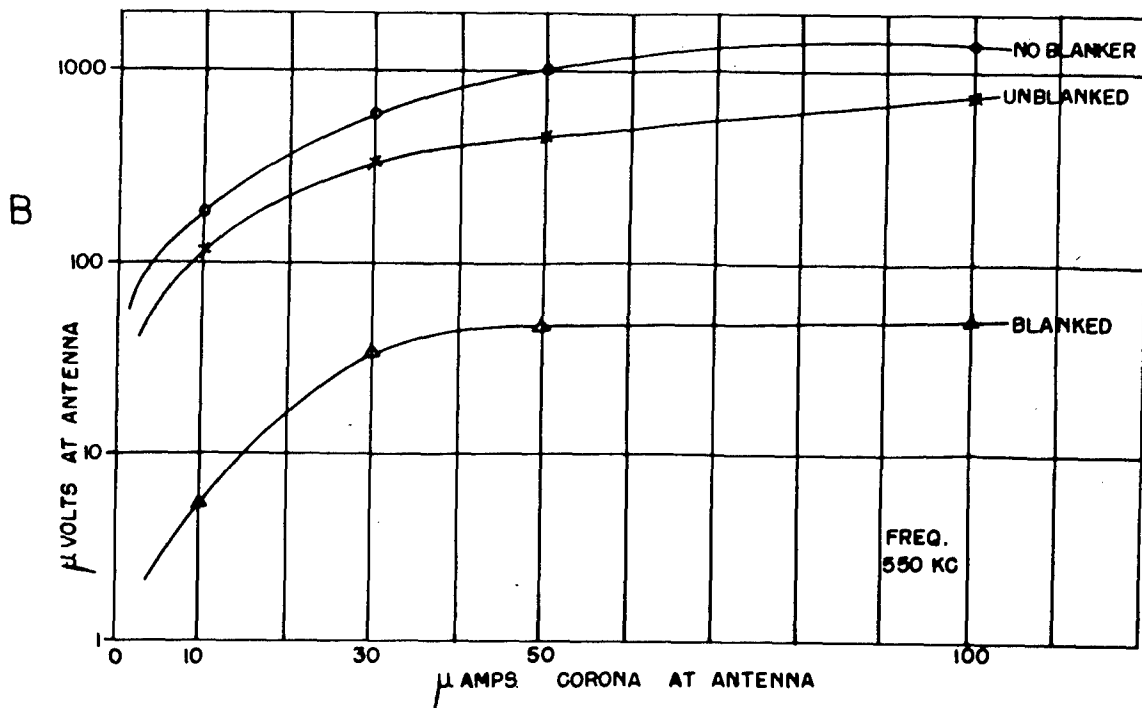
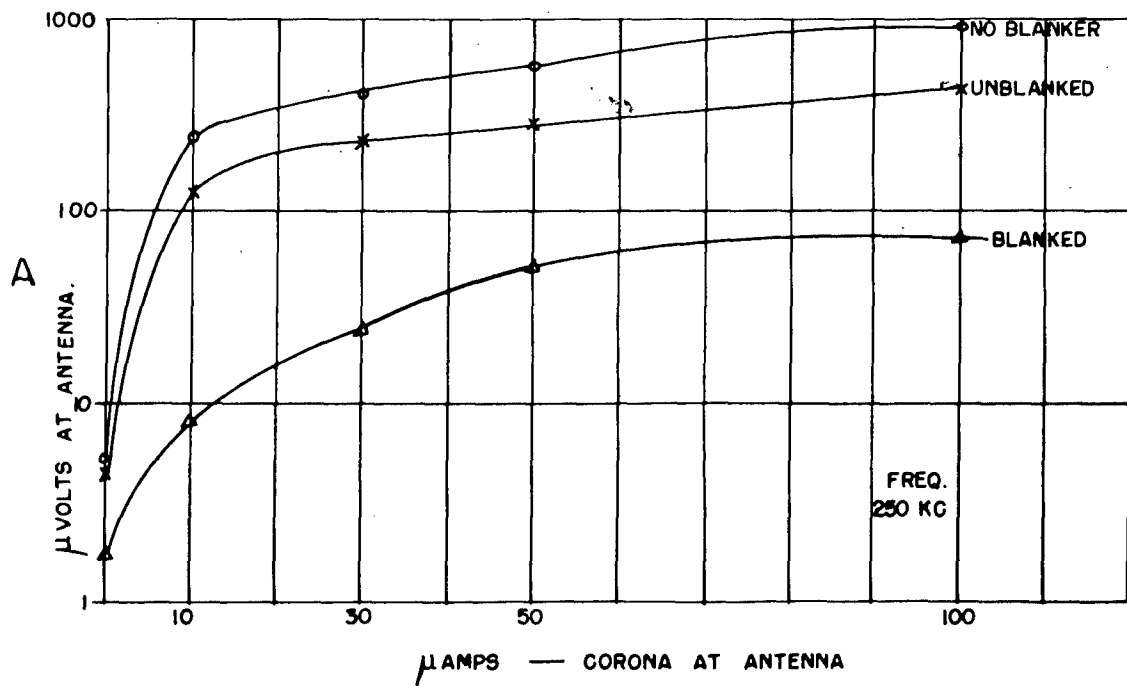


FIG. 3 MIN. R F SIGNAL VS CORONA CURRENT

RESTRICTED

RESTRICTED

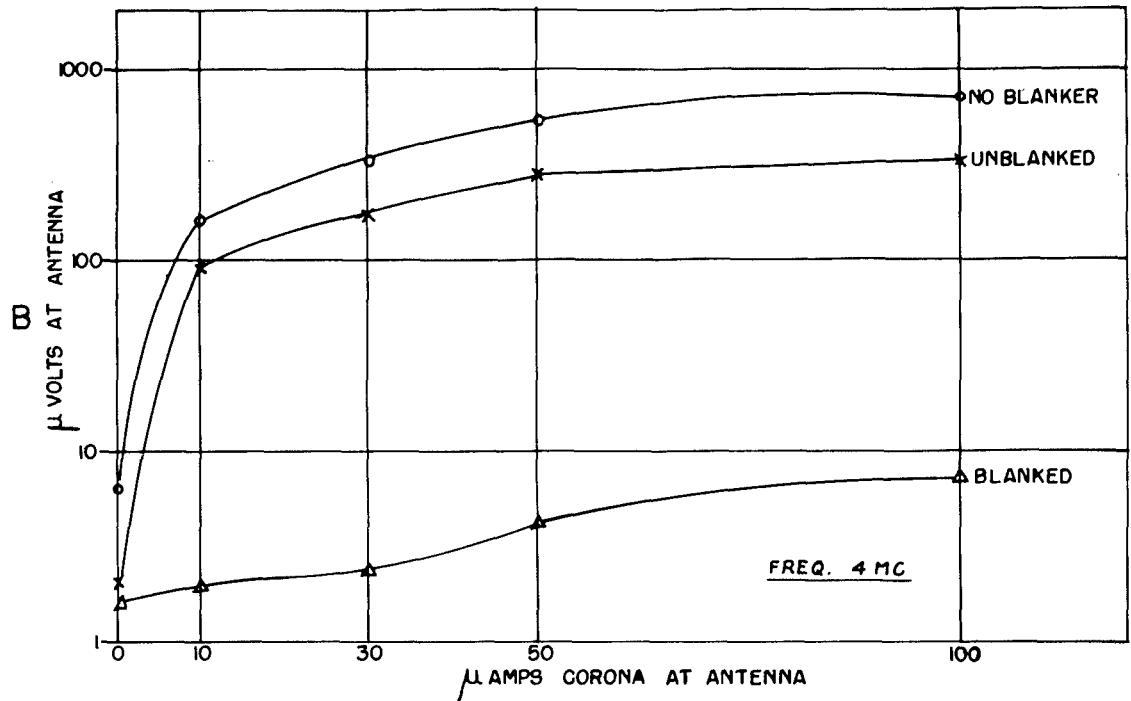
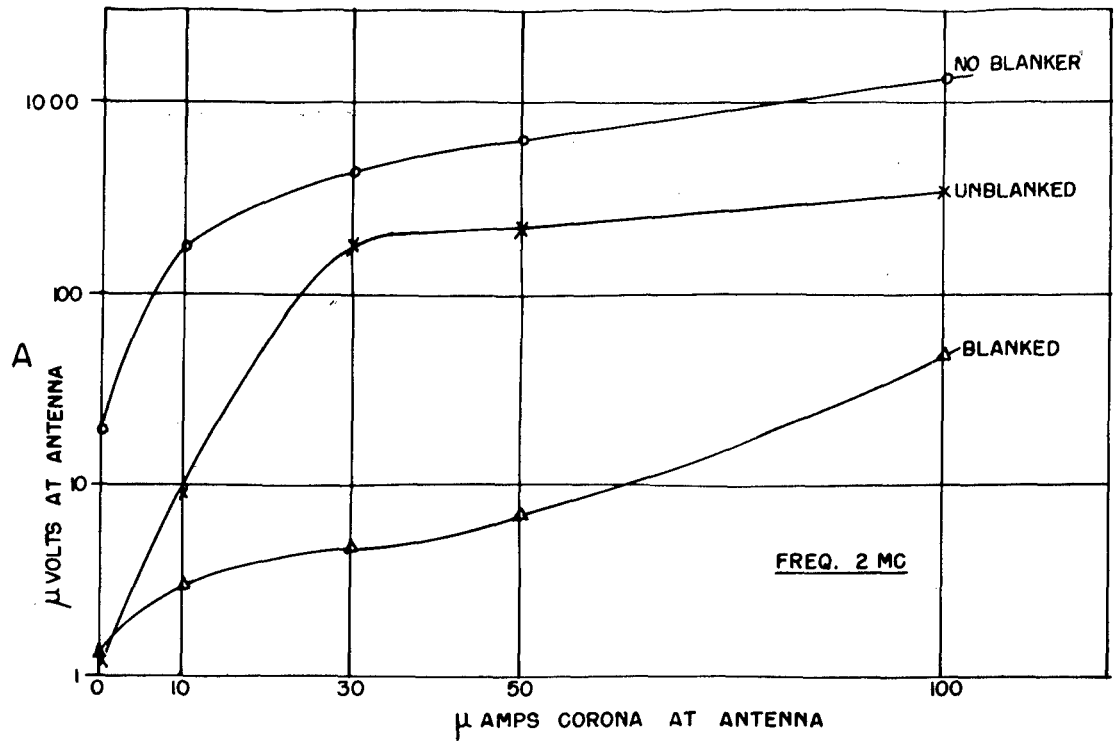


FIG. 4 MIN. RF SIGNAL - VS - CORONA CURRENT

RESTRICTED

RESTRICTED

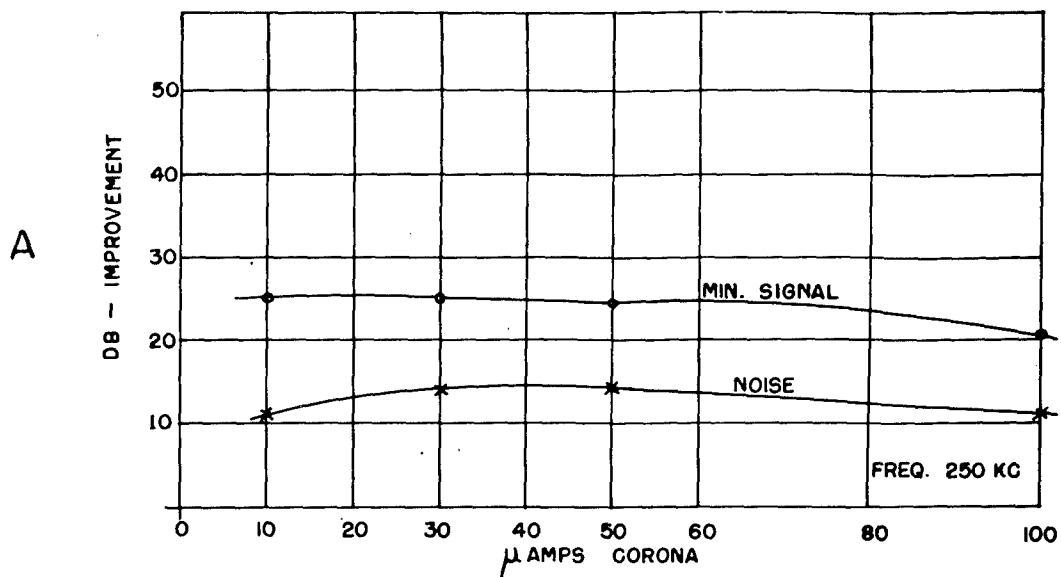
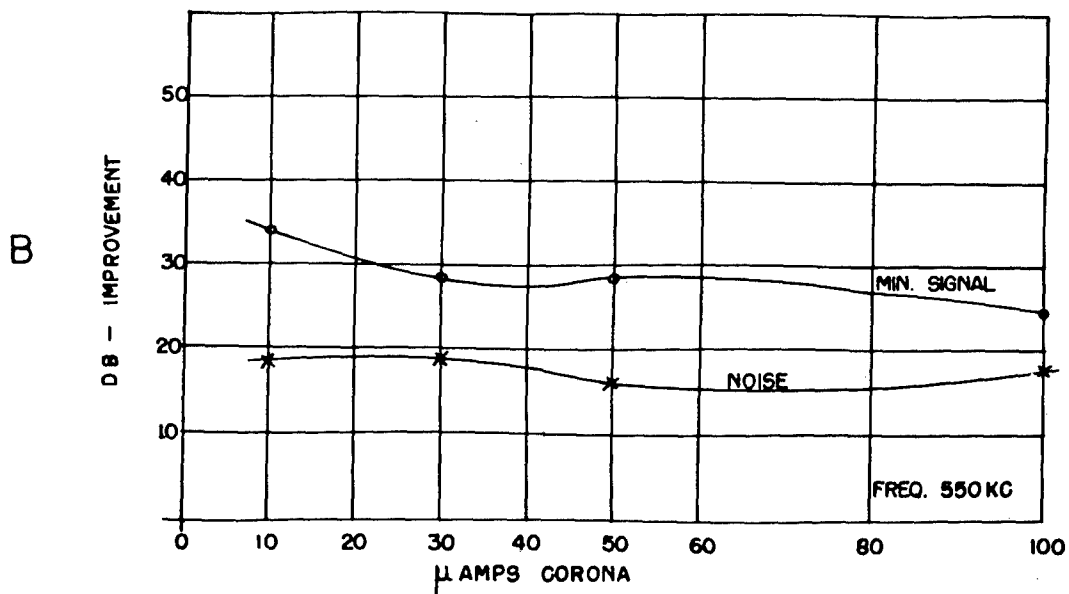


FIG. 5 DB - IMPROVEMENT RATIO VS CORONA CURRENT

RESTRICTED

RESTRICTED

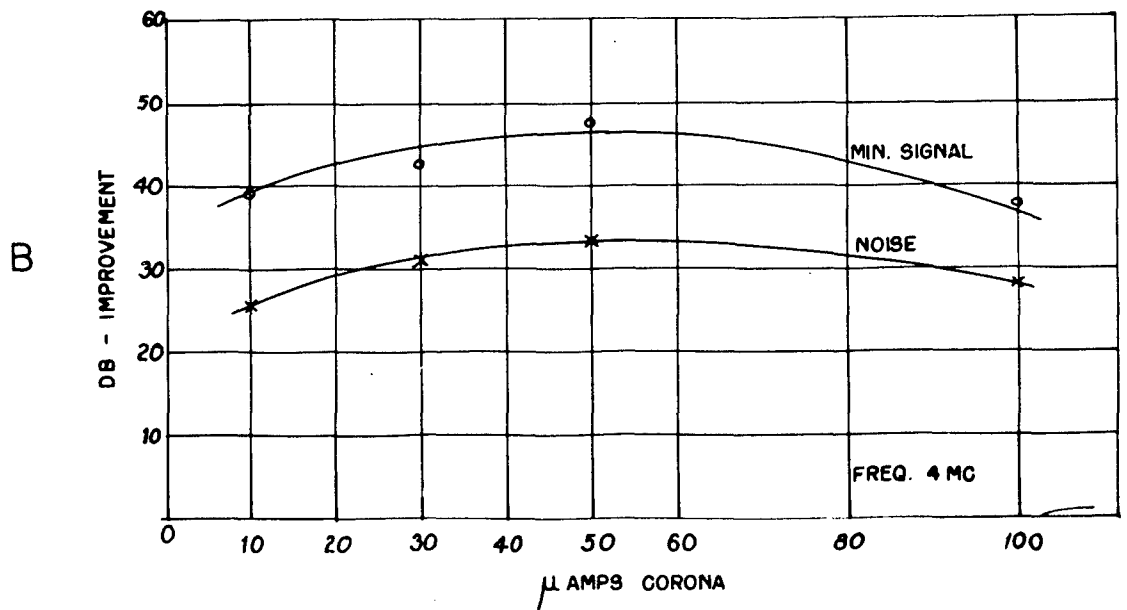
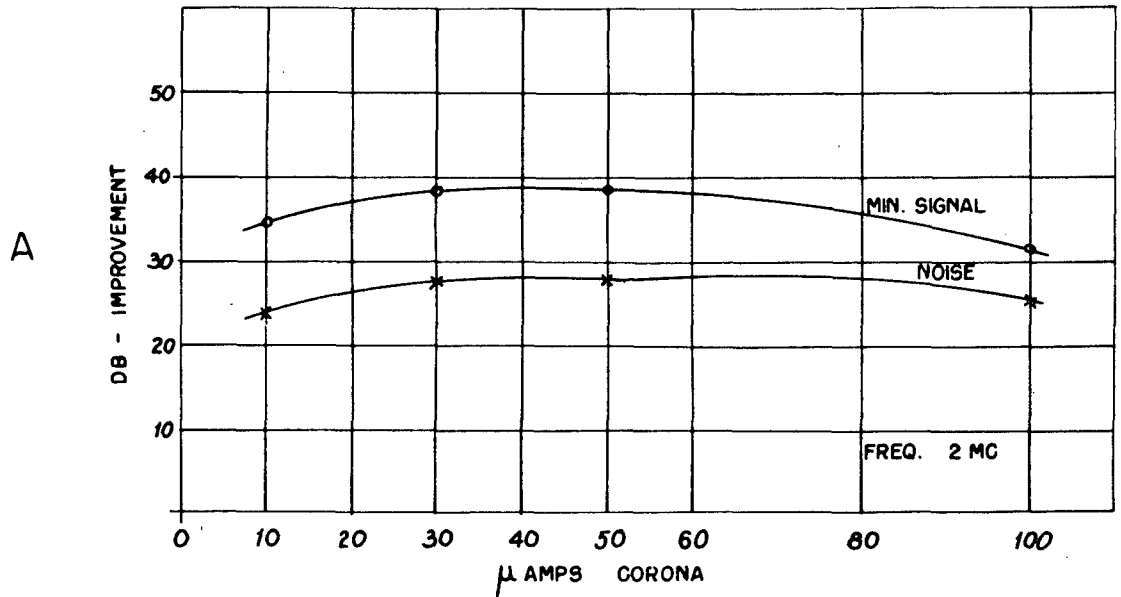


FIG. 6 DB IMPROVEMENT RATIO VS CORONA CURRENT

RESTRICTED

RESTRICTED

found that the 50 microvolt signal could be read solidly through 50 microamperes of corona current. At 70 microamperes, voice reception was poor. However, a more continuous signal such as music, could be understood through corona currents up to about 110 microamperes. With the blanker out of the circuit, the signal becomes unreadable immediately as the antenna goes into corona.

c. Stoddard NM 10A: The performance of the blanker at low frequencies was determined by making use of a low frequency receiver (Stoddard NM 10A). The test procedure used was similar to the medium and high frequency tests. The curve of Figure 7 shows the minimum usable signal vs frequency and Figure 8 shows the noise improvement due to the use of the blanker at 50 microamperes of corona current. The minimum usable signal is higher and the noise improvement is lower at the low frequencies. This is due to several things, one of which is the fact that low frequency tuned circuits will ring for a much longer period of time. It may be stated very generally that:

$$t = K \frac{1}{f_r^2}$$

where t = duration of ringing.

f_r = resonant frequency of the tuned circuit.

K = proportionality constant

Since the blanker is not ideal as yet, a few corona pulses do reach the receiver and cause the tuned circuits to ring. Also, the blanking residuals, which are small pulses, cause more noise at the low frequencies than at the medium or high frequencies as evidenced by the fact that above 550kc the noise due to blanking residuals measured less than 10 microvolts. At the low frequencies they measured as high as 35 microvolts for the same corona current. This, in itself, can cause considerable trouble in very sensitive receivers such as the Navaglobe receiver which was tried only briefly with the blanker.


Development of the Beam Deflection Switching Tube, described in WADC Technical Report No. 52-65, should alleviate this problem. It may be noted that the increased noise at these lower frequencies is compensated for, in part, by the fact that stronger signals are generally available in this portion of the spectrum.

Some difficulties are expected, when the blanker is flight tested, because of the straight-through or cascaded amplification, and of the very non-linear amplification designed into the pulse channel. Anticipating this, a simple RC filter was incorporated, designed to attenuate broadcast frequencies and those below, since such frequencies are liable to cause the most trouble. Other changes in the pulse channel are contemplated to further improve its operation.

There is also Signal Channel cross-modulation present. The use of an RC high pass filter is being considered in the present models in order to reduce interference of the broadcast signals and the resulting beats.

A general modification of the signal channel is also being considered in that the reduction of losses in the coincidence stages will reduce requirements


2.

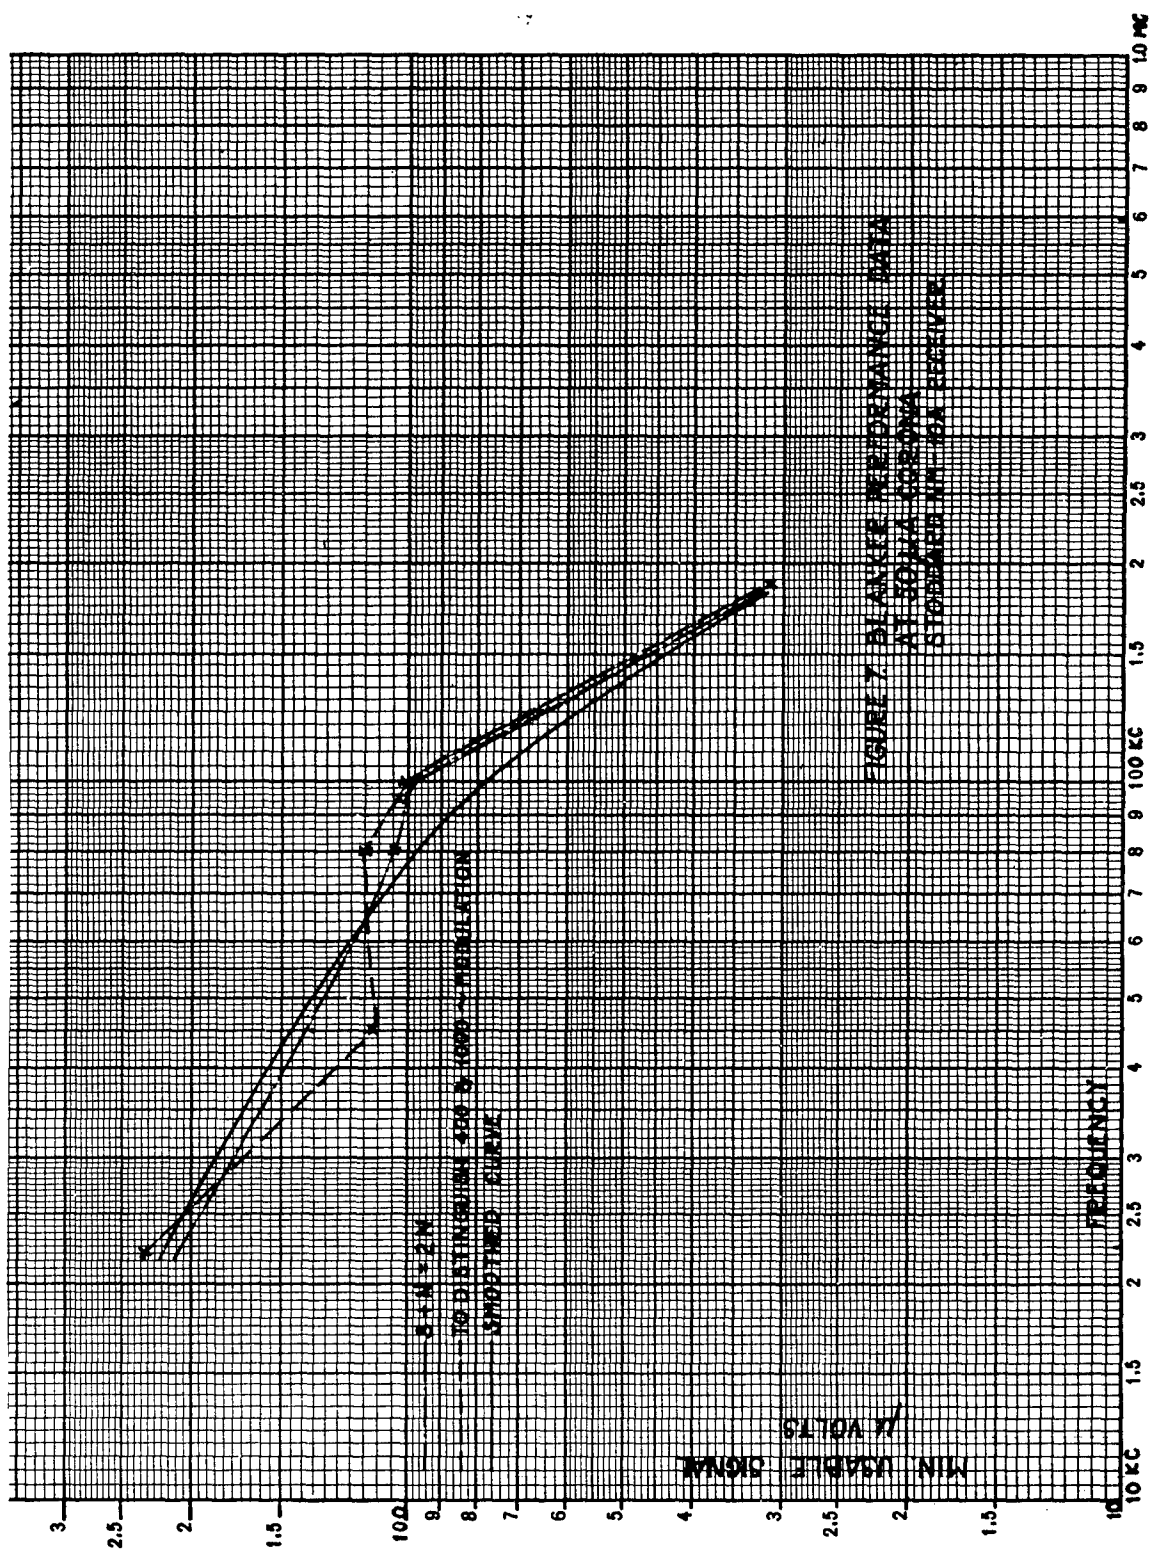

9

RESTRICTED

RESTRICTED

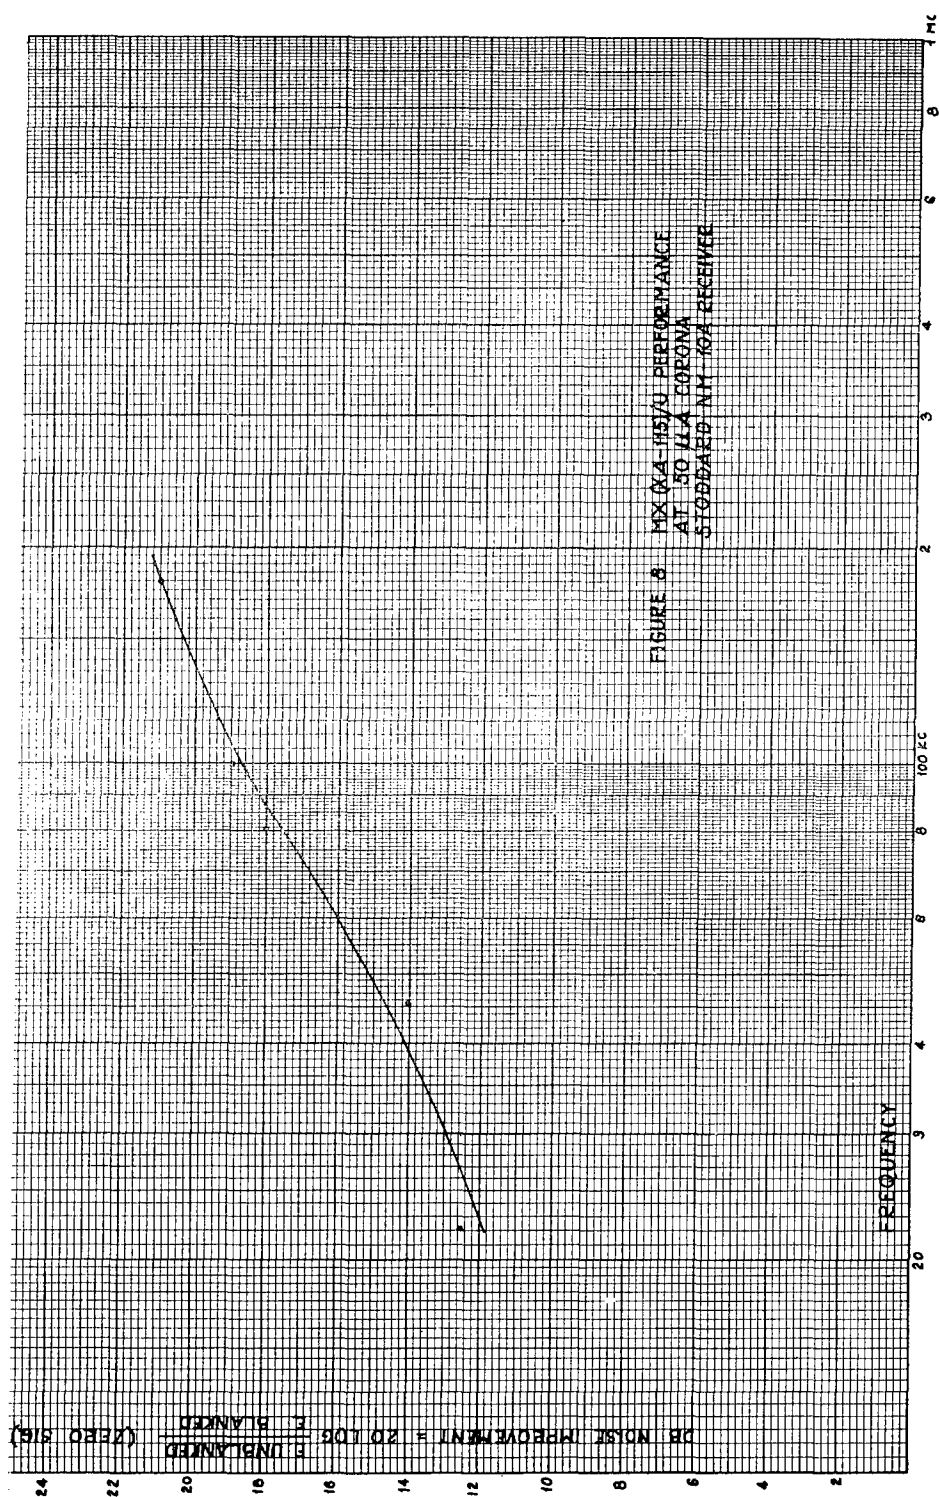

RESTRICTED

RESTRICTED

of great gain now present in the video stages of the Signal Channel. Thus, the reduced gain which is realized in the video stages will dictate reduction in signal channel cross-modulation.

Loran Receivers

Radar Set AN/APN-9 was tested with the Interference Blanker, as shown in Figure 9. Loran signals from Test Set TS-34(XA)/UP were applied to the transmitting antenna, as shown. Because of the inflexibility of the test set, a wide range of data points could not be taken.

With the corona set at threshold level (1 to 2 microamperes) a signal of 25 microvolts could barely be read when the antenna was applied directly to the Loran receiver. When the blanker was inserted between the antenna and the receiver, a 7 microvolt signal could be read with ease through the threshold corona current.

The test set was then adjusted to give about a 23 microvolt signal at the input to the blanker. This signal could be read through about 50 microamperes of corona current.

Radar Set AN/APN-70 was also tested under similar conditions and with the same test set-up used above. Again, 50 microamperes of corona current were about the maximum value that could be tolerated with about 23 microvolts of signal at a standard Loran frequency of 1950kc. 60 microamperes could be tolerated if the signal were increased to about 28 microvolts. The photographs in Figures 10 and 11 show the effects of corona interference on the AN/APN-70 both with and without the blanker in the antenna circuit. Figures 12 and 13 graphically illustrate the effect of increasing corona current on the Blanker-Loran system for a given signal.

Operation of the AN/APN-70 at low frequencies (100kc) with the blanker shows results comparable to the results obtained with the Stoddard HM 10A Low Frequency Receiver. A 320 microvolt signal could be read through about 30 microamperes of corona current with some difficulty. Increasing the signal strength to 390 microvolts gave a very definite reading.

Again, the fact that more signal is required to overcome a given value of corona current at low frequencies is compensated for, in part, by the larger signal strengths generally available in this spectrum.

As an indication of what value an Interference Blanker might have, it was reported that on the "Musk Calf Project" flights of 24 and 25 April 1946, the corona current never exceeded 50 microamperes and yet Loran reception was lost for about 5 hours due to precipitation static interference. On another series of 10 flights on the project between 1 April 1947 and 31 May 1947, it was estimated by U. S. Naval Observers that 17.3% of the total flight time was subject to precipitation static. Reception of Loran signals was completely blocked during this time.

RESTRICTED


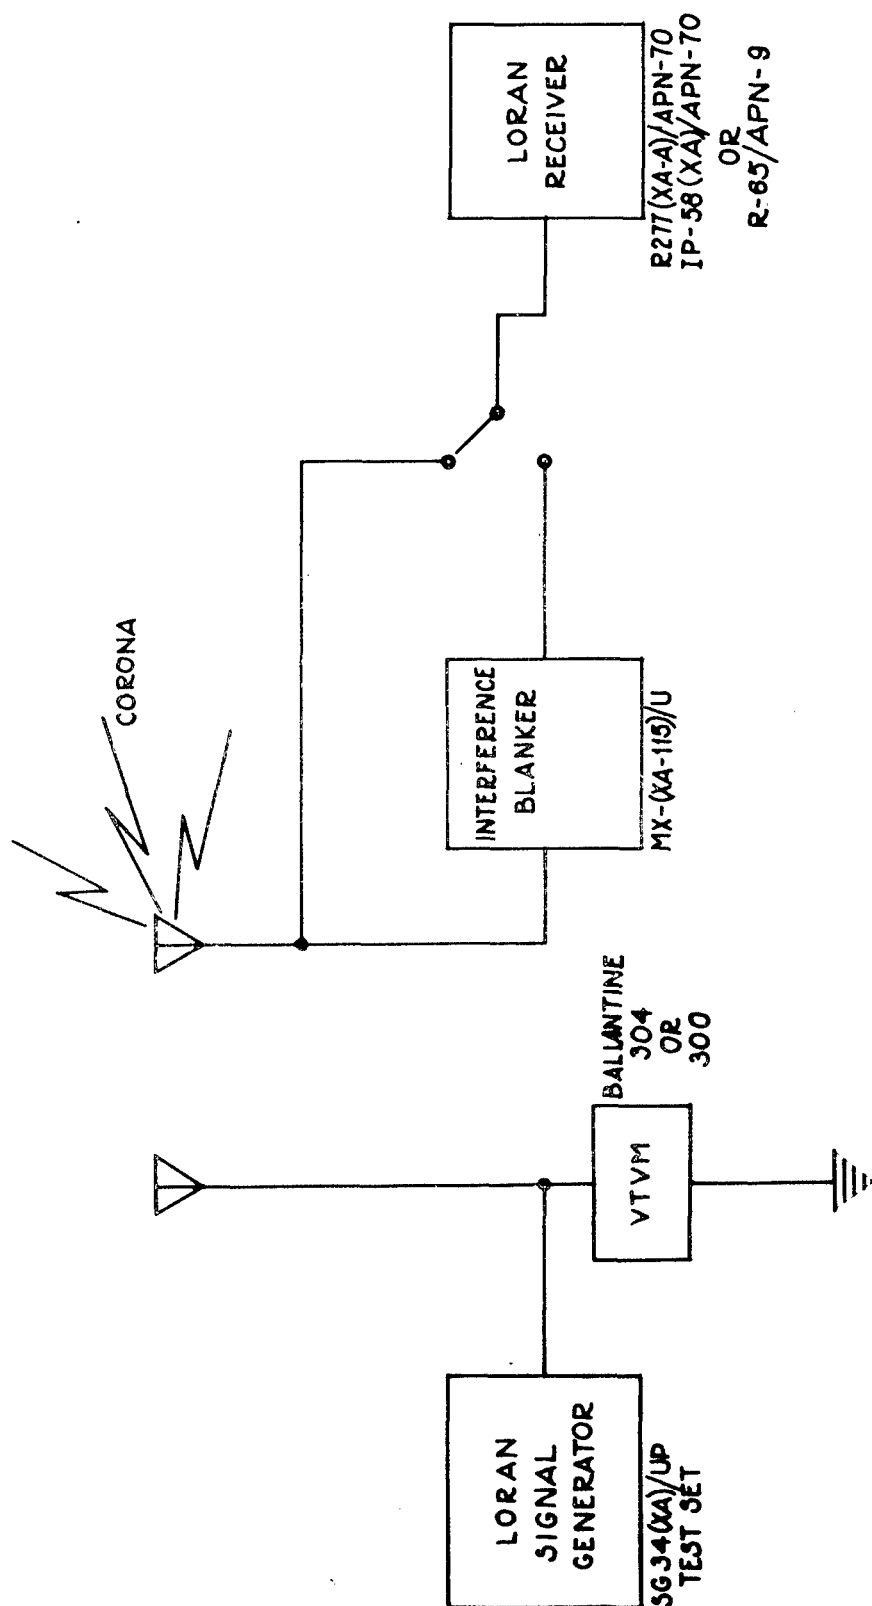


FIGURE 9. SET UP FOR TESTING INTERFERENCE BLANKER WITH LORAN EQUIPMENTS.

RESTRICTED

RESTRICTED

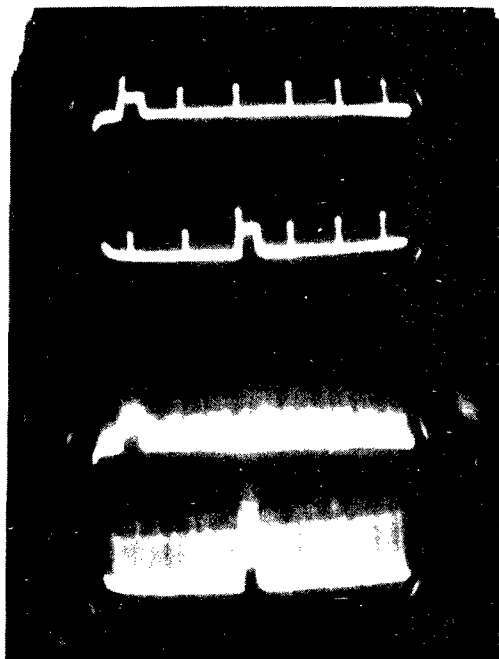


40 MICROVOLT SIGNAL - Freq. 1.95 MC
No Corona Current

40 MICROVOLT SIGNAL - Freq. 1.95 MC
Threshold Corona Current

Figure 10

AN/APN-70 Loran Presentation
No Blanker in Use

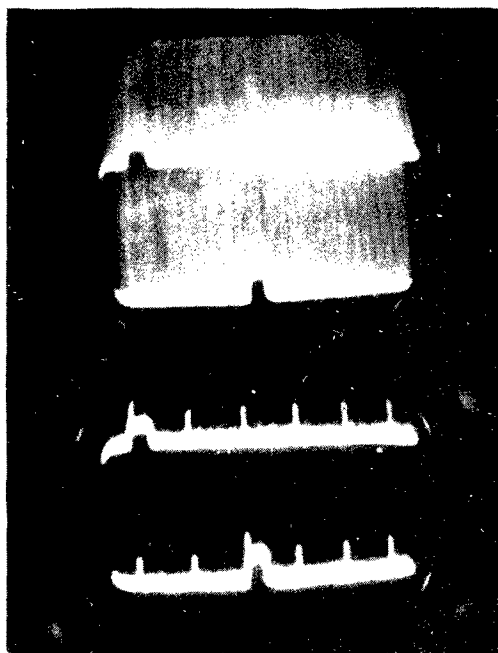


40 MICROVOLT SIGNAL - Freq. 1.95 MC
25 Microamps Corona Current
Not Blanked

40 MICROVOLT SIGNAL - Freq. 1.95 MC
25 Microamps Corona Current
Blanked

Figure 11

AN/APN-70 Loran Presentation
With MX-(XA-115)/U Interference Blanker

RESTRICTED

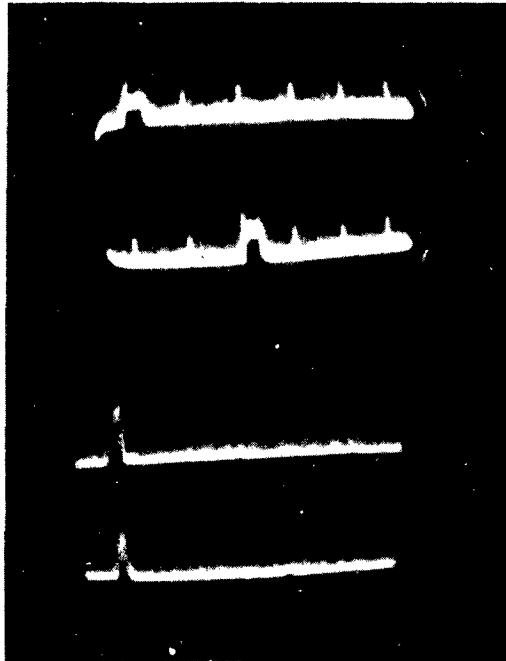


Function 1

40 MICROVOLT SIGNAL - Freq. 1.95 MC
50 Microamps Corona Current
Blanked Condition

Function 2

Figure 12

AN/APN-70 Loran Presentation With
Interference Blanker

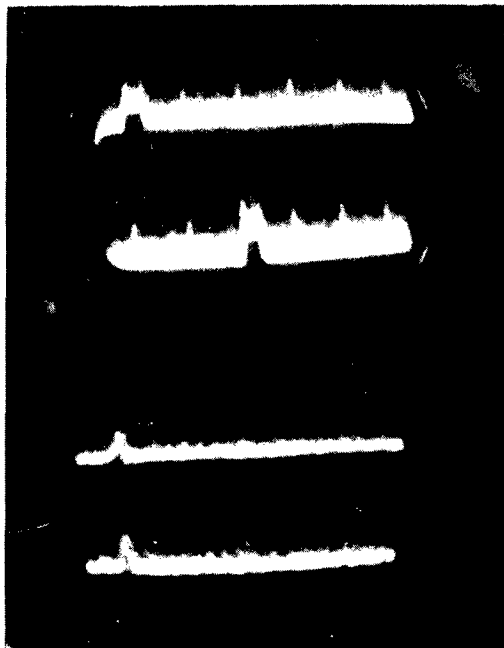

Function 1

40 MICROVOLT SIGNAL - Freq. 1.95 MC
80 Microamps Corona Current
Blanked Condition

Function 2

Figure 13

AN/APN-70 Presentation With
Interference Blanker

RESTRICTED

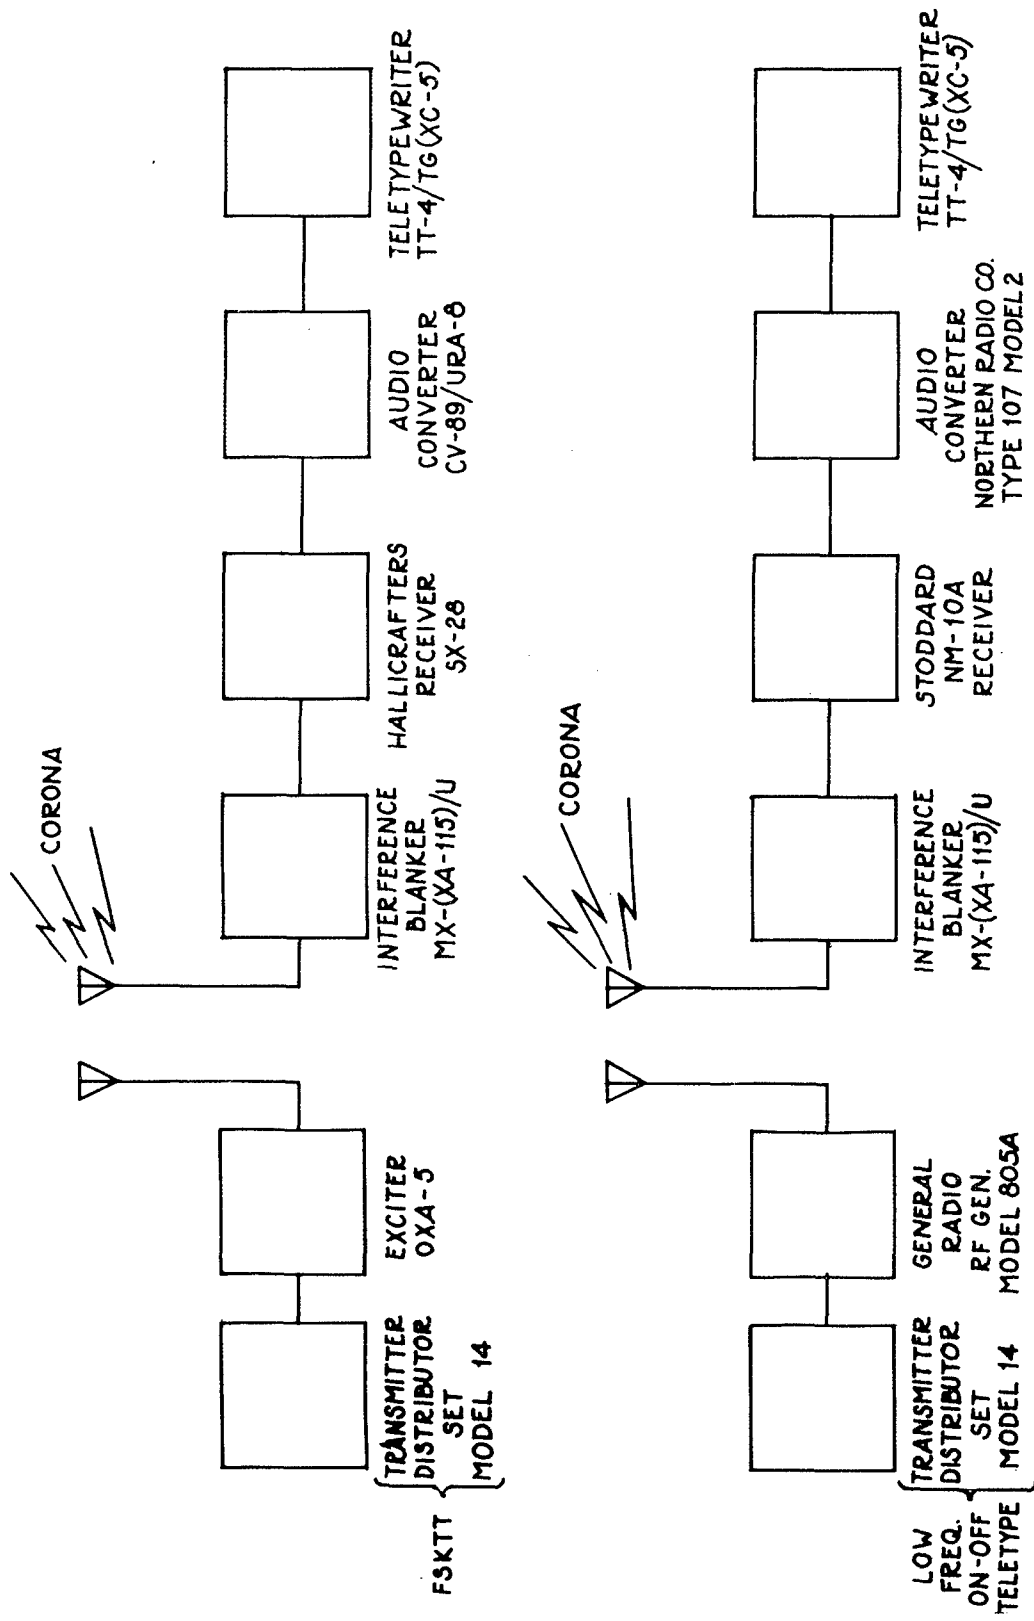


FIGURE 14. SET UP FOR TESTING INTERFERENCE BLANKER WITH TELETYPE EQUIPMENTS.

RESTRICTED

RESTRICTED

TESTING A TELETYPEWRITER LINK UNDER NOISE CONDITIONSM THROUGH THE
USE OF A NOISE BLANKER, A CONVENTIONAL AUDIO TYPE CONVERTER WILL OPERATE
UNDER NOISE CONDITIONS HERETOFORE DEEMEDNCV PKPCKQMVZYAKV EWWP DDENSBD BEIAP
4019103-104

01NET
 000000PXDOZE
 UR H OZZ
 0000 UHOBALJNPSW
 000000HUSDNT

WM
RSELUAW
JUL 62 ZAHCDRAOR
NEB SEB YDNUM
EDD NNHITD
1NKM1DXQACYF0;. \$20
12 N

DWD
S PAE NL
MOEST TCANS
HESVVKYPBY
JDT
DLBQJAN DTTFE
HESVVCVXMPHZULAAL PNTIN
GWVR ERNUDGV

$$\begin{matrix} E \\ \downarrow \\ TT \end{matrix}$$

Figure 15

FSK Teletype Presentation
Frequency 2.62 MC - Antenna Goes Into Corona
At the Word "Deemed". Blanker not in Use.
40 Microvolt Signal

It was noted in the laboratory tests that the Loran Antenna Couplers CU-167/APN-9A and CU-34(XA)/UP, if used after the Interference Blanker, made little or no difference in the operation of the blanker with respect to the Loran receivers. This makes it possible to use a single blanker with more than one equipment.

Teletype Communications

The "FSK" and "On-Off" teletype test set-up are shown in Figure 14.

FSK teletype test set-up consists of the Converter CU-89/URA-8 and Teletypewriter TT-4/TG-(XC-5) with Radio Receiver Model SX-28 at a frequency of 2.62mc. A Transmitter Distributer Set Model 14 and Exciter OXA-5 are used to produce the necessary signal.

RESTRICTED

RESTRICTED

LETYPEWRITER LINK UNDER NOISE CBNDITIONS. THROUGH THE
 D31CEQENM955IRBGAH RWO T
 4722N5PNEAEENTRTMHOT PE COTB
 I
 UAL PSHSAUK 04
 22.05 FNEDAA 63"15-
 2220VUFAMZSFAD00V8 07
 222210MDESE1STCNHVREEJL
 07
 0.2222222222
 SUZ
 0000 FRB 00SEBKBH
 0000 NOU I
 0000 ZAEI
 ENTNTNAPFG
 IIUDTLP
 YYAEGJ
 0000MR1EEXIZAEDNLTWNSW S
 ZHNFQUR
 0000AAYYIQCT D
 M TQ

Figure 16

FSK Teletype Presentation

Frequency 2.62 MC - Blanker Not Operating
 40 Microvolt Signal - 110 Microamps Corona Current

Results of FSK teletype reception at a fixed minimum RF signal of 40 microvolts at the receiving antenna and at various corona currents, with and without the Interference Blanker in use, are shown in Figures 15, 16, and 17.

Figure 15 shows the great amount of degradation in teletype reception with no blanker in the circuit and at threshold corona. A signal of approximately 300 microvolts was required for the system to print without errors under the above conditions.

Figures 16 and 17 clearly depict the results of "No Blanker" and "Blanker" operations of FSK Teletype equipment at a received signal of 40 microvolts (minimum readable) and at 110 microamperes corona current, which is equivalent to approximately 700 microvolts of noise.

The FSK teletype, as expected, outperformed the other equipment considered within this report.

RESTRICTED

TESTING A TELETYPEWRITER LINK UNDER NOISE CONDITIONS. THROUGH THE USE OF A NOISE BLANKER, A CONVENTIONAL AUDIO TYPE CONVERTER WILL OPERATE IN NOISE CONDITIONS HERETOFORE DEEMED IMPOSSIBLE. THIS IS A TEST TRANS MISSION 1234567890 WSD TESTING

TESTING W TELETYPEWRITER LINK UNDER NOISE CONDITIONS
UFLHHE

USE OF A NOISE BLANKER, A CONVENTIONAL AUDIO TYPE CONVERTER WILL OPERATE IN NOISE CONDITIONS HERETOFORE DEEMED IMPOSSIBLE. THIS IS A TEST TRANS MISSION 1234567890 WSD TESTING

TESTING A TELETYPEWRITER LINK UNDER NOISE CONDITIONS. THROUGH THE USE OF A NOISE BLANKER, A CONVENTIONAL AUDIO TYPE CONVERTER WILL OPERATE IN NOISE CONDITIONS HERETOFORE DEEMED IMPOSSIBLE. THIS IS A TEST TRANS MISSION 12

03'1

:7-10347555, a

Figure 17

FSK Teletype Presentation

Frequency 2.62 MC - Blanker in Operation at Receiving Antenna
40 Microvolt Signal and 110 Microamps Corona Current

A very low frequency (CW or On-Off) teletype was tried at a frequency of 25kc. The test set-up used is shown in Figure 14. A tape keyer (Transmitter Distributer Set Model 14) and General Radio Model 805-A Signal Generator were the signal source. The receiver set-up was the Interference Blanker, Stoddard NM 10A Noise Meter, the Audio Converter (Northern Radio Co. Type 107, Model 2), and the Teletypewriter TT-4/TG-(XC-5).

Figures 18 and 19 depict examples of on-off teletype reception at a frequency of 25kc and a minimum readable signal at the receiving antenna of 250 to 300 microvolts. With no corona, reception was fair. The message was completely unintelligible at four microamperes corona without the blanker. With the blanker in operation, the signal was completely readable. However, errors were more frequent than without corona. At a corona current of 30 microamperes a limit was reached where even with the blanker in operation reception was unreadable. However, a signal to noise improvement was realized to some extent.

RESTRICTED

a
TESTING 1204061800
NOW IS THE TIME FOR ALL GOOD MEN TO COME TO THE AID OF THEIR PARTY
TESTING 1204061800
NOW IS THE TIME FOR ALL GOOD MN TO COME TO THE AID OF THEIR PARTY
TESTING 1204061800
NOW IS THE TIME FOR ALL GOOD MEN TO COME TO THE AID OF THEIR PARTY
TESTING 1204061800
NOW IS THE TIME FOR ALL GOOD MEN TO COME TO THE AID OF THEIR PARTY
TESTING 1204061800
NOW IS THE TIME FOR ALL GOOD MEN T COME TO THE AID OF 7J L XZRTY
TNR

b
TESTING 1204061800
NOW IS THE TIME FOR ALL GOOD MEN TO COME TO THE AID OF THEIR PARTY
TESTING 120
END USWME F0Y684000 MEN TOICOMEHTOTHE AID OF THZ
ONLY
TESTING BERTYU10P
NOW IS THE TIME FOR ALL GOOD MEN TO COME TO THE AID OF THEIR PARTY
TESTING 1204061800
NOW IS THE TIME FOR ALL GOOD MEN TO COME TO THE AID OF THEIR PARTY
TESTING 1204061800
NOW IS THE TIME NOR ALL GOOD MEN TO COME TO THE AID OF THEID PARTY

Figure 18 a - b

On-Off Teletype Presentation
Frequency - 25 KC - Blanker in Operation
a. No Corona Current
b. 4 Microamps Corona Current

An advantage of the FSK teletypewriter is the better signal to noise ratio. In the opinion of the teletype personnel:

FSK teletype requires a 2/1 signal to noise ratio.
On-Off teletype requires an 8/1 signal to noise ratio.
Voice requires a 4/1 signal to noise ratio.

Thus, the FSK teletypewriter, not too easily affected by noise, shows the best signal improvement when the blanker is used in precipitation static, while the

RESTRICTED

a

QWTEHIEHATIMT KOR ALL GOOD ME TO COME TO THE EI

TESTING 1234567890

NOW IU THE TIME FOR ALLGOOD MENITO COME TO THE AIE OK OTEIR PEUTH

TESTING 123

20189

ALL GOODHMEMMTOFOM

Z

AJBOHE AID OF THEIR PARTZ

TESTING1234567890

NOW IS ME TIMEFO

ALL GOOD MN TO COME TO THEINLZALFBOHEIR PARTY

TESTING 123456789

WELIS T E TIME FOR ALL GOOD MEN TO COMETO THE AID
PARTY

b

TESTINGNPIWERTYAITP

NOW 1STH TIHEFTRIZLL GOMD MEN TO XTEA

THEIRP

ICBOH IBRS

DWING PQRTNEDWIC

NOW FY 1234567890

WELIS T E TIME FOR ALL GOOD MEN TO COME THE IB

WELIS T E TIME FOR ALL GOOD MEN TO COME THE IB

WELIS T E TIME FOR ALL GOOD MEN TO COME THE IB

WELIS T E TIME FOR ALL GOOD MEN TO COME THE IB

TEST

VO 1234567890

WELIS T E TIME FOR ALL GOOD MEN TO COME THE IB

WELIS T E TIME FOR ALL GOOD MEN TO COME THE IB

WELIS T E TIME FOR ALL GOOD MEN TO COME THE IB

SCFHA

TZSTINGGQIERTHUIOV

Figure 19 a - b

On-Off Teletype Presentation
Frequency - 25 KC - Blanker in Operation
a. 30 Microamps Corona Current
b. 45 Microamps Corona Current

RESTRICTED

RESTRICTED

on-off teletypewriter, which is very susceptible to noise pulses occurring during the spaces between the on or pulse conditions, shows a very poor signal improvement ratio. Even under ideal conditions, the on-off teletype is effected by circuit and manmade noises of low amplitude. The teletypewriter personnel are very dissatisfied on the operation of the on-off teletypewriter equipment because of its great susceptibility to noise impulses. However, the FSK teletypewriter showed such promise for successful operation with precipitation static present that the teletypewriter personnel are ready to aid the flight tests of the Interference Blanker.

Radio Compass

Initial tests have been made with the Interference Blanker MX-(XA-115)/U connected into the sense antenna channel of the AN/ARN-6 Radio Compass. A bearing shift of about 180 degrees for a 1410kc signal was observed due to blanker delay. Sense antenna corona up to 200 microamperes did not interfere with the ADF function (loop antenna was outside the interference area), although the signal became unintelligible.

Protection of the sense antenna circuits alone against corona by the blanker is not sufficient. However, the performance is sufficiently promising to recommend further study of the use of the blanker in the loop and sense antenna circuits to realize interference reduction in precipitation static and 'sferics.

SECTION III

CONCLUSIONS

It is concluded:

That the beam deflection switching tube (described in WADC Technical Report No. 52-65) should be developed in order to further reduce the amplitude of switching transients so that the blanker may be used more effectively with receivers of high sensitivity.

That steps be taken to remove or reduce cross-modulation effects from the pulse channel and signal channel.

That, according to laboratory tests, and should flight tests prove the blanker satisfactory, even the present model of the blanker would offer sufficient improvements to reception to merit consideration as an interim equipment.

RESTRICTED

SECTION IV

RECOMMENDATIONS

Recommendations are as stated under "CONCLUSIONS." In addition, should flight evaluation tests yield approval of the system, it is recommended that the design be used as a sample of circuitry for an Air Force Procurement Contract of Interim Equipment.

It is recommended that extensive flight test data on characteristics of signals and interference limits, as well as flight test oscillograms of precipitation static and 'sferic interference pulses be obtained. Flight tests should include operation of the combination equipments under 'sferic conditions.

It is recommended that research and development continue on Interference Blanker Circuitry so that future models may incorporate modifications of circuitry already under consideration, and such further features as blanker protection against transmitter, radar and other signals propagated from the same aircraft, some form of automatic balancing control, coincidence circuitry designed around the beam deflection switching tube, and others as may be developed.

Cross-modulation difficulties in both the Signal and the Pulse Channels may be expected under flight conditions, and it is recommended that special effort be directed toward obtaining all possible quantitative data regarding this subject.

RESTRICTED

BIBLIOGRAPHY

Bryant, J. M. and Newman, M. Radio Interference Rejection at the Antenna. Lightning and Transients Research Institute, Minneapolis, Minnesota, December 1946, for Navy Bureau of Aeronautics, Report No. 5, Contract N6ori-230. Task Order One.

Porter, Q. J. Number and Time Distribution Properties of Corona. AF Technical Report No. 6571, Air Research and Development Command, Wright Air Development Center, July 1951.

Storck, H. C. The Reduction of the Effects of Precipitation Static in Circuits Prior to the Input Circuits of Aircraft Radio Receivers. AMC Engineering Memorandum Report MCREE-49-53, February 1950. (Restricted)

Storck, H. C. Interference Blanker MX-(XA-115)/U, for Reducing the Effects of Precipitation Static in Radio Receivers. WADC Technical Report No. 52-65, Air Research and Development Command, Wright-Patterson Air Force Base, Ohio. February 1952. (Restricted)

Loran Low Frequency Test Program, Canada. Bi-monthly Report. 1 April 1947 to 31 May 1947. By U. S. Naval Aviation Observers (navigation) Operating with B-29 Detachment of the 4149th AAF BU USAFB Edmonton, Alberta, Canada.

RESTRICTED

DISTRIBUTION LIST FOR WADC TECHNICAL REPORT 52-137

Cys Activities

W-PAFB

4 BAGR-CD, Mrs. D. Martin
2 DSC-SA
1 MCMC
2 WCAPP
10 WCLNA4
10 WCLNT2
1 WCLRD, Dr. Taylor
1 WCLRC, Mr. Rappaport
1 WCLCI
1 WCLCI5
1 WCLCO2, Mr. V. G. Nelson
2 WCOMP(For Rand Corp.)
1 WCRE1 (Chief Scientist)
1 MCEFXI3, Capt. A. S. Gaskins

Air Force

1 Commanding General
Air Force Cambridge Research Center
ATTN: EER
250 Albany Street
Cambridge 39, Massachusetts
1 Commanding General
AF Cambridge Research Center
ATTN: EERS-3
250 Albany Street
Cambridge 39, Massachusetts
1 Commanding General
Rome Air Development Center
ATTN: ENR
Griffiss Air Force Base
Rome, New York

Cys Activities

1 Washington AF Dev Field Office
Room 4949, Main Navy Bldg.
Department of the Navy
Washington 25, D. C.
1 AF Development Field Representative
Code 1110, Naval Research Laboratory
ATTN: Lt. Col. M.N. Abramovich
Washington 25, D. C.
1 Commanding General
Air Research and Development Command
ATTN: RDOL
P. O. Box 1395
Baltimore 1, Maryland
1 Commanding General
Strategic Air Command
ATTN: Operations Analysis Office
Offutt Air Force Base, Nebraska
1 Director of Communications and
Electronics
Air Defense Command
ATTN: AC&N Coordinating Division
Ent Air Force Base
Colorado Springs, Colorado
1 Commanding General
Air Proving Ground
ATTN: Class. Data Br., D/OI
Eglin Air Force Base, Florida
1 Director
Air University Library
Maxwell Air Force Base, Alabama
1 Joint Tactical Air Support Board
Fort Bragg, North Carolina

Army

3 Commanding Officer
Signal Corps Engineering Laboratory
ATTN: Technical Reports Library
Ft. Monmouth, New Jersey

RESTRICTED

DISTRIBUTION LIST FOR WADC TECHNICAL REPORT 52-137

Cys Activities

Navy

- 1 Chief of Naval Operations
Department of the Navy
ATTN: OP-42-B2
Washington 25, D. C.
- 1 Chief of Naval Operations
Department of the Navy
ATTN: Technical Data Section
Washington 25, D. C.
- Chief of Naval Research
Department of the Navy
Washington 25, D. C.
- 6 ATTN: Planning Div., Code N-482
- 1 ATTN: Elec. Section, Code 427
- 1 Chief, Bureau of Aeronautics
Department of the Navy
ATTN: Electronic Div., AER-EL-418
Washington 25, D. C.
- 1 Bureau of Aeronautics Representative
Cornell Aeronautical Laboratory
Box 235
Buffalo, New York
- 1 Bureau of Aeronautics Representative
Consolidated Vultee Aircraft Corp.
San Diego 12, California
(For processing to Ryan Aeronautical Company)
- 3 Bureau of Aeronautics Representative
Chance-Vought Aircraft Division
United Aircraft Corporation
Naval Industrial Reserve Plant
Dallas, Texas
- 1 Bureau of Aeronautics Representative
Akron 6, Ohio
- 1 Chief, Bureau of Ordnance
Department of the Navy
ATTN: Code AD-3
Washington 25, D. C.

Cys Activities

- 1 Chief, Bureau of Ships
Department of the Navy
ATTN: Technical Data Section
Washington 25, D. C.
- 1 Superintendent
United States Naval Academy
Post Graduate School
Monterey, California
ATTN: Librarian
- 1 Commander
U. S. Naval Air Development Center
ATTN: Electronics Laboratory
Johnsville, Pennsylvania
- 1 Commander
U.S. Naval Air Missile Test Center
Point Mugu, California
- 1 Commander
U.S. Naval Ordnance Laboratory
Silver Spring 19, Maryland
- 1 Commander
U.S. Naval Ordnance Test Station
Inyokern
China Lake, California
- 1 Director
U.S. Naval Research Laboratory
ATTN: Technical Data Section
Washington 25, D. C.
- 1 Naval Research Laboratory
Code 3407
Bldg 3, Room 352
Washington 25, D. C.
ATTN: Mr. Martin Katzin
- 1 CO & Director
U.S. Navy Electronics Laboratory
San Diego 52, California
- 1 Director
U.S. Navy Underwater Sound Laboratory
ATTN: Mr. C. M. Dunn
Fort Trumbull
New London, Connecticut

RESTRICTED

DISTRIBUTION LIST FOR WADC TECHNICAL REPORT 52-137

Cys Activities

Research and Development Board

Committee on Electronics
Research & Development Board
National Defense Building
Washington 25, D. C.

- 1 ATTN: Secy, Panel on Radiation Systems
1 ATTN: Secy, Panel on Interference Re-
duction

- 10 Research and Development Board
Library Branch, Info. Offices
ATTN: C. R. Flagg, Room 3D1041
National Defense Building
Washington 25, D. C.
(For processing to panel members)

Special Projects

- 1 Document Room
Project LINCOLN
ATTN: Ethel R. Branz
Massachusetts Inst. of Technology
P. O. Box 390
Cambridge 39, Massachusetts

Others

- 1 Lightning & Transient Research Institute
Foshay Tower
Minneapolis, Minnesota
- 1 Polarad Electronics Corporation
100 Metropolitan Avenue
Brooklyn 11, New York
- 1 National Union Radio Corporation
ATTN: Dr. A. M. Skellet
350 Scotland Road
Orange, New Jersey
- 1 Cook Research Laboratories
1457 Diversey Parkway
Chicago 14, Illinois

Cys Activities

- 1 Sylvania Electric Products
Bayside, Long Island
- 1 Sylvania Electric Products
Flushing, New York
- 2 Boeing Airplane Company
Seattle Division
ATTN: Mr. L.A. Wood, Chief Engineer
Seattle 14, Washington
- 1 Consolidated Vultee Aircraft Corp.
ATTN: Engineering Library
Fort Worth 1, Texas
- 1 Douglas Aircraft Company, Inc.
ATTN: Mr. E.F. Burton, Chief Engineer
3000 Ocean Park Boulevard
Santa Monica, California
- 1 Douglas Aircraft Company, Inc.
ATTN: Mr. Fred J. Stineman, Chief Engineer
3855 Lakewood Boulevard
Long Beach, California
- 1 Fairchild Engine & Airplane Corp.
Fairchild Airplane Division
ATTN: L. Fahnestock
Hagerstown, Maryland
- 1 Mr. Sanford Hershfield
Electronics Section
The Glenn L. Martin Company
Baltimore 3, Maryland
- 1 Hughes Aircraft Company
Research & Development Library
ATTN: John T. Milek
Culver City, California
- 1 Hughes Aircraft Company
ATTN: Mr. N. H. Enenstein
Radar Department
Culver City, California

RESTRICTED

DISTRIBUTION LIST FOR WADC TECHNICAL REPORT 52-137

Cys Activities

- Lockheed Aircraft Corporation
Burbank, California
- 3 Engineering Library, ATTN: M. L. Stute
1 ATTN: Mr. H. Rempt
- 1 The Glenn L. Martin Company
ATTN: Engineering Librarian, Dr. H. Schutz
Baltimore 3, Maryland
- 1 North American Aviation, Inc.
ATTN: Chief Engineer
4300 East Fifth Avenue
Columbus 16, Ohio
- 2 North American Aviation, Inc.
ATTN: Mr. Dave Mason
Engineering Data Section
Los Angeles International Airport
Los Angeles 45, California
- 2 Republic Aviation Corporation
ATTN: Engineering Library
Farmingdale, New York
- 1 Airborne Instruments Laboratory, Inc.
ATTN: Mr. E. L. Bock
Antenna Section
160 Old Country Road
Mineola, Long Island, New York
- 2 Aircraft Radiation Systems Laboratory
Stanford Research Institute
Stanford, California
- 1 Andrew Alford
Consulting Engineers
299 Atlantic Avenue
Boston, Massachusetts
- 1 Antenna Research Laboratory, Inc.
ATTN: Mr. Wayne E. Rife
709 Thomas Lane
Columbus 14, Ohio
- 1 Mr. R. K. Thomas
Research and Development Dept.
Bendix Radio Division
Baltimore 4, Maryland

Cys Activities

- 1 THRU: District Chief, L.A. Ord.
Dist.
35 North Raymond Avenue
Pasadena 1, California
California Institute of Technology
Jet Propulsion Laboratory
Pasadena, California
- 1 Dorne and Margolin
Gruman Airfield
Bethpage, Long Island, New York
- 1 Dalmo Victor Company
ATTN: Mr. Glen Walters
1414 El Camino Real
San Carlos, California
- 1 Electronics Research, Inc.
P. O. Box 327
2300 N. New York Avenue
Evansville, Indiana
- 1 Applied Physics Laboratory
Johns Hopkins University
ATTN: Reports Office
8621 Georgia Avenue
Silver Spring, Maryland
- 1 Dr. L. J. Chu
Massachusetts Inst of Technology
Cambridge 39, Massachusetts
- 1 The Ohio State University Research
Foundation
ATTN: Dr. V. H. Rumsey
310 Administrative Building
Columbus 10, Ohio
- 1 Raytheon Manufacturing Company
ATTN: Dr. H. L. Thomas
Documents Section
Waltham 54, Massachusetts
- 1 Stanford Research Institute
Stanford, California

RESTRICTED

DISTRIBUTION LIST FOR WADC TECHNICAL REPORT 52-137

Cys Activities

- 2 University of Michigan
Aeronautical Research Center
ATTN: Mr. L. R. Biaselle
Willow Run Airport
Ypsilanti, Michigan
- 1 Workshop Associates, Inc.
135 Crescent Road
Needham Heights 94, Massachusetts
- 1 Federal Telecommunications Laboratories
500 Washington Avenue
Nutley 10, New Jersey
- 1 Missouri Research Laboratories
St. Louis, Missouri
- 1 Radio Corp of America
RCA Victor Division
Camden, New Jersey
- 1 Collins Radio
855 35th Street Northeast
Cedar Rapids, Iowa
- 1 Press Wireless Manufacturing Company, Inc.
Hicksville, New York
- 1 Jansky and Bailey
1339 Wisconsin Avenue, N. W.
Washington 7, D. C.