

UNCLASSIFIED

AD 274 231

*Reproduced
by the*

**ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA**



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

ADPUB 1748

274231


CATALOGED BY ASTIA
CS AD NO.

**A TECHNIQUE FOR THE SYNTHESIS OF LINEAR,
NONSTATIONARY FEEDBACK SYSTEMS
PART II
THE SYNTHESIS PROBLEM**

A. R. Stabberud

**(Report No. 61-71)
University of California
Department of Engineering
Los Angeles, California**

October, 1961



CONTRACT NO. AF 49(638)-438

**MECHANICS DIVISION
AIR FORCE OFFICE OF SCIENTIFIC RESEARCH
AIR RESEARCH AND DEVELOPMENT COMMAND
WASHINGTON 25, D.C.**

**A TECHNIQUE FOR THE SYNTHESIS OF LINEAR,
NONSTATIONARY FEEDBACK SYSTEMS
PART II
THE SYNTHESIS PROBLEM**

A. R. Stubberud

**(Report No. 61-71)
University of California
Department of Engineering
Los Angeles, California**

October, 1961

CONTRACT NO. AF 49(638)-438

**MECHANICS DIVISION
AIR FORCE OFFICE OF SCIENTIFIC RESEARCH
AIR RESEARCH AND DEVELOPMENT COMMAND
WASHINGTON 25, D.C.**

Qualified requesters may obtain copies of this report from the ASTIA Document Service Center, Arlington Hall Station, Arlington 12, Virginia. Department of Defense contractors must be established for ASTIA services, or have their "need-to-know" certified by the cognizant military agency of their project or contract.

FOREWORD

The research described in this report, *A Technique for the Synthesis of Linear, Nonstationary Feedback Systems, Part II--The Synthesis Problem*, by A. R. Stubberud was carried out under the technical direction of C. T. Leondes and Gerald Estrin and is part of the continuing program in Adaptive Control Systems.

This project is conducted under the sponsorship of the Air Force Office of Scientific Research of the Air Research and Development Command.

Submitted in partial fulfillment of
Contract Number AF 49(638)-438
Project Number 9783



J. M. English
Director - Engineering Research

UNIVERSITY OF CALIFORNIA
DEPARTMENT OF ENGINEERING
LOS ANGELES, CALIFORNIA

TABLE OF CONTENTS

	Page
INTRODUCTION.	1
AN OPERATOR ALGEBRA FOR DIFFERENTIAL EQUATIONS	1
SYNTHESIS OF A DIFFERENTIAL EQUATION AS A FEEDBACK SYSTEM	10
CONCLUSIONS	13
REFERENCES	14

LIST OF FIGURES

Figure		Page
1	Operations of Transformation Algebra.	4
2	Block Diagram of Differential Equation	6
3	Multiplication of Two Differential Equations	6
4	Addition of Differential Equations	8
5	General Feedback Configuration	10
6	Unity Gain Feedback System	11

A TECHNIQUE FOR THE SYNTHESIS OF LINEAR, NONSTATIONARY FEEDBACK SYSTEMS PART II. THE SYNTHESIS PROBLEM

A. R. Stubberud

Summary: In this paper and a companion paper a technique for the synthesis of linear, nonstationary feedback systems is presented. This paper deals with the synthesis problem, i. e., a method is developed whereby a given weighting function can be synthesized as a feedback system. The problem of synthesizing a nonstationary weighting function as a feedback system when constrained by a fixed plant is also solved. A differential equation algebra which allows the solution of these problems is developed.

INTRODUCTION

In a companion paper 18 a technique for synthesizing linear, nonstationary feedback systems which parallel the synthesis technique proposed by Guillemin, 1, for linear, stationary feedback systems was proposed. In the companion paper the approximation problem was discussed. In this paper the synthesis problem will be discussed. An algebra of linear differential equations is first developed, and this algebra is then used to show that a given weighting function can always be synthesized as a feedback system.

AN OPERATOR ALGEBRA FOR DIFFERENTIAL EQUATIONS

Once the weighting function of a system has been determined by either the technique described in a companion paper 18 or by one of the other known techniques, the next step in the development is to realize this system in the form of a feedback system. First, however, the differential equation of which the weighting function is a solution must be determined. A technique for generating a differential equation from its weighting function has been discussed 2, 4, elsewhere; therefore only the necessary steps are repeated here.

If a weighting function has the form

$$\begin{aligned} W(t, \tau) &= \sum_{i=1}^n \beta_i(\tau) q_i(t) + b_n(t) \delta(t-\tau) & t \geq \tau \\ &= 0 & t < \tau \end{aligned} \quad (1)$$

where the $\beta_i(\tau)$ and $q_i(t)$ have a sufficient number of derivatives, then $W(t, \tau)$ satisfies the differential equation

$$\sum_{i=0}^n a_i(t) \frac{\partial^i}{\partial t^i} [W(t, \tau)] = \sum_{j=0}^n b_j(t) \frac{\partial^j}{\partial t^j} [\delta(t-\tau)] \quad (2)$$

where $a_n(t) = 1$ and the $a_i(t)$ and $b_j(t)$ are continuous functions of time. The $a_i(t)$ and $b_j(t)$ of the differential equation can then be determined from the known $W(t, \tau)$ as follows. The $a_i(t)$ are obtained immediately as solutions of the n simultaneous equations.

$$\sum_{i=0}^{n-1} a_i(t) \frac{d^i q_j(t)}{dt^i} = - \frac{d^n q_j(t)}{dt^n} \quad j = 1, 2, \dots, n \quad (3)$$

This set of equations always has a unique solution since the determinant of the equations is the Wronskian of the $q_j(t)$ which are linearly independent functions. After the $a_i(t)$ have been determined, the $b_j(t)$ are determined from the equations

$$b_{n-i}(t) = \sum_{k=0}^i \sum_{s=0}^{i-k} \binom{n+s-i}{n-i} a_{n-i+k+s}(t) \frac{d^s F_k(t)}{dt^s} \quad (4)$$

$i = 1, 2, \dots, n$

where $\binom{n+s-i}{n-i}$ is the binomial coefficient and the $F_k(t)$ are given by the relationships:

$$F_0(t) = b_n(t)$$

$$F_k(t) = \left\{ \frac{\partial^{k-1}}{\partial t^{k-1}} \left[W(t, \tau) \right] \right\} \bigg|_{\tau=t^-} \quad k = 1, 2, \dots, n \quad (5)$$

Thus application of Equations (3), (4), and (5) allow generation of a differential equation from its corresponding weighting function. This step is necessary since from this point on all manipulations are done on the differential equations which correspond to the elements in the system. (It should be kept in mind that whenever possible it is desirable to work with the corresponding weighting functions; these are in general unknown, hence the more general differential equation approach is used.)

To aid in the development in the next section it is desirable to develop an operator algebra which will simplify many of the manipulations which are found necessary. Since a linear differential equation of the form

$$\sum_{i=0}^n a_i(t) \frac{d^i y}{dt^i} = \sum_{j=0}^n b_j(t) \frac{d^j x}{dt^j} \quad (6)$$

is a linear transformation of x into y , the algebra is an algebra of linear transformations. The transformations (linear differential equations) which are considered will all have the form of Equation (6) where some of the $a_i(t)$ and $b_j(t)$ may be zero. In the following development, capital letters ($A, B, C, \dots$) are used to denote differential equations and represent equations of the form of Equation (6). In addition, all initial conditions are assumed to be zero.

The algebra of differential equations involves three operations:

- (1) Addition of two differential equations, i. e.,

$$A + B = C \quad (7)$$

- (2) Multiplication of differential equation by a scalar, i. e.,

$$p(t) A = B \quad (8)$$

$$\text{or } A p(t) = C \quad (9)$$

(Clearly if $p(t)$ is a constant, $B = C$.)

- (3) Multiplication of two differential equations, i. e.,

$$A B = C \quad (10)$$

These operations are indicated in block diagram form in Figure 1. Obviously, in order for this algebra to be useful, each of these operations must be defined. In addition the following useful properties of this algebra will be defined:

- (1) A unity element
- (2) A zero element
- (3) An additive inverse
- (4) A multiplicative inverse

Multiplication of Two Differential Equations. It is necessary to define multiplication first since it is used in defining addition. It is obvious from Figure 1(d) that multiplication is identical to convolution if A and B represent weighting functions.


Any differential equation of the form in Equation (6) can be divided into two parts: a differential operator and an integral operator as indicated in Figure 2. The relationships between the variables x , y and z are, in terms of the notation of Equation (6):

$$z = \sum_{j=0}^n b_j(t) \frac{d^j x}{dt^j} \quad (11)$$

$$\sum_{i=0}^n a_i(t) \frac{d^i y}{dt^i} = z \quad (12)$$

Now if two differential equations are multiplied together, this operation can be represented by Figure 3(a). The equations which define the relationships between the variables in this system are:


$$\sum_{j=0}^n b_j(t) \frac{d^j x}{dt^j} = x_1 = \sum_{i=0}^n a_i(t) \frac{d^i y}{dt^i} \quad (13)$$

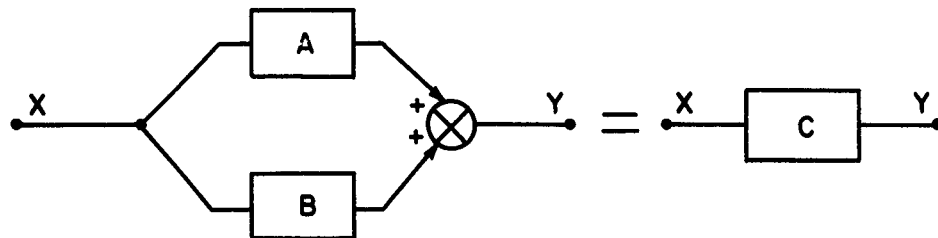


(a) ADDITION OF TWO DIFFERENTIAL EQUATIONS



(b) PRE-MULTIPLICATION OF A DIFFERENTIAL EQUATION BY A SCALAR



(c) POST-MULTIPLICATION OF A DIFFERENTIAL EQUATION BY A SCALAR



(d) MULTIPLICATION OF TWO DIFFERENTIAL EQUATIONS

OPERATIONS OF TRANSFORMATION ALGEBRA

FIGURE 1

$$\sum_{s=0}^m f_s(t) \frac{d^s y}{dt^s} = y_1 = \sum_{k=0}^m c_k(t) \frac{d^k z}{dt^k} \quad (14)$$

In Figure 3(b) the two inner operators in Figure 3(a) have been "interchanged". In general these operators are not commutable, therefore

$$\text{Diff}_2 \neq \text{Diff}_3$$

$$\text{Int}_1 \neq \text{Int}_3$$

It is necessary at this point to determine the relationships between x_1 , W and y_1 in terms of the parameters of Equations (13) and (14). Assume that these relationships can be written

$$\sum_{r=0}^m g_r(t) \frac{d^r x_1}{dt^r} = W \quad (15)$$

and


$$\sum_{s=0}^n h_s(t) \frac{d^s y_1}{dt^s} = W \quad (16)$$

where $g_r(t)$ and $h_s(t)$ are as yet unknown coefficients. Substituting the values for x_1 and y_1 , each in terms of y , into Equations (15) and (16) produces the relationship:

$$\begin{aligned} \sum_{\alpha=0}^m \sum_{i=0}^n \sum_{c=0}^{\alpha} \binom{\alpha}{c} g_{\alpha}(t) \frac{d^{(\alpha-c)} a_i(t)}{dt^{(\alpha-c)}} \frac{d^{(i+c)} y}{dt^{(i+c)}} = \\ \sum_{\beta=0}^n \sum_{l=0}^m \sum_{\delta=0}^{\beta} \binom{\beta}{s} h_{\beta}(t) \frac{d^{(\beta-\delta)} f_1(t)}{dt^{(\beta-\delta)}} \frac{d^{(1+\delta)} y}{dt^{(1+\delta)}} \end{aligned} \quad (17)$$


If the coefficients of like derivatives of y are equated, a system of $m+n+1$ simultaneous equations in the $m+n+2$ unknown $g_{\alpha}(t)$ and $h_{\beta}(t)$ are formed. Arbitrarily choosing $h_n(t) = 1$ (without loss of generality) allows these equations to be solved for the remaining $m+n+1$ unknowns. This operation shows the equivalence of Figures 3(a) and 3(b). Figure 3(b) can be further reduced to Figure 3(c) by combining the differential and integral operators and the resulting equation is:

$$\sum_{\beta=0}^n \sum_{k=0}^m \sum_{f=0}^{\beta} \binom{\beta}{f} h_{\beta}(t) \frac{d^{(\beta-f)} c_k(t)}{dt^{(\beta-f)}} \frac{d^{(k+f)} z}{dt^{(k+f)}} =$$




BLOCK DIAGRAM OF DIFFERENTIAL EQUATION


FIGURE 2



(a) PRODUCT OF TWO DIFFERENTIAL EQUATIONS



(b) EQUIVALENT BLOCK DIAGRAM OF FIGURE 7(a)



(c) EQUIVALENT BLOCK DIAGRAM OF FIGURE 7(b)

MULTIPLICATION OF TWO DIFFERENTIAL EQUATIONS

FIGURE 3

$$= \sum_{\alpha=0}^m \sum_{j=0}^n \sum_{r=0}^{\alpha} \binom{\alpha}{r} g_{\alpha}(t) \frac{d^{(\alpha-r)} b_j(t)}{dt^{(\alpha-r)}} \frac{d^{(j+r)} x}{dt^{(j+r)}} \quad (18)$$

where x is the system input and z the output. Multiplication of two differential equations defined by Equations (13) and (14) is then defined by the steps indicated in Equations (15), (16), (17), and (18) and is denoted symbolically by

$$A B = C \quad (19)$$

where A corresponds to (13), B to (14), and C to (18).

The Unity Element. The unity element is defined as that element which when applied to a function leaves the function unchanged. In differential equation algebra, the unity element is any differential equation of the form

$$\sum_{i=0}^n a_i(t) \frac{d^i x}{dt^i} = \sum_{i=0}^n a_i(t) \frac{d^i y}{dt^i} \quad (20)$$

where x is the input and y is the output. Since the initial conditions are assumed zero, $y=x$ and this equation indeed represents a unity element which will be denoted I .

The Multiplicative Inverse. A multiplicative inverse is defined as a differential equation (which will be denoted A^{-1}) which has the property that if it is multiplied by the differential equation A , a unity element is produced. Symbolically this is denoted

$$A^{-1} A = A A^{-1} = I \quad (21)$$

It was shown in Reference 8 that if A is represented by the differential equation


$$\sum_{i=0}^n a_i(t) \frac{d^i y}{dt^i} = \sum_{j=0}^n b_j(t) \frac{d^j x}{dt^j} \quad (22)$$

where x is the input and y is the output, then A^{-1} is represented by the differential equation


$$\sum_{j=0}^n b_j(t) \frac{d^j x}{dt^j} = \sum_{i=0}^n a_i(t) \frac{d^i y}{dt^i} \quad (23)$$

where x is the output and y is the input.


Addition of Two Differential Equations. Addition of two differential equations is represented symbolically in Figure 4(a). As in the case of multiplication, the differential equations have been divided into differential and integral operators. The addition is performed step-by-step as indicated by the block diagrams in steps indicated in Figure 4. In step 1 the original system is multiplied by the cascade combination of two differential

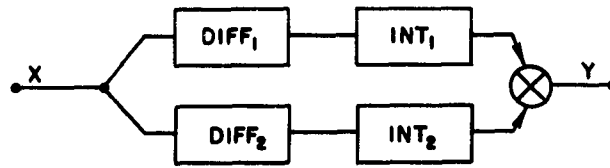


4 (a) ORIGINAL SYSTEM

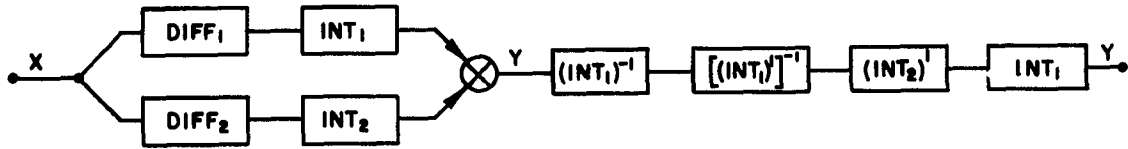


4 (b) STEP 1

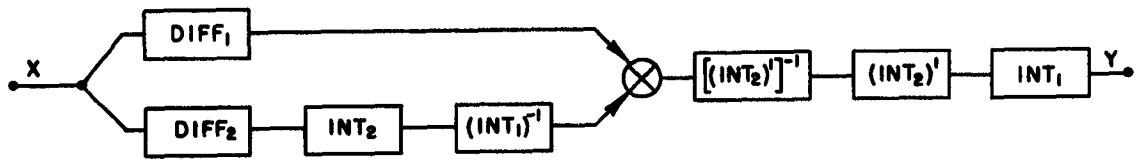


4 (c) STEP 2

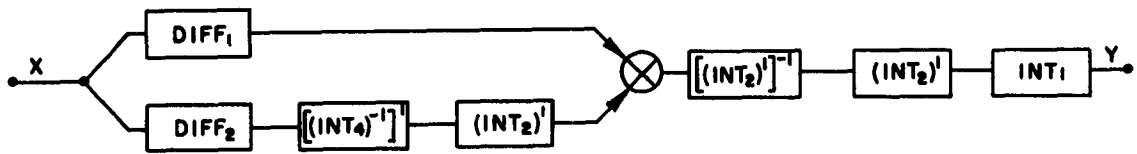


4 (d) STEP 3

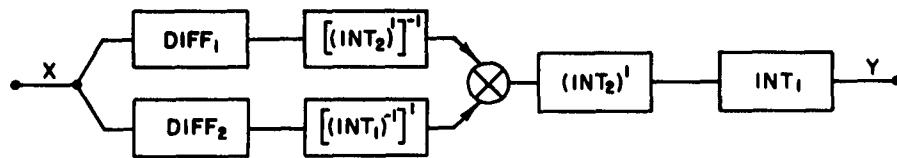

4 (e) STEP 4

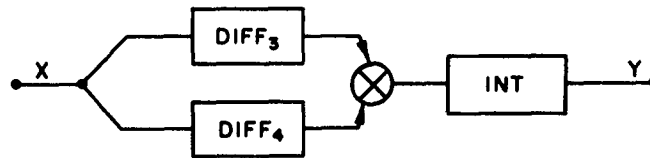

4 (f) STEP 5



4 (g) STEP 6

ADDITION OF DIFFERENTIAL EQUATIONS

FIGURE 4

operators denoted $(\text{Int}_1)^{-1}$ and $[(\text{Int}_2)']^{-1}$ and two integral operators Int_1 and $(\text{Int}_2)'$ which are their respective multiplicative inverses. This combination then represents a unity element. Since the system is linear $(\text{Int}_1)^{-1}$ can be moved to the left of the summing junction, thus eliminating Int_1 from the upper element as shown in Figure 4(c). Now the integral operator Int_2 and the differential operator $(\text{Int}_1)^{-1}$ are multiplied and the product separated into its new differential and integral operators as indicated in step 3, where the new differential operator is denoted $[(\text{Int}_1)^{-1}]'$ and the new integral operator is denoted $(\text{Int}_2)'$. $(\text{Int}_2)'^{-1}$ is now moved to the left of the summing junction thus cancelling $(\text{Int}_2)'$. To the left of the summing junction there are now only differential operators and to the right only integral operators. These can then be combined as indicated in steps 5 and 6, and thus addition of differential equations has been defined.

The Zero Element. The zero element in differential equation algebra is defined as any differential equation whose output is always identically zero. The zero element is denoted 0.

The Additive Inverse. The additive inverse of a differential equation A is defined as that differential equation B which when added to A produces a zero element, i.e.,

$$A + B = 0 \quad (24)$$

It is quite obvious that if A is the differential equation

$$\sum_{i=0}^n a_i(t) \frac{d^i y}{dt^i} = \sum_{j=0}^n b_j(t) \frac{d^j x}{dt^j} \quad (25)$$

where x is the input and y is the output, then B has the form

$$\sum_{i=0}^n a_i(t) \frac{d^i y}{dt^i} = - \sum_{j=0}^n b_j(t) \frac{d^j x}{dt^j} \quad (26)$$

Multiplication of a Differential Equation by a Scalar. Multiplication of a differential equation by a scalar can be considered to be a degenerate case of multiplication of two differential equations where one of the differential equations is the degenerate equation

$$y = p(t)x \quad (27)$$

in which x is the input and y is the output. The techniques developed for multiplying differential equations are then applicable to multiplication of a differential equation by a scalar.

In addition to the above mentioned properties of differential equation algebra, the following laws hold:


- (1) Addition is commutative, i.e., $A+B = B+A$
- (2) Addition is associative, i.e., $A+(B+C) = (A+B)+C$
- (3) Multiplication is not commutative, i.e., $A B \neq B A$
(In the stationary case multiplication is commutative.)
- (4) Multiplication is associative, i.e., $A (B C) = (A B) C$
- (5) Distributivity is valid, i.e., $A (B+C) = A B + A C$

In this section an algebra for differential equations has been discussed. With the aid of this algebra it is shown in the next section how linear system synthesis can be carried out operating only on differential equations.

SYNTHESIS OF A DIFFERENTIAL EQUATION AS A FEEDBACK SYSTEM

Once the differential equation algebra of the preceding section has been developed, its application to the synthesis problem is as straightforward conceptually as is the application of Laplace transform algebra in the synthesis of linear stationary systems. The advantage of such an algebra is that all of the manipulative operations can be performed symbolically and the numerical details carried through only at the end of the process.

To describe the technique of synthesis, the feedback configuration in Figure 5 will be examined. In this figure r is the input, c is the output, and K , G , and H are differential equations. m and ϵ are intermediate variables in the system. In the following the

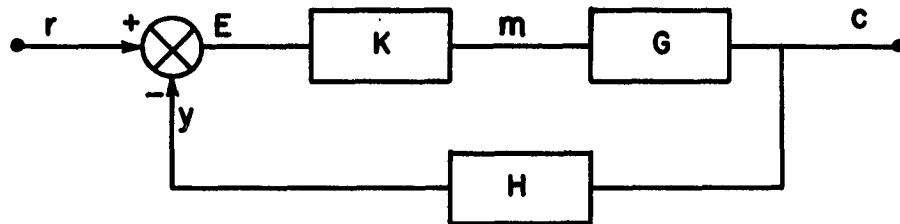

GENERAL FEEDBACK CONFIGURATION

FIGURE 5

operation (x) represents the operation which a differential equation performs on a variable to produce a new variable. Let the relationship between the input $r(t)$ and the output $c(t)$ be

$$c = Wxr \quad (28)$$

where W is the desired overall differential equation. From the figure it is seen that

$$y = Hxc \quad (29)$$

$$\text{and } \epsilon = r - y = r - Hxc \quad (30)$$

$$\text{Since } C = GKx\epsilon \quad (31)$$

$$\text{then } r = Ix\epsilon + HGKx\epsilon = [I + HGK] x\epsilon \quad (32)$$

by virtue of the fact that

$$Ix\epsilon = \epsilon \quad (33)$$

Applying the multiplicative inverse of $(I + HGK)$ to both sides of (32) the equation

$$\epsilon = [I + HGK]^{-1} x r \quad (34)$$

results. Then since

$$c = GK x \epsilon \quad (35)$$

substitution of (34) into (35) produces the equation


$$c = GK [I + HGK]^{-1} x r \quad (36)$$

Comparison of Equations (28) and (36) reveals that

$$W = GK [I + HGK]^{-1} \quad (37)$$

Equation (37) may be considered the fundamental relationship for Figure 5. Two special cases of the configuration in Figure 5 will now be considered.

Synthesis of a Feedback System Unconstrained by a Fixed Plant. Suppose that a given overall differential equation W is to be realized as a feedback system with a unity feed-back, i. e., it is to have the configuration in Figure 6. The problem then is to determine

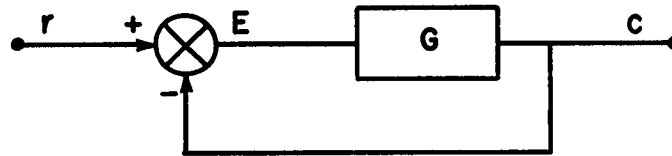

UNITY GAIN FEEDBACK SYSTEM

FIGURE 6

G in terms of W . Since in this case

$$K = H = I \quad (38)$$

Equation (37) reduces to


$$W = G(I+G)^{-1} \quad (39)$$

Solving Equation (39) for G the relationship

$$G = W(I - W)^{-1} \quad (40)$$

is obtained. Therefore a given differential equation W can be synthesized as a unity feedback system with G as the feedforward element through Equation (40). The actual differential equation of G is obtained by performing the operations indicated in Equation (40).

Synthesis of a System Constrained by a Fixed Plant. In this case let W be the differential equation of the overall system of the configuration in Figure 7. G is the differential equation of the known fixed plant. The problem is to find the differential equation of a

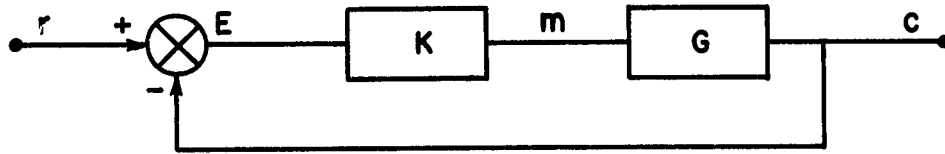

FEEDBACK SYSTEM WITH FIXED PLANT

FIGURE 7

suitable compensation network K such that this system has the desired overall response indicated by W . Setting $H = I$ in Equation (37) and solving for K , the relationship

$$K = G^{-1} [I - W]^{-1} W \quad (41)$$

is formed. Performing the operations indicated symbolically in Equation (41), the differential equation for K is obtained.

Example: As an example of the process described above consider the following problem. Suppose that G in Figure 7 is a fixed plant described by the differential equation

$$\frac{d^2 c}{dt^2} + \frac{dc}{dt} + e^{-t} c = m(t) \quad (42)$$

and it is desired to choose K such that the overall differential equation W has the form

$$\frac{d^2 c}{dt^2} + 2 \frac{dc}{dt} + c = r(t) \quad (43)$$

which is obviously stationary. Because of the stationarity of W the differential equation $I-W$ is easily obtained by the method of addition of differential equations as:

$$\frac{d^2 z}{dt^2} + 2 \frac{dz}{dt} = \frac{d^2 c}{dt^2} + 2 \frac{dc}{dt} + c \quad (44)$$

where z is the input and c is the output. The differential equation $(I-W)^{-1}W$ can then be formed and is given by:

$$\frac{d^2 c}{dt^2} + 2 \frac{dc}{dt} = \epsilon(t) \quad (45)$$

The differential equation for K is finally determined by forming the product

$$K = G^{-1} (I-W)^{-1} W \quad (46)$$

and the equation for this compensation network is found to be:

$$\frac{d^2 \epsilon}{dt^2} + \frac{2+3e^{-t}}{1+e^{-t}} \frac{d\epsilon}{dt} + (1+e^{-t}) \epsilon = \frac{d^2 m}{dt^2} + \frac{3+4e^{-t}}{1+e^{-t}} \frac{dm}{dt} + \frac{2+3e^{-t}}{1+e^{-t}} m \quad (47)$$

Thus the compensating network is completely specified by Equation (47). This network can be synthesized by analog computer elements in a relatively straightforward manner by the techniques in Reference 15.

CONCLUSIONS

In this paper and a companion paper 18 a technique for synthesizing linear nonstationary feedback systems has been developed. For the synthesis of systems which receive inputs which are polynomials in time, the technique is complete, i. e., it includes both the approximation problem and the synthesis problem. In any event once the overall system weighting function or overall system differential equation has been specified, the synthesis technique leads to an exact synthesis of the system.

Also included in this paper is a discussion of an algebra of differential equations which is valuable to problems in both analysis and synthesis. This algebra allows manipulation of linear, nonstationary systems in a more logical manner than has been possible heretofore.

The synthesis technique has been applied to a simple single loop system in this report. There is no reason, however, for its not being applied to both multiple-loop and multiple-variable systems with equal facility.

In conclusion, as a result of a review of the literature, it appears that this is the first general and complete synthesis technique which is applicable to a wide class of linear, nonstationary feedback systems.

REFERENCES

1. Truxal, J.G., Control Systems Synthesis, McGraw-Hill Book Co., New York, 1955, Chapter 5.
2. Borskii, V., "On the Properties of Impulsive Response Function of Systems with Variable Parameters", Automation and Remote Control, Vol. 20, July, 1959, pp. 822-830.
3. Zadeh, L.A., "The Determination of the Impulsive Response of Variable Networks", Journal of Applied Physics, Vol. 21, July, 1950, pp. 642-645.
4. Control Systems Engineering, Edited by William W. Siefert and Carl W. Steeg, Jr., McGraw-Hill Book Company, New York, 1960, Chapters 12 and 15.
5. Zadeh, L.A., "Circuit Analysis of Linear Varying-Parameter Networks", Journal of Applied Physics, Vol. 21, November, 1950, pp. 1171-1177.
6. Zadeh, L.A., "A General Theory of Linear Signal Transmission Systems", Journal of the Franklin Institute, April, 1952, pp. 293-312.
7. Zadeh, L.A., "Frequency Analysis of Variable Networks", Proceedings of the I.R.E., Vol. 38, March, 1950, pp. 291-299.
8. Stear, E.B. and Stubberud, A.R., "Nonstationary Signal Flow Graph Theory", Report No. 60-64, University of California, Department of Engineering, Los Angeles, California, November, 1960.
9. Darlington, S., "Nonstationary Smoothing and Prediction Using Network Theory Concepts", I.R.E. Transactions on Information Theory, Vol. IT-5, May, 1959, pp. 1-11.
10. Darlington, S., "An Introduction to Time-Variable Networks", Proceedings of Symposium on Circuit Analysis, University of Illinois, 1955, pp. 5-1 to 5-25.
11. Darlington, S., "Time-Variable Transducers", Proceedings of the Symposium on Active Networks and Feedback Systems, Polytechnic Press of the Polytechnic Institute of Brooklyn, New York, 1960, pp. 621-633.
12. Cruz, J.B., "On the Realizability of Linear Differential Systems", I.R.E. Transaction on Circuit Theory, Vol. CT-7, Sept. 1960, pp. 347-348.
13. Cruz, J.B. and Van Valkenberg, M.E., "The Synthesis of Models for Time-Varying Linear Systems", Proceedings of the Symposium on Active Networks and Feedback Systems, Polytechnic Press of the Polytechnic Institute of Brooklyn, New York, 1960, pp. 527-544.
14. Batkov, A.M., "The Problem of Synthesizing Linear Dynamic Systems with Variable Parameters", Automation and Remote Control, Vol. 19, January, 1958, pp. 42-48.

15. Matyash, I., "Methods of Analog Computer Solution of Linear Differential Equations with Variable Coefficients", Automation and Remote Control, Vol. 20, July, 1959, pp. 813-821.
16. Malchikov, S.V., "On the Synthesis of Linear Automatic Control Systems with Variable Parameters", Automation and Remote Control, Vol. 20, December, 1959, pp. 1543-1549.
17. Cruz, J.B., "A Generalization of the Impulse Train Approximation for Time-Varying Linear System Synthesis in the Time Domain", I.R.E. Transactions on Circuit Theory, Vol. CT-6, December, 1959, pp. 393-394.
18. Stubberud, A.R., "A Technique for the Synthesis of Linear Nonstationary Feedback Systems, Part I, The Approximation Problem", to be published.
19. Stubberud, A.R., E.B. Stear, "Signal Flow Graph Theory for Linear Time Variable Systems", accepted for publication in AIEE Transactions.

DISTRIBUTION LIST

No. Copies	Agency	No. Copies	Agency
10	ASTIA ATTN: TIPCR Arlington Hall Station Arlington 12, Virginia	1	AFSWC (SWOI) Kirtland AF Base New Mexico
4	AFOSR ATTN: SRHM (2) ATTN: SRGL (2) Washington 25, D.C.	1	Director BRL ATTN: Library Aberdeen Proving Ground, Maryland
2	EOOAR (2) Shell Building 47 Rue Cantersteen Brussels, Belgium	1	Office of Ordnance Research Box CM Duke Station Durham, North Carolina
1	AEDC ATTN: AEOIM Arnold Air Force Station Tennessee	1	Army Rocket and Guided Missile Agency ATTN: Technical Library Redstone Arsenal, Alabama
1	AFFTC ATTN: FTOTL Edwards AF Base California	1	Signal Corps Engineering Laboratory ATTN: SIGFMIEL - RPO Fort Monmouth, New Jersey
1	AFMDC ATTN: HDOI Holloman AF Base New Mexico	1	Office of the Chief of R&D ATTN: Scientific Information Department of the Army Washington 25, D.C.
1	AFMTC ATTN: AFMTC Tech Library-MU-135 Patrick AF Base Florida	4	Office of Naval Research (2) ATTN: Mechanics Branch (1) Airbranch (1) Washington 25, D.C.
1	AFOSR (SRLTL) Holloman AF Base New Mexico	1	Naval Research Laboratory ATTN: Documents Library Washington 25, D.C.
4	Aeronautical Systems Division ATTN: WWAD (2) ATTN: WWRMCM (1) ATTN: ASRNGC (1) Wright-Patterson AF Base, Ohio	1	Naval Ordnance Laboratory ATTN: Library White Oak, Maryland
2	ARL (OAR) Wright-Patterson AF Base Ohio	1	David Taylor Model Basin Aerodynamics Laboratory ATTN: Library Washington 7, D.C.
1	Institute of Technology Library (AU) MCLI-LIH, Bldg. 125, Area B Wright-Patterson Air Force Base, Ohio	1	Chief, Bureau of Ordnance Department of the Navy ATTN: Special Projects Office, SP-2722 Washington 25, D.C.
1	APGC (PGAPI) Eglin, AFB, Florida	1	NASA ATTN: Document Library 1502 H Street, N.W. Washington 25, D.C.
2	AFCHL ATTN: CHRELA L.G. Hanscomb Field Bedford, Massachusetts	1	Ames Research Center (NASA) ATTN: Technical Library Moffett Field, California
		2	AFOSR ATTN: SRHM ATTN: SRGL Washington 25, D.C.

DISTRIBUTION LIST

No. Copies	Agency	No. Copies	Agency
1	High Speed Flight Station (NASA) ATTN: Technical Library Edwards AFB, California	1	Director National Aeronautical Establishment Ottawa, Ontario Canada
1	Langley Research Center (NASA) ATTN: Technical Library Langley AFB, Virginia	1	University of Toronto Institute of Aerophysics ATTN: Library Toronto 5, Canada
1	Lewis Research Center (NASA) ATTN: Technical Library 21000 Brookpark Road Cleveland 35, Ohio	1	Training Center for Experimental Aero- dynamics ATTN: Library Rhode-Saint-Genese (Belgique) 72, Chaussee de Waterloo, Brussels, Belgium
1	National Bureau of Standards U.S. Department of Commerce ATTN: Technical Reports Section Washington 25, D.C.	1	Library (Route to Dr. W.P. Jones) Aeronautical Research Council National Physical Laboratory Teddington, England
1	Office of Technical Services U.S. Department of Commerce ATTN: Technical Reports Section Washington 25, D.C.	1	University of California Engineering Department ATTN: Libry.(Rte. to Drs. Leondes & Estrin) Los Angeles 24, California
1	National Science Foundation ATTN: Engineering Sciences Division 1951 Constitution Avenue, NW Washington 25, D.C.	1	California Institute of Technology ATTN: JPL Library 4800 Oak Grove Drive Pasadena 4, California
1	U.S. Atomic Energy Commission Technical Information Extension P.O. Box 62 Oak Ridge, Tennessee	1	California Institute of Technology Guggenheim Aeronautical Laboratory ATTN: Library Pasadena 4, California
1	U.S. Atomic Energy Commission Technical Information Service 1901 Constitution Avenue, NW Washington 25, D.C.	1	Harvard University Department of Engineering Sciences ATTN: Library Cambridge 38, Massachusetts
1	Lewis Research Center (NASA) ATTN: Technical Library 21000 Brookpark Road Cleveland 35, Ohio	1	John Crerar Library 86 E. Randolph Street Chicago 1, Illinois
2	Southwest Research Institute ATTN: Applied Mechanics Reviews 8500 Culebra Road San Antonio 6, Texas	1	The Johns Hopkins University Department of Mechanics ATTN: Libry.(Rte. to Prof. F.H.Clauser) Baltimore 18, Maryland
1	Aeronautical Engineering Review 2 East 64th Street New York 21, New York	1	University of Maryland Institute for Fluid Mechanics and Applied Mechanics College Park, Maryland
1	Institute of Aeronautical Sciences ATTN: Library 2 East 64th Street New York 21, New York	1	Massachusetts Institute of Technology ATTN: Aeronautics Library Cambridge 39, Massachusetts
1	Chairman Canadian Joint Staff (DRB/DSIS) 2450 Massachusetts Avenue, NW Washington 25, D.C.	1	Massachusetts Institute of Technology Naval Supersonic Laboratory Cambridge 39, Massachusetts

DISTRIBUTION LIST

No. Copies	Agency	No. Copies	Agency
1	Midwest Research Institute ATTN: Library 425 Volker Boulevard Kansas City 10, Missouri	1	University of Illinois Department of Electrical Engineering ATTN: Libry.(Rte. to Dr. Van Vaulkenberg) Urbana, Illinois
1	Polytechnic Institute of Brooklyn ATTN: Library 333 Jay Street Brooklyn 1, New York	1	Boeing Scientific Research Laboratories ATTN: Research Library P.O. Box 3981 Seattle 24, Washington
1	The James Forrestal Research Center Princeton University ATTN: Library Princeton, New Jersey	1	Convair Scientific Research Laboratory ATTN: Library P.O. Box 950 San Diego 12, California
1	Rensselaer Polytechnic Institute ATTN: Libry. (Rte. to Dr. Fleishman) Troy, New York	1	Cornell Aeronautical Laboratories, Inc. ATTN: Library 1965 Sheridan Avenue Buffalo 23, New York
1	Stanford Research Institute Documents Center (ATTN: Acquisitions) Menlo Park, California	1	Grumman Aircraft Engineering Corporation ATTN: Library Bethpage, Long Island, New York
1	Stanford University Department of Aeronautical Engineering ATTN: Library Stanford, California	1	Hughes Aircraft Company Research and Development Laboratories ATTN: Library Culver City, California
1	New York University Institute of Mathematical Sciences ATTN: Library New York 3, New York	1	Lockheed Missile Systems Division ATTN: Library Palo Alto, California
1	University of Wisconsin Department of Electrical Engineering ATTN: Library (Rte. to Prof. Higgins) Madison, Wisconsin	1	The Martin Company ATTN: Library Baltimore 3, Maryland
1	University of Michigan Instrumentation Engineering Programs Ann Arbor, Michigan	1	School of Aeronautical and Engineering Sciences Purdue University ATTN: Library (Route to Dr. Hu Lo) Lafayette, Indiana
1	Columbia University Department of Electrical Engineering ATTN; Libry. (Rte. to Prof. G. Kranc) New York 27, New York	2	Rand Corporation 1700 Main Street Santa Monica, California
1	Yale University School of Engineering ATTN: Library New Haven 10, Connecticut	1	Unified Science Associates, Inc. ATTN: S. Naiditch, President 926 S. Arroyo Parkway Pasadena, California
1	University of California Department of Electrical Engineering ATTN: Libry. (Rte. to Dr. L. Zadeh) Berkeley, California	1	Westinghouse Electric Corporation Air Arm Division Friendship International Airport Baltimore, Maryland
1	New York University College of Engineering ATTN: Libry.(Rte. to Dean Ragazzini) New York, New York	1	Aeronca Manufacturing Corporation Aerospace Division P.O. Box 536 Baltimore 3, Maryland
1	Purdue University Department of Electrical Engineering ATTN: Libry. (Rte. to Prof. J.E. Gibson) Lafayette, Indiana	1	Flight Sciences Laboratory ATTN: Library 1965 Sheridan Avenue Buffalo 23, New York

DISTRIBUTION LIST

No. Copies	Agency
1	General Electric Company Research Laboratory P.O. Box 1088 Schenectady 5, New York
1	MSVD Library General Electric Company Valley Forge Space Technology Center King of Prussia, Pennsylvania ATTN: L. Chasen, Manager - Library M/F I . F. W. Wendt