

UNCLASSIFIED

AD 274 306

*Reproduced
by the*

**ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA**



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

274 306



274306

AD 10.

A Unique Synthesis Method of Transformerless Active RC Networks

by

S. K. Mitra

Series No. 60, Issue No. 411

G-12142

October 12, 1961

ELECTRONICS RESEARCH LABORATORY

UNIVERSITY OF CALIFORNIA

BERKELEY CALIFORNIA

Electronics Research Laboratory
University of California
Berkeley, California

A UNIQUE SYNTHESIS METHOD OF TRANSFORMERLESS
ACTIVE RC NETWORKS

by

S. K. Mitra

Institute of Engineering Research
Series No. 60, Issue No. 411

National Science Foundation Grant G-12142
October 12, 1961

ACKNOWLEDGMENT

The author wishes to thank Professor E. S. Kuh for his encouragement and helpful suggestions. Thanks are also due to Messers. J. D. Patterson and R. A. Rohrer for useful discussions.

ABSTRACT

A unique decomposition of active RC driving-point impedance functions is presented, which has been obtained by considering the driving-point synthesis problem in terms of the reflection coefficient. Application of the decomposition has been shown to guarantee the realization of the driving-point impedance in Kinariwala's cascade configurations and Sandberg's special configurations, each containing one negative impedance converter. The method imposes no restriction on the impedance function, except that it has only to be a real rational function. The decomposition technique can be easily programmed on a digital computer.

TABLE OF CONTENTS

	<u>Page</u>
I. INTRODUCTION	1
II. DEVELOPMENT OF THE DECOMPOSITION	2
A. The Concept of Reflection Coefficient.	2
B. Special Case	5
C. The Decomposition	6
D. The Associated Function	7
III. SYNTHESIS PROCEDURES USING ONE ACTIVE ELEMENT . . .	8
A. The Cascade Method.	8
B. Synthesis Using Special Structures	11
IV. ILLUSTRATIONS.	12
A. Example 1	12
B. Example 2	14
C. Example 3	15
V. CONCLUSION	16
REFERENCES.	22

I. INTRODUCTION

Synthesis of active RC networks has received considerable attention in recent years because of the advantages these networks possess compared to other types of networks. A one-port active RC network can be considered to consist of a three-port passive RC network (the so-called associated¹ RC network) to two ports of which is connected an active device. Usually, the three-port RC network is a combination of several one-port and/or two-port RC networks. In general, the steps followed in most of the existing synthesis techniques are:

- Step 1 - Decomposition and partitioning of the given function,
- Step 2 - Identification of the associated RC network (or networks) parameters,
- Step 3 - Synthesis of the associated network.

Although several active RC configurations will be found in the literature, there exists no straightforward decomposition and partitioning method which would result in unique functions characterizing the associated RC network.

The purpose of this paper is twofold. First it presents a unique decomposition of active RC driving-point impedance functions. Second, it shows that the suggested decomposition can be used to realize impedance functions in existing active RC configurations, where the associated networks are now easily obtained. In a sense, this paper proves in a very simple and straightforward way the following:

Theorem: Any real rational function of s , the complex frequency variable, can always be synthesized as the driving-point impedance of an active RC transformerless network containing a single negative impedance converter and associated RC networks which are characterized by unique functions.

The basic idea behind it is to obtain an equivalent active LC driving-point impedance from the given function by an RC-LC transformation. Then the reflection coefficient corresponding to this

equivalent LC impedance is obtained. It is shown that the reflection coefficient can be expressed as a product of two reflection coefficients, one corresponding to the passive portion and the other representing the active portion. Following Kelly's approach,⁴ the desired decomposition is obtained upon inverse LC-RC transformation. The suggested decomposition can be programmed on a digital computer.

II. DEVELOPMENT OF THE DECOMPOSITION

A. The Concept of Reflection Coefficient

Consider an active RC driving-point impedance $Z(s) = K N(s)/D(s)$ where $Z(s)$ is restricted to be a real rational function of s and the leading coefficients of $N(s)$ and $D(s)$ are assumed to be unity. Using the RC-LC transformation,⁵ we can obtain an equivalent active LC driving-point impedance $\hat{Z}(s)$, which is defined as

$$\hat{Z}(s) = s Z(s^2) = K \frac{s N(s^2)}{D(s^2)} \quad (1)$$

The reflection coefficient $\hat{\rho}(s)$ corresponding to $\hat{Z}(s)$ is given as

$$\hat{\rho}(s) = \frac{\frac{E_{in}(s)}{2} - E_o(s)}{\frac{E_{in}(s)}{2}} = \frac{1 - \hat{Z}(s)/R_{in}}{1 + \hat{Z}(s)/R_{in}} \quad (2)$$

according to the notations of Fig. 1. Substituting (1) in (2), we obtain

$$\hat{\rho}(s) = \frac{D(s^2) - s N(s^2)}{D(s^2) + s N(s^2)} = \frac{Q(s)}{Q(-s)} \quad (3)$$

where the impedance level has been normalized with respect to R_{in} equal to K .^{*} Now, $D(s^2)$ is an even function and $s N(s^2)$ is an odd function. As a result, it is clear from (3) that to each zero of $\hat{\rho}(s)$ in the left-half s -plane there corresponds a pole of $\hat{\rho}(s)$ in the right-half plane symmetrically situated with respect to the $j\omega$ -axis and vice versa. We also assume here that if $D(s^2)$ has any zero at origin, it is

^{*}Henceforth we will consider only normalized $Z(s)$ and $\hat{Z}(s)$.

not cancelled with the factor s in the numerator of $\hat{Z}(s)$. Moreover, since the algebraic sum of an even and an odd polynomial with real coefficients cannot have any zeros on the $j\omega$ -axis unless each of them have the same $j\omega$ -axis zeros, it follows that $\hat{\rho}(s)$ will not have any $j\omega$ -axis poles and zeros except possibly at the origin. Thus we can write^{*}

$$\hat{\rho}(s) = \frac{m_1 - n_1}{m_1 + n_1} \cdot \frac{m_2 + n_2}{m_2 - n_2} \quad (4)$$

where $m_1 + n_1$ is the unique Hurwitz polynomial $H_1(s)$ formed by factoring the left-half plane poles of $\hat{\rho}(s)$ and $m_2 + n_2$ is the unique Hurwitz polynomial $H_2(s)$ obtained by factoring the left-half plane zeros of $\hat{\rho}(s)$ including that at origin, if any. The reflection coefficient of an active driving-point impedance can be thought to consist of two factors, one representing completely a passive network and the other including the active portion. Thus following Kelly's⁴ approach, we can factor $\hat{\rho}(s)$ as

$$\hat{\rho}(s) = E(s) \cdot \hat{\rho}_1(s) \quad (5)$$

where

$$E(s) = \frac{m_1 - n_1}{m_1 + n_1}, \quad (6)$$

$$\hat{\rho}_1(s) = \frac{m_2 + n_2}{m_2 - n_2} \quad (7)$$

Because of the construction procedure outlined above, we note that $E(s)$ satisfies the properties of the reflection coefficient of a passive LC driving-point impedance, i.e., $E(p)$, where $p = (1 - s)/(1 + s)$, is a "unit function"⁶.

^{*}The even part of the polynomials are denoted by the symbol m and the odd part by the symbol n .

From (5) and (2) we obtain ⁴

$$\begin{aligned}\hat{Z}(s) &= \frac{1 - \hat{\rho}(s)}{1 + \hat{\rho}(s)} \\ &= \frac{1}{\hat{Z}_r(s) + \frac{1}{\hat{Z}_1(s)}} + \frac{1}{\hat{Z}_1(s) + \frac{1}{\hat{Z}_r(s)}}\end{aligned}\quad (8)$$

where

$$\hat{Z}_r(s) = \frac{1 - E(s)}{1 + E(s)} \quad (9)$$

$$\hat{Z}_1(s) = \frac{1 - \hat{\rho}_1(s)}{1 + \hat{\rho}_1(s)}$$

Substituting the expressions for $E(s)$ from (6) and $\hat{\rho}_1(s)$ from (7) in (9)

we obtain

$$\hat{Z}_r(s) = \frac{n_1}{m_1} \quad (10)$$

$$\hat{Z}_1(s) = \frac{n_2}{m_2}$$

$-\hat{Z}_1(s)$, $-\frac{1}{\hat{Z}_1(s)}$, $+\hat{Z}_r(s)$ and $+\frac{1}{\hat{Z}_r(s)}$ are guaranteed to be

in the form of passive LC driving-point impedances because of the properties of the Hurwitz polynomials.⁷ The corresponding circuit representation of (8) as proposed by Kelly⁴ is as shown in Fig. 2.

By making an inverse LC-RC transformation, we obtain a realization for $Z(s)$ using two UNIC's[†] as the active devices, as shown in Fig. 3. $Z_a(s)$, $Z_b(s)$, $Z_c(s)$ and $Z_d(s)$ of Fig. 3 are related to $\hat{Z}_1(s)$ and $\hat{Z}_r(s)$ by the following relations:

$$\begin{aligned} Z_a(s) &= \frac{1}{\sqrt{s}} \cdot \hat{Z}_r(\sqrt{s}) \\ Z_b(s) &= \frac{1}{\sqrt{s}} \cdot \frac{1}{\hat{Z}_r(\sqrt{s})} = \frac{1}{s Z_a(s)} \\ Z_c(s) &= \frac{1}{\sqrt{s}} \cdot \hat{Z}_1(\sqrt{s}) \\ Z_d(s) &= \frac{1}{\sqrt{s}} \cdot \frac{1}{\hat{Z}_1(\sqrt{s})} = \frac{1}{s Z_c(s)} \end{aligned} \quad (11)$$

It is clear that $Z_a(s)$, $Z_b(s)$, $Z_c(s)$ and $Z_d(s)$ are in the form of passive RC driving-point impedances.

B. Special Case

We will now show that if the given driving-point impedance $Z(s)$ is a passive RC impedance function, then no active elements will be present in the structure of Fig. 3. In this case $\hat{Z}(s)$, obtained by the RC-LC transformation of (1), is of the form of passive LC driving-point impedance. Furthermore, because of the indicated transformation procedure, the numerator of $\hat{Z}(s)$ will be an odd polynomial. Hence we can write

[†]A negative impedance converter with a unity conversion ratio will be designed as an UNIC.

$$\hat{Z}(s) = \frac{n_1}{m_1} \quad (12)$$

and the corresponding reflection coefficient is

$$\hat{\rho}(s) = \frac{m_1 - n_1}{m_1 + n_1} \quad (13)$$

Comparing (13) with (4) we note that (13) is a special case of (4) when $n_2 = 0$. This implies, in this special case, Fig. 2 and consequently Fig. 3 are modified to that of Fig. 4a and Fig. 4b, respectively, each of which, as can be seen, do not contain any UNIC.

C. The Decomposition

From (4) and (8) we obtain

$$\hat{Z}(s) = \frac{n_1 m_2 - m_1 n_2}{m_1 m_2 - n_1 n_2} \quad (14)$$

m_1, m_2 are even polynomials and n_1, n_2 are odd polynomials. Hence we can express them as

$$\begin{aligned} m_1 &= a_1(s^2) \\ m_2 &= a_2(s^2) \\ n_1 &= s b_1(s^2) \\ n_2 &= s b_2(s^2) \end{aligned} \quad (15)$$

Substituting (15) in (14) and then applying the inverse LC-RC transformation we arrive at the following theorem:

Theorem - Any real rational function of s , $Z(s)$, can always be decomposed in the following form,

$$Z(s) = \frac{b_1(s)a_2(s) - a_1(s)b_2(s)}{a_1(s)a_2(s) - s b_1(s)b_2(s)} \quad (16)$$

where $a_1(s)/s b_1(s)$, $b_1(s)/a_1(s)$, $a_2(s)/s b_2(s)$ and $b_2(s)/a_2(s)$ are unique functions satisfying the properties of passive RC driving-point impedances.

Identification procedures for $a_1(s)$, etc., can be summarized as follows:

1. From the given $Z(s) = N(s)/D(s)$, obtain the polynomial $Q(s) = D(s^2) - s N(s^2)$,
2. Find the zeros of the polynomial $Q(s)$. Form the polynomial $m_2 + n_2$ by factoring the left-half plane zeros of $Q(s)$, including the zero at origin, if any, and factor out the right-half plane zeros of $Q(s)$ to form the polynomial $m_1 - n_1$,
3. From $m_2 + n_2$ and $m_1 - n_1$ obtain the even and odd parts and using (15) obtain $a_1(s)$, $a_2(s)$, $b_1(s)$ and $b_2(s)$.

D. The Associated Function

Before going into the application of (16) in the synthesis of active RC networks, we will present an interpretation of (14). Let us define the function

$$F(s) = \frac{m_1 + n_1}{m_2 + n_2} \quad (17)$$

as the associated function corresponding to $Z(s)$. Though $m_1 + n_1$ and $m_2 + n_2$ are Hurwitz polynomials, $F(s)$ may not be a p.r. function. The odd and even parts of $F(s)$ are

$$\begin{aligned} \text{Od } F(s) &= \frac{n_1 m_2 - m_1 n_2}{m_2^2 - n_2^2} \\ \text{Ev } F(s) &= \frac{m_1 m_2 - n_1 n_2}{m_2^2 - n_2^2} \end{aligned} \quad (18)$$

Thus we can write

$$s Z(s^2) = \hat{Z}(s) = \frac{\text{Od } F(s)}{\text{Ev } F(s)} \quad (19)$$

The above results can be summarized as:

Theorem - To every real rational function $Z(s)$, there corresponds a unique associated function $F(s)$ defined as a ratio of two unique Hurwitz polynomials and related to $Z(s)$ according to (19).

Now $D(s^2)$ corresponds to the numerator of the even part of $F(s)$. If $D(s^2)$ is positive on the $j\omega$ -axis, then $F(s)$ will be a p.r. function. In case of $D(s^2)$ having odd ordered $j\omega$ -axis zeros, $D(-\omega^2)$ will not be positive for all ω 's. In that case we can multiply both the numerator and the denominator of $s Z(s^2)$ by the factor $\prod_1 (s^2 + \omega_1^2)$ so that the augmented $D(s^2) \prod_1 (s^2 + \omega_1^2)$ has all even ordered $j\omega$ -axis zeros and thus stays positive on the $j\omega$ -axis. Then we can relate the modified $s Z(s^2)$ to a p.r. function $G(s)$ according to (20), which is given below.

$$s Z(s^2) = \frac{s N(s^2) \prod_1 (s^2 + \omega_1^2)}{D(s^2) \prod_1 (s^2 + \omega_1^2)} = \frac{\text{Od } G(s)}{\text{Ev } G(s)} \quad (20)$$

Thus we find that there also exists a p.r. function $G(s)$ corresponding to $Z(s)$.

III. SYNTHESIS PROCEDURES USING ONE ACTIVE ELEMENT

A. The Cascade Method²

The input impedance $Z(s)$ of the cascade structure of Fig. 5 is given as

$$Z(s) = z_{11} \frac{\frac{1}{y_{22}} - Z_L}{z_{22} - Z_L} \quad (21)$$

where z_{11} , z_{22} and y_{22} are the two-port parameters of the network N.

Rearranging (16) we obtain,

$$Z(s) = \frac{a_1(s)}{s b_1(s)} \cdot \frac{\frac{b_1(s)}{a_1(s)} - \frac{b_2(s)}{a_2(s)}}{\frac{b_1(s)}{a_1(s)} - \frac{b_2(s)}{a_2(s)}} \quad (22)$$

Comparing (21) and (22) we identify

$$z_{11} = z_{22} = \frac{a_1(s)}{s b_1(s)} \quad (23)$$

$$z_L = \frac{b_2(s)}{a_2(s)}$$

From (23) we obtain

$$z_{12} = \frac{a_1^2(s) - s b_1^2(s)}{s^2 b_1^2(s)} \quad (24)$$

For the set of parameters $\{z_{ij}\}$ of (23) and (24) to represent a physically realizable set, the residue condition must be satisfied. Evaluating the residues of z_{11} , z_{22} and z_{12} in a pole at $s = s_k$, we obtain

$$k_{11} = k_{22} = \left(\frac{a_1(s)}{b_1(s) + s \dot{b}_1(s)} \right) \bigg|_{s = s_k} \quad (25)$$

$$k_{12} = \pm \left(\frac{\sqrt{a_1^2(s) - s b_1^2(s)}}{b_1(s) + s \dot{b}_1(s)} \right) \bigg|_{s = s_k} = \pm \left(\frac{a_1(s)}{b_1(s) + s \dot{b}_1(s)} \right) \bigg|_{s = s_k}$$

where $\dot{b}_1(s)$ is the derivative of $b_1(s)$. It is seen that the residue condition is satisfied with an equal sign.

Next, we will have to show that a rational z_{12} can be obtained. In general, the numerator of z_{12}^2 as given in (24) will not be a perfect square. If it is not, the following augmentation method which is similar to Darlington's technique⁸ can be pursued:

Augment the associated function $F(s)$ by a Hurwitz polynomial $m_0 + n_0$ to obtain the modified function

$$F(s) = \frac{m_1 + n_1}{m_2 + n_2} \cdot \frac{m_0 + n_0}{m_0 + n_0} = \frac{m_1' + n_1'}{m_2' + n_2'} \quad (26)$$

where

$$\begin{aligned} m_1' &= m_1 m_0 + n_1 n_0 \\ m_2' &= m_2 m_0 + n_2 n_0 \\ n_1' &= n_1 m_0 + n_0 m_1 \\ n_2' &= n_2 m_0 + n_0 m_2 \end{aligned} \quad (27)$$

Recomputing the odd and the even parts of the augmented associated function we can show that there is no change in the ratio of the odd part to the even part, both of them being multiplied by the common factor $m_0^2 - n_0^2$. But after augmentation the two-port parameters and Z_L of (23) and (24) will be modified as follows:

$$\begin{aligned} z_{11} = z_{22} &= \frac{a_1(s)a_0(s) + s b_1(s)b_0(s)}{s b_1(s)a_0(s) + s a_1(s)b_0(s)} \\ z_{12} &= \pm \sqrt{\frac{\{a_1^2(s) - s b_1^2(s)\} \{a_0^2(s) - s b_0^2(s)\}}{s b_1(s)a_0(s) + s a_1(s)b_0(s)}} \\ Z_L &= \frac{b_2(s)a_0(s) + b_0(s)a_2(s)}{a_2(s)a_0(s) + s b_2(s)b_0(s)} \end{aligned} \quad (28)$$

We can choose $a_0^2(s) - s b_0^2(s)$ equal to that factor of $a_1^2(s) - s b_1^2(s)$ which is not a perfect square and thus obtain a rational z_{12} . It can be shown that the residue condition is still satisfied with an equal sign.

Furthermore, the decomposition technique guarantees z_{11} , z_{22} , $1/y_{22}$ and Z_L to be of the form of passive RC driving-point impedances.

A lattice realization is always possible because of the residues of the z-parameters being equal in magnitude. Thus any real rational $Z(s)$ can be realized in the practical Cascade Configuration of Fig. 5 and, in effect, we have proved the theorem mentioned in the Introduction.

B. Synthesis Using Special Structures³

The problem of obtaining a rational z_{12} associated with the Cascade Method is not encountered in the following method. This method uses only one-port passive RC networks and a generalized type of impedance converter* in special configurations. The h-matrix of a GIC is given by

$$\begin{bmatrix} 0 & 1 \\ \frac{Z_m}{Z_n} & 0 \end{bmatrix} \quad (29)$$

where Z_m and Z_n are passive RC driving-point impedances.

Consider the network of Fig. 6, which we will designate as Type I - Special Configuration. The input impedance of this network is

$$Z(s) = \frac{\frac{Z_4 - Z_3}{Z_4} - \frac{Z_3}{Z_1}}{\frac{Z_3}{Z_1} - \frac{Z_2}{Z_2}} \quad (30)$$

Rearranging (16) we obtain

$$Z(s) = \frac{\frac{b_1(s)}{a_1(s)} - \frac{b_2(s)}{a_2(s)}}{1 - \frac{b_1(s)}{a_1(s)} \cdot \frac{b_2(s)}{a_2(s)}} \quad (31)$$

*The Generalized Impedance Converter of this section will be designated as GIC. For idealized circuits and a transistor realization of GIC, see Ref. 3.

Comparing (30) and (31) we identify

$$\begin{aligned} Z_4 &= \frac{b_1(s)}{a_1(s)} ; & Z_3 &= \frac{b_2(s)}{a_2(s)} \\ Z_1 &= \frac{b_1(s)}{a_1(s)} ; & Z_2 &= \frac{a_1(s)}{s b_1(s)} \end{aligned} \quad (32)$$

Because of the decomposition technique the set of impedances Z_1 , Z_2 , Z_3 and Z_4 are in the form of passive RC driving-point impedances.

The input impedance $Z(s)$ of the Type II - Special Configuration of Fig. 7 is given as

$$Z(s) = \frac{Z_8 Z_6 - Z_7 Z_5}{Z_8 - Z_7} = \frac{Z_6 - \frac{Z_7 \cdot Z_5}{Z_8}}{1 - \frac{Z_7}{Z_8}} \quad (33)$$

Comparing (33) with (31), we obtain

$$\begin{aligned} Z_7 &= \frac{b_2(s)}{a_2(s)} ; & Z_8 &= \frac{a_1(s)}{s b_1(s)} \\ Z_6 &= \frac{b_1(s)}{a_1(s)} ; & Z_5 &= \frac{a_1(s)}{s b_1(s)} \end{aligned} \quad (34)$$

It is seen that the impedances given in (34) are all passive RC driving-point impedance functions.

IV. ILLUSTRATIONS

A. Example 1

Consider the realization of an inductance by an active RC network.

Let

$$Z(s) = s \quad (35)$$

We thus have

$$N(s) = s$$

$$D(s) = 1$$

Factorizing

$$Q(s) = D(s^2) - s N(s^2) = 1 - s^3$$

we obtain

$$Q(s) = (1 - s)(s^2 + s + 1)$$

Hence we identify

$$m_2 + n_2 = s^2 + s + 1$$

$$m_1 - n_1 = 1 - s$$

that means

$$m_1 = 1; n_1 = s$$

$$m_2 = s^2 + 1; n_2 = s$$

From this we obtain

$$a_1(s) = 1; b_1(s) = 1$$

$$a_2(s) = s + 1; b_2(s) = 1$$

(36)

The Cascade Realization - Substituting (36) in (24) we find that

$$z_{12} = \pm \frac{\sqrt{1-s}}{s}$$

is not a rational function. We thus choose

$$a_0^2(s) - s b_0^2(s) = 1 - s$$

i. e.,

$$a_0(s) = 1; b_0(s) = 1$$

(37)

Finally, from (36), (37) and (28) we obtain the modified z-parameters and Z_L as

$$\begin{aligned}
z_{11} &= z_{22} = \frac{1+s}{2s} \\
z_{12} &= + \frac{1-s}{2s} \\
Z_L &= \frac{s+2}{2s+1}
\end{aligned} \tag{38}$$

The complete network considering the positive sign for z_{12} is as shown in Fig. 8.

Type I Realization - From (36) and (32) we obtain

$$\begin{aligned}
Z_4 &= 1; & Z_3 &= \frac{1}{s+1} \\
Z_1 &= 1; & Z_2 &= \frac{1}{s}
\end{aligned}$$

and the corresponding network is shown in Fig. 9.

Type II Realization - Substitution of (36) and (34) results in

$$\begin{aligned}
Z_7 &= \frac{1}{s+1}; & Z_8 &= \frac{1}{s} \\
Z_6 &= 1 & ; & Z_5 = \frac{1}{s}
\end{aligned}$$

and the corresponding network is shown in Fig. 11.

B. Example 2

Consider the realization of a negative inductance. It should be noted from (16) that in case of $-Z(s)$, $a_1(s)$ and $a_2(s)$, and $b_1(s)$ and $b_2(s)$, as obtained for $+Z(s)$, are interchanged, respectively. As a result, we obtain for this example from (36) the following:

$$\begin{aligned}
a_1(s) &= s+1; & b_1(s) &= 1 \\
a_2(s) &= 1 & ; & b_2(s) = 1
\end{aligned} \tag{39}$$

Substituting (39) in (24) we obtain

$$z_{12} = + \frac{\sqrt{s^2 + s + 1}}{s}$$

Augmenting we obtain a rational z_{12} and modified z_{11} , z_{22} and Z_L as given below,

$$\begin{aligned}
 z_{11} = z_{22} &= \frac{s^2 + 3s + 1}{2s(s+1)} = \left[\frac{1}{2} + \frac{1}{2(s+1)} \right] + \left[\frac{1}{2s} \right] \\
 z_{12} &= \frac{s^2 + s + 1}{2s(s+1)} = \left[\frac{1}{2} - \frac{1}{2(s+1)} \right] + \left[\frac{1}{2s} \right] \\
 Z_L &= \frac{s+2}{2s+1}
 \end{aligned} \tag{40}$$

and the final network obtained considering the plus sign for z_{12} is as shown in Fig. 12.

Instead of realizing the z-parameters in a lattice structure, it is possible to obtain an unbalanced structure by means of the Fialkow-Gerst method.⁹ For the given example, the parameters were partitioned as shown by the dotted lines in (40) and the resulting unbalanced structure is shown in Fig. 12.

This example was presented to illustrate the possibility of obtaining unbalanced structures and also to point out that the suggested method does not always lead to active RC networks with the least number of elements because of the well known fact that a negative inductance can be realized by terminating a negative impedance inverter by a positive capacitance.

C. Example 3

As a final example we will realize an impedance function whose numerator and denominator degrees differ by two. Let

$$Z(s) = \frac{1}{s^2 + 2s + 2} \tag{41}$$

Following the procedure outlined in Example 1, we obtain

$$\begin{aligned}
 a_1(s) &= s + 1; \quad b_1(s) = 1 \\
 a_2(s) &= s + 2; \quad b_2(s) = 1
 \end{aligned} \tag{42}$$

and it can be seen that for a cascade realization augmentation is necessary to insure a rational z_{12} . Finally, we obtain a network realization as shown in Fig. 13, using the formulas of (28).

V. CONCLUSION

It has been demonstrated that any real rational function of the complex variable can be always decomposed in a unique form and can be realized as the driving-point impedance of a one-port transformerless active RC network containing only one negative impedance converter. The suggested realization networks are practical and the element values of the associated¹ RC networks are easily obtained. Since the main part of the method consists of solving a linear equation for its real and complex roots, the complete method can be programmed easily for a digital computer.

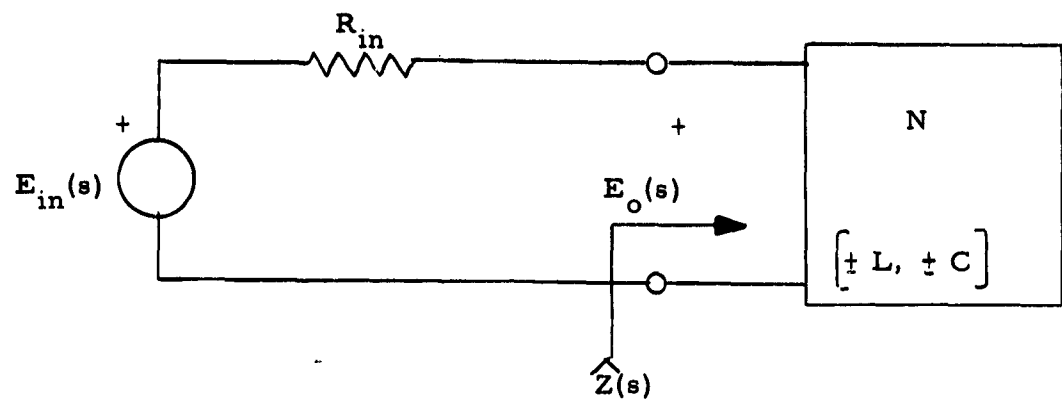


Figure 1

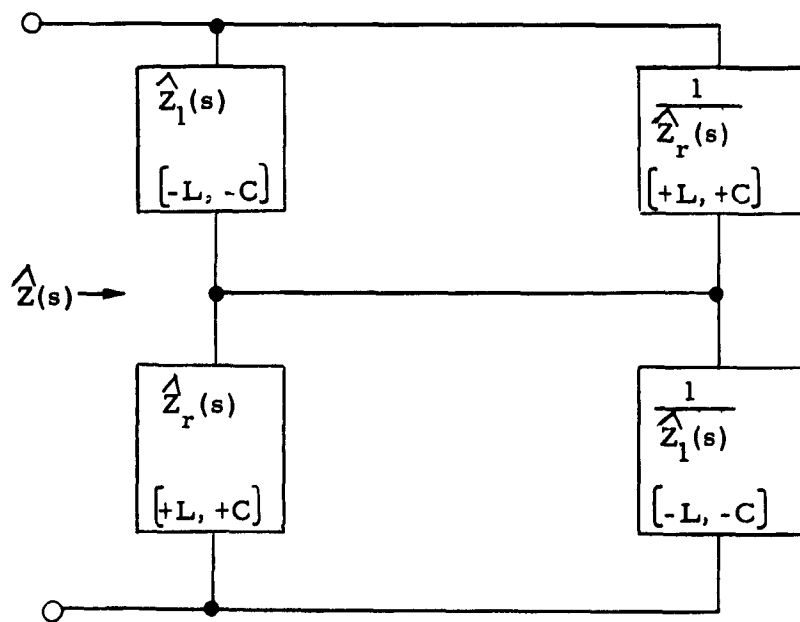


Figure 2

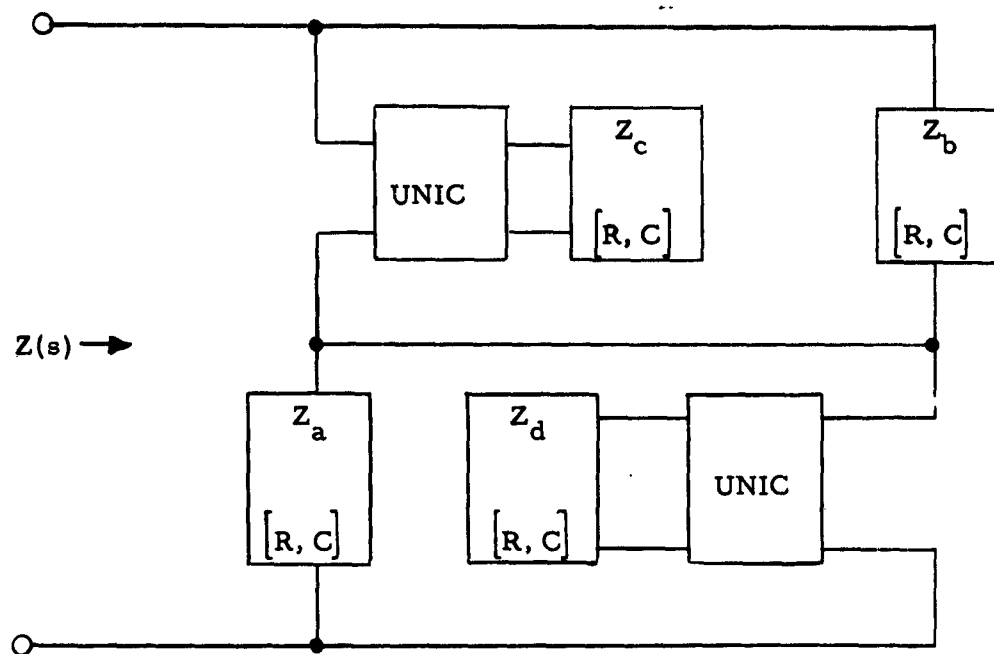


Figure 3

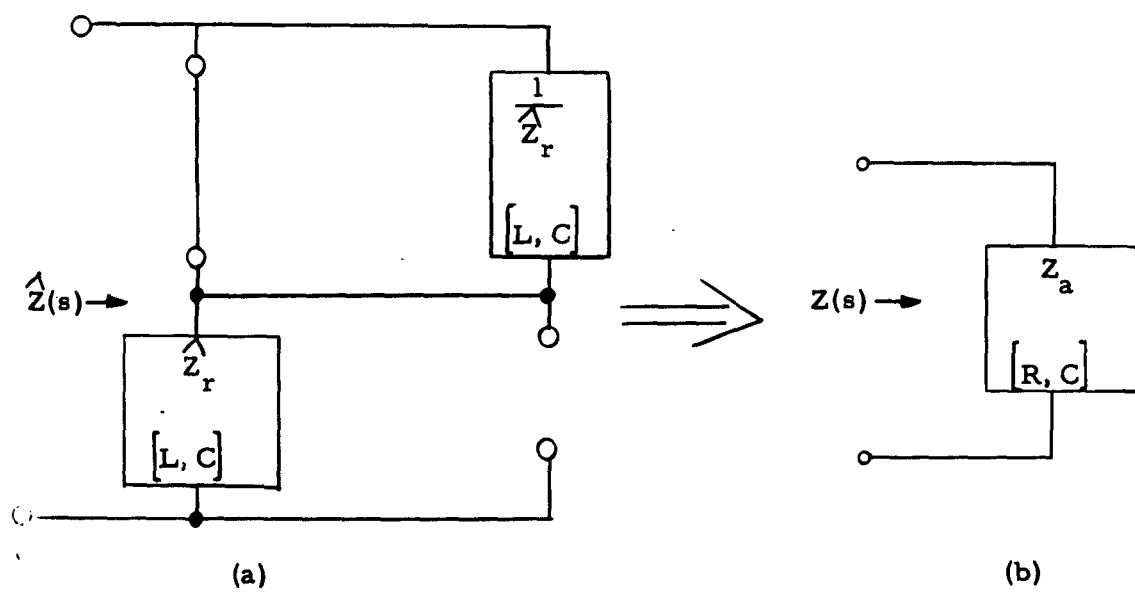


Figure 4

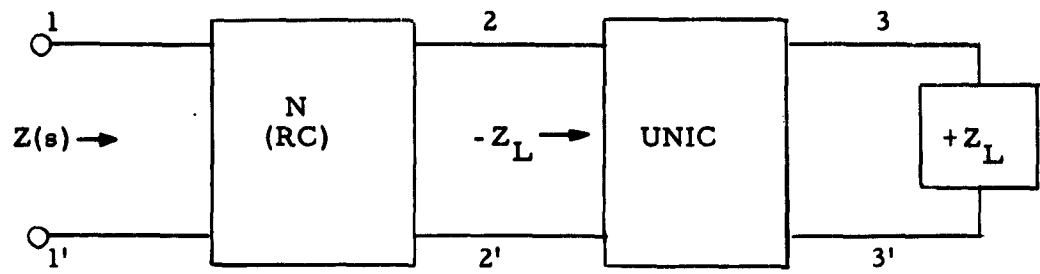


Figure 5

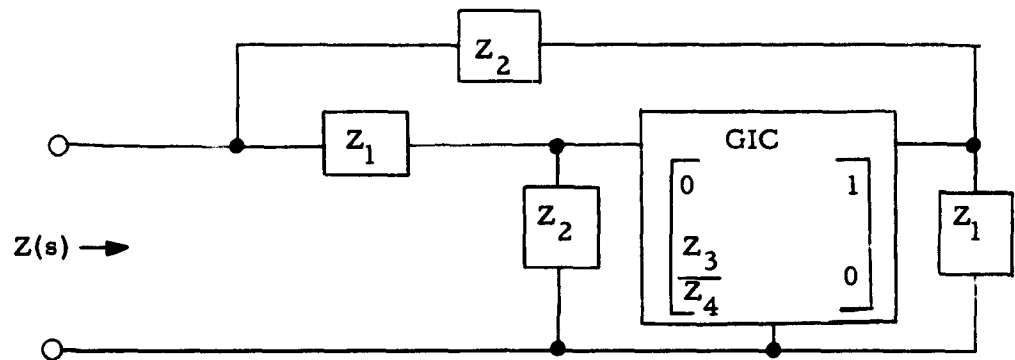


Figure 6

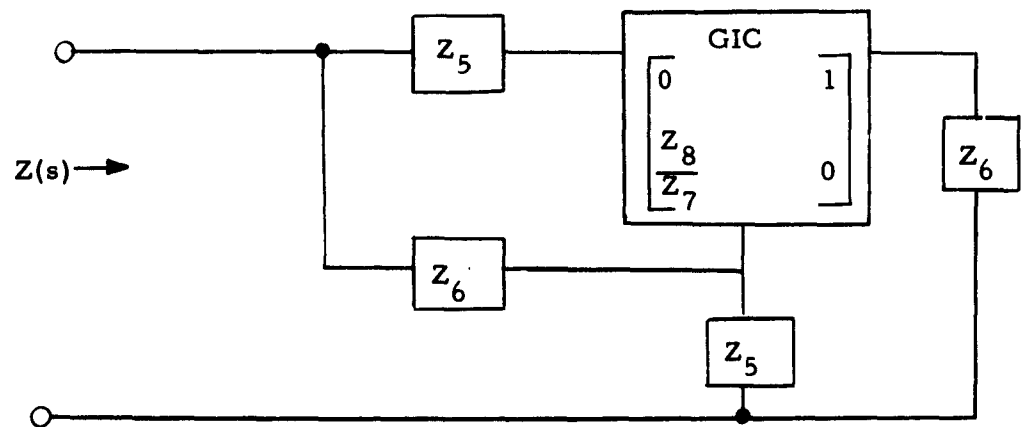


Figure 7

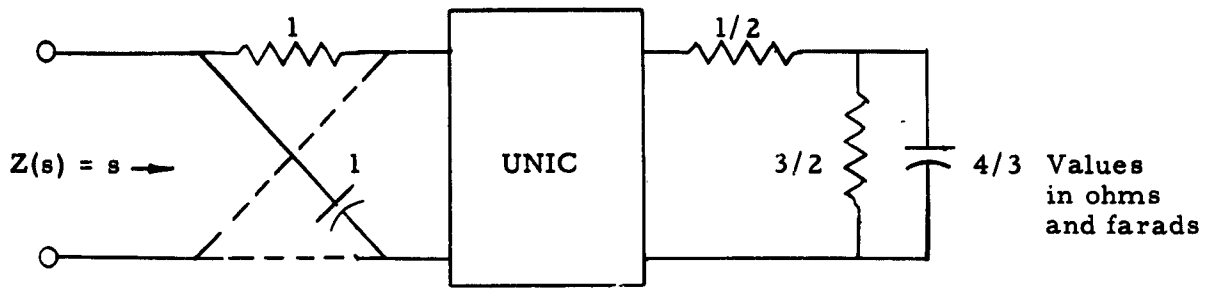


Figure 8

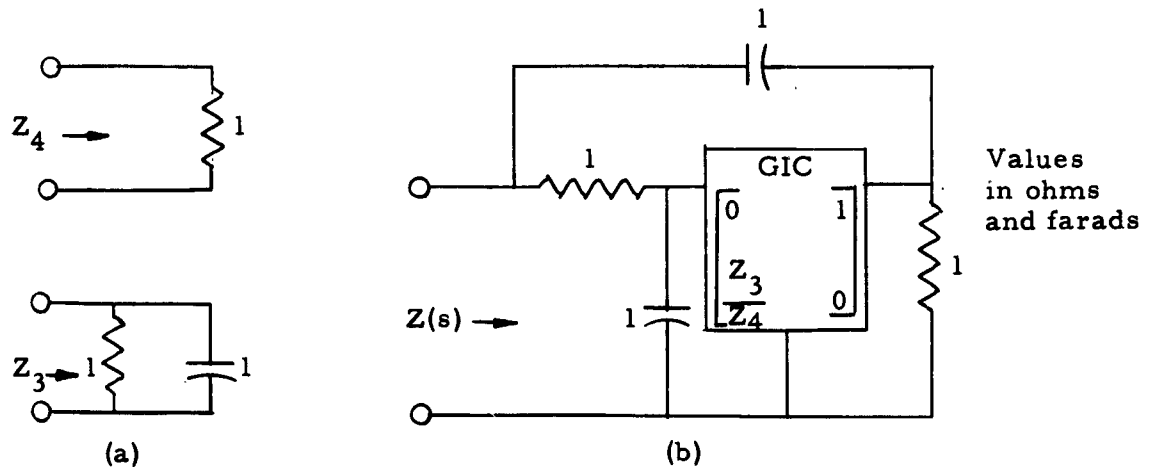


Figure 9

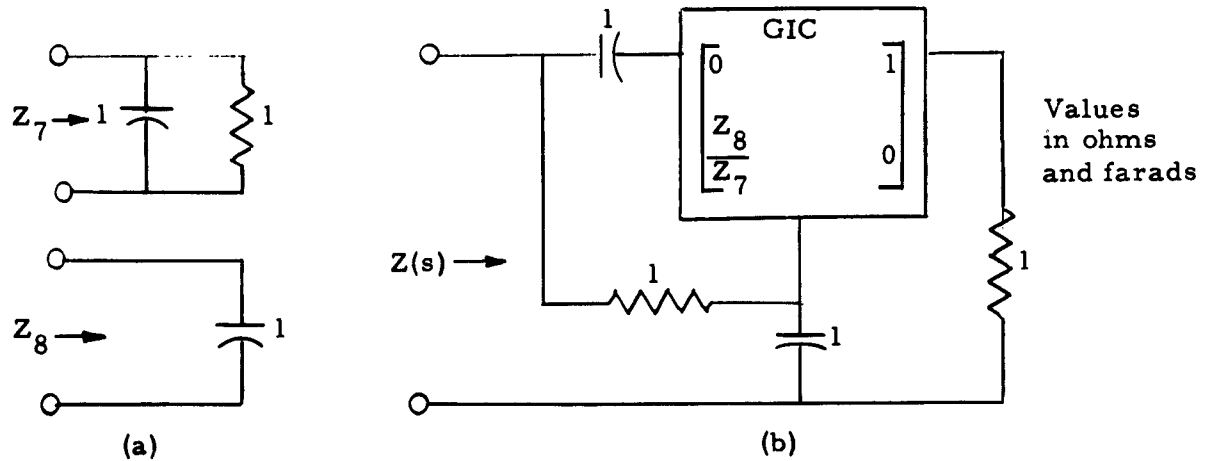


Figure 10

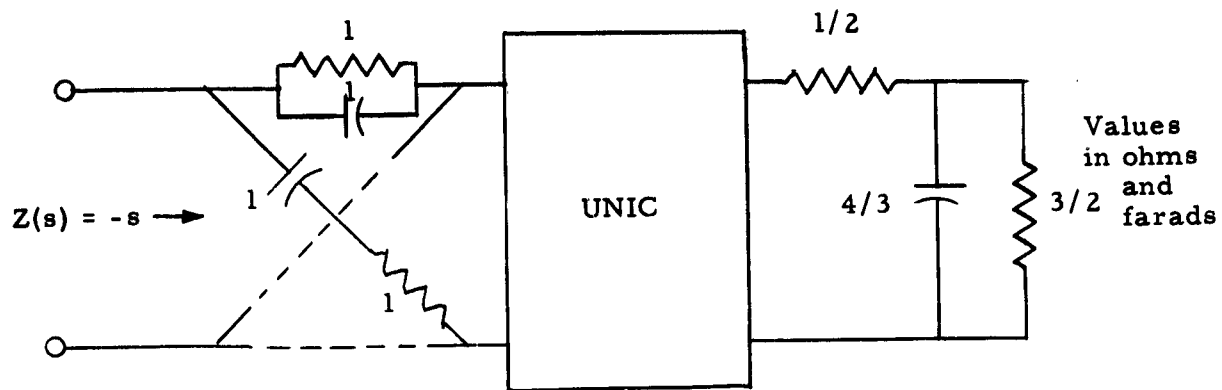


Figure 11

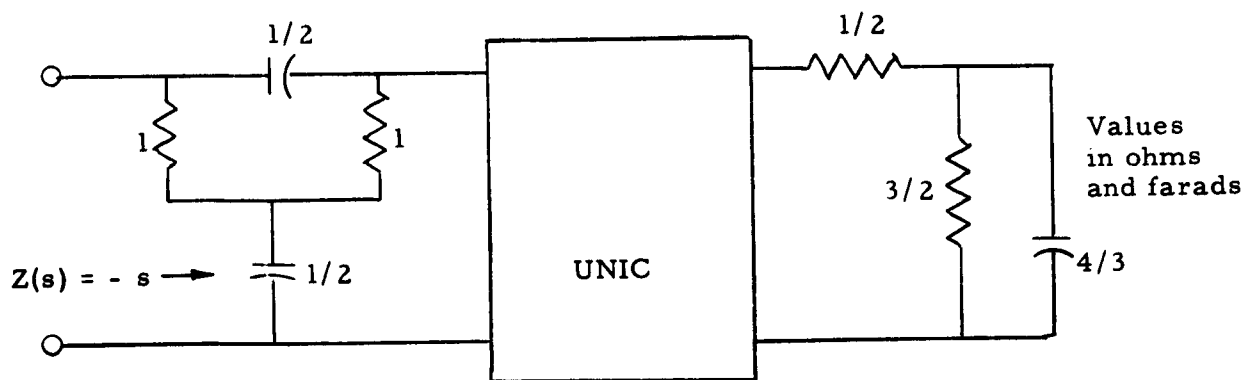


Figure 12

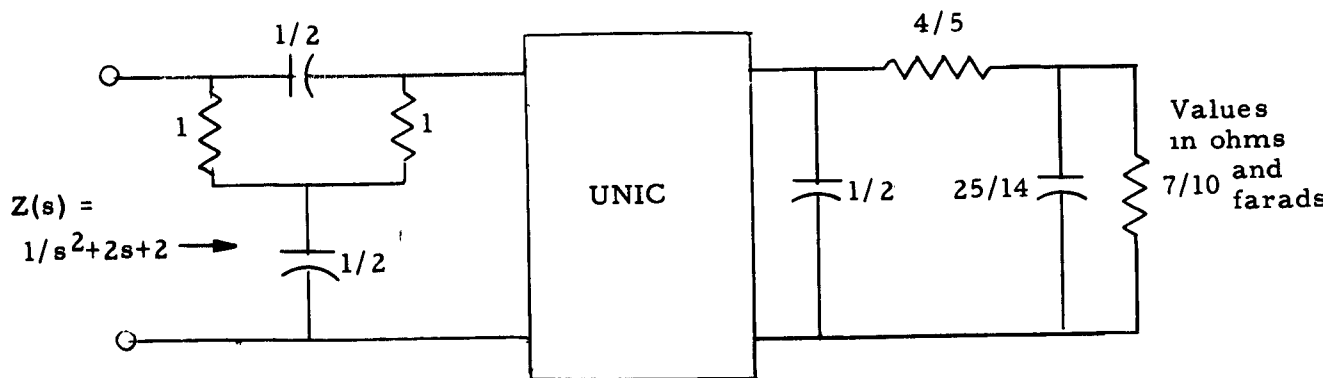


Figure 13

REFERENCES

1. DeClaris, N., "Synthesis of Active Networks - Driving-Point Functions," 1959 IRE Nat. Conv. Rec., Part 2, pp. 23-39.
2. Kinariwala, B. K., "Synthesis of Active RC Networks," B.S.T.J., Vol. 38 (September 1959), pp. 1269-1316.
3. Sandberg, I. W., "Synthesis of Driving-Point Impedances with Active RC Networks," B.S.T.J., Vol. 39 (July 1960), pp. 947-962.
4. Kelly, P. M., "A Unified Approach to Two-Terminal Network Synthesis," Trans. IRE, Vol. CT-8, No. 2 (June 1961), pp. 153-164.
5. Kuh, E. S. and Pederson, D. O., Principles of Circuit Synthesis, New York: McGraw-Hill Book Co., 1959, p. 149.
6. Caratheodory, C., Theory of Functions, Vol. II, New York: Chelsea Publishing Co., 1954, p. 12.
7. Kuh, E. S. and Pederson, D. O., Principles of Circuit Synthesis, New York: McGraw-Hill Book Co., 1959, pp. 96-98.
8. Guillemin, E. A., Synthesis of Passive Networks, New York: John Wiley and Sons, 1957, pp. 358-362.
9. Balabanian, N., Network Synthesis, Englewood Cliffs, New Jersey: Prentice-Hall, Inc., 1958, pp. 144-149.

Chief of Naval Research
Navy Department
Washington 25, D. C.
Attn: Code 427 - 460 -

Director, Naval Research Laboratory
Washington 25, D. C.
Attn: Code 2000 - 5250 -

Commanding Officer
Office of Naval Research, Br. Office
1000 Geary Street
San Francisco 9, California

Chief, Bureau of Ships
Navy Department
Washington 25, D. C.
Attn: Code 838 -

Director, Naval Ordnance Laboratory
White Oak, Maryland

Commander
U. S. Naval Electronics Laboratory
San Diego, California

Commander
Naval Air Development Center
Johnsville, Pennsylvania
Attn: AEEL -

U. S. Naval Post Graduate School
Monterey, California
Attn: Librarian

Naval Air Missile Test Center
Point Mugu, California

Chief, Bureau of Aeronautics
Navy Department
Washington 25, D. C.
Attn: EL-51

Commanding General
Signal Corps Engineering Laboratories
Evans Signal Laboratory Area
Building 27
Belmar, New Jersey
Attn: Technical Documents Center

Mr. Frank J. Mullin
Dept. of Electrical Engineering
California Institute of Technology
Pasadena, California

Commanding General
Wright Air Development Center
Wright-Patterson AFB, Ohio
Attn: WCRCO-2

Commanding General
Rome Air Development Center
Griffiss Air Force Base
Rome, New York
Attn: RCRC

Commanding General
Signal Corps Engineering Laboratories
Fort Monmouth, New Jersey
Attn: SIGEL-SMB-m, 100-Magnetic Materials

Commander
Air Force Office of Scientific Research
Air Research & Development Command
Washington 25, D. C.

Commanding Officer
Squid Signal Laboratory
Fort Monmouth, New Jersey
Attn: V. J. Rubin

Office of the Chief Signal Officer
Pentagon, Washington 25, D. C.
Attn: SIGET

Signal Corps Engineering Laboratories
Fort Monmouth, New Jersey
Attn: Mr. O. C. Woodyard

Office of Technical Services
Department of Commerce
Washington 25, D. C.

Prof. Zohrab Kaprielian
Dept. of Electrical Engineering
University of Southern California
Los Angeles, California

Professor N. DeClaris
Cornell University
Ithaca, New York

Library
Boulder Laboratories
National Bureau of Standards
Boulder, Colorado
Attn: Mrs. Victoria S. Barker

Assistant Secretary of Defense
Research & Development Board
Department of Defense
Washington 25, D. C.

Watson Laboratories Library
Griffiss Air Force Base
New York
Attn: RALOC (RAALD)

ASTI
Attn: TIPDR
Arlington Hall Station
Arlington 12, Virginia

Technical Reports Collection
303A Pierce Hall
Harvard University
Cambridge 38, Massachusetts

Antenna Laboratory
Ohio State University
Research Foundation
Columbus, Ohio
Attn: Dr. C. C. Tai

Brooklyn Polytechnic Institute
Microwave Research Institute
55 Johnson Street
Brooklyn 1, New York
Attn: Dr. A. Oliver

Mathematics Research Group
New York University
25 Waverly Place
New York, N. Y.
Attn: Dr. M. Kline

Dept. of Electrical Engineering
Cornell University
Ithaca, New York
Attn: Dr. H. G. Booker

Antenna Laboratory
Electrical Engineering Research Lab.
University of Illinois
Urbana, Illinois
Attn: Dr. P. E. Mayes

Research Laboratory of Electronics
Document Room
Massachusetts Institute of Technology
Cambridge 39, Massachusetts
Attn: Mr. J. Hewitt

Stanford Research Institute
974 Commercial
Stanford, California
Attn: Dr. John T. Bolljohn
Division of Electrical Engineering

Electrical Engineering Department
University of Texas
Box F, University Station
Austin, Texas

Electronic Research Laboratory
Stanford University
Stanford, California
Attn: Applied Electronics Laboratory
Document Library

Randall Morgan Laboratory of Physics
University of Pennsylvania
Philadelphia 4, Pennsylvania

Columbia Radiation Laboratories
Columbia University
538 W. 110th Street
New York 27, N. Y.
Attn: Librarian

Carl A. Redberg, Head
Electronics Division
Denver Research Institute
University of Denver
Denver 10, Colorado

Electrical Engineering Department
Illinois Institute of Technology
Technology Center
Chicago 10, Illinois

University of Florida
Gainesville, Florida
Attn: Applied Elect. Laboratory
Document Library

Regents of the University of Michigan
Ann Arbor, Michigan

California Institute of Technology
Pasadena, California
Attn: C. H. Pappas

Radiation Laboratory
Johns Hopkins University
1315 St. Paul Street
Baltimore 2, Maryland
Attn: Librarian

Dept. of Electrical Engineering
Yale University
New Haven, Connecticut

Willow Run Research Center
University of Michigan
Ypsilanti, Michigan
Attn: Dr. K. Siegel

Georgia Institute of Technology
Atlanta, Georgia
Attn: Mrs. J. Fenley Crossland,
Librarian

Prof. Vincent C. Rideout
Dept. Electrical Engineering
University of Wisconsin
Madison 6, Wisconsin

Hughes Aircraft Company
Research & Development Library
Culver City, California
Attn: John T. Mitek

Douglas Aircraft Company, Inc.
El Segundo Division
El Segundo, California

Hughes Aircraft Company
Antenna Research Department
Building 14, Room 2617
Culver City, California

Radio Corporation of America
Laboratories, Electronic Research
Princeton, New Jersey
Attn: Dr. W. M. Webster, Director

Varian Associates
611 Hansen Way
Palo Alto, California
Attn: Technical Library

Bell Telephone Laboratories, Inc.
Central Serial Records
Technical Information Library
463 West St.
New York 14, N. Y.

Boeing Aircraft Company
Physical Research Unit
Seattle 14, Washington
Attn: Mr. R. W. Hlman

The Rand Corporation
1700 Main Street
Santa Monica, California
Attn: Margaret Anderson, Librarian

Federal Telecommunications
Laboratories, Inc.
500 Washington Avenue
Nutley, New Jersey
Attn: A. K. Wing

Technical University
Dept. of Electrical Engineering
Delft, Holland, VIA ONR London
Attn: Prof. J. P. Schouten

Cambridge University
Radiophysics Division
Cavendish Laboratory
Cambridge, England, VIA ONR London
Attn: Mr. J. A. Ratcliffe

Royal Technical University
Laboratory for Telephony &
Telegraphy, Ostervoldgade 10,
Copenhagen, Denmark
VIA ONR London
Attn: Prof. H. L. Knudsen

Chalmers Institute of Technology
Göteborg, Sweden
VIA ONR London
Attn: Prof. S. Ekelof & Prof. H. Waiiman

Dr. C. J. Bouwkamp
Philips Research Laboratories
N. V. Philips
Glowlampenfabrieken
Eindhoven, Netherlands
VIA ONR London

Prof. Samuel Seely, Head
Dept. of Electrical Engineering
Case Institute of Technology
University Circle
Cleveland 6, Ohio