

UNCLASSIFIED

AD 286 973

*Reproduced
by the*

ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA




UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

Cruft Laboratory

Harvard University • Cambridge, Massachusetts

PERIODIC CYLINDER ARRAYS
AS TRANSMISSION LINES



By

Joshua Shefer

June 15, 1962

Scientific Report No. 14 (Series 2)

Contract AF19(604) - 4118 Project 5635, Task 563502

AFCRL-62-548

Prepared for

Electronics Research Directorate

Air Force Cambridge Research Laboratories

Office of Aerospace Research

United States Air Force • Bedford, Massachusetts

286 973

AFCRL-62-548

PERIODIC CYLINDER ARRAYS AS TRANSMISSION LINES

by

Joshua Shefer

Scientific Report No. 14

Project 5635 - Task 563502

June 15, 1962

Department of Engineering and Applied Physics

Gordon McKay Laboratory

Harvard University

Cambridge, Massachusetts

Prepared for

Electronics Research Directorate

Air Force Cambridge Research Laboratories

Office of Aerospace Research

United States Air Force

Bedford, Massachusetts

Requests for additional copies by Agencies of the Department of Defense, their contractors, and other Government agencies should be directed to the:

ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA

Department of Defense contractors must be established for ASTIA services, or have their "need-to-know" certified by the cognizant military agency of their project or contract.

All other persons and organizations should apply to the:

U. S. DEPARTMENT OF COMMERCE
OFFICE OF TECHNICAL SERVICES
WASHINGTON 25, D. C.

ABSTRACT

Periodic structures of conducting cylinders have been used as radiators (Yagi antennas), and, more recently, as slow-wave lines in traveling-wave tubes and masers. In this report it is shown that a non-resonant structure may have interesting capabilities as an open surface-wave transmission line. By means of a relatively simple matching network, efficient excitation of a surface-wave on the periodic line is obtained. Response is flat over a 20% frequency range at X-band for several combinations of cylinder lengths and spacings. Total insertion losses are less than 3 db and largely independent of length of transmission line. Conducting cylinders are embedded in styrofoam.

The effects of bends and twists in the line have also been investigated. It is shown experimentally that a guided wave on this periodic structure can follow a circular path having 1.5λ radius of curvature with very little loss. The plane of polarization can easily be retated 90° by inserting a short twisted section.

By terminating the transmission line with short circuits at both ends, a discreet series of transmission maxima is observed. Since these resonant peaks of transmission are of high Q-factor, the dispersion characteristic of the line is obtained with very good accuracy.

This type of open transmission line may offer advantages over heavy-weight and bulky conventional waveguides for some specialized applications.

PERIODIC CYLINDER ARRAYS AS TRANSMISSION LINES

by

Joshua Shefer

Department of Engineering and Applied Physics

Harvard University, Cambridge, Massachusetts

I. INTRODUCTION

A number of infinitely long periodic structures theoretically support a propagating plane wave along its axis [1, 2, 3]. In practice, the guiding structures are of finite length, and any desired propagating mode has to be excited by a set of currents which can neither be infinite in amplitude nor can they be distributed over an infinite aperture in space. Another complication arises from the fact that the structure is terminated and we have also the reflected wave to consider. For these reasons, the performance one obtains experimentally is often substantially different from theoretical predictions. However, quite useful approximations may be obtained, and in many cases one is in a position to estimate the bounds of the error.

As a first step in calculating propagation characteristics and excitation efficiency, it is essential to know the field configuration of the wanted mode of propagation. These fields must be a solution to Maxwell's equations and must satisfy boundary conditions at the guiding interface. At the exciting end these fields must, at least approximately, match the fields impressed by the launching device. For many periodic structures, it is relatively straightforward to formulate the total field in the form of a sum of plane surface-wave modes, with the source field superimposed. For example, this procedure is

followed in the case of the periodically iris-loaded waveguide [4] and open structures, such as corrugated plane and cylindrical surfaces [5, 6]. It also applies to arrays of disks of various shapes [7].

In obtaining the field solution for periodic structures, we use, with more or less justification, a theorem named after Floquet [8, 9]. Following this theorem, we assume that on any periodic structure with, say, a periodicity b in the direction of the z -coordinate, the field solution is itself periodic in z with the periodicity b of the structure. Taking a Fourier expansion, one obtains a field expression in the form of an infinite sum of "space harmonics." The propagation constant of the m th harmonic is given by

$$\beta_m = \beta_0 + \frac{2\pi m}{b} \quad (1)$$

where m can be any positive or negative integer. We then have a sum of generally slow waves with decreasing phase velocity as the order m is increasing. On this sum of propagating modes we impose boundary conditions, namely, that the parallel electric field must vanish at a conducting surface, and that at the interface between the guiding structure and the rest of space the tangential components of the electromagnetic field are continuous. Since we have an infinite number of modes which are necessary to satisfy boundary conditions, we usually have an infinite set of equations to solve. One may, however, introduce suitable approximations and obtain results which are more or less meaningful.

A periodic array of conducting cylinders (Fig. 1) does not easily yield to this treatment. All one knows is that the tangential electric field vanishes on the surface of the elements making up the array, and also, if the cylinders are fairly thin, one may assume that all the currents flow in the direction of

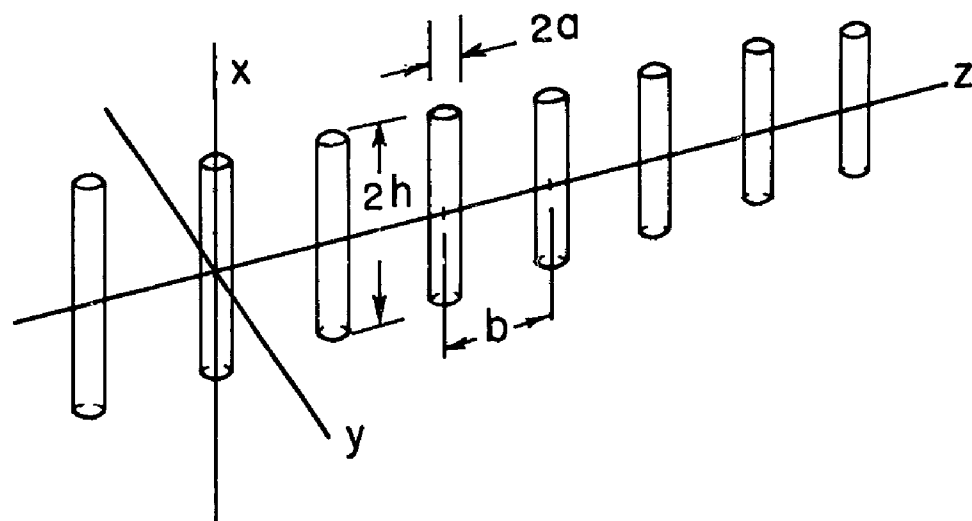


FIG. 1 ARRAY OF CONDUCTING CYLINDERS

the cylinder axes. We do not know the current distribution on each of the elements of the array. We may, of course, use King's theory for an array of coupled antennas [9] once we specify driving conditions, but this procedure becomes hopelessly laborious for an array consisting of more than a very small number of elements. The case of a small number of elements (i. e., short line) is is not of great interest when one examines the characteristics of an array used as a transmission line, not as a terminated radiator. On the other hand, this type of periodic structure has already been used very extensively in Yagi antennas, and in the absence of a rigorous electromagnetic field solution, we must at least examine experimentally the use of such structures as transmission lines, that is, as a means of guiding and transmitting power from point A to point B. This is the main objective of this report.

II. APPROXIMATE SOLUTIONS FOR PHASE VELOCITIES

One may examine every possible wave mode on the structure by taking the analogy of a two-wire transmission line (Fig. 2). The lossless elements are represented by reactive impedances jX periodically shunted across the line. This analogy yields a propagation constant given by [10] :

$$\cos \beta b = \cos kb + \frac{Z_0}{2X} \sin kb \quad (2)$$

where

$$k = \frac{2\pi}{\lambda_0} \quad ; \quad \beta = \frac{2\pi}{\lambda_g} \quad .$$

This is a rather crude approach, but it yields some useful results within a limited range of parameters. In particular, it indicates a series of stop- and pass-bands as we change frequency. For small spacing of the elements,

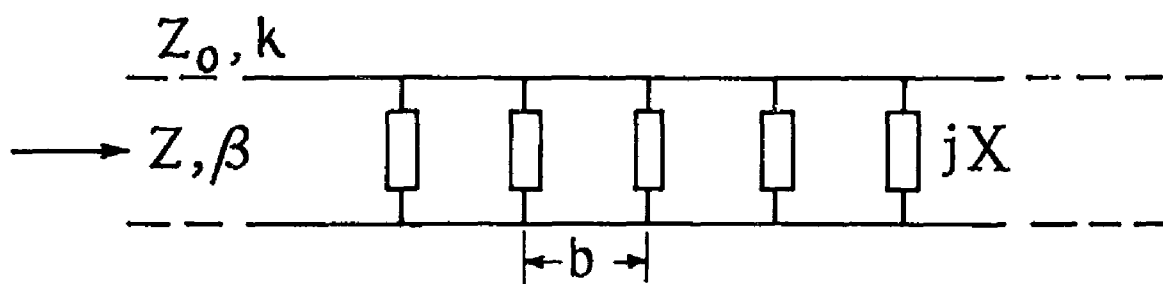


FIG. 2 TRANSMISSION LINE SHUNTED
BY REACTIVE ELEMENTS jX

when $\frac{b}{\lambda_0} \ll 1$, Eq. 2 may be approximated by

$$\frac{k}{\beta} = 1 + \left(\frac{Z_0}{4\pi X} \right) \frac{\lambda}{b} \quad (3)$$

This simple approximate dispersion relationship is quite consistent with experimental data [11].

A more rigorous attempt to obtain a solution for phase velocities on a periodic cylinder structure is due to Dunbar et al. [12], who generalized some of Storer's [13] results for a single linear element. Referring to Fig. 3, $(E_x)_0$ is the x-component of the electric field on an arbitrarily chosen reference element $n = 0$ in an infinite array $n \pm \infty$, due to the current elements $I_n(x')$. This tangential field is given by

$$(E_x)_0 = \frac{\eta}{4\pi j} \sum_n \int_{-h}^{+h} I_n(x') K_{n0}(x - x') dx' \dots \quad (4)$$

where:

$$K_{n0}(x - x') = \left[1 + \frac{\partial^2}{\partial x^2} \right] \frac{e^{-jk R_{n0}}}{R_{n0}}$$

$$R_{n0}^2 = (x - x')^2 + (a + nb)^2$$

$$k = \frac{2\pi}{\lambda_0} ; \quad \eta = 120 \pi \text{ ohms} ; \quad b \gg a$$

By defining a surface impedance

$$Z = - \frac{(E_x)_0}{I_0(x)} \quad (5)$$

and multiplying each side of Eq. 4 by $I_n(x)$ integrating over the cylinder, we obtain

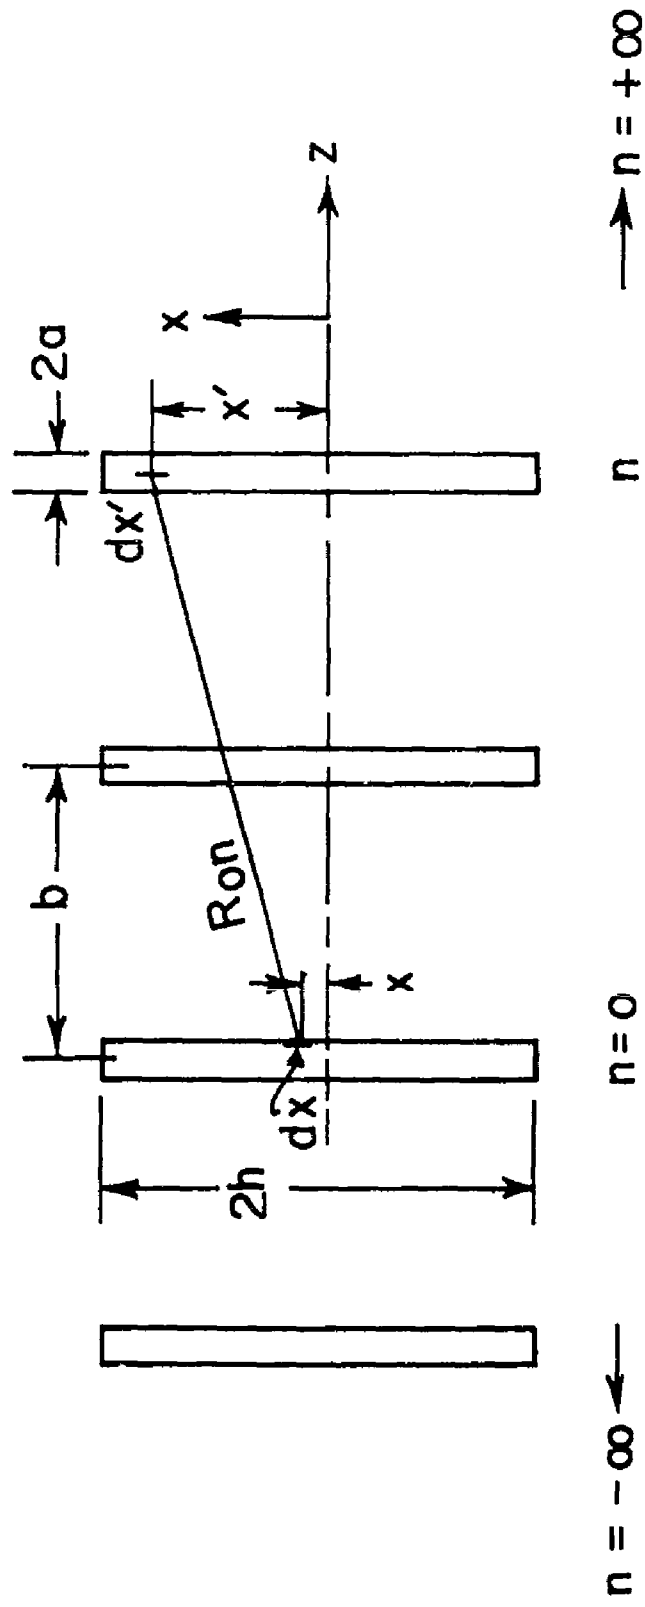


FIGURE 3

$$Z \int_{-h}^{+h} I_0^2(x) dx = \frac{j\eta}{4\pi} \sum_n \int_{-h}^{+h} \int_{-h}^{+h} I_0(x) I_n(x') K_{n0}(x - x') dx dx' \dots \quad (6)$$

We assume further that the current distribution is the same in all elements apart from a phase shift which is related to the propagation of a slow wave along the structure. If this wave propagates with constant

$$\beta = \frac{2\pi}{\lambda_g} = \frac{\omega}{V_{ph}}$$

then

$$I_n(x) = I_0(x) e^{-j\beta nb} \quad (7)$$

and substitution in Eq. 6 yields

$$Z = \frac{j\eta}{4\pi} \frac{\sum_n e^{-j\beta nb} \int_{-h}^{+h} \int_{-h}^{+h} I_0(x) I_0(x') K_{n0}(x - x') dx dx'}{\int_{-h}^{+h} I_0^2(x) dx} \quad (8)$$

This expression is stationary with respect to arbitrary variations in the current distribution $I_0(x)$. A trial function of the form

$$I_0(x) = \sin k(h - |x|) + C [1 - \cos k(h - |x|)] \dots \quad (9)$$

is chosen and substituted into Eq. 8, and requiring that

$$\frac{dZ}{dC} = 0$$

yields an expression for Z as a function of β , k , a , b , and h . One can now solve for β by imposing the condition that Z vanish on the cylinder surface.

The assumption that all the elements in the array have the same current distribution is somewhat questionable. Indeed, King [9] has shown

that for a finite array of coupled elements, the current distribution varies considerably from one element to another. If the array is infinite in length, it may be argued that for reasons of symmetry all the currents must be equal, since we cannot specify any preferred location on an infinite array. By the same token, however, it may be argued that on any infinite physical structure, which must have some losses, all the currents are equal to zero at an infinite distance from the sources.

III. EXPERIMENTAL DETERMINATION OF TRANSMISSION CHARACTERISTICS

A block diagram of the experimental setup is given in Fig. 4. The insertion loss of the periodic structure, including matching units, was determined by comparing outputs of matched detectors 1 and 3. Reflected power was measured by detector 2. For more accurate determination of insertion loss, comparison was made by means of the same crystal in detector 3 by removing the structure under test from the circuit, at the same time also observing any change in reflected power by means of detector 2.

The transmitted power as a function of frequency on a periodic structure without matching unit is shown in Fig. 5. At frequencies below cutoff we observe a series of peaks spaced at intervals of frequency which increase with frequency. This shows that we have a resonant dispersive line. It is, therefore, necessary to introduce matching networks at the transition between waveguide and periodic structure. A tapered periodic structure was found to be the most effective means for matching. In Fig. 6 we have the transmission characteristic for the same structure with tapered sections interposed. The power transmitted along the line is relatively constant over a band of 1200 Mc. In Fig. 7 the received power in detector 3 is compared with a sample of incident power as

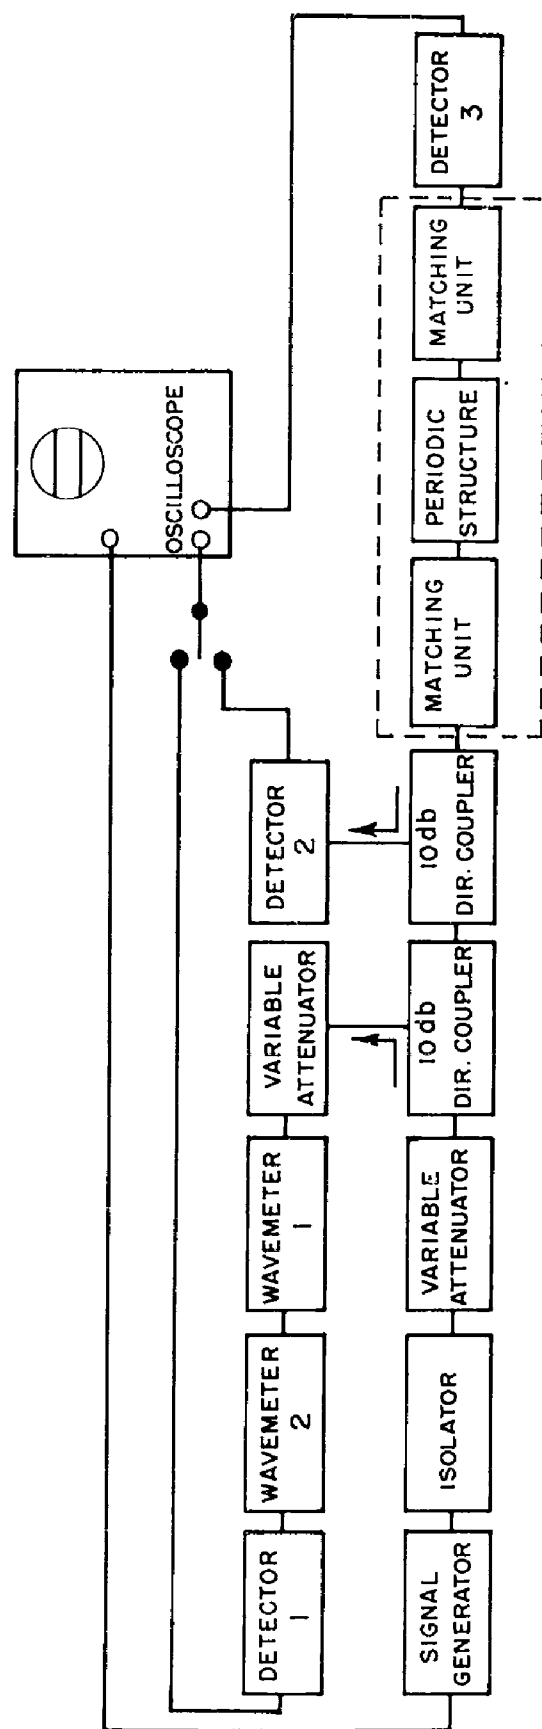


FIG. 4 BLOCK DIAGRAM OF EXPERIMENTAL SETUP

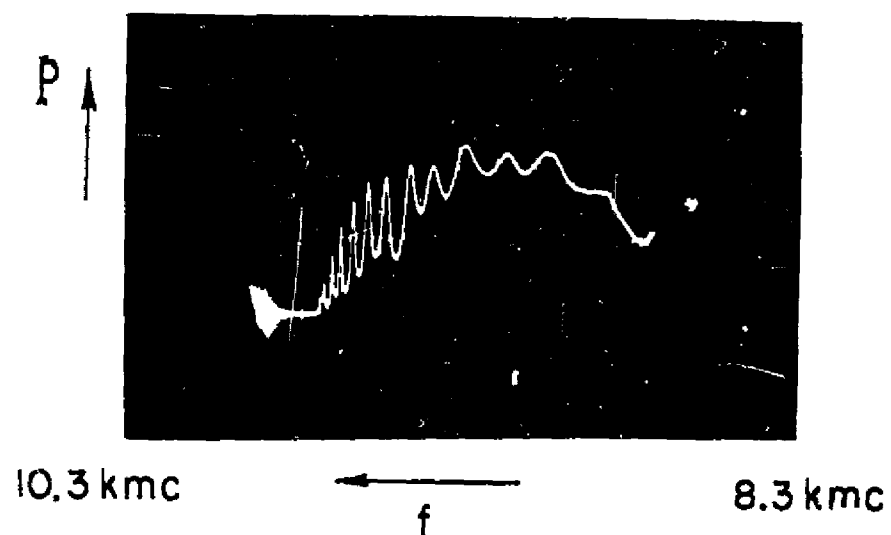


FIG. 5 TRANSMISSION CHARACTERISTIC
OF LINEAR ARRAY. NO MATCHING
NETWORK. $2h = 12\text{ mm}$ $b = 7.6\text{ mm}$ $N = 15$

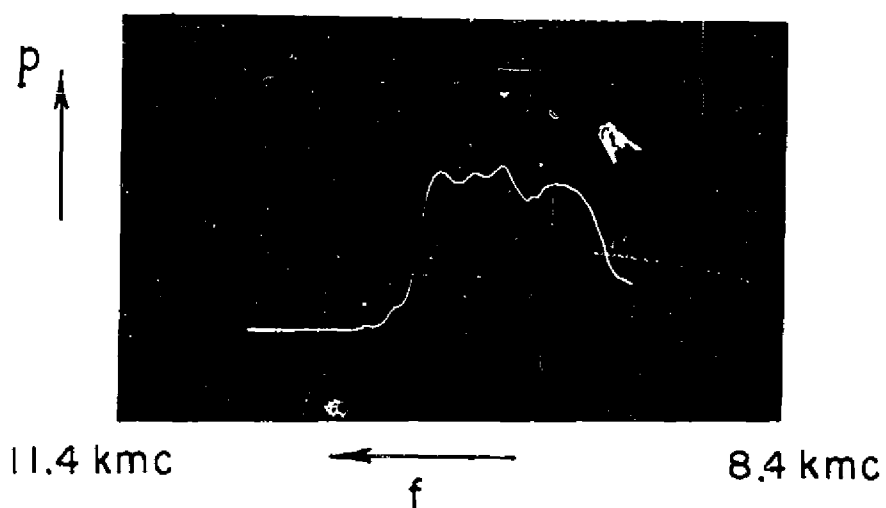


FIG. 6 TRANSMISSION CHARACTERISTIC OF
LINEAR ARRAY WITH MATCHING UNITS AT
LAUNCHING AND RECEIVING ENDS.

$2h = 12\text{ mm}$ $b = 7.6\text{ mm}$ $N = 15$

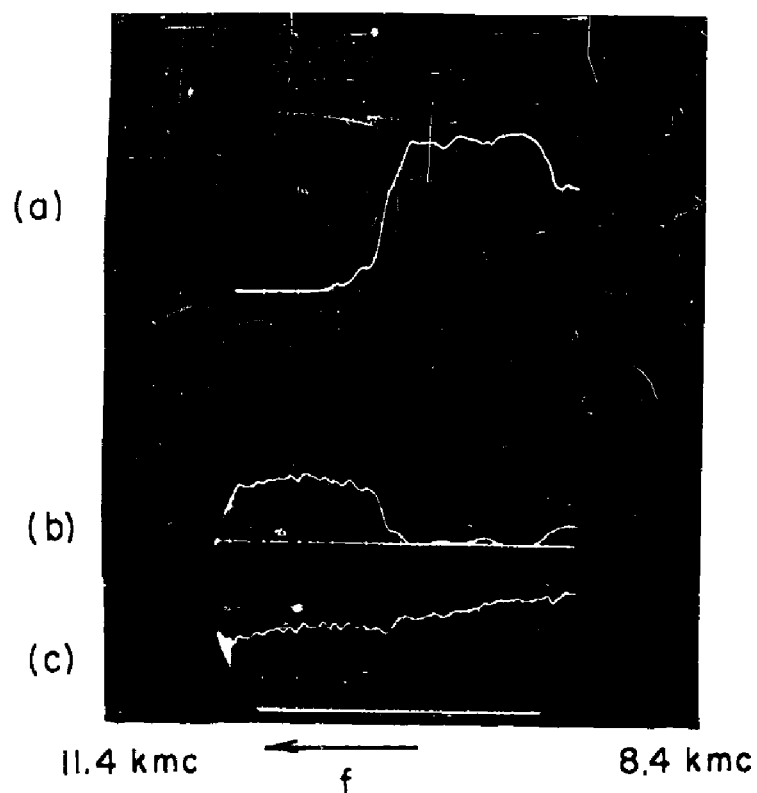


FIG. 7 TRANSMISSION CHARACTERISTIC OF LINEAR ARRAY.

(a) TRANSMITTED POWER

(b) REFLECTED POWER

(c) SAMPLE OF FORWARD POWER IN EXCITING WAVEGUIDE.

$2h = 12 \text{ mm}$ $b = 2.54$ $N = 30$

measured at detector 1 and reflected power at detector 2 . The average insertion loss for this particular structure amounted to 2.5 db . For a number of other combinations of element length and spacing, we obtain values for insertion loss varying between 2 and 4 db . Results for a 10.8 cm-long line are summarized in Figs. 8a-8e.

The next step is to determine whether the transmission losses are caused by radiation and reflection from the terminations at both ends, or whether there exists any appreciable radiation loss from points along the periodic structure. In order to determine how transmission loss depends on the length of the line, we compare transmission loss of three structures of varying length (Fig. 9). The number of cylinder elements is 21, 51, 101, with a constant spacing and cylinder length. We note that there is almost no change in the amplitude of the received wave at detector 3, indicating that losses from points along the structure are by an order of magnitude smaller than losses that occur at the terminals. This result is consistent with other data from experimental work on Yagi antennas [11].

IV. NON-UNIFORM LINES

Bends and twists in the line were the two non-uniformities which were investigated. The bend in the periodic structure was made in a plane perpendicular to the plane containing the cylinder axes, so that the elements stayed parallel to one another. The line was made to go through a total angle of 180° , with a radius of curvature ranging between 1.2λ and 5λ . The effect of such a bend on transmission characteristics is shown in Fig. 10. We note that in going through a half-circle we lose some bandwidth. The band of uniform transmission is now 400 Mc wide, compared with 1200 Mc for a

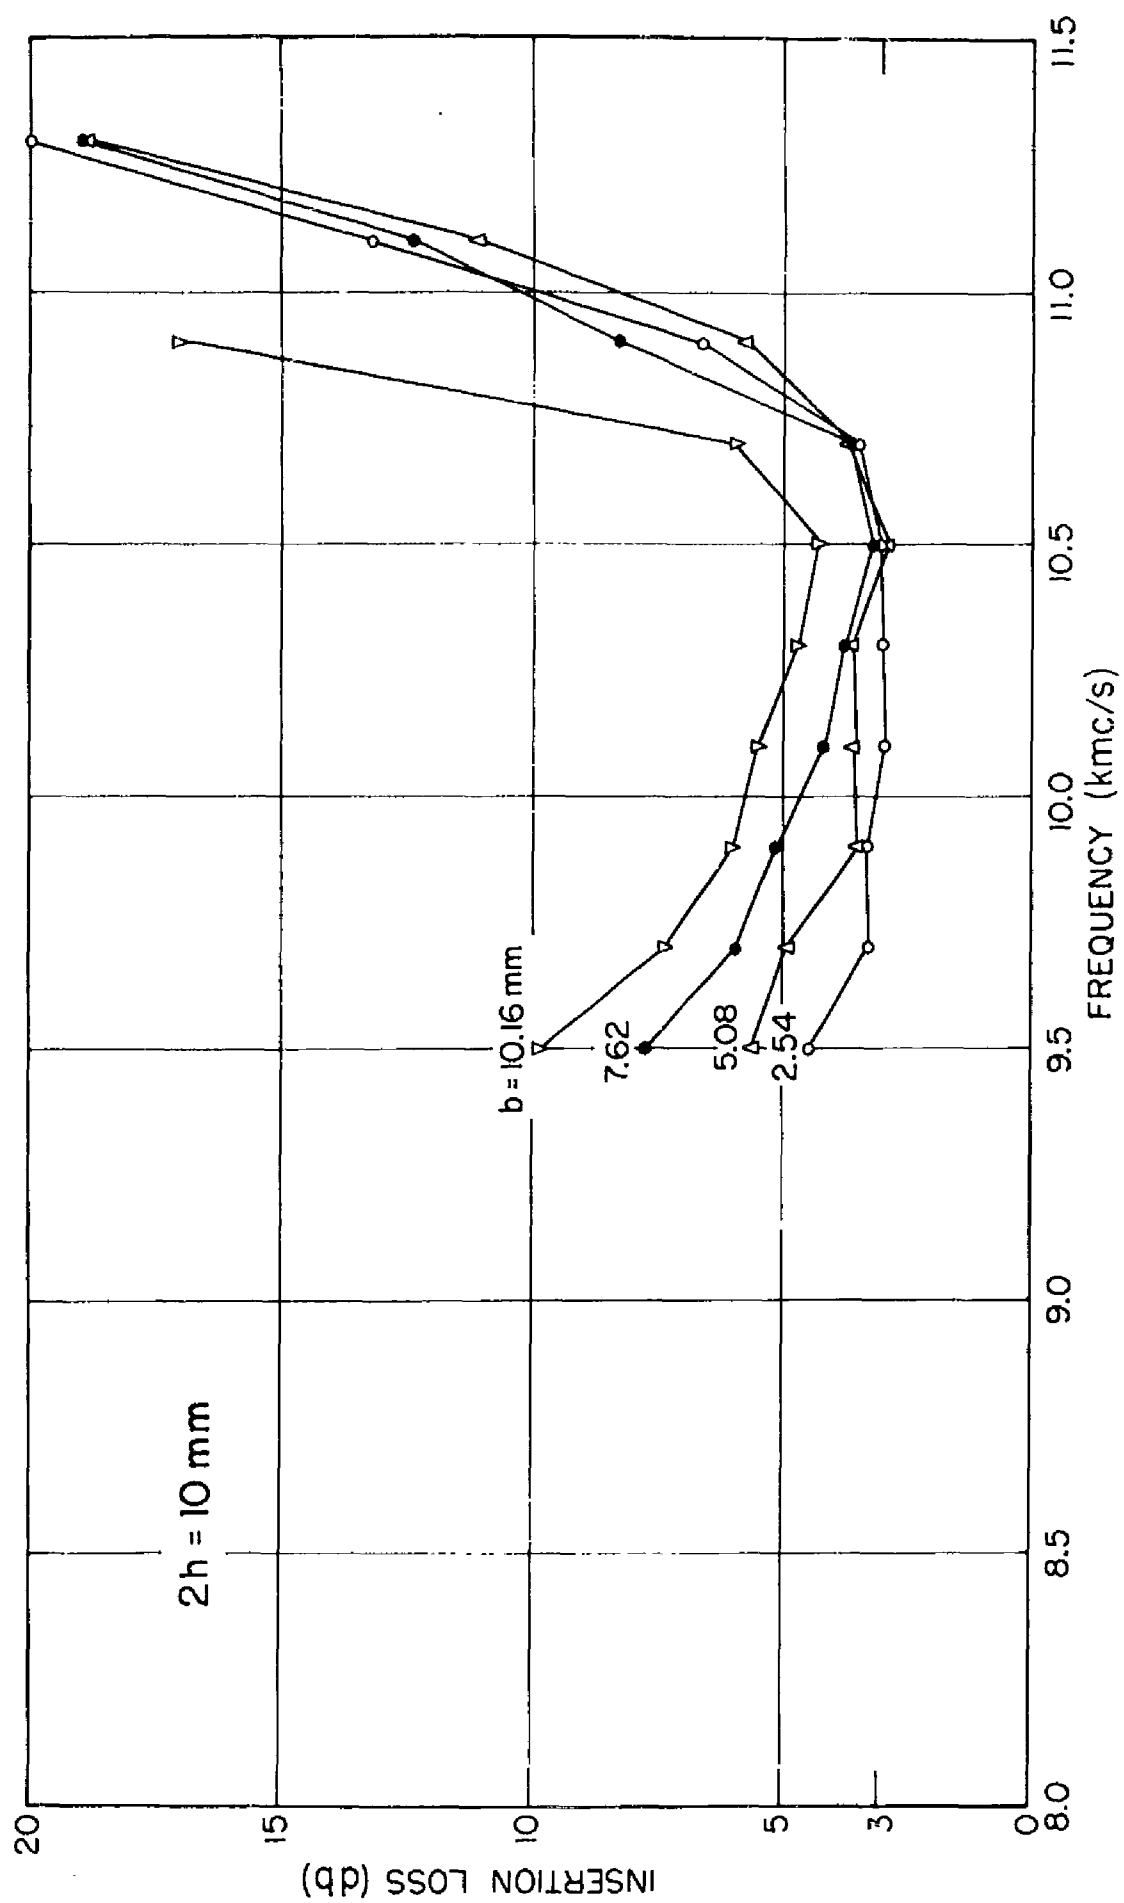


FIG. 8a INSERTION LOSS OF PERIODIC STRUCTURE. $2h = 10 \text{ mm}$. $L = 10.8 \text{ cm}$.

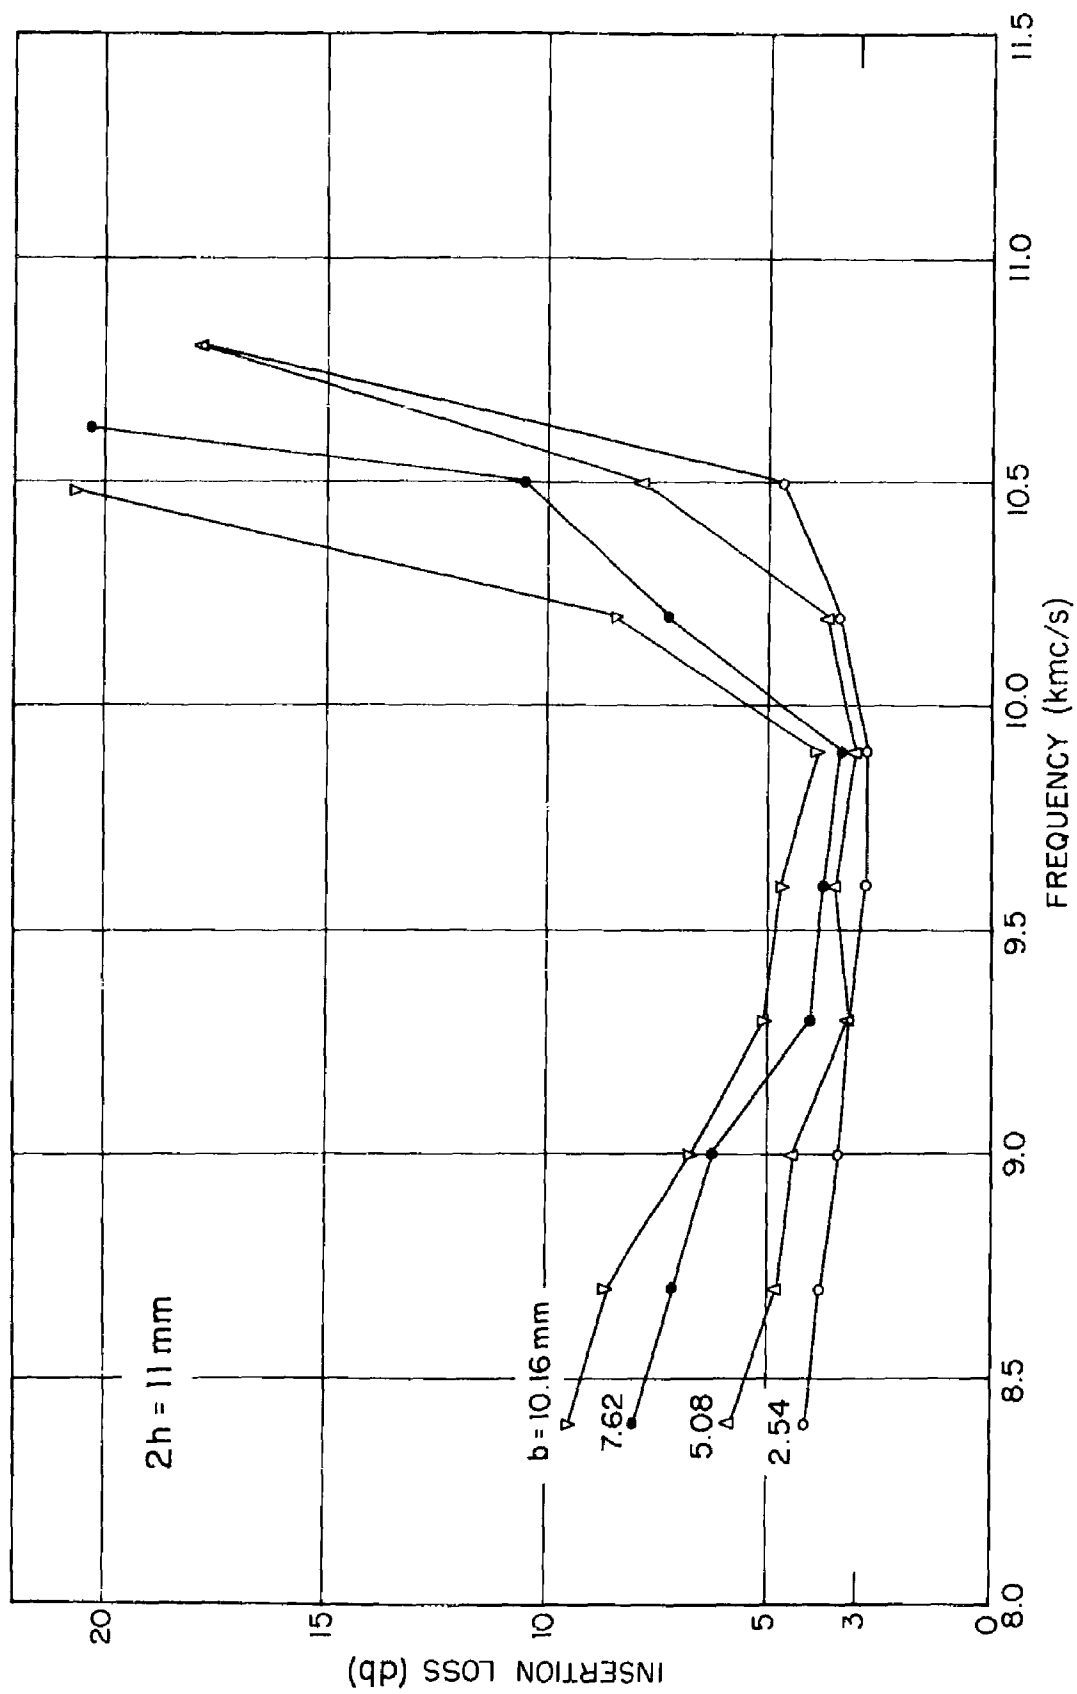


FIG. 8b INSERTION LOSS OF PERIODIC STRUCTURE. $2h = 11 \text{ mm}$. $L = 10.8 \text{ cm}$.

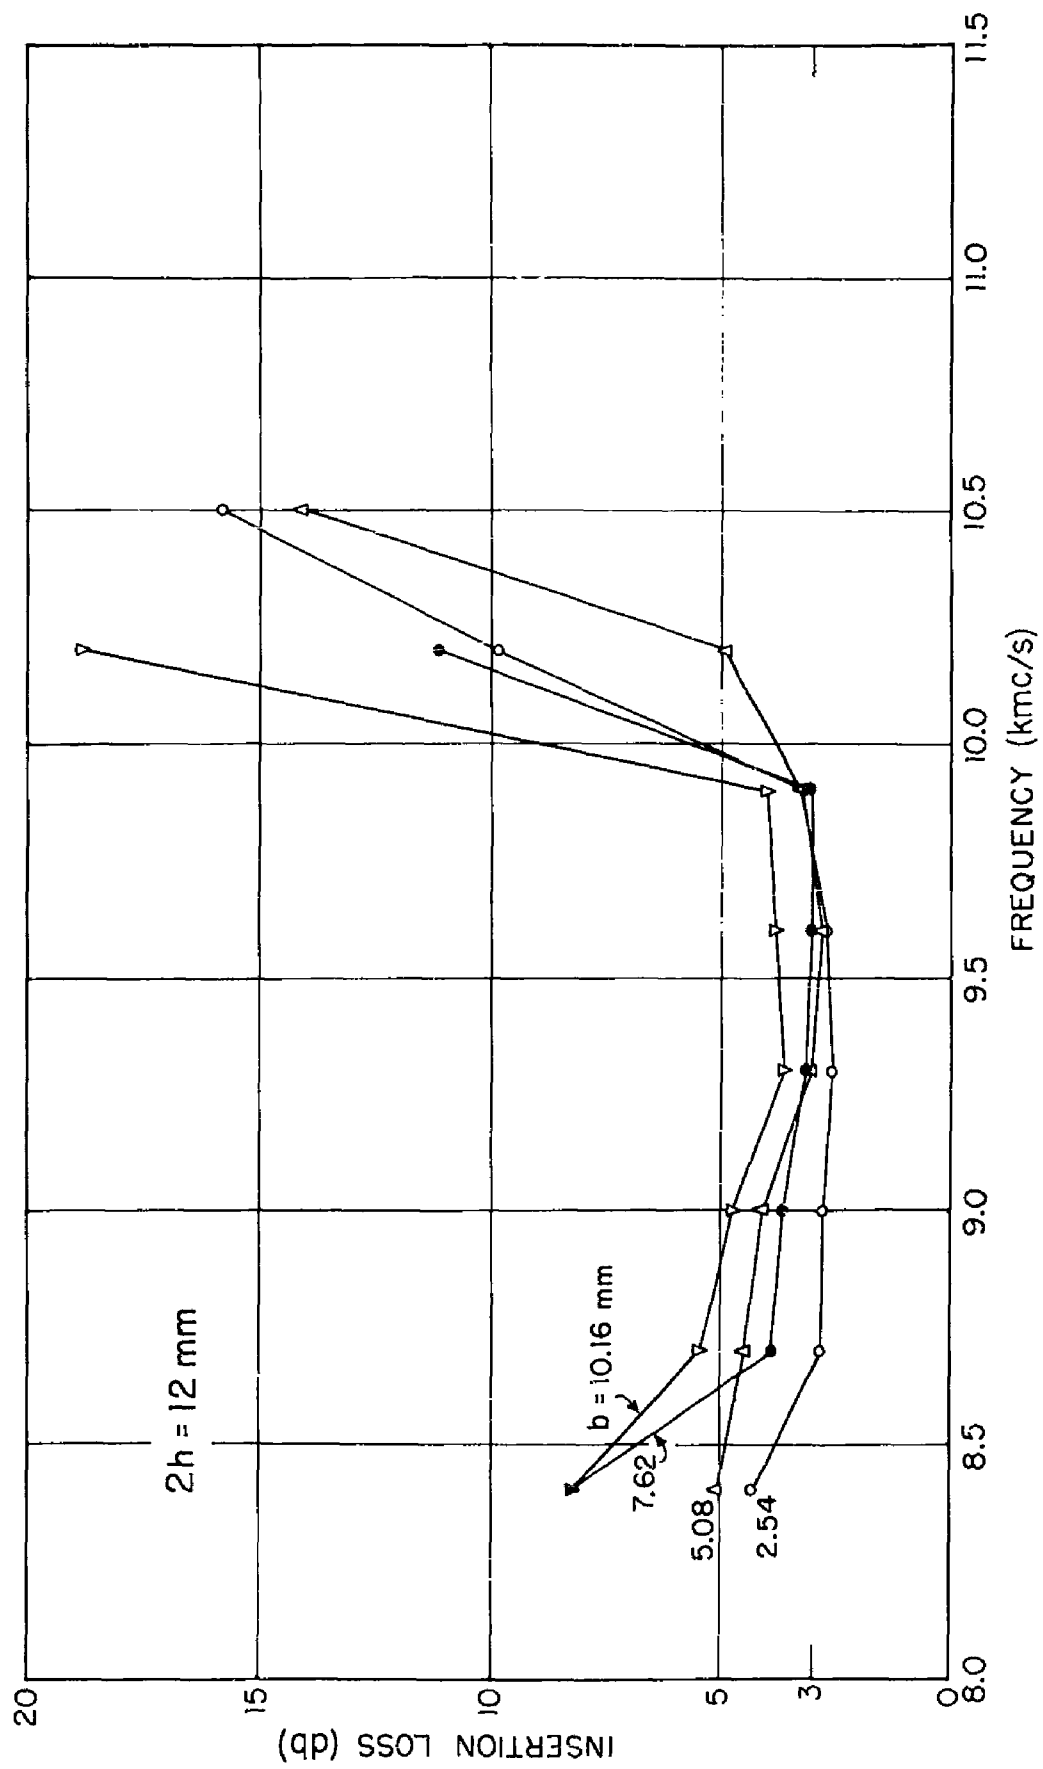


FIG. 8c INSERTION LOSS OF PERIODIC STRUCTURE. 2h = 12 mm. L = 10.8 cm.

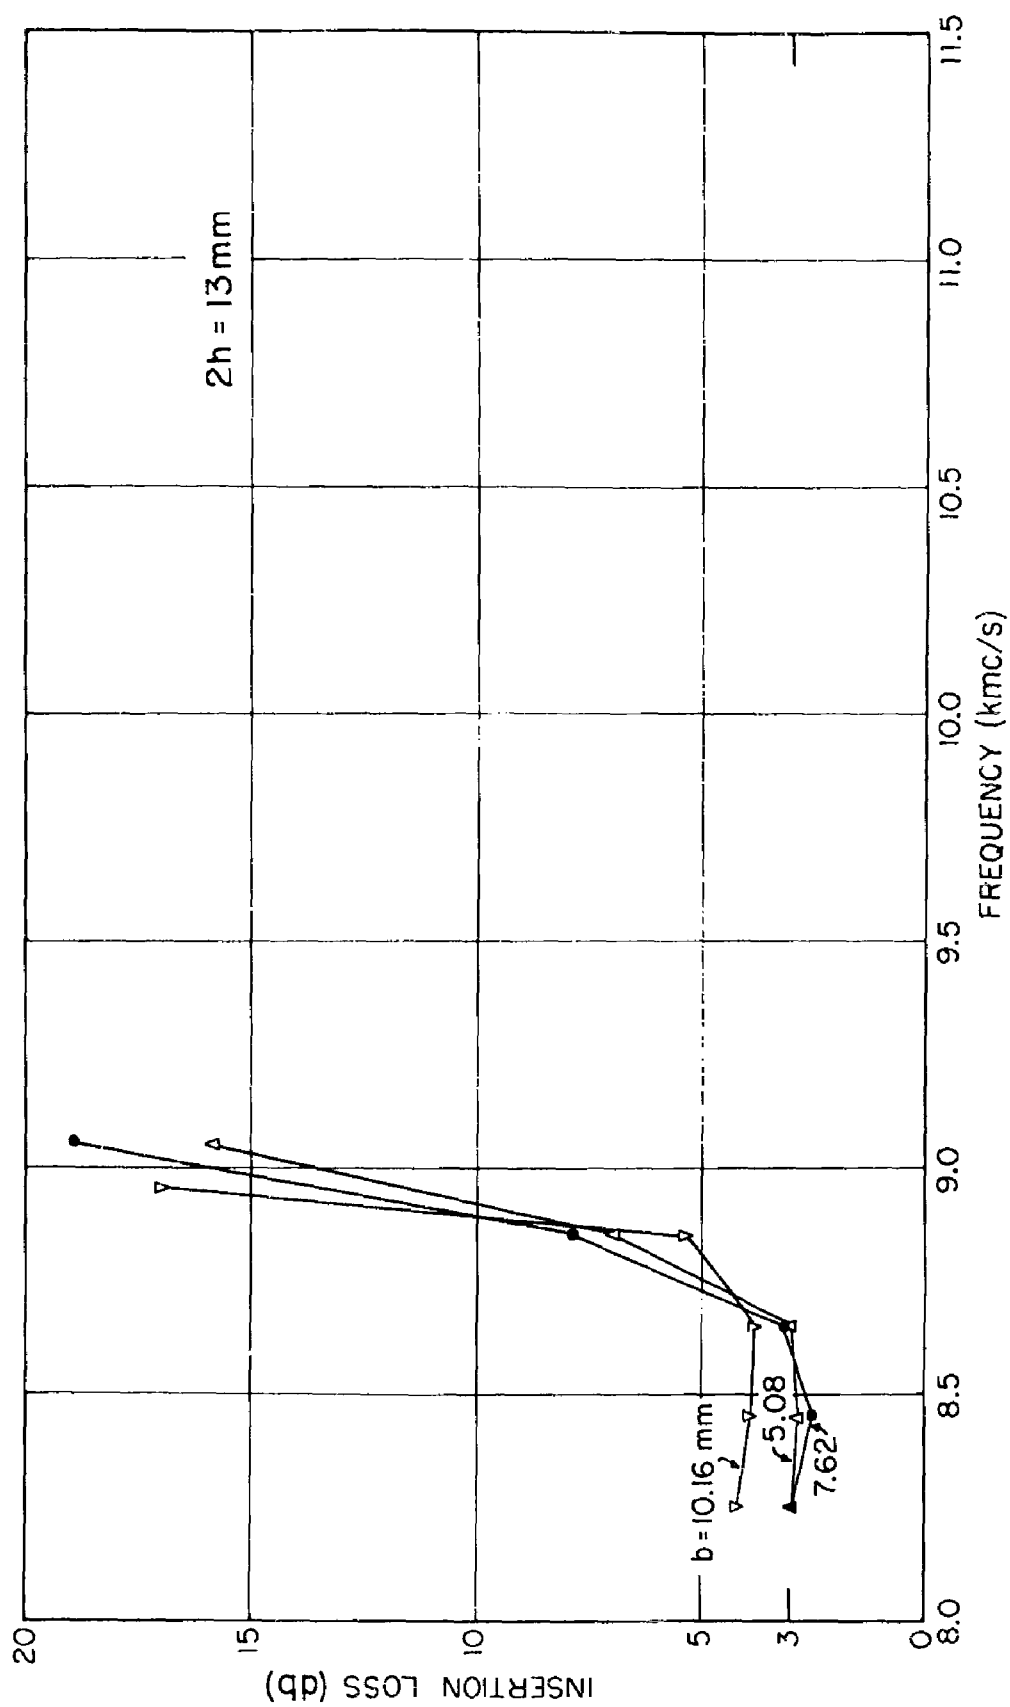


FIG. 8d INSERTION LOSS OF PERIODIC STRUCTURE. $2h = 13 \text{ mm}$. $L = 10.8 \text{ cm}$.

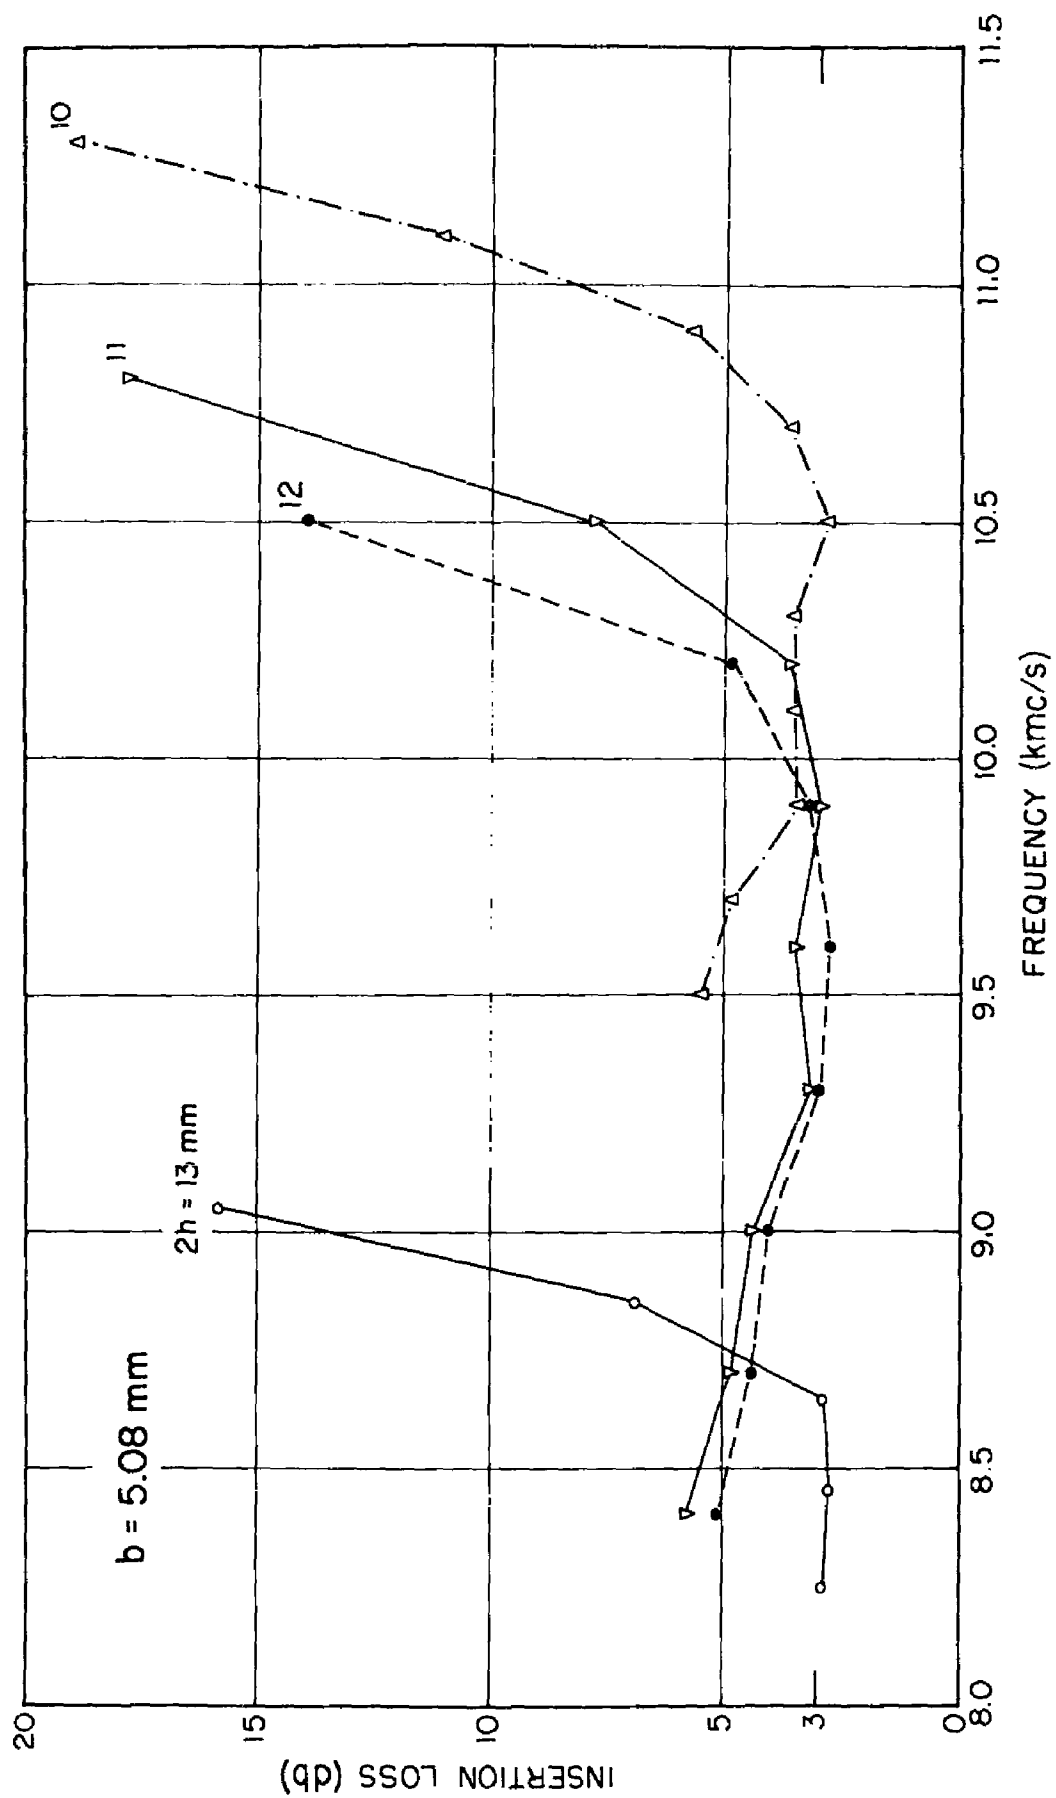


FIG. 8e INSERTION LOSS OF PERIODIC STRUCTURE. $b = 5.08 \text{ mm}$. $L = 10.8 \text{ cm}$.

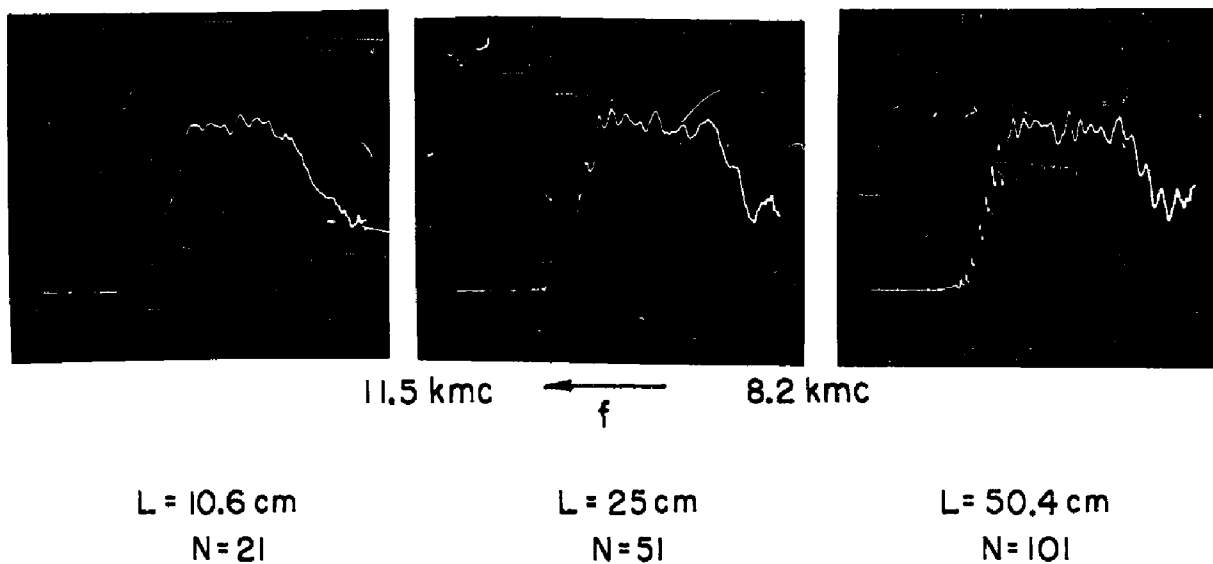


FIG. 9 TRANSMISSION ON LINEAR ARRAY
 vs. LENGTH OF ARRAY. $2h = 11$ mm $b = 5.08$ mm

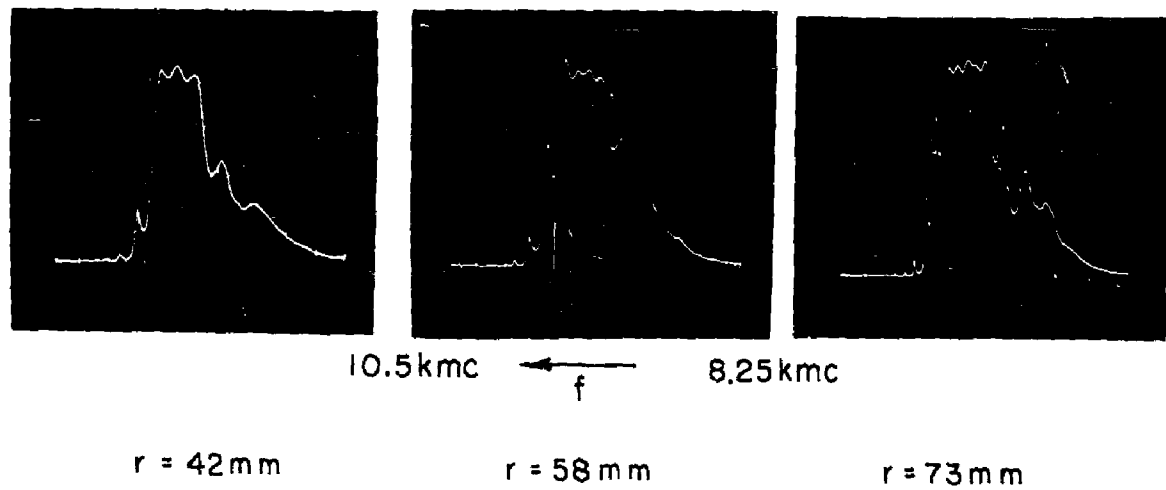
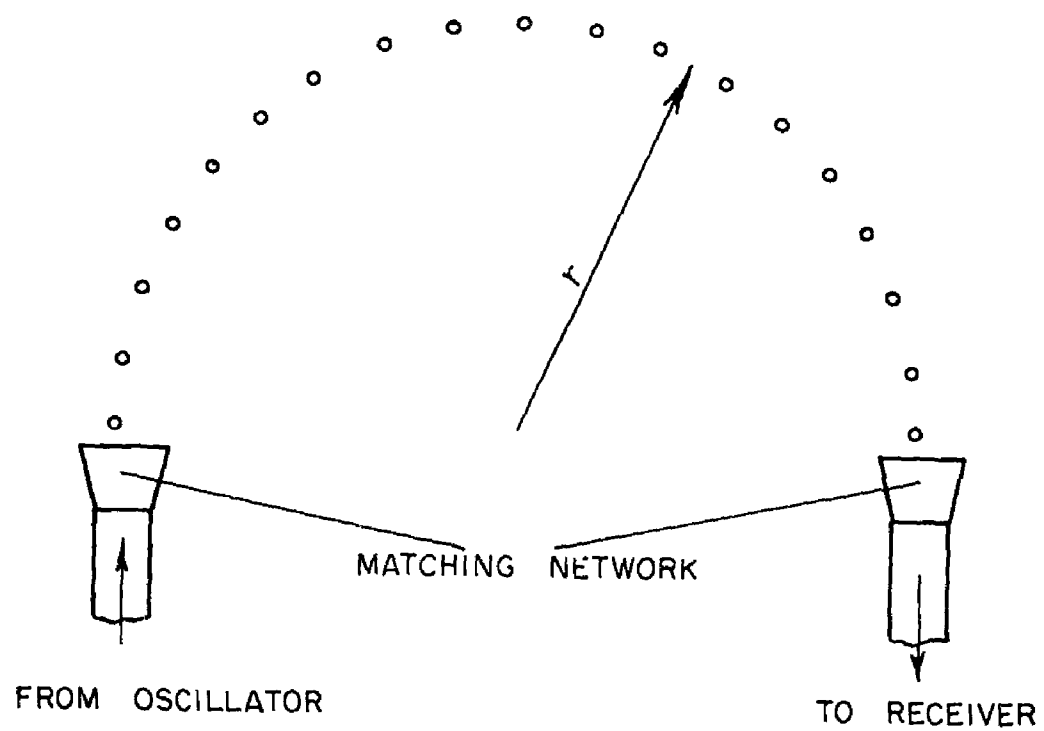


FIG. 10 TRANSMISSION ON CIRCULAR ARRAY
 vs RADIUS OF CURVATURE. TOTAL ANGLE 180°
 $2h = 12\text{mm}$ $b = 5.08\text{mm}$

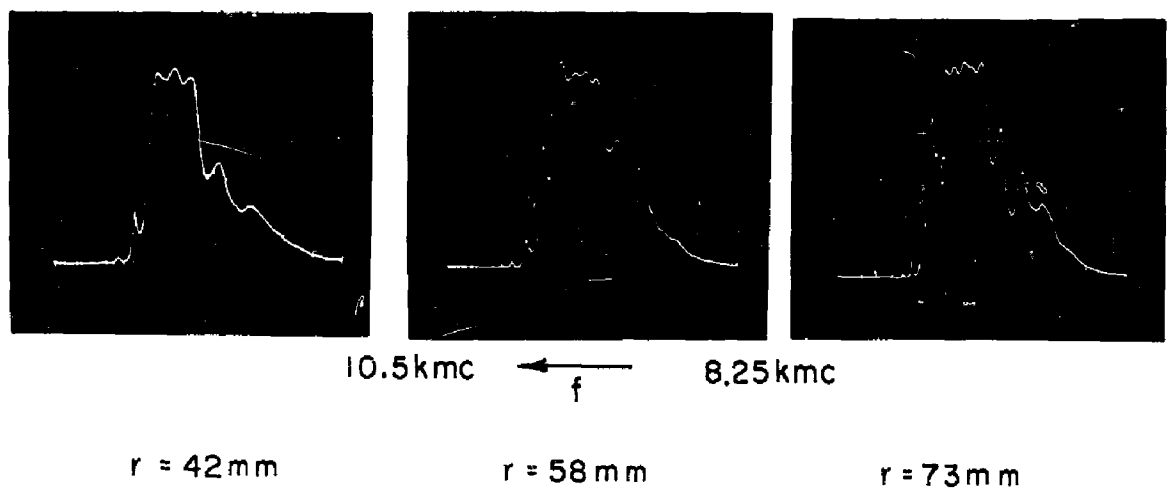
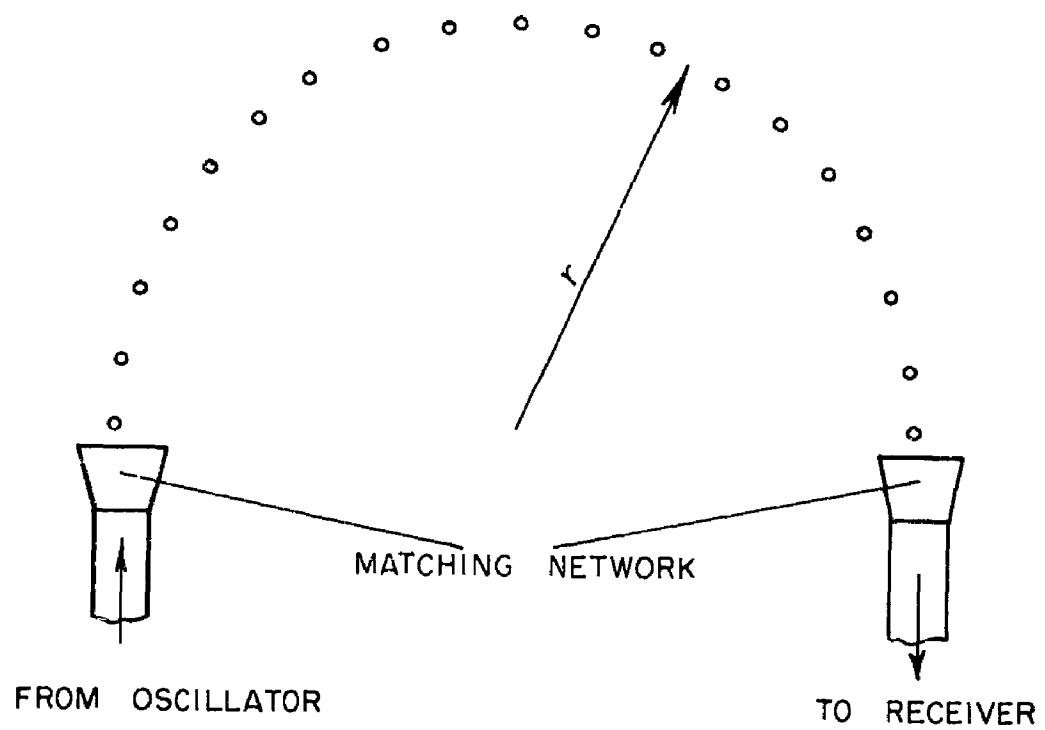


FIG. 10 TRANSMISSION ON CIRCULAR ARRAY
vs RADIUS OF CURVATURE. TOTAL ANGLE 180°
 $2h = 12\text{ mm}$ $b = 5.08\text{ mm}$

straight line array. Still, it is noticeable that over a somewhat limited frequency band we may reverse the direction of the transmission line without losing too much power through radiation. This is in marked contrast to what we find in most other open waveguide structures. The cylinders stay parallel to one another in going through the bend, so that adjacent elements, which interact most strongly, are not much affected by a bend in the line.

The change in transmission characteristics where the plane of polarization is going through a 90° twist is shown in Fig. 11. We notice some deterioration at the edges of the pass-band with almost no loss at mid-band. This loss of bandwidth is more severe when the spacing between elements is increased from 2.5 mm to double that value, as shown in Fig. 12.

V. PHASE VELOCITY

In order to measure phase velocity, the periodic structure is terminated by short circuits at both ends. By virtue of the periodicity of ω as a function of β , it can easily be shown that the number of resonances (i.e., when the resonator is an integral number of guided wavelengths long) in any one pass-band is finite, and is equal to the number of periodic sections in the resonant transmission line [14]. The transmission characteristics for a periodic structure terminated by full-wave cylinders is shown in Fig. 13. Every peak of transmission can thus be associated with a known number of half-wavelengths in the resonator standing wave pattern, and, hence, the propagation constant is determined. A set of typical results is shown in Fig. 14. The accuracy of this method depends on the quality of the terminating elements and the accuracy in measuring the effective resonator length. Accuracies of 10^{-3} are easily obtained.

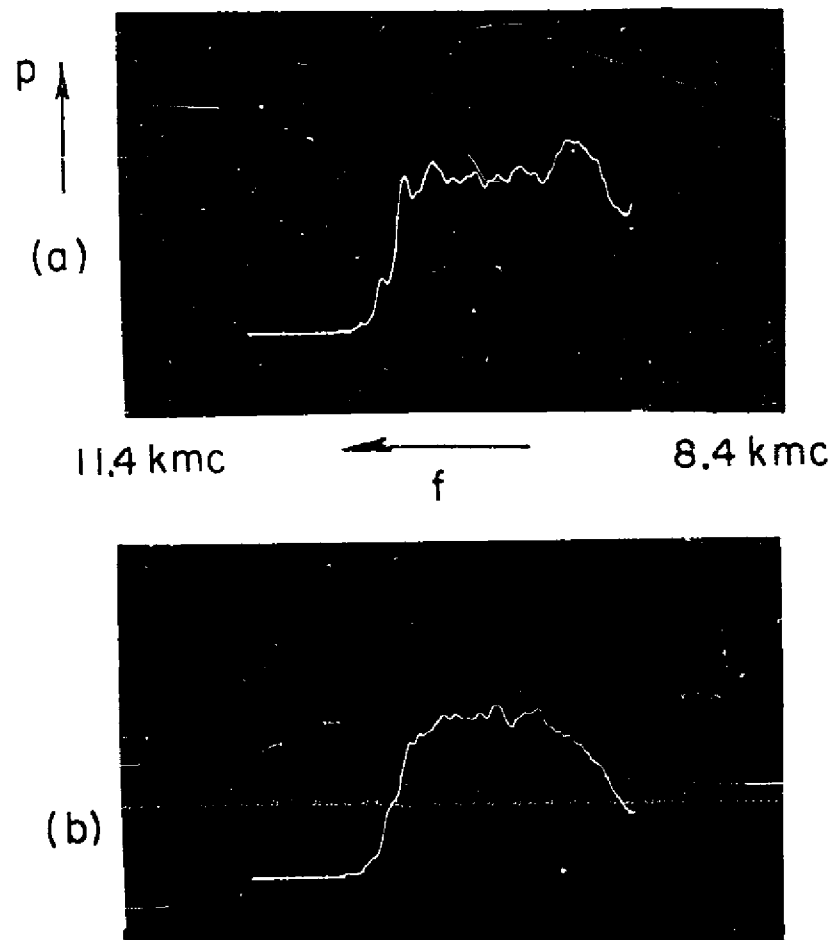


FIG. 11 TRANSMISSION ON TWISTED
ARRAY COMPARED WITH ARRAY OF
PARALLEL CYLINDERS. TWIST ANGLE
 90°

(a) UNIFORM LINE

(b) TWISTED LINE

$2h = 11\text{ mm}$ $b = 2.54\text{ mm}$ $L = 10.6\text{ cm}$

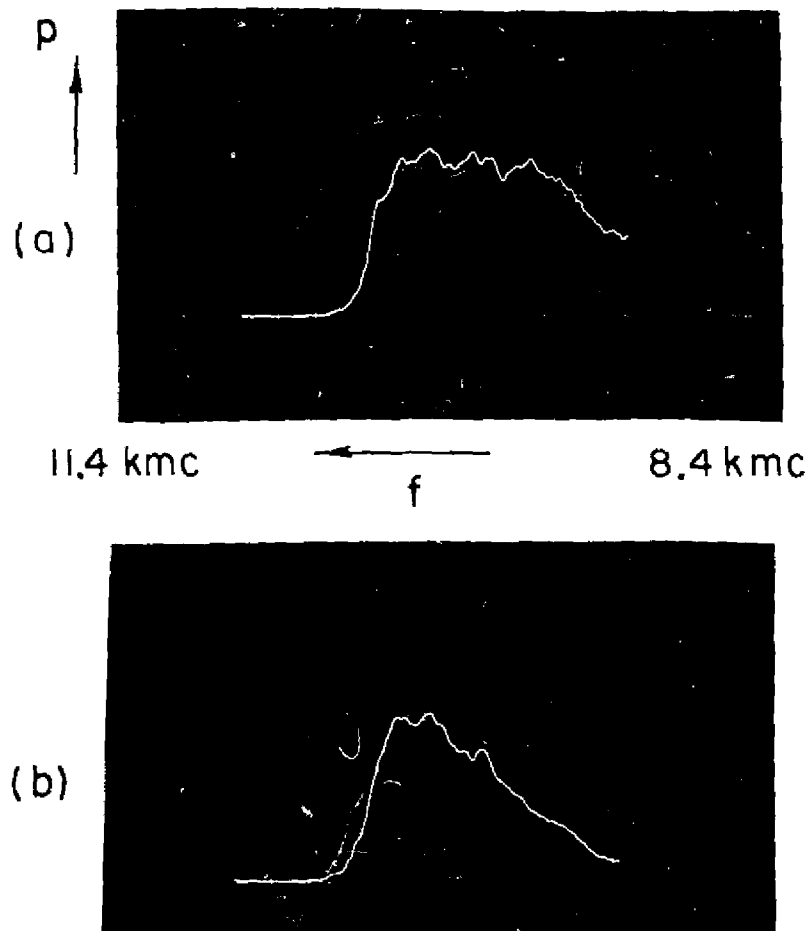


FIG. 12 TRANSMISSION ON TWISTED
ARRAY COMPARED WITH ARRAY OF
PARALLEL CYLINDERS. TWIST ANGLE
 90°

(a) UNIFORM LINE

(b) TWISTED LINE

$2h = 11\text{mm}$ $b = 5.08\text{mm}$ $L = 10.6\text{cm}$

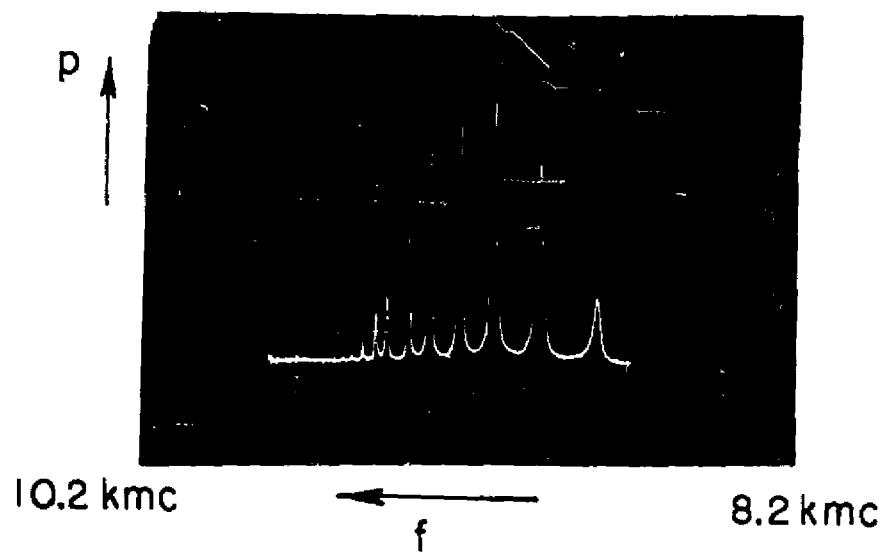


FIG. 13 TRANSMISSION ON RESONANT LINE. $2h=13\text{ mm}$ $b=5.08\text{ mm}$ $L=10.6\text{ cm}$

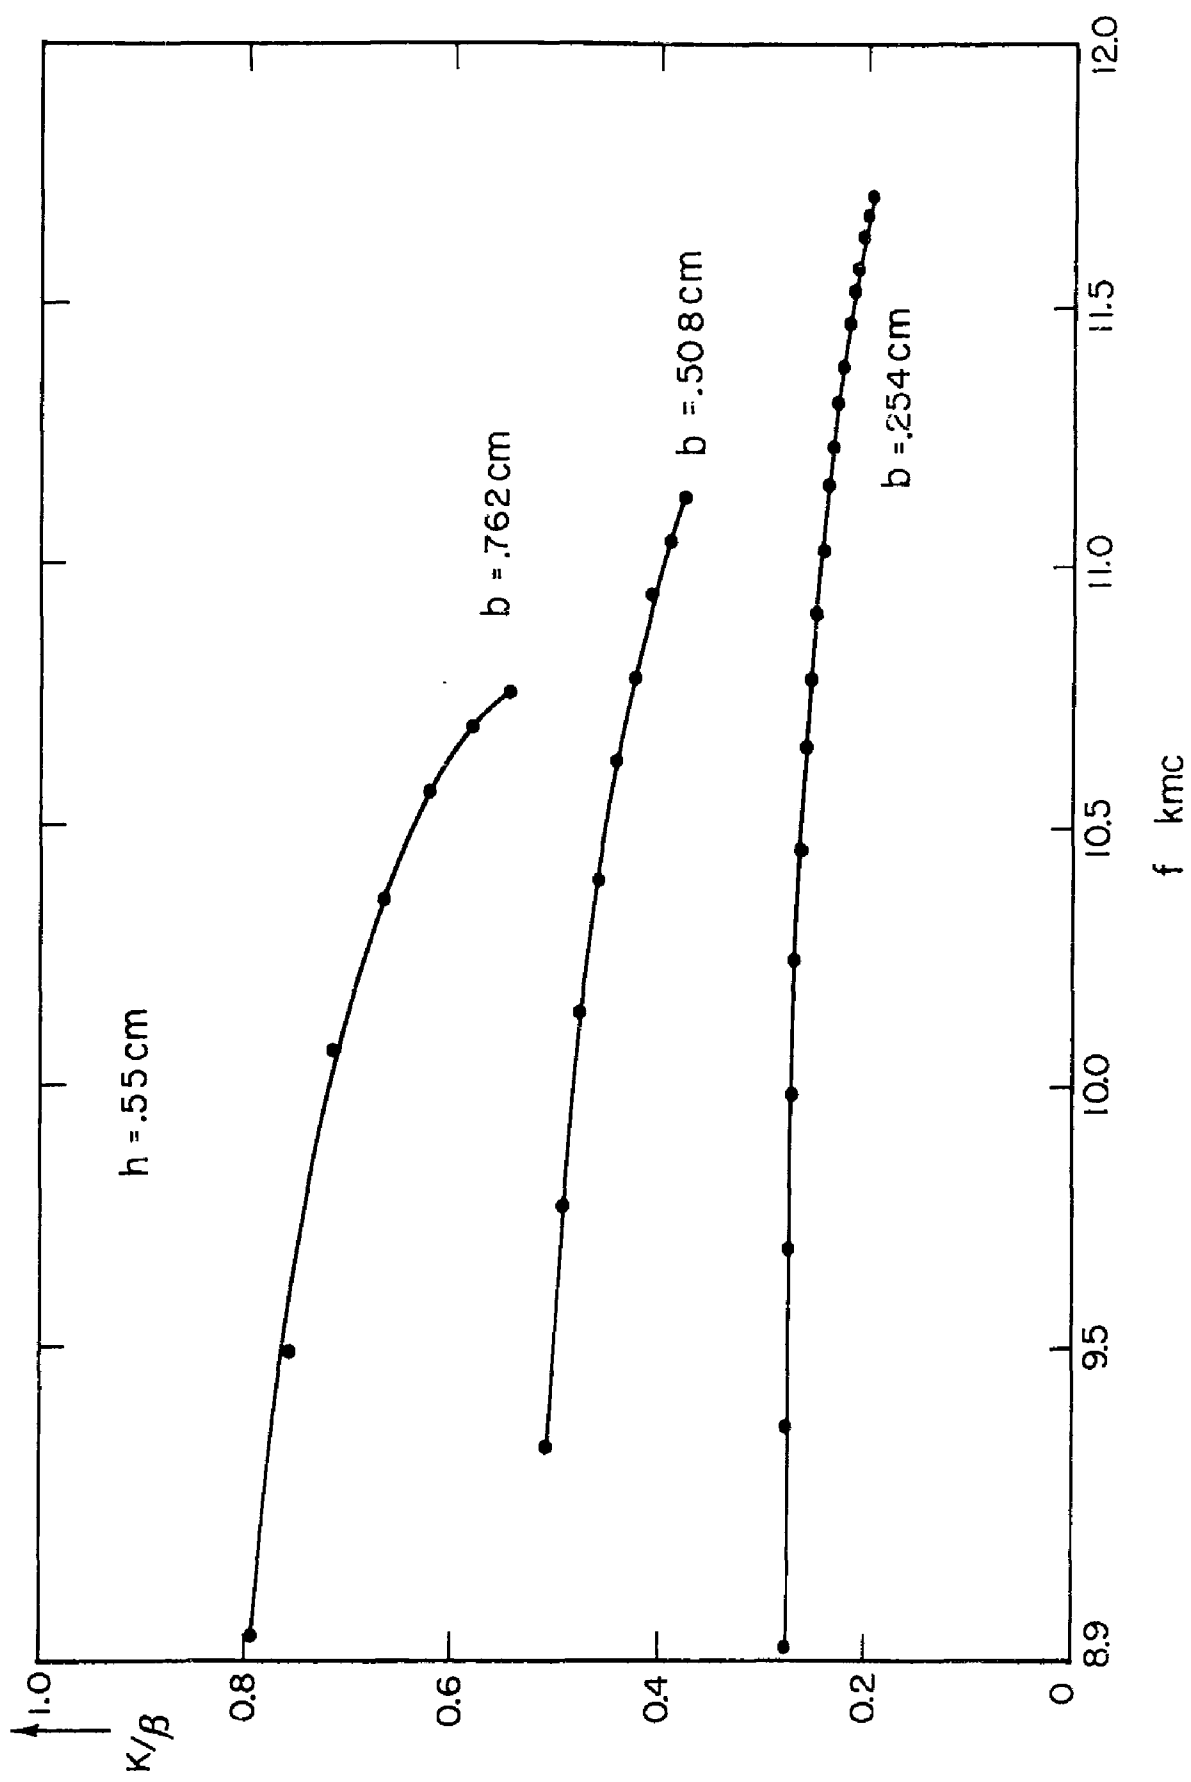


FIG. 14 PHASE VELOCITY ON UNIFORM ARRAY $2h = 11$ mm

VI. CONCLUSIONS

It has been shown that an open structure of an array of parallel conducting cylinders can be used as a transmission line. Losses are effectively independent of the length of the line, and we may bend or twist the line without radiation loss over a wide band of frequencies. This type of transmission line may have certain advantages over hollow metal pipes under circumstances where a saving in weight is of importance, since the supporting cylinders can be made thin enough to have very small weight and may be embedded in a lightweight medium, such as styrofoam. There may also be an advantage in not requiring physical contact of conducting metal along the line. The line may be broken up into several building blocks, and coupling between sections may be controlled by changing the proximity of the blocks to one another. This may provide a convenient way for experimentally optimizing certain microwave systems.

ACKNOWLEDGMENT

The author is indebted to Professor Ronold W. P. King for many valuable discussions and suggestions.

1. F. E. Borgnis and C. H. Papas, "Electromagnetic Waveguides," Encyclopedia of Physics, Vo. 16, Springer-Verlag, Berlin, 1958.
2. L. Brillouin, "Wave Guides for Slow Waves," J. Appl. Phys., 19, 1023 (1948).
3. F. J. Zucker, "The Guiding and Radiation of Surface Waves," Proc. Symposium on Modern Advances in Microwaves Techniques, Polytechnic Institute of Brooklyn, New York (1954).
4. E. L. Chu and W. W. Hansen, "The Theory of Disk-Loaded Waveguides," J. Appl. Phys., 18, 996 (1947).
5. R. S. Elliot, "On the Theory of Corrugated Plane Surfaces," Trans. IRE on Antennas and Propagation, AP-2, 71 (April 1954).
6. H. E. M. Barlow and A. E. Karbowiak, "An Experimental Investigation of the Properties of Corrugated Cylindrical Surface Waveguides," Proc. IEE, Vol. 101, Part III, p. 182 (May 1954).
7. J. Shefer, "Plane Waves on a Periodic Structure of Circular Disks and their Application to Surface-Wave Antennas," Scientific Report No. 11 (Series 2), Cruft Laboratory, Harvard University, Cambridge, Mass. (December 1961).
8. L. Brillouin, Wave Propagation in Periodic Structures, McGraw-Hill, New York, N. Y. (1946).
9. R. W. P. King, "Linear Arrays: Currents, Impedances, and Fields," Trans. IRE on Antennas and Propagation, AP-7, S440 (December 1950).
10. S. Silver, Microwave Antenna Theory and Design, McGraw-Hill, New York, N. Y. (1949)
11. J. O. Specter, "An Investigation of Periodic Structures for Yagi Aerials," Proc. IEE, 105, Part B, 38 (January 1958).
12. A. S. Dunbar, W. S. Lucke, E. M. T. Jones, and D. K. Reynolds, "Ridge and Corrugated Antenna Studies," Stanford Research Institute, Stanford, Calif., Project No. 199, Final Report (January 1951).
13. J. Storer, "Variational Solution to the Problem of the Symmetrical Cylindrical Antenna," Technical Report No. 101, Cruft Laboratory, Harvard University, Cambridge, Mass. (February 1950).
14. J. C. Slater, "The Design of Linear Accelerators," Technical Report No. 47, Research Laboratory for Electronics, Massachusetts Institute of Technology, Cambridge, Mass. (September 1947).

AFMTC
AFMTC Tech Library-MU-135
Patrick AF Base, Florida

AUL
Maxwell AF Base, Alabama

ASD (ASAPRD-Dist)
Wright-Patterson AF Base, Ohio

RADC (RAYLD)
Griffiss AF Base, New York
Attn: Documents Library

AF Missile Development Center
Holloman AF Base (MDGRT)
New Mexico

ARL (ARA-2)
Library AFL 2292, Building 450
Wright-Patterson AF Base, Ohio

Commanding General (USASRDL)
Fort Monmouth, New Jersey
Attn: Tech. Doc. Ctr. SIGRA/SL-ADT

Department of the Army
Office of the Chief Signal Officer
Washington 25, D. C.
SIGRD-4a-2

Commanding Officer
Attn: ORDTL-012
Diamond Ordnance Fuze Laboratories
Washington 25, D. C.

Commanding General
U. S. Army Ordnance Missile Command
Redstone Arsenal, Alabama
Attn: Technical Library

Library, Boulder Laboratories
National Bureau of Standards [2]
Boulder, Colorado

MIT Electronics Research Lab.
Building 26, Room 327
Cambridge 39, Massachusetts
Attn: John H. Hewitt
- - - - -

ASTIA (TIPAA) [10]
Arlington Hall Station
Arlington 12, Virginia

National Aeronautics and
Space Agency
1520 H Street, N. W.
Washington 25, D. C.
Attn: Library

Director
Langley Research Center
National Aeronautics and
Space Administration
Langley Field, Virginia

AFCRL, OAR (CRIPA-Stop39)
L. G. Hanscom Field [10]
Bedford, Massachusetts

Chief, Bureau of Naval Weapons
Department of the Navy [2]
Washington 25, D. C.
Attn: DLI-31

Director (Code 2027) [2]
U. S. Naval Research Laboratory
Washington 25, D. C.

Director, USAF Project RAND
The Rand Corporation
1700 Main Street
Santa Monica, California
Through: AF Liaison Office

Technical Information Office
European Office
Shell Building, 47 Cantersteen
Brussels, Belgium

U. S. Army Aviation
Human Research Unit
U. S. Continental Army Command
P. O. Box 428, Ft. Rucker, Alabama
Attn: Maj. Arne H. Eliasson

ONR Branch Office, London
Navy 100, Box 39 [10]
F. P. O., New York, N. Y.

* One copy, unless otherwise indicated by number enclosed in brackets.

ASD (ASRNRE-3, Mr. P. Springer)
Wright-Patterson AF Base, Ohio

Director
Evans Signal Laboratory
Belmar, New Jersey
Attn: Mr. O. C. Woodyard

Director
U. S. Army Ordnance
Ballistic Research Laboratories
Aberdeen Proving Ground
Maryland
Attn: Ballistic Measurements Lab.

Airborne Instruments Laboratory, Inc.
Division of Cutler Hammer
Walt Whitman Road
Melville, L. I., New York
Attn: Dr. E. Fubine, Director
Research and Engineering Div.

Stanford Research Institute
Menlo Park, California [2]
Attn: Dr. D. R. Scheuch, Asst. Director
Div. of Engineering and Research

Bell Aircraft Corporation
P. O. Box 1, Buffalo 5, New York
Attn: Eunice P. Hazelton, Librarian

Goodyear Aircraft Corporation
1210 Massillon Road
Akron 15, Ohio
Attn: Library, Plant G

Lockheed Aircraft Corporation
California Division
P. O. Box 551, Burbank, California
Attn: Mr. H. Rempt

Convair, A Div. of Gen. Dynamics Corp.
3165 Pacific Highway
San Diego 12, California
Attn: Mr. R. W. Honer
Head Electronics Research

University of California [2]
Department of Engineering
Berkeley 4, California
Attn: Antenna Laboratory

Ryan Aeronautical Company
2701 Harbor Drive
Lindbergh Field
San Diego 12, California
Attn: J. R. Giantvalley

Boeing Airplane Company
Aero Space Division
P. O. Box 3707, Seattle 24, Washington
Attn: R. R. Barber, Library Supervisor

General Electric Company
Electronics Park
Syracuse, New York
Attn: Documents Library, B. Fletcher
Building 3-143A

Chu Associates
P. O. Box 387, Whitcomb Avenue
Littleton, Massachusetts

AFCRL, OAR [Total: 9 copies]
L. G. Hanscom Field
Bedford, Massachusetts
Attn: CRRD: C. L. Sletten [3], R. Shore [2]
P. Blacksmith, Jr. [2], Contract Files [2]

Chief of Naval Operation
Department of the Navy
Attn: OP-413-B21
Washington 25, D. C.

Commander
U. S. Naval Air Missile Test Center
Point Mugu, California
Attn: Code 366

Office of Naval Research (Code 427)
Department of the Navy
Washington 25, D. C.

Calif. Inst. Tech., Jet Propulsion Lab.
Pasadena 4, California
VIA: Dist. Chief, Los Angeles Ordnance
District, 55 S. Grand Ave., Pasadena
California--Attn: ORDEV-M

Cornell University
School of Electrical Engineering
Ithaca, New York
Attn: Prof. G. C. Dalman

* One copy, unless otherwise specified by number enclosed in bracket.

Georgia Technical Research Institute
Engineering Experiment Station
722 Cherry Street, N. W.
Atlanta, Georgia
Attn: Dr. James E. Boyd

The Johns Hopkins University [2]
Carlyle Barton Laboratory, Librarian
Charles and 34th Street
Baltimore 18, Maryland

The Johns Hopkins University
Applied Physics Laboratory [2]
8621 Georgia Avenue
Silver Springs, Maryland

McGill University
Montreal, Canada
Attn: Prof. G. A. Woonton, Director
Eaton Electronics Research Lab.

The University of Michigan
Engineering Research Institute
Willow Run Laboratories [2]
Willow Run Airport
Ypsilanti, Michigan
Attn: Librarian

New York University [2]
Institute of Mathematical Sciences
25 Waverly Place, Room 802
New York 3, New York
Attn: Prof. Morris Kline

G. McKay Library [2]
Harvard University
Cambridge, Mass
Attn: Tech. Reports Collection

Pennsylvania State University
Dept. of Electrical Engineering
University Park, Pennsylvania

University of Texas
Defense Research Laboratory
Austin, Texas
Attn: C. W. Horton, Physics Library

Polytechnic Institute of Brooklyn
Microwave Research Institute [2]
55 Johnson Street, Brooklyn, N. Y.
Attn: Mr. A. E. Laemmel

Case Institute of Technology
Cleveland, Ohio
Attn: Prof. S. Seeley

Purdue University
Department of Electrical Engineering
Lafayette, Indiana
Attn: Dr. Schultz

University of Tennessee
Ferris Hall
W. Cumberland Avenue
Knoxville 16, Tennessee

Dr. U. Unz
University of Kansas
Lawrence
Kansas
Attn: Electrical Engineering Dept.

[Remaining copies]
AFCRL, OAR, CRRD
L. G. Hanscom Field
Bedford, Massachusetts