

UNCLASSIFIED

AD 400 264

*Reproduced
by the*

ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

N-63-3-1

5 REACTANCE 3 TERMINAL PEAKING CIRCUIT

by

Leo E. Foley

Research Report No. PIBMRI-1119-63

for

The Air Force Office of Scientific Research

The U. S. Army Research Office

The Office of Naval Research

Contract No. AF-AFOSR-62-295

February 28, 1963

400 264



POLYTECHNIC INSTITUTE OF BROOKLYN

MICROWAVE RESEARCH INSTITUTE

ELECTRICAL ENGINEERING DEPARTMENT

CATALOGED BY SHIA
AS AD NO. _____

400 264

5 REACTANCE 3 TERMINAL PEAKING CIRCUIT

by

Leo E. Foley

Polytechnic Institute of Brooklyn
Microwave Research Institute
55 Johnson Street
Brooklyn 1, New York

Research Report PIBMRI-1119-63
Contract No. AF-AFOSR-62-295

February 28, 1963

Title Page
Acknowledgment
Abstract
Table of Contents
14 pages of text
6 pages of figures
2 pages of tabulations
2 pages of Conclusions
Bibliography
Distribution List

Leo E. Foley (RD)

Leo E. Foley
Research Fellow, Jr.

Mischa Schwartz

Mischa Schwartz
Head, Electrical Engineering Dept.

for

The Air Force Office of Scientific Research
The U. S. Army Research Office
The Office of Naval Research

ACKNOWLEDGEMENT

The author wishes to express his appreciation to Dr. Sid Deutsch for his advice and guidance, and to Mr. Richard Mishelof of the Polytechnic Computer Laboratory for the programming of the computer.

The work reported herein was sponsored by the Air Force Office of Scientific Research of the Office of Aerospace Research; the department of the Army, Army Research Office; and the department of the Navy, Office of Naval Research under grant AF-AFOSR-62-295.

Abstract

The high frequency response of the inter-stage coupling network of any amplifier is limited by the total parasitic capacitance that exists between the output terminals of one stage and the following input terminals. By the addition of suitably chosen reactive elements the amplitude, phase, and time responses of the network will be improved. A five reactive network with three terminals is analyzed on a normalized basis and compared to the simple RC network which will be called the uncompensated reference. Two capacitive elements in the network represent the division of the distributed parasitic capacitance into lumped elements while the remaining three elements are physical entities. Values for the reactive elements will be selected for three different criteria: 1) critically damped transient response, 2) maximally flat amplitude response, and 3) linear phase response. After the parameters have been selected the normalized equations for amplitude, time delay, and step response will be derived and plotted for comparative purposes. Pole-zero plots are also drawn to give a more succinct picture of the networks analyzed. The calculations for this report were made with either an IBM 650 computer or a desk calculator. Six significant figures were maintained in the calculations. However, all figures in this report will be rounded off to four places.

Table of Contents

	Page
I. Transfer Impedance of the Network	1
II. Critically Damped Transient Response	4
III. Maximally Flat Amplitude Response	7
IV. Linear Phase Response (Maximally Flat Time Delay)	10
V. RC Reference	14
VI. Figures	15
VII. Tabulations	21
VIII. Conclusions	23
IX. Bibliography	25

I. TRANSFER IMPEDANCE OF THE NETWORK

a. Introduction

The high frequency representation of the interstage coupling network to be analyzed is shown in figure 1. A constant-current drive is represented by the current I_1 while V_2 is the voltage into the next stage. Therefore, the quantity of interest is the ratio of V_2 to I_1 . C_1 and C_2 represent lumped model representations for the parasitic capacitance and L_1 , L_2 , and C_3 are the peaking elements to be added. R is the load impedance seen at DC.

b. Normalization

By dividing all resistance and inductance by the factor R and multiplying all capacitance by the same factor the network may be impedance scaled such that at zero frequency the load is one ohm. Frequency scaling may be accomplished by dividing all inductance and capacitance by $R(C_1 + C_2)$ such that in the uncompensated case the half-power frequency occurs at ω equal to one radian per second. These operations yield the network shown in figure 2. If $C_1 + C_2 = C$, the parasitic capacitance in the uncompensated case, the following normalization equations will be obtained:

$$q = \frac{C_1}{C}$$

$$1-q = \frac{C_2}{C}$$

$$k_1 = \frac{L_1}{R^2 C}$$

$$k_2 = \frac{L_2}{R^2 C}$$

$$q_1 = \frac{C_3}{C}$$

$$\phi = \omega RC$$

$$H_{tr} = \frac{Z_{tr}}{R}$$

$$p = sRC$$

$$\tau = \frac{t}{RC}$$

By solving the above set the following denormalizing equations are obtained:

$$C_1 = qC$$

$$C_3 = q_1 C$$

$$C_2 = (1-q)C$$

$$Z_{tr} = R H_{tr}$$

$$L_1 = k_1 R^2 C$$

$$L_2 = k_2 R^2 C$$

$$t = RC \tau$$

$$\omega = \frac{\phi}{RC}$$

$$s = \frac{p}{RC}$$

c. Derivation

The ladder reduction method (1) can be used to obtain the normalized transfer impedance of the network shown in figure 3.

$$\begin{array}{rcl}
 1 & & V_3 \\
 pq_1 \neq 1 & & I_3 \\
 p^2 k_2 q_1 \neq pk_2 \neq 1 & & V_2 \\
 p^3 (1-q) k_2 q_1 \neq p^2 k_2 (1-q) \neq p(1-q) \neq pq_1 \neq 1 & & I_2 \\
 p^4 k_1 k_2 q_1 (1-q) \neq p^3 k_1 k_2 (1-q) \neq p^2 (1-q) k_1 \neq p^2 k_1 q_1 \neq p^2 k_2 q_1 & & V_1 \\
 \neq pk_1 \neq pk_2 \neq 1 & & \\
 p^5 k_1 k_2 q q_1 (1-q) \neq p^4 k_1 k_2 q (1-q) \neq p^3 [k_1 q (1-q) \neq q_1 q k_1 \neq k_2 q q_1 & & I_1 \\
 \neq k_2 q_1 (1-q)] \neq p^2 [q k_1 \neq q k_2 \neq k_2 (1-q)] \neq p [q \neq 1-q \neq q_1] \neq 1 & & \\
 H_{tr} = \frac{p^2 k_2 q_1 \neq pk_2 \neq 1}{p^5 k_1 k_2 q q_1 (1-q) \neq p^4 k_1 k_2 q (1-q) \neq p^3 [k_1 q (1-q) \neq q_1 (q k_1 \neq k_2)] & & \\
 \neq p^2 [q k_1 \neq k_2] \neq p [1 \neq q_1] \neq 1} & &
 \end{array}$$

The following substitutions can be made:

$$k_1 q = a$$

$$1-q = b$$

$$k_2 = c$$

$$q_1 = d$$

Htr =

$$p^2 cd / pc / 1$$

$$p^5 abcd / p^4 abc / p^3 (ab / ad / cd) / p^2 (a/c) / p(1/d) / 1$$

II. CRITICALLY DAMPED TRANSIENT RESPONSE

a. Selection of Parameters

This criterion requires that all the poles of Htr coalesce at one point on the negative real axis. The Laplace inverse of this pole configuration will be void of any sine or cosine terms and thereby of a critically damped nature.

D(p) must be of the form:

$$\left(\frac{1/p}{\alpha}\right)^5 = \frac{1}{\alpha} \frac{5p}{\alpha^2} \frac{10p^2}{\alpha^3} \frac{10p^3}{\alpha^4} \frac{5p^4}{\alpha^5} \frac{p^5}{\alpha^5}$$

$$D(p) = \frac{1}{\alpha} (1/d)p + (a/c)p^2 + (ab/ad/cd)p^3 + abcp^4 + abcdp^5$$

By equating the coefficients of equal powers of p the following system of equations are obtained:

$$\begin{aligned} \frac{1}{\alpha} d &= \frac{5}{\alpha} & \frac{10}{\alpha^2} &= a/c & \frac{10}{\alpha^3} &= ab/ad/cd \\ \frac{5}{\alpha^4} &= abc & \frac{1}{\alpha^5} &= abcd \end{aligned}$$

This set is solved directly to yield:

$$\begin{aligned} a &= \frac{175}{576} & b &= \frac{5}{21} & c &= \frac{25}{192} \\ d &= \frac{1}{24} & \alpha &= \frac{24}{5} \end{aligned}$$

Solved in terms of the network parameters the following values are obtained and indicated on the network in figure 4 in terms of the denormalizing quantities:

$$\begin{aligned} q_1 &= \frac{1}{24} & q &= \frac{16}{21} & 1-q &= \frac{5}{21} \\ k_2 &= \frac{25}{192} & k_1 &= \frac{1225}{3072} \end{aligned}$$

b. Step Response

$$\begin{aligned}
 Htr(p) &= \frac{p^2 \frac{25}{4608} + p \frac{25}{192} + 1}{\left(1 + p \frac{5}{24}\right)^5} \\
 &= \frac{\left(\frac{24}{5}\right)^5 \frac{p^2 75}{(24)^5} + \frac{p 75}{(24)^4} + 1}{\left(p + \frac{24}{5}\right)^5} \\
 &= \frac{\frac{K_1}{\left(p + \frac{24}{5}\right)^5} + \frac{K_2}{\left(p + \frac{24}{5}\right)^4} + \frac{K_3}{\left(p + \frac{24}{5}\right)^3} + \frac{K_4}{\left(p + \frac{24}{5}\right)^2} + \frac{K_5}{\left(p + \frac{24}{5}\right)}}{\left(p + \frac{24}{5}\right)^5} \\
 &= \frac{\frac{1}{2} \left(\frac{24}{5}\right)^5 + \frac{3}{8} \left(\frac{24}{5}\right)^4 + \frac{1}{8} \left(\frac{24}{5}\right)^3}{\left(p + \frac{24}{5}\right)^5}
 \end{aligned}$$

The inverse Laplace of the above yields the impulse response:

$$\begin{aligned}
 h(\tau) &= \frac{1}{2} \left(\frac{24}{5}\right)^5 \frac{1}{4!} \tau^4 \exp\left(-\frac{24}{5} \tau\right) + \frac{3}{8} \left(\frac{24}{5}\right)^4 \frac{1}{3!} \tau^3 \exp\left(-\frac{24}{5} \tau\right) \\
 &\quad + \frac{1}{8} \left(\frac{24}{5}\right)^3 \frac{1}{2!} \tau^2 \exp\left(-\frac{24}{5} \tau\right)
 \end{aligned}$$

The step response can be obtained from the above:

$$\begin{aligned}
 a(\tau) &= \int_0^\tau h(x) dx \\
 a(\tau) &= 1 - \exp(-4.8\tau) - 4.8\tau \exp(-4.8\tau) - 11.52\tau^2 \exp(-4.8\tau) \\
 &\quad - 16.13\tau^3 \exp(-4.8\tau) - 11.06\tau^4 \exp(-4.8\tau)
 \end{aligned}$$

The above equation is shown in figure 7 where it is the curve labeled T.

c. Amplitude Response

$$Htr(j\omega) = \frac{1 - \frac{25}{4608} \omega^2 + j\omega \frac{25}{192}}{\left(1 + j\omega \frac{5}{24}\right)^5}$$

$$\begin{aligned}
 |Htr|^2 &= \frac{\left(1 - \frac{25}{4608} \phi^2\right)^2 \cancel{\frac{1}{(192)^2}} \phi^2}{\left(1 \cancel{\frac{1}{(24)^5}} \phi^2\right)^5} \\
 &= \frac{1 \cancel{\frac{1}{.006104}} \phi^2 \cancel{\frac{1}{.2943 \times 10^{-4}}} \phi^4}{1 \cancel{\frac{1}{.2170}} \phi^2 \cancel{\frac{1}{.01884}} \phi^4 \cancel{\frac{1}{.8176 \times 10^{-3}}} \phi^6} \\
 &\quad \cancel{\frac{1}{17.74 \times 10^{-6}}} \phi^8 \cancel{\frac{1}{.1540 \times 10^{-6}}} \phi^{10}
 \end{aligned}$$

The $|Htr|$ is shown in figure 8 as the T curve.

d. Normalized Time Delay

$$D = \frac{\theta(\phi)}{\phi}$$

$$\theta(\phi) \Big|_{\lim \phi \rightarrow 0}$$

$$-\theta(\phi) = \tan^{-1} \frac{NrD1 - N1Dr}{NrDr \cancel{\frac{1}{N1D1}}}$$

where Nr, Dr, N1, and D1 are the real and imaginary parts of the numerator and the denominator of $Htr(j\phi)$.

$$\begin{aligned}
 Htr(j\phi) &= \frac{1 - .005425 \phi^2 \cancel{\frac{1}{.13021\phi}}}{1 - .4340 \phi^2 \cancel{\frac{1}{.009419}} \phi^4 \cancel{j} (1.042 \phi} \\
 &\quad \cancel{\frac{1}{.3925 \times 10^{-3}}} \phi^5 - .09042 \phi^3) \\
 -\theta(\phi) &= \tan^{-1} \frac{.9115 \phi - .03956 \phi^3 - .3434 \times 10^{-3} \phi^5}{-2.129 \times 10^{-6} \phi^7} \\
 &\quad \frac{1 - .3038 \phi^2}{\phantom{-2.129 \times 10^{-6} \phi^7}}
 \end{aligned}$$

$$\begin{aligned}
 D &= \frac{-\theta(\phi)}{\phi} \\
 &= .9115 \phi
 \end{aligned}$$

The above equation is shown in figure 9 as the T curve.

III. MAXIMALLY FLAT AMPLITUDE RESPONSE

a. Selection of Parameters

This criterion requires the maximum number of derivatives of the $|Htr|$ versus ϕ vanish in sequence at ϕ equal to zero. An equivalent condition, which will be used below, requires that the maximum number of derivatives of $|Htr|^2$ versus ϕ^2 vanish in sequence at ϕ equal to zero. This condition may be derived as follows:

$$\begin{aligned}
 Htr(p) &= \frac{1/\ a_1 p/\ a_2 p^2/\ a_3 p^3/\ \dots}{1/\ b_1 p/\ b_2 p^2/\ b_3 p^3/\ \dots} \\
 Htr(j\phi) &= \frac{1/\ j a_1 \phi - a_2 \phi^2 - j a_3 \phi^3/\ \dots}{1/\ j b_1 \phi - b_2 \phi^2 - j b_3 \phi^3/\ \dots} \\
 |Htr|^2 &= \frac{(1 - a_2 \phi^2/\ \dots)^2/\ (a_1 \phi - a_3 \phi^3/\ \dots)^2}{(1 - b_2 \phi^2/\ \dots)^2/\ (b_1 \phi - b_3 \phi^3/\ \dots)^2} \\
 &= \frac{1/\ m_2 \phi^2/\ m_4 \phi^4/\ \dots}{1/\ n_2 \phi^2/\ n_4 \phi^4/\ \dots} \\
 &= \frac{N(\phi^2)}{D(\phi^2)}
 \end{aligned}$$

If $D(\phi^2)$ is divided into $N(\phi^2)$ the following ascending series in ϕ^2 is obtained:

$$|Htr|^2 = 1/\ (m_2 - n_2)\phi^2/\ [(m_4 - n_4) - n_2(m_2 - n_2)]\phi^4/\ \dots$$

From the above expression it can be seen that if the corresponding coefficients of the $|Htr|^2$ are set equal to each other ($m_2 = n_2$, $m_4 = n_4$, etc.) the conditions for maximally flat amplitude will be satisfied.

For the network considered:

$$|H_{tr}|^2 = \frac{1/\phi^2(c^2 - 2cd)/\phi^4 c^2 d^2}{1/\phi^2[(1/d)^2 - 2(a/c)]/\phi^4[(a/c)^2/2abc - 2(ab/ad/cd)(1/d)]/\phi^6[(ab/ad/cd)^2/2abcd(1/d) - 2abc(a/c)]/\phi^8[a^2 b^2 c^2 - 2abcd(ab/ad/cd)]/\phi^{10} a^3 b^2 c^2 d^2}$$

Equating corresponding terms gives the following system of equations:

$$c^2 - 2cd = (1/d)^2 - 2(a/c)$$

$$c^2 d^2 = (a/c)^2/2abc - 2(ab/ad/cd)(1/d)$$

$$0 = (ab/ad/cd)^2/2abcd(1/d) - 2abc(a/c)$$

$$0 = a^2 b^2 c^2 - 2abcd(ab/ad/cd)$$

Using the Newton-Raphson method on the above system yielded the following results from an IBM 650 computer:

$$a = .3002$$

$$b = .4504$$

$$c = .2931$$

$$d = .1014$$

Solved in terms of the network parameters the following values are obtained and indicated on the circuit shown in figure 5 in terms of the denormalizing quantities:

$$q = .5496$$

$$k_2 = .2931$$

$$k_1 = .5462$$

$$q_1 = .1014$$

$$1-q = .4504$$

b. Amplitude Response

$$H_{tr}(j\phi) = \frac{1/\phi.2932 - \phi^2.02973}{1/\phi.1.101 - \phi^2.5933 - \phi^3.1954/\phi^4.03963/\phi^5.004018}$$

$$|H_{tr}|^2 = \frac{1/\phi.02647\phi^2/\phi.0008841\phi^4}{1/\phi.02647\phi^2/\phi.0008841\phi^4/16.17 \times 10^{-6}\phi^{10}}$$

The |Htr| is shown on figure 8 as the A curve.

c. Normalized Time Delay

$$- \theta(\phi) = \frac{.8083\phi - .05420\phi^3 - .001790\phi^5 - .0001195\phi^7}{1 - .3002\phi^2}$$

$$D = \frac{- \theta(\phi)}{.8083\phi}$$

The above equation is shown on figure 9 as the A curve.

d. Step Response

$$\begin{aligned} \text{Htr}(p) &= 7.396 \frac{p^2 / 9.862p / 33.65}{p^5 / 9.862p^4 / 48.62p^3 / 147.6p^2 / 274.1p / 248.9} \\ &= 7.396 \frac{(p / 4.931 - 3.055j)(p / 4.931 + 3.055j)}{(p / 2.963)(p / 2.443 - 1.7j)(p / 2.443 + 1.7j)(p / 1.007 - 2.91j)} \\ &\quad (p / 1.007 + 2.91j) \end{aligned}$$

$$A(p) = \frac{\text{Htr}(p)}{p}$$

$$\begin{aligned} &= \frac{K_0}{p} / \frac{K_1}{p / 1.007 - 2.91j} / \frac{K_1^*}{p / 1.007 + 2.91j} / \frac{K_2}{p / 2.443 - 1.7j} \\ &\quad / \frac{K_2^*}{p / 2.443 + 1.7j} / \frac{K_3}{p / 2.963} \end{aligned}$$

$$K_0 = 1$$

$$K_2 = -.3261 / .6071j$$

$$K_1 = .2503 / .2643j$$

$$K_3 = -.8483$$

The inverse transform is obtained by using:

$$\mathcal{L}^{-1} \left[\frac{K}{p / \alpha - j\beta} / \frac{K^*}{p / \alpha + j\beta} \right] = \begin{aligned} &2\text{Re}(K)\exp(-\alpha t)\cos \beta t \\ &- 2\text{Im}(K)\exp(-\alpha t)\sin \beta t \end{aligned}$$

$$\begin{aligned} a(\tau) &= 1 - .8483\exp(-2.963\tau) / .5005\exp(-1.007\tau)\cos 2.910\tau \\ &\quad - .5287\exp(-1.007\tau)\sin 2.910\tau - .6523\exp(-2.443\tau)\cos 1.7\tau \\ &\quad - 1.214\exp(-2.443\tau)\sin 1.7\tau \end{aligned}$$

The above equation is shown in figure 7 as the A curve.

IV. LINEAR PHASE RESPONSE (MAXIMALLY FLAT TIME DELAY)

a. Selection of Parameters

The parameters for this criterion are derived by forcing the phase to be linear over as large a range of frequencies as possible. If the phase is initially set equal to some constant times frequency it will possess a Maclaurin series. The corresponding coefficients of this series can be set equal to the phase function of the network. If this procedure is followed in sequence until all degrees of freedom are exhausted it will provide a system of equations that can be solved for the desired parameters as follows:

$$-\theta = \tan^{-1} f(\phi)$$

$$\tan(-\theta) = f(\phi)$$

Let $-\theta = \gamma\phi$, then:

$$\tan \gamma\phi = \gamma\phi + \frac{\gamma^3\phi^3}{3} + \frac{2\gamma^5\phi^5}{15} + \frac{17\gamma^7\phi^7}{315} + \frac{62\gamma^9\phi^9}{2835} + \dots$$

If $f(\phi) = \gamma\phi + \gamma_3\phi^3 + \gamma_5\phi^5 + \gamma_7\phi^7 + \gamma_9\phi^9 + \dots$ the criterion is satisfied for four network parameters, since γ is an added variable, when:

$$\gamma = \gamma_1$$

$$\frac{\gamma^3}{3} = \gamma_3$$

$$\frac{2\gamma^5}{15} = \gamma_5$$

$$\frac{17\gamma^7}{315} = \gamma_7$$

$$\frac{62\gamma^9}{2835} = \gamma_9$$

For the network considered:

$$-\theta = \tan^{-1} \frac{\phi(1/d-c)/\phi^3(ac/c^2-2cd-cd^2-ab-ad)/\phi^5(2abod/acd^2/c^2d^2-abc^2)-\phi^7abc^2d^2}{1-a\phi^2}$$

$$1 - a\phi^2$$

$f(\delta)$ can be divided out to give the following ascending power series:

$$f(\delta) = (1/d-c)\delta / (a/c^2 - 2cd - cd^2 - ab)\delta^3 / (a^2/ac^2 - 2acd - a^2b/2abcd \\ /c^2d^2 - abc^2)\delta^5 / (a^3/a^2c^2 - 2a^2cd - a^3b/2a^2bcd/ac^2d^2 - a^2bc^2 \\ - abc^2d^2)\delta^7 / a(a^3/a^2c^2 - 2a^2cd - a^3b/2a^2bcd/ac^2d^2 - a^2bc^2 \\ - abc^2d^2)\delta^9 / \dots$$

The system of equations to be solved is therefore:

$$\delta = 1/d - c$$

$$\frac{\delta^3}{3} = a/c^2 - 2cd - cd^2 - ab$$

$$\frac{2\delta^5}{15} = a^2/ac^2 - 2acd - a^2b/2abcd/c^2d^2 - abc^2$$

$$\frac{17\delta^7}{315} = a^3/a^2c^2 - 2a^2cd - a^3b/2a^2bcd/ac^2d^2 - a^2bc^2 - abc^2d^2$$

$$\frac{62\delta^9}{2835} = a^4/a^3c^2 - 2a^3cd - a^4b/2a^3bcd/a^2c^2d^2 - a^3bc^2 - a^2bc^2d^2$$

The above system solved by the Newton-Raphson method on an IEM 650 computer yielded:

$$\begin{aligned} a &= .2987 & d &= .07581 \\ b &= .3406 & \delta &= .8565 \\ c &= .2193 \end{aligned}$$

Solving for the network values gives the following which are also indicated in figure 6 in terms of the denormalizing quantities:

$$\begin{aligned} q &= .6594 & k_2 &= .2193 \\ k_1 &= .4530 & q_1 &= .07581 \\ 1-q &= .3406 \end{aligned}$$

b. Normalized Time Delay

$$-\theta = \frac{\tan^{-1} \frac{.8565\phi - .04530\phi^3 - .0008572\phi^5 - 28.12 \times 10^{-6}\phi^7}{1 - .2987\phi^2}}{}$$

$$D = \frac{-\theta}{.8565\phi}$$

The above equation is shown on figure 9 as the D curve.

c. Step Response

$$\begin{aligned} \text{Htr}(p) &= 9.830 \frac{p^2 / 13.19p / 60.15}{p^5 / 13.19p^4 / 83.37p^3 / 306.3p^2 / 636.0p / 591.2} \\ &= 9.830 \frac{(p / 6.595 / 4.080j)(p / 6.595 - 4.080j)}{(p / 3.418)(p / 2.870 - 1.601j)(p / 2.870 / 1.601j)(p / 2.016 / 3.457j)(p / 2.016 - 3.457j)} \end{aligned}$$

$$A(p) = \frac{\text{Htr}(p)}{p}$$

$$\begin{aligned} &= \frac{K_0}{p} \frac{K_1}{p / 2.870 - 1.601j} \frac{K_1^*}{p / 2.870 / 1.601j} \frac{K_2}{p / 2.016 - 3.457j} \\ &\quad \frac{K_2^*}{p / 2.016 / 3.457j} \frac{K_3}{p / 3.418} \end{aligned}$$

$$K_0 = 1$$

$$K_2 = .3612 - .08289j$$

$$K_1 = .1039 / 1.598j$$

$$K_3 = -1.930$$

The inverse transform yields the following:

$$\begin{aligned} a(\tau) &= 1 - 1.930 \exp(-3.418\tau) / .2078 \exp(-2.870\tau) \cos 1.601\tau \\ &\quad - 3.196 \exp(-2.870\tau) \sin 1.601\tau / .7224 \exp(-2.016\tau) \cos 3.457\tau \\ &\quad / .1658 \exp(-2.016\tau) \sin 3.457\tau \end{aligned}$$

The above equation is shown on figure 7 where it is the curve labeled D.

d. Amplitude Response

$$\begin{aligned} \text{Htr}(j\phi) &= \frac{1 / j\phi .2193 - \phi^2 .01663}{j\phi^5 .001691 / \phi^4 .02231 - j\phi^3 .1410 - \phi^2 .5180 / j\phi 1.076 / 1} \end{aligned}$$

$$|Htr|^2 = \frac{1/.01484\phi^2 / .0002764\phi^4}{1/.1214\phi^2 / .009553\phi^4 / .0004080\phi^6 / .00002079\phi^8 / 2.861 \times 10^{-6}\phi^{10}}$$

The $|Htr|$ is shown on figure 8 as the D curve.

V. RC REFERENCE

The RC reference is obtained by removing all peaking elements. This forces L_1 , L_2 , and C_1 of figure 1 to zero.

a. Step Response

$$H_{tr}(p) = \frac{1}{1/\cancel{p}}$$

$$A(p) = \frac{1}{p} \frac{1}{1/\cancel{p}} = \frac{K_1}{p} \cancel{\frac{K_2}{1/\cancel{p}}}$$

$$K_1 = 1 \quad K_2 = -1$$

$$a(\gamma) = 1 - \exp(-\gamma)$$

b. Amplitude Response

$$|H_{tr}|^2 = \frac{1}{1/\cancel{\phi^2}}$$

c. Normalized Time Delay

$$D = \frac{\tan^{-1} \phi}{\phi}$$

$a(\gamma)$, $|H_{tr}|$, and D are shown as the U curve on figures 7, 8, and 9, respectively.

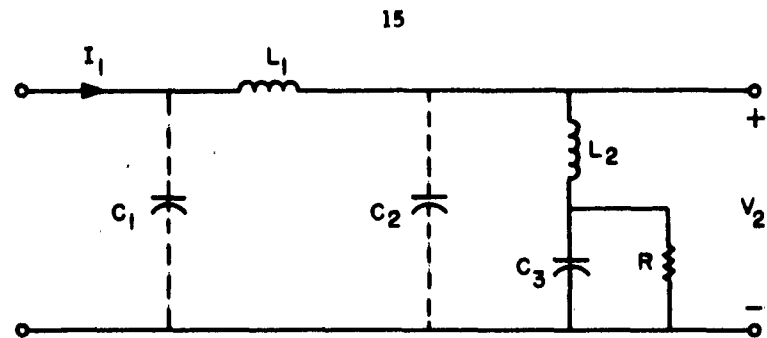


FIG. 1. 5 REACTANCE 3 TERMINAL PEAKING CIRCUIT

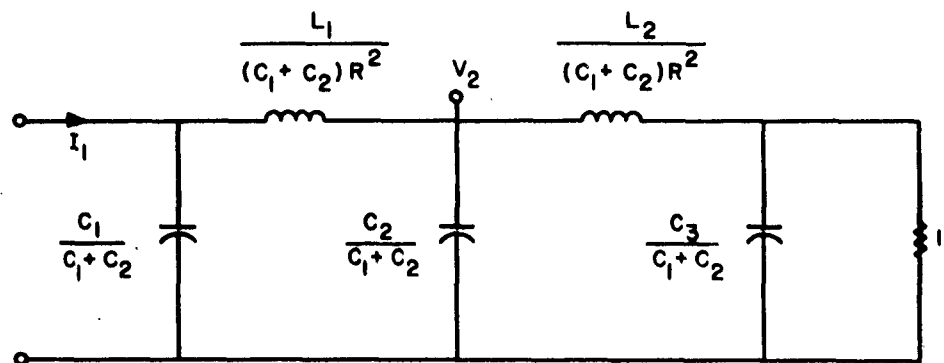


FIG. 2. RESULT OF NORMALIZATION

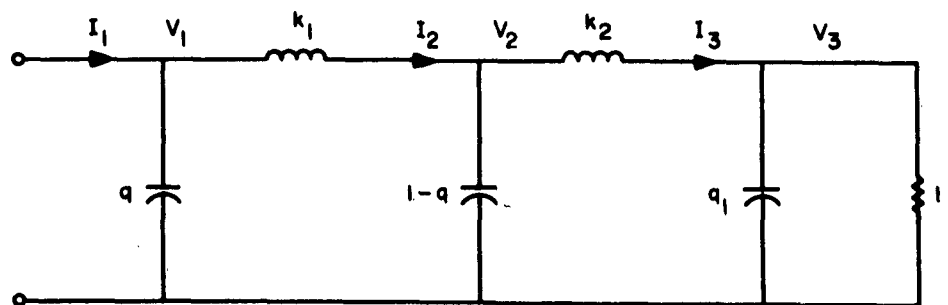


FIG. 3. NORMALIZED NETWORK

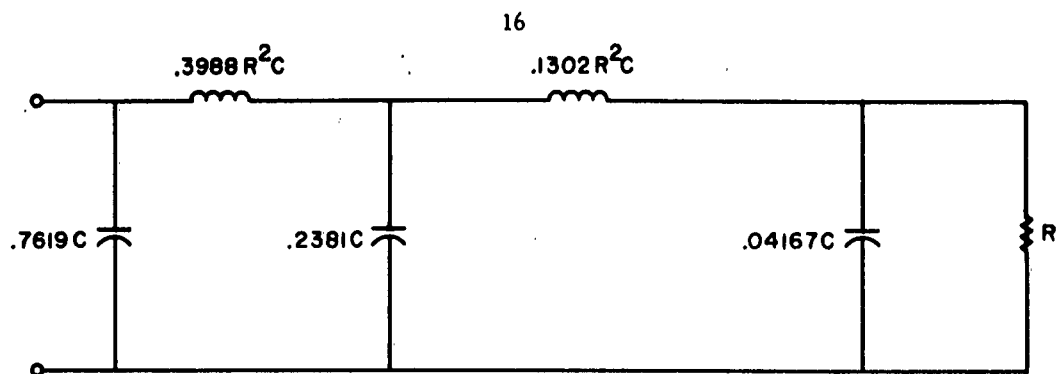


FIG. 4. CRITICALLY DAMPED NETWORK

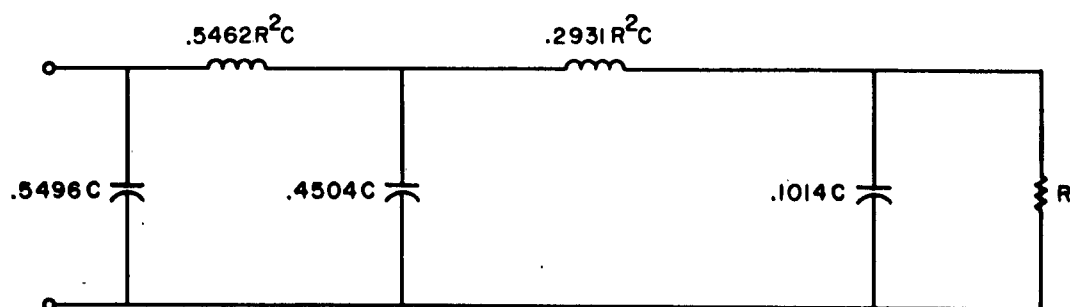


FIG. 5. MAXIMALLY FLAT AMPLITUDE NETWORK

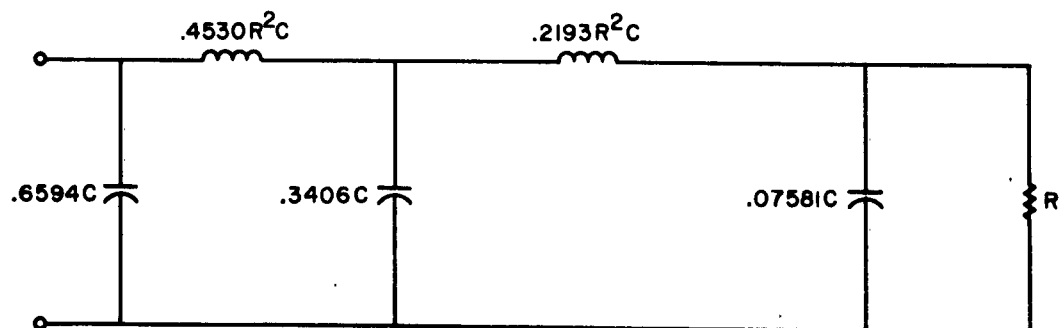


FIG. 6. MAXIMALLY FLAT TIME DELAY NETWORK

FIG. 7 STEP RESPONSE

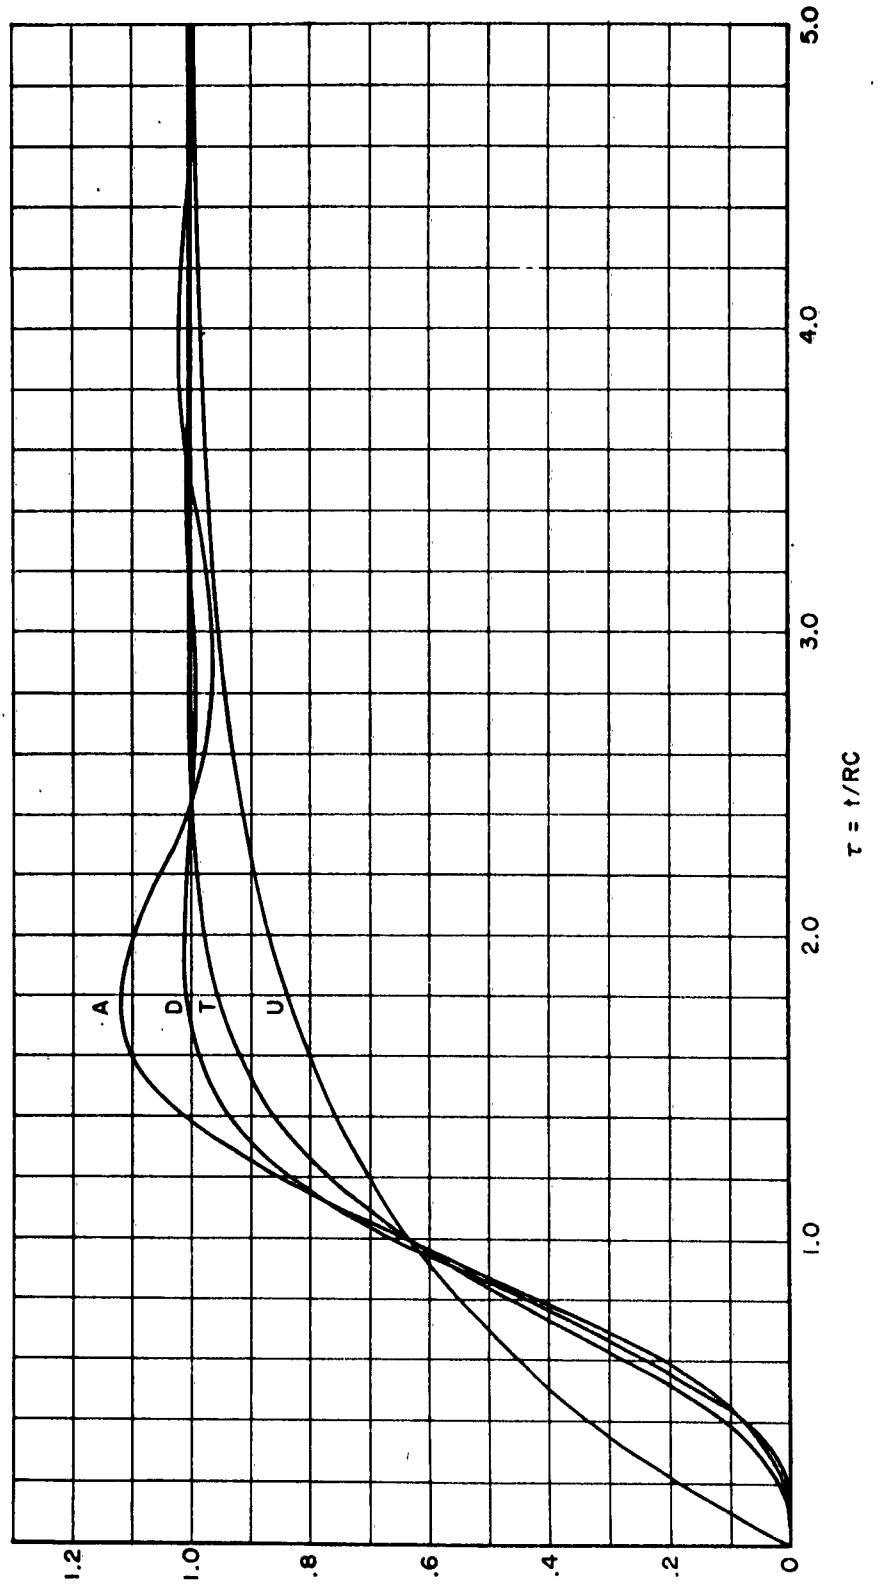


FIG. 8. AMPLITUDE RESPONSE

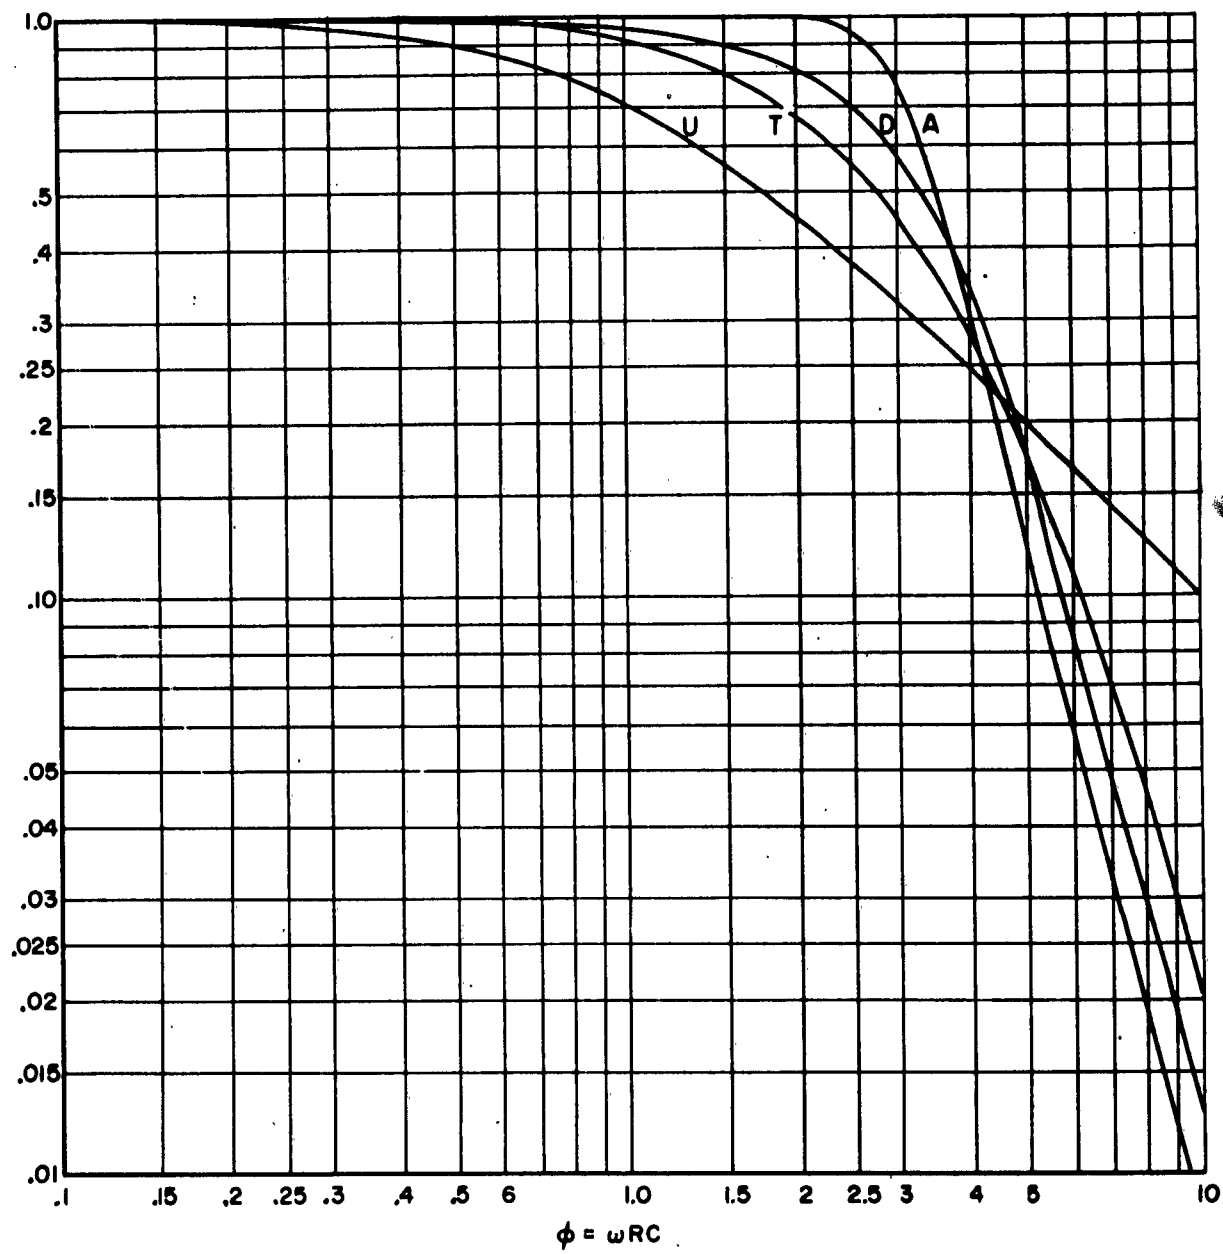


FIG. 9. NORMALIZED TIME DELAY


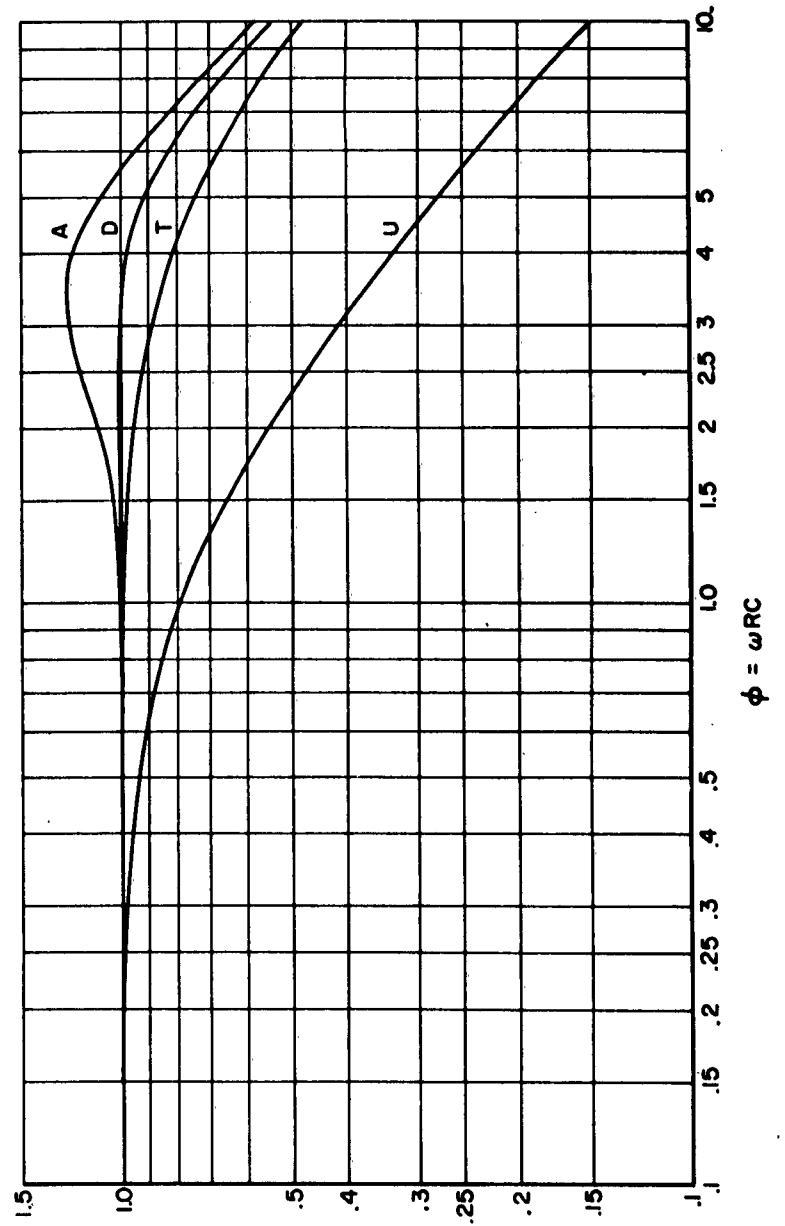


FIG. 10. POLE-ZERO PLOTS

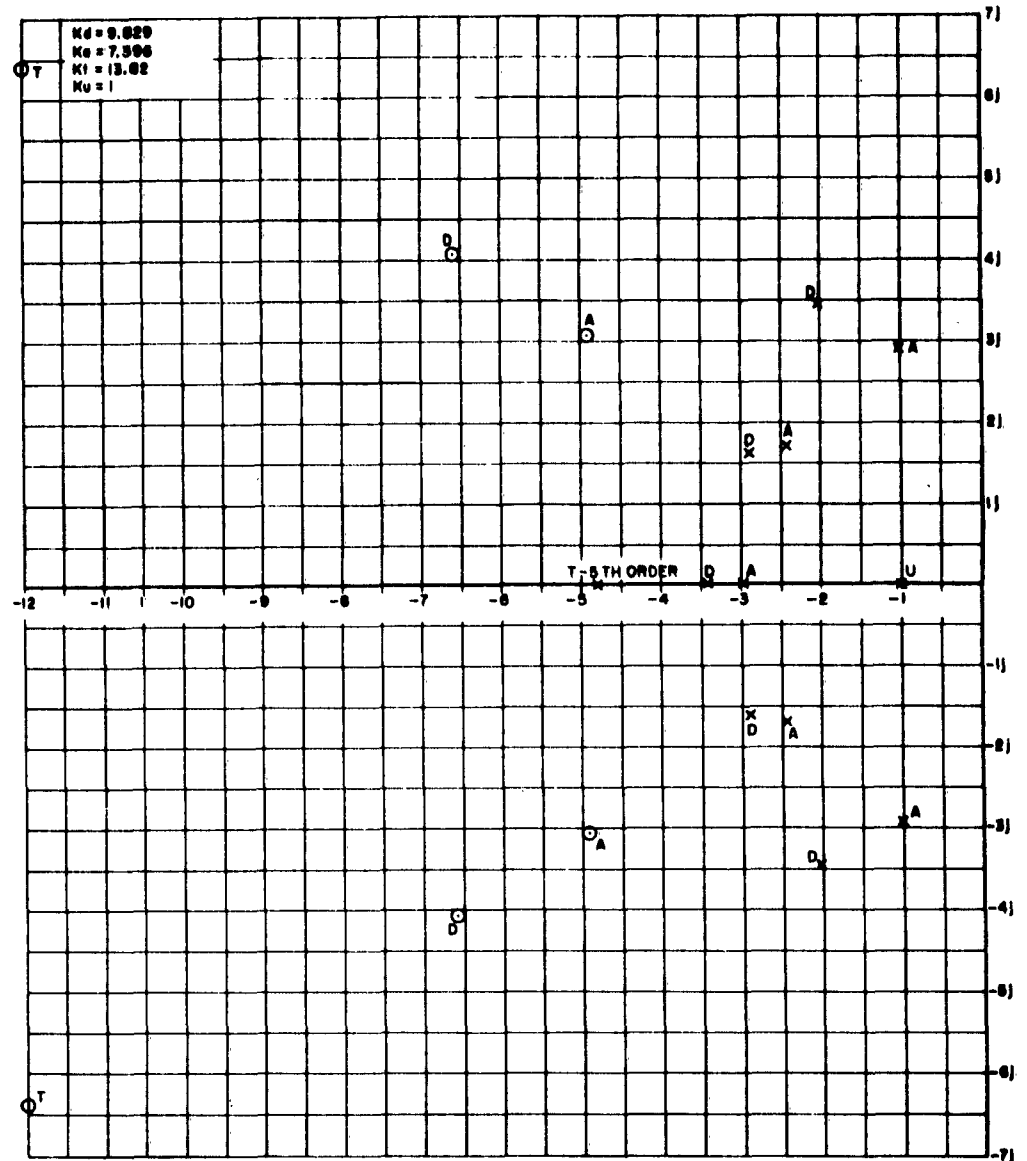

VII. TABULATIONS (2), (3), (4), and (5)

a. Step Response

T	T curve	A curve	D curve	U curve
.1	.0026	.001267	.001651	.0952
.2	.01692			.1813
.3	.05186	.03115	.04000	.2592
.4	.1089			.3297
.5	.1847	.1289	.1572	.3935
.6	.2734			.4512
.7	.3681	.3011	.3443	.5034
.8	.4627			.5507
.9	.5523	.5216		.5934
1.0	.6337	.6364	.6570	.6321
1.1	.7053			.6671
1.2	.7663	.8475	.8321	.6988
1.3	.8172			.7275
1.4	.8588	1.005	.9322	.7534
1.5	.8921			.7768
1.6	.9184	1.094	.9888	.7981
1.8	.9541	1.118		.8347
2.0	.9754	1.096	1.010	.8647
2.2		1.052	1.005	.8892
2.5	.9957	.9889	.9988	.9179
2.7		.9664		.9328
3.0		.9652	.9991	.9502
3.5		1.000	1.001	.9698
4.0		1.013	1.000	.9817
4.3		1.007		.9864
4.6		.9995		.9899
5.0		.9955		.9933

b. Amplitude Response

ϕ	T curve	A curve	D curve	U curve
.2	.9958	1.000	.9979	.9755
.5	.9742	1.000	.9867	.8907
.8	.9356	1.000	.9657	.7809
1.0	.9020	.9999	.9472	.7071
1.5	.7977	.9995	.8832	.5547
2.0	.6785	.9927	.8094	.4472
2.5	.5595	.9413	.6942	.3713
2.7		.8879		.3473
3.0	.4509	.7605	.5773	.3277
3.2		.6545		.2983
3.5		.4962		.2747
4.0	.2813	.2978	.3383	.2425
5.0	.1724	.1176	.1716	.1961
8.0	.04432	.01907	.02921	.1240
10.0	.02094	.008789	.01296	.09950

c. Normalized Time Delay

ϕ	T curve	A curve	D curve	U curve
.5	.9962	1.005	1.000	.9273
1.0	.9840	1.016	1.000	.7853
1.5	.9649	1.040	1.000	.6552
2.0	.9401	1.082	1.000	.5536
2.5		1.152	1.000	.4761
3.0	.8789	1.232	1.000	.4164
4.0		1.224	.9788	.3314
5.0	.7423	1.079	.9131	.2747
7.0	.6200	.8158	.7390	.2041
10.0	.4828	.5805	.5419	.1471

VIII. CONCLUSIONS

From a close scrutiny of the plots many conclusions can be derived. Most analytic figures of merit however are more difficult to evaluate. In most cases they can be obtained by only a cut and try procedure. Therefore, unless a more accurate solution was desired or easily evaluated, the following numerical values will be obtained by graphical interpretation.

Two common figures of merit for a step response are rise time which is the time required to go from the ten percent to the ninety percent point and the amount of overshoot. These quantities are tabulated below:

	A	D	T	U
Rise Time	.81	.87	1.14	2.2
% Overshoot	12	1	0	0

If a slight overshoot can be tolerated, case D(the linear phase criterion) actually will give the best step response.

The three db. or half-power frequency for the various networks are tabulated below:

	A	D	T	U
ϕ	3.103(calculated)	2.45	1.86	1

The maximally flat amplitude network will allow an increase in the gain-bandwidth product of the network by a factor of 3.103. Actually in an amplifier composed of several peaked stages the bandwidth increase over the simple RC coupled case will be even greater than 3.103 since the A curve is quite flat before breaking off sharply at approximately the half-power frequency. The figure of 3.103 compares quite

favorably with the infinite peaking circuit (6) which has a three db. point at $\phi = 4.02$, and is a 14.5% improvement over a four reactance three terminal network (7) which has a three db. point at $\phi = 2.71$.

A figure of merit for the normalized time delay is the $\pi/4$ point which in the uncompensated network corresponds to the 45 degrees phase point. This point is tabulated below:

	A	D	T	U
ϕ	7.3	6.453	4.4	1
		(calculated)		

This point does not portray the entire picture since the A curve has considerable overshoot. The $\pi/4$ points for the infinite and four reactance maximally flat time delay networks occur at $\phi = 7.4$ and $\phi = 5.5$, respectively.

The pole-zero plots tend to tie together the three previous plots. It is seen that the poles of the A case are closest to the j axis thereby giving the best frequency response yet the poorest step response. The T case is just the opposite while the D case is a good compromise.

IX. BIBLIOGRAPHY

- (1) Van Valkenburg, M. E., Modern Network Synthesis, John Wiley & Sons, Inc., 1960
- (2) Arc tan X. Table of , Applied Mathematics Series, National Bureau of Standards, February, 1953
- (3) Exponential Function e^x . Table of the , Applied Mathematics Series, National Bureau of Standards, January, 1961
- (4) Sines and Cosines for Radian Arguments. Tables of , Applied Mathematics Series, National Bureau of Standards, January, 1955
- (5) Barlow, Peter, Barlows Tables etc. , Chemical Publishing Co. 1957
- (6) Deutsch, Sid, Class Notes Course 4530 , Polytechnic Institute of Brooklyn, Spring 1962
- (7) Fleming, J. E., Report for the Degree of Master of Electrical Engineering , Polytechnic Institute of Brooklyn, June 1960

TECHNICAL AND FINAL REPORT DISTRIBUTION LIST
PHYSICAL SCIENCES DIRECTORATE

Commander AF Office of Scientific Research ATTN: SRY Washington 25, D. C.	3	Chief of Research and Development 1 ATTN: Scientific Information Branch Department of the Army Washington 25, D. C.	
Commander AF Office of Scientific Research ATTN: SRGL Washington 25, D. C.	2	Chief, Physics Branch 1 Division of Research U. S. Atomic Energy Commission Washington 25, D. C.	
Commander Wright Air Development Division ATTN: WWAD Wright-Patterson Air Force Base Ohio	4	U. S. Atomic Energy Commission 1 Technical Information Extension P. O. Box 62 Oak Ridge, Tennessee	
Commander AF Cambridge Research Laboratories ATTN: CRRELA L. G. Hanscom Field Bedford, Massachusetts	1	National Bureau of Standards Library 1 Room 203, Northwest Building Washington 25, D. C.	
Commander European Office Office of Aerospace Research The Shell Building Brussels, Belgium	2	Physics Program 1 National Science Foundation Washington 25, D. C.	
P. O. Box AA Wright-Patterson Air Force Base Ohio	1	Director, Office of Ordnance Research Box CM, Duke Station 1 Durham, North Carolina	
Aeronautical Research Laboratories 1 ATTN: Technical Library Building 450 Wright-Patterson Air Force Base Ohio	10	Director, Department of Commerce 1 Office of Technical Services Washington 25, D. C.	
Armed Services Technical Info. Agency ATTN: TIPCR Arlington Hall Station Arlington 12, Virginia	1	AEDC (AEOIM) 1 Arnold Air Force Station Tullahoma, Tennessee	
Director of Research and Development Headquarters, USAF ATTN: AFDRD Washington 25, D. C.	1	Commander 1 AF Flight Test Center ATTN: FTOTL Edwards Air Force Base, California	
Office of Naval Research Department of the Navy ATTN: Code 420 Washington 25, D. C.	1	Commander 1 AF Special Weapons Center ATTN: SWOI Kirtland Air Force Base, New Mexico	
Director, Naval Research Laboratory ATTN: Technical Info. Officer 1 Washington 25, D. C.	1	Commander 1 AF Missile Development Center ATTN: HDOI Holloman Air Force Base New Mexico	
		Commander 1 Army Rocket and Guided Missile Agency ATTN: ORDXR-OTL Redstone Arsenal, Alabama	

Commandant Air Force Institute of Technology AU Library MCLI-LIB, Bldg. 125, Area B Wright-Patterson Air Force Base Ohio	1
Commander Air Force Systems Command ATTN: RDRS Andrews Air Force Base Washington 25, D. C.	6
Commanding General U. S. Army Signal Corps Research and Development Laboratory ATTN: SIGFM/EL-RPO Ft. Monmouth, New Jersey	1
National Aeronautics and Space Administration ATTN: Library 1520 H Street, N. W. Washington 25, D. C.	6
Advanced Research Projects Agency Washington 25, D. C.	1
Rand Corporation 1700 Main Street Santa Monica, California	1
Chairman (Unclass. Reports) Canadian Joint Staff For DRB/DSIS 2450 Massachusetts Ave., N. W. Washington 25, D. C.	1