


N-63-4-3

CATALOGED BY DDC
AS AD No. 410562



410562



ELECTRICAL ENGINEERING RESEARCH LABORATORY
ENGINEERING EXPERIMENT STATION
UNIVERSITY OF ILLINOIS
URBANA, ILLINOIS

QUARTERLY PROGRESS REPORT

on

RESEARCH STUDIES ON PROBLEMS
RELATED TO ANTENNAS

Quarterly Report No. 3

Contract No. AF33(657)-10474
Hitch Element Number 62405484
760 D-Project 6278, Task 6278-01

Aeronautical Systems Division

Wright-Patterson AFB, Ohio

Project Engineer - James Rippin - ASRNC-3

25 June 1963


Report for the Period:


1 March 1963

to

31 May 1963

Approved by:


G. A. Deschamps
Professor


Paul E. Mayes
Associate Professor

Electrical Engineering Research Laboratory
Engineering Experiment Station
University of Illinois
Urbana, Illinois

CONTENTS

	Page
1. Radiation From Periodic Structures	1
1.1 Purpose	1
1.2 Factual Data	1
1.2.1 Research Staff	1
1.2.2 Status	1
1.3 Plans for the Next Interval	1
2. Log-Periodic Cavity-Backed Slot Antennas	2
2.1 Purpose	2
2.2 Factual Data	2
2.2.1 Research Staff	2
2.2.2 Status	2
2.3 Plans for the Next Interval	5
3. Log-Periodic Magnetic Current Antenna	8
3.1 Purpose	8
3.2 Factual Data	8
3.2.1 Research Staff	8
3.2.2 Status	8
3.3 Plans for the Next Interval	8
4. Log-Periodic Zigzag Antennas	14
4.1 Purpose	14
4.2 Factual Data	14
4.2.1 Research Staff	14
4.2.2 Status	14
4.3 Plans for the Next Interval	14
5. Log-Spiral Antennas	23
5.1 Purpose	23
5.2 Factual Data	23
5.2.1 Research Staff	23
5.2.2 Status	23
5.3 Plans for the Next Interval	26

CONTENTS (cont'd)		Page
6.	An Integrated Antenna Amplifier	28
6.1	Purpose	28
6.2	Factual Data	28
6.2.1	Research Staff	28
6.2.2	Status	28
6.3	Plans for the Next Interval	28
7.	Wave Propagation on Helices	29
7.1	Purpose	29
7.2	Factual Data	29
7.2.1	Research Staff	29
7.2.2	Status	29
7.3	Plans for the Next Interval	29
8.	Investigation of a Class of Periodic Structures	38
8.1	Purpose	38
8.2	Factual Data	38
8.2.1	Research Staff	38
8.2.2	Status	38
8.3	Plans for the Next Interval	43
9.	Transmission Between Antennas When the Far Field Approximation Does Not Apply	44
9.1	Purpose	44
9.2	Factual Data	44
9.2.1	Research Staff	44
9.2.2	Status	44
10.	Radiating Lens Illuminated From A Goubau Beam-Waveguide	45
10.1	Purpose	45
10.2	Factual Data	45
10.2.1	Research Staff	45
10.2.2	Status	45
10.3	Plans for the Next Interval	45

CONTENTS (cont'd)		Page
6.	An Integrated Antenna Amplifier	28
6.1	Purpose	28
6.2	Factual Data	28
6.2.1	Research Staff	28
6.2.2	Status	28
6.3	Plans for the Next Interval	28
7.	Wave Propagation on Helices	29
7.1	Purpose	29
7.2	Factual Data	29
7.2.1	Research Staff	29
7.2.2	Status	29
7.3	Plans for the Next Interval	29
8.	Investigation of a Class of Periodic Structures	38
8.1	Purpose	38
8.2	Factual Data	38
8.2.1	Research Staff	38
8.2.2	Status	38
8.3	Plans for the Next Interval	43
9.	Transmission Between Antennas When the Far Field Approximation Does Not Apply	44
9.1	Purpose	44
9.2	Factual Data	44
9.2.1	Research Staff	44
9.2.2	Status	44
10.	Radiating Lens Illuminated From A Goubau Beam-Waveguide	45
10.1	Purpose	45
10.2	Factual Data	45
10.2.1	Research Staff	45
10.2.2	Status	45
10.3	Plans for the Next Interval	45

CONTENTS (cont'd)

	Page
11. Zone Phase Plates	46
11.1 Purpose	46
11.2 Factual Data	46
11.2.1 Research Staff	46
11.2.2 Status	46
11.3 Plans for the Next Interval	47
12. Study of a Class of Grating Problems	48
12.1 Purpose	48
12.2 Factual Data	48
12.2.1 Research Staff	48
12.2.2 Status	48
12.3 Plans for the Next Interval	51
13. Focusing of Radiation From A Bunched Cerenkov Beam	52
13.1 Purpose	52
13.2 Factual Data	52
13.2.1 Research Staff	52
13.2.2 Status	52
13.3 Plans for the Next Interval	55
References	57

1. RADIATION FROM PERIODIC STRUCTURES

1.1 Purpose

The purpose of this investigation is to explain the observed properties of log-periodic antennas through experimental and analytical investigation of their uniform periodic counterparts.

1.2 Factual Data

1.2.1 Research Staff - P. G. Ingerson, P. E. Mayes

1.2.2 Status

Additional near field measurements have been made at frequencies in the "stopband" (complex wave region) on the uniform periodic dipole array. It is believed that some of the complex interference patterns which have been observed can be explained in terms of several waves existing simultaneously on the structure. Attempts are being made to correlate these waves with the several modes obtained in the calculations performed by Mittra and Jones*. Agreement between calculations and results measured previously in the passbands of the structure agree quite well. The "stopband" region is of considerable interest, however, since it is in this frequency range that backfire patterns are obtained.

1.3 Plans for the Next Interval

Determination of a more complete k - β diagram for the uniform periodic dipole array will be continued. Preparation of a technical report will be started.

*R. Mittra and K.E. Jones, "Theoretical Brillouin (k - β) Diagrams for Monopole and Dipole Arrays and Their Application to Log-Periodic Antennas", Tech. Report No. 70, Contract No. AF33(657)-10474, Antenna Laboratory, University of Illinois, Urbana, Illinois, April 1963.

2. LOG-PERIODIC CAVITY-BACKED SLOT ANTENNAS

2.1 Purpose

This work is being directed toward the development of a log-periodic array of cavity-backed slots which will produce vertically polarized radiation without having the structure projecting above the ground plane.

2.2 Factual Data

2.2.1 Research Staff - V. A. Mikenas and P. E. Mayes

2.2.2 Status

As noted in previous reports this project is being developed on the basis of achieving a dual of the successful dipole array. In this way it should be possible to find a successful flush-mounted cavity-backed slot array which would produce vertically polarized backfire radiation in a frequency-independent manner.

The cavity array, including the feed system, was constructed as shown in Figure 2.1. The characteristic impedance of the printed circuit feed of the individual loops was designed for 300 ohms. This rather high value was chosen with the idea of obtaining a better match to the high input impedance of the individual cavity. The transmission line feeding the various loops was also designed for 300 ohms to feed against the ground screen. The loops were transposed in each cavity so that the required 180° phase shift was obtained between adjacent cavities to produce successful backfire radiation. The printed circuit feed was extended above the ground screen a distance of 1 in. in order to produce the least amount of discontinuity in the feed system. The total length of the printed circuit feed was designed such that the frequency at which the input impedance was purely resistive corresponded approximately to the resonant frequency of the cavity. This is only an approximate solution since mutual coupling between adjacent cavities produce perturbations which cannot be taken into account exactly. Having decided upon a length for a particular loop feed and cavity, the other loops were scaled proportionately by the scale factor τ ($\tau = 0.85$). In this scaling, all dimensions were scaled so that the characteristic impedance of the loop feed remained constant and the loop diameters were properly scaled for each cavity. The loops were then inserted and connected in series as implied by duality of the log periodic dipole array.

Impedance measurements were made and the first results are shown on the Smith Chart in Figure 2.2. Impedance measurements were taken from 300-1900 Mc although the

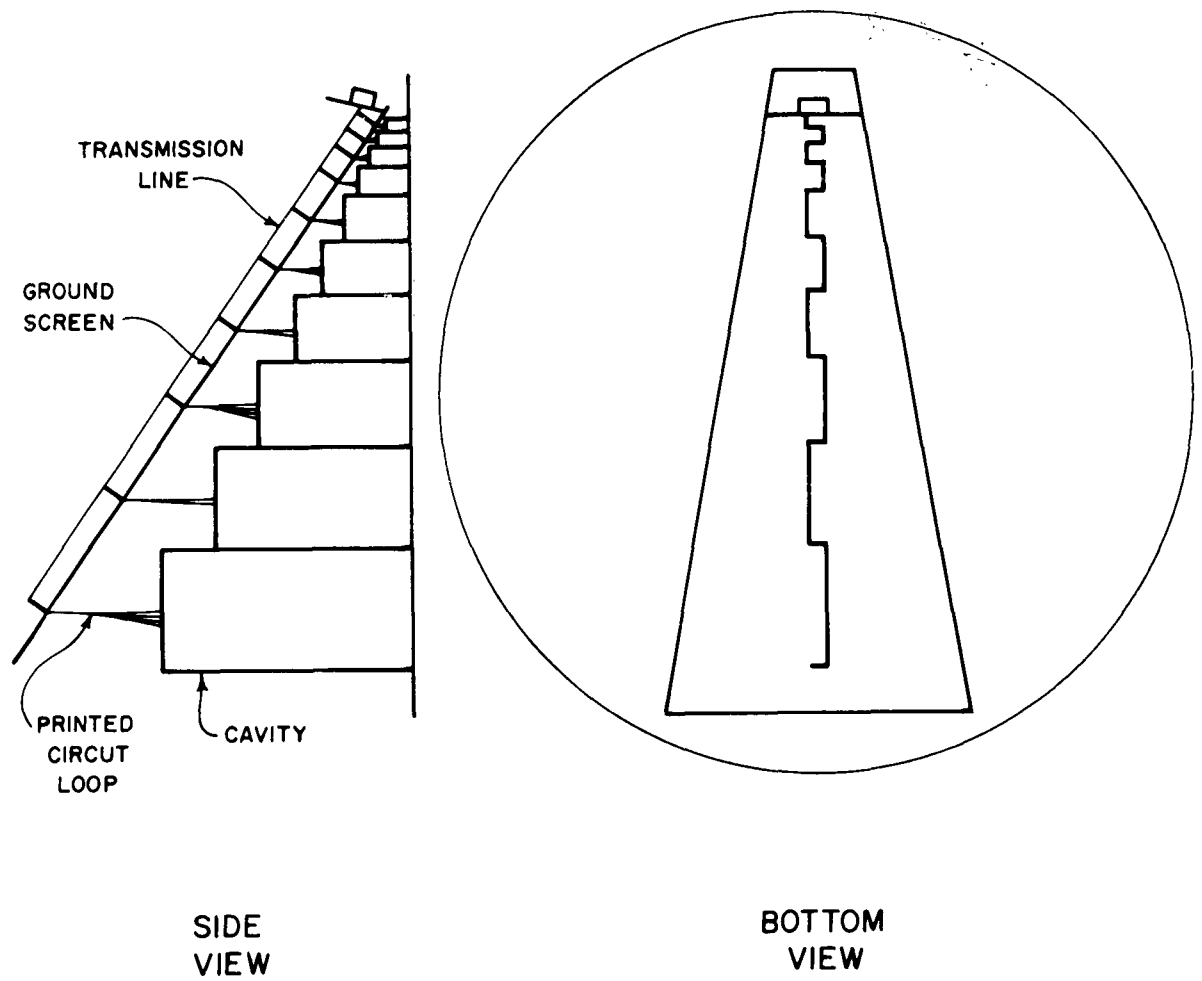


Figure 2.1. Cavity-Backed Slot Antenna with Feed System

expected operating range was approximately 450-1500 Mc. The impedance points are not widely scattered, but indicate a rather high average value. Far field patterns were also measured and it was found that in the frequency range 450-1700 Mc, all patterns were either backfire or bi-directional, but mostly backfire. A number of patterns for several frequencies is shown in Figure 2.3. All patterns were taken in the H-plane. In order to investigate further the cause of the bi-directional patterns of the array near field plots were made. Some of these results are noted in Figure 2.4 with the pattern at the same frequency. It is shown there that the bi-directional pattern is accompanied by large field at the end of the antenna, i.e. end effect. It was noted that some correlation was found between the active region and the resonant frequency of the cavities. It was found at most frequencies the active region was located at a point corresponding to the cavity which was at resonance at that particular frequency. This is not an exact result but is approximately true. A great many more careful measurements would have to be taken to obtain more precise conclusions. The near field plots were obtained with a loop probe located approximately 4 cm away from the top of the cavity array. At some frequencies, however, the field was not reduced to negligible values at the end of the antenna. At these frequencies the patterns were generally bi-directional.

Although these results are encouraging, it seems that better performance might be attained if it were, in some way, possible to couple more energy into the cavities. This might be accomplished in one of several ways. From the near field plots, we have an idea where the active region lies and, consequently, it may be possible to tune the cavity in such a manner that it may match more closely the cavity or cavities in the active region. Another possibility would be to decrease the characteristic impedance of the transmission line feeding the printed circuit loops.

2.3 Plans for the Next Interval

It will be attempted to couple more energy into the cavity array by using some techniques such as those mentioned above. Plans are being made to build another cavity array of slightly different parameters but still keeping a rather low value of τ to correspond to values used in the log-periodic dipole array. In addition, a uniform periodic cavity array may be constructed to obtain the Brillouin diagram for the structure.

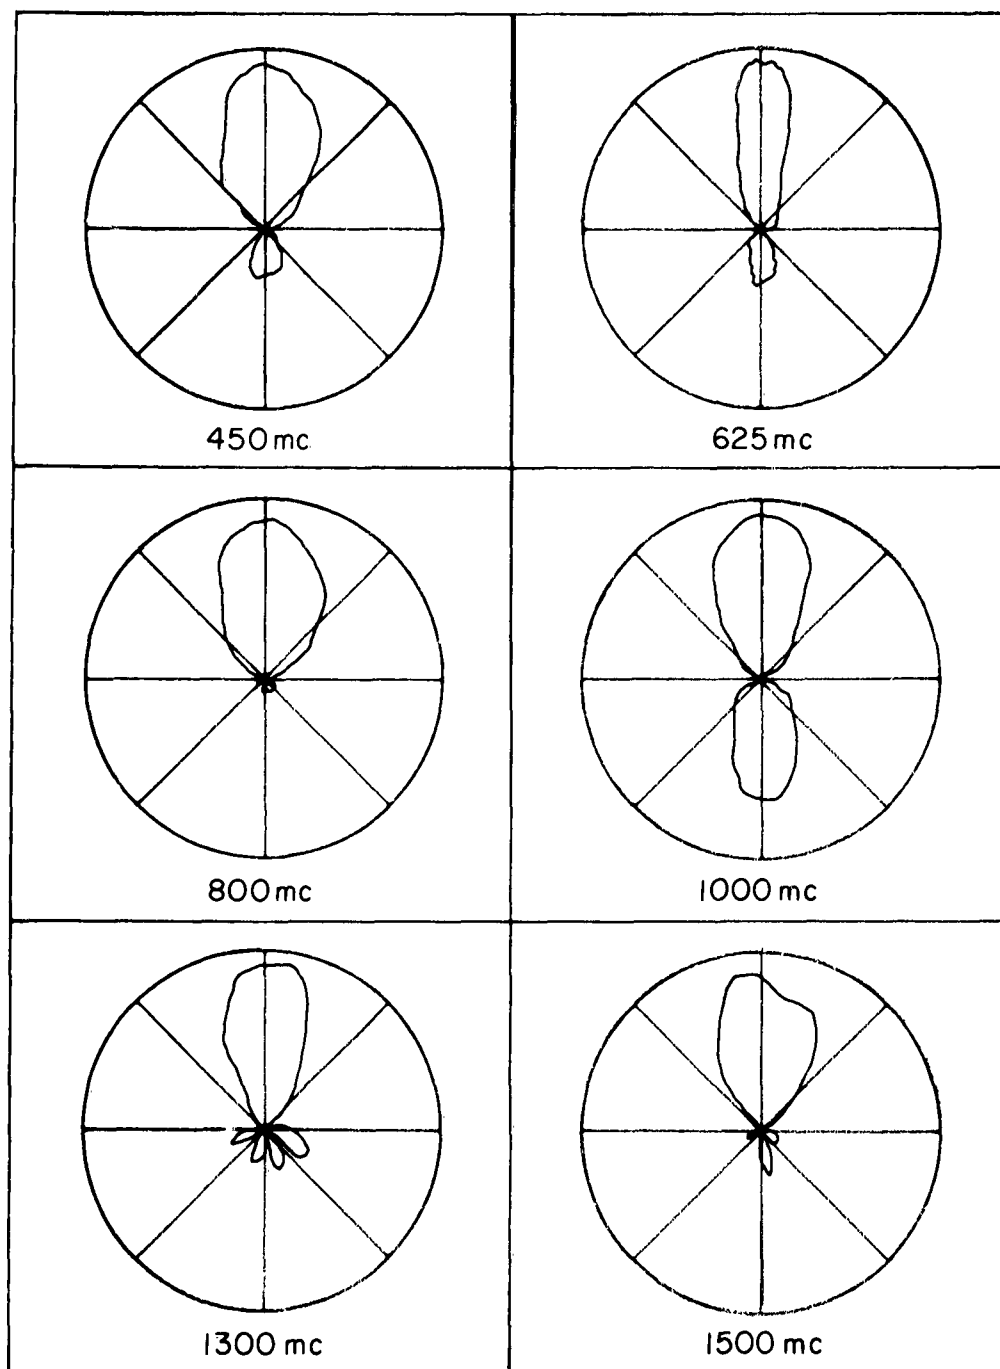


Figure 2.3. H-Plane Patterns of the Cavity-Backed Slot Antenna

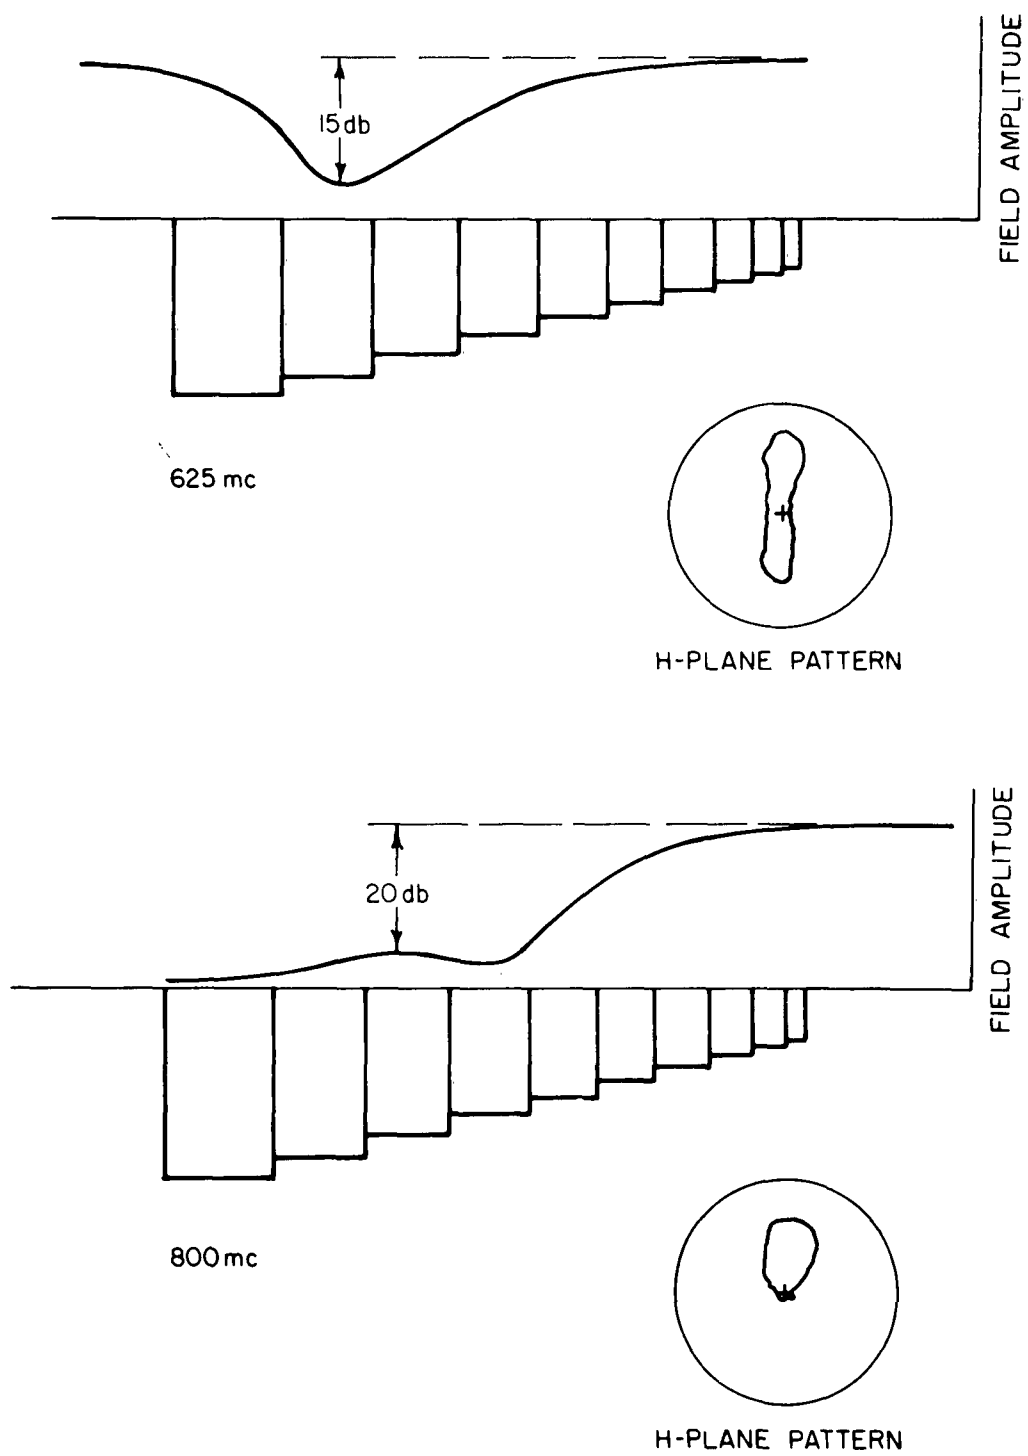


Figure 2.4. Near Field Plots for 625 Mc and 800 Mc

3. LOG-PERIODIC MAGNETIC CURRENT ANTENNA

3.1 Purpose

The purpose of this work is to investigate an LP array of magnetic dipole elements.

3.2 Factual Data

3.2.1 Research Staff - P. E. Mayes

3.2.2 Status

A new model (CMCA-1-3) of the conical slot antenna was constructed with 16 cells as compared with 9 cells in the antenna (CMCA-1-2) reported in the previous Quarterly Reports Nos. 1 and 2. Otherwise the parameters of the antenna remain unchanged ($\tau = 0.89$, $\theta_o = 15^\circ$). It was expected that CMCA-1-3 would have an extended pattern and impedance bandwidth compared with CMCA-1-2. The measured patterns of CMCA-1-3 did indeed retain a smooth unidirectional shape to higher frequencies than CMCA-1-2 as shown in Figure 3.1. (Patterns of CMCA-1-2 were published in Quarterly Report No. 1). However, there were several frequency bands between the low and high-frequency cutoffs where the patterns were distorted. The measured impedance of CMCA-1-3, normalized to 300 ohms, is shown on the Smith Chart in Figure 3.2. There is good correlation between the frequencies where the VSWR is low in Figure 3.2 and the frequencies of good patterns in Figure 3.1.

3.3 Plans for the Next Interval

Additional comparative tests will be made on CMCA-1-2 and CMCA-1-3 in an attempt to determine what has caused the deterioration in performance when going to extended length. A different feed system will be tried first of all, since the construction of the two antennas is almost identical in all other respects.

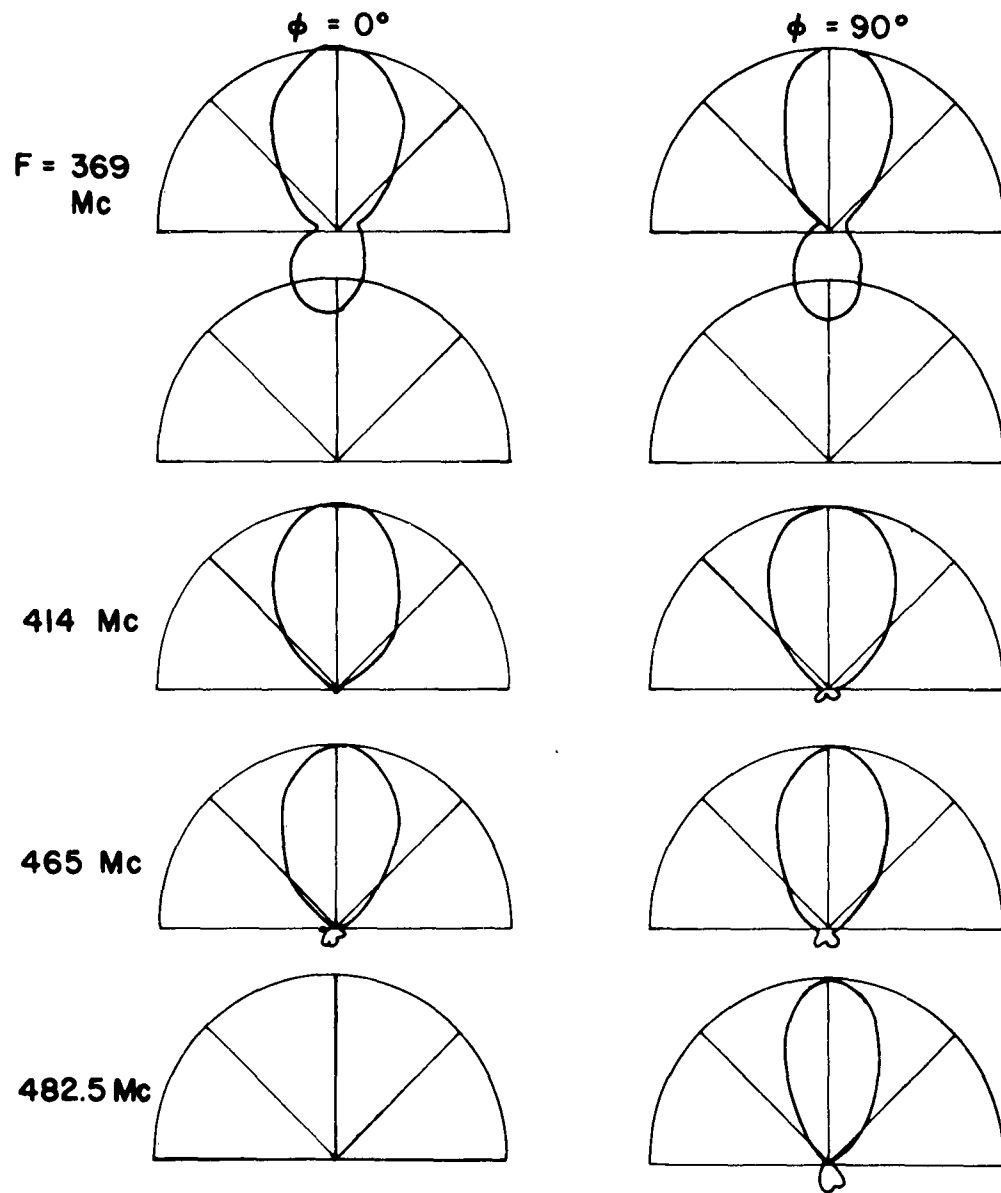


Figure 3.1a. Radiation patterns of the log-periodic conical slot array, CMCA-1-3.

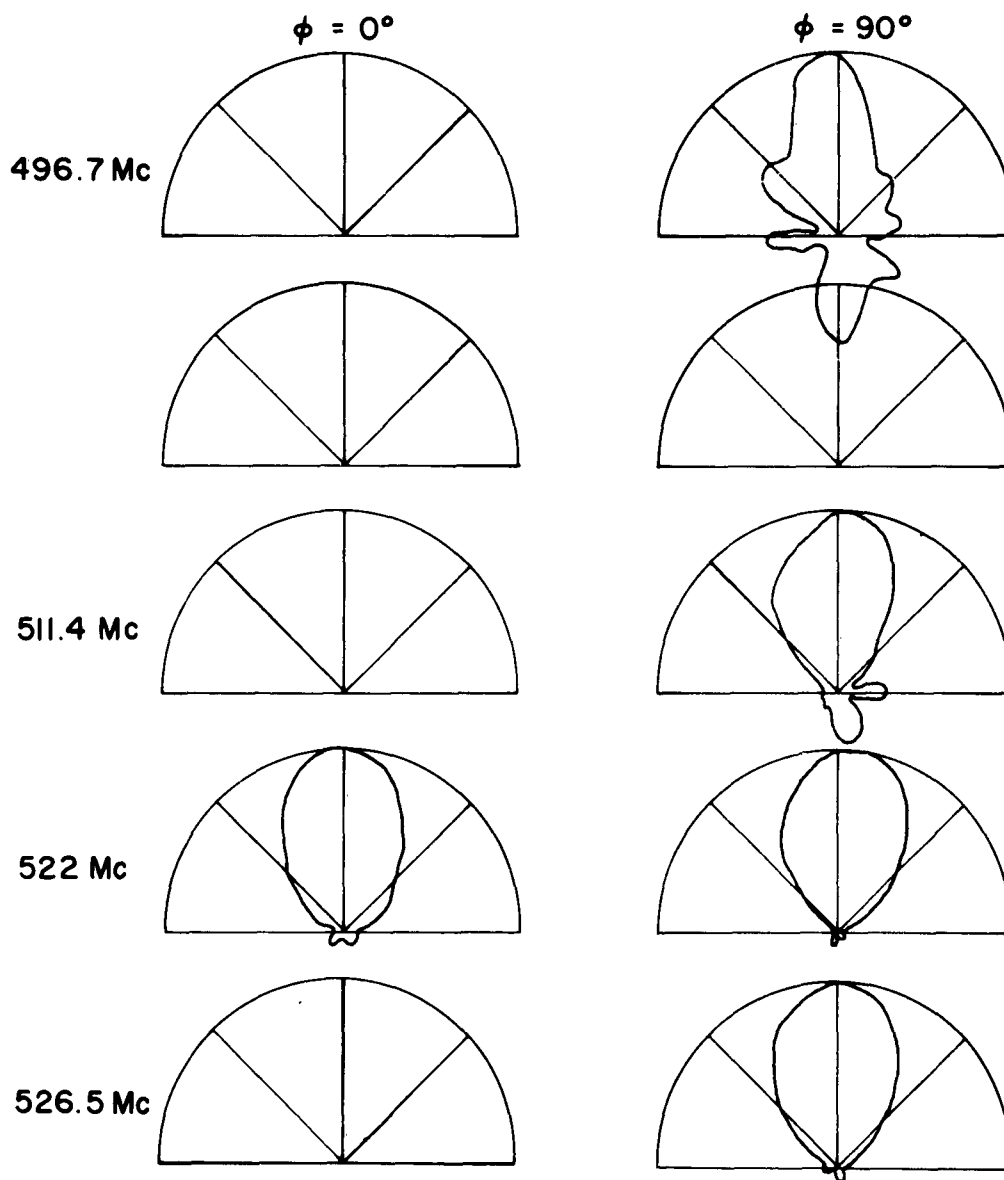


Figure 3.1b. Radiation patterns of the log-periodic conical slot array, CMCA-1-3.

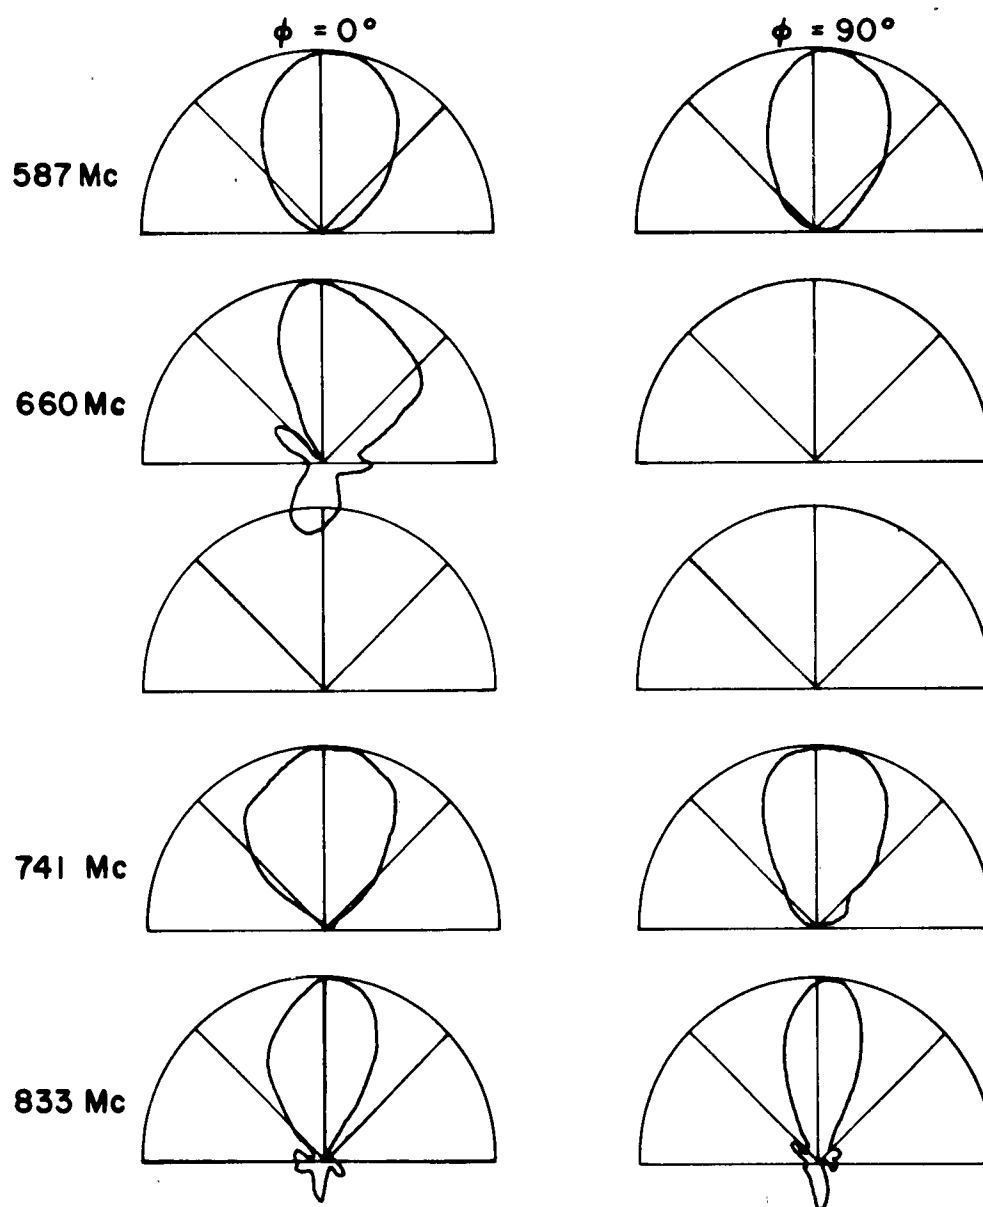


Figure 3.1c. Radiation patterns of the log-periodic conical slot array, CMCA-1-3.


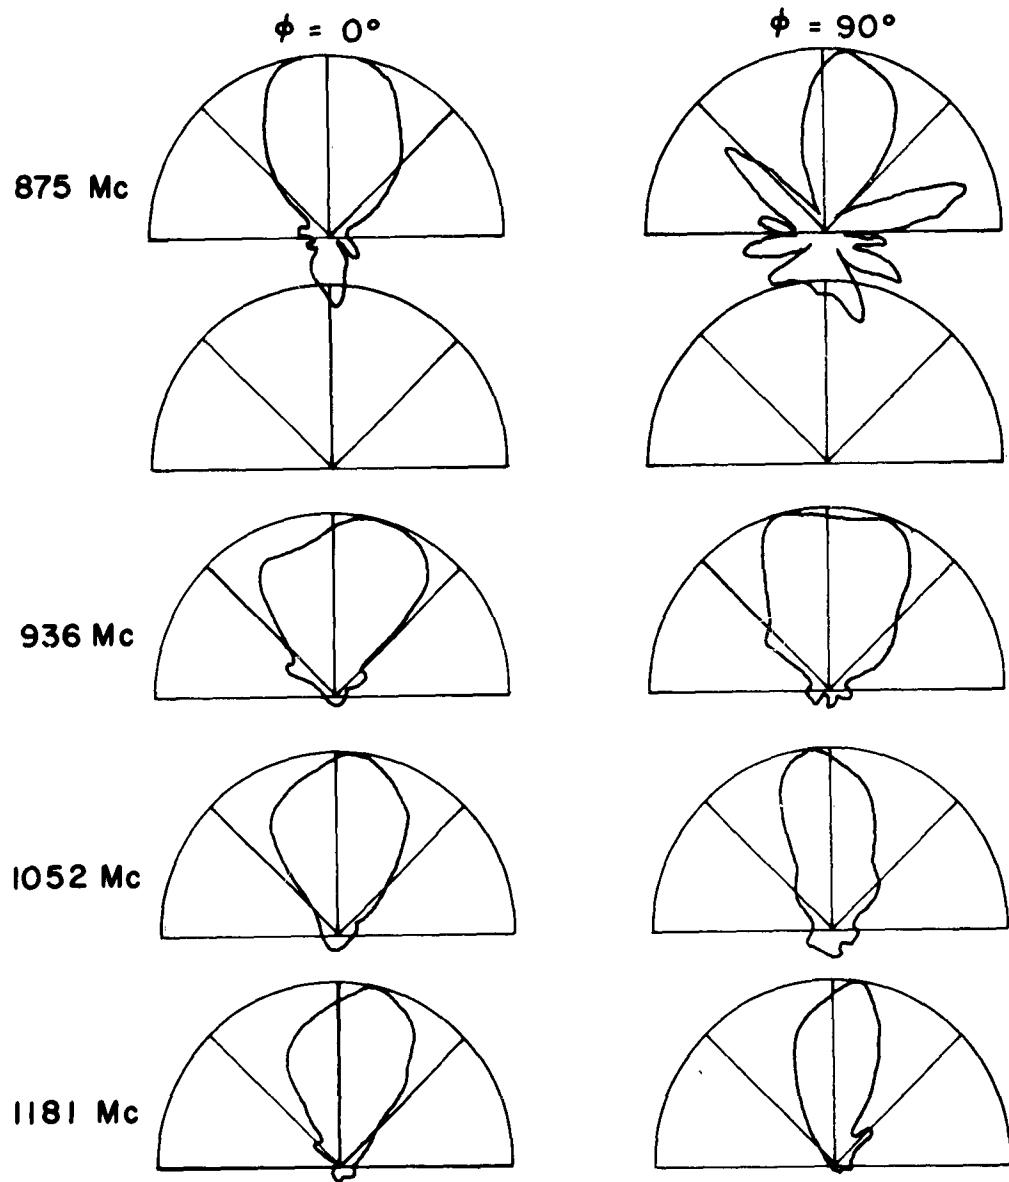


Figure 3.1d. Radiation patterns of the log-periodic conical slot array, CMCA-1-3.

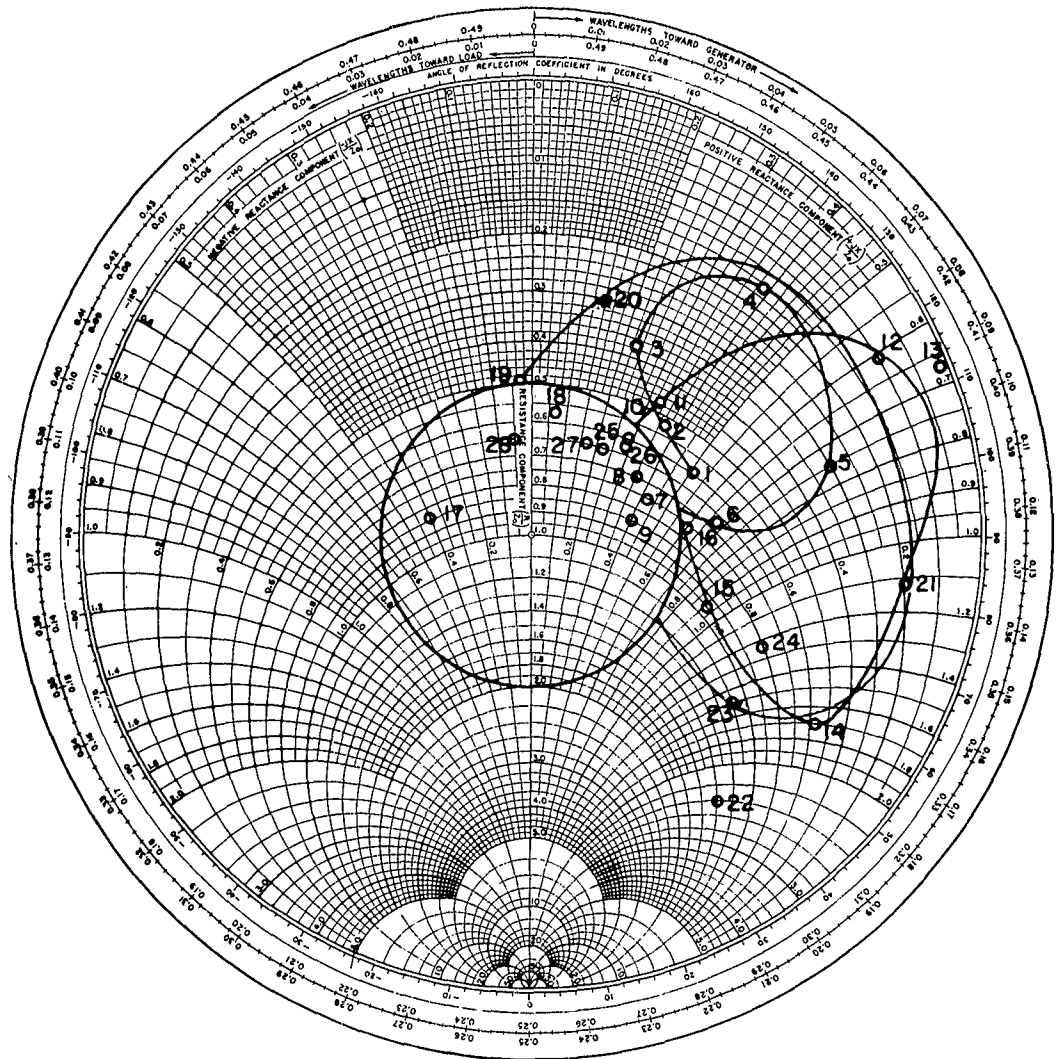

Points	Frequency	Points	Frequency	Points	Frequency
1	350	10	455	19	609.2
2	360.4	11	468.5	20	627.2
3	371	12	482.5	21	645.8
4	382	13	496.7	22	665
5	393.3	14	511.4	23	684.6
6	405	15	526.5	24	704.9
7	417	16	542.1	25	725.7
8	429.3	17	558.2	26	747.2
9	442	18	591.7	27	769.3
				28	792.1

Figure 3.2. Measured impedance of log-periodic conical slot array, CMCA-1-3, referred to 300 ohms.

4. LOG-PERIODIC ZIGZAG ANTENNAS

4.1 Purpose

This work is directed toward obtaining design information about a class of periodic leaky wave structures which are potentially high-gain, frequency-independent antennas.

4.2 Factual Data

4.2.1 Research Staff - P. E. Mayes

4.2.2 Status

Two new models designated LPZZ-4 were built and tested during this quarter. Both have $\tau = 0.9$, $\alpha = 5^\circ$, $\beta = 3^\circ$, $\psi = 10^\circ$. One (LPZZ-4I) was constructed to operate from about 350 Mc up so that accurate impedance measurements could be made using it. The other (LPZZ-4P) was built to take radiation pattern tests above 1000 Mc.

Typical patterns recorded from LPZZ-4P are shown in Figure 4.1. They show a well-formed backfire beam with a backlobe which becomes negligible above 1100 Mc. The 3-db beamwidths in E and H plane are both approximately 40 degrees from 1000 to 2400 Mc. It should be noted that there is some beam tilt in evidence in these patterns. Since this might be caused by inaccurate construction, a series of patterns was also measured on the larger LPZZ-4I. Comparable E-plane beam scanning was observed in these tests also. The magnitude of these oscillations appears to be dependent upon the pitch angle of the zigzag. LPZZ-4 has a pitch angle of 22 degrees, the largest of any log-periodic zigzag tested to date. For comparison Figure 4.2 shows patterns for LPZZ-10 ($\tau = 0.9$, $\alpha = 10^\circ$, pitch angle $= 10^\circ$). These patterns show very little beam swing, the beam being particularly stable at the lower frequencies. LPZZ-10 was constructed with cable arms. Considerable care was taken to insure that equal lengths of cable were used in the two arms.

The impedance of LPZZ-4I as measured on the 300 ohm Lecher wires is plotted in Figure 4.3. The pattern of points is similar to those measured on other LPZZ models. The majority of the points lie on the capacitive reactance side of the chart. The antenna is well matched to a 300 ohm line over most of the band from 350 to 1320 Mc. The maximum VSWR observed over this band was 2.8 at 1023.3 Mc. The mean impedance is 375-j15 ohms and the VSWR with respect to this value is less than 2.4.

4.3 Plans for the Next Interval

The pattern model, LPZZ-4P, has been rebuilt in an attempt to correct the asymmetry in the H-plane which was observed in the patterns of Figure 4.1. The dependence of beam swing upon pitch angle will be investigated further.

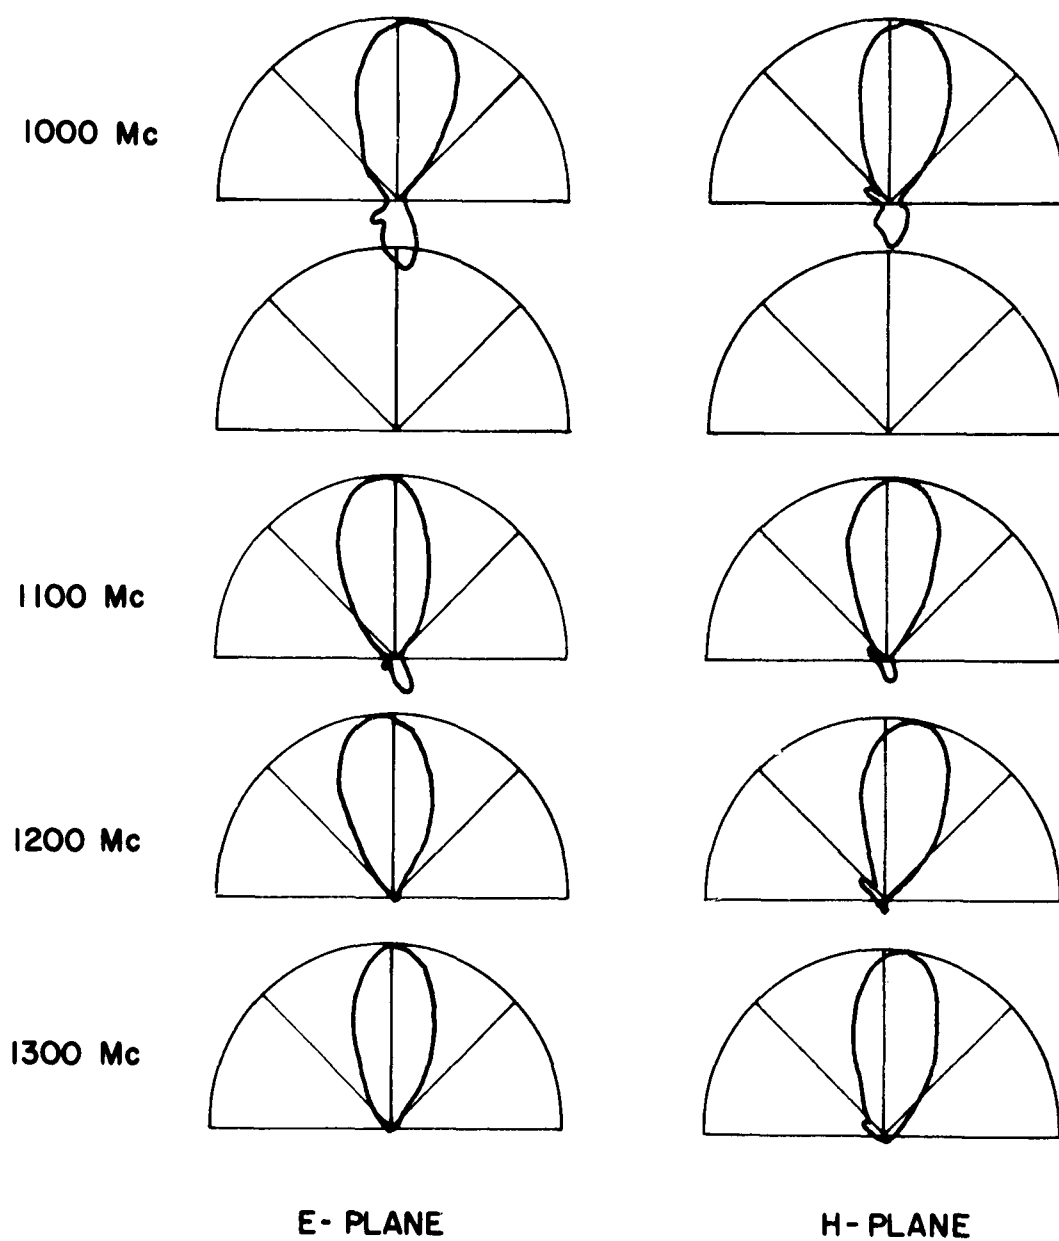


Figure 4.1a. E- and H-plane patterns of LPZZ-4.

1











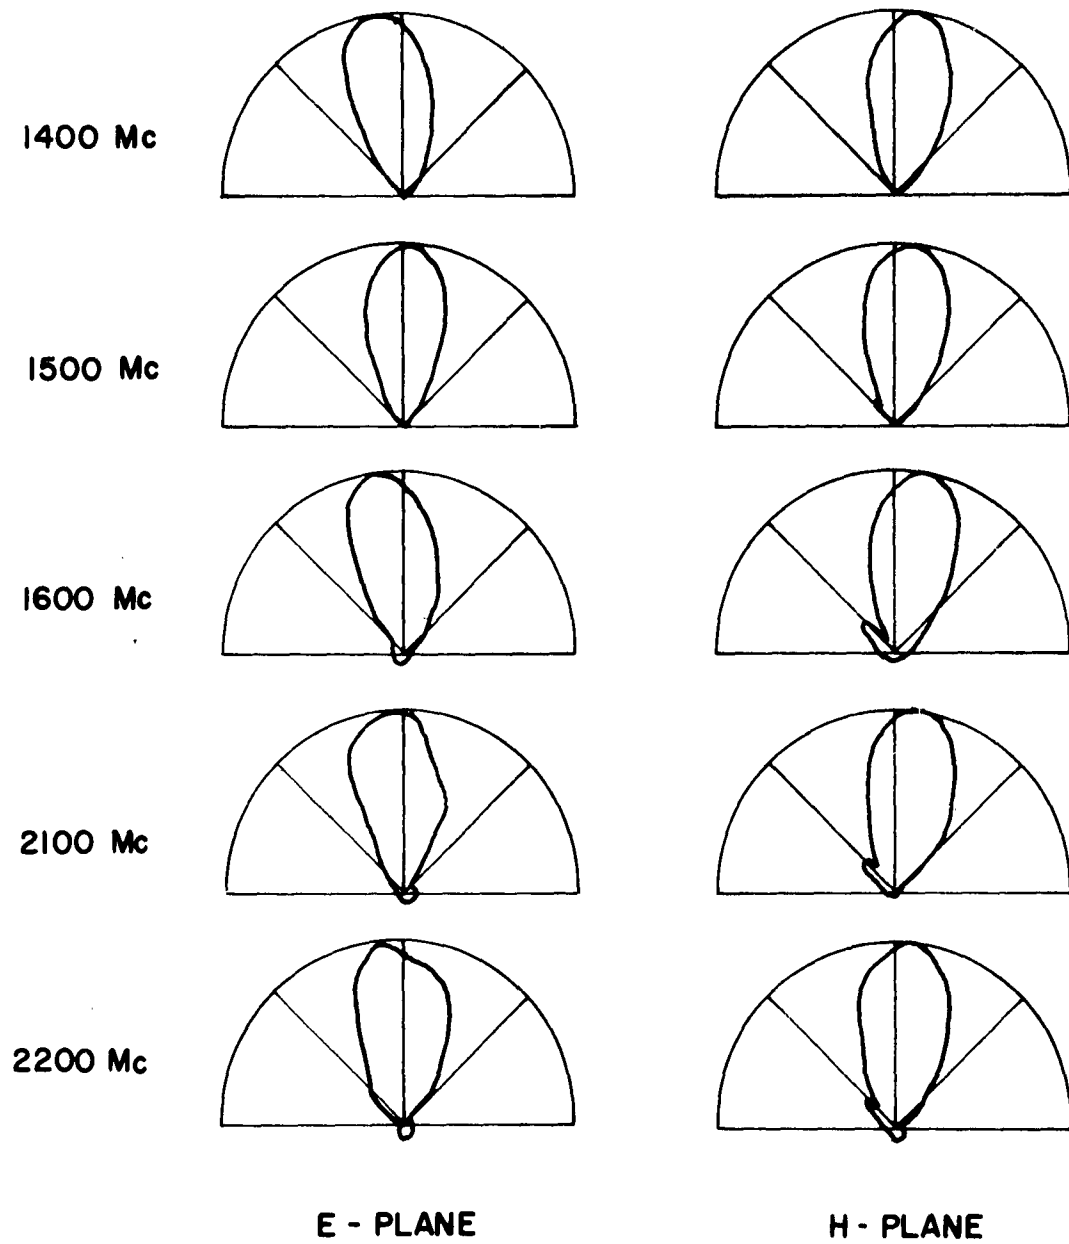


Figure 4.1b. E- and H-plane patterns of LPZZ-4.

2600 Mc

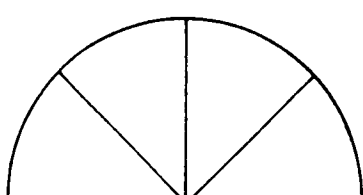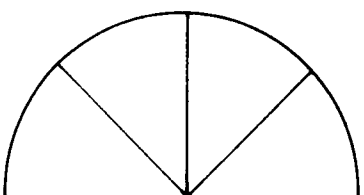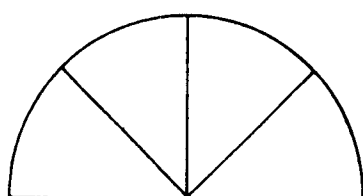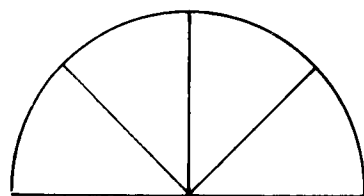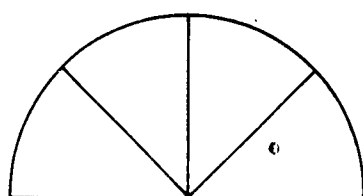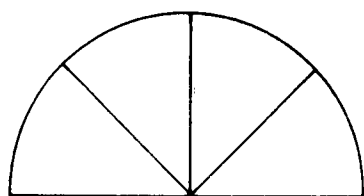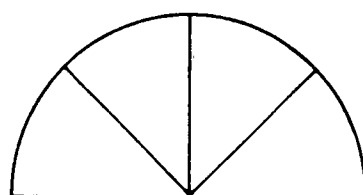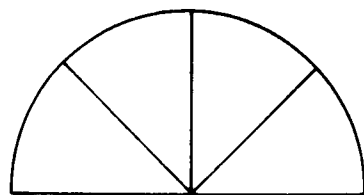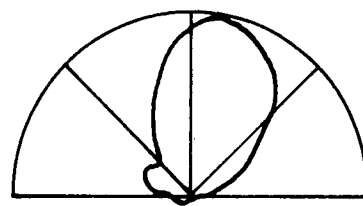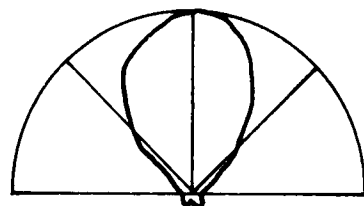

E - PLANE

H - PLANE

Figure 4.1c. E- and H-plane patterns of LPZZ-4.

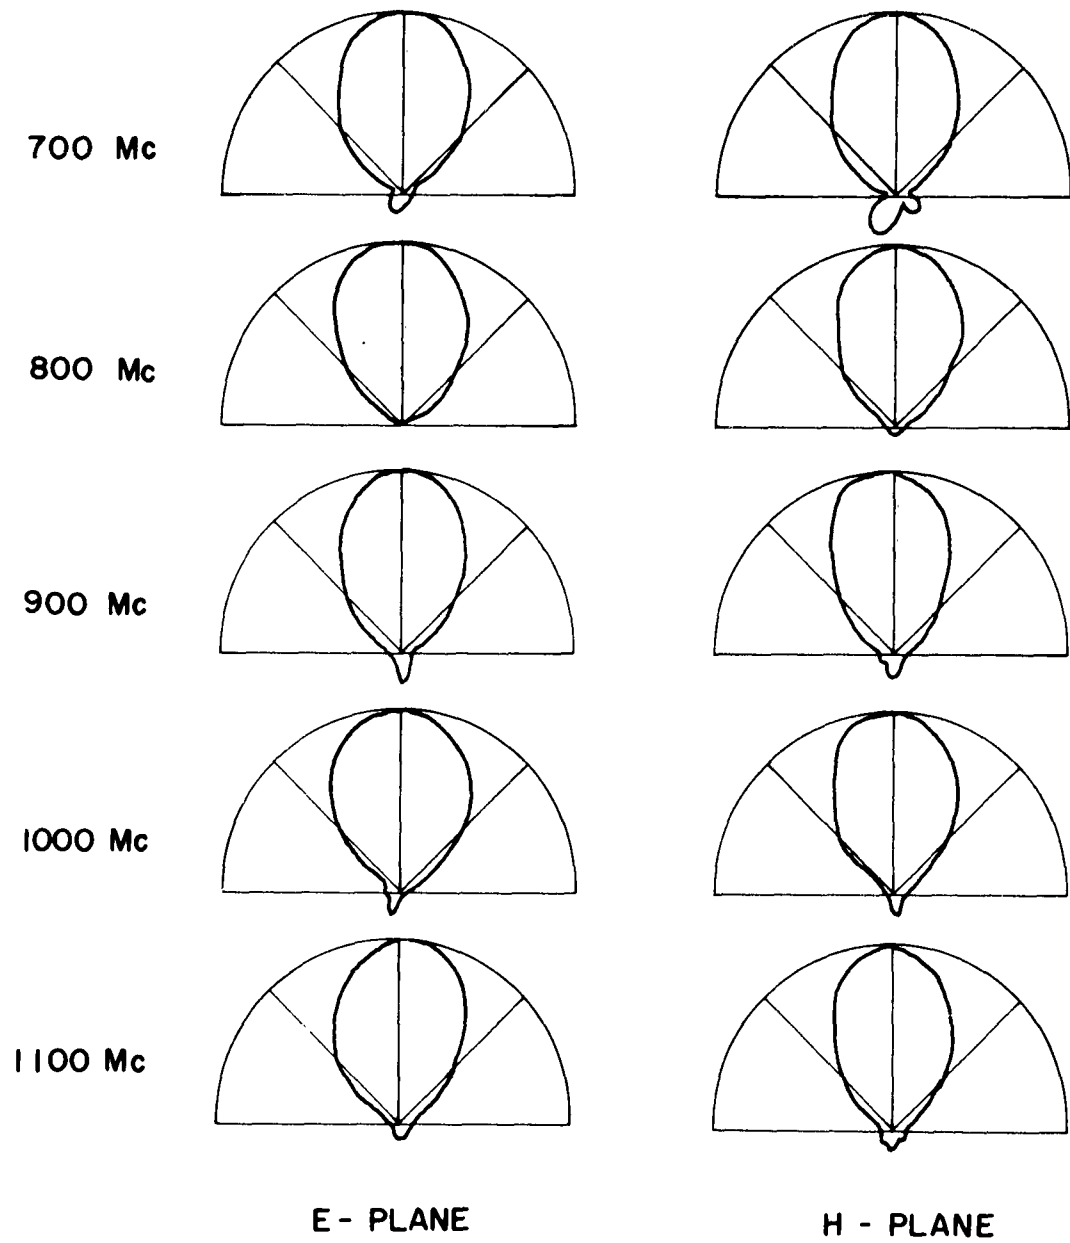


Figure 4.2a. E- and H-plane patterns of LPZZ-10.

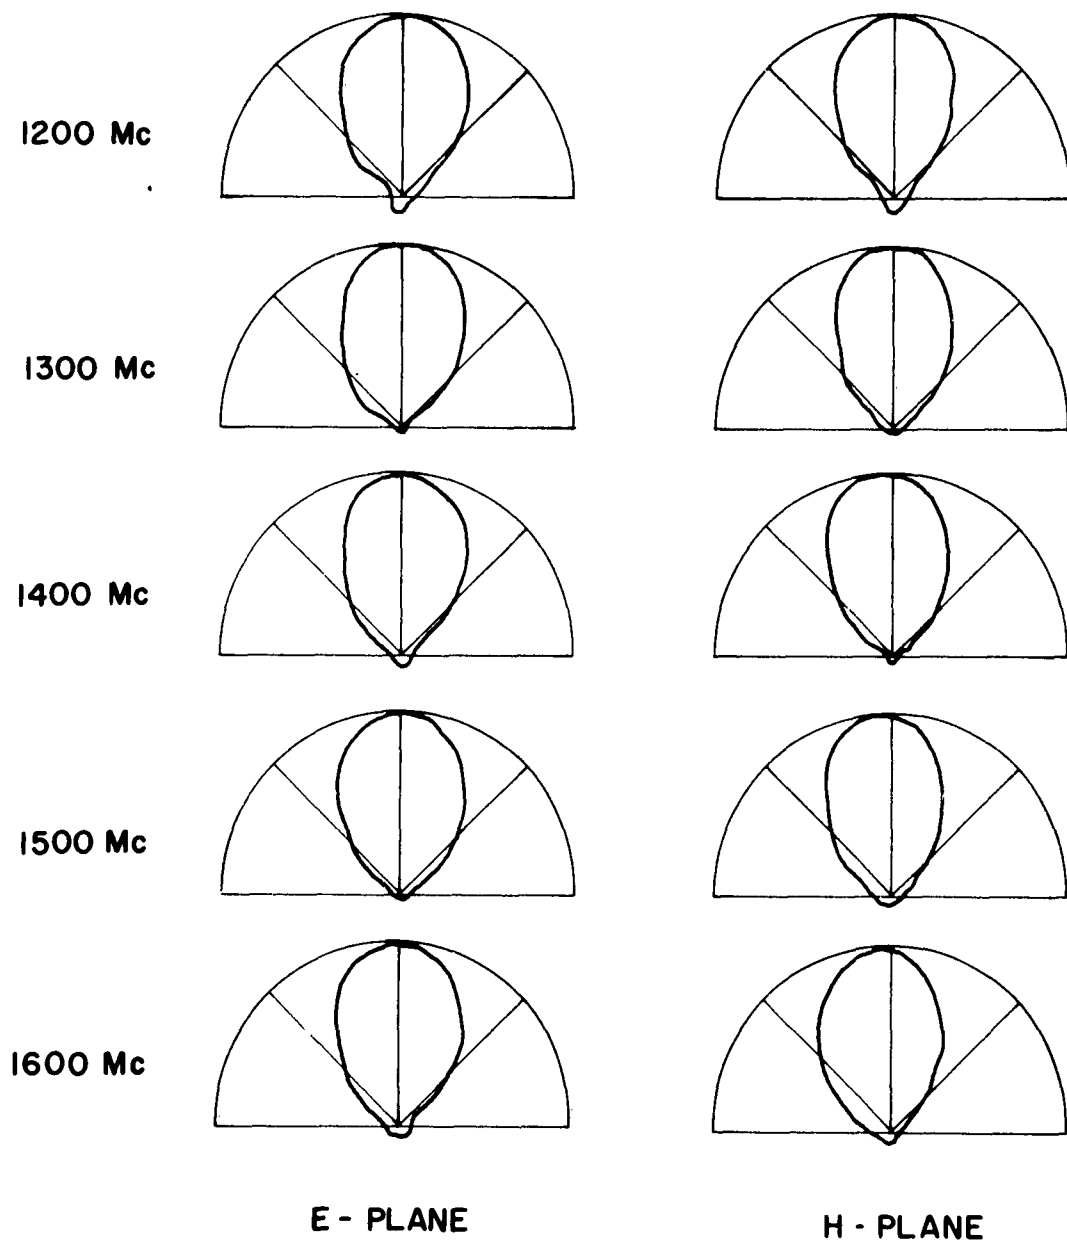


Figure 4.2b. E- and H-plane patterns of LPZZ-10.











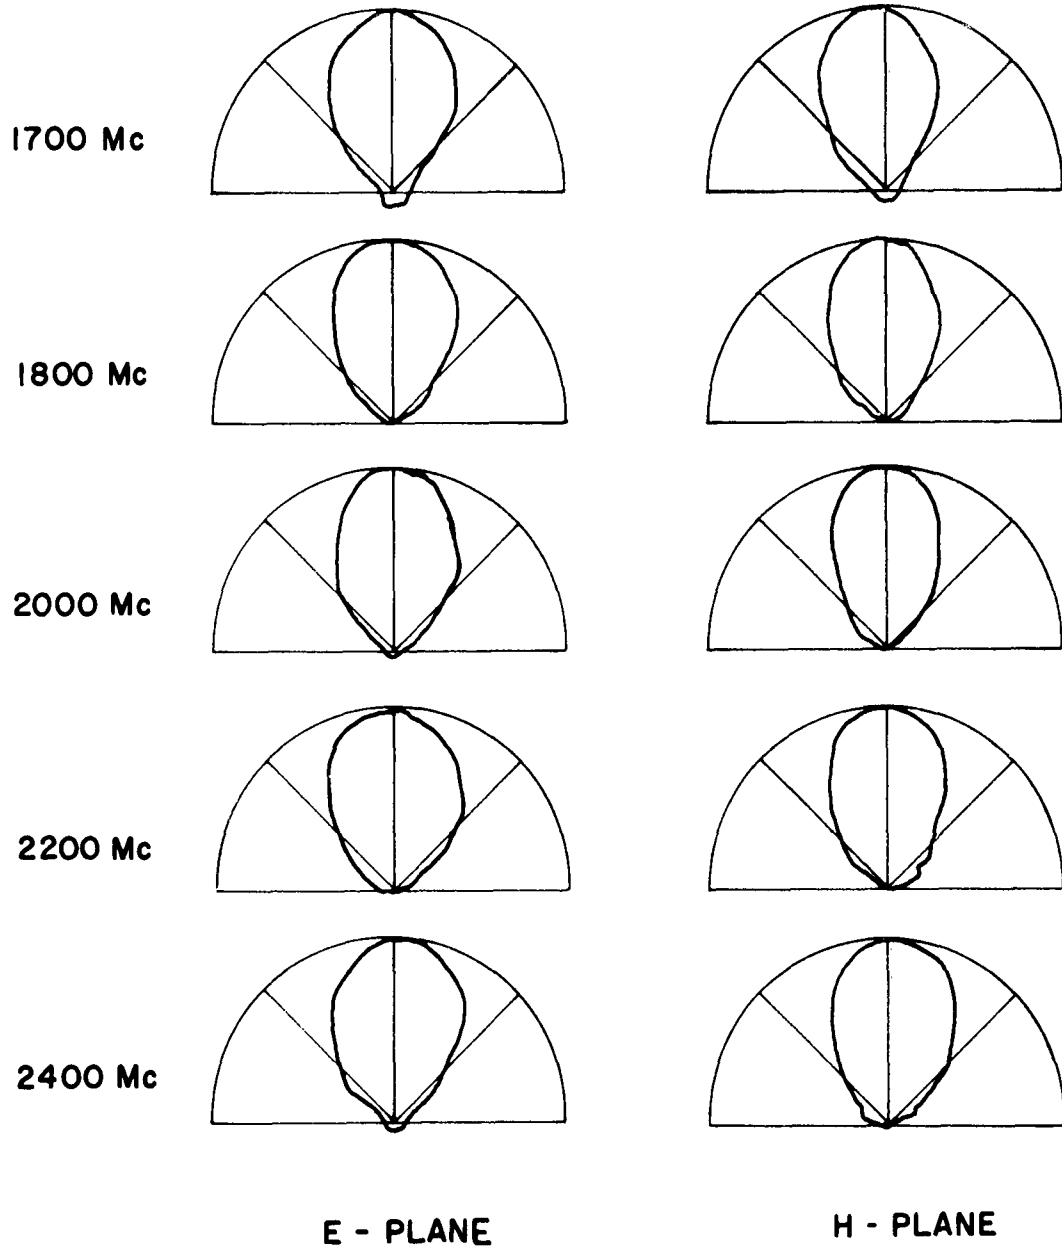


Figure 4.2c. E- and H-plane patterns of LPZZ-10.

2400 Mc

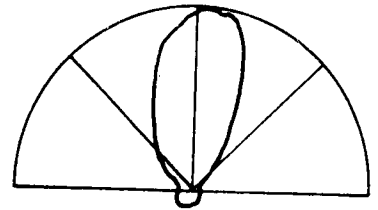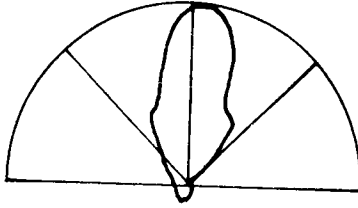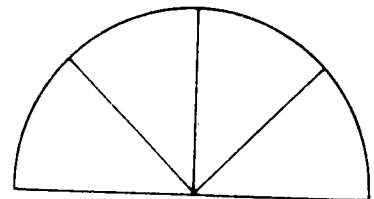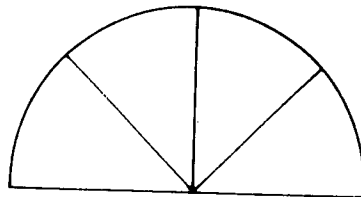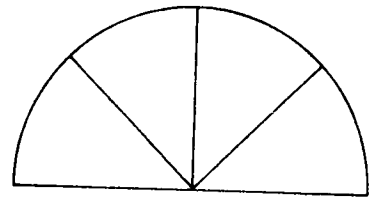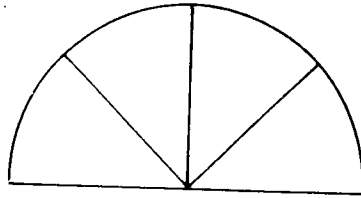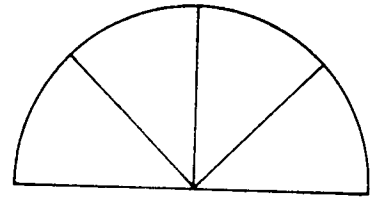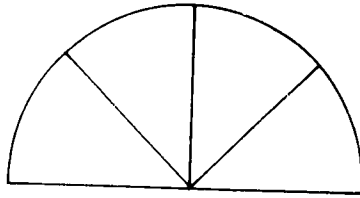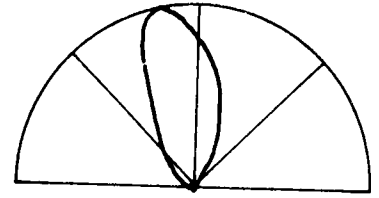


2600 Mc

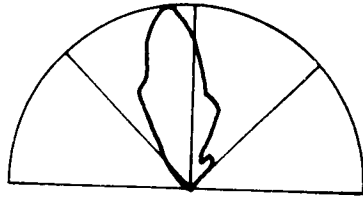

E - PLANE

H - PLANE

Figure 4.2d. E- and H-plane patterns of LPZZ-10.

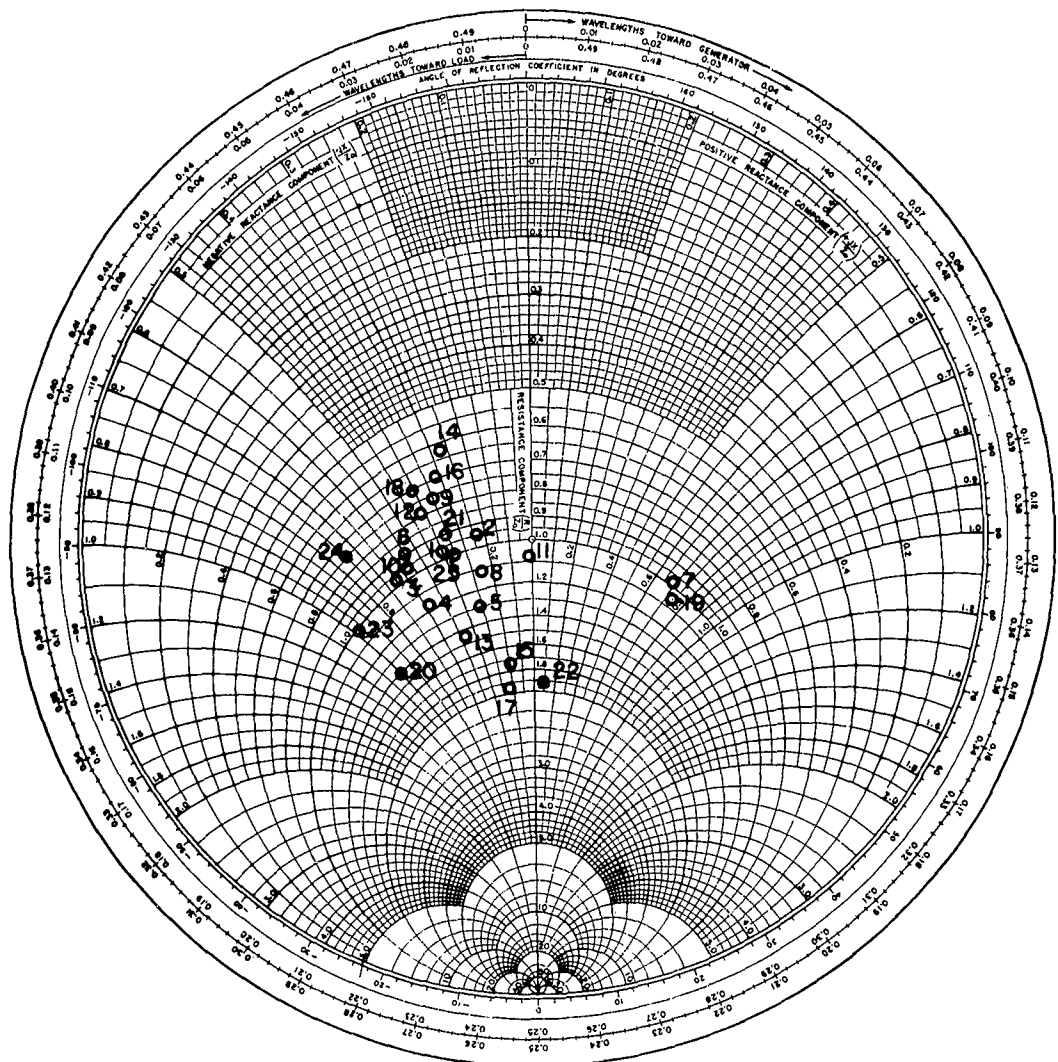

Points	Frequency	Points	Frequency	Points	Frequency
1	350	9	532	17	808
2	369	10	560	18	851
3	389	11	590	19	897
4	410	12	622	20	946
5	432	13	655	21	997
6	455	14	690	22	1051
7	480	15	728	23	1108
8	506	16	767	24	1167
				25	1217

Figure 4.3. Impedance of LPZZ-4 measured with respect to 300 ohms.

5. LOG-SPIRAL ANTENNAS

5.1 Purpose

The purpose of this investigation is to study characteristics of present forms and new versions of the conical logarithmic spiral antenna

5.2 Factual Data

5.2.1 Research Staff - J. D. Dyson and G. L. Duff


5.2.2 Status

As outlined in previous reports, a detailed study of the near fields on the conical antenna is being made to determine the location and width of the principal radiation region. Approximate models to the antenna have been considered and the far fields of these models have been calculated using data measured in the near fields of the antenna.

The first model consists of an array of loops as shown in Figure 5.1a. Each loop serves to approximate one turn of the log-spiral antenna. The data measured in the near fields of each turn are assigned to each loop in the calculation. The second model consists of the array of uniform helical cells shown in Figure 5.1b. Each helical cell serves to approximate one turn of the spiral antenna (see Figure 5.2) and measured near field data are used.

The far fields of a uniform helical cell, that is one turn of a uniform helix, were calculated by the vector potential method. The current assumed was of the form $\bar{I}e^{-j\zeta\phi}$, a constant amplitude traveling wave. Such calculations have been made previously for the case where ζ is an integer. These calculations were modified for an arbitrary real ζ and the results are expressed in terms of a finite number of Anger's Functions, rather than the usual infinite sum of Bessels functions of the first kind. The fields due to each cell were summed giving a resultant field. The calculations were done on the University of Illinois IBM 7090 computer.

The far field patterns were first calculated for a total of 25 arrayed helical cells, which represented one particular log-spiral antenna. Subsequently the computer was programmed to calculate the far fields, excluding one cell each time from the small end of the antenna, i.e., patterns were calculated first for a total of 25 cells, then 24, 23, and so on. By this method it was expected

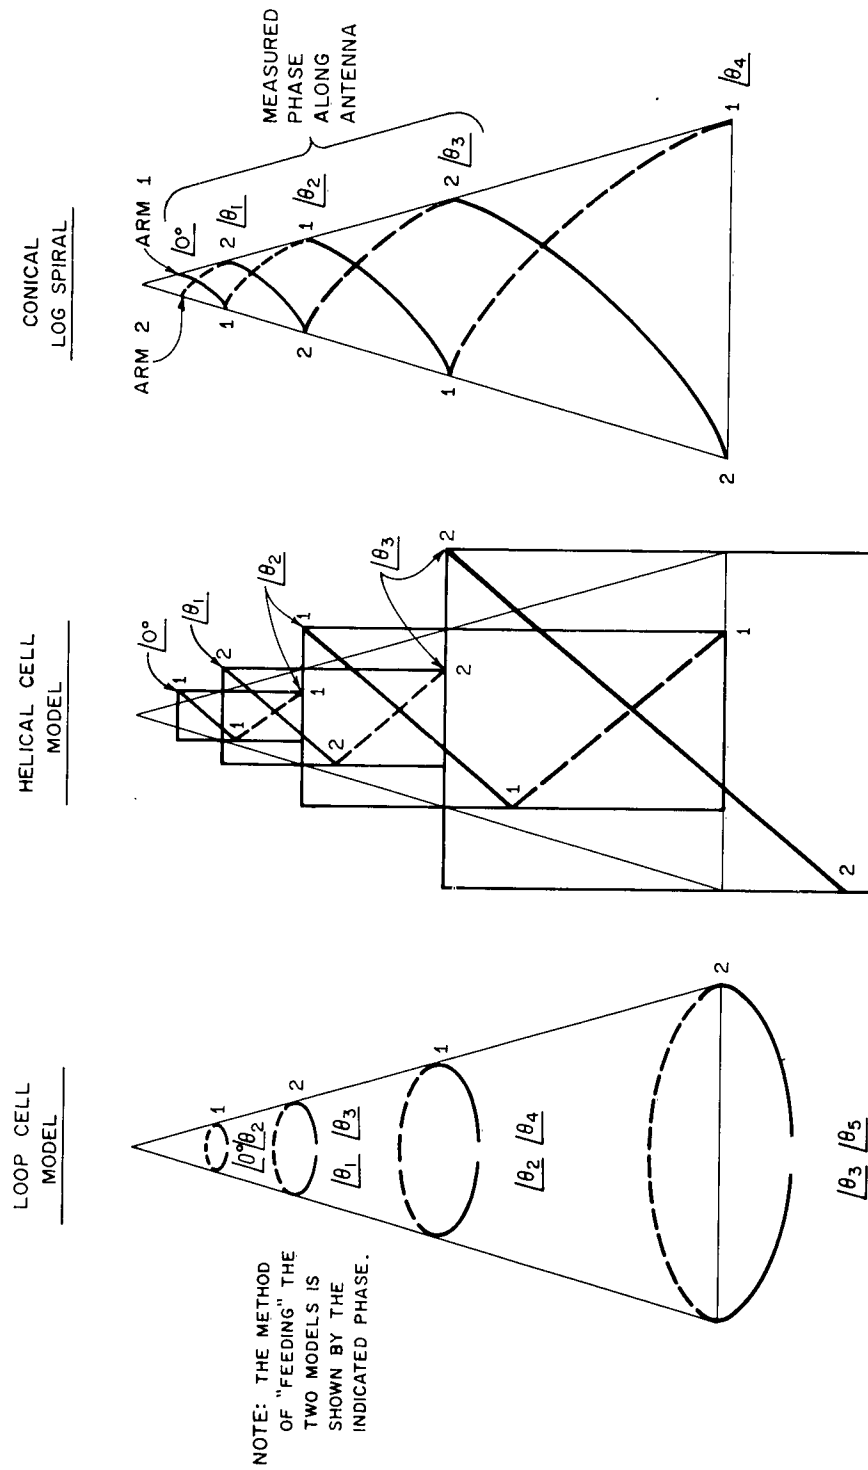

a.

b.

c.

Figure 5.1. Models used to calculate radiation patterns.

CORRESPONDING
HELICAL CELL

ONE CONICAL LOG
SPIRAL CELL

APPROXIMATION CONSISTS
OF A UNIFORM HELICAL
CELL ON A CYLINDER WITH
DIMENSIONS AS SHOWN.

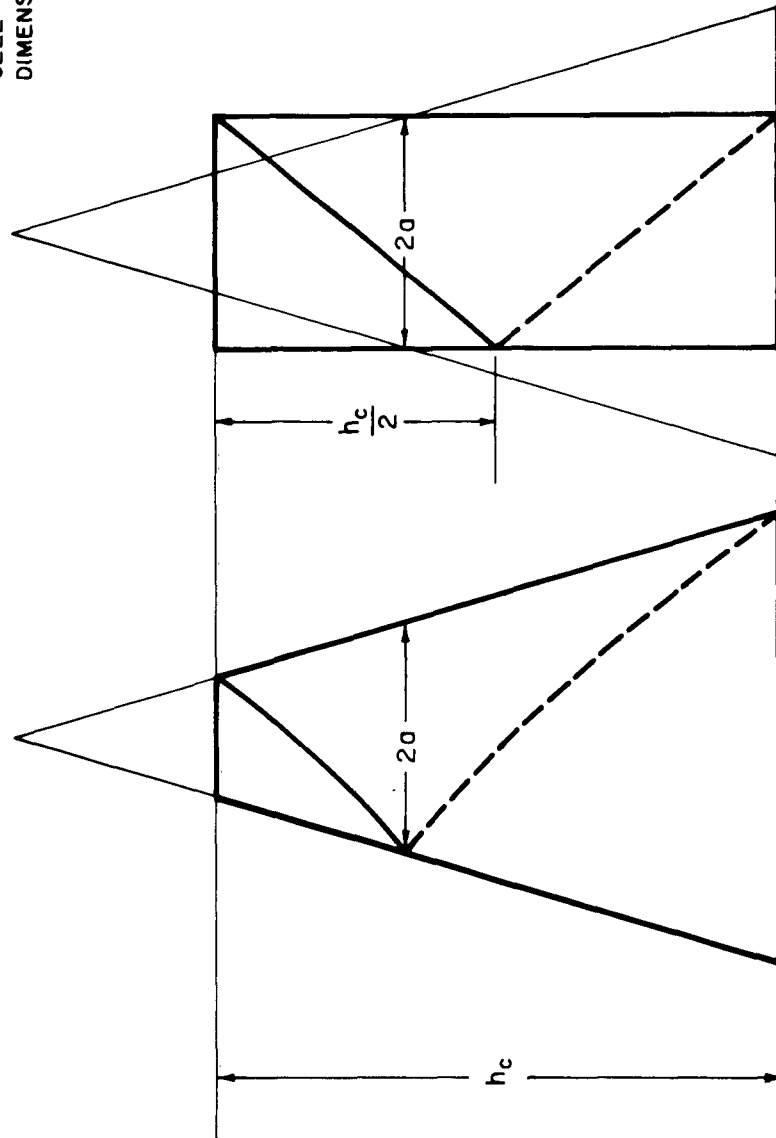


Figure 5.2

that the far field patterns would change as soon as cells were removed from the radiation region. The amount and nature of this change would therefore give an indication of the relative importance of each cell as a radiator.

The results calculated using the loop model and the helical model were essentially the same. The beamwidths of the radiation patterns for the array of helical cells were consistently 5 to 10 degrees greater than those of the loop model. For the time being it was decided to continue only with the helical model since it should be a better physical approximation to the log-spiral antenna.

The patterns calculated to date have larger beamwidths than the measured patterns, and the difference between the beamwidths of the two principle cuts is larger than has been measured. These patterns were calculated using data measured at a distance of 10 mm ($\lambda/50$). Near field data are presently being measured at a distance of 2 mm ($\lambda/250$) from the antenna and the patterns calculated with this new data may coincide better with the measured patterns.

The initial calculations have shown that the turns on the antenna immediately preceeding the region of rapid decay of the near fields contribute significantly to the far fields and, hence must be included as part of the radiation or "active region". This conclusion is also indicated by measurements presently being made at 2 mm from the antenna, although patterns have not yet been calculated.

This result is anticipated if one considers that the fields become more loosely bound to the structure as the wave progresses from the feed point to the marked decay region.

A typical radiation pattern for a tapered array of loops is shown in Figure 5.3. The pattern indicates that such a structure could well be a successful logarithmic periodic antenna with characteristics quite similar to those of the log-spiral, but with possible greater ease of construction.

5.3 Plans for the Next Interval

Further calculations will be made using the data measured at 2 mm from the log spiral.

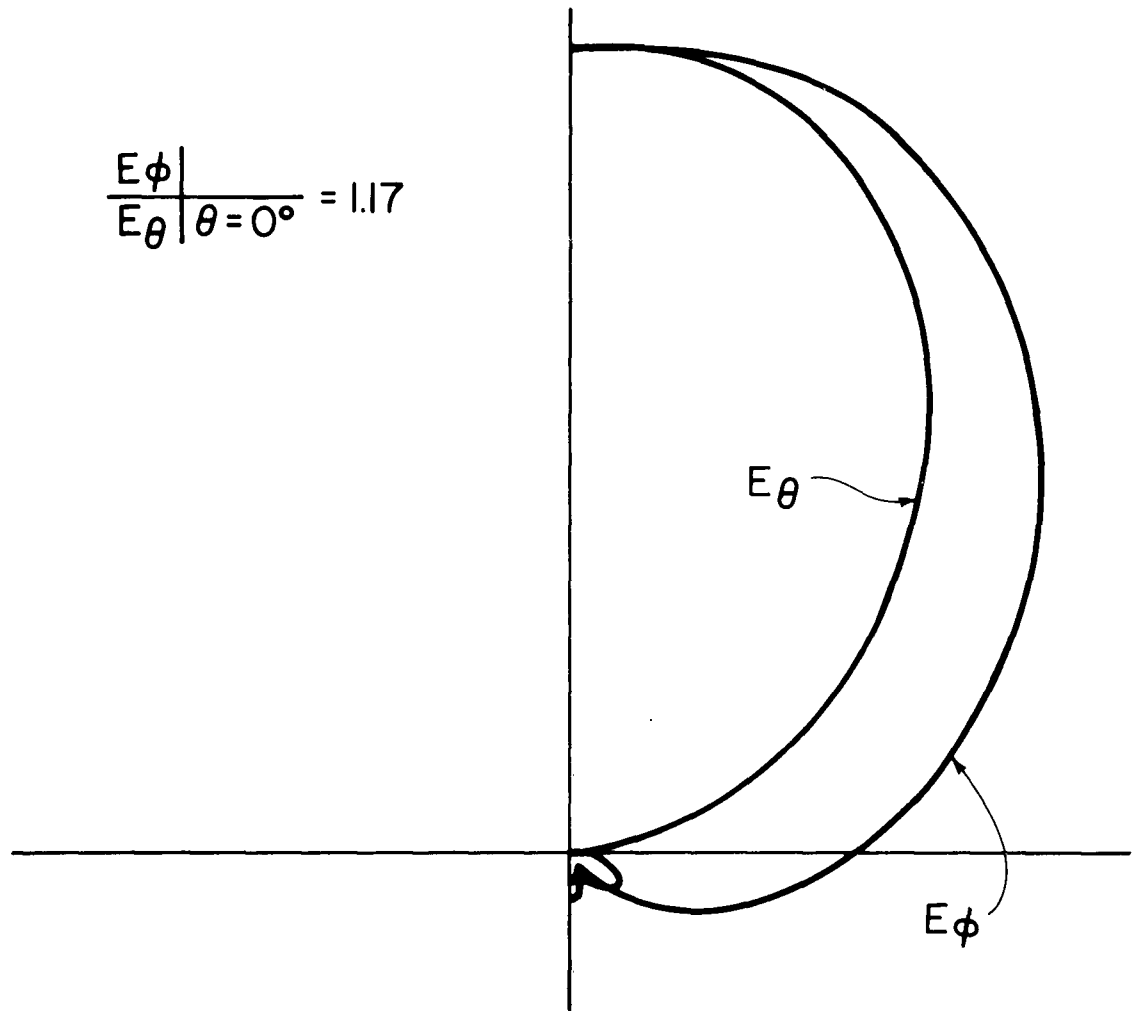


Figure 5.3. Typical radiation pattern for array of tapered loops.

6. AN INTEGRATED ANTENNA AMPLIFIER

6.1 Purpose

This investigation will concern the feasibility of utilizing varactor diodes in a backfire antenna to produce amplification in the antenna itself and thereby improve signal-to-noise performance.

6.2 Factual Data

6.2.1 Research Staff - P. G. Ingerson, P. E. Mayes

6.2.2 Status

The approximation that in the transmission line region of the log-periodic dipole antenna the dipoles produced a constant loading per unit length was checked. It was found that the phase velocity does have a constant slowing over a range of 8 cells which are located directly in front of the active region. (The number of cells for which this is true is determined by τ). These 8 cells will be the main amplifying region.

The integrated slab and parallel plate line which will propagate the pump and signal waves was checked. While in theory there should be little coupling between them, measurements showed decoupling to be on the order of 10 to 15 db. At present this coupling is believed to be due to lack of symmetry in the antenna feed system.

6.3 Plans for the Next Interval

Measurements are being made to determine if it will be possible to use self-biasing of the diodes as planned. If the effect of the unbiased diodes in the line cannot be overcome, then dc biasing will have to be used.

7. WAVE PROPAGATION ON HELICES

7.1 Purpose

To understand the behavior of the tape helix it is sometime useful to study the sheath helix which is a mathematical model with an anisotropic cylindrical current sheet.

The determinantal equation for the sheath helix has been derived by others and the real Brillouin ($k-\beta$) diagram found. From the $k-\beta$ diagram people have explained, more or less satisfactorily, many properties of the helix when used as a waveguide in a traveling wave tube or as an antenna.

7.2 Factual Data

7.2.1 Research Staff - P. Klock, R. Mittra

7.2.2 Status

The $k-\beta$ diagram for the bifilar tape helix was obtained for various tape widths for pitch angles of 10° and 17° . Some sample results are shown in Figures 7.1a, 7.1b, 7.2a, 7.2b, 7.3a and 7.3b.

The results for modes $1 + 2$ are similar to the results for modes $1 + 2$ for the monofilar tape helix. The major differences are as follows:

- 1) The deviation of the real part of the phase constant from the line corresponding to the velocity of light is more for the bifilar helix than the deviation which occurs in the case of the monofilar helix.
- 2) The maximum value of the imaginary part of the phase constant is greater for the bifilar helix than it is for the monofilar helix.

Also during the past period a study of the $k-\beta$ diagram for low frequencies was made. A graph showing typical results is shown in Figure 7.4. The helix has been used by others to produce a slow wave. The first approximation used is that the velocity along the axis is $v_z = c \sin \psi$. However, by inspecting Figure 7.4 one predicts that the wave will have a greater velocity in the z direction than that given by $c \sin \psi$. The deviation from the $c \sin \psi$ line close-up is substantial for very thin tapes and is greater for thicker tapes. This result is the opposite that one desires if the purpose of using the helix is to obtain a slow wave or to make the structure smaller.

7.3 Plans for the Next Interval

The current on a bifilar equiangular spiral will be calculated using

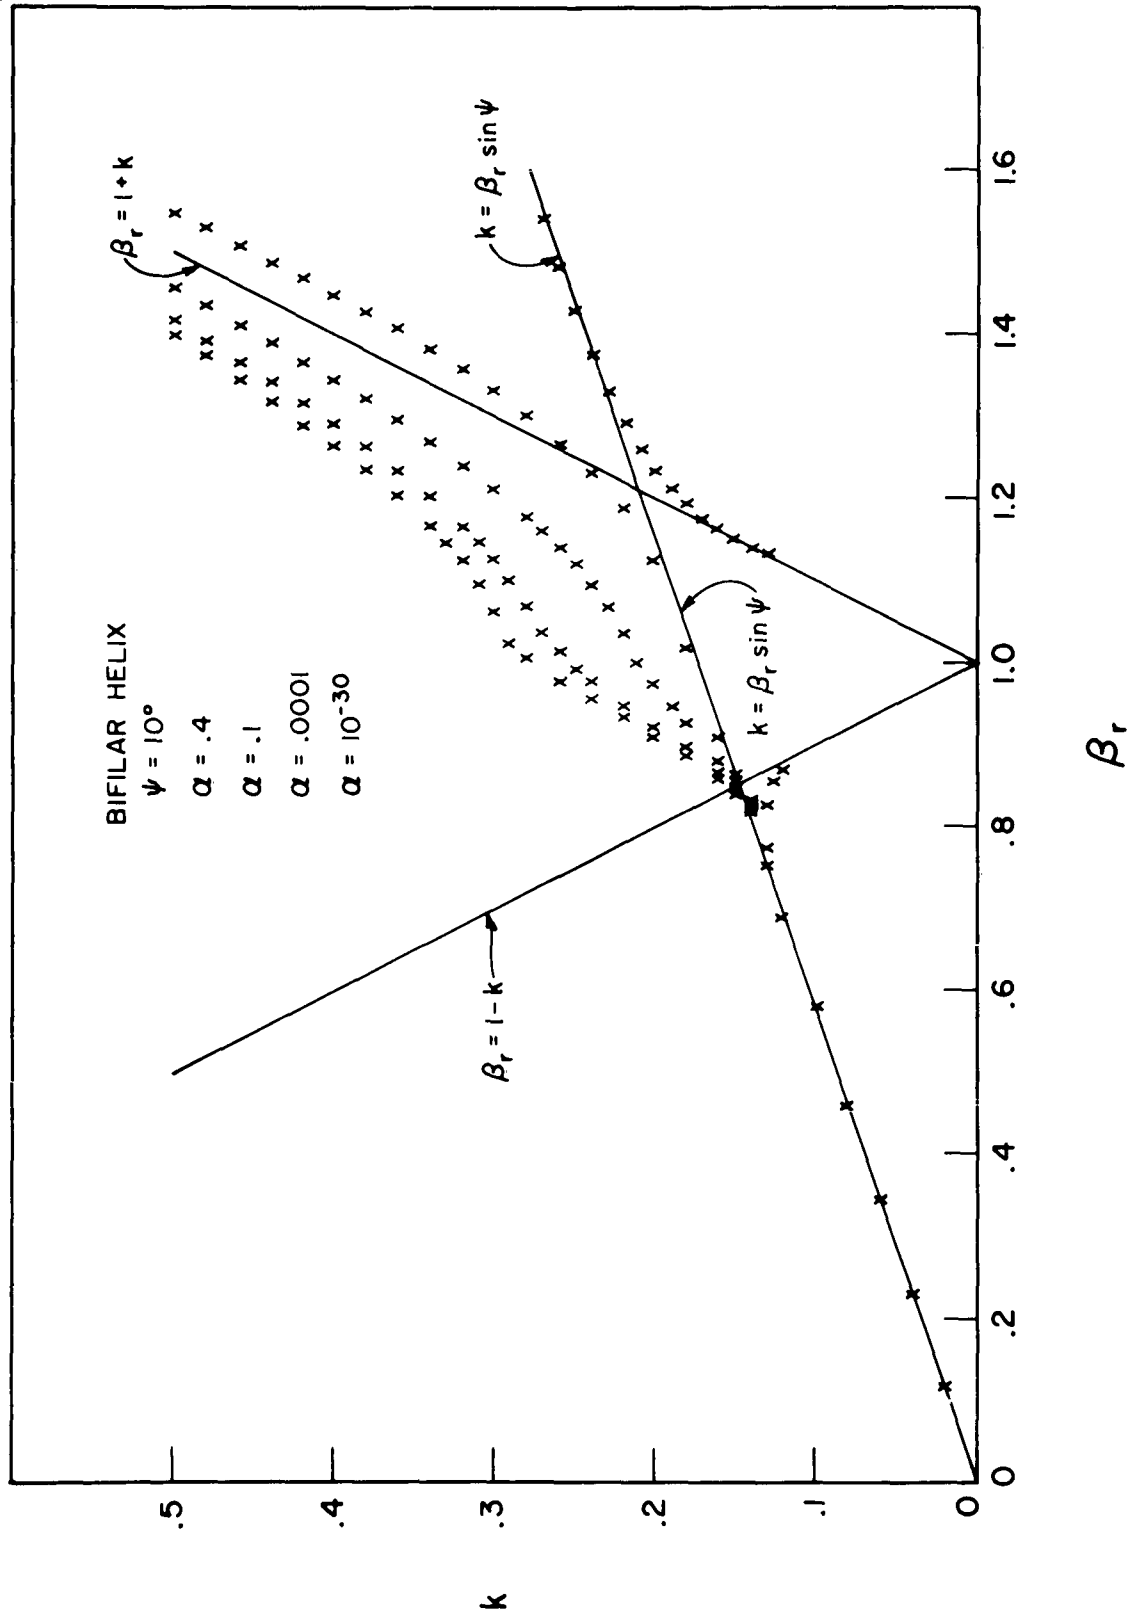


Figure 7.1a

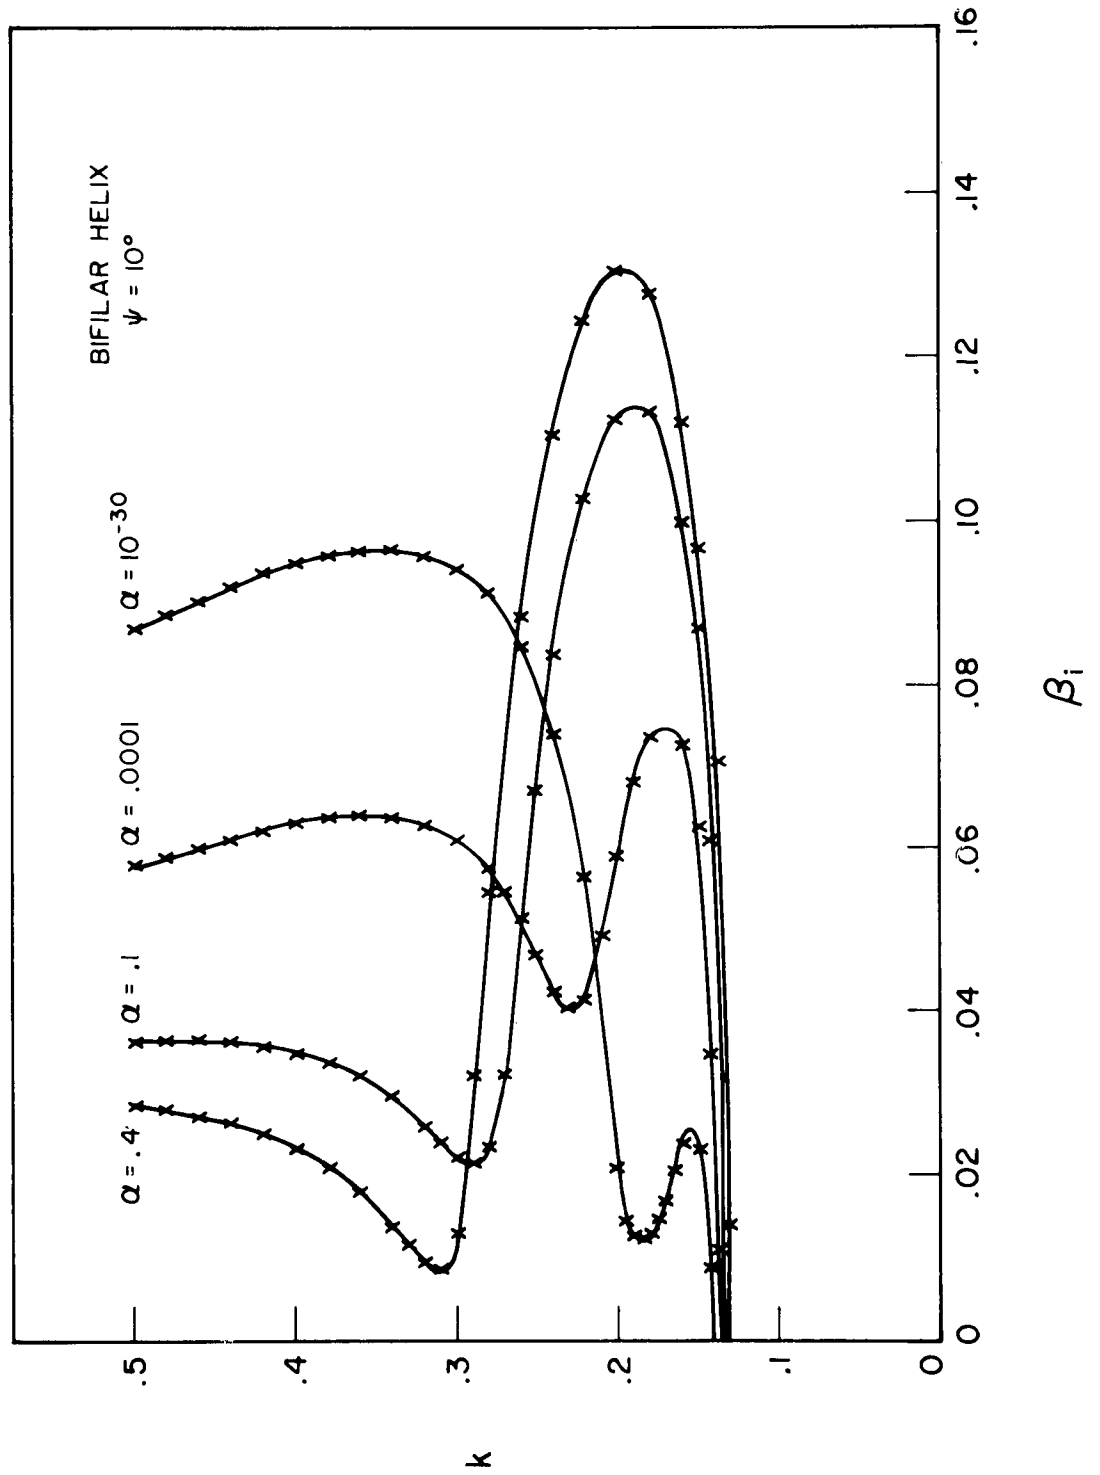


Figure 7.1b

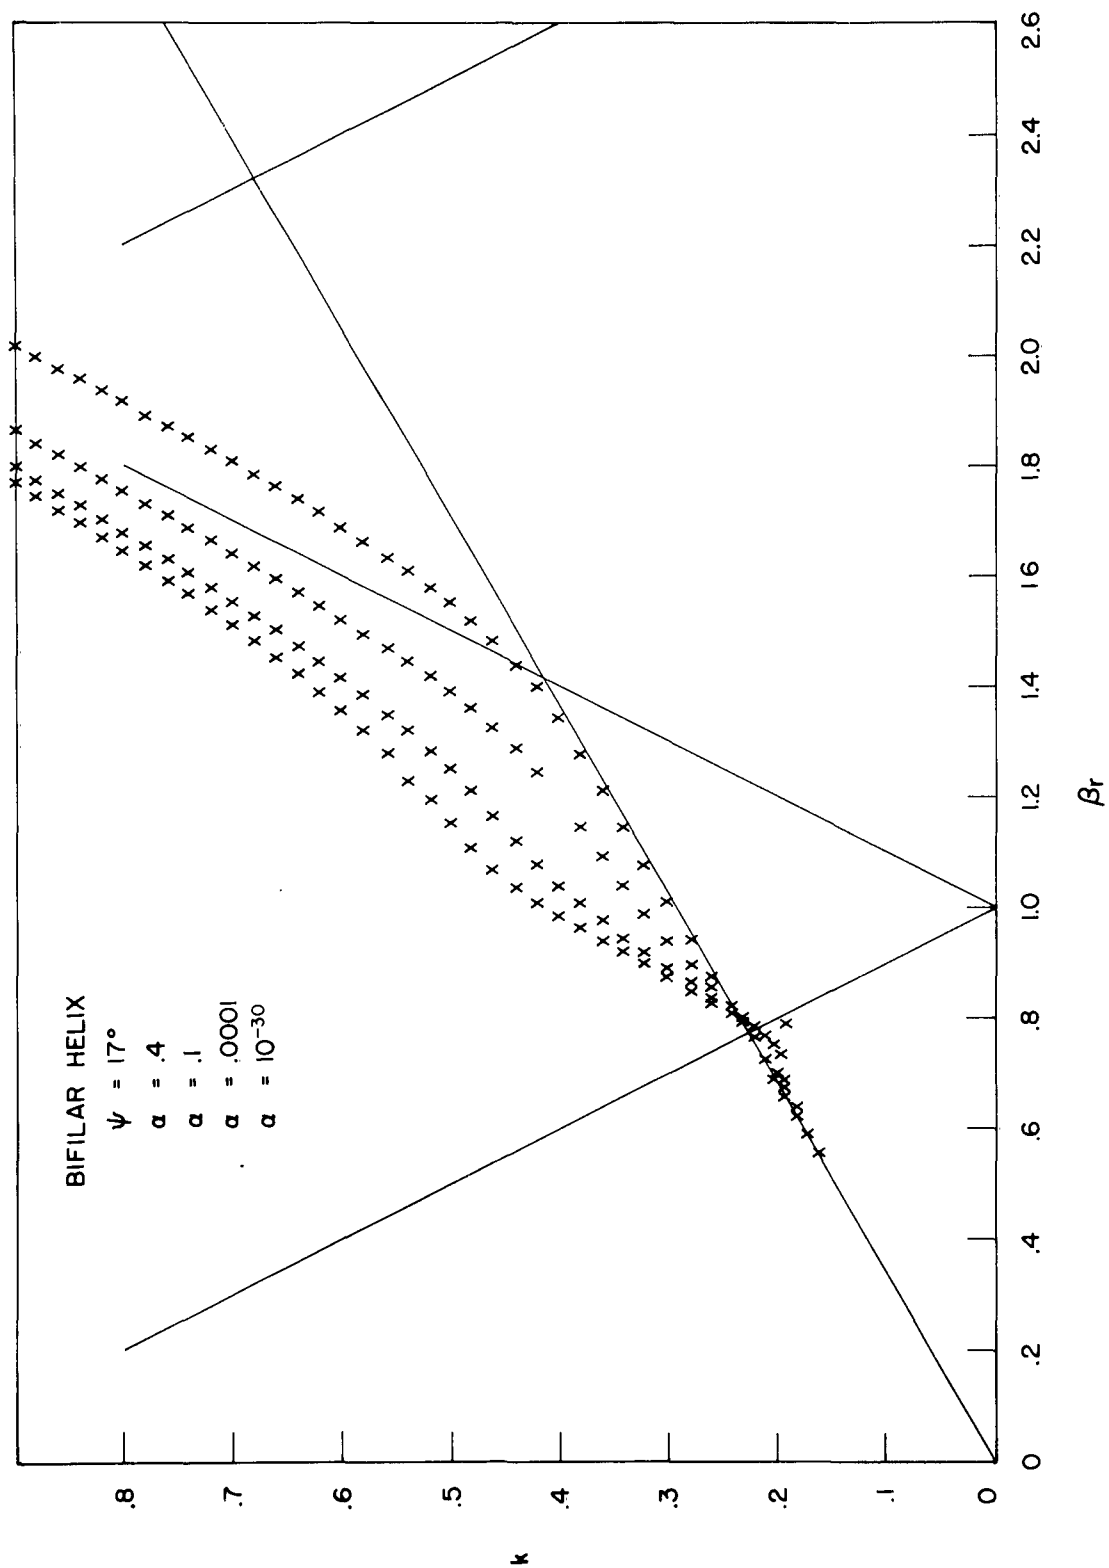


Figure 7.2a

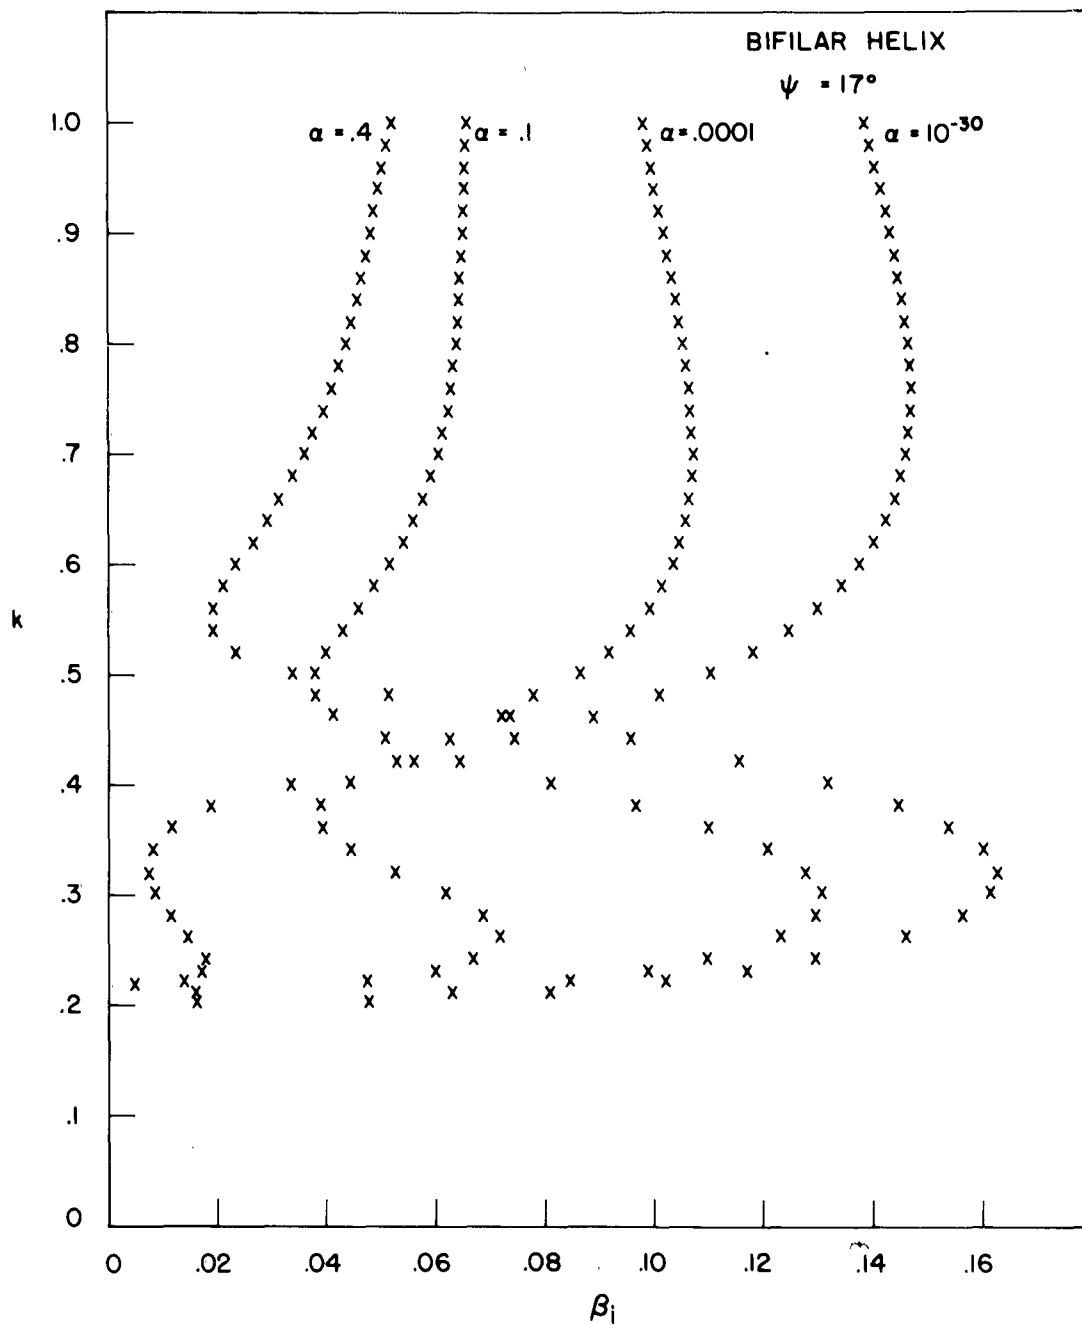


Figure 7.2b

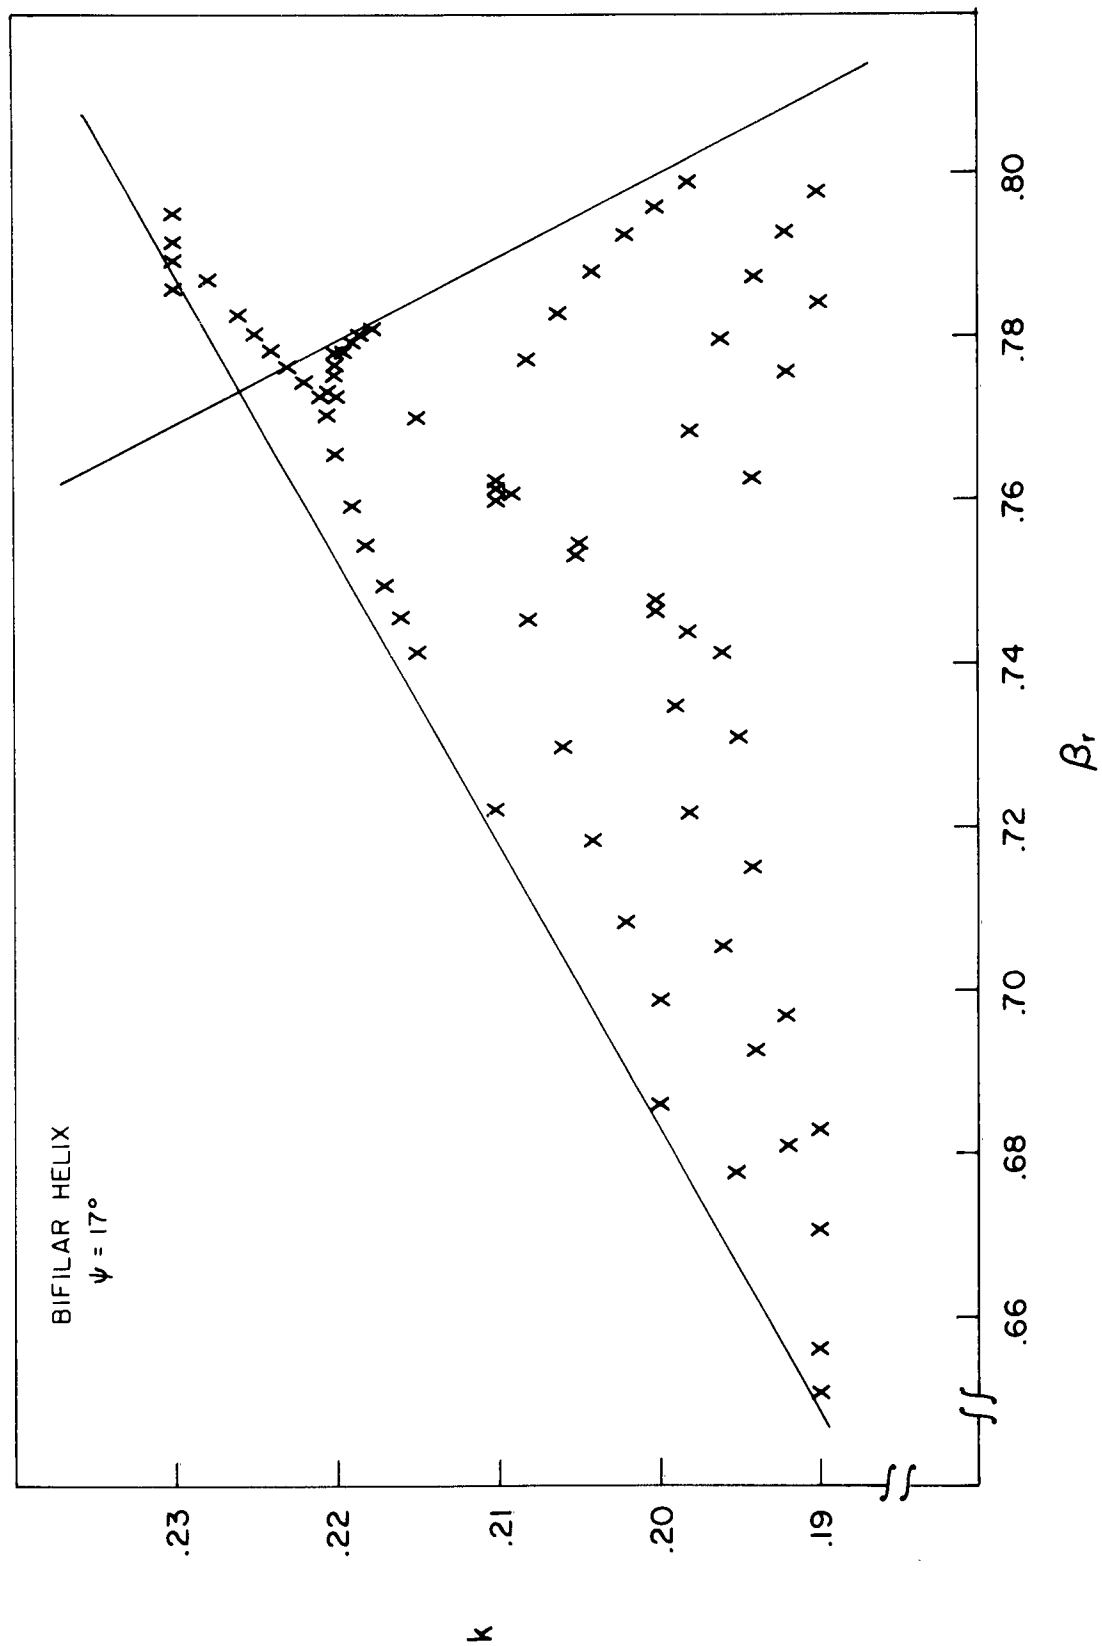


Figure 7.3a

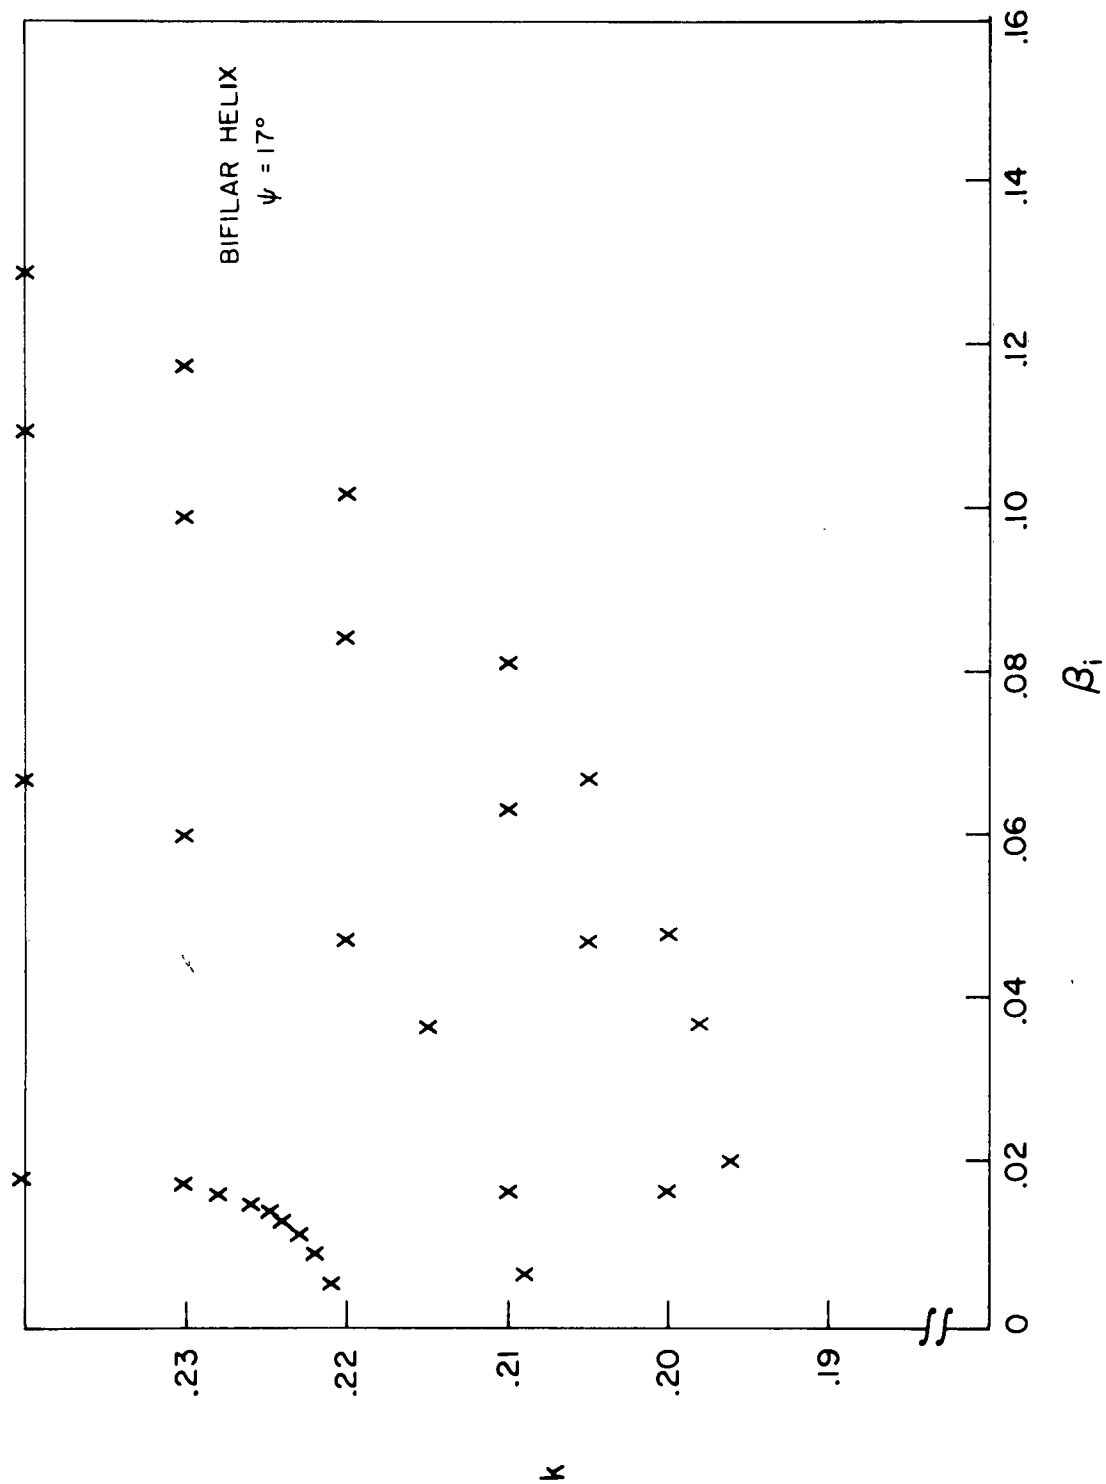


Figure 7.3b

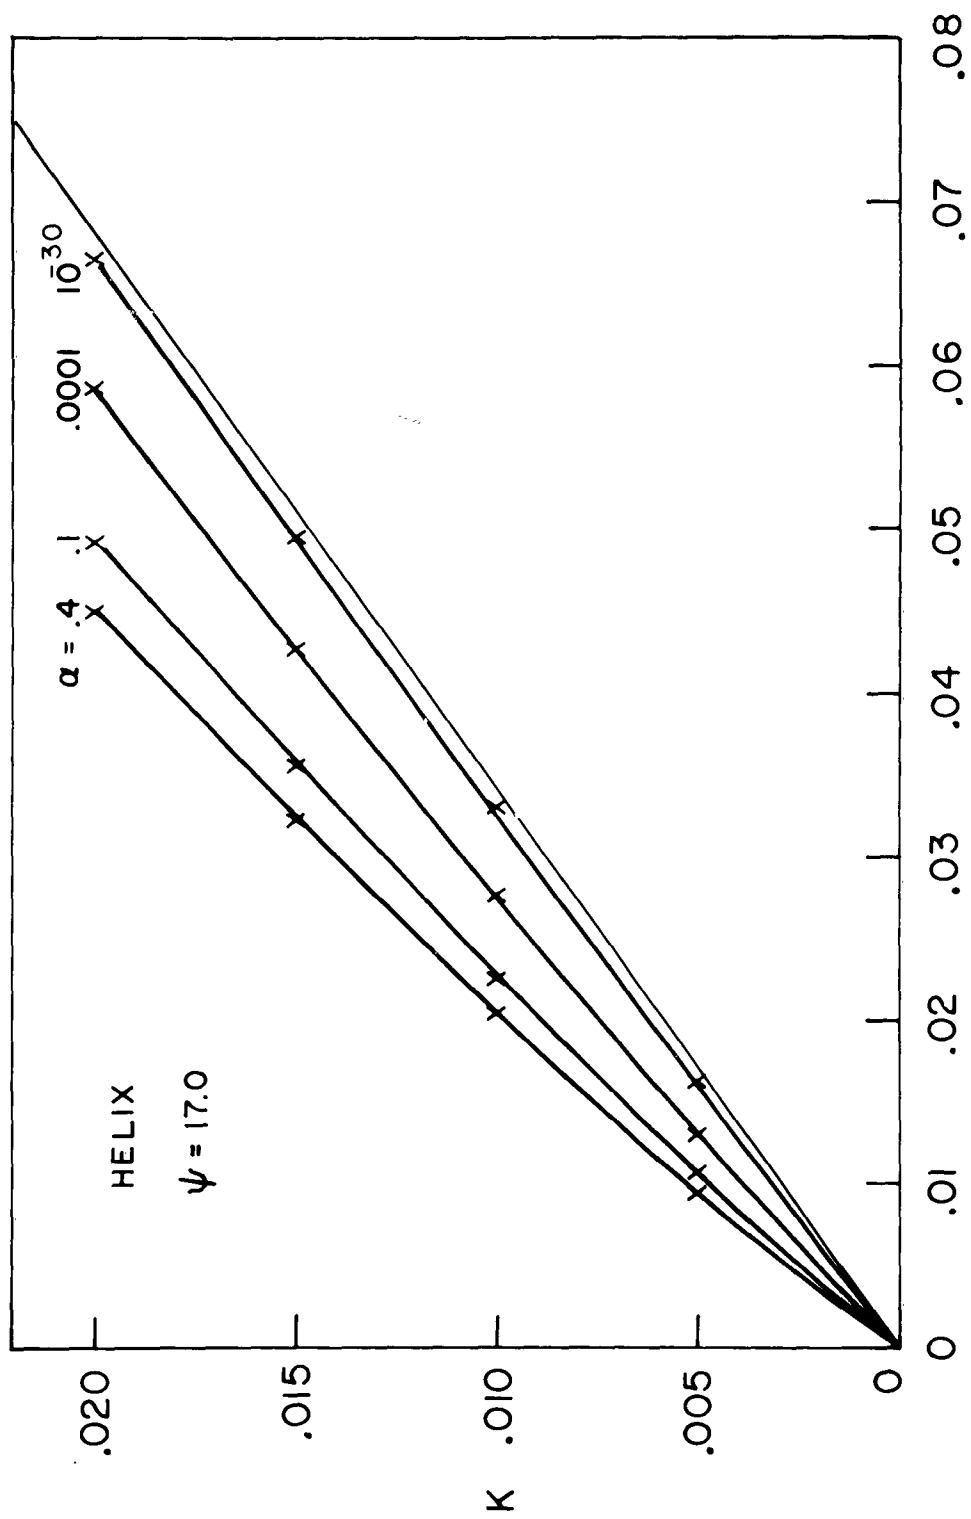


Figure 7.4

the results for mode 1 of the $k-\beta$ diagram for the uniform helix and the WKB method of approximating the solution to the differential equation with variable coefficients.

8. INVESTIGATION OF A CLASS OF PERIODIC STRUCTURES

8.1 Purpose

The purpose of this project is to study a class of periodic structures for wideband applications.

8.2 Factual Data

8.2.1 Research Staff - S. Laxpati, M. Wahl, R. Mittra

8.2.2 Status

We shall continue to report in the format used in the last quarterly report and divide up the report in this section into four subsections as follows:

(a) Investigation of Uniform and Tapered Surfaces

A paper entitled, "The Letter-Rack Antenna - A Wideband Flush-Mounted Antenna of Log-Periodic Design" was presented at the IEEE Convention.

Impedance measurements have been made on the Letter-Rack Antenna and are shown in Figure 8.1. Preparation of the manuscript for a technical report describing the Letter-Rack Antenna has been completed and the report will be issued shortly.

Future work: No further work on this particular antenna is planned in the near future.

(b) Waveguide with Glide-Reflection Symmetry

The determinantal equation for propagation constant β_o in the waveguide with glide reflection symmetry has been reported in the last quarterly report.¹

This equation studied now includes the terms of the type $e^{-\alpha_n y}$, $n = \pm 1$, [α_n being the transverse propagation constant] and has been solved numerically on IBM 7090 digital computer. Numerical solution for β_o is obtained as a function of k , the free space propagation constant, with the separation between the plates "t" as a parameter.

Figure 8.2 shows the plot of k against β_o (Real Solution) for three values of t . This plot once again demonstrates the effective period of this waveguide structure as $d/2$, and not d , the latter being the translational period. However when t is very large the structure behaves as though it had a period d .

Figure 8.3 shows the plot of k against β_o for $t = .06$, including real and approximate complex solutions for two different modes. Note that the complex solution for β_o does not exhibit the familiar filter type cutoff at $(\text{Re } \beta_o)(d/2) = \pi$, and that it deviates considerably from this line.

A complete study of these results is being made currently. It is hoped that this study will help explain some aspects of the behavior of several periodic and log-periodic structures. A technical report on this study is also planned for the near future.



Figure 8.1. Input impedance of Letter-Rack antenna referred to 50 ohms

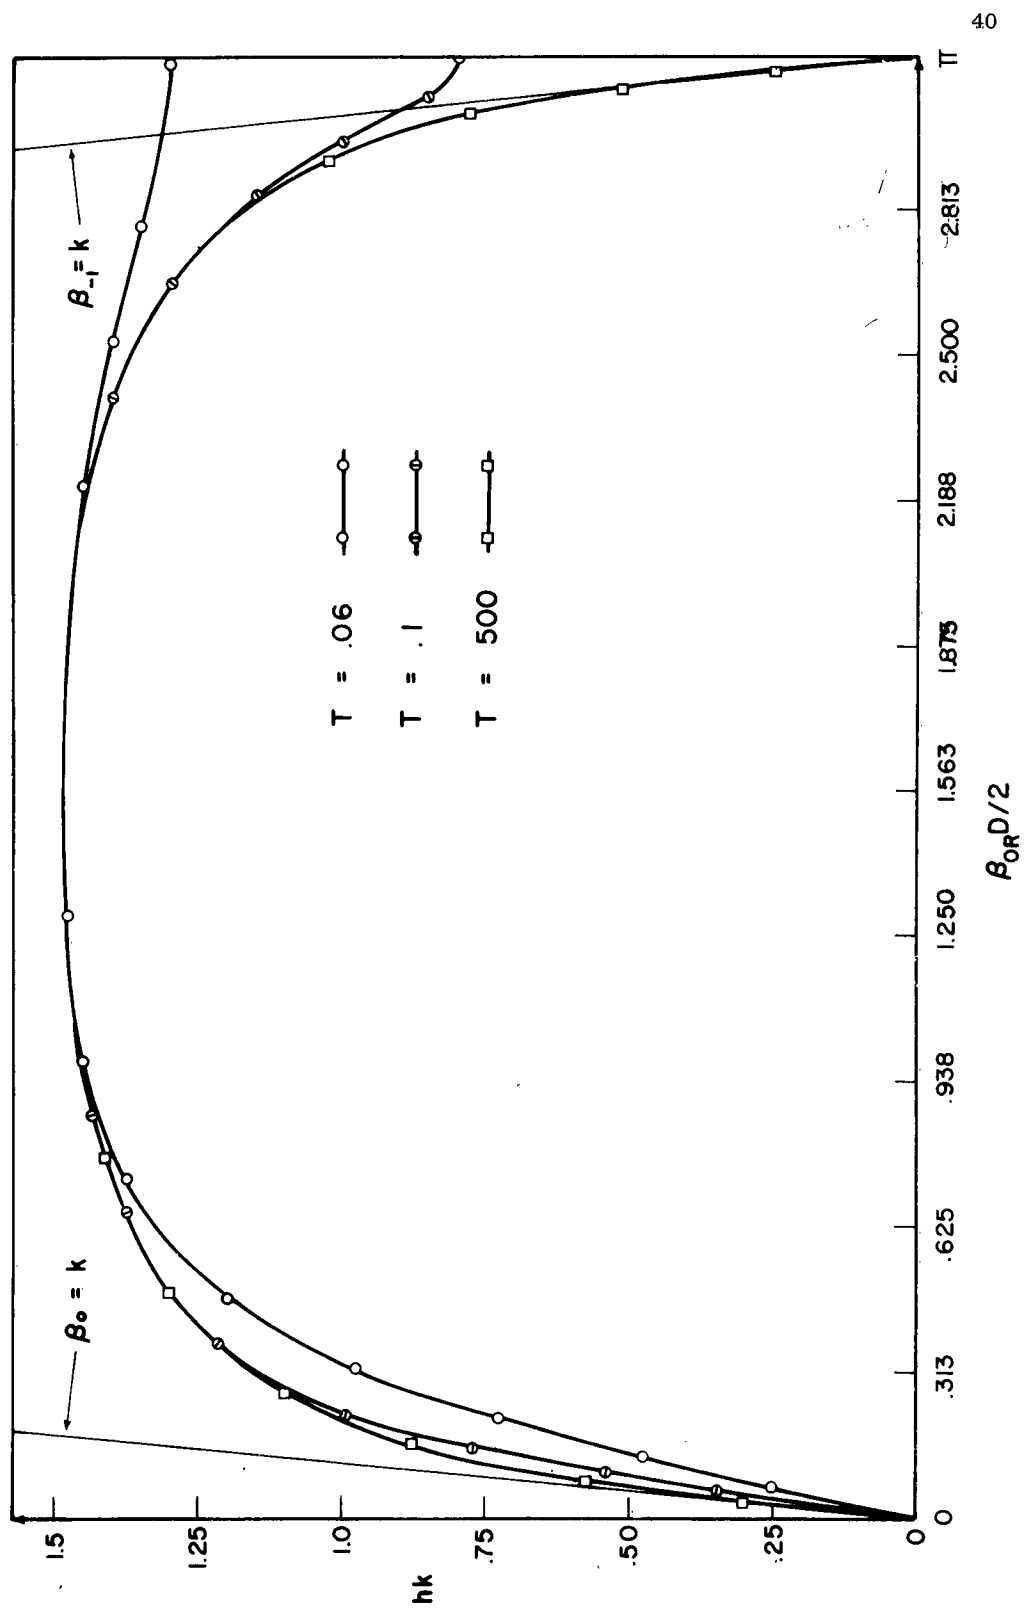


Figure 8.2

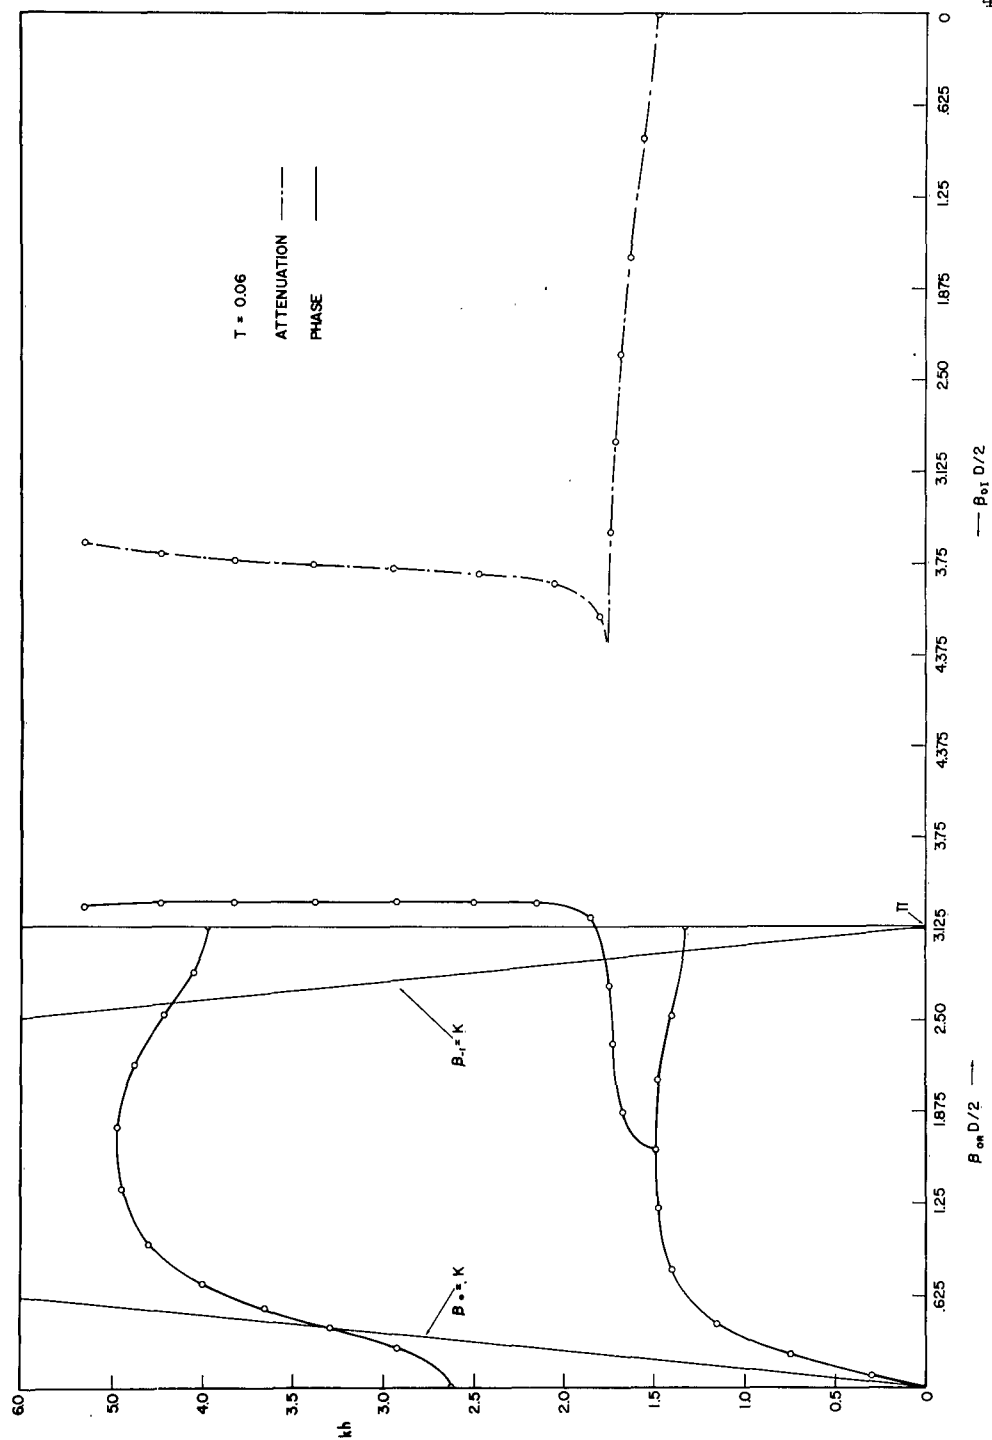


Figure 8.3

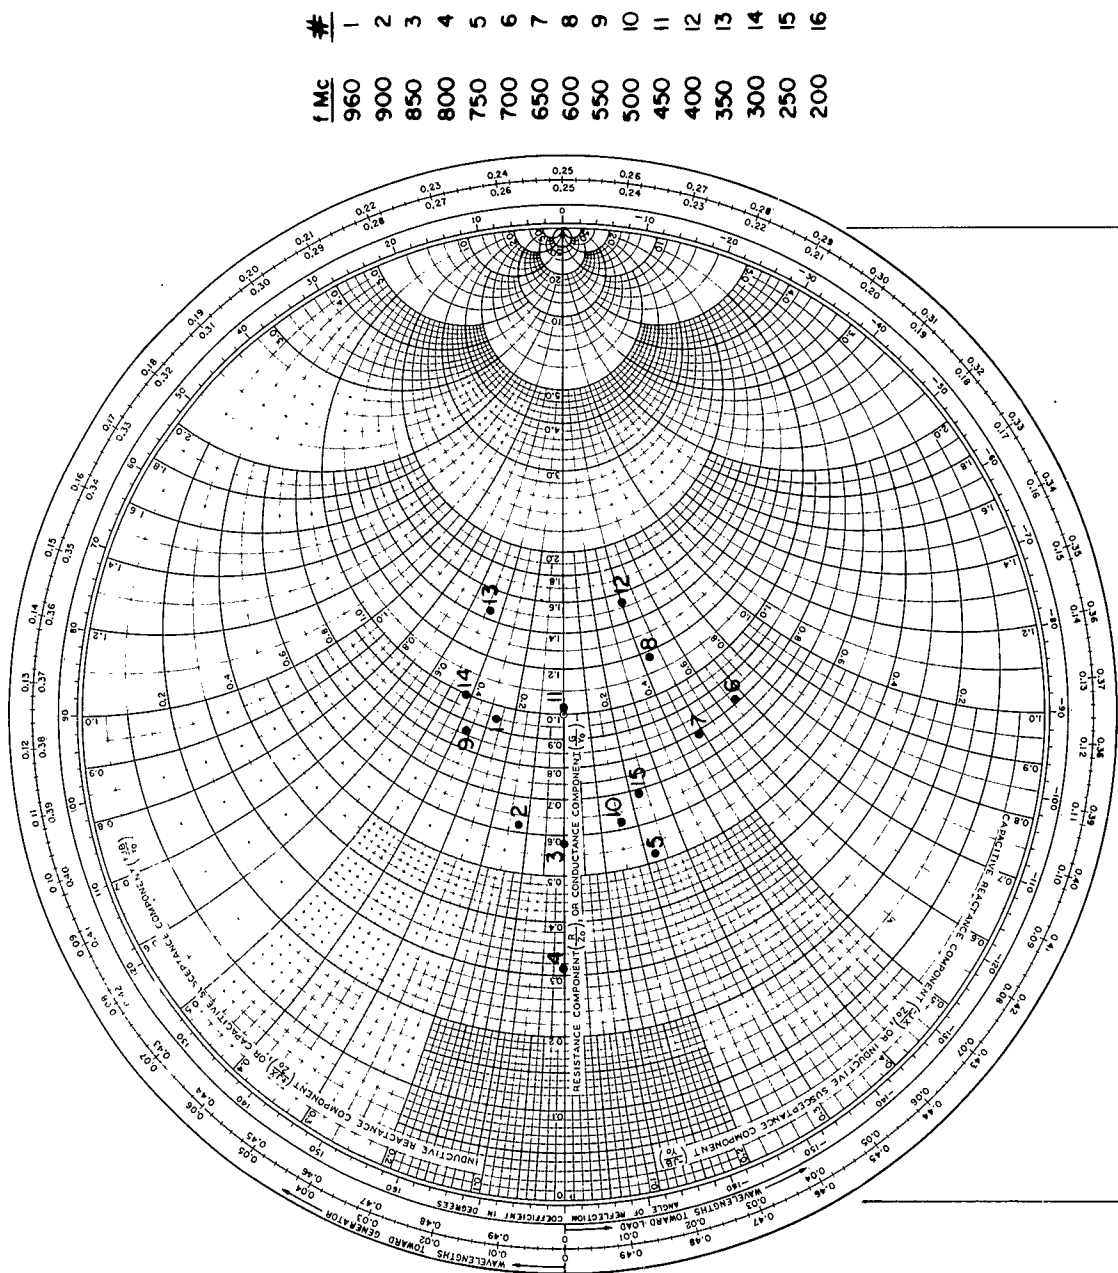


Figure 8.4. Input impedance of LP folded dipole array referred to 300 ohms

(c) Log-Periodic Folded Dipole Array

The Log-Periodic Folded Dipole Array, the principle of design of which is the same as used for constructing the feed system of the Letter-Rack Antenna, has been studied further. Main effort was devoted toward measuring the impedance of the antenna, since the patterns which were measured during the last quarter looked quite encouraging. An impedance model was built for the frequency range 250-900 MCS. The impedance plots are shown in Figure 8.4. The impedance measurements were obtained on the open 300 Ω Lecher wire line.

Future work: It is planned to build several variants of this basic structure, as for example the V-array.

(d) Log-Periodic Delta Array

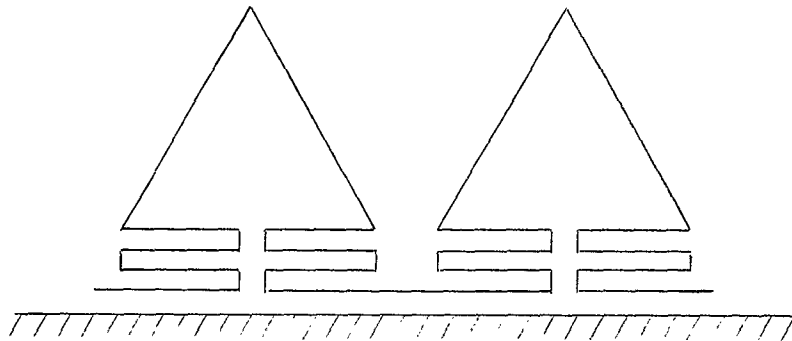


Figure 8.5

Some variants of the Delta array, one form of which was reported in the last quarterly report, are presently being considered. One such configuration is shown in Figure 8.5.

8.3 Plans for the Next Interval

A study of different versions of the Δ - array will be continued.

9. TRANSMISSION BETWEEN ANTENNAS WHEN THE FAR FIELD APPROXIMATION DOES NOT APPLY

9.1 Purpose

The purpose of this research is to determine the transmission coefficient between antennas located in their near fields.

9.2 Factual Data

9.2.1 Research Staff - J. R. Pace, G. A. Deschamps

9.2.2 Status

Work on the section has been discontinued.

10. RADIATING LENS ILLUMINATED FROM A GOUBAU BEAM-WAVEGUIDE

10.1 Purpose

The purpose of this project is to determine the feasibility of developing a high resolution millimeter antenna by coupling from a Goubau beam-waveguide to a radiating lens.

10.2 Factual Data

10.2.1 Research Staff - P. E. Mast, J. F. Kauffman

10.2.2 Status

During this reporting period the Goubau beam-waveguide experimental setup was moved into a new Emerson-Cummings Anechoic Chamber, and the transmitting and receiving systems were optimized. This new facility allows for greatly refined measurements at millimeter wavelengths.

A number of mechanical refinements of the beam-waveguide have been completed. Pointers and dials have been added to the lens holders, and the reflector-type line shield has been replaced by an absorbing shield. These changes have improved the pattern symmetry, and have made it much easier to make pattern measurements. An absorbing ring placed on the aperture lens holder gives a decrease of several db in the first side lobe.

To check whether or not the fundamental mode had been established on the beam-waveguide, patterns were taken with beam-waveguides of 5, 6, 7, and 8 interactions. It was found that these changes in the number of interactions produced no noticeable change in the radiation patterns.

Theoretical work has been done on the computation of the side lobe level of a truncated Gaussian aperture distribution, and on a more accurate lens design using a Fresnel approximation.

10.3 Plans for the Next Interval

Work will be continued on the calculation of the theoretical side lobe level and on the Fresnel approximation lens design. The design and construction of a lens to focus the antenna beam at a point in the near field will be undertaken.

11. ZONE PHASE PLATES

11.1. Purpose

The purpose of this study is to investigate the operation of zone phase plates.

11.2 Factual Data11.2.1 Research Staff - H. A. Shubert11.2.2 Status

The general problem of the scattering of a plane E.M. wave by an infinite periodic grating of parallel dielectric bars is best formulated as an infinite set of equations. The unknowns in these equations are the complex amplitudes of the space harmonics which appear because of the periodicity of the structure. The equations are not generally directly solvable, so some iteration procedure must be used. The method of iteration being used in the present case is one which has proven very effective in other problems. It is a matrix iteration method. The equations for the space harmonic amplitudes may be written in matrix form as:

$$MA = F \quad (11.1)$$

where A is a column matrix of the unknown complex amplitudes; M, the coefficient matrix, is a function of the physical parameters, and is a square matrix; and F is a column matrix derived from the incident wave.

If the inverse of M were known, the problem would be solved. Since it is not, an iteration procedure is necessary.

The matrix M is separated into two parts

$$M = M_0 + M_1 \quad (11.2)$$

with the characteristics that the inverse of M_0 is known, and the matrix M_1 is in some sense small compared to M_0 . It will be possible to write

$$M^{-1} = \left[M_0 (1 + M_0^{-1} M_1) \right]^{-1} = \left[1 + M_0^{-1} M_1 \right]^{-1} M_0^{-1} \quad (11.3)$$

Then if the product $M_0^{-1} M_1$ is small compared to the unit matrix, (in some sense), so that the first term on the right hand side may be expanded in a convergent series of matrices,

$$\left[I + M_0^{-1} M_1 \right]^{-1} = \left[I \right] - \left[M_0^{-1} M_1 \right] + \left[M_0^{-1} M_1 \right]^2 - \dots \quad (11.4)$$

In the method chosen for decomposition the M_0 matrix is taken to be of the double alternate form, which has a known inverse. By using this form it has been shown possible, in other problems, to sum directly some of the terms of the matrix in Equation (11.4), and show that they were the dominant contributions.

Unfortunately, this method of decomposition of the matrix, if used directly, leads to an indeterminate form for M_0 . That is, M_0 has two sets of two identical rows.

A modification for the decomposition has been found which resolves the indeterminacy, and still retains the desired simple form. No further work has been finished on this formulation, but numerical calculations are in progress to determine whether it is indeed feasible.

11.3 Plans for the Next Interval

Work will continue on this project, both theoretical and experimental.

12. STUDY OF A CLASS OF GRATING PROBLEMS

12.1 Purpose

The purpose of this investigation is to study the diffraction properties of a class of uniform and modulated grating type structures. The Brillouin diagrams for these structures will be computed, and the scattering properties of the gratings in both the near and far field regions will be investigated.

12.2 Factual Data

12.2.1 Research Staff - J. R. Pace, R. Mittra

12.2.2 Status

A paper entitled, "A New Technique for Solving a Class of Boundary Value Problems", was presented at the 1963 Spring URSI meeting in May. This advanced a technique for obtaining a formally exact solution for a broad class of problems, of which the grating problems previously discussed² are a part.

The field solution which is valid both for near and far field calculations is obtained in terms of a matrix representation, the matrix being of infinite order. The matrix elements are expressible in terms of the "scattering coefficients" of an auxiliary problem. This auxiliary problem is one which can be solved exactly by the Weiner-Hopf, function-theoretic, or other rigorous methods. While it is true that the present solution is expressed in terms of an infinite series, it is likely that the dominant terms in the series can be separated from the whole. This method has been applied to certain waveguide discontinuity problems and some numerical calculations have been made. Some of these will be presented in this section.

A detailed description of this technique will be made in a forthcoming technical report, presently in preparation. It is hoped that this report will be released this summer. The central idea behind this method is not difficult to grasp, but it is novel, and it should be presented with a proper explanation.

As a preliminary to studying the grating problems, a detailed study of some waveguide discontinuity problems will be made. These problems are quite interesting for their own sake. However, by handling the waveguide discontinuity problems, further insight into the general technique will be gained. This insight will be useful in handling the grating problems.

To illustrate that the dominant terms in the series representation can be identified and easily computed, consider the inhomogeneous bifurcated waveguide. Marcuvitz³ has considered the homogeneous bifurcated guide. Cronson⁴ has solved approximately the inhomogeneous bifurcated guide by solving a truncated set of algebraic equations.

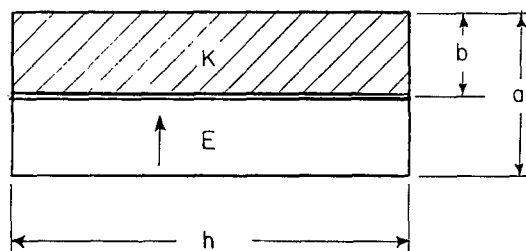


Figure 12.1. Inhomogeneous bifurcated waveguide

Instead of solving the boundary value problem above in the rectangular geometry, it is easier to solve the parallel plate waveguide problem.

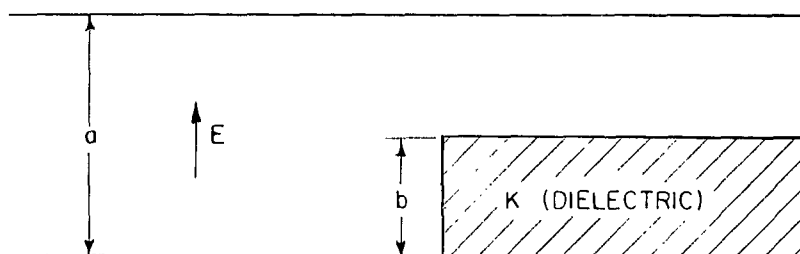


Figure 12.2. Equivalent parallel plate waveguide problem

The reflection coefficient for the dominant mode in the rectangular guide can be computed simply from the expression for the reflection coefficient of the 2^{nd} TEM mode in the parallel plate guide by replacing k_o^2 by $k_o^2 - (\frac{\pi}{h})^2$. See, for instance, Marcuvitz³.

Computations were made for the case where $b = a/2$. For this case

$$\Gamma_{\text{input}} \sim \frac{1}{2} \frac{\Gamma(o)}{1 - \Gamma(o) S_{11}}$$

where

$$S_{11} = \frac{1}{2} \left[-4\epsilon \ln 2 + 4 \sum_{n=1}^{\infty} \left\{ \tan^{-1} \frac{1}{\{(n/\epsilon)^2 - 1\}^{1/2}} - \frac{1}{n/\epsilon} \right\} \right. \\ \left. - 2 \sum_{n=1}^{\infty} \left\{ \tan^{-1} \frac{1}{\{(n/2\epsilon)^2 - 1\}^{1/2}} - \frac{1}{n/2\epsilon} \right\} \right], \quad 0 \leq \lambda \leq a/2$$

$$\text{and } \epsilon = \frac{k_o a}{2\pi} = \frac{a}{\lambda}; \quad \Gamma(o) = \frac{1 - \sqrt{K}}{1 + \sqrt{K}},$$

K = dielectric constant.

The above expression represents the first terms in the series for Γ_{input} . Note that in the limiting case

$$\lim_{K \rightarrow \infty} \Gamma(o) \rightarrow -1$$

the dielectric looks far away like a metallic step.

Numerical comparisons were made with the results of other author's work. In particular, Williams⁵ has calculated by means of the Weiner-Hopf technique

followed by a formulation in terms of an infinite set of equations, the reflection coefficient from a metallic step discontinuity in the parallel plate guides. Results are compared below.

Reflection Coefficient		
$\epsilon = a/\lambda$	Author's Results	Williams' Results
0.4	-.408 $\angle 23.6^\circ$	-.438 26°
0.7	-.544 $\angle 2.1^\circ$	-.529 No phase information
0.9	-.523 $\angle 1.2^\circ$	.500

(Note that $\epsilon > .5$ means that more than the dominant mode is allowed to propagate).

12.3 Plans for the Next Interval

The technical report will be completed and issued. Further studies on a variety of problems will be made. The use of the University of Illinois IBM 7090 digital computer is contemplated.

13. FOCUSING OF RADIATION FROM A BUNCHED CERENKOV BEAM

13.1 Purpose

The purpose of this study is to investigate methods of coupling energy from a fast wave line source, such as Cerenkov radiators, into an antenna beam, a radiating aperture, or other device.

13.2 Factual Data

13.2.1 Research Staff - H. A. Shubert

13.2.2 Status

This project, which had been discontinued, is reopened for this report in order to publish the results of a theoretical calculation which has been made and which clarifies results obtained experimentally on the Archimedes Spiral Grating Cerenkov Coupler. The conclusion is drawn that the coupler performs very near to the optimum to be expected from its design. It produces a circularly polarized lobe normal to the coupler, which is nearly frequency independent over the frequency range of the waveguide feed.

In earlier reports,⁵ the design of a Cerenkov beam coupler was discussed. The coupler took the form of an Archimedes spiral grating, milled from plastic, which acted as a phase correcting device. (See Figure 13.1) The grating was designed by physical optics considerations. The Cerenkov beam was treated as a fast wave line source, radiating conical wave fronts. The grating spacing was made such as to bend the incident conical wave normal to the grating, and the spiral arrangement shifted the phase so that contributions radiated from opposite sides of the grating added constructively on the axis. The result was presumably a circular polarized lobe normal to the grating.

Experimental results confirmed that a spiral grating does produce a circularly polarized lobe off the normal to the grating when fed by a fast wave line source normal to and at the center of the grating. The fast wave line source was simulated by an array of slots inclined at an angle of five degrees to the axis of a waveguide, and cut in the narrow wall. The slots' spacing was tapered so as to provide a constant radiation along the length of the array. As it happens, the equivalent velocity of the line source simulated by such an array of slots, has a variation with frequency of just the right sort, that the grating spacing 2Δ needed to focus its radiation is:

$$2\Delta = 2a$$

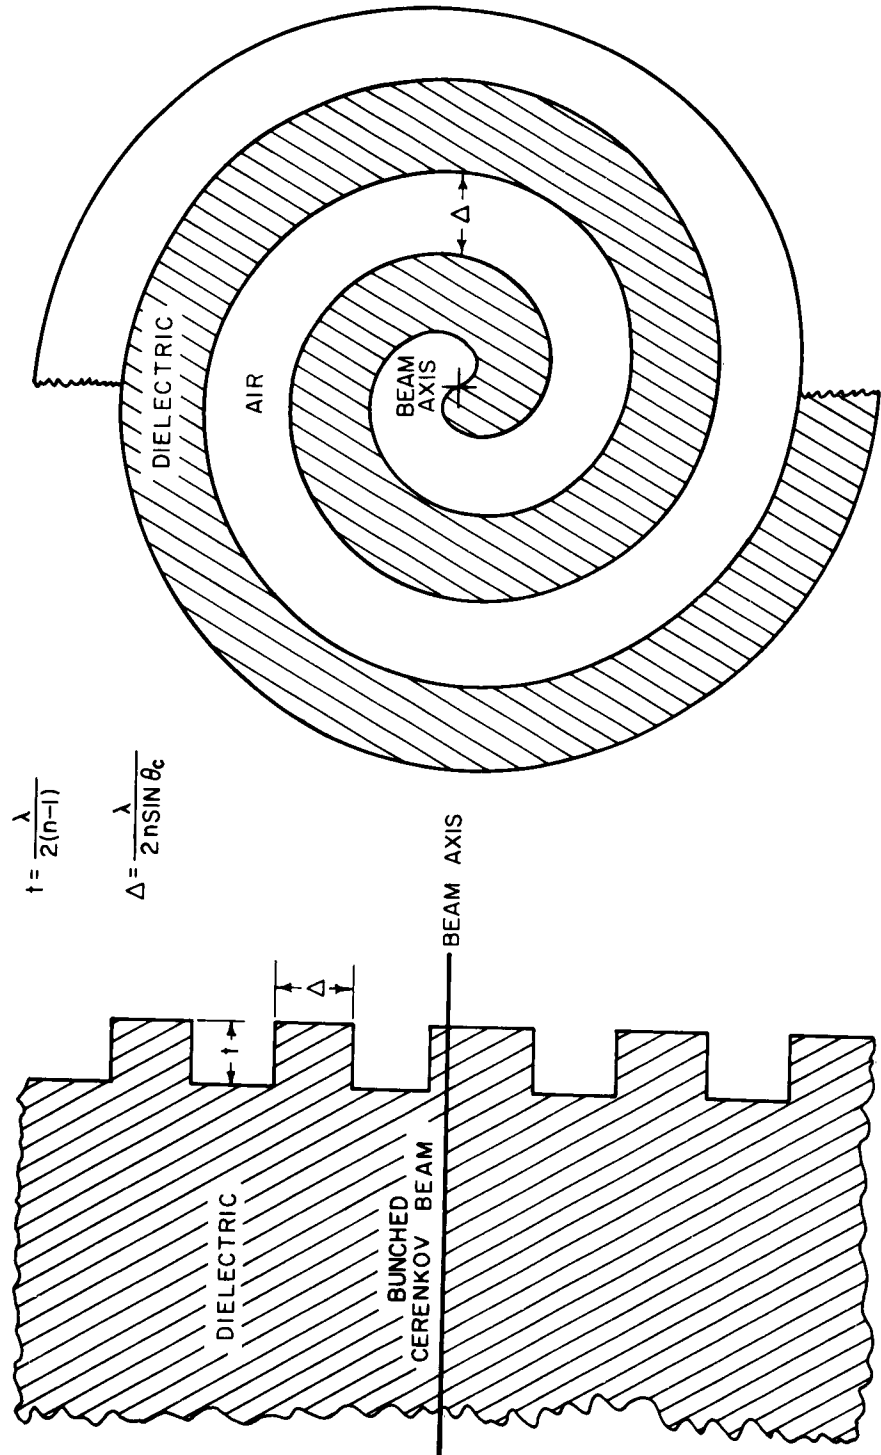


Figure 13.1. A Fresnel Zone Phase Plate for Focusing Cerenkov Radiation Into A Collimated Beam On Axis

where a is the width of the broad wall, independent of frequency.

Only the grating depth causes a frequency dependence. Indeed, the grating was found to produce a lobe on axis over at least a 1.5 to 1 frequency range (the limits of the test equipment). This lobe was almost frequency independent.

The experimental patterns also showed rather prominent side lobes, which were earlier ascribed to interaction between the source and grating producing nonuniform illumination of the grating. Since that time, however, a theoretical study of the pattern due to an optimum coupler has shown that probably only slightly better side lobe levels are possible without some more complicated control of the aperture illumination.

To study the theoretical optimum pattern, an aperture illumination of the form:

$$\begin{aligned} E_x(p^1, \phi^1) &= e^{i\phi^1} \sqrt{p^1} \begin{Bmatrix} \cos \phi^1 \\ \cos \phi^1 \end{Bmatrix} \\ E_r(p^1, \phi^1) &= e^{i\phi^1} \sqrt{p^1} \begin{Bmatrix} \cos \phi^1 \\ \cos \phi^1 \end{Bmatrix} \end{aligned}$$

is assumed. This corresponds to two distinct phase transformations imposed on an incident conical wave, and to ignoring the component of the incident wave along the axis.

The phase shifts are: a linear transformation $\exp\{jk p^1 \sin \theta_c\}$ where θ_c is the angle of propagation of the conical wave with respect to the axis, to focus the wave along the normal to the transformer; and a transformation linear with angle, $\exp\{j\phi^1\}$ to correct the polarization. The pattern function is then given by

$$P_x(u) = \int_0^a \sqrt{p^1} dp^1 \int_0^{2\pi} d\phi^1 e^{j\phi^1} e^{jk p^1 \sin \theta} \cos(\phi - \phi^1) \cos \phi^1$$

$$P_r(u) = \int_0^a \sqrt{p^1} dp^1 \int_0^{2\pi} d\phi^1 e^{j\phi^1} e^{jk p^1 \sin \theta} \cos(\phi - \phi^1) \sin \phi^1$$

where θ and ϕ are the usual polar angles measured from and around the z axis, normal to the aperture.

The integration on ϕ^1 may be performed exactly to give

$$P_x(\theta, \phi) = \frac{2\pi}{k \sin \theta} \int_0^{k a \sin \theta} \sqrt{u} du \left\{ J_0(u) - e^{2j\phi} J_2(u) \right\}$$

$$P_r(\theta, \phi) = \frac{2\pi}{k \sin \theta} \int_0^{k a \sin \theta} \sqrt{u} du \left\{ iJ_0(u) + j e^{j2\phi} J_2(u) \right\}$$

The term involving the zero order Bessel function, $J_0(u)$ may be seen to yield a circularly polarized lobe on axis ($\theta = 0$). The other term involving the second order Bessel function $J_2(u)$ gives a rather large side lobe whose state of polarization varies with angle ϕ around the axis. This lobe is situated at $k a \sin \theta =$ the first zero of $J_2(u)$.

The results of a numerical integration of the above equations is shown in Figure 13.2a and 13.2b. For comparison, an experimental pattern of the actual grating is plotted on the same graphs. The similarity is obvious. The lack of nulls in the experimental pattern may be explained by the presence of a small cross polarized component in the incident wave due to the inclination of the slots.

The slight spread of the experimental pattern from the theoretical optimum may be due to the previously postulated interaction of the grating with the array of slots, or a slight variation of the velocity of the waveguide mode due to the slots.

It may be seen, however, that the experimental pattern is as close to the theoretical optimum as could reasonably be expected. It is therefore concluded that the design performed successfully.

13.3 Plans for the Next Interval

No more work is planned on this project.

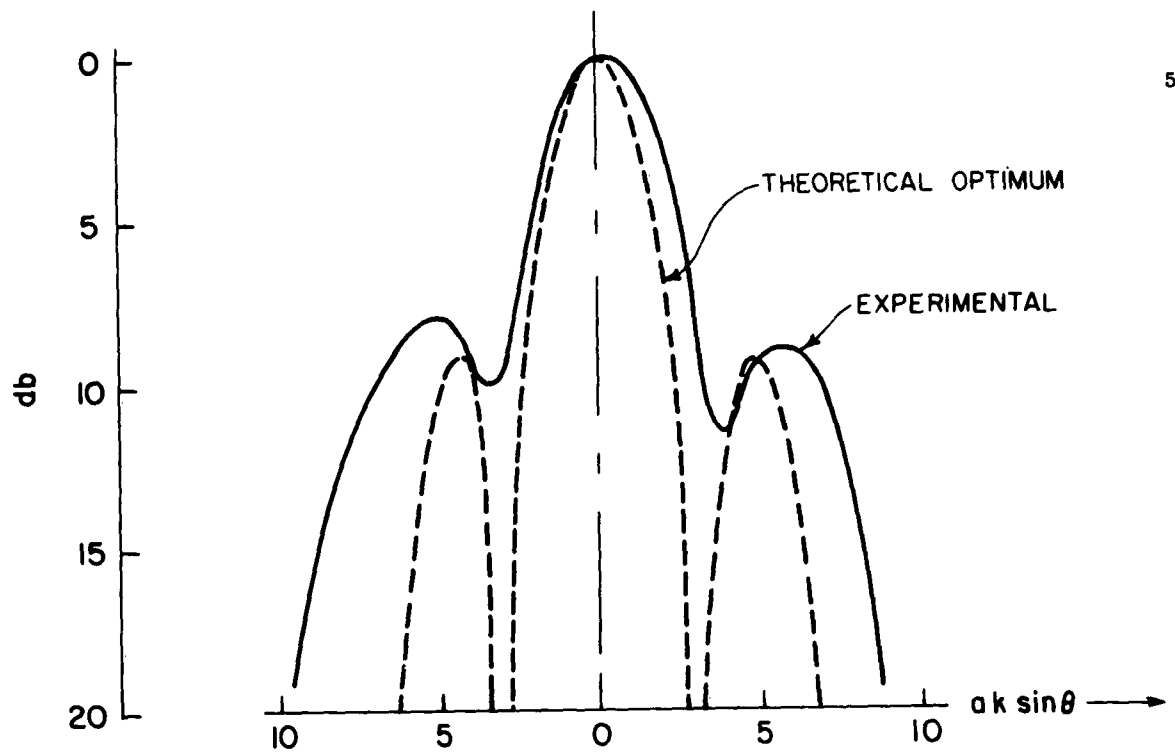


Figure 13.2a. Spiral Cerenkov Coupler - Horizontal Polarization

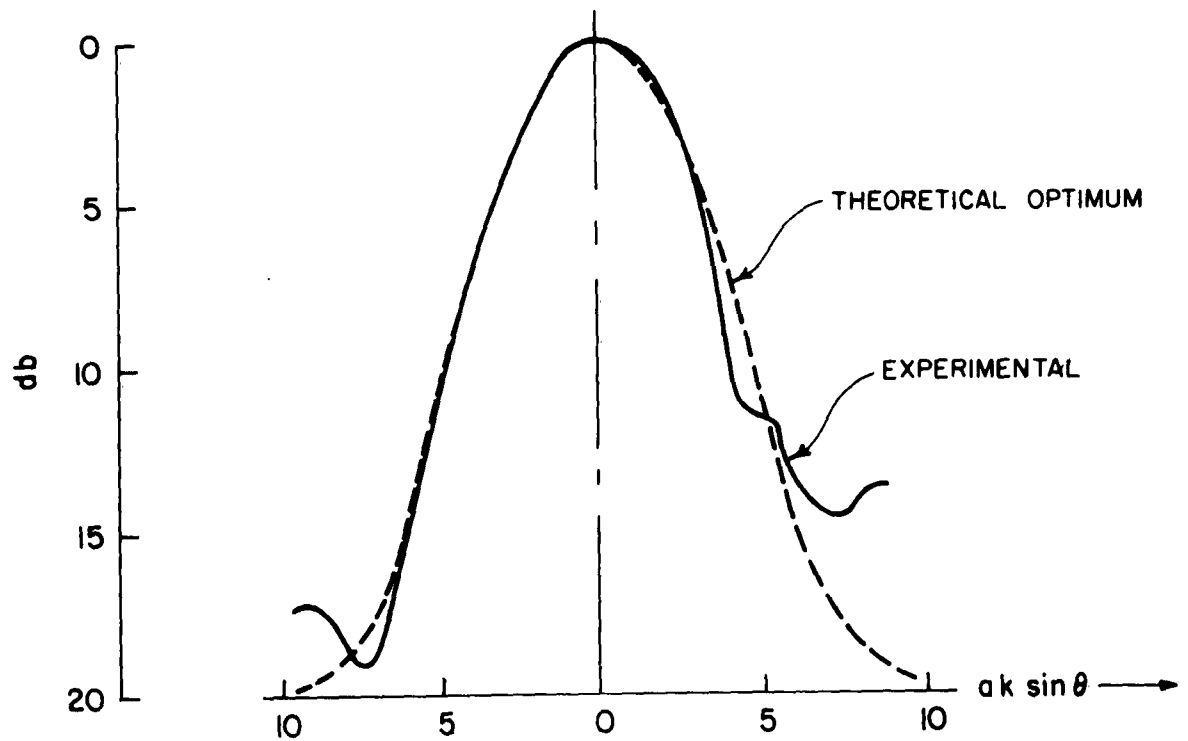


Figure 13.2b. Spiral Cerenkov Coupler - Vertical Polarization

References

1. Quarterly Progress Report No. 2, Contract No. AF 33(657)-10474, "Research Studies of Problems Related to Antennas", Engineering Experiment Station, University of Illinois, Urbana, Illinois, April 15, 1963, Equation 84.
2. Ibid., pg. 42.
3. N. Marcuvitz, "Waveguide Handbook", Vol. 10, Rad. Lab. Series, McGraw-Hill, 1951.
4. H. M. Cronson, "Equivalent Circuit Parameters for an Inhomogeneous Bifurcated Waveguide", Contract AF19(604)4561/13, Brown University, Providence, R. I., September 1961.
5. Williams, W. E., "Step Discontinuities in Waveguides", Res. Rep. No. EM-77, Institute of Mathematical Science, New York University, New York, New York, April 1955.

DISTRIBUTION LISTOne copy each unless otherwise indicated

Armed Services Technical Information
Agency
Attn: TIP-DR
Arlington Hall Station
Arlington 12, Virginia (20 copies)

Air Force Systems Command (SCSE)
Andrews Air Force Base
Washington 25, D. C.

Aeronautical Systems Division
Attn: ASRNOF-3
Wright-Patterson Air Force Base
Ohio (5 copies)

Aeronautical Systems Division
Attn: ASNSD, Mr. Mulligan
Wright-Patterson Air Force Base
Ohio

Aeronautical Systems Division
Attn: ASAPRL
Wright-Patterson Air Force Base
Ohio

Aeronautical Systems Division
Attn: ASRSA - Library
Wright-Patterson Air Force Base
Ohio

Aeronautical Systems Division
Attn: ASNPRS
Wright-Patterson Air Force Base
Ohio

Commander
Air Force Systems Command
Aeronautical Systems Division
Wright-Patterson Air Force Base
Ohio
Attn: ASNCSO

Commander
Air Force Systems Command
Attn: ASNPOT, Mr. Finocharo
Aeronautical Systems Division
Wright-Patterson Air Force Base
Ohio

Commander
Foreign Technology Division
Attn: TD-E1
Wright-Patterson Air Force Base
Ohio

Air Force Cambridge Research Laboratory
Attn: CRRD
Laurence G. Hanscom Field
Bedford, Massachusetts

Commander
Air Force Missile Test Center
Technical Library
Patrick Air Force Base
Florida

Commander
Air Force Missile Development Center
Attn: Technical Library
Holloman Air Force Base
New Mexico

Air Force Ballistic Missile Division
Attn: Technical Library, Air Force
Unite Post Office
Los Angeles, California

Commanding Officer
USARDVL
Attn: SIGRA/SL-NAI
Ft. Monmouth, New Jersey

Chief, Bureau of Ships
Attn: Code 312
Main Navy Building
Washington 25, D. C.

Commander
Air Proving Ground Center (AFSC)
Headquarters 3208th Test Group
Eglin Air Force Base, Florida

Director
Ballistics Research Laboratory
Attn: Ballistics Measurement Lab.
Aberdeen Proving Ground, Maryland

National Aeronautics & Space Adm.
Attn: Librarian
Langley Field, Virginia

Rome Air Development Center
Attn: RALTM
Griffiss Air Force Base
New York

Rome Air Development Center
Attn: RAWED, Mr. R. F. Davis
Griffiss Air Force Base
New York

Commander
Research & Technology Division
Attn: ETHR, Maj. J. Gregory
Bolling Air Force Base
Washington 25, D. C.

Office of Chief Signal Officer
Engineering & Technical Division
Attn: SIGNET-5
Washington 25, D. C.

Commanding Officer
U. S. Army Electronics R&D Activity
Attn: SELWS-ED
White Sands, Missile Range, New Mexico

Director
Surveillance Department
Evans Area
Attn: Technical Document Center
Belman, New Jersey

Commander
U. S. Naval Air Test Center
Attn: WST-54, Antenna Section
Patuxent River, Maryland

Material Laboratory, Code 932
New York Naval Shipyard
Brooklyn 1, New York

Director
Naval Research Laboratory
Attn: Code 5200
Washington 25, D. C.

Director
Air University Library
Attn: 3T-AUL-59-30
Maxwell Air Force Base
Alabama

Commanding General
White Sands Missile Range
Attn: ORDBS-OM-Tech Library RR-312
New Mexico

Commanding Officer
Diamond Ordnance Fuse Laboratories
Attn: 240
Washington 25, D. C.

Director
U. S. Navy Electronics Laboratory
Attn: Library
San Diego 52, California

Adams-Russell Company
280 Bear Hill Road
Attn: Library (Antenna Section)
Waltham 54, Massachusetts

Aero Geo Astro
Attn: Security Officer
1200 Duke Street
Alexandria, Virginia

Mr. I. S. Golden
NASA Goddard Space Flight Center
Antenna Systems Branch, Code 525
Greenbelt, Maryland

Airborne Instruments Labs., Inc.
Attn: Librarian (Antenna Section)
Walt Whitman Road
Melville, L.I., New York

American Electronic Labs
Box 552 (Antenna Section)
Lansdale, Pennsylvania

Andrew Alfred Consulting Engineers
Attn: Librarian (Antenna Section)
299 Atlantic Avenue
Boston 10, Massachusetts

Amphenol-Borg Electronic Corporation
Attn: Librarian (Antenna Section)
2801 S. 25th Avenue
Broadview, Illinois

Bell Aircraft Corporation
Attn: Technical Library
(Antenna Section)
Buffalo 5, New York

Bendix Radio Division of
Bendix Aviation Corporation
Attn: Technical Library
(For Dept. 462-4)
Baltimore 4, Maryland

Antenna Systems, Inc.
Manager Documentation
Grenier Field
Manchester, New Hampshire

Boeing Airplane Company
Aero Space Division
Attn: Technical Library
M/F Antenna & Radomes Unit
Seattle, Washington

Boeing Airplane Company
Attn: Technical Library
M/F Antenna Systems Staff Unit
Wichita, Kansas

Chance Vought Aircraft, Inc.
THRU: Bu AER Representative
Attn: Technical Library
M/F Antenna Section
P. O. Box 5907
Dallas 22, Texas

Collins Radio Company
Research Division
Attn: Technical Library
Cedar Rapids, Iowa

Convair
Ft. Worth Division
Attn: Technical Library (Antenna
Section)

Grants Lane
Fort Worth, Texas

Convair
Attn: Technical Library
(Antenna Section)
P. O. Box 1050
San Diego 12, California

Dalmo Victor Company
Attn: Technical Library
(Antenna Section)
1515 Industrial Way
Belmont, California

Dorne & Margolin, Inc.
Attn: Technical Library
(Antenna Section)
30 Sylvester Street
Westbury, L. I., New York

Dynatronics, Inc.
Attn: Technical Library
(Antenna Section)
Orlando, Florida

Electronic Communications, Inc.
Research Division
Attn: Technical Library
1830 York Road
Timonium, Maryland

Fairchild Engine & Airplane Corporation
Fairchild Aircraft & Missiles Division
Attn: Technical Library
(Antenna Section)
Hagerstown 10, Maryland

Georgia Institute of Technology
Engineering Experiment Station
Attn: Technical Library
M/F Electronics Division
Atlanta 13, Georgia

General Electric Company
Electronics Laboratory
Attn: Technical Library
Electronics Park
Syracuse, New York

General Electronic Labs., Inc.
Attn: Technical Library
(Antenna Section)
18 Ames Street
Cambridge 42, Massachusetts

General Precision Lab., Division of
General Precision, Inc.
Attn: Technical Library
(Antenna Section)
63 Bedford Road
Pleasantville, New York

Goodyear Aircraft Corporation
Attn: Technical Library
M/F Dept. 474
1210 Massillon Road
Akron 15, Ohio

Granger Associates
Attn: Technical Library
(Antenna Section)
974 Commercial Street
Palo Alto, California

I-T-E Circuit Breaker Company
Special Products Division
Attn: Research Library
601 E. Erie Avenue
Philadelphia 34, Pennsylvania

General Mills Electronics Division
Attn: Dr. H. P. Raabe
2003 East Hennepin Avenue
Minneapolis 13, Minnesota

Grumman Aircraft Engineering Corporation
Attn: Technical Library
M/F Avionics Engineering
Bethpage, New York

The Hallicrafters Company
Attn: Technical Library
(Antenna Section)
4401 W. Fifth Avenue
Chicago 24, Illinois

Hoffman Laboratories, Inc.
Attn: Technical Library
(Antenna Section)
Los Angeles 7, California

John Hopkins University
Applied Physics Laboratory
8621 Georgia Avenue
Silver Springs, Maryland

Hughes Aircraft Corporation
Attn: Technical Library
(Antenna Section)
Florence & Teal Street
Culver City, California

ITT Laboratories
Attn: Technical Library
(Antenna Section)
500 Washington Avenue
Nutley 10, New Jersey

U. S. Naval Ordnance Laboratory
Attn: Technical Library
Corona, California

Lincoln Laboratories
Massachusetts Institute of Technology
Attn: Document Room
P. O. Box 73
Lexington 73, Massachusetts

Litton Industries
Attn: Technical Library
(Antenna Section)
4900 Calvert Road
College Park, Maryland

John Hopkins University
Radiation Laboratory
Attn: Library
1315 St. Paul Street
Baltimore 2, Maryland

Lockheed Missile & Space Division
Attn: Technical Library (M/F Dept-
58-40, Plant 1, Bldg. 130)
Sunnyvale, California

The Martin Company
Attn: Technical Library
(Antenna Section) Mail No. T-38
P. O. Box 179
Denver 1, Colorado

The Martin Company
Attn: Technical Library (Antenna
Section)
Baltimore 3, Maryland

The Martin Company
Attn: Technical Library (M/F
Microwave Laboratory)
Box 5837
Orlando, Florida

W. L. Maxson Corporation
Attn: Technical Library
(Antenna Section)
460 West 34th Street
New York 1, New York

McDonnell Aircraft Corporation
Attn: Technical Library
(Antenna Section)
Box 516
St. Louis 66, Missouri

Melpar, Inc.
Attn: Technical Library
(Antenna Section)
3000 Arlington Blvd.
Falls Church, Virginia

University of Michigan
Radiation Laboratory
Willow Run
201 Catherine Street
Ann Arbor, Michigan

Mitre Corporation
Attn: Technical Library (M/F Electronic
Warefare Dept. D-21)
Middlesex Turnpike
Bedford, Massachusetts

Northeastern University
Attn: Dodge Library
Boston 15, Massachusetts

North American Aviation, Inc.
Attn: Technical Library (M/F
Engineering Dept.)
4300 E. Fifth Avenue
Columbus 16, Ohio

North American Aviation, Inc.
Attn: Technical Library
(M/F Dept. 56)
International Airport
Los Angeles, California

Northrop Corporation
NORAIR Division
1001 East Broadway
Attn: Technical Information (3924-3)
Hawthorne, California

Ohio State University Research
Foundation
Attn: Technical Library
(M/F Antenna Laboratory)
1314 Kinnear Road
Columbus 12, Ohio

Ohio State University Research
Foundation
Attn: Dr. C. H. Walter
1314 Kinnear Road
Columbus 12, Ohio

Philco Corporation
Government & Industrial Division
Attn: Technical Library
(M/F Antenna Section)
4700 Wissachickon Avenue
Philadelphia 44, Pennsylvania

Westinghouse Electric Corporation
Air Arms Division
Attn: Librarian (Antenna Lab)
P. O. Box 746
Baltimore 3, Maryland

Wheeler Laboratories
Attn: Librarian (Antenna Lab)
Box 561
Smithtown, New York

Electrical Engineering Research
Laboratory
University of Texas
Box 8026, University Station
Austin, Texas

University of Michigan Research
Institute
Electronic Defense Group
Attn: Dr. J. A. M. Lyons
Ann Arbor, Michigan

Radio Corporation of America
RCA Laboratories Division
Attn: Technical Library
(M/F Antenna Section)
Princeton, New Jersey

Radiation, Inc.
Attn: Technical Library (M/F)
Antenna Section
Drawer 37
Melbourne, Florida

Ramo-Wooldridge Corporation
Attn: Librarian (Antenna Lab)
Canoga Park, California

Rand Corporation
Attn: Librarian (Antenna Lab)
1700 Main Street
Santa Monica, California

Rantec Corporation
Attn: Librarian (Antenna Lab)
23999 Ventura Blvd.
Calabasas, California

Raytheon Corporation
Equipment Division
Library - J. Portschi
P. O. Box 520
Waltham 54, Massachusetts

Republic Aviation Corporation
Applied Research & Development
Division
Attn: Librarian (Antenna Lab)
Farmingdale, New York

Sanders Associates
Attn: Librarian (Antenna Lab)
95 Canal Street
Nashua, New Hampshire

Southwest Research Institute
Attn: Librarian (Antenna Lab)
8500 Culebra Road
San Antonio, Texas

H. R. B. Singer Corporation
Attn: Librarian (Antenna Lab)
State College, Pennsylvania

Sperry Microwave Electronics Company
Attn: Librarian (Antenna Lab)
P. O. Box 1828
Clearwater, Florida

Sperry Gyroscope Company
Attn: Librarian (Antenna Lab)
Great Neck, L. I., New York

Stanford Electronic Laboratory
Attn: Librarian (Antenna Lab)
Stanford, California

Stanford Research Institute
Attn: Librarian (Antenna Lab)
Menlo Park, California

Sylvania Electronic System
Attn: Librarian (M/F Antenna &
Microwave Lab)
100 First Street
Waltham 54, Massachusetts

Sylvania Electronic System
Attn: Librarian (Antenna Lab)
P. O. Box 188
Mountain View, California

Technical Research Group
Attn: Librarian (Antenna Section)
2 Aerial Way
Syosset, New York

Ling Temco Aircraft Corporation
Temco Aircraft Division
Attn: Librarian (Antenna Lab)
Garland, Texas

Texas Instruments, Inc.
Attn: Librarian (Antenna Lab)
6000 Lemmon Avenue
Dallas 9, Texas

A. S. Thomas, Inc.
Attn: Librarian (Antenna Lab)
355 Providence Highway
Westwood, Massachusetts

New Mexico State University
Head Antenna Department
Physical Science Laboratory
University Park, New Mexico

Bell Telephone Laboratories, Inc.
Whippany, New Jersey
Attn: Technical Reports Librarian
Room 2A-165

Robert G. Hansen
Aerospace Corporation
Box 95085
Los Angeles 45, California

Dr. Richard C. Becker
10829 Berkshire
Westchester, Illinois

Dr. W. M. Hall
Raytheon Company
Surface Radar and Navigation
Operations
Boston Post Road
Wayland, Massachusetts

Dr. Robert L. Carrel
Collins Radio Corporation
Antenna Section
Dallas, Texas

Dr. A. K. Chatterjee
Vice Principal and Head of the Department of Research
Birla Institute of Technology
P. O. Mesra
District-Ranchi (Bihar) India

University of Dayton
Research Institute
Attn: Professor Douglas Hanneman
300 College Park
Dayton, Ohio

Technische Hochschule
Attn: H. H. Meinke
Munich, Germany

NASA Goddard Space Flight Center
Attn: Antenna Branch
Mr. Lantz
Greenbelt, Maryland

Aeronautic Division
Ford Motor Company
Ford Road - Attn: Mr. J. M. Black
Newport Beach, California

Professor A. A. Oliver
Polytechnic Institute of Brooklyn
Microwave Research Institute
55 Johnson Street
Brooklyn 1, New York

U. S. Naval Ordnance Laboratory
Attn: Technical Library
Corona, California

Avco Corporation
Research and Advanced Development
Division
Attn: Research Library/T.A. Rupprecht
201 Lowell Street
Wilmington, Massachusetts

Raytheon Company
Missile and Space Division
Attn: Research Library
Bedford, Massachusetts

Teledyne Systems, Incorporated
Attn: Technical Library/Antenna Section
1625 E. 126th Street
Hawthorne, California

National Research Council
Attn: Microwave Section
Ottawa 2, Canada

Sichak Associates
Attn: W. Sichak
518 Franklin Avenue
Nutley, New Jersey

W. T. Patton
2208 New Albany Road
Cinn. Township
Riverton Post Office
New Jersey

Radio Corporation of America
Missile and Service Radar Division
Attn: Manager, Antenna Engineering
Skill Center
Moorestown, New Jersey

Advanced Development Laboratories, Inc.
Haines Street
Nashua, New Hampshire

Cornell Aeronautical Lab.
Attn: Research Library
Buffalo, New York

Fairchild Stratos Corporation
Aircraft-Missiles Division
Attn: Technical Library (Antenna Section)
Hagerstown 10, Maryland

General Electric Company
Light Military Electronics Department
French Road
Utica, New York

General Electric Company
General Engineering Laboratory
Bldg 371, Room 478
Schenectady, New York

Goodyear Aircraft Corporation
Antenna Department
Litchfield Park
Phoenix, Arizona

Laboratory for Electronics, Inc.
Antenna Department
1079 Commonwealth Avenue
Boston 15, Massachusetts

Lockheed Aircraft
Electronic and Armaments System Office
Burbank, California

Motorola, Inc.
Western Military Electronics Division
P. O. Box 1417
Scottsdale, Arizona

Philco Corporation
Antenna Section
3875 Fabian Way
Palo Alto, California

Space Technology Laboratory
Attn: Research Library
P. O. Box 95100
Los Angeles 45, California

Avco Corporation
Electronic and Ordnance Division
Attn: Technical Library
Cincinnati 41, Ohio

Bendix Corporation
Research Labs Division
Attn: G. M. Peace
Southfield (Detroit), Michigan

Douglas Aircraft Co., Inc.
Attn: MSSD Technical Library
(Antenna Section)
3000 Ocean Park Blvd.
Santa Monica, California

Emerson and Cuming, Inc.
Attn: E. J. Luoma
869 Washington Street
Canton, Massachusetts

Radioplane Company
Attn: Librarian (M/F Aerospace Lab)
1515 Rancho Conejo Blvd.
Newbury Park, California

Hughes Aircraft Company
Attn: Antenna Section
Fullerton, California

All Products Company
Attn: James Euzbee
Milverd Wells, Texas

Iscent De Santi, Chief
Exchange Section
Document Control Department
Scientific and Technical Information
Facility
P. O. Box 5700
Bethesda, Maryland

ANTENNA LABORATORY
TECHNICAL REPORTS AND MEMORANDA ISSUED

Contract AF33(616)-310

"Synthesis of Aperture Antennas," Technical Report No. 1, C. T. A. Johnk, October, 1954. * AD-52134.

"A Synthesis Method for Broadband Antenna Impedance Matching Networks," Technical Report No. 2, Nicholas Yaru, 1 February 1955. * AD 61049.

"The Asymmetrically Excited Spherical Antenna," Technical Report No. 3, Robert C. Hansen, 30 April 1955. * AD-66220.

"Analysis of an Airborne Homing System," Technical Report No. 4, Paul E. Mayes, 1 June 1955 (CONFIDENTIAL). AD-80147.

"Coupling of Antenna Elements to a Circular Surface Waveguide," Technical Report No. 5, H. F. King and R. H. DuHamel, 30 June 1955. * AD-75733.

"Input Impedance of a Spherical Ferrite Antenna with A Latitudinal Current," Technical Report No. 6, W. L. Weeks, 20 August 1955. AD-75732.

"Axially Excited Surface Wave Antennas," Technical Report No. 7, D. E. Royal, 10 October 1955. * AD-75731.

"Homing Antennas for the F-86F Aircraft (450-2500 mc), Technical Report No. 8, P. E. Mayes, R. F. Hyneman, and R. C. Becker, 20 February 1957.

"Ground Screen Pattern Range," Technical Memorandum No. 1, Roger R. Trapp, 10 July 1955. *

Contract AF33(616)-3220

"Effective Permeability of Spheriodal Shells," Technical Report No. 9, E. J. Scott and R. H. DuHamel, 16 April 1956. AD-98615.

"An Analytical Study of Spaced Loop ADF Antenna Systems," Technical Report No. 10, D. G. Berry and J. B. Kreer, 10 May 1956.

"A Technique for Controlling the Radiation from Dielectric Rod Waveguides," Technical Report No. 11, J. W. Duncan and R. H. DuHamel, 15 July 1956. * AD-107344.

"Direction Characteristics of a U-Shaped Slot Antenna," Technical Report No. 12, Richard C. Becker, 30 September 1956. ** AD-116104.

"Impedance of Ferrite Loop Antennas," Technical Report No. 13, V. H. Rumsey and W. L. Weeks, 15 October 1956. AD 119780.

"Closely Spaced Transverse Slots in Rectangular Waveguide," Technical Report No. 14, Richard F. Hyneman, 20 December 1956. AD-127455.

"Distributed Coupling to Surface Wave Antennas," Technical Report No. 15, R. R. Hodges, Jr., 5 January 1957. AD-127454.

"The Characteristic Impedance of the Fin Antenna of Infinite Length," Technical Report No. 16, Robert L. Carrel, 15 January 1957. * AD-127453.

"On the Estimation of Ferrite Loop Antenna Impedance," Technical Report No. 17, Walter L. Weeks, 10 April 1957. * AD-143989.

"A Note Concerning a Mechanical Scanning System for a Flush Mounted Line Source Antenna," Technical Report No. 18, Walter L. Weeks, 20 April 1957. AD-143990.

"Broadband Logarithmically Periodic Antenna Structures," Technical Report No. 19, R. H. DuHamel and D. E. Isbell, 1 May 1957. AD-140734.

"Frequency Independent Antennas," Technical Report No. 20, W. H. Rumsey, 25 October 1957. AD-153260.

"The Equiangular Spiral Antenna," Technical Report No. 21, J. D. Dyson, 15 September 1957. AD-145019.

"Experimental Investigation of the Conical Spiral Antenna," Technical Report No. 22, R. L. Carrel, 25 May 1957. ** AD-144021.

"Coupling between a Parallel Waveguide and a Surface Waveguide," Technical Report No. 23, E. J. Scott, 10 August 1957. AD-144030.

"Launching Efficiency of Wires and Slots for a Dielectric Rod Waveguide," Technical Report No. 24, J. W. Duncan and R. H. DuHamel, August 1957. AD-144030.

"The Characteristic Impedance of an Infinite Biconical Antenna of Arbitrary Cross Section," Technical Report No. 25, Robert L. Carrel, August 1957. AD-144121.

"Cavity-Backed Slot Antennas," Technical Report No. 26, R. J. Tector, 30 October 1957. AD-149451.

"Coupled Waveguide Excitation of Traveling Wave Slot Antennas," Technical Report No. 27, W. L. Weeks, 1 December 1957. AD-155178.

"Phase Velocities in Rectangular Waveguide Partially Filled with Dielectric," Technical Report No. 28, W. L. Weeks, 20 December 1957. AD-155177.

"Measuring the Capacitance per Unit Length of Biconical Structures of Arbitrary Cross Section," Technical Report No. 29, J. D. Dyson, 10 January 1958. AD-153561.

"Non-Planar Logarithmically Periodic Antenna Structure," Technical Report No. 30, D. E. Isbell, 20 February 1958. AD-156203.

"Electromagnetic Fields in Rectangular Slots," Technical Report No. 31, N. J. Kuhn and P. E. Mast, 10 March 1958. AD-156709.

"The Efficiency of Excitation of a Surface Wave on a Dielectric Cylinder," Technical Report No. 32, J. W. Duncan, 25 May 1958. AD-162052.

"A Unidirectional Equiangular Spiral Antenna," Technical Report No. 33, J. D. Dyson, 10 July 1958. AD-201138.

"Dielectric Coated Spheroidal Radiators," Technical Report No. 34, W. L. Weeks, 12 September 1958. AD-204547.

"A Theoretical Study of the Equiangular Spiral Antenna," Technical Report No. 35, P. E. Mast, 12 September 1958. AD-204548.

Contract AF33(616)-6079

"Use of Coupled Waveguides in a Traveling Wave Scanning Antenna," Technical Report No. 36, R. H. MacPhie, 30 April 1959. AD-215558.

"On the Solution of a Class of Wiener-Hopf Integral Equations in Finite and Infinite Ranges," Technical Report No. 37, R. Mittra, 15 May 1959. AD-220543.

"Prolate Spheroidal Wave Functions for Electromagnetic Theory," Technical Report No. 38, W. L. Weeks, 5 June 1959. AD-226727.

"Log Periodic Dipole Arrays," Technical Report No. 39, D. E. Isbell, 1 June 1959. AD-220651.

"A Study of the Coma-Corrected Zoned Mirror by Diffraction Theory," Technical Report No. 40, S. Dasgupta and Y. T. Lo, 17 July 1959. AD-225273.

"The Radiation Pattern of a Dipole on a Finite Dielectric Sheet," Technical Report No. 41, K. G. Balmain, 1 August 1959.

"The Finite Range Wiener-Hopf Integral Equation and a Boundary Value Problem in a Waveguide," Technical Report No. 42, R. Mittra, 1 October 1959. AD-229279.

"Impedance Properties of Complementary Multiterminal Planar Structures," Technical Report No. 43, G. A. Deschamps, 11 November 1959. AD-230625.

"On the Synthesis of Strip Sources," Technical Report No. 44, R. Mittra, 4 December 1959. AD-230624.

"Numerical Analysis of the Eigenvalue Problem of Waves in Cylindrical Waveguides," Technical Report No. 45, C. H. Tang and Y. T. Lo, 11 March 1960. AD-234536.

"New Circularly Polarized Frequency Independent Antennas with Conical Beam or Omnidirectional Patterns," Technical Report No. 46, J. D. Dyson and P. E. Mayes, 20 June 1960. AD-241321.

"Logarithmically Periodic Resonant-V Arrays," Technical Report No. 47, P. E. Mayes and R. L. Carrel, 15 July 1960. AD-246302.

"A Study of Chromatic Aberration of a Coma-Corrected Zoned Mirror," Technical Report No. 48, Y. T. Lo, June 1960. AD-252492.

"Evaluation of Cross-Correlation Methods in the Utilization of Antenna Systems," Technical Report No. 49, R. H. MacPhie, 25 January 1961. AD-252493.

"Synthesis of Antenna Products Patterns Obtained from a Single Array," Technical Report No. 50, R. H. MacPhie, 25 January 1961. AD-252494.

"On the Solution of a Class of Dual Integral Equations," Technical Report No. 51, R. Mittra, 1 October 1961. AD-264557.

"Analysis and Design of the Log-Periodic Dipole Antenna," Technical Report No. 52, Robert L. Carrel, 1 October 1961. AD-264558.

"A Study of the Non-Uniform Convergence of the Inverse of a Doubly-Infinite Matrix Associated with a Boundary Value Problem in a Waveguide," Technical Report No. 53, R. Mittra, 1 October 1961. AD-264556.

Contract AF33(616)-8460

"The Coupling and Mutual Impedance Between Balanced Wire-Arm Conical Log-Spiral Antennas," Technical Report No. 54, J. D. Dyson, June 1962. AD-285678.

"An Investigation of the Near Fields on the Conical Equiangular Spiral Antenna," Technical Report No. 55, O. L. McClelland, May 1962. AD-276463.

"Input Impedance of Some Curved Wire Antennas," Technical Report No. 56, C. H. Tang, June 1962. AD-276461.

"Polygonal Spiral Antennas," Technical Report No. 57, C. H. Tang, O. L. McClelland, June 1962.

"On Increasing the Effective Aperture of Antennas by Data Processing," Technical Report No. 58, R. H. MacPhie, July 1962.

"Theoretical Study of a Class of Logarithmically Periodic Circuits," Technical Report No. 59, R. Mittra, July 1962. AD-282847.

"Backward Wave Radiation from Periodic Structures and Application to the Design of Frequency-Independent Antennas," Technical Report No. 60, P. E. Mayes, G. A. Deschamps, and W. T. Patton, December 1962. AD-291765.

"The Backfire Bifilar Helical Antenna," Technical Report No. 61, W. T. Patton, September 1962. AD-289084.

"On the Mapping by a Cross-Correlation Antenna System of Partially Coherent Radio Sources," Technical Report No. 62, R. H. MacPhie, October 1962. AD-289085.

"On a Conical Quad-Spiral Array," Technical Report No. 63, J. D. Dyson, September 1962. AD-288252.

"Antenna Impedance Matching by Means of Active Networks," Technical Report No. 64, S. Laxpati, R. Mittra, November 1962. AD-291766.

"On Maximizing the Signal-To-Noise Ratio of a Linear Receiving Antenna Array," Technical Report No. 65, R. H. MacPhie, January 1963.

"Application of Cross-Correlation Techniques to Linear Antenna Arrays," Technical Report No. 67, R. H. MacPhie, March 1963.

"A Study of Wave Propagation of Helices", Technical Report No. 68, Paul W. Klock, March 1963.

"Relative Convergence of the Solution of a Doubly Infinite Set of Equations," Technical Report No. 69, R. Mittra, April 1963.

"Theoretical Brillouin ($k-\beta$) Diagram for Monopole and Dipole Arrays and Their Application to Log-Periodic Antennas," Technical Report No. 70, R. Mittra and K. E. Jones, April 1963.

* Copies available for a three-week loan period.

** Copies no longer available