

UNCLASSIFIED

A 9822

Armed Services Technical Information Agency

ARLINGTON HALL STATION
ARLINGTON 12 VIRGINIA


FOR
MICRO-CARD
CONTROL ONLY

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

UNCLASSIFIED

AD No. 9822

ASTIA FILE COPY

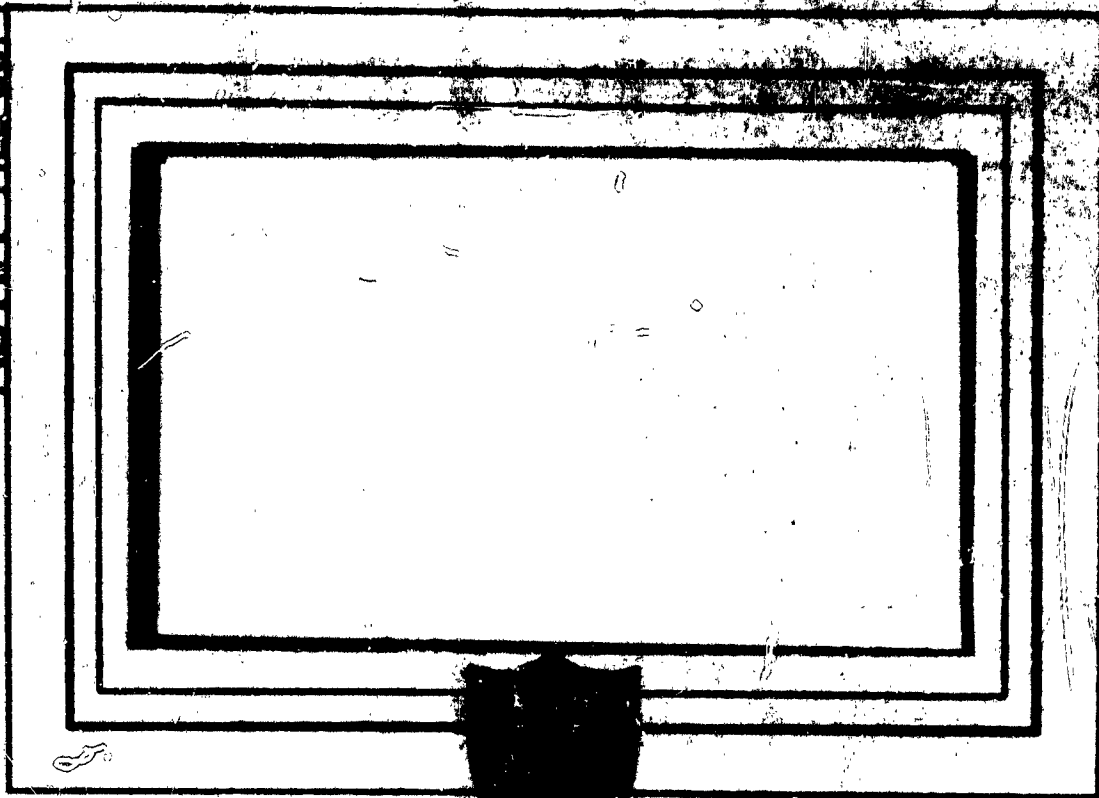

PRINCETON UNIVERSITY
DEPARTMENT OF AERONAUTICAL ENGINEERING

Office of Naval Research, Department
of the Navy
and
Office of Scientific Research, Air Research
and Development Command, U.S. Air Force
Contract No. N6-onr-270, Task Order No. 6,
Project No. NR-061-049

ON THE FLOW AT THE REAR OF A TWO-DIMENSIONAL
SUPERSONIC AIRFOIL WITH THICKNESS

by
Ronald F. Probststein

Report No. 228

May 1, 1953

ON THE FLOW AT THE REAR OF A TWO-DIMENSIONAL SUPERSONIC AIRFOIL WITH THICKNESS

by

Ronald F. Probst

A treatment of the problem of the flow deflection immediately rearward of a two-dimensional supersonic airfoil was given by Kahane and Lees¹ in 1948. Their analysis was carried out on the basis of oblique shock and Prandtl-Meyer wave theory utilizing the fact that the dynamic and static pressure change through isentropic and shock waves can be expressed as a power series in the flow deflection angle. Since to the writer's knowledge this is the only place where the dynamic pressure coefficients have been published, it was thought worthwhile to point out that one of the coefficients in the expansion for an isentropic wave (also appearing in the shock expansion) appears to be incorrect.

The authors expressed the change in dynamic pressure through an isentropic wave as

$$\Delta q = q_1 (\pm G_1 \theta + G_2 \theta^2 \pm G_3 \theta^3 + \dots)$$

and through a shock wave as

$$\Delta q = q_1 (\pm G_1 \theta + G_2 \theta^2 \pm (G_3 - H) \theta^3 + \dots)$$

where $q = \rho w^2 / 2$ (ρ = density, w = flow velocity), θ is the angle of deflection, positive in a counterclockwise sense, and q_1 is the dynamic pressure ahead of the wave. The corrected value for G_3 should be

$$G_3 = \frac{\frac{(3-\gamma)(2-\gamma)}{12} M^{10} + \frac{(-3\gamma^2 + 17\gamma - 36)}{12} M^8 + \frac{(21-4\gamma)}{3} M^6 - 8M^4 + \frac{14}{3} M^2 - \frac{4}{3}}{(M^2 - 1)^{7/2}}$$

where M is the flow Mach number ahead of the wave.

Determination of the flow angle immediately rearward of a flat-plate airfoil at angle of attack, and for a thick airfoil at angle of attack where it was assumed that the configuration was such that four oblique shock waves were attached to the nose and tail of the airfoil, (see Fig. 1), was carried out. Fortunately the calculations did not involve the use of the incorrect coefficient G_3 directly. In spite of this however, for the thick airfoil shown in Fig. 1, the analytic

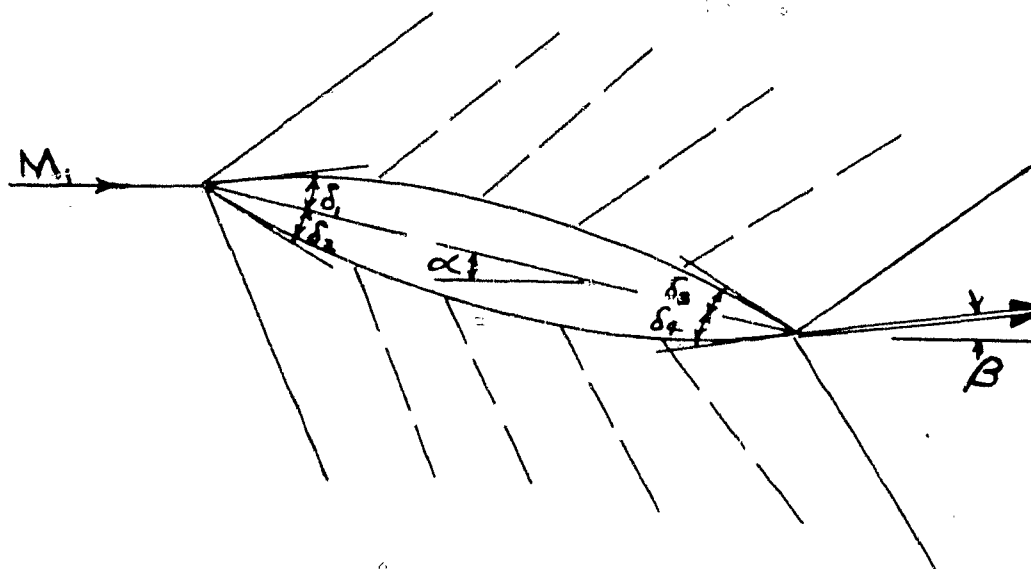


Fig. 1.. The thick airfoil.

formulation of the flow deflection angle β to first order appears to be incorrect..

Recalculation of β gives

$$\begin{aligned} \beta = & \frac{D}{2C_1} \{ (\delta_3 + \alpha)^3 + (\delta_1 - \alpha)^3 - (\delta_4 - \alpha)^3 - (\delta_2 + \alpha)^3 \} \\ & + \frac{E}{2C_1} \{ (\delta_3 + \alpha)^4 + (\delta_1 - \alpha)^4 - (\delta_4 - \alpha)^4 - (\delta_2 + \alpha)^4 \} \\ & + \frac{H}{2} \{ (\delta_3 + \alpha)^4 - (\delta_1 - \alpha)^4 \} - \frac{(\frac{dD}{d\theta} + DG_1)}{2C_1} \{ (\delta_3 + \alpha)^4 - (\delta_4 - \alpha)^4 \} \end{aligned}$$

where D , C_1 and E are the coefficients of θ in the following expansion for the static pressure change through an oblique shock wave:

$$\Delta p = \rho_1 \left(\pm C_1 \theta + C_2 \theta^2 \pm (C_3 - D) \theta^3 + (C_4 - E) \theta^4 \pm \dots \right)$$

The required coefficients for the determination of β are functions only of the free stream Mach number M_1 , and the ratio of specific heats γ . Their values (other than E) are given in Ref. 1, while $(C_4 - E)$ may be found in Ref. 2. The computation of C_4 and hence E is easily carried out by use of the results of Miles³.

REFERENCES

- 1.. Kahane, A. and Lees, L.: "The Flow at the Rear of a Two-Dimensional Supersonic Airfoil", Journal of the Aero. Sciences, Vol. 15, No. 3, March, 1948, pp. 167-170.
- 2.. Hilton, W.F.: "High-Speed Aerodynamics", Longmans, Green and Co., New York, (1951), p. 226.
- 3.. Miles, E.R.C.: "Supersonic Aerodynamics", McGraw-Hill Co., Inc., New York, (1950), pp. 245-246.