


AD735921

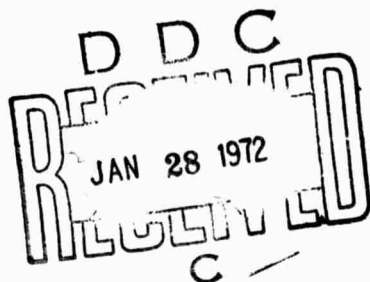

TM-4857/200/00

THE CEPSTRUM, THE CEPSTRALLY SMOOTHED
LOG SPECTRUM AND THE CHIRP Z-TRANSFORM

5 January 1972

Reproduced by
**NATIONAL TECHNICAL
INFORMATION SERVICE**
Springfield, Va. 22151

DISTRIBUTION STATEMENT A

Approved for public release;
Distribution Unlimited

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) System Development Corporation Santa Monica, California		2a. REPORT SECURITY CLASSIFICATION Unclassified	
		2b. GROUP	
3. REPORT TITLE The Cepstrum, the Cepstrally Smoothed Log Spectrum and the Chirp-Z Transform			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Technical Report - July, 1971 to December, 1971			
5. AUTHOR(S) (First name, middle initial, last name) H. Barry Ritea			
6. REPORT DATE 5 January 1972		7a. TOTAL NO. OF PAGES 21	7b. NO. OF REFS 3
8a. CONTRACT OR GRANT NO. DAHC15-67-C-0149		8a. ORIGINATOR'S REPORT NUMBER(S)	
b. PROJECT NO. ARPA Order #1327, Amendment #4, Program Code # 2D30 and 2P10.		8b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
c.			
d.			
10. DISTRIBUTION STATEMENT Approved for public release; distribution unlimited.			
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY	
13. ABSTRACT Several digital signal processing algorithms useful in speech research are presented: the cepstrum pitch detector; the cepstrally smoothed log spectrum; and the Chirp Z-transform. FORTRAN codes and examples accompany the discussions.			

KEY WORDS

LINK A

LINK B

LINK C

ROLE

WT

ROLE

WT

ROLE

WT

Cepstrum

Cepstrally Smoothed Log Spectrum

Chirp Z-Transform

Digital Signal Processing

Pitch detection

Formant Analysis

Speech Analysis

TECHNICAL MEMORANDUM

(TM Series)

The work reported herein was supported by the Advanced Research Projects Agency of the Department of Defense under Contract DAHC15-67-C-0149, ARPA Order No. 1327, Amendment No. 4, Program Code No. 2D30 and 2P10.

THE CEPSTRUM, THE CEPSTRALLY SMOOTHED
LOG SPECTRUM AND THE CHIRP Z-TRANSFORM

by

H. Barry Ritea

5 January 1972

SYSTEM

DEVELOPMENT

CORPORATION

2500 COLORADO AVE.

SANTA MONICA

CALIFORNIA

90406

The views and conclusions contained in this document are those of the authors and should not be interpreted as necessarily representing the official policies, either expressed or implied, of the Advanced Research Projects Agency or the U. S. Government.



Distribution of this document is unlimited.

5 January 1972

i
(Page ii blank)

System Development Corporation
TM-4857/200/00

ABSTRACT

Several digital signal processing algorithms useful in speech research are presented: the cepstrum pitch detector, the cepstrally smoothed log spectrum, and the Chirp Z-transform. FORTRAN codes and examples accompany the discussions.

5 January 1972

iii
(Page iv blank)

System Development Corporation
TM-4857/200/00

TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1.	INTRODUCTION	1
2.	CEPSTRUM PITCH DETECTOR	1
3.	CEPSTRALLY SMOOTHED LOG SPECTRUM	3
4.	CHIRP Z-TRANSFORM	9
5.	REFERENCES	16

5 January 1972

^v
(Page vi blank)

System Development Corporation
TM-4857/200/00

LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
1.	Cepstrum Pitch Detector Program Listing	2
2.	Cepstrum Example.	4
3.	Cepstrally Smoothed Log Spectrum Program Listing	5
4.	Unsmoothed Log Spectrum Example	7
5.	Cepstrally Smoothed Log Spectrum Example	8
6.	Chirp Z-Transform Program Listing	10
7.	Subroutine CONTOR Program Listing	12
8.	Subroutine POWER Program Listing	13
9.	Double Precision Chirp Z-Transform Program Listing	14

1. INTRODUCTION

The development of the Fast Fourier Transform (FFT) led to the realization of a number of FFT applications to speech research. Chief among these are the cepstrum pitch detector for automatic detection of the pitch period of voiced speech, the cepstrally smoothed log spectrum for formant selection, and the Chirp Z-transform for narrow-band frequency analysis. Each of these applications is discussed in the following sections and references are given for more detailed presentations. In addition, complete FORTRAN codes and examples accompany the discussions.

2. CEPSTRUM PITCH DETECTOR

In 1967, Noll [1] described a method for computing the pitch period of voiced speech using the cepstrum. The cepstrum is defined as the square of the Fourier transform of the logarithm power spectrum and has a strong peak corresponding to the pitch period of the voiced-speech segment being analyzed. Schafer and Rabiner [2] have also described this procedure in a way which allows the computer code to be easily constructed. The FORTRAN program listing is shown in Figure 1. The input data are the digitized speech sample $S(I)$, the number N of samples $S(I)$ (which must be compatible with the FFT algorithm used), the sampling period T (in sec.), and a rough estimate of the pitch period PP . The latter parameter is used to establish the length of the Hamming window (viz., $4*PP$) through which the signal $S(I)$ is passed.

As an example, a truncated Fourier series

$$f(t) = \frac{a_0}{2} + \sum_{k=1}^m (a_k \cos 2\pi k \omega t + b_k \sin 2\pi k \omega t)$$

```
      SUBROUTINE CEPS(S,N,T,C,PP,X)
C
C      CEPSTRUM CALCULATION
C
C      REFERENCE: R. W. SCHAFER & L. R. RABINER,
C      "SYSTEM FOR AUTOMATIC FORMANT ANALYSIS OF VOICED SPEECH,"
C      J. ACOUST. SOC. AMER. 47, 634 - 648 (1970).
C
C      S(I) = DIGITIZED SPEECH SAMPLE
C      T = SAMPLING PERIOD (IN SEC.)
C      C(I) = CEPSTRUM OF S(I)
C      PP = PITCH PERIOD ESTIMATE
C      X(I) = COMPLEX CEPSTRUM
C      DIMENSION S(N),C(N),X(N)
C      COMPLEX X
C
C      MULTIPLY SAMPLE BY HAMMING WINDOW
C      XN=N
C      TWOPI=6.283185317178
C      DURWIN=4.*PP
C      DO 17 I=1,N
C      XI=I-1
C      IF (XI*T-DURWIN) 10,10,15
10    ARG=TWOPI*XI*T/DURWIN
C      S(I)=S(I)*(.54-.46*COS(ARG))
C      GO TO 17
15    S(I)=0.
17    CONTINUE
C      DO 20 I=1,N
C      X(I)=CMPLX(S(I),0.)
C
C      FIND M SUCH THAT N = 2**M
C      K=N
C      I=0
30    K=K/2
C      I=I+1
C      IF (K-1) 40,40,30
40    M=I
C      CALL FFT(X,M,N,-1)
C      DO 50 I=1,N
C      A=REAL(X(I))
C      B=AIMAG(X(I))
C      S(I)=10.*ALOG10(A*A+B*B)
50    X(I)=CMPLX(S(I),0.)
C      CALL FFT(X,M,N,1)
C      DO 60 I=1,N
C      X(I)=X(I)/XN
60    C(I)=REAL(X(I))
C      RETURN
C      END
```

Figure 1. Cepstrum Pitch Detector Program Listing

was generated with the following parameters:

$$\begin{array}{lll} m = 5 & , & \omega = 500 \\ & a_0 = 0 & \\ a_1 = 0 & & b_1 = 1 \\ a_2 = 0 & & b_2 = 1/2 \\ a_3 = 0 & & b_3 = 1 \\ a_4 = 0 & & b_4 = 0 \\ a_5 = 0 & & b_5 = 1/2, \end{array}$$

and a set of 512 data points was obtained by sampling $f(t)$ at $t = (j-1)T$ ($j = 1, 2, \dots, 512$) for $T = .0001$ (10,000 samples/sec.) A pitch period estimate of 5 msec. was used. The resulting cepstrum is shown in Figure 2. Note that a strong peak occurs at $t = 2$ msec., the actual pitch period of the signal.

3. CEPSTRALLY SMOOTHED LOG SPECTRUM

As shown by Schafer and Rabiner [2], the spectral envelope can be obtained by cepstrally smoothing the log spectrum. This smoothing is accomplished by low-pass filtering the log magnitude of the DFT. To this end, the cepstrum is multiplied by a low-time filter whose cut-off is less than the pitch period, and then transformed by the DFT to produce the smoothed spectral envelope. The FORTRAN program listing is given in Figure 3.

As an illustration, the unsmoothed log spectrum of the 512 data points of section 2 was first computed, using an FFT algorithm; this is shown in Figure 4. Figure 5 shows the cepstrally smoothed log spectrum.

5 January 1972

4

System Development Corporation
TM-4857/200/00

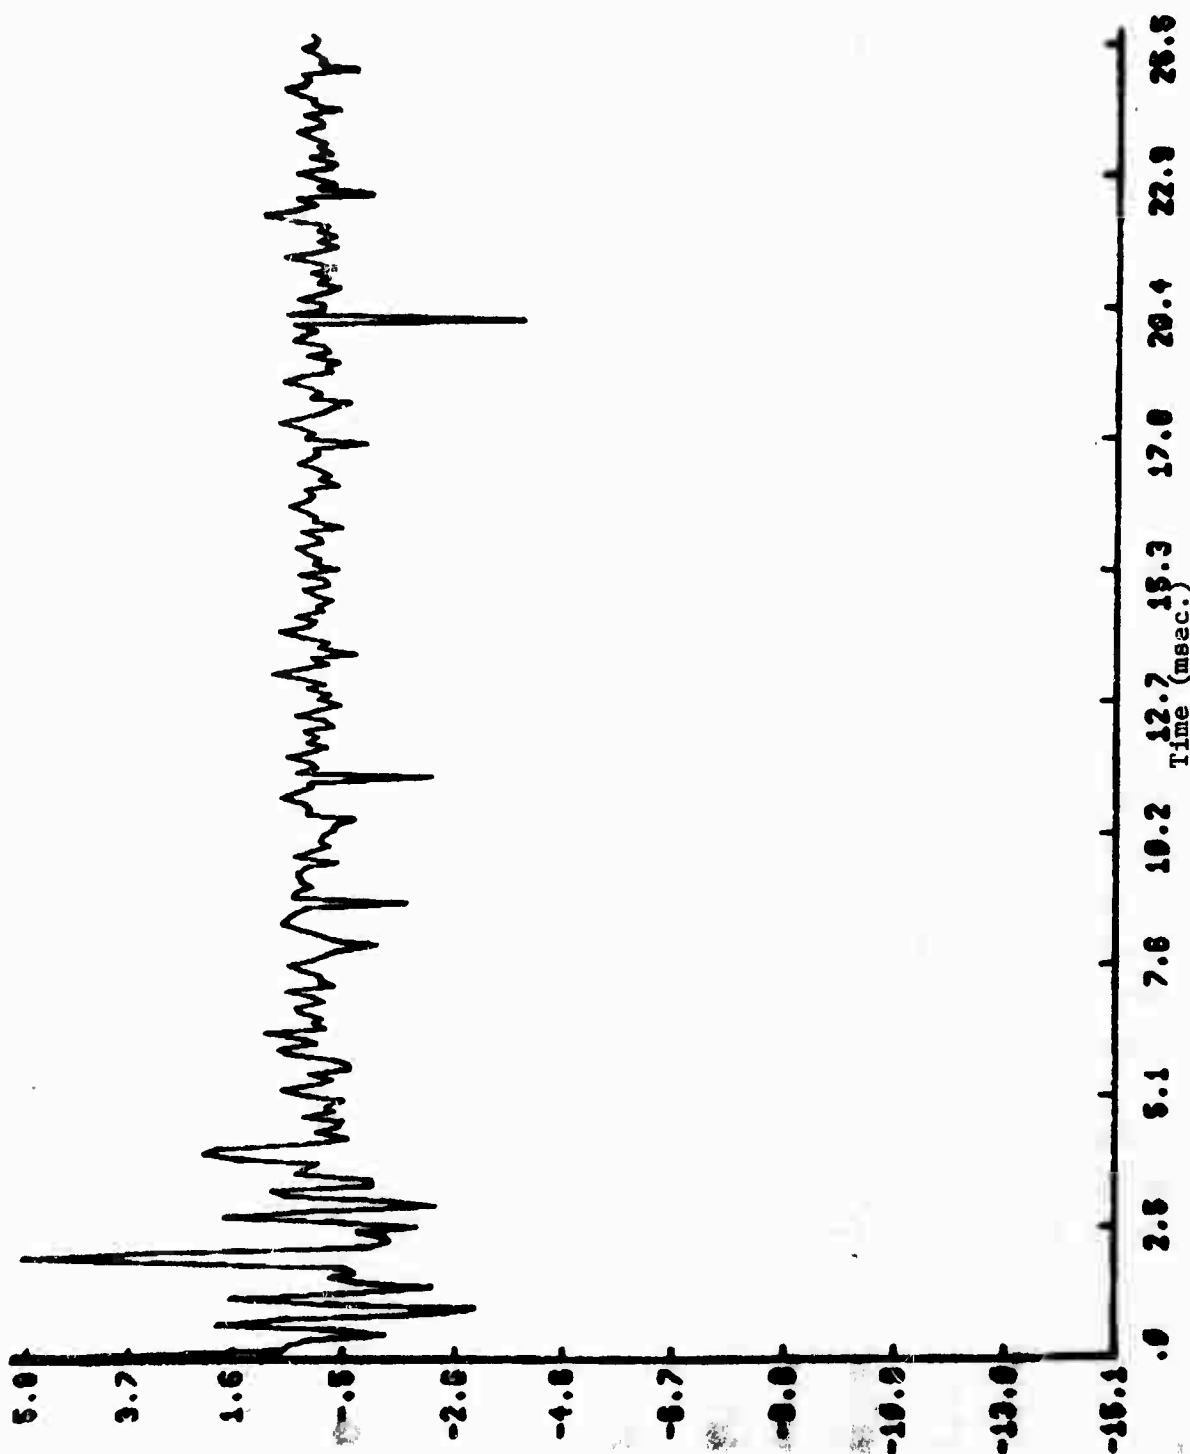


Figure 2. Cepstrum Example

```
      SUBROUTINE PITCH(S,N,T,C,P,SPEC)
C
C      ESTIMATION OF PITCH PERIOD AND SPECTRAL ENVELOPE
C
C      REFERENCE: R. W. SCHAFER & L. R. RABINER,
C      "SYSTEM FOR AUTOMATIC FORMANT ANALYSIS OF VOICED SPEECH,"
C      J. ACOUST. SOC. AMER. 47, 634 - 648 (1970).
C
C      S(1) = DIGITIZED SPEECH SAMPLE
C      N = NUMBER OF VALUES S(1)
C      T = SAMPLING PERIOD ( IN SEC. )
C      P = PITCH PERIOD
C      SPEC(1) = CEPSTRALLY SMOOTHED LOG SPECTRUM ( SPECTRAL ENVELOPE )
C
      DIMENSION S(N),SPEC(N),C(N)
      COMPLEX CC(512)
      CALL CEPS(S,N,T,C,P,CC)
C      TAUMIN = MINIMUM EXPECTED PITCH PERIOD
      TAUMIN=.001
C      TAUMAX = MAXIMUM EXPECTED PITCH PERIOD
      TAUMAX=.020
C
C      SEARCH THE CEPSTRUM FOR A STRONG PEAK IN THE REGION
C      TAUMIN < J*T < TAUMAX
C
      JMIN=TAUMIN/T+1.
      JMAX=TAUMAX/T+1.
      PEAK=C(JMIN)
      DO 30 I=JMIN,JMAX
10      IF (PEAK-C(I)) 20,20,30
20      PEAK=C(I)
      INDEX=I
30      CONTINUE
      P=FLOAT(INDEX-1)*T
C
C      LOW - PASS FILTER THE LOG MAGNITUDE OF THE DFT
C
```

Figure 3. Cepstrally Smoothed Log Spectrum Program Listing

```
PI=3.141592653589
T1=.8*P
DT=.1*P
T1PDT=T1+DT
DO 80 I=1,N
XI=I-1
IF (XI*T-T1) 80,40,40
40 IF (XI*T-T1PDT) 50,60,60
50 CC(I)=CC(I)*.5*(1.+COS(PI*(XI*T-T1)/DT))
GO TO 80
60 CC(I)=CMPLX(0.,0.)
80 CONTINUE
C
C FIND M SUCH THAT N = 2**M
K=N
I=0
90 K=K/2
I=I+1
IF (K-1) 100,100,90
100 M=I
C
CALL FFT(CC,M,N,-1)
DO 110 I=1,N
110 SPEC(I)=2.*REAL(CC(I))
C
C ADD THE SPECTRUM EQUALIZING CURVE TO THE SMOOTHED SPECTRAL
C ENVELOPE
C
DO 140 K=1,N
W=FLOAT(K-1)/(FLOAT(N)*T)
IF (W-3000.) 120,120,130
120 SPEC(K)=SPEC(K)-10.*COS(PI*W/3000.)
GO TO 140
130 SPEC(K)=SPEC(K)+10.
140 CONTINUE
C
RETURN
END
```

(Cont'd) Figure 3. Cepstrally Smoothed Log Spectrum Program Listing

5 January 1972

7

System Development Corporation
TM-4857/200/00

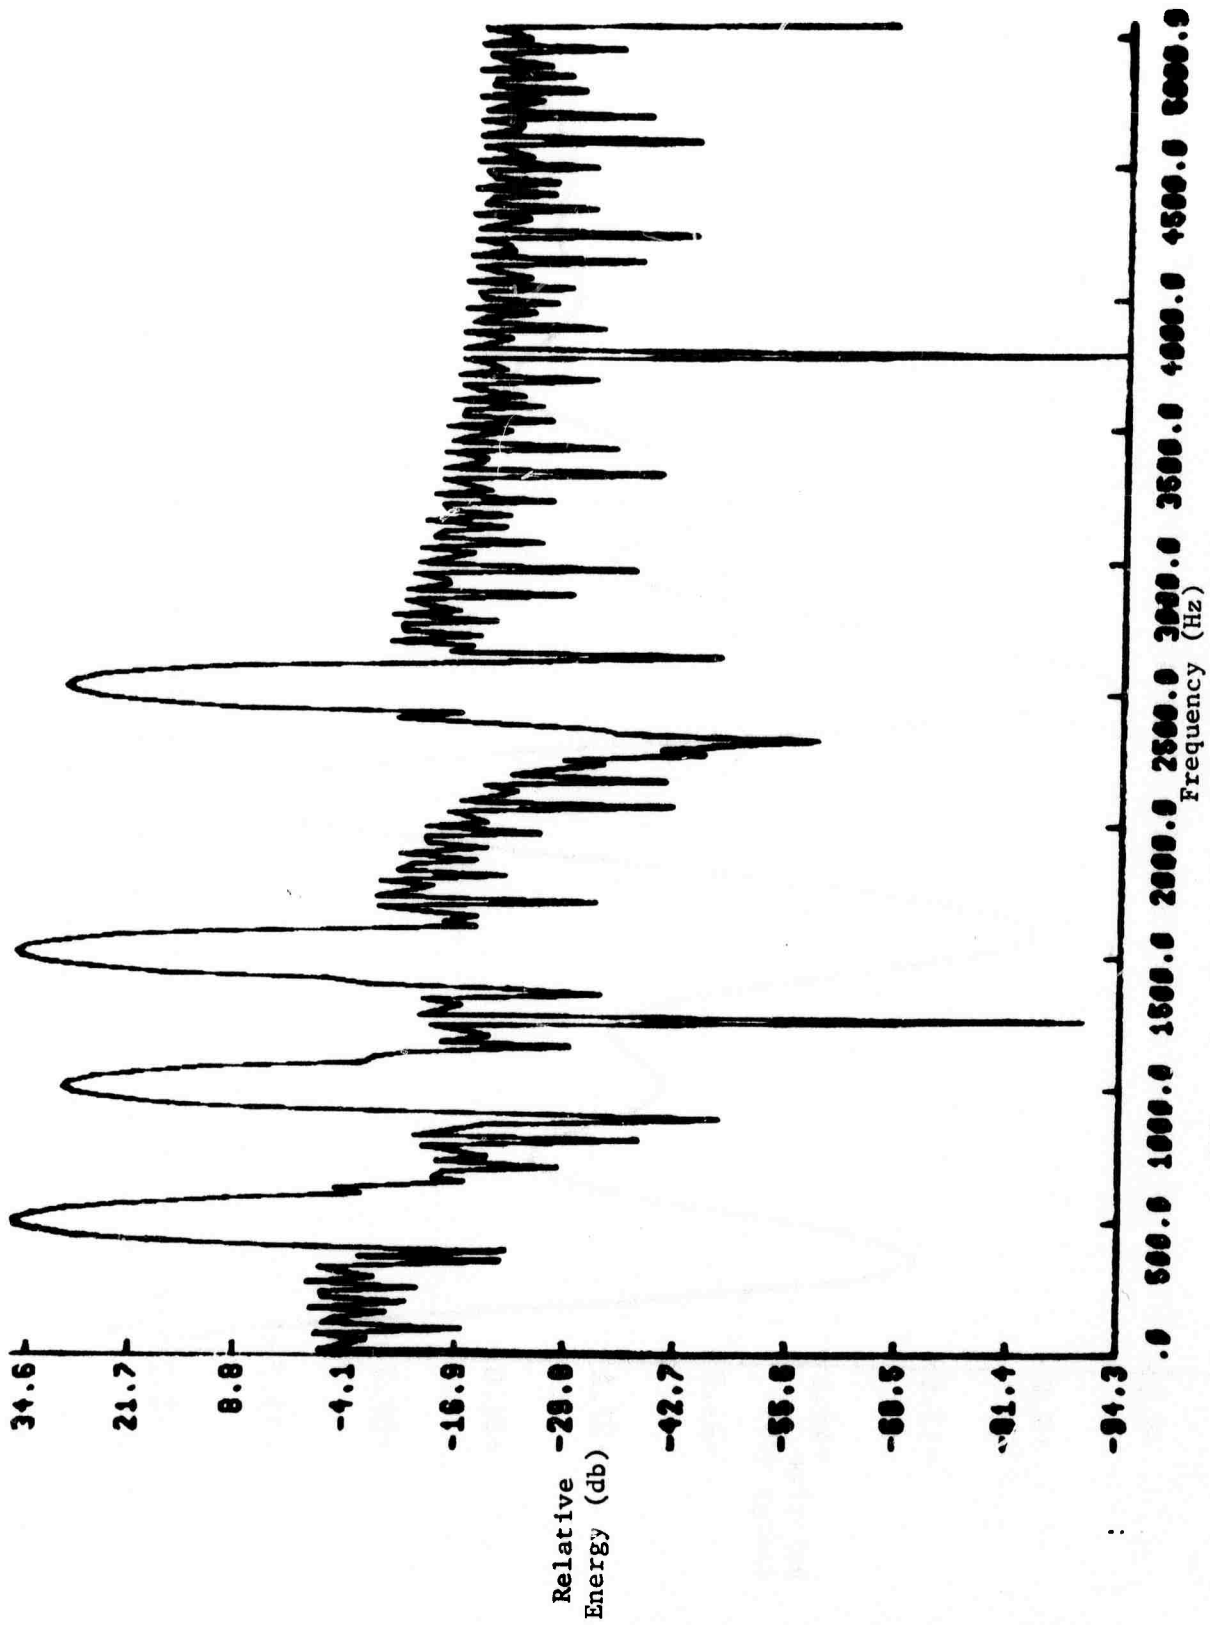


Figure 4. Unsmoothed Log Spectrum Example

5 January 1972

8

System Development Corporation
TM-4857/200/00

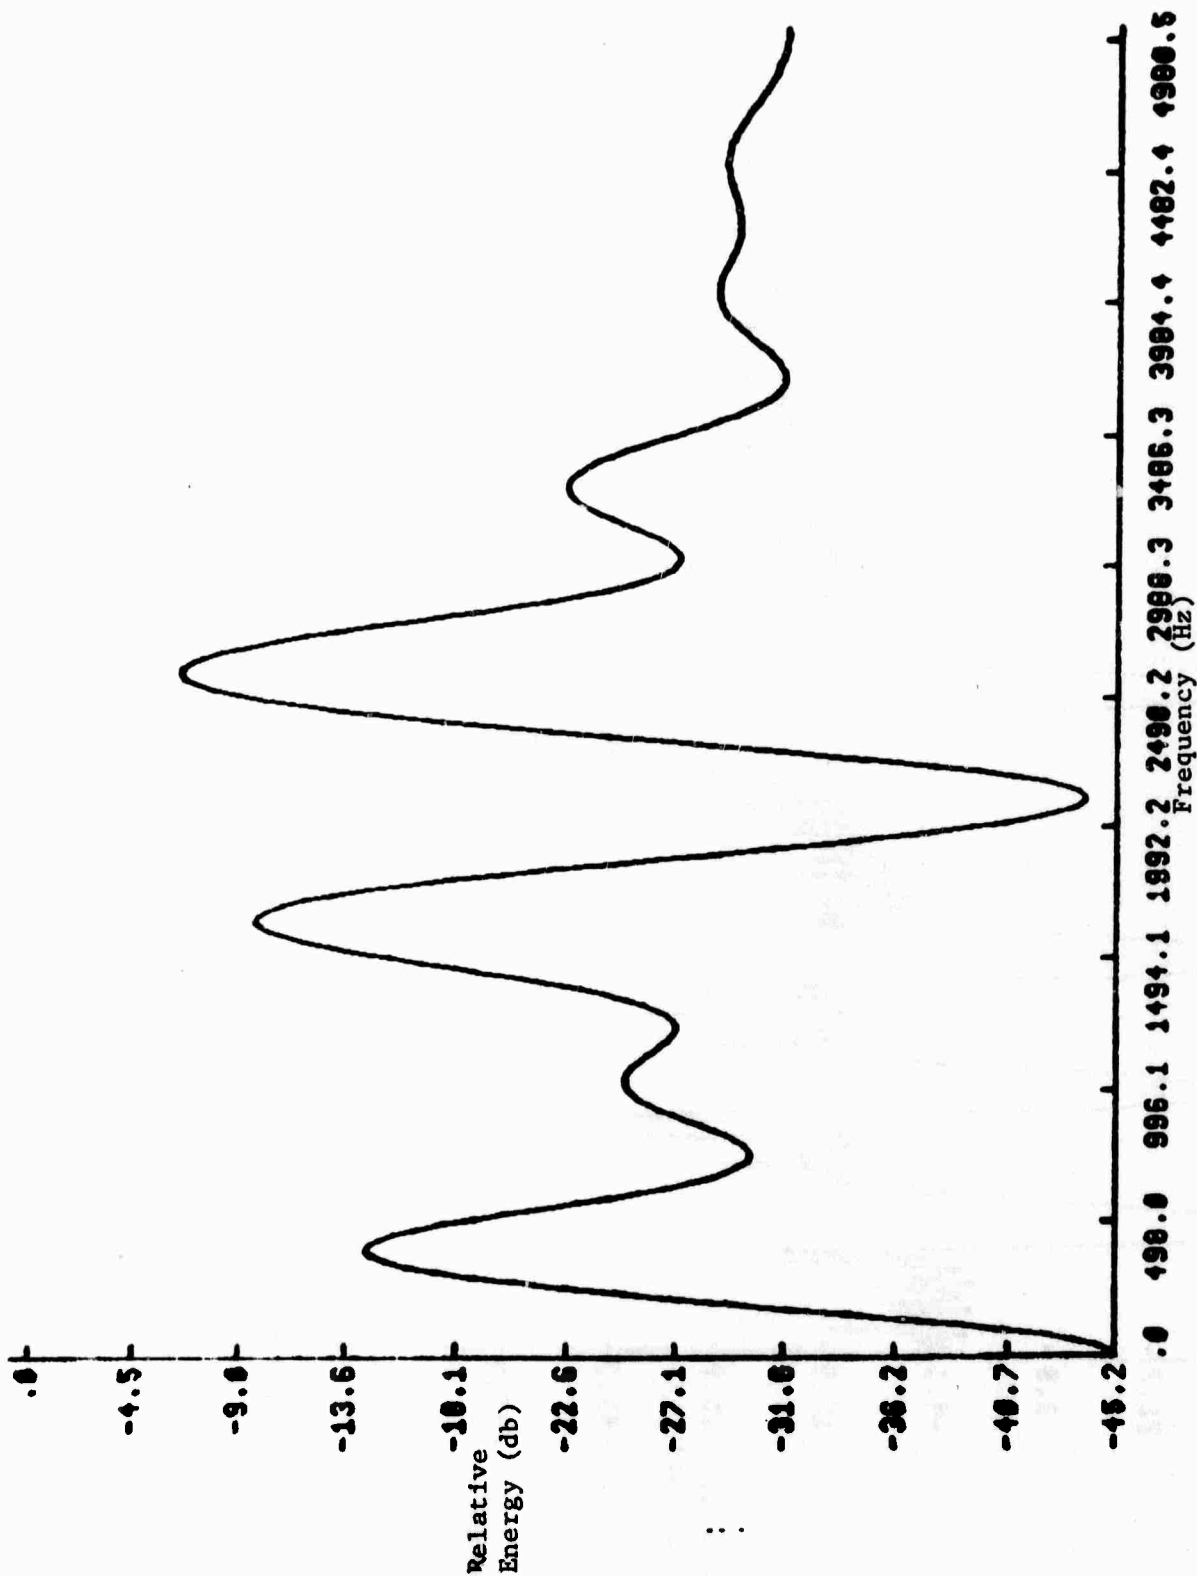


Figure 5. Cepstrally Smoothed Log Spectrum Example

4. CHIRP Z-TRANSFORM

The Chirp Z-transform (CZT) is a computational algorithm for efficiently evaluating the Z-transform of a sequence of n samples at m points in the Z-plane which lie on circular or spiral contours beginning at an arbitrary point. Its importance to speech analysis stems from its ability to efficiently evaluate the Z-transform off the unit circle, the required contour for evaluation of the DFT. In this way, the contour can be made to pass closer to the poles and zeros of the system, reducing the bandwidths and sharpening the transfer function. A detailed description is given in references [2] and [3].

The FORTRAN program listing of the CZT is shown in Figure 6. Subroutine CZT must be used in conjunction with three other subroutines: FFT, CONTOR, and POWER. The FFT used in this case is algorithm I of SDC TM-4857/100/00, "A Comparison of FFT algorithms". Subroutine CONTOR establishes an appropriate contour over which to evaluate the CZT. Figure 7 is a listing of CONTOR for establishing parameters for a circle of radius .95. Subroutine POWER, given in Figure 8, is used to replace the computation of high powers of the exponential function by iterated multiplications. This has yielded slightly more stability in the code. However, even in its double-precision form (Figure 9), the CZT has been found to be unstable for as few as 16 data points.

```

SUBROUTINE CZT(N,X,M,A,W)
C
C  CHIRP Z-TRANSFORM
C
C  REFERENCE: L.R. RABINER, R.W. SCHAFER & C. M. RADER,
C  '' THE CHIRP Z-TRANSFORM AND ITS APPLICATION '',
C  BELL SYSTEM TECH. J. 48, 1249-1292 (1969).
C
C  N = NUMBER OF INPUT DATA POINTS X(1)
C  X = INPUT ARRAY OF COMPLEX DATA POINTS
C  M = NUMBER OF OUTPUT POINTS DESIRED
C  A,W = PARAMETERS DETERMINING THE CONTOUR OVER WHICH
C  THE CZT IS TO BE EVALUATED (SEE LISTING OF SUBROUTINE CONTOR)
C
C  COMPLEX X(512),A,W,V(512)
C  COMPLEX C,D,PWR
C
C  FIND THE SMALLEST POWER OF TWO WHICH IS GREATER THAN OR EQUAL
C  TO N+M-1
C
C  K=N+M-1
C  I=1
5  K=K/2
  IF (K-1) 10,20,10
10  I=I+1
  GO TO 5
20  L=2**(I+1)
  DO 30 J=1,N
  XJ=J-1
  CALL POWER(W,XJ/2.,PWR)
  C=PWR/A
  CALL POWER(C,XJ,PWR)
30  X(J)=PWR*X(J)
  DO 40 J=N+1,L
```

Figure 6. Chirp Z-Transform Program Listing

```
40  X(J)=CMPLX(0.,0.)  
    CALL FFT(X,I+1,-1)  
    DO 50 J=1,M  
    XJ=XJ-1  
    CALL POWER(W,-XJ*XJ/2.,PWR)  
50  V(J)=PWR  
    IF (L-(N+M-1)) 55,68,55  
55  DO 60 J=M+1,L-N+1  
60  V(J)=CMPLX(0.,0.)  
68  XL=L  
    DO 70 J=L-N+2,L  
    XJ=XJ-1  
    CALL POWER(W,-(XL-XJ)*(XL-XJ)/2.,PWR)  
70  V(J)=PWR  
    CALL FFT(V,I+1,-1)  
    DO 80 J=1,L  
80  V(J)=V(J)*X(J)  
    CALL FFT(V,I+1,1)  
    DO 90 J=1,L  
90  V(J)=V(J)/XL  
    DO 100 J=1,M  
    XJ=XJ-1  
    CALL POWER(W,XJ*XJ/2.,PWR)  
    D=PWR  
100 X(J)=V(J)*D  
    RETURN  
    END
```

(Cont'd) Figure 6. Chirp Z-Transform Program Listing

SUBROUTINE CONTOR(NPTS,T,BF,BW,M,AO,THO,WO,PHIO)

COMPUTES AN APPROPRIATE CONTOUR ON WHICH TO EVALUATE THE CZT

INPUT: NPTS = NUMBER OF VALUES OF CEPSTRUM TO BE USED

T = SAMPLING PERIOD (IN SEC.)

BF = LOWEST FREQUENCY OF REGION OVER WHICH THE
NARROW-BAND FREQUENCY ANALYSIS IS TO BE PERFORMED

BW = BANDWIDTH OF REGION

OUTPUT: M = NUMBER OF OUTPUT VALUES TO BE COMPUTED BY CZT

AO = RADIUS OF CONTOUR

THO: CENTERS THE ANALYSIS ON THE FREQUENCY REGION
OF INTEREST

WO: TAKEN HERE TO BE = 1 TO MAKE THE CONTOUR AN ARC
OF A CIRCLE

PHIO: DETERMINES THE FREQUENCY SPACING OF THE SPECTRAL
SAMPLES

TWOPI=6.283185317178

AO=EXP(-.0314)

THO=BF*T/TWOPI

WO=1.

PHIO=BW*T/(FLOAT(M-1)*TWOPI)

RETURN

END

Figure 7. Subroutine CONTOR Program Listing

```
      SUBROUTINE POWER(Z,A,PWR)
C
C      COMPUTES Z**A FOR LARGE VALUES OF A
C
      DOUBLE PRECISION Z,W,P,X,PWR,A,R
      IF (A-20.) 5,5,8
5     PWR=Z**A
      RETURN
C     REPRESENT A AS A = 10*N + R, WHERE R IS LESS THAN 10
8     N=A/10.
      R=A-10.*FLOAT(N)
      W=Z**10
      P=Z**R
C
C     DETERMINE WHETHER N IS EVEN OR ODD:
C     IF EVEN, FIND K SUCH THAT N = 2*K
C     IF ODD, FIND K SUCH THAT N = 2*K + 1
C
      K=N/2
      M=MOD(N,2)
      X=W
      IF (K.EQ.1) GO TO 25
      DO 20 I=1,K-1
20     W=W*X
25     PWR=W*W*P
      IF (M) 40,40,30
30     PWR=PWR*X
40     RETURN
      END
```

Figure 8. Subroutine POWER Program Listing

```
SUBROUTINE CZT(XR,XI,N,M,AO,THO,WO,PHO)
DIMENSION YR(128),YI(128),YRS(128),YIS(128)
DIMENSION VR(128),VI(128),VRS(128),VIS(128)
DIMENSION GR(128),GI(128),XR(128),XI(128)
DOUBLE PRECISION YR,YI,PHO,VR,VI
DOUBLE PRECISION FJ,XP,AO,WO,PWR,PR,PI,TWOPI,ARG
PI=3.14159265
TWOPI=6.2831853
K=N+M-1
I=1
5   K=K/2
    IF (K-1) 10,20,10
10  I=I+1
    GO TO 5
20  L=2*(I+1)
    DO 30 J=1,N
        FJ=J-1
        XP=FJ*FJ/2.
        CALL POWER(AO,-FJ,PWR)
        CALL POWER(WO,XP,PR)
        ARG=PI*FJ*(FJ*PHO-2.*THO)
        ARG=DMOD(ARG,TWOPI)
        YR(J)=PWR*PR*XR(J)*DCOS(ARG)
        YI(J)=PWR*PR*XR(J)*DSIN(ARG)
30  CONTINUE
    DO 40 J=N+1,L
        YR(J)=0.
        YI(J)=0.
40  CONTINUE
    DO 45 J=1,L
        YRS(J)=SNGL(YR(J))
        YIS(J)=SNGL(YI(J))
45  CONTINUE
    CALL FFT(YRS,YIS,I+1,L,-1)
    DO 50 J=1,M
        FJ=J-1
        XP=-FJ*FJ/2.
        CALL POWER(WO,XP,PWR)
        ARG=PI*FJ*FJ*PHO
        ARG=DMOD(ARG,TWOPI)
        VR(J)=PWR*DCOS(ARG)
        VI(J)=-PWR*DSIN(ARG)
```

Figure 9. Double Precision Chirp Z-Transform Program Listing

```
50  CONTINUE
    IF (L-(N+M-1)) 55,68,55
55  DO 60 J=M+1,L-N+1
    VR(J)=0.
60  VI(J)=0.
68  FL=L
    DO 70 J=L-N+2,L
    FJ=J-1
    XP=-(FL-FJ)*(FL-FJ)/2.
    CALL POWER(WO,XP,PR)
    ARG=PI*(-2.*XP)*PHO
    ARG=DMOD(ARG,TWOPI)
    VR(J)=PR*DCOS(ARG)
    VI(J)=-PR*DSIN(ARG)
70  CONTINUE
    DO 75 J=1,L
    VRS(J)=SNGL(VR(J))
    VIS(J)=SNGL(VI(J))
75  CALL FFT(VRS,VIS,I+1,L,-1)
    DO 80 J=1,L
    GR(J)=VRS(J)*YRS(J)-VIS(J)*YIS(J)
80  GI(J)=VRS(J)*YIS(J)+VIS(J)*YRS(J)
    CALL FFT(GR,GI,I+1,L,1)
    DO 90 J=1,L
    GR(J)=GR(J)/FL
90  GI(J)=GI(J)/FL
    DO 100 J=1,M
    FJ=J-1
    XP=FJ*FJ/2.
    CALL POWER(WO,XP,PR)
    ARG=PI*FJ*FJ*PHO
    ARG=DMOD(ARG,TWOPI)
    XR(J)=PR*(GR(J)*DCOS(ARG)-GI(J)*DSIN(ARG))
    XI(J)=PR*(GI(J)*DCOS(ARG)+GR(J)*DSIN(ARG))
100 CONTINUE
    RETURN
    END
```

(Cont'd) Figure 9. Double Precision Chirp Z-Transform Program Listing

5 January 1972

16
(last page)

System Development Corporation
TM-4857/200/00

REFERENCES

- [1] NOLL, A. M., "Cepstrum Pitch Determination," J. Acoust. Soc. Am., Vol. 41 (1967), pp. 293-309.
- [2] SCHAFER, R. W. and RABINER, L. R., "System for Automatic Formant Analysis of Voiced Speech," J. Acoust. Soc. Am., Vol. 47 (1970), pp. 634-648.
- [3] RABINER, L. R., SCHAFER, R. W. and RADER, C. M., "The Chirp Z-Transform and its Application," Bell System Tech. J., Vol. 48 (1969), pp. 1249-1292.