



AFRL-AFOSR-VA-TR-2017-0043

**Fundamental Properties and Practical Application of Active Microwave Metamaterials
Incorporating Gain Devices**

Hao Xin
ARIZONA UNIV BOARD OF REGENTS TUCSON

02/22/2017
Final Report

DISTRIBUTION A: Distribution approved for public release.

Air Force Research Laboratory
AF Office Of Scientific Research (AFOSR)/ RTB1
Arlington, Virginia 22203
Air Force Materiel Command

REPORT DOCUMENTATION PAGE		Form Approved OMB No. 0704-0188	
The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Executive Services, Directorate (0704-0188). Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ORGANIZATION.			
1. REPORT DATE (DD-MM-YYYY) 02-03-2017		2. REPORT TYPE Final Performance	
		3. DATES COVERED (From - To) 30 Sep 2013 to 30 Mar 2016	
4. TITLE AND SUBTITLE Fundamental Properties and Practical Application of Active Microwave Metamaterials Incorporating Gain Devices		5a. CONTRACT NUMBER	
		5b. GRANT NUMBER FA9550-13-1-0209	
		5c. PROGRAM ELEMENT NUMBER 61102F	
6. AUTHOR(S) Hao Xin		5d. PROJECT NUMBER	
		5e. TASK NUMBER	
		5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) ARIZONA UNIV BOARD OF REGENTS TUCSON 888 N. EUCLID AVENUE TUCSON, AZ 85722-3308 US		8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) AF Office of Scientific Research 875 N. Randolph St. Room 3112 Arlington, VA 22203		10. SPONSOR/MONITOR'S ACRONYM(S) AFRL/AFOSR RTB1	
		11. SPONSOR/MONITOR'S REPORT NUMBER(S) AFRL-AFOSR-VA-TR-2017-0043	
12. DISTRIBUTION/AVAILABILITY STATEMENT A DISTRIBUTION UNLIMITED: PB Public Release			
13. SUPPLEMENTARY NOTES			
14. ABSTRACT Metamaterials are artificially designed composite materials which can exhibit unique and unusual properties such as the negative refractive index, negative phase velocity, etc. The concept of metamaterials becomes prevalent in the electromagnetic society since the first experimental implementation in the early 2000s. Many fascinated potential applications, e.g. super lens, invisibility cloaking, and novel antennas that are electrically small, have been proposed based on metamaterials. However, most of the applications still remain in theory and are not suitable for practical applications mainly due to the intrinsic loss and narrow bandwidth (large dispersion) determined by the fundamental physics of metamaterials. In this program, we have incorporated active gain devices into conventional passive metamaterials to overcome loss and even provide gain. Two types of active gain negative refractive index metamaterials have been proposed, designed and experimentally demonstrated, including an active composite left-/right-handed transmission line and an active volumetric metamaterial. These designs have been extended to THz frequency range. In addition, we have investigated the non-Foster circuits for broadband matching of electrically small antennas. A rigorous way of analyzing the stability of non-Foster circuits by normalized determinant function has been proposed. We have studied the practical factors that may affect the stability of non-Foster circuits, including the device parasitics, DC biasing, layouts and load impedance. A stable floating negative capacitor has been designed, fabricated and tested. Moreover, it is important to resolve the sign of refractive index for active gain media which can be quite challenging. We have investigated the analytical solution of a gain slab system, and applied the Nyquist criterion to analyze the stability of a causal gain medium. W			
15. SUBJECT TERMS			

Standard Form 298 (Rev. 8/98)
Prescribed by ANSI Std. Z39.18

DISTRIBUTION A: Distribution approved for public release

16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON WEINSTOCK, HAROLD
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NUMBER <i>(Include area code)</i> 703-696-8572

Final Report - Fundamental Properties and Practical Applications of Active Microwave Metamaterials Incorporating Gain Devices

Hao Xin, ECE / Physics Department, University of Arizona

In this program, we have studied the potentials and challenges of utilizing active gain device and non-Foster element to overcome the loss and bandwidth limits on conventional passive MTMs and electrically small antennas. First, we have investigated the theoretical limits on the loss and dispersion of passive MTMs. It can be proved that a passive NIM cannot be completely lossless and non-dispersive. The theoretical limits on the loss and dispersion of passive MTMs are reviewed. Our research has clearly demonstrated both theoretically and experimentally that the loss of a MTM can be compensated by judiciously placing the active gain device, e.g. TD, into a MTM unit cell. Over-compensation (gain) is achieved without losing the unique property of negative refractive index. Two types of active gain NIMs including an active CLRH TL and an active volumetric MTM are proposed, designed, and experimentally verified. Both have shown the simultaneous negative refractive index with gain. Figures 1 and 2 show the results of the volumetric active MTM that has negative index of refraction as well as gain simultaneously.

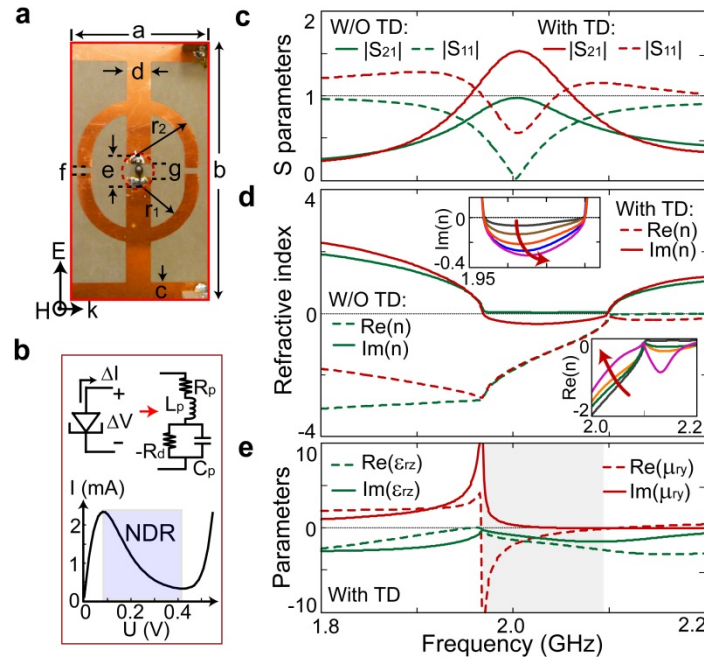


Figure 1. Simulated results and retrieved parameters of the sub-wavelength wire and SRR based artificial medium with and without embedded TDs. (a) Photograph of the fabricated unit cell with an embedded TD. Metallic patterns are printed on a 1.27-mm-thick Rogers-6006 substrate, whose dielectric constant is 6.5. Related dimensions are $a = 27$ mm, $b = 54$ mm, $c = 4$ mm, $d = 5$ mm, $e = 6$ mm, $f = 0.8$ mm, $g = 2.5$ mm, $r_1 = 9$ mm, and $r_2 = 12$ mm. (b) Equivalent circuit model of the embedded TD (TD261 by General Electric) and its I-V curve. R_p , L_p and C_p are the parasitic resistance, inductance and capacitance of the TD, respectively (c) Simulated S parameters of the unit cell with and without the TD under a normal plane wave incidence. The polarization of the incidence is shown at the bottom left corner of (a). (d) Retrieved effective refractive index of the effective medium with and without TD. The upper and lower insets show the dependency of the real and imaginary parts of retrieved refractive index on $-R_d$. As indicated by the red arrows, with an increased R_d , while the imaginary part of the refractive index becomes more negative, the real part becomes less negative. (e) Retrieved constitutive parameters of the effective medium with embedded TD.

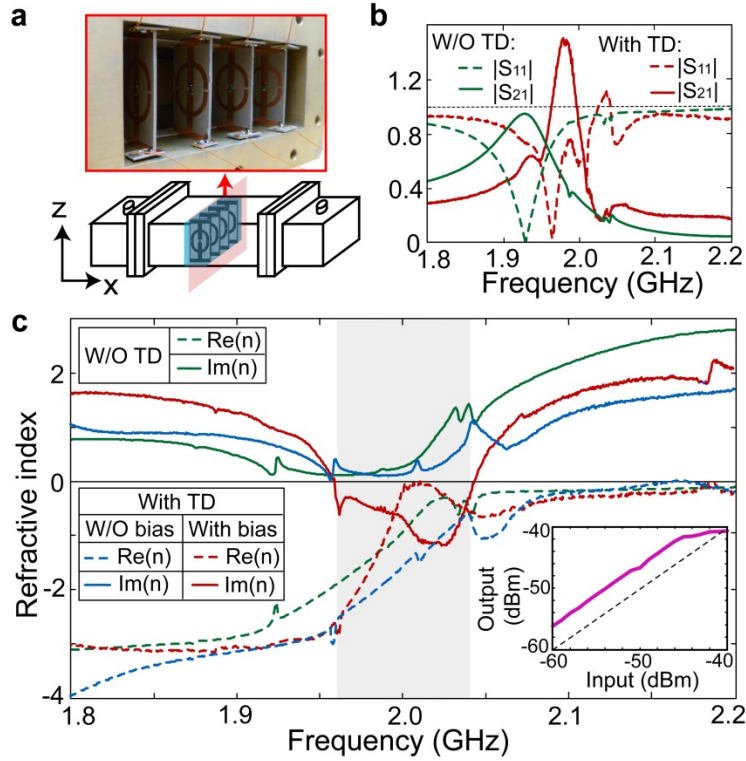


Figure 2. Experimental results and retrieved parameters of the fabricated metamaterial sample. (a) Photograph (top) and schematic drawing (bottom) of the fabricated single layer sample placed in a standard WR-430 rectangular waveguide. (b) Measured S parameters for the samples without TDs (green lines) and with TDs biased at a DC voltage of 0.38 V (red lines). The S parameters were measured using a vector network analyzer, i.e., Agilent E8361a. (c) Retrieved refractive indices from the experimental S parameters for three different configurations, i.e., the sample without TDs (green lines), the sample with unbiased TDs (blue lines) and the sample with biased TDs (red lines). The inset shows the dependency of the output power on the input power. It is seen that in a wide range of incident power, the gain remains stable.

The problem of sign ambiguity of active gain metamaterial is then investigated theoretically. Based on the Nyquist criterion, we have analyzed the stability of a gain slab system made of different dispersive gain media. Two methods for determining the sign of refractive index for general lossy and gain media are developed and compared. We have also investigated a 45° wedge example to illustrate the frequency-domain simulation must be treated with care. The potential instability cannot be observed from the numerical simulation result.

Moreover, we have investigated the non-Foster circuits for broadband matching of electrically small antennas. We have proposed a rigorous way of analyzing the stability of non-Foster circuits by normalized determinant function (NDF) method. A stable floating negative capacitor has been designed, fabricated and measured. We have studied practical factors that may affect the stability of non-Foster circuits. The factors include the device parasitics, the choice of DC biasing, the length of TLs in the layout, and the realistic load impedance. The concept of non-Foster element, such as the negative capacitor and negative inductor, is then introduced to improve the matching bandwidth of electrically small antennas. A negative-resistor NII circuit and Linvill NIC circuit are used to realize non-Foster elements, however, the non-Foster elements are shown to be bandwidth-limited in practice. Experiments have been done to verify the stability analysis results. By carefully design of the non-Foster circuit, we then achieved a stable negative capacitor in practice. A -40 pF non-Foster circuit is then applied to match

a 2-meter helical antenna at HF band. The result shows that the non-Foster matched helical antenna received 20-30 dB more signal power from 3 to 13 MHz than without matching case, and 15 dB more than commercial HF whip antenna.

In the future works, with the proof of the existence of active gain NIMs in practice, one can study its potential applications by taking advantages of its unique properties. By a deep understanding of the behavior of gain MTMs at microwave frequencies, one may scale down the size and build up active gain MTMs at THz or optical frequencies, which have more severe material losses than microwave frequencies. Such active MTMs can help realize novel device, such as active antennas, nanoscale or cavity-free lasers, active imaging, etc.

Another interesting topic to work on is the nonlinear active MTM. The large enhancement of nonlinear effects has been observed in many nonlinear active MTMs, which is not common in ordinary nonlinear optical media. Various specific and novel phenomena are also predicted or observed in nonlinear active MTMs, including bistability, tuning and switching, nonlinear chirality, frequency conversion and parametric amplification, phase matching and phase conjugation, etc.

Although we have proved the benefit from non-Foster matching circuit for electrically small antennas, there are still many challenges in this area. For example, we have only proposed the method of analyzing the stability, however, there are still no definite design rules showing how to stabilize the active circuit without sacrificing the performance. A synthesis method of non-Foster network also needs to be developed. In addition, for practical communication application, the power capacity and the DC-power consumption of the non-Foster matching circuit need to be taken into consideration for a transmit antenna. At the receiver end, the noise figure of the non-Foster matching circuit also needs to be considered.

References

- [1] D. Ye, K. Chang, L. Ran, and H. Xin, "Volumetric Microwave Gain Medium with Negative Refractive Index," *Nat. Communications*, vol. 5, pp. 1–7, 2014.
- [2] Q. Tang, and H. Xin, "Active Metamaterial Incorporating Gain Device / Medium: A Review," *J. of Applied Computational Electromagnetics*, Dec. 2014.
- [3] A. Kantemur, Q. Tang, and H. Xin, "Design of Volumetric Sub-THz Negative Refractive Index Metamaterial with Gain," *IEEE AP/URSI Symp.*, Puerto Rico, July 2016.
- [4] Q. Tang, and H. Xin, "Stability Analysis of Non-Foster Circuit Using Normalized Determinant Function," *IEEE Trans. Microwave Theory and Techniques*, under revision, Jan. 2017.
- [5] Q. Tang, and H. Xin, "The Sign Choice of Refractive Index in Active Gain Metamaterials," in preparation, Feb. 2017.
- [5] Q. Tang, A. Kantemur, and H. Xin, "A Review of Active Metamaterials Incorporating Gain Device / Medium," 2015 IEEE International Symposium on Antennas and Propagation and North American Radio Science Meeting, Vancouver, British Columbia, Canada, July 19-25, 2015.
- H. Xin, Q. Tang, and A. Kantemur, "Metamaterials with Gain Compensation by Active Devices," *Provisional application - UA16-104*, Nov. 2015.
- [6] Q. Tang, and H. Xin, "Stability analysis and parasitic effects of negative impedance converter circuits," *IEEE International Microwave Symposium*, Phoenix, Arizona, May 17-22, 2015.
- [7] Q. Tang, and H. Xin, "Stability of Tunnel Diode based Negative Impedance Circuit," *IEEE AP/URSI Symp.*, Memphis, July 2014.
- [8] X. Yu, Q. Tang, M. Liang, and H. Xin, "Study of Power Efficiency of Non-Foster Impedance Matching for Electrically Small Antenna," *IEEE AP/URSI Symp.*, Memphis, July 2014.
- [9] (invited) Q. Tang, M. Liang, and H. Xin, "Terahertz Metasurface for Potential Live Cell Sensing Application," *IEEE AP/URSI Symp.*, Orlando, July 2013.

- [10] Q. Tang, X. Yu, M. Liang, W. Hua, and H. Xin, "Investigation of Nonlinear Modeling for Active Antenna Design," IEEE AP/URSI Symp., Orlando, July 2013.
- [11] K. Chang, T. Jiang, L. Ran, and H. Xin, "Investigation of Microwave Negative Refractive Index (NRI) Transmission Lines Incorporating Tunnel Diodes," IEEE Antennas Wireless Propag. Lett., vol. 11, pp. 671-674, 2012.
- [12] T. Jiang, K. Chang, L. Si, L. Ran, and H. Xin, "Active microwave negative-index metamaterial transmission line with gain," Phys. Rev. Lett., Nov. 2011.

AFOSR Deliverables Submission Survey

Response ID:7645 Data

1.

Report Type

Final Report

Primary Contact Email

Contact email if there is a problem with the report.

hxin@ece.arizona.edu

Primary Contact Phone Number

Contact phone number if there is a problem with the report

520-626-6941

Organization / Institution name

the University of Arizona

Grant/Contract Title

The full title of the funded effort.

Fundamental Properties and Practical Applications of Active Microwave Metamaterials Incorporating Gain Devices

Grant/Contract Number

AFOSR assigned control number. It must begin with "FA9550" or "F49620" or "FA2386".

FA9550-13-1-0209

Principal Investigator Name

The full name of the principal investigator on the grant or contract.

Hao Xin

Program Officer

The AFOSR Program Officer currently assigned to the award

Harold Weinstock

Reporting Period Start Date

10/01/2013

Reporting Period End Date

09/30/2016

Abstract

Metamaterials are artificially designed composite materials which can exhibit unique and unusual properties such as the negative refractive index, negative phase velocity, etc. The concept of metamaterials becomes prevalent in the electromagnetic society since the first experimental implementation in the early 2000s. Many fascinating potential applications, e.g. super lens, invisibility cloaking, and novel antennas that are electrically small, have been proposed based on metamaterials. However, most of the applications still remain in theory and are not suitable for practical applications mainly due to the intrinsic loss and narrow bandwidth (large dispersion) determined by the fundamental physics of metamaterials.

In this program, we have incorporated active gain devices into conventional passive metamaterials to overcome loss and even provide gain. Two types of active gain negative refractive index metamaterials have been proposed, designed and experimentally demonstrated, including an active composite left-/right-handed transmission line and an active volumetric metamaterial. These designs have been extended to THz frequency range. In addition, we have investigated the non-Foster circuits for broadband matching of electrically small antennas. A rigorous way of analyzing the stability of non-Foster circuits by normalized

DISTRIBUTION A: Distribution approved for public release

determinant function has been proposed. We have studied the practical factors that may affect the stability of non-Foster circuits, including the device parasitics, DC biasing, layouts and load impedance. A stable floating negative capacitor has been designed, fabricated and tested. Moreover, it is important to resolve the sign of refractive index for active gain media which can be quite challenging. We have investigated the analytical solution of a gain slab system, and applied the Nyquist criterion to analyze the stability of a causal gain medium. We have concluded that the result of frequency domain simulation has to be treated with care.

Distribution Statement

This is block 12 on the SF298 form.

Distribution A - Approved for Public Release

Explanation for Distribution Statement

If this is not approved for public release, please provide a short explanation. E.g., contains proprietary information.

SF298 Form

Please attach your [SF298](#) form. A blank SF298 can be found [here](#). Please do not password protect or secure the PDF. The maximum file size for an SF298 is 50MB.

[sf0298_Hao_Xin_Feb_2017.pdf](#)

Upload the Report Document. File must be a PDF. Please do not password protect or secure the PDF. The maximum file size for the Report Document is 50MB.

[Active_Metamaterial_AFOSR_Final_Report_Feb_2017.pdf](#)

Upload a Report Document, if any. The maximum file size for the Report Document is 50MB.

Archival Publications (published) during reporting period:

- [1] D. Ye, K. Chang, L. Ran, and H. Xin, "Volumetric Microwave Gain Medium with Negative Refractive Index," Nat. Communications, vol. 5, pp. 1–7, 2014.
- [2] Q. Tang, and H. Xin, "Active Metamaterial Incorporating Gain Device / Medium: A Review," J. of Applied Computational Electromagnetics, Dec. 2014.
- [3] A. Kantemur, Q. Tang, and H. Xin, "Design of Volumetric Sub-THz Negative Refractive Index Metamaterial with Gain," IEEE AP/URSI Symp., Puerto Rico, July 2016.
- [4] Q. Tang, and H. Xin, "Stability Analysis of Non-Foster Circuit Using Normalized Determinant Function," IEEE Trans. Microwave Theory and Techniques, under revision, Jan. 2017.
- [5] Q. Tang, and H. Xin, "The Sign Choice of Refractive Index in Active Gain Metamaterials," in preparation, Feb. 2017.
- [5] Q. Tang, A. Kantemur, and H. Xin, "A Review of Active Metamaterials Incorporating Gain Device / Medium," 2015 IEEE International Symposium on Antennas and Propagation and North American Radio Science Meeting, Vancouver, British Columbia, Canada, July 19-25, 2015.
- H. Xin, Q. Tang, and A. Kantemur, "Metamaterials with Gain Compensation by Active Devices," Provisional application - UA16-104, Nov. 2015.
- [6] Q. Tang, and H. Xin, "Stability analysis and parasitic effects of negative impedance converter circuits," IEEE International Microwave Symposium, Phoenix, Arizona, May 17-22, 2015.
- [7] Q. Tang, and H. Xin, "Stability of Tunnel Diode based Negative Impedance Circuit," IEEE AP/URSI Symp., Memphis, July 2014.
- [8] X. Yu, Q. Tang, M. Liang, and H. Xin, "Study of Power Efficiency of Non-Foster Impedance Matching for Electrically Small Antenna," IEEE AP/URSI Symp., Memphis, July 2014.

New discoveries, inventions, or patent disclosures:

Do you have any discoveries, inventions, or patent disclosures to report for this period?

Yes

Please describe and include any notable dates

H. Xin, Q. Tang, and A. Kantemur, "Metamaterials with Gain Compensation by Active Devices," Provisional application - UA16-104, Nov. 2015.

Do you plan to pursue a claim for personal or organizational intellectual property?

DISTRIBUTION A: Distribution approved for public release

Yes

Changes in research objectives (if any):

N/A.

Change in AFOSR Program Officer, if any:

Extensions granted or milestones slipped, if any:

AFOSR LRIR Number

LRIR Title

Reporting Period

Laboratory Task Manager

Program Officer

Research Objectives

Technical Summary

Funding Summary by Cost Category (by FY, \$K)

	Starting FY	FY+1	FY+2
Salary			
Equipment/Facilities			
Supplies			
Total			

Report Document

Report Document - Text Analysis

Report Document - Text Analysis

Appendix Documents

2. Thank You

E-mail user

Feb 16, 2017 10:41:32 Success: Email Sent to: hxin@ece.arizona.edu