

UNCLASSIFIED

AD NUMBER

AD012992

CLASSIFICATION CHANGES

TO: UNCLASSIFIED

FROM: CONFIDENTIAL

LIMITATION CHANGES

TO:
Approved for public release; distribution is unlimited.

FROM:
Distribution authorized to U.S. Gov't. agencies and their contractors;
Administrative/Operational Use; 31 MAR 1953.
Other requests shall be referred to National Aeronautics and Space Administration, Washington, DC.

AUTHORITY

28 Jan 1957 per doc markings ; NASA per DTIC form 55

THIS PAGE IS UNCLASSIFIED

AD 12992

Armed Services Technical Information Agency

Reproduced by

CLASSIFICATION CHANGED TO UNCLASSIFIED

The following National Advisory Committee for Aeronautics Reports have been regraded from Confidential to Unclassified per Authority of NACA Research Abstracts and Reclassification Notice No. 111 dated 28 January 1957; Bulletin List No. 120

Date 1 APRIL 1977

Signed Richard E. Reedy
OFFICE SECURITY ADVISOR

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

UNCLASSIFIED

Reproduced

FROM

LOW CONTRAST COPY.

ORIGINAL DOCUMENTS
MAY BE OBTAINED ON

LOAN

FROM

ARMED SERVICES TECHNICAL INFORMATION AGENCY
DOCUMENT SERVICE CENTER
U.B. BUILDING, DAYTON, 2, OHIO

SECURITY INFORMATION

CONFIDENTIAL

Copy 10
RM 3L53D01

1. 8015
P. 2
WCL5

AD No 12-992
ASTIA FILE COPY



RESEARCH MEMORANDUM

for the

Bureau of Aeronautics, Department of the Navy

WIND-TUNNEL INVESTIGATION AT LOW SPEED OF THE YAWING
STABILITY DERIVATIVES OF A 1/9-SCALE POWERED MODEL
OF THE CONVAIR XFY-1 VERTICALLY RISING AIRPLANE

REPORT NO. NACA DE 373

By M. J. Queijo, W. D. Wolhart, and H. S. Fletcher

Langley Aeronautical Laboratory
Langley Field, Va.

CLASSIFIED DOCUMENT

This material contains information affecting the national defense of the United States within the meaning of the espionage laws, Title 18, U.S.C., Secs. 793 and 794, the transmission or revelation of which in any manner to an unauthorized person is prohibited by law.

NATIONAL ADVISORY COMMITTEE
FOR AERONAUTICS

WASHINGTON

MAR 21 1953

CONFIDENTIAL

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

RESEARCH MEMORANDUM

for the

Bureau of Aeronautics, Department of the Navy

WIND-TUNNEL INVESTIGATION AT LOW SPEED OF THE YAWING
STABILITY DERIVATIVES OF A 1/9-SCALE POWERED MODEL
OF THE CONVAIR XFY-1 VERTICALLY RISING AIRPLANE

TED NO. NACA DE 573

By M. J. Queijo, W. D. Wolhart, and H. S. Fletcher

SUMMARY

An experimental investigation has been conducted in the Langley stability tunnel at low speed to determine the yawing stability derivatives of a 1/9-scale powered model of the Convair XFY-1 vertically rising airplane. Effects of thrust coefficient were investigated for the complete model and for certain components of the model. Effects of control deflections and of propeller blade angle were investigated for the complete model. Most of the tests were made through an angle-of-attack range from about -4° to 29° , and the thrust coefficient range was from 0 to 0.7.

In order to expedite distribution of these data, no analysis of the data has been prepared for this.

INTRODUCTION

Various investigations have shown that the dynamic stability characteristics of high-speed aircraft are critically dependent on certain mass and aerodynamic parameters and, hence, that reliable estimates of the dynamic stability of such aircraft can be made only if these parameters are determined accurately. The purpose of the present investigation was to determine the yawing stability derivatives of a powered model of the Convair XFY-1 vertically rising airplane from a series of low-speed tests in the Langley stability tunnel. These tests were made at the

request of the Bureau of Aeronautics to aid in the development of the XFV-1 airplane. The results of a previous investigation to determine the static longitudinal and lateral stability derivatives of the same model are given in reference 1.

SYMBOLS AND COEFFICIENTS

The data presented herein are in the form of standard NACA coefficients of forces and moments which are referred to the system of stability axes (fig. 1) with the origin at the projection on the plane of symmetry of the 14-percent point of the wing mean aerodynamic chord. This system of axes is defined as an orthogonal system having the origin at the assumed center of gravity and in which the Z-axis is in the plane of symmetry and perpendicular to the relative wind, the X-axis is in the plane of symmetry and perpendicular to the Z-axis, and the Y-axis is perpendicular to the plane of symmetry. Positive directions of forces, moments, and displacements are shown in figure 1.

b	theoretical wing span, 2.86 ft
d	local propeller blade chord, ft
h	maximum blade thickness at local chord, ft
D	propeller diameter, ft
q	dynamic pressure, $\frac{1}{2}\rho V^2$, lb/sq ft
r_0	radial distance from propeller hub center line, ft
r	yawing angular velocity, radians per second
R	propeller radius, 0.889 ft
S	area of theoretical wing, 4.27 sq ft
V	free-stream velocity, ft/sec
α	wing angle of attack, deg
β	sideslip angle, rad
$(\beta_0)_F$	front propeller blade angle measured at 0.75 R, deg
γ	angle of climb, deg

δ_e	elevator deflection, positive trailing edge up, deg
δ_R	rudder deflection, positive trailing edge to right, deg
ψ	angle of yaw, deg
θ	local blade angle, deg
ϕ	angle of roll, deg
ρ	mass density of air, slugs/cu ft
L	lift, lb
X	longitudinal force, lb
Y	side force, lb
T	thrust, lb ($T = X_{\text{propellers on}} - X_{\text{propellers off}}$, for complete model at $\alpha = 0^\circ$)
N	yawing moment, ft-lb
l	rolling moment, ft-lb
C_L	lift coefficient, L/qS
C_Y	side-force coefficient, Y/qS
C_T	thrust coefficient, T/qS
C_N	yawing-moment coefficient, N/qSb
$\frac{rb}{2V}$	yawing velocity parameter
C_l	rolling-moment coefficient, l/qSb

$$C_{Y_r} = \frac{\partial C_Y}{\partial \frac{rb}{2V}}$$

$$C_{l_r} = \frac{\partial C_l}{\partial \frac{rb}{2V}}$$

$$C_{n_T} = \frac{\partial C_n}{\partial \frac{rb}{2V}}$$

Abbreviations:

W	wing
T _u	upper tail
T _L	lower tail
F	fuselage
P	propeller

Subscripts:

F	front
L	left
R	right

MODEL AND APPARATUS

The model used in this investigation was a 1/9-scale powered model of the Convair XPY-1 vertically rising airplane. Pertinent geometric characteristics of the model are given in figure 2. The wing was built around a core made from 1/2-inch-thick duralumin sheet and was built up to the proper contour with laminated mahogany. The fuselage and fins were constructed of laminated mahogany. All control surfaces were made of solid duralumin. The wing and fins had modified NACA 63-009 airfoil contours parallel to the model thrust line.

The propeller blades, for which the geometric characteristics are given in figure 3, were constructed of heat-treated duralumin and were driven by a 50-horsepower water-cooled motor. The motor was equipped with a dual-rotating gear box. Power for the model motor was supplied by a 75-kilowatt motor-generator set, which is part of the equipment of the Langley stability tunnel. Propeller speeds were measured by means of a Strobocorr unit in conjunction with an alternator driven directly by the model motor.

A two-strut support system was used to attach the model to a six-component balance system. Photographs of the model mounted on the struts are given as figure 4. All tests were made in the Langley stability tunnel in which yawing flow is simulated by curving the air stream about a stationary model (ref. 2).

TESTS

All tests of this investigation were made at a dynamic pressure of 16 pounds per square foot, which corresponds to a Mach number of about 0.11 and a Reynolds number of 1.28×10^6 based on the wing mean aerodynamic chord of 1.73 feet. Most of the tests were made with controls in the neutral position and with the front blades set at $(\beta_0)_F = 25^\circ$. A few tests were made to determine effects of blade angle on the yawing stability derivatives. In all cases the rear blades were set at 1° less than the front blades. Effects of control deflections also were investigated.

The yawing stability derivatives of three basic model configurations were investigated, and these configurations were as follows:

Wing with fuselage and propellers	W + F + P
Wing with fuselage, upper tail, and propeller	W + F + T _u + P
Complete model (wing with fuselage, upper tail, lower tail, and propeller)	W + F + T _u + T _l + P

The characteristics of these configurations with propellers removed also were investigated.

The angle-of-attack range for all tests was from about -4° to 29° . Tests were made at values of $rb/2V$ of 0, -0.0281, -0.0581, and -0.0814.

Power-on data were obtained for several thrust coefficients from 0 to 0.7. The thrust coefficient was held constant for any particular case by holding the propeller speed constant while varying the angle of attack. The scope of this investigation is indicated in table I.

CORRECTIONS

Approximate corrections for jet-boundary effects were applied to the angle of attack by the methods of reference 3. Blockage corrections were determined and applied by the methods of reference 4. Strut-tare corrections were determined experimentally and applied to all data.

PRESENTATION OF RESULTS

The results of the investigation are presented in figures 5 to 9. The data, model configuration, and figure on which the data are shown are indicated in table I for convenience in locating desired information. All moment data are referred to the system of stability axes with the origin at the projection of the 14-percent wing mean aerodynamic chord on the plane of symmetry.

CONCLUDING REMARKS

An experimental investigation has been made in the Langley stability tunnel at low speed to determine the yawing stability derivatives of a 1/9-scale powered model of the Convair XFY-1 vertically rising airplane. Effects of thrust coefficient were investigated for the complete model and for certain components of the model. Effects of control deflection and of propeller blade angle were investigated for the complete model. Most of the tests were made through an angle-of-attack range from about 4° to 29° , and the thrust-coefficient range was from 0 to 0.7.

In order to expedite distribution of these data, no analysis of the data has been prepared for this paper.

Langley Aeronautical Laboratory,
National Advisory Committee for Aeronautics,
Langley Field, Va.

M. J. Queijo
M. J. Queijo

Aeronautical Research Scientist

W. D. Wolhart
W. D. Wolhart

Aeronautical Research Scientist

H. S. Fletcher
H. S. Fletcher

Aeronautical Research Scientist

Approved:

Thomas A. Harris

Thomas A. Harris
Chief of Stability Research Division

vr

REFERENCES

1. Queijo, M. J., Wolhart, W. D., and Fletcher, H. S.: Wind-Tunnel Investigation at Low Speed of the Static Longitudinal and Lateral Stability Characteristics of a 1/9-Scale Powered Model of the Convair QFY-1 Vertically Rising Airplane - TED NO. NACA DE 373. NACA RM SL53B20, Bur. Aero., 1953.
2. Bird, John D., Jaquet, Byron M., and Cowan, John W.: Effect of Fuselage and Tail Surfaces on Low-Speed Yawing Characteristics of a Swept-Wing Model as Determined in Curved-Flow Test Section of the Langley Stability Tunnel. NACA TN 2483, 1951. (Supersedes NACA RM L8G13.)
3. Silverstein, Abe, and White, James A.: Wind-Tunnel Interference With Particular Reference To Off-Center Positions of the Wing and to the Downwash at the Tail. NACA Rep. 547, 1936.
4. Herriot, John C.: Blockage Corrections for Three-Dimensional Closed-Throat Wind Tunnels, With Consideration of the Effects of Compressibility. NACA Rep. 995, 1950. (Supersedes NACA RM A7B28a.)

TABLE I
SUMMARY OF MODEL CONFIGURATIONS TESTED,
TEST VARIABLES, AND DATA PRESENTED

Model configuration	Data presented	Figure
W + F + T _u + T _L + P (β_0) _F = 25°, 35°, 50°	T _c ' against propeller speed	5
W + F W + F + P, (β_0) _F = 25°	C _{Y_r} , C _{l_r} , C _{n_r} against C _L for various thrust coefficients	6(a)
W + F + T _u W + F + T _u + P, (β_0) _F = 25°	C _{Y_r} , C _{l_r} , C _{n_r} against C _L for various thrust coefficients	6(b)
W + F + T _u + T _L W + F + T _u + T _L + P, (β_0) _F = 25°	C _{Y_r} , C _{l_r} , C _{n_r} against C _L for various thrust coefficients	6(c)
W + F + T _u + T _L W + F + T _u + T _L + P, (β_0) _F = 35°	C _{Y_r} , C _{l_r} , C _{n_r} against C _L for various thrust coefficients	7
W + F + T _u + T _L W + F + T _u + T _L + P, (β_0) _F = 50°	C _{Y_r} , C _{l_r} , C _{n_r} against C _L for various thrust coefficients	8
W + F + T _u + T _L + P, (β_0) _F = 25° T _c ' = 0	C _{Y_r} , C _{l_r} , C _{n_r} against α for various control deflections	9(a)
W + F + T _u + T _L + P, (β_0) _F = 25° T _c ' = 0.2	C _{Y_r} , C _{l_r} , C _{n_r} against α for various control deflections	9(b)
W + F + T _u + T _L + P, (β_0) _F = 25° T _c ' = 0.4	C _{Y_r} , C _{l_r} , C _{n_r} against α for various control deflections	9(c)
W + F + T _u + T _L + P, (β_0) _F = 25° T _c ' = 0.7	C _{Y_r} , C _{l_r} , C _{n_r} against α for various control deflections	9(d)



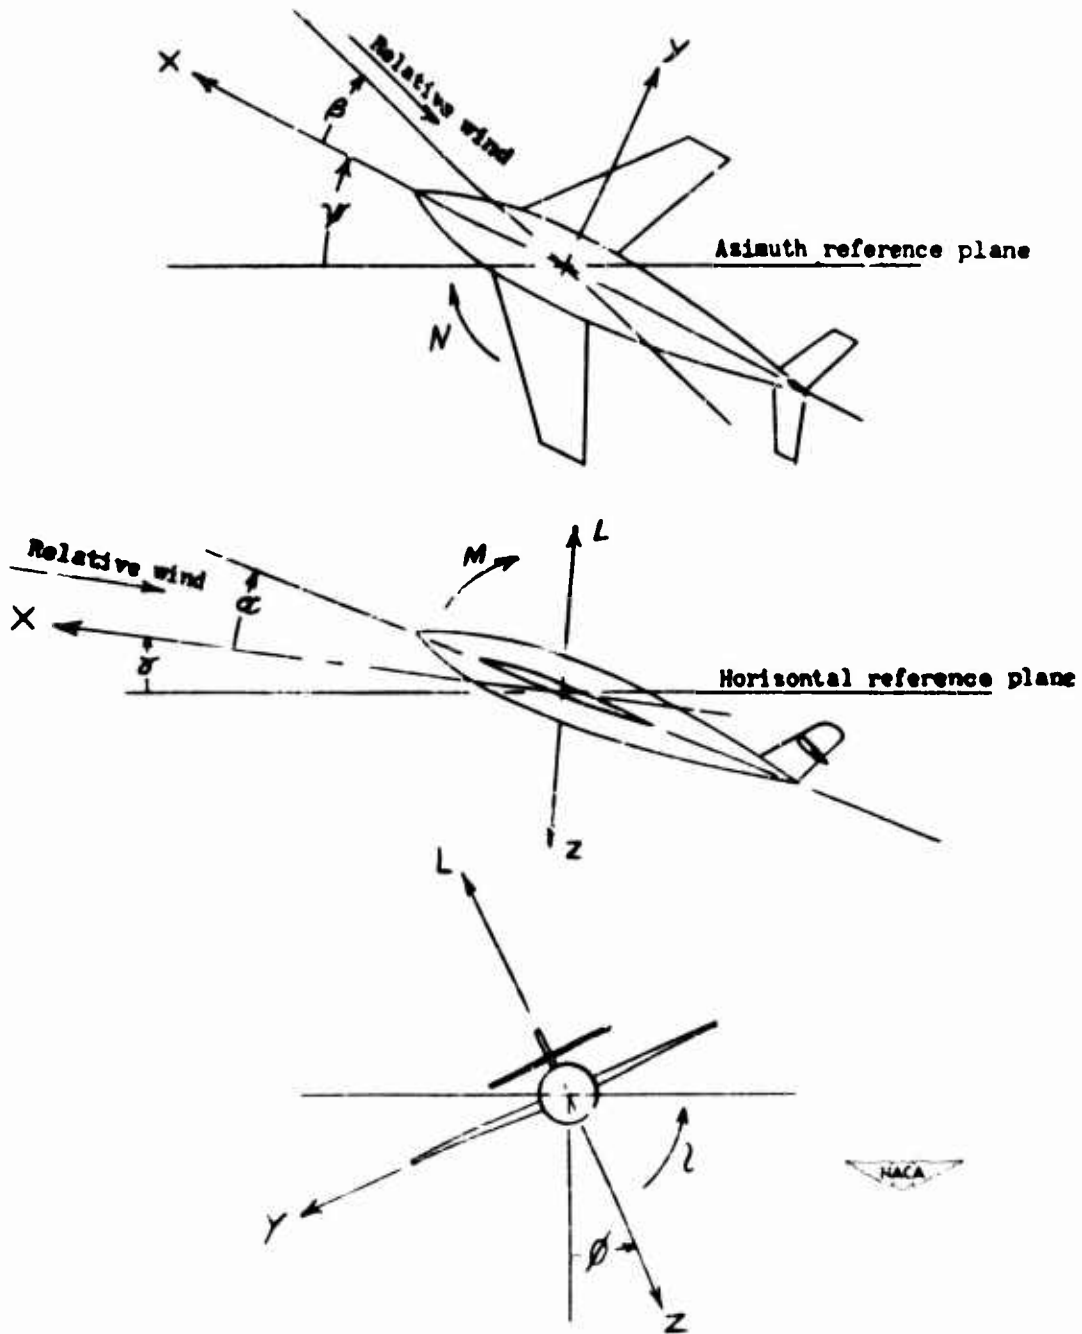


Figure 1.- System of stability axes. Arrows indicate positive direction of forces, moments, and displacements.

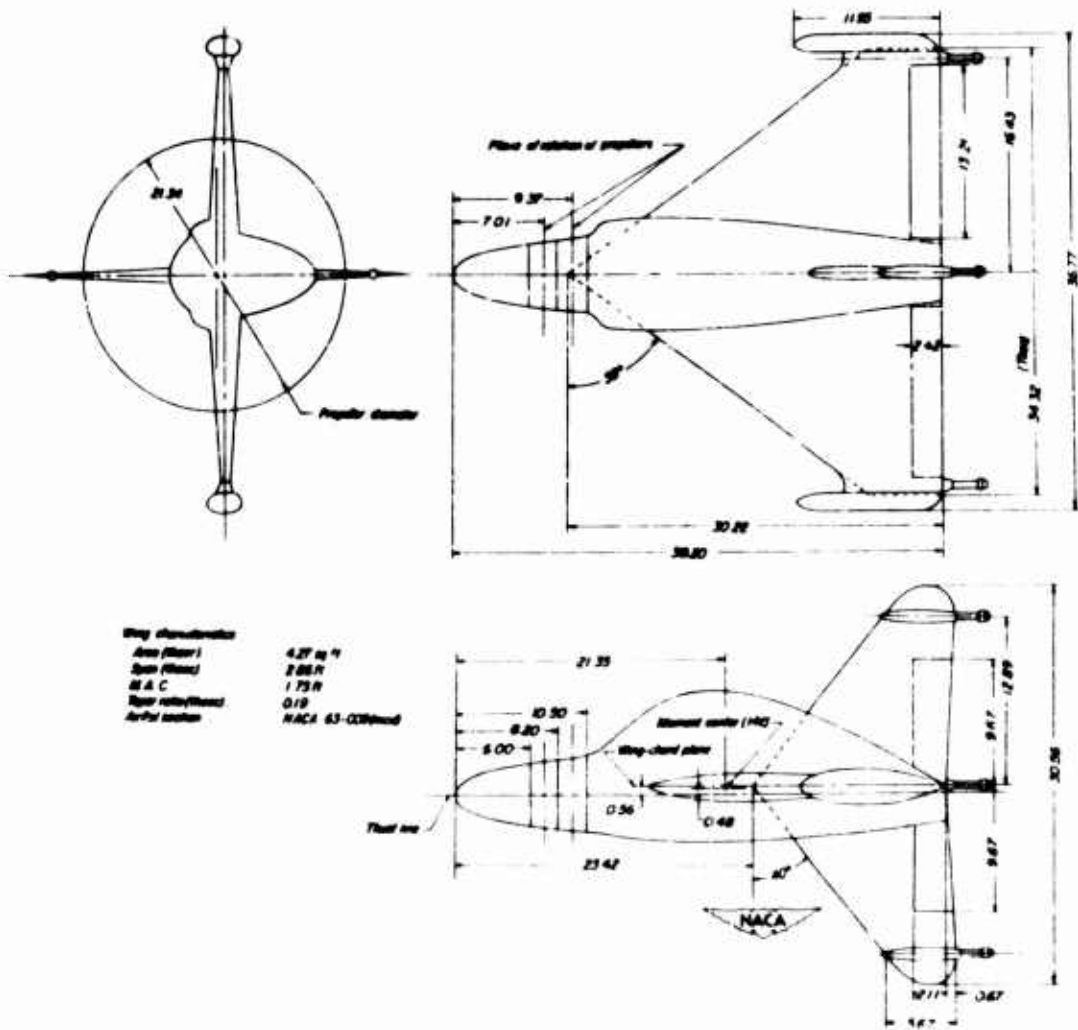


Figure 2.- Geometric characteristics of model. All dimensions are in inches.

4153

NACA RM SL53D01

CONFIDENTIAL


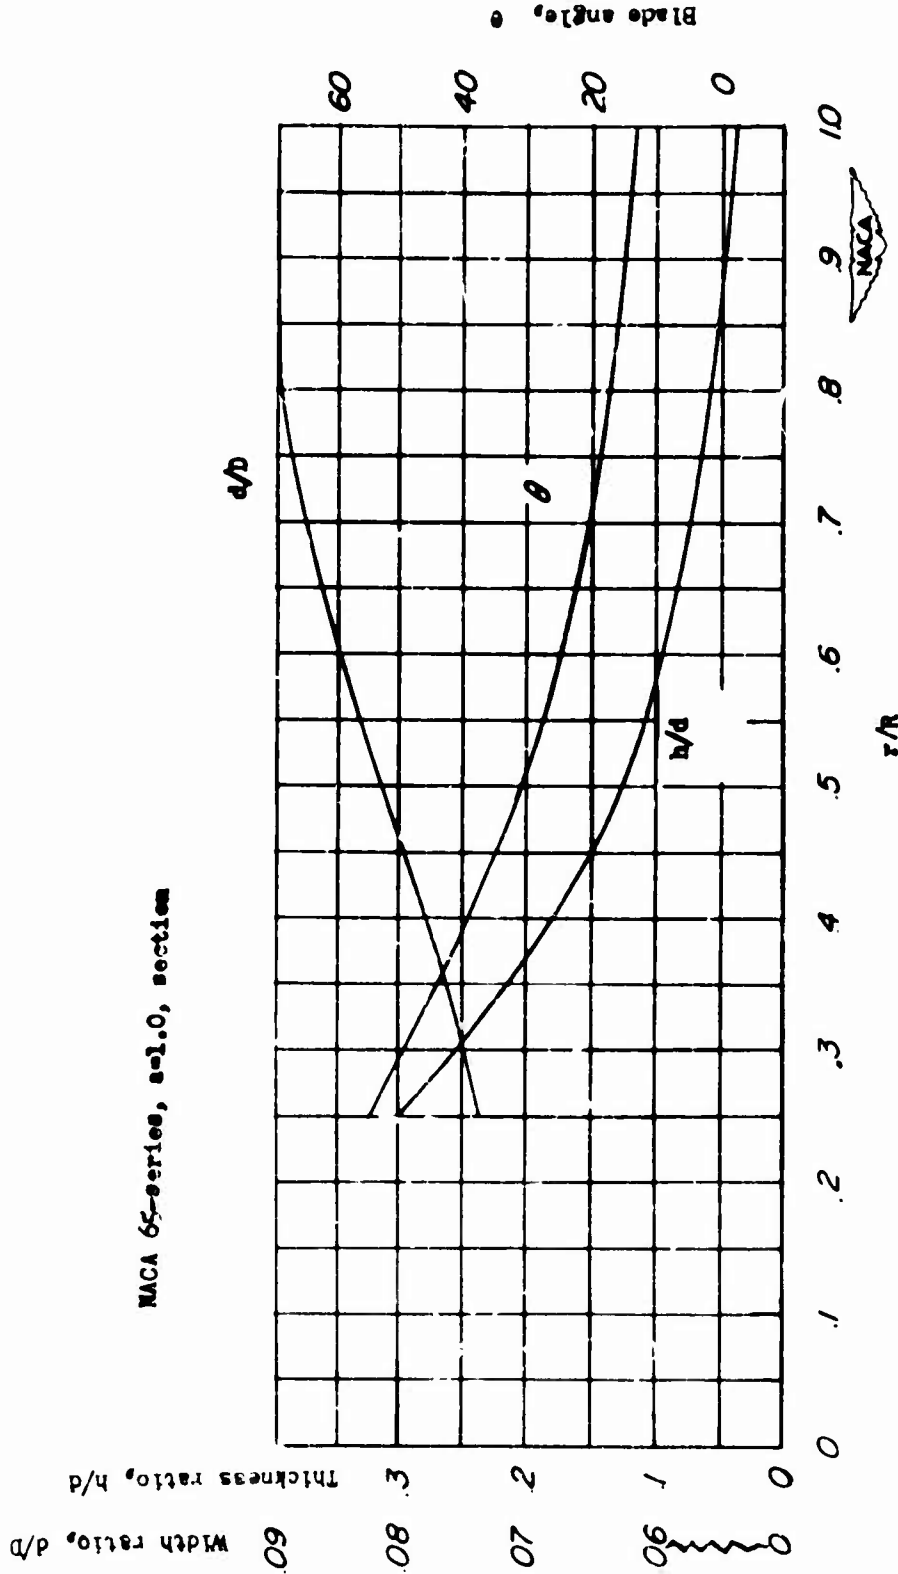



Figure 3.- Geometric characteristics of propeller blades used on a 1/9-scale model of the Convair XPY-1 vertically rising airplane. $R = 0.889$ feet.

CONFIDENTIAL

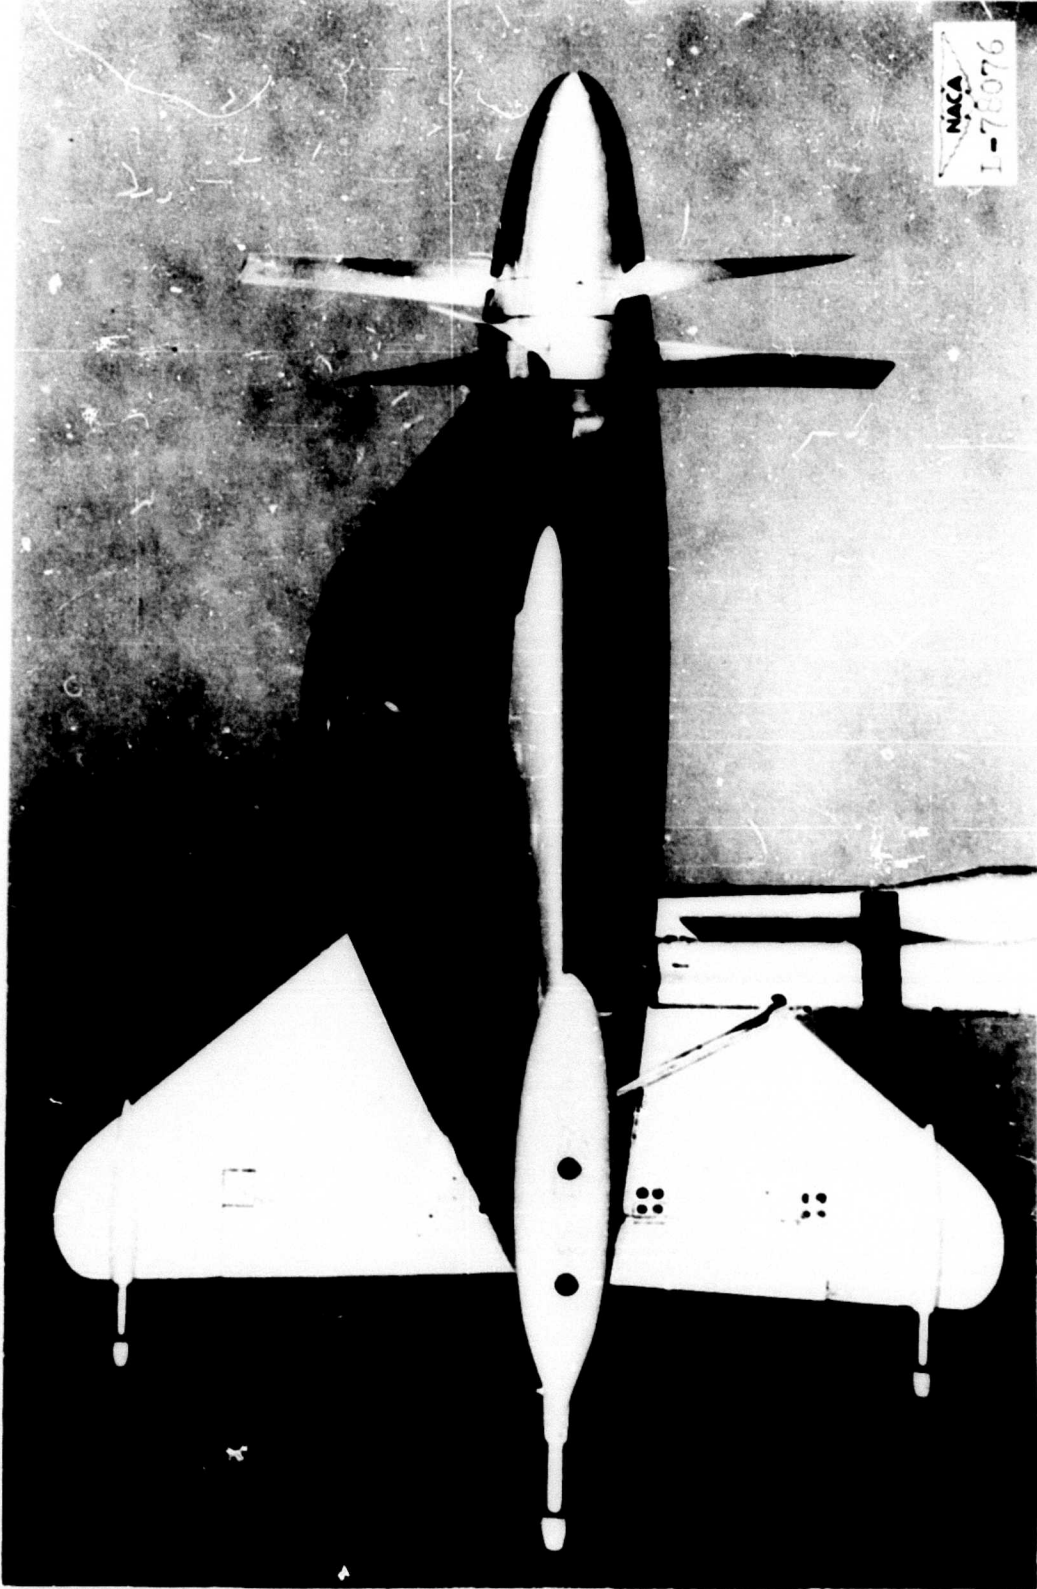

(a) Side view of model.

Figure 4.- Photographs of model used in investigation.

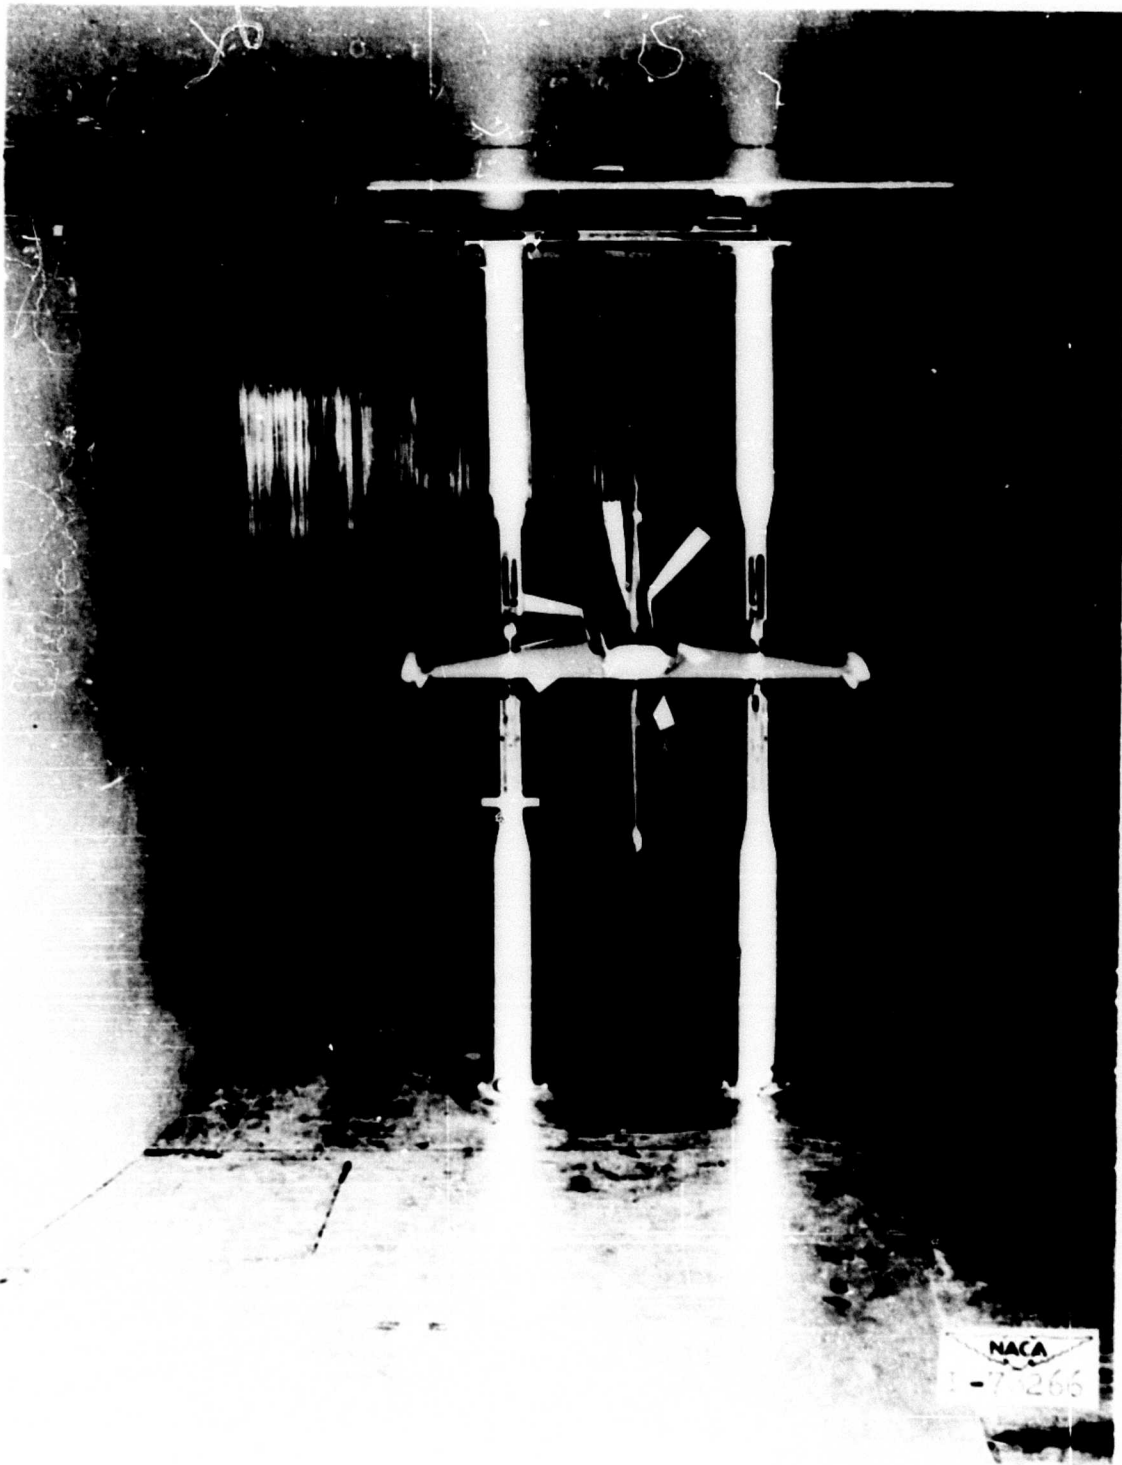

(b) Rear view of model with dummy struts used in tare tests.

Figure 4.- Concluded.





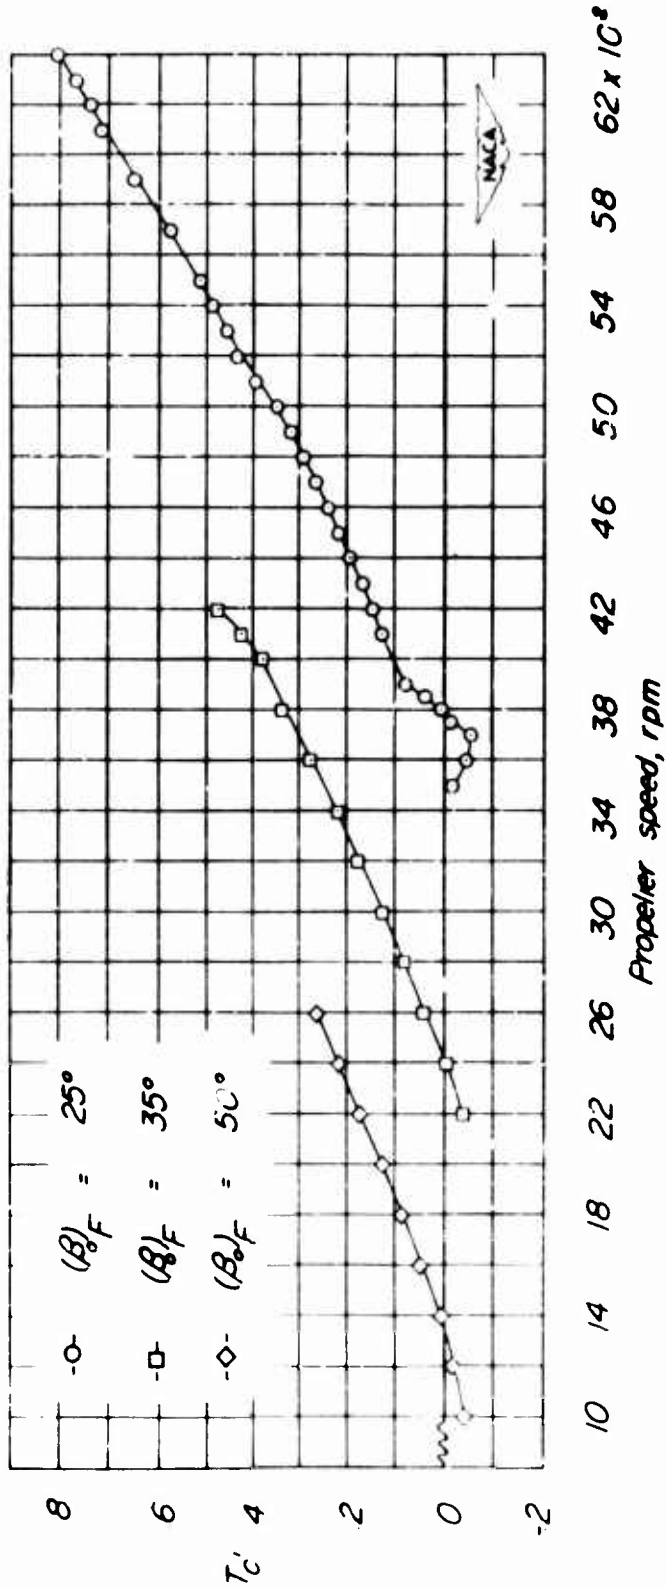


Figure 5.- Variation of thrust coefficient with propeller speed for various propeller-blade angles. $\alpha = 0^\circ$; $q = 16$ pounds per square foot; complete model.

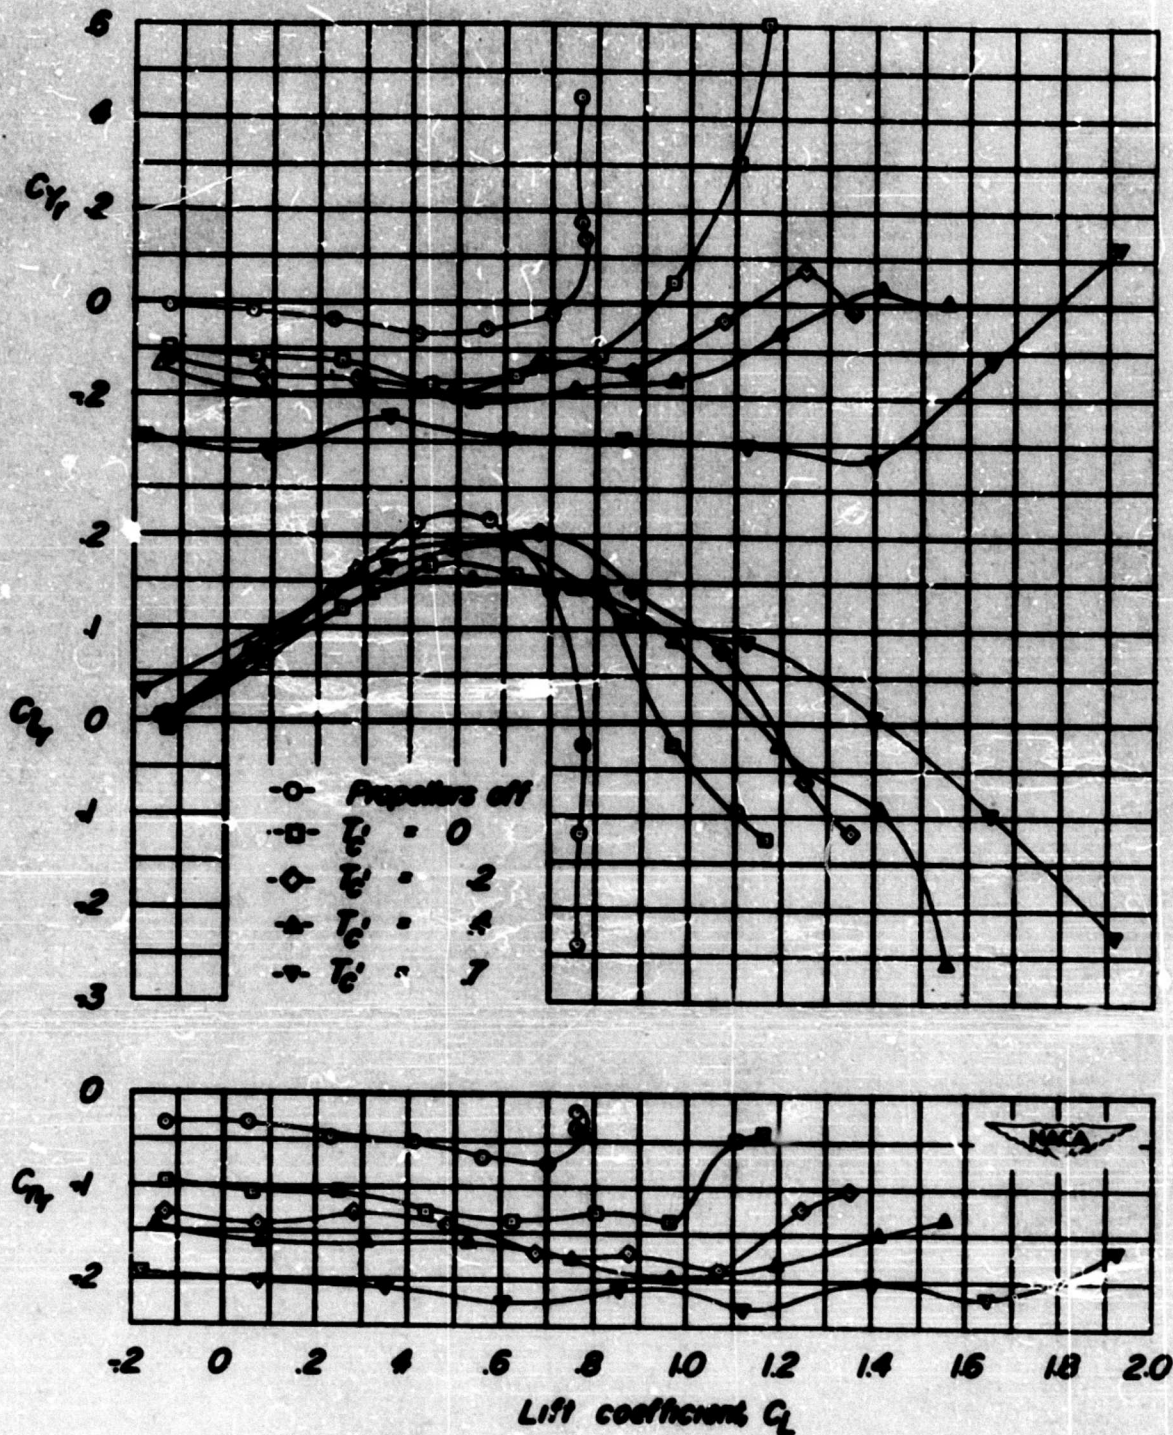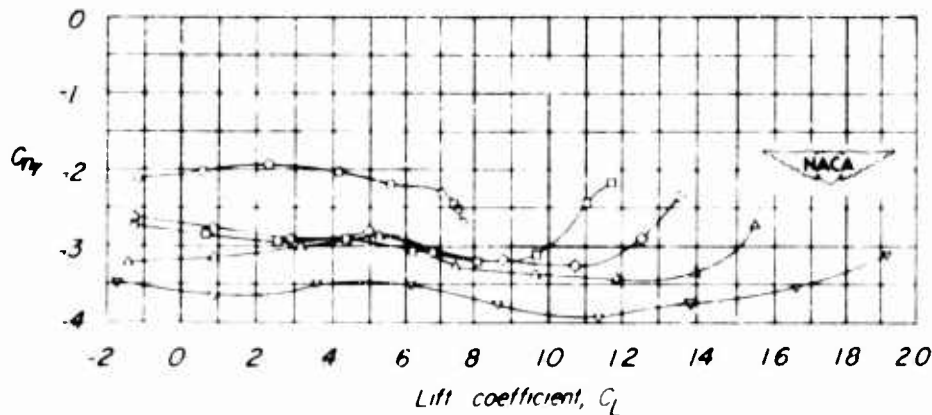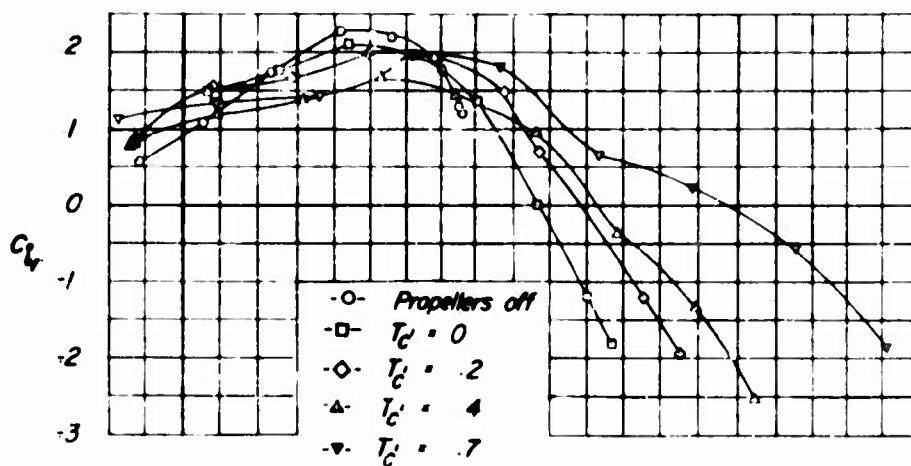


(a) Both fins off. Configurations W + F and W + F + P.

Figure 6.- Effect of thrust coefficient on the yawing stability derivatives of various components of a 1/9-scale powered model of the Convair XFY-1 vertically rising airplane. $(\beta_0)_F = 25^\circ$.

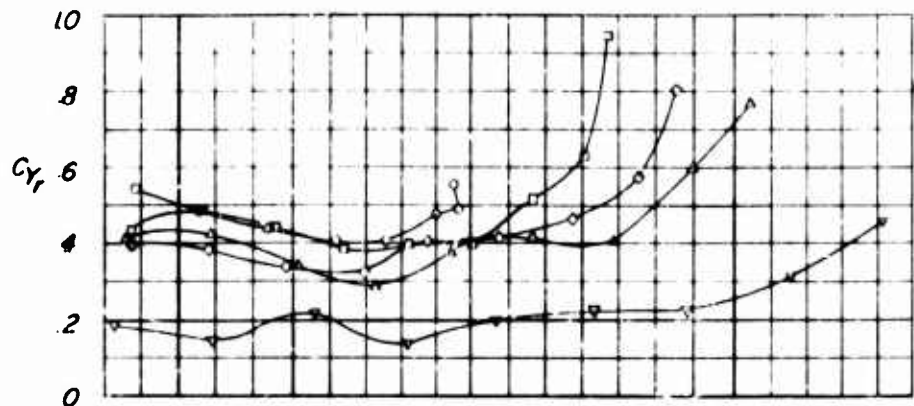

(b) Lower fin off. Configurations $W + F + T_u$ and $W + F + T_u + P$.

Figure 6.- Continued.

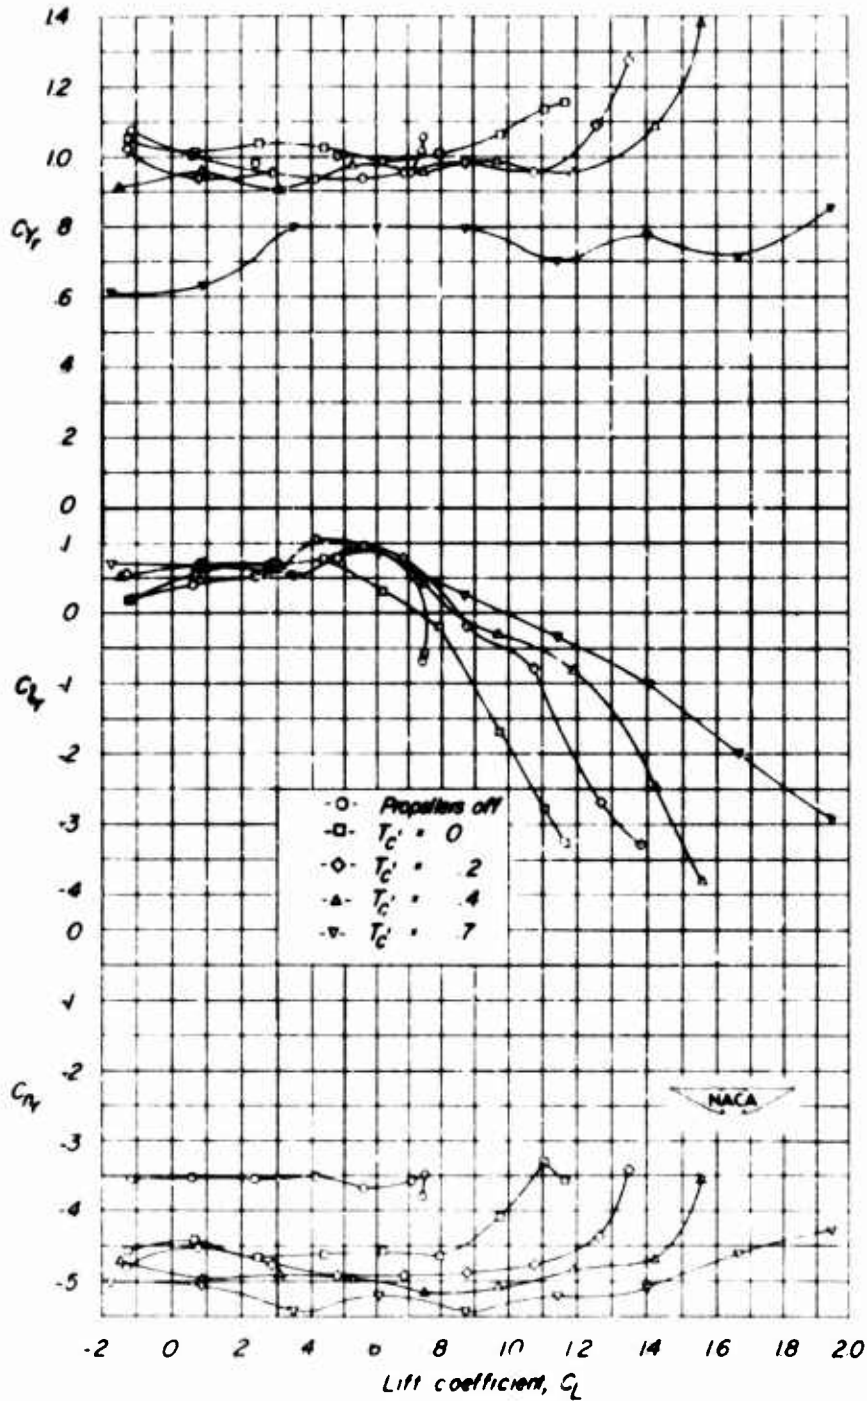

(c) Complete model. Configurations $W + F + T_u + T_L$ and $W + F + T_u + T_L + P$.

Figure 6.- Concluded.

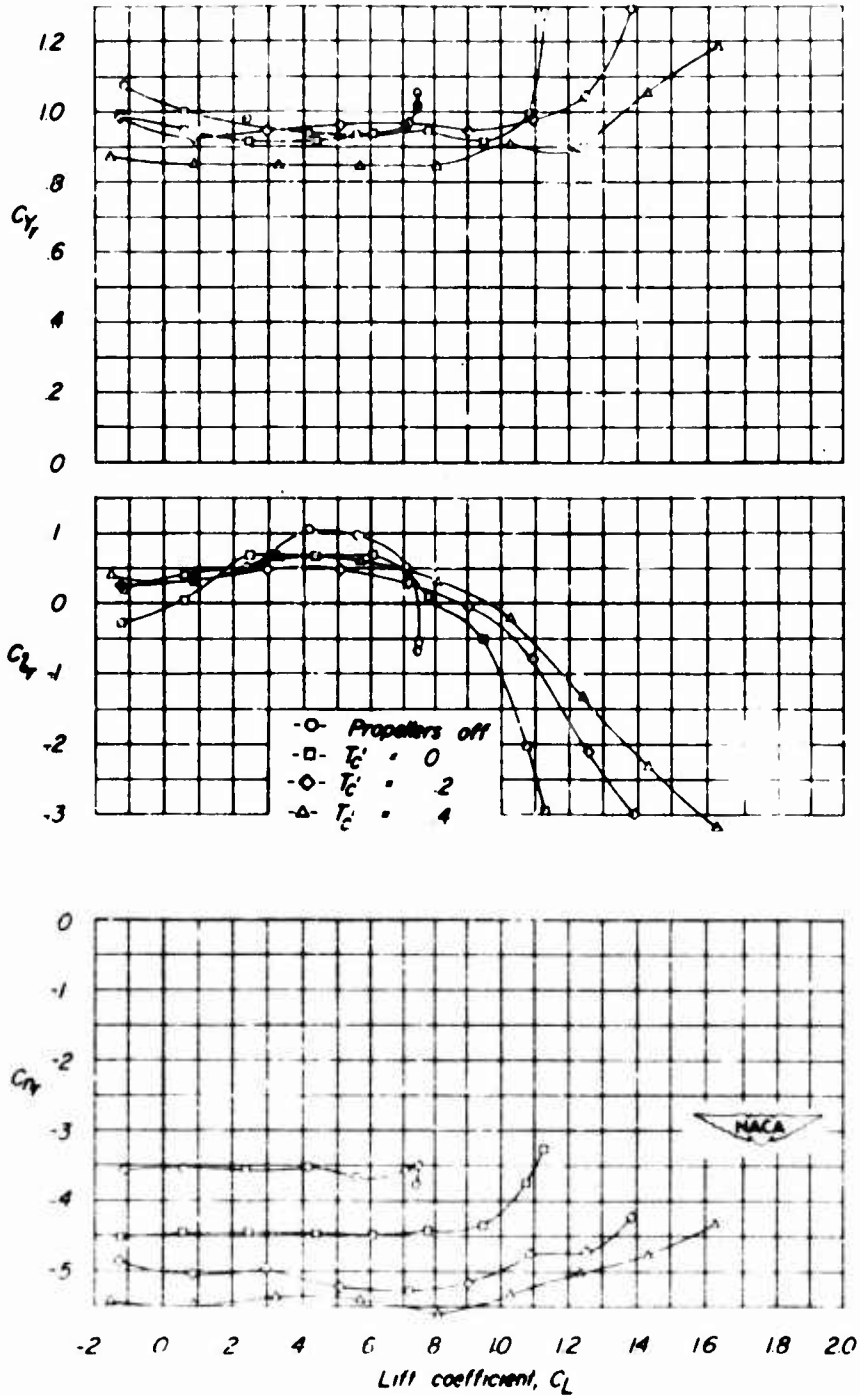


Figure 7.- Effect of thrust coefficient on the yawing stability derivatives of a 1/9-scale powered model of the Convair XFY-1 vertically rising airplane. $(\beta_0)_F = 35^\circ$; configurations $W + F + T_U + T_L$ and $W + F + T_U + T_L + P$.



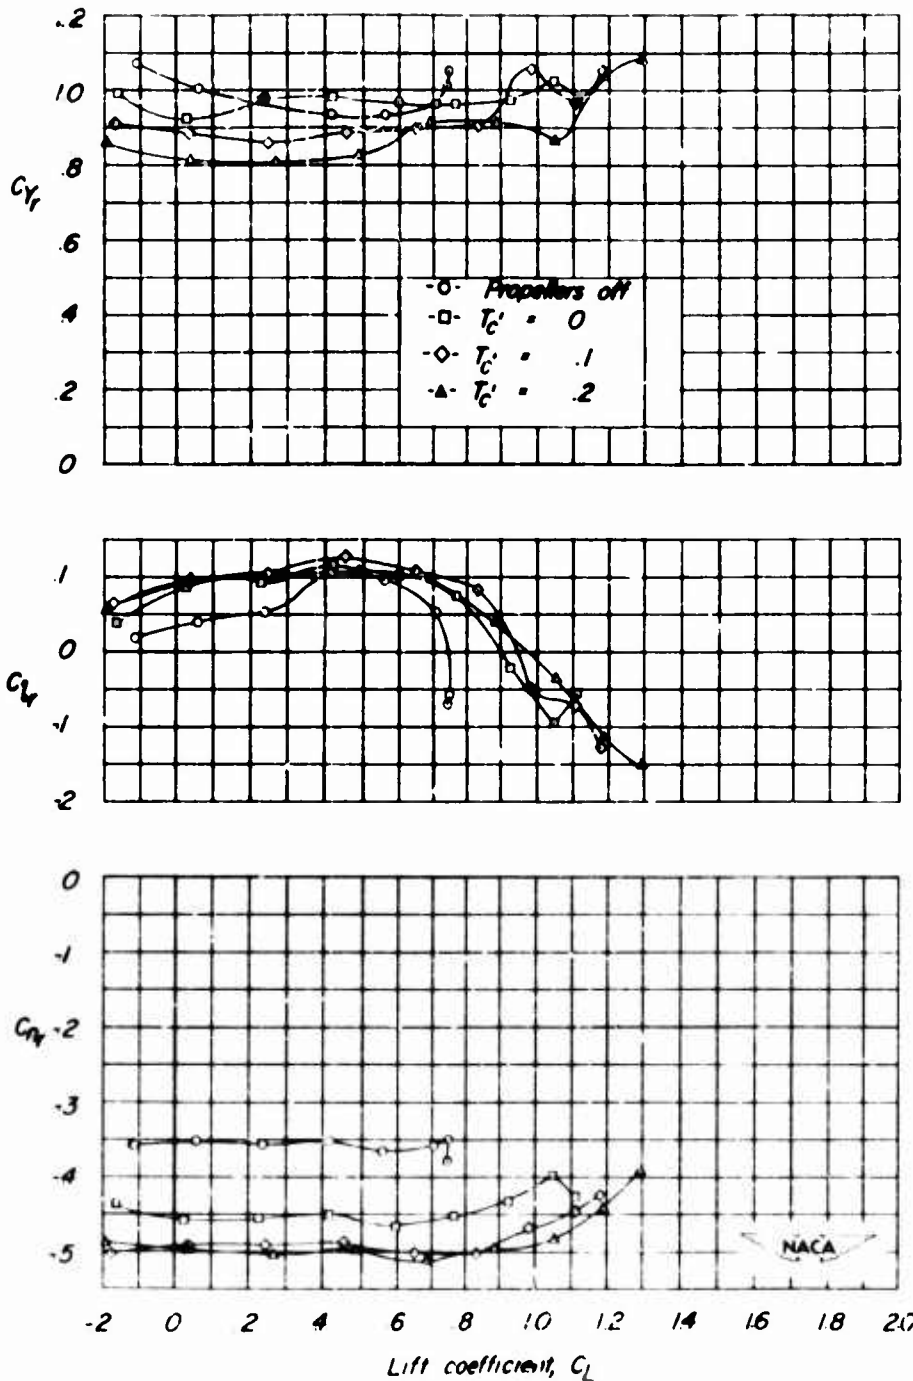


Figure 8.- Effect of thrust coefficient on the yawing stability derivatives of a 1/9-scale powered model of the Convair XFY-1 vertically rising airplane. $(\beta_0)_F = 50^\circ$; configurations $W + F + T_U + T_L$ and $W + F + T_U + T_L + P$.

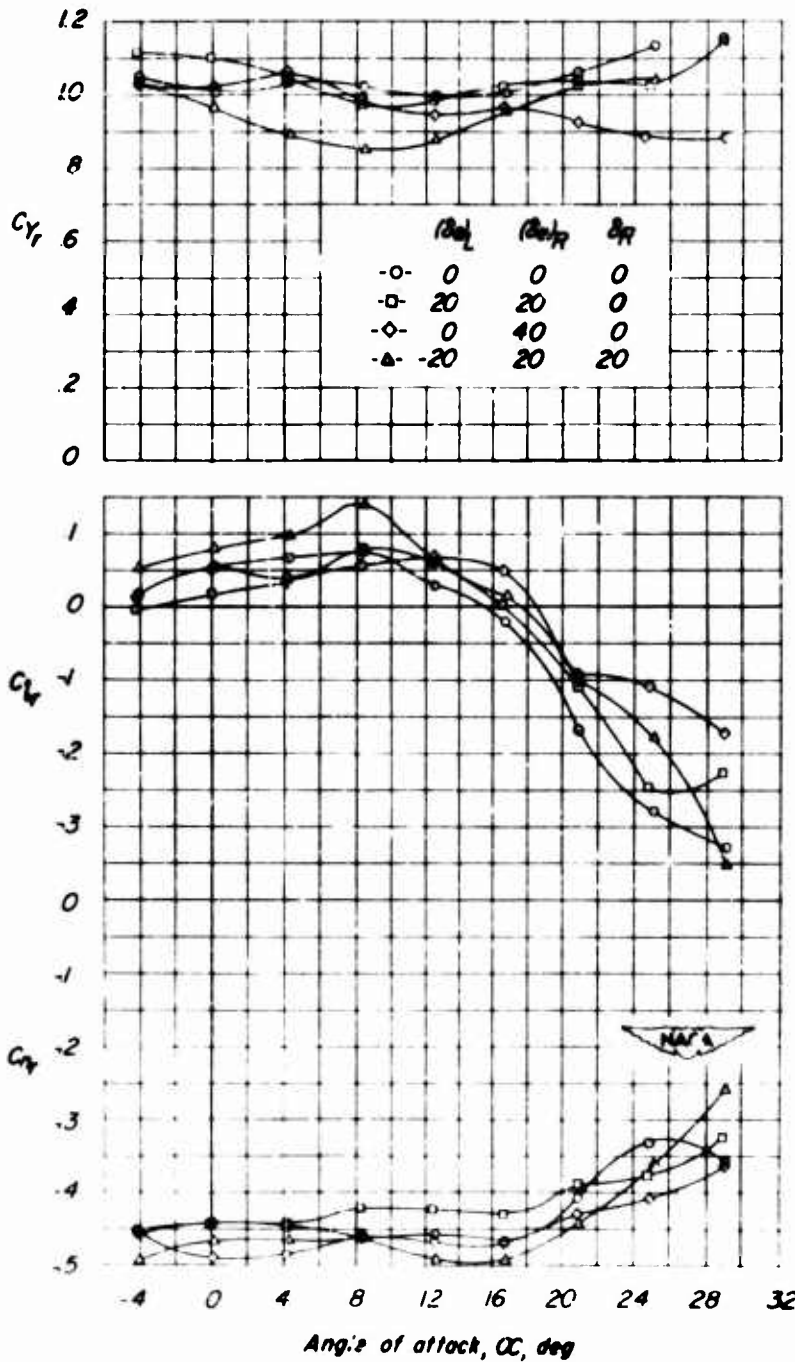


(a) $T_c' = 0$.

Figure 9.- Effect of control deflection on the yawing stability derivatives of a 1/9-scale powered model of the Convair XFY-1 vertically rising airplane. $(\beta_0)_F = 25^\circ$; configuration W + F + T_u + T_L + P.

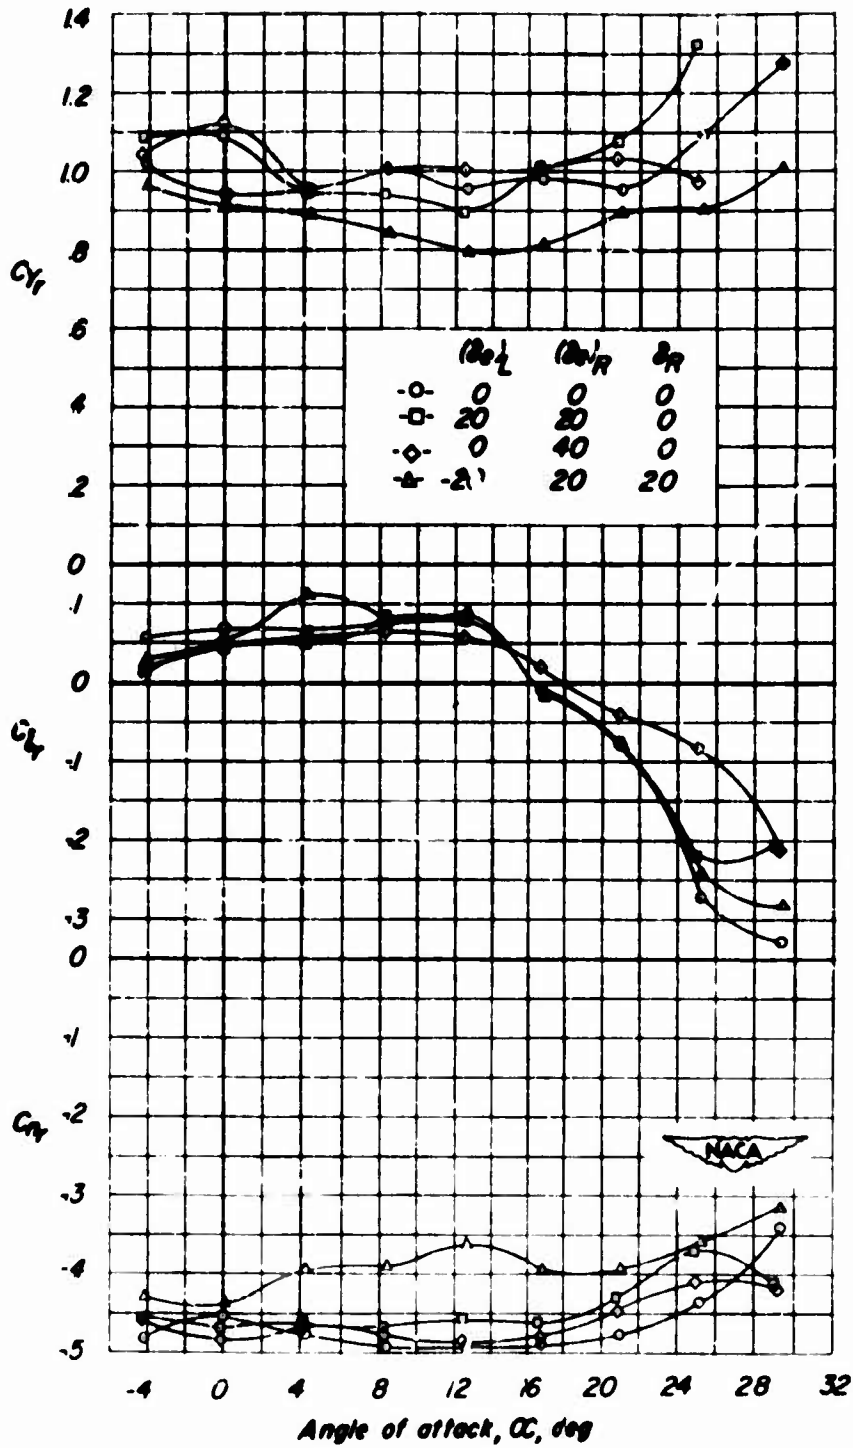


(b) $T_c' = 0.2$.

Figure 9.- Continued.

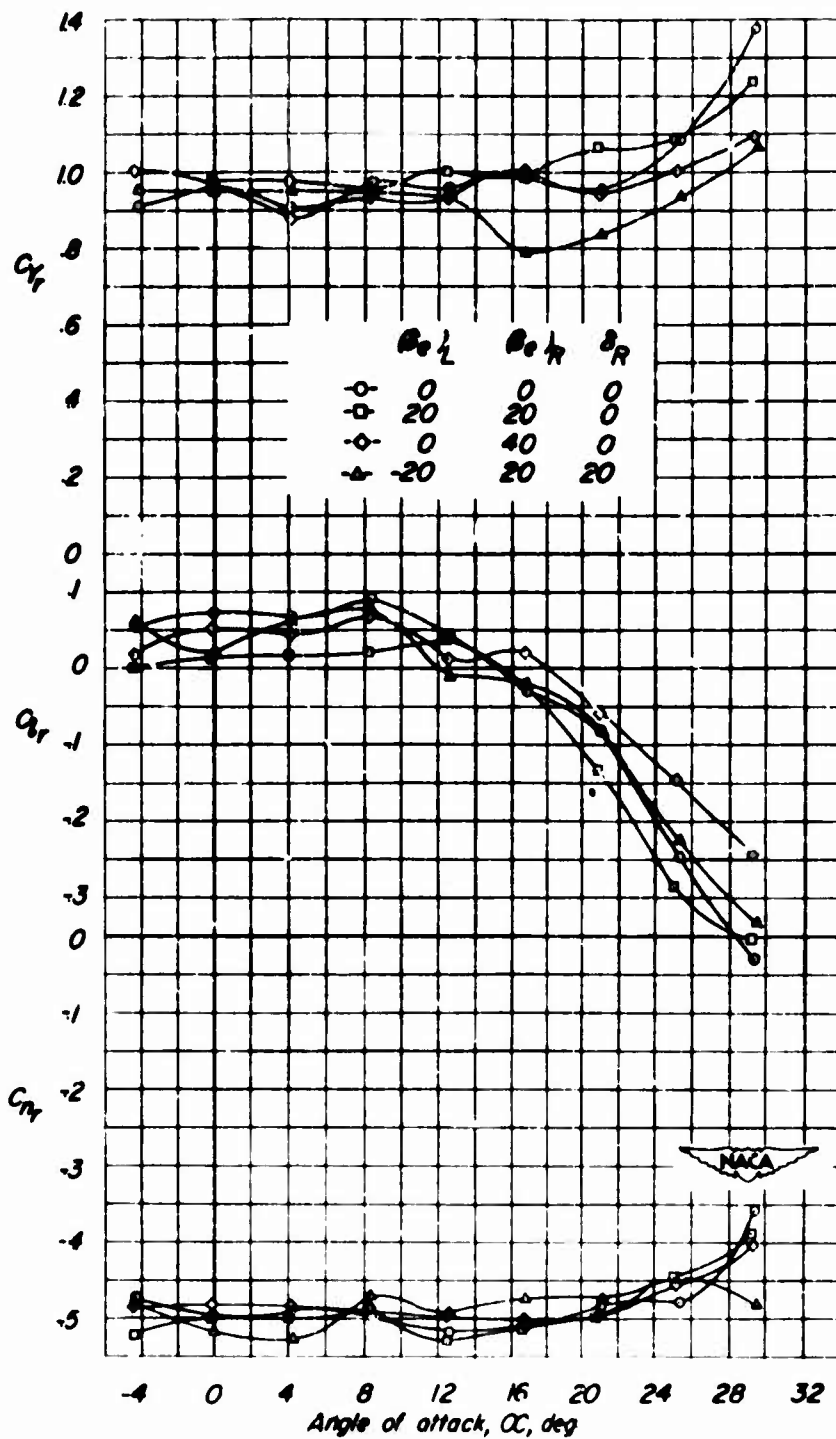

(c) $T_c' = 0.4$.

Figure 9.- Continued.

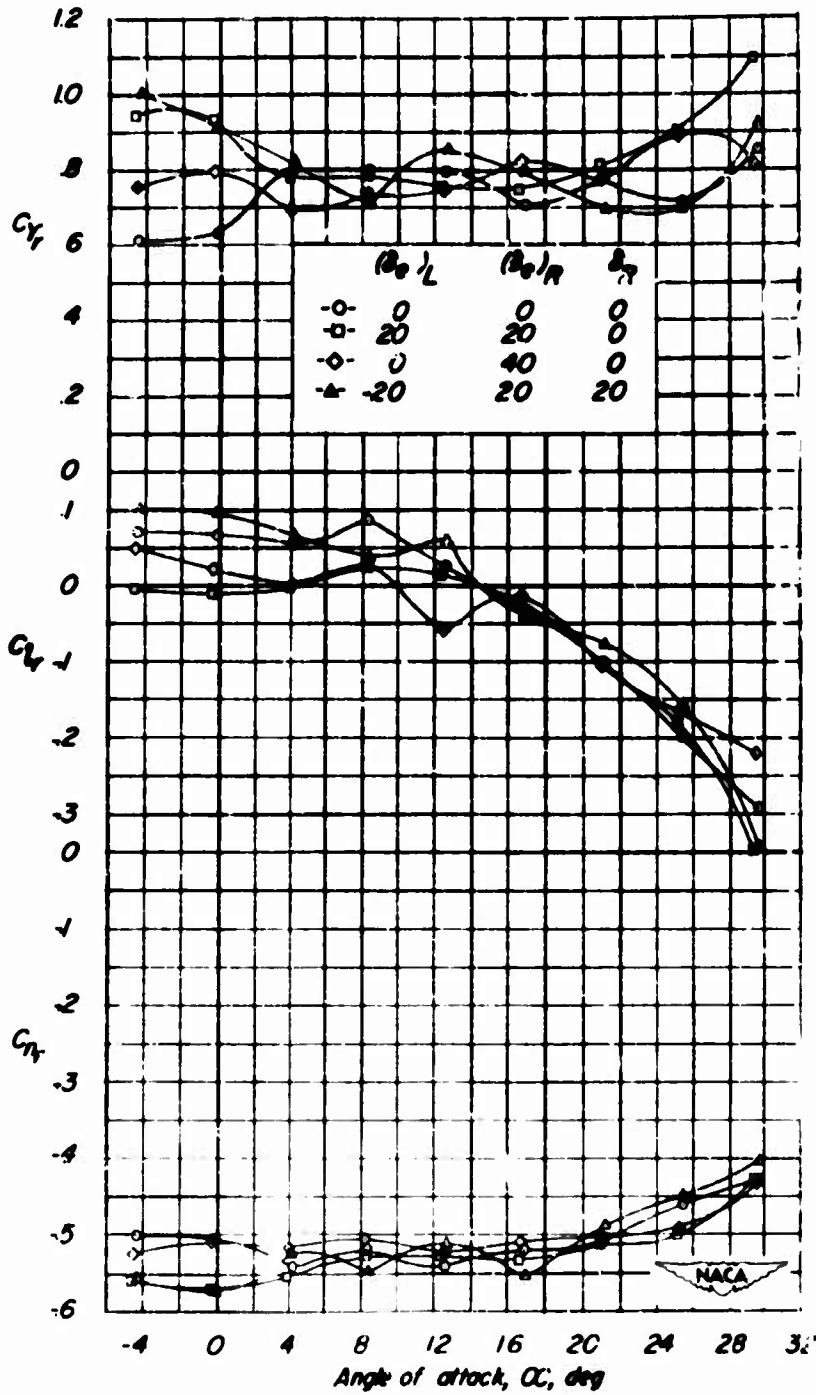

(d) $T_c' = 0.7$.

Figure 9.- Concluded.

AD

12992

Armed Services Technical Information Agency

Reproduced by

CLASSIFICATION CHANGED TO UNCLASSIFIED

The following National Advisory Committee for Aeronautics Reports have been regraded from Confidential to Unclassified per Authority of NACA Research Abstracts and Reclassification Notice No. 111 dated 28 January 1957; Bulletin List No. 120

Date 1 APRIL 1957

Signed Richard E. Reedy
OFFICE SECURITY ADVISOR

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

UNCLASSIFIED