

AD No. 20150

ASTIA FILE COPY

REPORT NO. HE-150-115

TECHNICAL REPORT

UNIVERSITY OF CALIFORNIA
INSTITUTE OF ENGINEERING RESEARCH
BERKELEY, CALIFORNIA



HEAT TRANSFER TO A CYLINDER FOR THE FREE
MOLECULE FLOW OF A NON-UNIFORM GAS

By

S. BELL

SERIES NO. 20

ISSUE NO. 96

DATE SEPTEMBER 14, 1953

CONTRACT N7-onr-295-Task 3
PROJECT NR 061-003
REPORT NO. HE-150-115
SERIES NO. 20-96
SEPTEMBER 14, 1953

JOINTLY SPONSORED BY
OFFICE OF NAVAL RESEARCH AND
OFFICE OF SCIENTIFIC RESEARCH

FLUID FLOW AND
HEAT TRANSFER
AT LOW PRESSURES
AND TEMPERATURES

HEAT TRANSFER TO A CYLINDER FOR THE FREE
MOLECULE FLOW OF A NON-UNIFORM GAS

By

S. BELL

FACULTY INVESTIGATOR:

S. A. SCHAAF, ASSOCIATE PROFESSOR OF ENGINEERING SCIENCE

Approved by:

S. A. SchAAF

NOMENCLATURE

dA	= element of surface area
c_p	= specific heat at constant pressure
d	= cylinder diameter
dE_i, dE_r, dE_w	= molecular energy fluxes incident, reflected and diffusely reflected from dA per unit time, Eq. 2.2
f	= molecular velocity distribution function, Eq. 2.5
f^o	= Maxwellian distribution function, Eq. 2.6
$f_o, f_1, \dots, f_j$	= factors of the velocity distribution function, Eq. 2.12
$H_o, H_{p_{xx}}, H_{p_{yy}}, H_{q_x}$	= functions of s defined by Eq. 3.5
h	= heat transfer coefficient per unit area, Eq. 3.11
I_o, I_1	= modified Bessel functions of zero and first order
j	= number of internal degrees of freedom
K	= Boltzmann's constant
L	= length of cylinder
M	= Mach number (U/V_a)
m	= molecular mass
dN_i, dN_w	= number of molecules incident on and diffusely reflected from dA per unit time, Eq. 2.9
Nu	= Nusselt number (hd/k)

p	=	pressure
Pr	=	Prandtl number ($c_p \mu / \kappa$)
p_{xx}, p_{yy}, p_{zz}	=	normal stress deviation terms, Eq. 2.5
dQ	=	heat removed from dA by sinks inside the cylinder (per unit time)
Q	=	total heat removed from the cylinder (per unit time)
q_x, q_y, q_z	=	heat flux terms, Eq. 2.5
R	=	gas constant
Re	=	Reynolds number ($\rho U d / \mu$)
dR_i, dR_r	=	radiant energy fluxes incident on, and reflected from, dA per unit time, Eq. 2.1
r	=	recovery factor, Eq. 3.6
$r_o, r_{p_{xx}}, r_{p_{yy}}, r_{q_x}$	=	partial recovery factors, Eq. 3.10
S	=	molecular speed ratio, Eq. 3.3
St	=	Stanton number ($Nu / Re Pr$)
$St_o, St_{p_{xx}}, St_{p_{yy}}, St_{q_x}$	=	partial Stanton numbers, Eq. 3.15
T	=	gas temperature
T_{aw}	=	equilibrium temperature of the cylinder wall in the absence of heat transfer, Eqs. 3.4 and 3.6
T_o	=	stagnation temperature
T_w	=	cylinder wall temperature
U, V, W	=	gas velocity components

u, v, w	=	molecular velocity components in x, y, z , direction, Fig. 1
u', v', w'	=	molecular velocity components in x', y', z' , direction, Fig. 1
$V_1, V_2, \dots, V_j$	=	characteristic velocities associated with various degrees of freedom, Eq. 2.11
V_a	=	acoustic speed ($\sqrt{\gamma RT}$)
x, y, z	=	coordinates referred to flow direction, Fig. 1
x', y', z'	=	coordinates referred to surface element, Fig. 1
α	=	thermal accommodation coefficient, Eq. 2.2
γ	=	ratio of specific heats
θ	=	angle between surface normal and flow direction, Fig. 1
K	=	thermal conductivity
μ	=	viscosity
ρ	=	gas density
$\tau_{xy}, \tau_{xz}, \tau_{yz}$	=	shear stress terms, Eq. 2.5

Report No. HE-150-115

HEAT TRANSFER TO A CYLINDER FOR THE FREE
MOLECULE FLOW OF A NON-UNIFORM GAS

1.0 INTRODUCTION

The heat transfer to a body in free molecule flow has been determined theoretically by Tsien (Ref. 1), Stalder and Jukoff (Ref. 2) and others (Refs. 3 and 4). Experiments by Stalder, Creager and Goodwin (Refs. 3 and 5) have provided some confirmation of the theoretical developments.

These investigations have been confined to gas flows in Maxwellian equilibrium. The present report is a continuation of Reference 6 in which the aerodynamic forces on a cylinder were determined for the case of a non-uniform gas (i.e., one in which heat flux or viscous stresses are present).

It is assumed that the right circular cylinder, which is oriented perpendicular to the gas flow, has so large a thermal conductivity that it has a uniform wall temperature. Possible end effects are neglected.

The results depend on a knowledge of the molecular velocity distribution and the distribution assumed here is the one proposed by Grad (Ref. 7). The results are complete for the monatomic case but only approximate for the polyatomic case.

For the sake of brevity, much of the general discussion given in Reference 6 has not been repeated here.

2.0 METHOD OF ANALYSIS

2.1 Monatomic Gas

The general method of analysis is the same as in Reference 6 and the energy balance for a differential area is written

$$dE_i + dR_i = dE_r + dR_r + dQ \quad (2.1)$$

Assuming no radiation and using the thermal accommodation coefficient

$$\alpha = \frac{dE_i - dE_r}{dE_i - dE_w} \quad (2.2)$$

one may rewrite the energy balance for convection

$$\frac{1}{\alpha} dQ = dE_i - dE_w \quad (2.3)$$

The incident energy flux per unit area per unit time may be expressed

$$\frac{dE_i}{dA} = \frac{m}{2} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \int_0^{\infty} (u'^2 + v'^2 + w'^2) u' f du' dv' dw' \quad (2.4)$$

where f is the distribution function used in Reference 6,

$$f = f^0 \left[1 + \frac{1}{2pRT} \left\{ p_{xx}(u-U)^2 + p_{yy}v^2 + p_{zz}w^2 + 2\tau_{xy}(u-U)v - 2\tau_{xz}(u-U)w - 2\tau_{yz}vw - 2 \left[1 - \frac{(u-U)^2 + v^2 + w^2}{5RT} \right] [q_x(u-U) + q_yv + q_zw] \right\} \right] \quad (2.5)$$

and

$$f^0 = \frac{p}{m(2\pi RT)^{3/2}} e^{-\frac{(u-U)^2 + v^2 + w^2}{2RT}} \quad (2.6)$$

Except for the molecular velocity components, all the variables appearing in Eqs. 2.5 and 2.6, are treated as constants throughout the region occupied by the cylinder. The relations between velocity components are given by

$$\left. \begin{aligned} u &= -u' \cos \theta + v' \sin \theta \\ v &= -u' \sin \theta - v' \cos \theta \\ w &= w' \end{aligned} \right\} \quad (2.7)$$

The energy flux per unit area per unit time due to diffusely reflected molecules is

$$\frac{dE_w}{dA} = 2 K T_w \frac{dN_w}{dA} \quad (2.8)$$

and since dE_w/dA is to be computed on the assumption that all of the molecules are reflected diffusely

$$\frac{dN_w}{dA} = \frac{dN_i}{dA} = \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \int_0^{\infty} u' f du' dv' dw' \quad (2.9)$$

Combining Eqs. 2.3, 2.4, 2.8 and 2.9 and integrating over the cylinder

$$\frac{Q}{\alpha} = \frac{mdL}{4} \int_0^{2\pi} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \int_0^{\infty} (u'^2 + v'^2 + w'^2 - 4RT_w) u' f du' dv' dw' d\theta \quad (2.10)$$

2.2 Polyatomic Gas

In a polyatomic gas there are internal energies of rotation or of vibration or of both. To calculate the incident energy flux in this case, one should use a distribution function which includes the distribution of rotational and vibrational energies (e.g., see Ref. 8). If the gas molecules have $j+3$ degrees of freedom of motion (thus, $j=0$ for a monatomic gas) the number of incident molecules may be written in the form

$$\frac{dN_i}{dA} = \int_{-\infty}^{\infty} \cdots \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \int_0^{\infty} u' f(u', v', w', V_1, \dots, V_j) \times \\ du' dv' dw' dV_1 \cdots dV_j \quad (2.11)$$

where, for the sake of simplicity in illustrating a point, the classical mechanical approach has been adopted and a characteristic velocity has been associated with each degree of freedom of motion. Actually, an accurate calculation would require a quantum-mechanical formulation.

Assuming that the total energy can be expressed as a sum of energies of each degree of freedom, the distribution function for Maxwellian equilibrium may be expressed in factored form,

$$f(u', v', w', V_1, \dots, V_j) = f_0(u', v', w') f_1(V_1) \dots f_j(V_j) \quad (2.12)$$

and the number per unit area of diffusely reflected molecules takes the form

$$\begin{aligned} \frac{dN_w}{dA} = & \int_{-\infty}^{\infty} f_j(V_j) dV_j \times \dots \times \int_{-\infty}^{\infty} f_1(V_1) dV_1 \times \\ & \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} u' f_0(u', v', w') du' dv' dw' \end{aligned} \quad (2.13)$$

This separation of variables also occurs in the integration for the energy flux per unit area due to diffusely reflected molecules.

Making the further assumption that the energy associated with each degree of freedom has a quadratic dependence on the velocity involved, a straight-forward calculation yields, for the diffusely reflected energy flux (Ref. 9, p. 93)

$$\frac{dE_w}{dA} = \left[2kT_w + \frac{j k T_w}{2} \right] \frac{dN_w}{dA} \quad (2.14)$$

For the non-Maxwellian case, one cannot factor the distribution function as in Eq. 2.12 and the corresponding relations for the incident energy flux presumably would become very complicated. As a first approximation, however, it seems reasonable to assume a similar separation of translational and internal energies so that

$$\frac{dE_i}{dA} = \frac{m}{2} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} (u'^2 + v'^2 + w'^2) u' f du' dv' dw' + \frac{jKT}{2} \frac{dN_i}{dA} \quad (2.15)$$

Combining Eqs. 2.3, 2.9, 2.14, and 2.15, and integrating over the cylinder

$$\frac{Q}{\alpha} = \frac{mdL}{4} \int_0^{2\pi} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \int_0^{\infty} (u'^2 + v'^2 + w'^2 + jRT - (4+j)RTw) u' f du' dv' dw' d\theta \quad (2.16)$$

3.0 RESULTS

Performing the integrations indicated in Eq. 2.16 one has

$$\begin{aligned} Q = & \frac{\sqrt{\pi} d L \rho U R T \alpha}{4 s e^{s^2/2}} \left\{ \left[2s^4 + (7+j)s^2 \right. \right. \\ & + (4+j) I_0(s^2/2) + \left. \left[2s^4 + (5+j)s^2 \right] I_1(s^2/2) \right\} \\ & + \frac{p_{xx}}{4\rho} \left\{ \left[8s^2 + (6+j) \right] I_0(s^2/2) + \left[8s^2 - (4+j) \right] I_1(s^2/2) \right\} \\ & + \frac{p_{yy}}{4\rho} \left\{ \left[2s^2 + (6+j) \right] I_0(s^2/2) + \left[2s^2 + (4+j) \right] I_1(s^2/2) \right\} \\ & + \frac{q \cdot s^2}{5\rho U} \left\{ \left[10-j \right] I_0(s^2/2) + \left[12+j \right] I_1(s^2/2) \right\} \\ & - \frac{\sqrt{\pi} d L \rho U R T w \alpha (4+j)}{4 s e^{s^2/2}} \left\{ \left(1+s^2 \right) I_0(s^2/2) \right. \\ & + s^2 I_1(s^2/2) \left. \right\} + \frac{p_{xx}}{4\rho} \left\{ I_0(s^2/2) - I_1(s^2/2) \right\} \\ & + \frac{p_{yy}}{4\rho} \left\{ I_0(s^2/2) + I_1(s^2/2) \right\} \\ & - \frac{q \cdot s^2}{5\rho U} \left\{ I_0(s^2/2) - I_1(s^2/2) \right\} \end{aligned} \quad (3.1)$$

where p_{zz} has been eliminated by the relation

$$p_{xx} + p_{yy} + p_{zz} = 0 \quad (3.2)$$

I_0 and I_1 are the modified Bessel functions and s is the molecular speed ratio

$$s = \frac{U}{\sqrt{2RT}} = \sqrt{\frac{\gamma}{2}} M \quad (3.3)$$

Eq. 3.1 is valid for a monatomic gas ($j = 0$) and, under the assumptions of Eqs. 2.14 and 2.15, would also be valid for a polyatomic gas. The results of Eq. 3.1 agree with those of Refs. 3 and 4 for the uniform case. It will be observed that there are no terms corresponding to a shear stress τ_{xy} , nor to a heat flux, q_y , in the transverse direction. This was not the case for the aerodynamic force calculations of Ref. 6. Since these two terms are the principal non-uniformities in a boundary layer flow, it follows that a heat transfer type of free molecule probe is particularly advantageous for boundary layer surveys.

If, by T_{aw} , one denotes the equilibrium temperature assumed by the cylinder in the absence of heat transfer (adiabatic wall temperature), then Eq. 3.1 may be solved for T_{aw}/T as a function of p_{xx}/p , p_{yy}/p and q_x/pU . In the resulting expression for T_{aw}/T the denominator is expanded in powers of p_{xx}/p , p_{yy}/p and q_x/pU . By neglecting squares and higher powers, one obtains, for a monatomic gas.

$$\frac{T_{aw}}{T} = H_0 + \frac{p_{xx}}{p} H_{p_{xx}} + \frac{p_{yy}}{p} H_{p_{yy}} + \frac{q_x}{pU} H_{q_x} \quad (3.4)$$

where:

$$\begin{aligned}
 H_o &= H_o(s) = \frac{F_o(s)}{G_o(s)} \\
 H_{p_{xx}} &= H_{p_{xx}}(s) = \frac{F_{p_{xx}}(s)}{G_o(s)} - \frac{F_o(s) G_{p_{xx}}(s)}{[G_o(s)]^2} \\
 H_{p_{yy}} &= H_{p_{yy}}(s) = \frac{F_{p_{yy}}(s)}{G_o(s)} - \frac{F_o(s) G_{p_{yy}}(s)}{[G_o(s)]^2} \\
 H_{q_x} &= H_{q_x}(s) = \frac{F_{q_x}(s)}{G_o(s)} - \frac{F_o(s) G_{q_x}(s)}{[G_o(s)]^2}
 \end{aligned} \tag{3.5}$$

$$\begin{aligned}
 F_o(s) &= (2s^4 + 7s^2 + 4)I_o(s^2/2) + (2s^4 + 5s^2)I_1(s^2/2) \\
 F_{p_{xx}}(s) &= (2s^2 + 3/2)I_o(s^2/2) + (2s^2 - 1)I_1(s^2/2) \\
 F_{p_{yy}}(s) &= (s^2/2 + 3/2)I_o(s^2/2) + (s^2/2 + 1)I_1(s^2/2) \\
 F_{q_x}(s) &= 2s^2 I_o(s^2/2) + (12s^2/5)I_1(s^2/2) \\
 G_o(s) &= (4s^2 + 4)I_o(s^2/2) + 4s^2 I_1(s^2/2) \\
 G_{p_{xx}}(s) &= I_o(s^2/2) - I_1(s^2/2) \\
 G_{p_{yy}}(s) &= I_o(s^2/2) + I_1(s^2/2) \\
 G_{q_x}(s) &= -(4s^2/5)I_o(s^2/2) - (4s^2/5)I_1(s^2/2)
 \end{aligned}$$

The functions H_o , $H_{p_{xx}}$, $H_{p_{yy}}$, and H_{q_x} are presented graphically in Fig. 2.

The recovery factor is defined by

$$r = \frac{T_{aw} - T}{T_o - T} \tag{3.6}$$

where T_0 is the stagnation temperature. Using the relation

$$\frac{T_0}{T} = 1 + \frac{\gamma-1}{\gamma} S^2 \quad (3.7)$$

one obtains

$$r = \frac{\gamma}{\gamma-1} \cdot \frac{1}{S^2} \left[\frac{T_{aw}}{T} - 1 \right] \quad (3.8)$$

or using Eq. 3.4

$$r = \frac{\gamma}{\gamma-1} \left[\frac{H_0-1}{S^2} + \frac{p_{xx}}{p} \cdot \frac{H_{p_{xx}}}{S^2} + \frac{p_{yy}}{p} \cdot \frac{H_{p_{yy}}}{S^2} + \frac{q_x}{pU} \cdot \frac{H_{q_x}}{S^2} \right] \quad (3.9)$$

Eq. 3.9 may be written

$$r = r_0 + \frac{p_{xx}}{p} r_{p_{xx}} + \frac{p_{yy}}{p} r_{p_{yy}} + \frac{q_x}{pU} r_{q_x} \quad (3.10)$$

These "partial recovery factors" are presented graphically, for a monatomic gas, in Fig. 3.

One defines the heat transfer coefficient per unit area as

$$h = \frac{Q}{\pi d L (T_{aw} - T_w)} \quad (3.11)$$

and the Stanton number is

$$S_T = \frac{Nu}{Pr Re} = \frac{\gamma-1}{\gamma} \cdot \frac{h}{\rho U R} \quad (3.12)$$

Combining Eqs. 3.1, 3.11 and 3.12

$$\begin{aligned} \frac{1}{\alpha} S_T = & \frac{\gamma+1}{\gamma} \cdot \frac{1}{4\sqrt{\pi} s e^{s^2/2}} \left[(1+s^2) I_0(s^2/2) \right. \\ & + s^2 I_1(s^2/2) + \frac{\rho_{xx}}{4\rho} \left\{ I_0(s^2/2) \right. \\ & \left. - I_1(s^2/2) \right\} + \frac{\rho_{xy}}{4\rho} \left\{ I_0(s^2/2) + I_1(s^2/2) \right\} \\ & \left. - \frac{g_x s^2}{5\rho U} \left\{ I_0(s^2/2) - I_1(s^2/2) \right\} \right] \end{aligned} \quad (3.13)$$

where use has been made of

$$\gamma = 1 + \frac{2}{j+3} \quad (3.14)$$

Eq. 3.13 may be written

$$\frac{1}{\alpha} S_T = \frac{1}{\alpha} S_{T_0} + \frac{\rho_{xx}}{\rho} \frac{1}{\alpha} S_{T_{\rho_{xx}}} + \frac{\rho_{xy}}{\rho} \frac{1}{\alpha} S_{T_{\rho_{xy}}} - \frac{g_x}{\rho U} \frac{1}{\alpha} S_{T_{g_x}} \quad (3.15)$$

These "partial Stanton numbers" are presented graphically, for a monatomic gas in Fig. 4.

Inspection of Fig. 4, reveals that the partial Stanton numbers corresponding to the non-uniform terms are all small compared to the Stanton number, S_{T_0} , for the uniform case. Unless a gas flow is very non-uniform, i.e., if the flow itself is in the continuum or slip-flow region, the quantities ρ_{xx} and ρ_{xy} are small compared to ρ . It follows that the energy balance will be effected only slightly by the contributions arising from the viscous stress terms.

5.0 REFERENCES

1. H. S. Tsien
 - "Superaerodynamics, Mechanics of Rarefied Gases", Jour. Aero. Sci. Vol. 13, pp 643-664, Dec. 1946.
2. J. R. Stalder,
D. Jukoff
 - "Heat Transfer to Bodies Traveling at High Speed in the Upper Atmosphere", N.A.C.A. Rep. 944, 1949, (Formerly N.A.C.A. TN-1682)
3. J. R. Stalder,
G. Goodwin,
M. O. Creager
 - "A Comparison of Theory and Experiment for High Speed Free Molecule Flow", N.A.C.A. TN-2244, 1950.
4. A. K. Oppenheim
 - "Generalized Theory of Convective Heat Transfer in a Free-Molecule Flow", Univ. of Calif., Engineering Projects Report HE-150-93, March 18, 1952.
5. J. R. Stalder,
G. Goodwin,
M. O. Creager
 - "Heat Transfer to Bodies in a High-speed Rarefied-Gas Stream", N.A.C.A. TN-2438, 1951.
6. S. Bell,
S. A. Schaaf
 - "Aerodynamic Forces on a Cylinder for the Free Molecule Flow of a Non-uniform Gas", Univ. of Calif. Engineering Projects Report, HE-150-110, Dec. 1952.
7. H. Grad
 - "On the Kinetic Theory of Rarefied Gases", Com. on Pure and Applied Math. Vol. 2, pp 331-407, 1949.
8. C. S. Wang Chang,
G. E. Uhlenbeck
 - "Transport Phenomena in Polyatomic Gases", NOrd 7924 - UMH-3F, 1951.
9. R. C. Tolman
 - "The Principles of Statistical Mechanics", Oxford Univ. Press, London, First Edition, 1938.

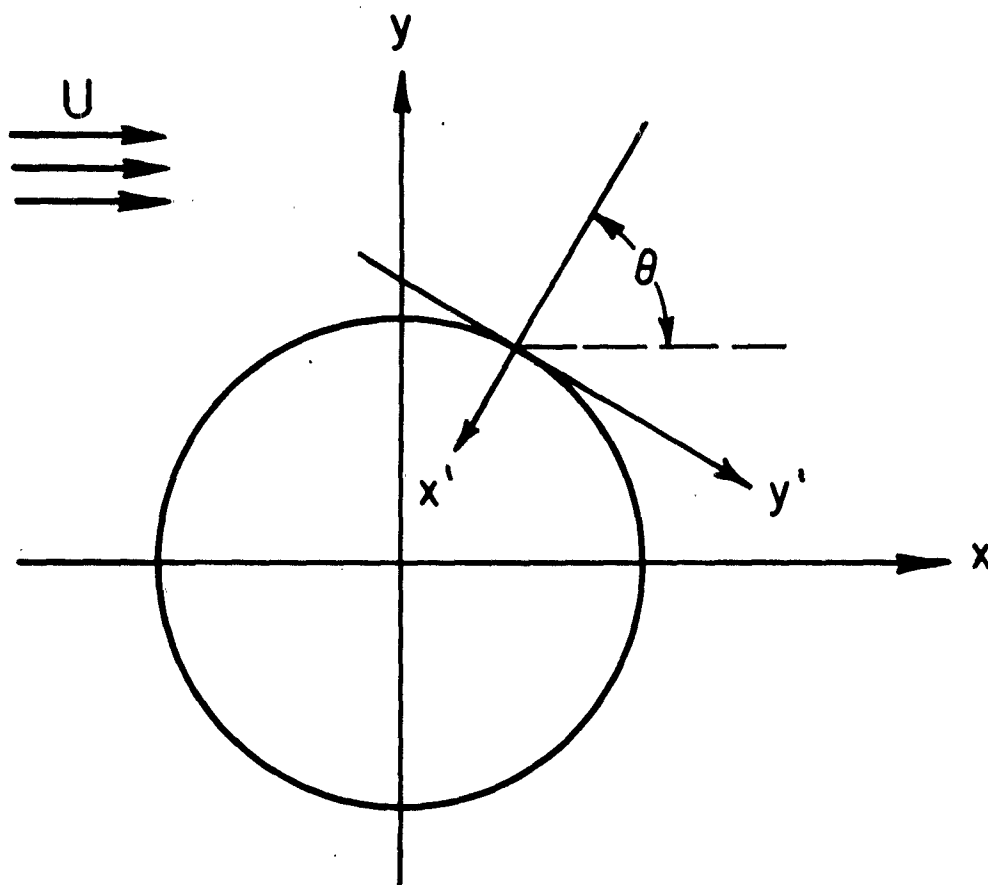


FIG.1 COORDINATE SYSTEMS

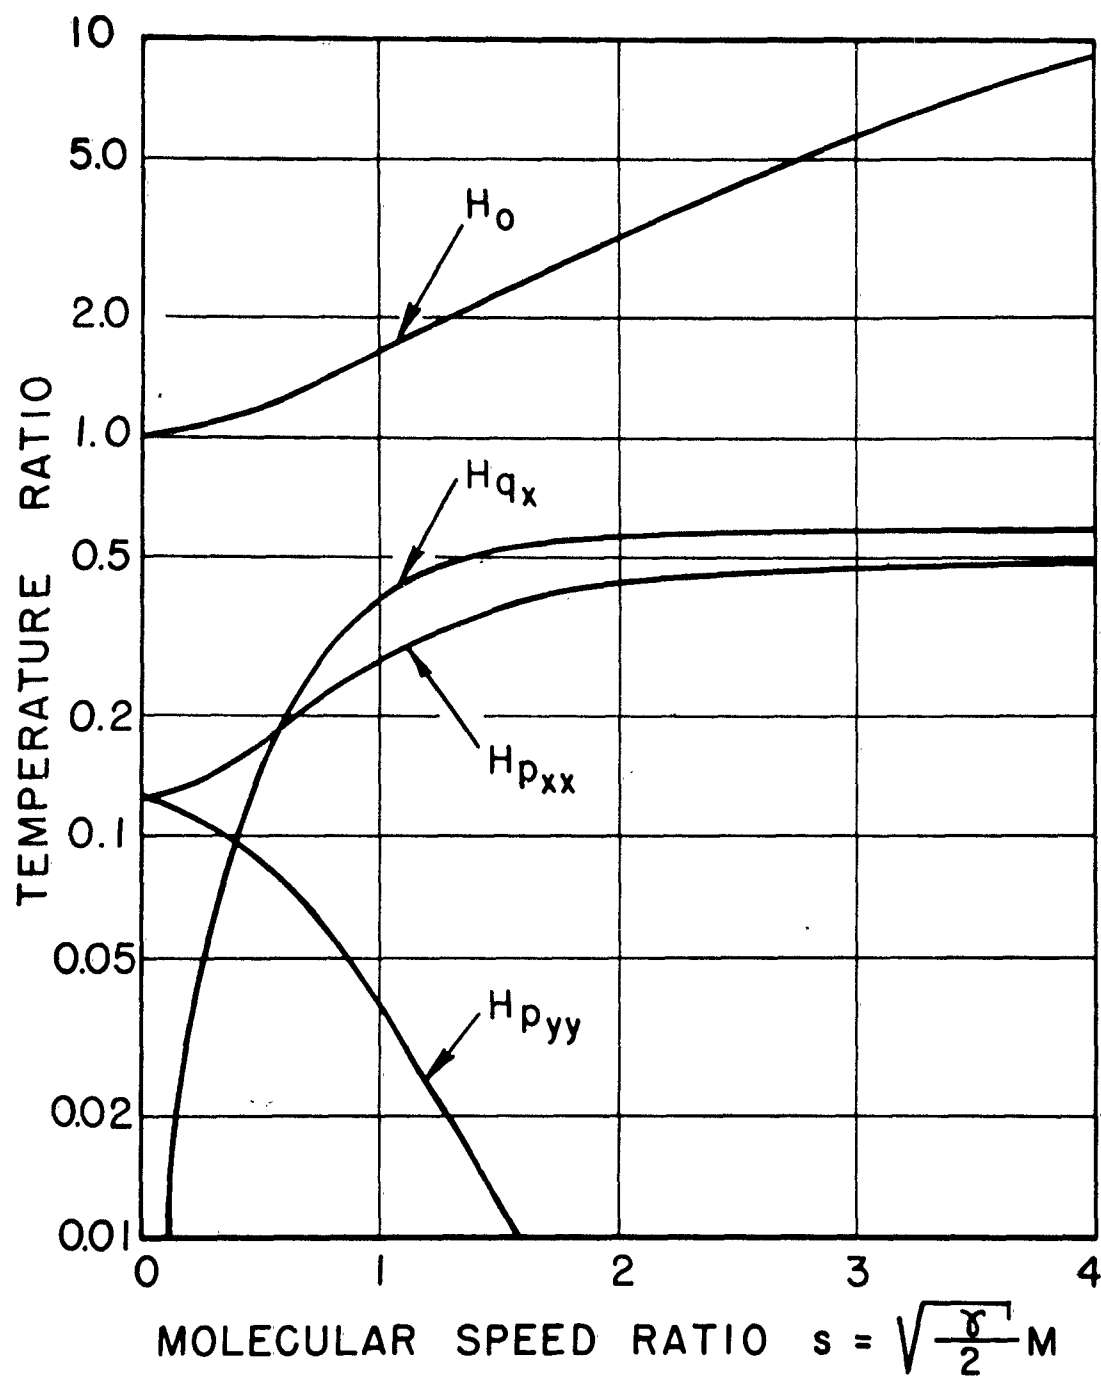


FIG. 2 PARTIAL TEMPERATURE RATIOS FOR
NON-UNIFORM FREE MOLECULE FLOW
PAST A CYLINDER (MONATOMIC GAS)

$$\frac{T_{0w}}{T} = H_0 + \frac{p_{xx}}{p} H_{p_{xx}} + \frac{p_{yy}}{p} H_{p_{yy}} + \frac{q_x}{pU} + H_{q_x}$$

HYD 6504-150-0

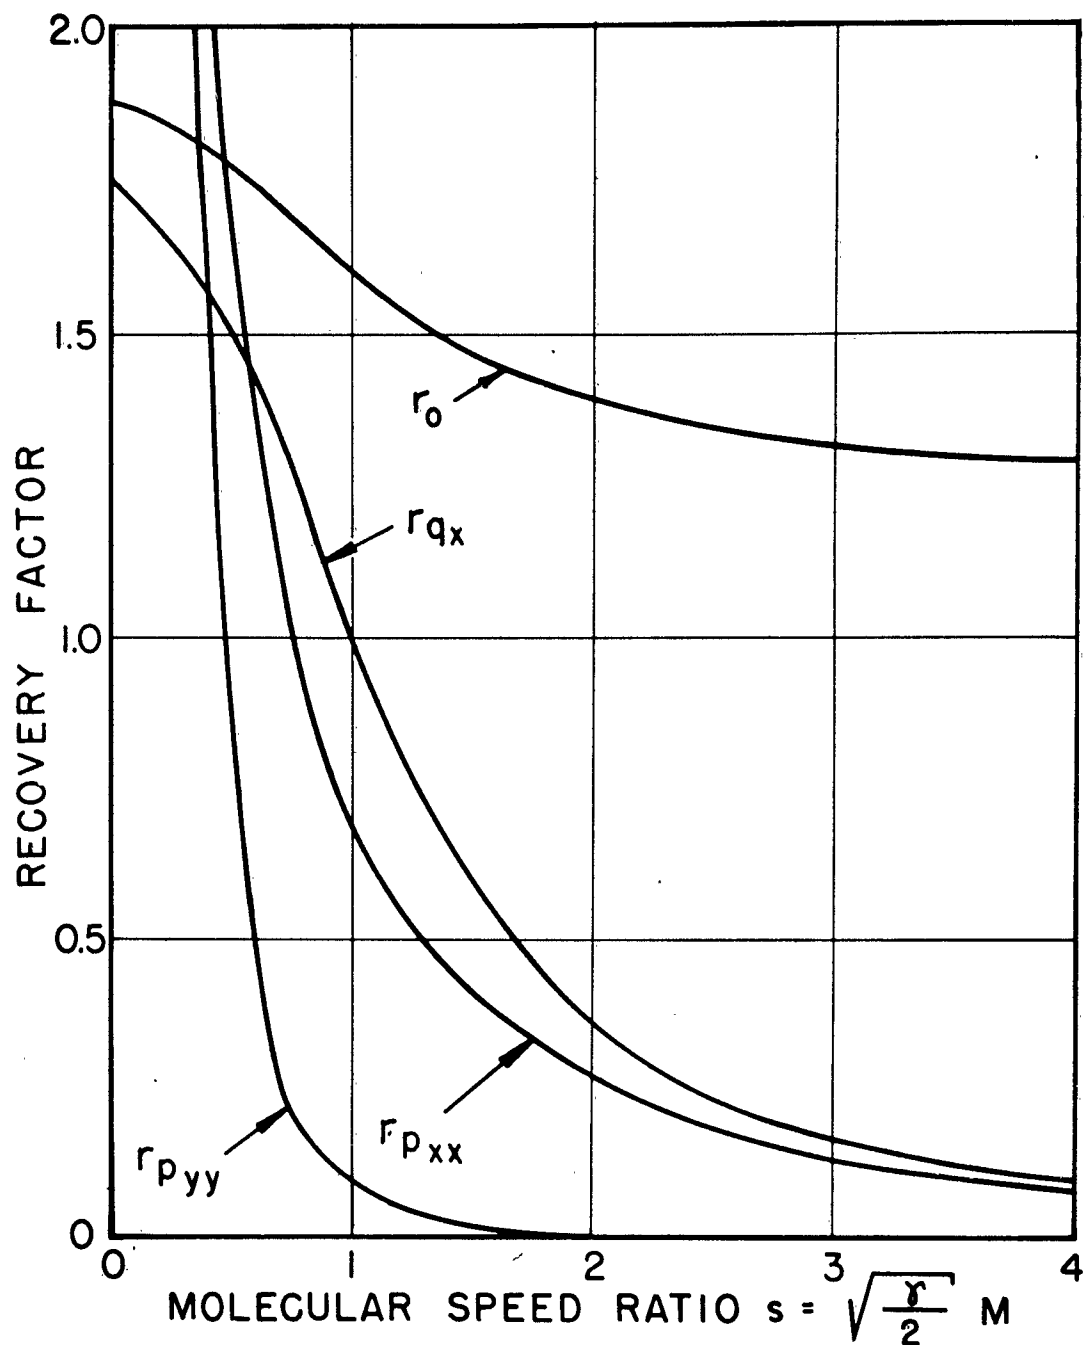


FIG. 3 PARTIAL RECOVERY FACTORS FOR
NON-UNIFORM FREE MOLECULE FLOW
PAST A CYLINDER (MONATOMIC GAS)

$$r = \frac{T_{0w} - T}{T_0 - T} = r_0 + \frac{p_{xx}}{p} r_{p_{xx}} + \frac{p_{yy}}{p} r_{p_{yy}} + \frac{q_x}{pU} r_{q_x}$$

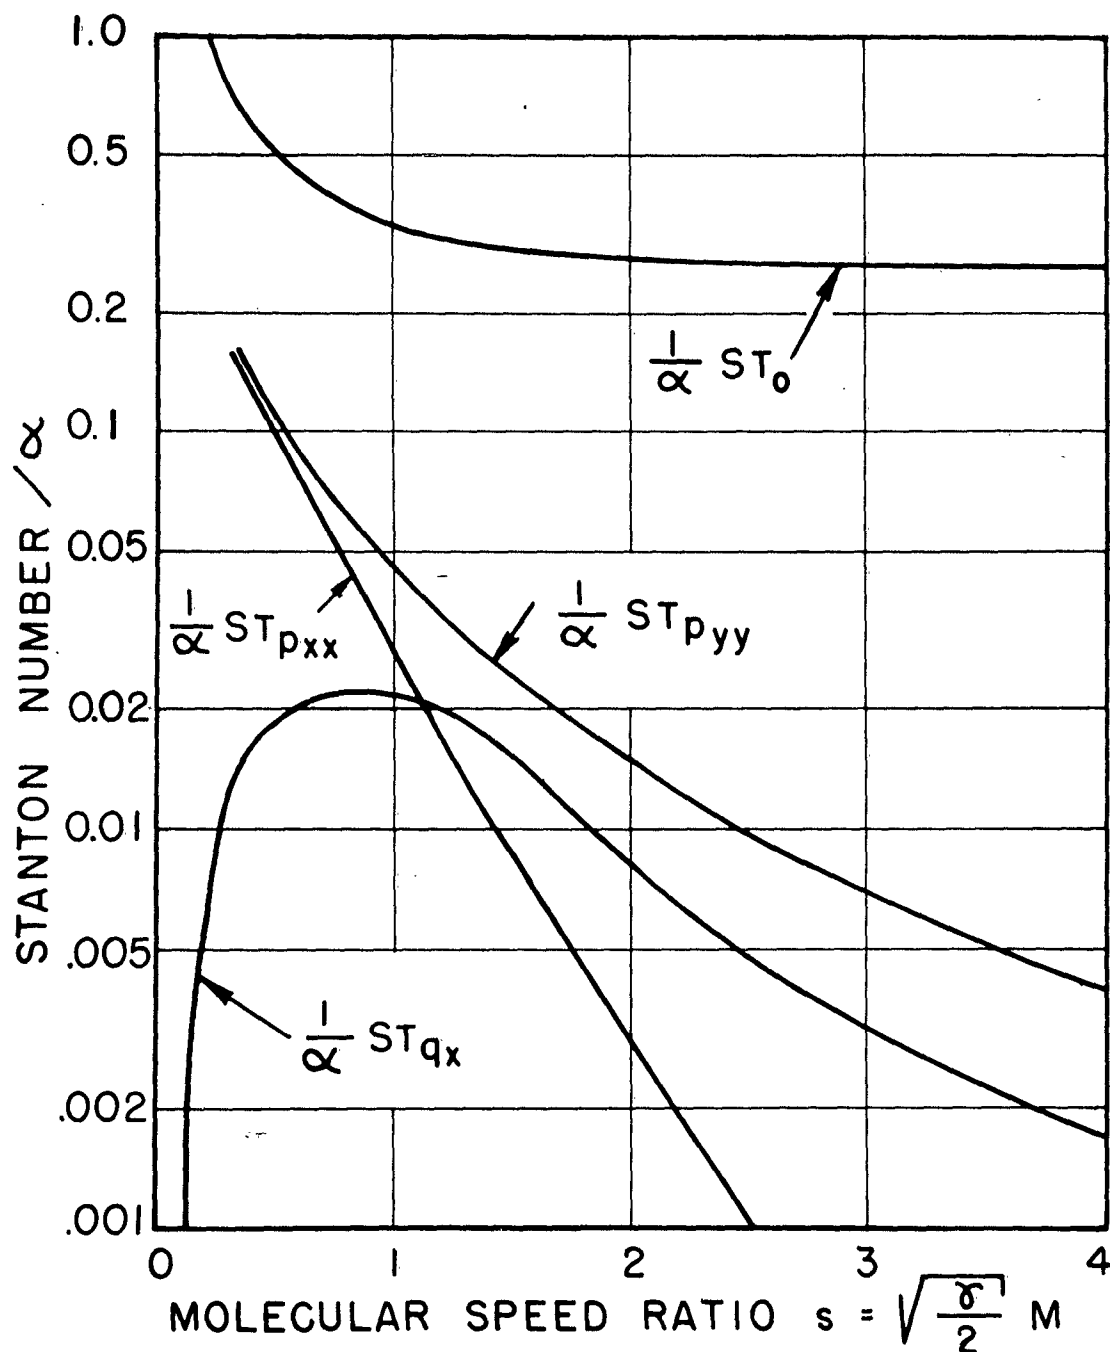


FIG. 4 PARTIAL STANTON NUMBERS FOR
NON-UNIFORM FREE MOLECULE FLOW
PAST A CYLINDER (MONATOMIC GAS)

$$\frac{1}{\alpha} ST = \frac{1}{\alpha} ST_0 + \frac{p_{xx}}{p} \frac{1}{\alpha} ST_{p_{xx}} + \frac{p_{yy}}{p} \frac{1}{\alpha} ST_{p_{yy}} - \frac{q_x}{pU} \frac{1}{\alpha} ST_{q_x}$$

DISTRIBUTION LIST FOR ONR TECHNICAL REPORTS

Director, Aeronautical Research, NACA, 1724 F St. N.W., Wash. 25, D. C. (1)

Commanding General, Air Research and Development Command, P.O. Box 1395, (2)
Baltimore, Maryland - Attn: OSR(RDRF)

Dr. Morton Alperin, Western Regional Office, Hdqrs., Air Research and (1)
Development Command, P.O. Box 2035, Pasadena 2, Calif.

Director, Ames Aeronautical Lab., NACA, Moffett Field, Calif. (1)

Applied Physics Lab., Johns Hopkins Univ., 8621 Georgia Ave., Silver Spring, Md. (1)

Armed Forces Special Weapons Project, The Pentagon, Wash. 25, D. C. (1)

Commanding Officer, Arnold Engr. Development Center, Tullahoma, Tenn. - (1)
Attn: ACGT & ACR

Mr. C. K. Bauer, Hermes Project, General Electric Co., Schenectady 5, N. Y. (1)

Prof. W. S. Bradfield, Dept. of Aeronautical Engr., Univ. of Minnesota, (1)
Minneapolis, Minnesota

Chief, Bureau of Aeronautics, Dept. of the Navy, Wash. 25, D. C. - Attn: Aero (1)
and Hydro Branch

Chief, Bureau of Aeronautics, Dept. of the Navy, Wash. 25, D. C. - Attn: (1)
Research Division

Chief, Bureau of Ordnance, Dept. of the Navy, Wash. 25, D. C. - Attn: Re9a (1)

Dr. Francis H. Clauser, Johns Hopkins Univ., Dept. of Aeronautical Engr., (1)
Baltimore 18, Maryland

Commanding Officer and Director, David Taylor Model Basin, Wash. 7, D. C. - (1)
Attn: Technical Library

Chief of Naval Research, Dept. of the Navy, Wash. 25, D. C. - Attn: Code 438 (3)

Chief of Staff, Hdqrs USAF, Directorate of Research and Development, Wash. (1)
D. C. - Attn: AFDRD-AC2

Chief, Documents Service Center, Armed Services Technical Information (2)
Agency, U. B. Building, Dayton 2, Ohio (1 reproducible copy)

Prof. Fred S. Eastman, Univ. of Wash., Dept. of Aeronautical Engr., (1)
Seattle 5, Wash.

Dr. I. B. Esterman, Code 419, Office of Naval Research, Wash. D. C. (1)

Prof. K. O. Friedrichs, New York Univ., Institute for Mathematics and (1)
Mechanics, 45 Astor Place, New York, N. Y.

Director, Jet Propulsion Lab., Calif. Institute of Technology, Pasadena, Calif. (1)

Dr. J. M. Jones, Engr. Research Institute, Univ. of Michigan, Ann Arbor, Mich. (1)

Prof. A. Kantrowitz, Graduate School of Aeronautical Engr., Cornell Univ., (1)
Ithaca, New York

Dr. J. Kaplan, Dept. of Physics, Univ. of Calif. at Los Angeles, Los (1)
Angeles 24, Calif.

Prof. J. H. Keenan, Massachusetts Institute of Technology, Mechanical Engr. (1)
Dept., Cambridge 39, Mass.

Prof. M. Z. Krzywoblocki, Univ. of Illinois, Urbana, Illinois (1)

Dr. A. M. Kuethe, Dept. of Aeronautical Engr., Univ. of Michigan, Ann Arbor, Michigan (1)

Dr. A. R. Kuhlthau, Univ. of Virginia, Dept. of Physics, Charlottesville, Va. (1)
VIA: Naval Inspector of Ordnance, Applied Physics Lab., Johns Hopkins Univ., Silver Spring, Maryland

Director, Langley Memorial Aeronautical Lab., NACA, Langley Field, Virginia (1)

Prof. Lester Lees, Aeronautical Engr. Dept., Princeton Univ., Princeton, N. J. (1)

Director, Lewis Flight Propulsion Laboratory, NACA, Cleveland, Ohio (1)

Prof. H. Lewy, Applied Mathematics Group, Stanford Univ., Stanford, Calif. (1)

Dr. James E. Lipp, The Rand Corp., 1500 Fourth St., Santa Monica, Calif. (1)

Dr. J. H. Marchant, Div. of Engr., Brown Univ., Providence 12, Rhode Island (1)

Prof. J. R. Markham, Mass. Institute of Technology, Cambridge 39, Mass. (1)

Dr. C. B. Millikan, Guggenheim Aeronautical Lab., Calif. Institute of Technology, Pasadena, Calif. (1)

Dr. Henry T. Nagamatsu, Director, Hypersonic Wind Tunnel, Calif. Institute of Technology, Pasadena 4, Calif. (1)

Commanding Officer, U. S. Naval Ordnance Test Station, Inyokern, China Lake Calif. - Attn: Technical Library (1)

Director, Naval Research Lab., Wash. 20, D. C. - Attn: Code 2020 (9)

Commander, Naval Ordnance Lab., White Oak, Silver Spring 19, Maryland - Attn: Aeroballistic Research Dept. (1)

Director, Office of Naval Research, 150 Causeway St., Boston, Mass. (1)

Director, Office of Naval Research, 346 Broadway, New York 13, N. Y. (1)

Director, Office of Naval Research, 844 North Rush St., Chicago 11, Illinois (1)

Director, Office of Naval Research, 1000 Geary St., San Francisco 9, Calif. (2)

Director, Office of Naval Research, 1030 East Green St., Pasadena 1, Calif. (1)

Officer in Charge, Office of Naval Research, Navy #100, Fleet Post Office New York, N. Y. (3)

Radiation Lab., Univ. of Calif., Berkeley 4, Calif. - Attn: R. Wakerling (1)

Chairman, Research and Development Board, The Pentagon, Wash. 25, D. C. - Attn: Information Requirement Board, Room 3D-1075 (1)

Mr. R. H. Shick, Consolidated Vultee Aircraft Corp., San Diego 12, Calif. (1)

Mr. Joseph Sternberg, Ballistics Research Lab., Ordnance Dept., Aberdeen, Md. (1)

Sverdrup and Parcel Inc., Consulting Engineers, Syndicate Trust Building, St. Louis, Missouri (1)

Dr. Theodore Theodorsen, Univ. of Maryland, Building J, Room 314, College Park, Maryland (1)

Dr. F. L. Wattendorf, Hdqrs. USAF, The Pentagon, Wash. 25, D. C. (1)

Western Coordination Office, NACA, 7660 Beverly Blvd., Los Angeles 36, Calif. (1)

Dr. E. P. Williams, Missiles Div., Rand Corp., 1500 Fourth St., Santa Monica, Calif. (1)

Wright Air Development Center, Wright-Patterson Air Force Base, Dayton, Ohio - Attn: WCRRS-3 (1) Attn: MCIDKE (1) (2)