

UNCLASSIFIED

AD NUMBER	
AD025154	
CLASSIFICATION CHANGES	
TO:	unclassified
FROM:	confidential
LIMITATION CHANGES	
TO:	Approved for public release, distribution unlimited
FROM:	Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; OCT 1953. Other requests shall be referred to Naval Ordnance Laboratory, White Oak, MD.
AUTHORITY	
USNOL ltr, 29 Aug 1974; USNOL ltr, 29 Aug 1974	

THIS PAGE IS UNCLASSIFIED

Armed Services Technical Information Agency

PLEASE RETURN THIS COPY TO:

ARMED SERVICES TECHNICAL INFORMATION AGENCY
DOCUMENT SERVICE CENTER
Knott Building, Dayton 2, Ohio

Because of our limited supply you are requested to return this copy as soon as it has served your purposes so that it may be made available to others for reference use. Your cooperation will be appreciated.

AD

25154

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE OR USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

Reproduced by
DOCUMENT SERVICE CENTER
KNOTT BUILDING, DAYTON, 2, OHIO

CONFIDENTIAL

CONFIDENTIAL

NAVORD REPORT 3551

AD No. 25-154

CTA FILE COPY

COMPARATIVE SENSITIVITY OF TETRYL AND OF
RDX/WAX MIXTURES AS BOOSTER EXPLOSIVES

14 OCTOBER 1953



U. S. NAVAL ORDNANCE LABORATORY
WHITE OAK, MARYLAND

CONFIDENTIAL
SECURITY INFORMATION

54AA-11845

This document contains information affecting the national defense of the United States within the meaning of the Espionage Act, 50 USC, 31 and 32, as amended. Its transmission or the revelation of its contents, in any manner to an unauthorized person, is prohibited by law.

Reproduction of this matter in any form by other than naval activities is not authorized except by specific approval of the Secretary of the Navy.

CONFIDENTIAL
NAVORD Report 3551

COMPARATIVE SENSITIVITY OF TETRYL AND OF
RDX/WAX MIXTURES AS BOOSTER EXPLOSIVES

By
L. D. Hampton

Approved by:

Russell McGill

Russell McGill, Chief
Explosives Properties Division

ABSTRACT: The sensitivity of tetryl with or without a small amount of calcium stearate and graphite is compared to that of RDX/Wax mixtures 96/4, 94/6, and 92/8 when used as the booster explosive. The initiator was separated from the booster by a steel barrier, by an air gap, and by a steel barrier followed by an air gap. Design tests of the reliability with which a fuze system would initiate a tetryl booster could be made using the less sensitive RDX/Wax mixtures. Knowledge of the comparative sensitivity of these explosives could be used to predict the performance with the more sensitive tetryl. It is believed that this could be done with a smaller number of trials than would be required to test directly with tetryl.

Explosives Research Department
U. S. NAVAL ORDNANCE LABORATORY
White Oak, Maryland

i

CONFIDENTIAL
SECURITY INFORMATION

CONFIDENTIAL
NAVORD Report 3551

CONTENTS

	Page
Introduction	1
Experimental Method	2
Results	2
Conclusions	3
References	4

ILLUSTRATIONS

- Figure 1 Experimental Arrangement
- Figure 2 Comparative Sensitivity of Booster Explosives, Barrier only
- Figure 3 Comparative Sensitivity of Booster Explosives, Air gap only
- Figure 4 Comparative Sensitivity of Booster Explosives, 0.016 inch barrier and air gap
- Figure 5 Comparative Sensitivity of Booster Explosives, Barrier and 0.125 inch air gap

COMPARATIVE SENSITIVITY OF TETRYL AND OF
RDX/WAX MIXTURES AS BOOSTER EXPLOSIVES

Introduction

1. The evaluation of an explosive train design requires an estimate of the reliability of that design in transmitting detonation from the initiating element to the lead or booster in the armed position. An estimate is also required concerning the degree of safety afforded by the device in the unarmed position. The desired reliability is high. The allowed number of failures under operating conditions is a fraction of one percent. A corresponding statement is true of the safety of the unarmed fuze. In this case the probability of having an explosion when the fuze is in the unarmed position must be very small. In order to investigate the reliability of a fuze in which the expected number of failures is of the order of one in a thousand would require at least a thousand trials if the fuze were tested without modification.

2. It is possible to avoid the need for such a prohibitive number of shots if the test is made under conditions more severe than those existing in the fuze which is being tested. This must be done in such a way that the results of the more severe test can be used to estimate the probabilities associated with the actual fuze design. If, for example, the design involved an air gap, tests of the reliability could be made of the system when the air gap was increased to a point where the failures become twenty to thirty percent. If this is done for several sizes of gap the probability of failure can be plotted as a function of the gap distance and the curve extrapolated to the value for the design under test. There is some danger in this method, however, since it is known that decreasing the air gap beyond a certain value may actually decrease the effectiveness of the fuze, reference (a). Rather than vary the inert parts of the system a change in the explosive elements used could be made. This report gives the results of an experiment which was designed to determine the effect of a change in the sensitivity of the booster explosive. The object of the experiment was to determine the relative sensitivity of certain RDX/Wax mixtures as compared with tetryl. The expectation is that if one wished to estimate the performance of a fuze which used tetryl as the booster explosive he would determine the percent fires obtained when the less sensitive mixture was substituted for the tetryl. A knowledge of the relative sensitivity of the two explosives could then be used to obtain the required estimate of the performance of the fuze.

CONFIDENTIAL
NAVORD Report 3551

Experimental Method

3. The results of tests with five explosives are given in the present report. Two varieties of tetryl are included. The first of these is tetryl without any additive substance. The second is tetryl as used by the army which contains a small percentage of graphite and calcium stearate. The other three explosives were mixtures of RDX with wax. The mixtures used were 96/4, 94/6, and 92/8.

4. These explosives were press loaded into wood blocks at a pressure of five thousand pounds per square inch. The explosive column was one half inch in diameter and one half inch long. Wooden pieces were used since they probably give about the same degree of confinement as would be furnished by more explosive. Thus, a full size booster could be approximated by a smaller amount of explosive. The initiator used in these experiments was one which was specially made using inert parts of the initiator, Mk 124. The explosive load was 120 mg of lead azide and 60 mg of PETN. The PETN base charge was pressed at ten thousand pounds per square inch. The azide flash charge was pressed at four thousand pounds per square inch.

5. Four tests were run with each booster explosive. The Bruceton up-and-down method was used. In the first test the booster explosive was separated from the initiator by only a barrier of cold rolled steel. In the second, there was no barrier, but an air gap separated the initiator and booster. This air gap was cylindrical with a diameter of 0.20 inches. Its length was varied to obtain fifty percent initiation of the booster. In the other two tests both a metal barrier and an air gap were used. In one case the metal barrier was kept constant at a thickness of 0.016 inches. In the other the length of the air column was fixed at an eighth of an inch. Figure 1 shows the experimental setup when both barrier and air gap were used. The arrangement was the same for the first two parts of the experiment except that the air gap or the barrier was omitted.

Results

6. The results obtained in the test using only an air gap between the initiator and the booster were somewhat erratic. A few failures were observed for much smaller gaps than would be consistent with the rest of the data. These failures were not considered in the calculations. Omitting these few failures in this test the mean and standard deviation were computed for each test with each booster explosive. For the purpose of these tests the differences in the estimates obtained for the

CONFIDENTIAL
NAVORD Report 3551

REFERENCES

- (a) Ordnance Board Proceeding No. 30870 with enclosure, dated 15 April 1945 (British)

CONFIDENTIAL
NAVORD REPORT 3551

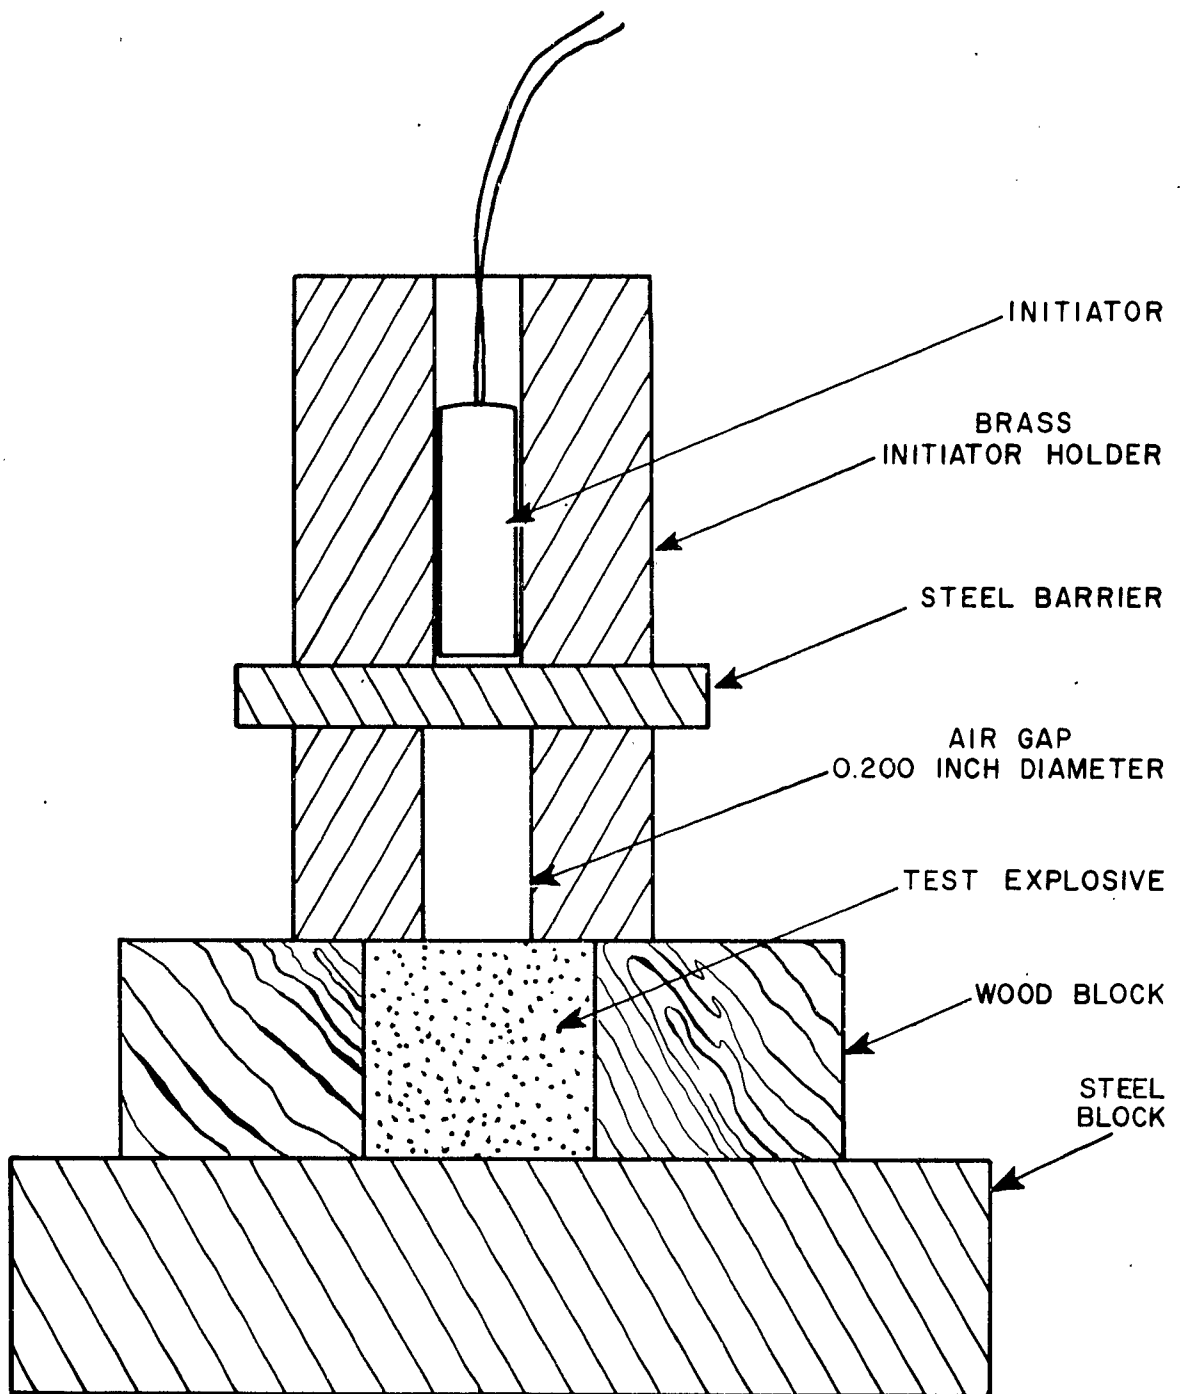


FIG. 1 EXPERIMENTAL ARRANGEMENT

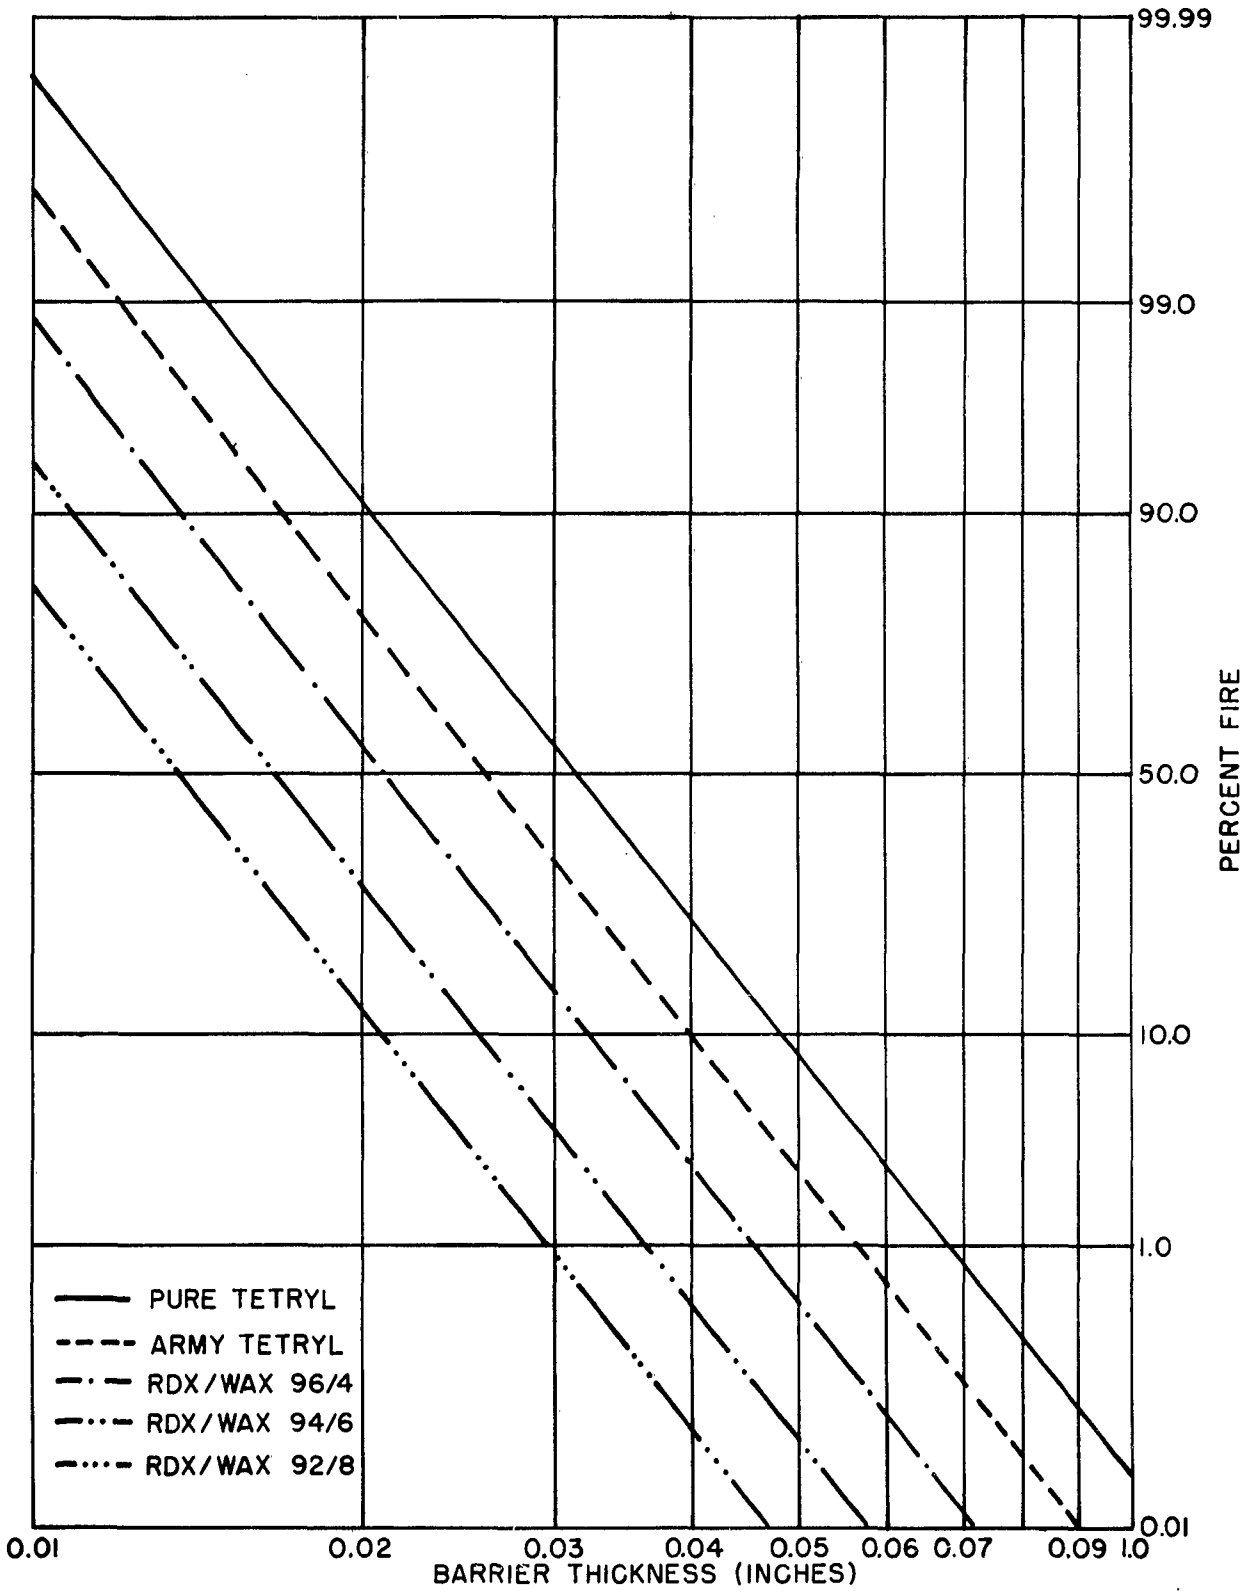


FIG. 2

COMPARATIVE SENSITIVITY OF BOOSTER EXPLOSIVES
BARRIER ONLY

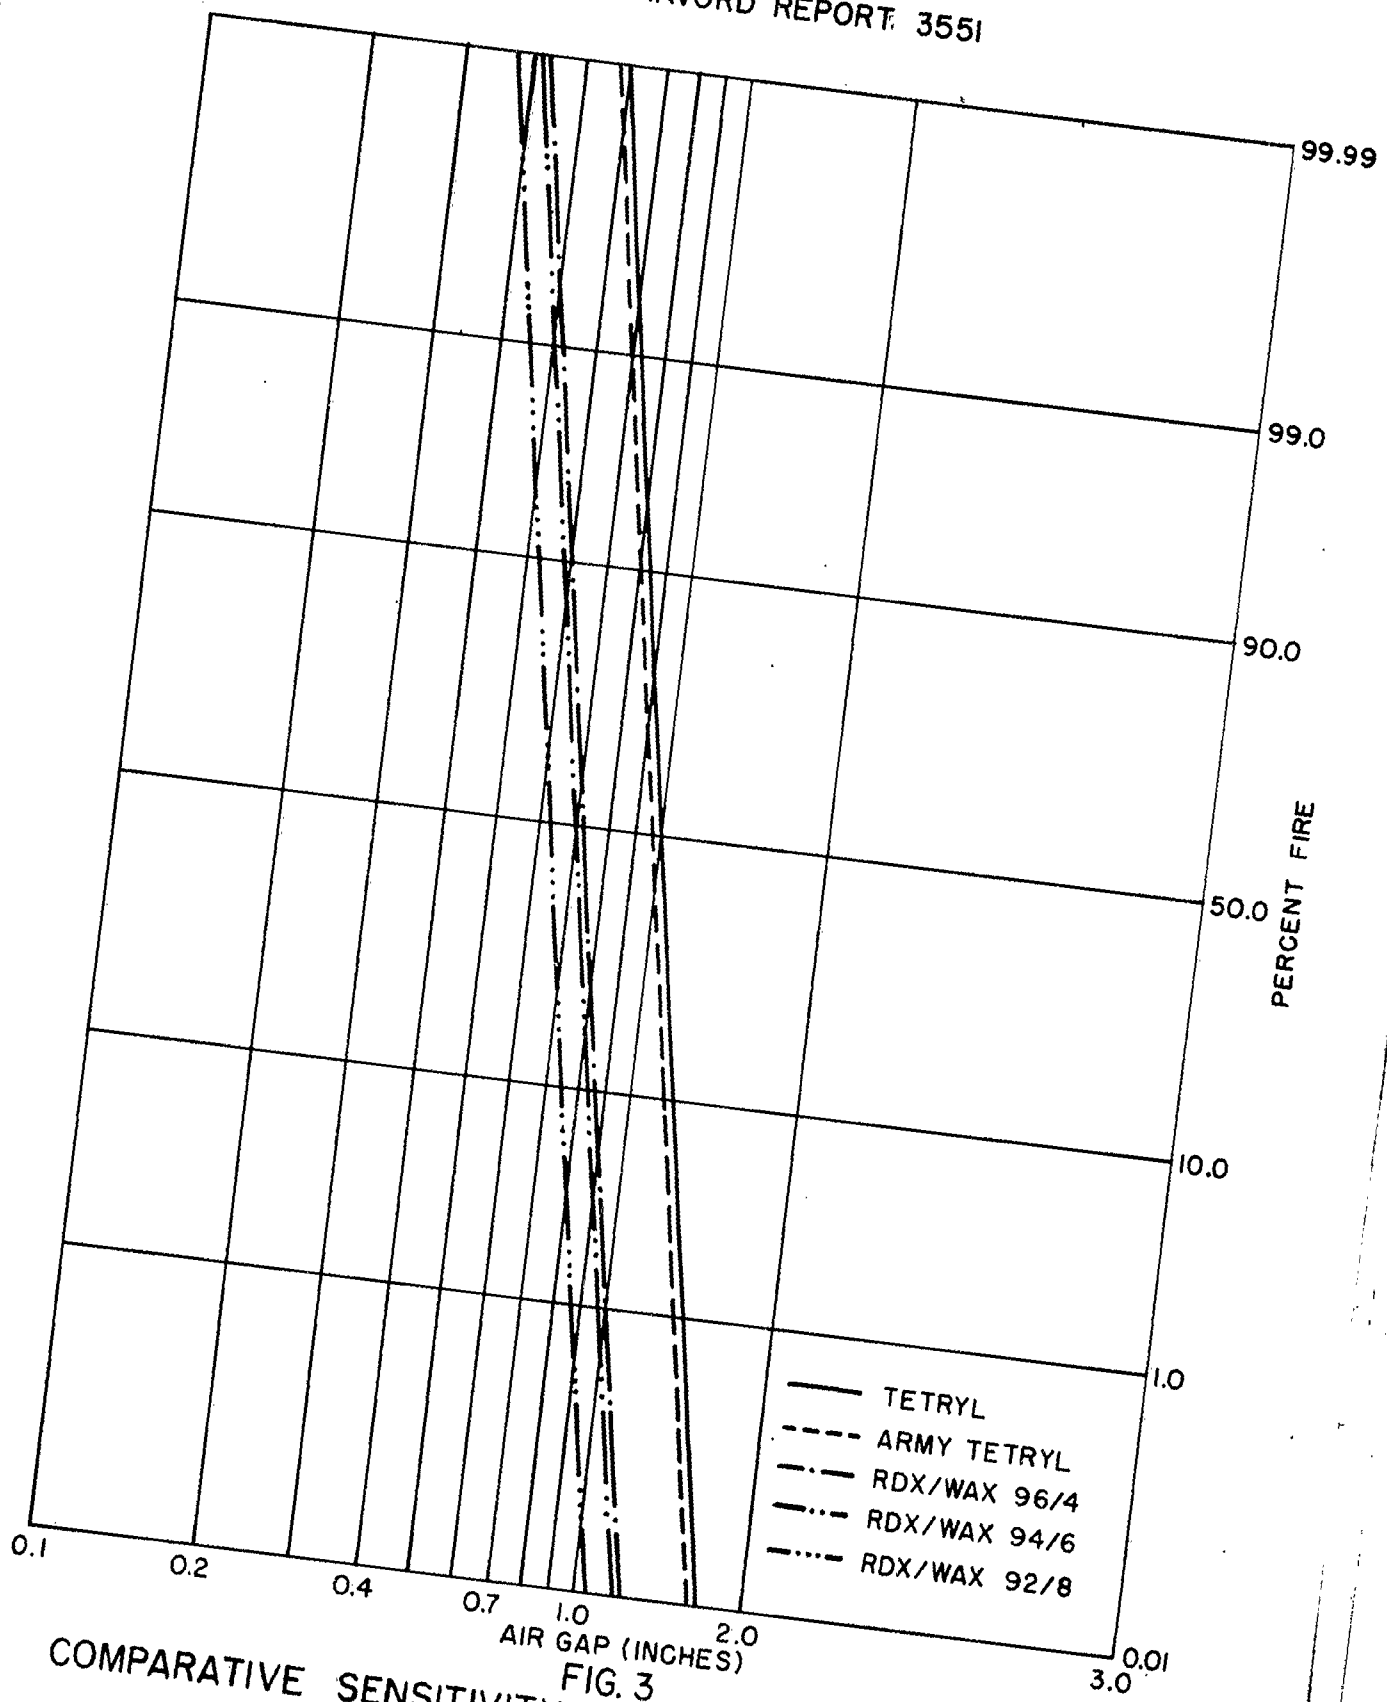


FIG. 3
COMPARATIVE SENSITIVITY OF BOOSTER EXPLOSIVES
AIR GAP ONLY

SECURITY
INFORMATION

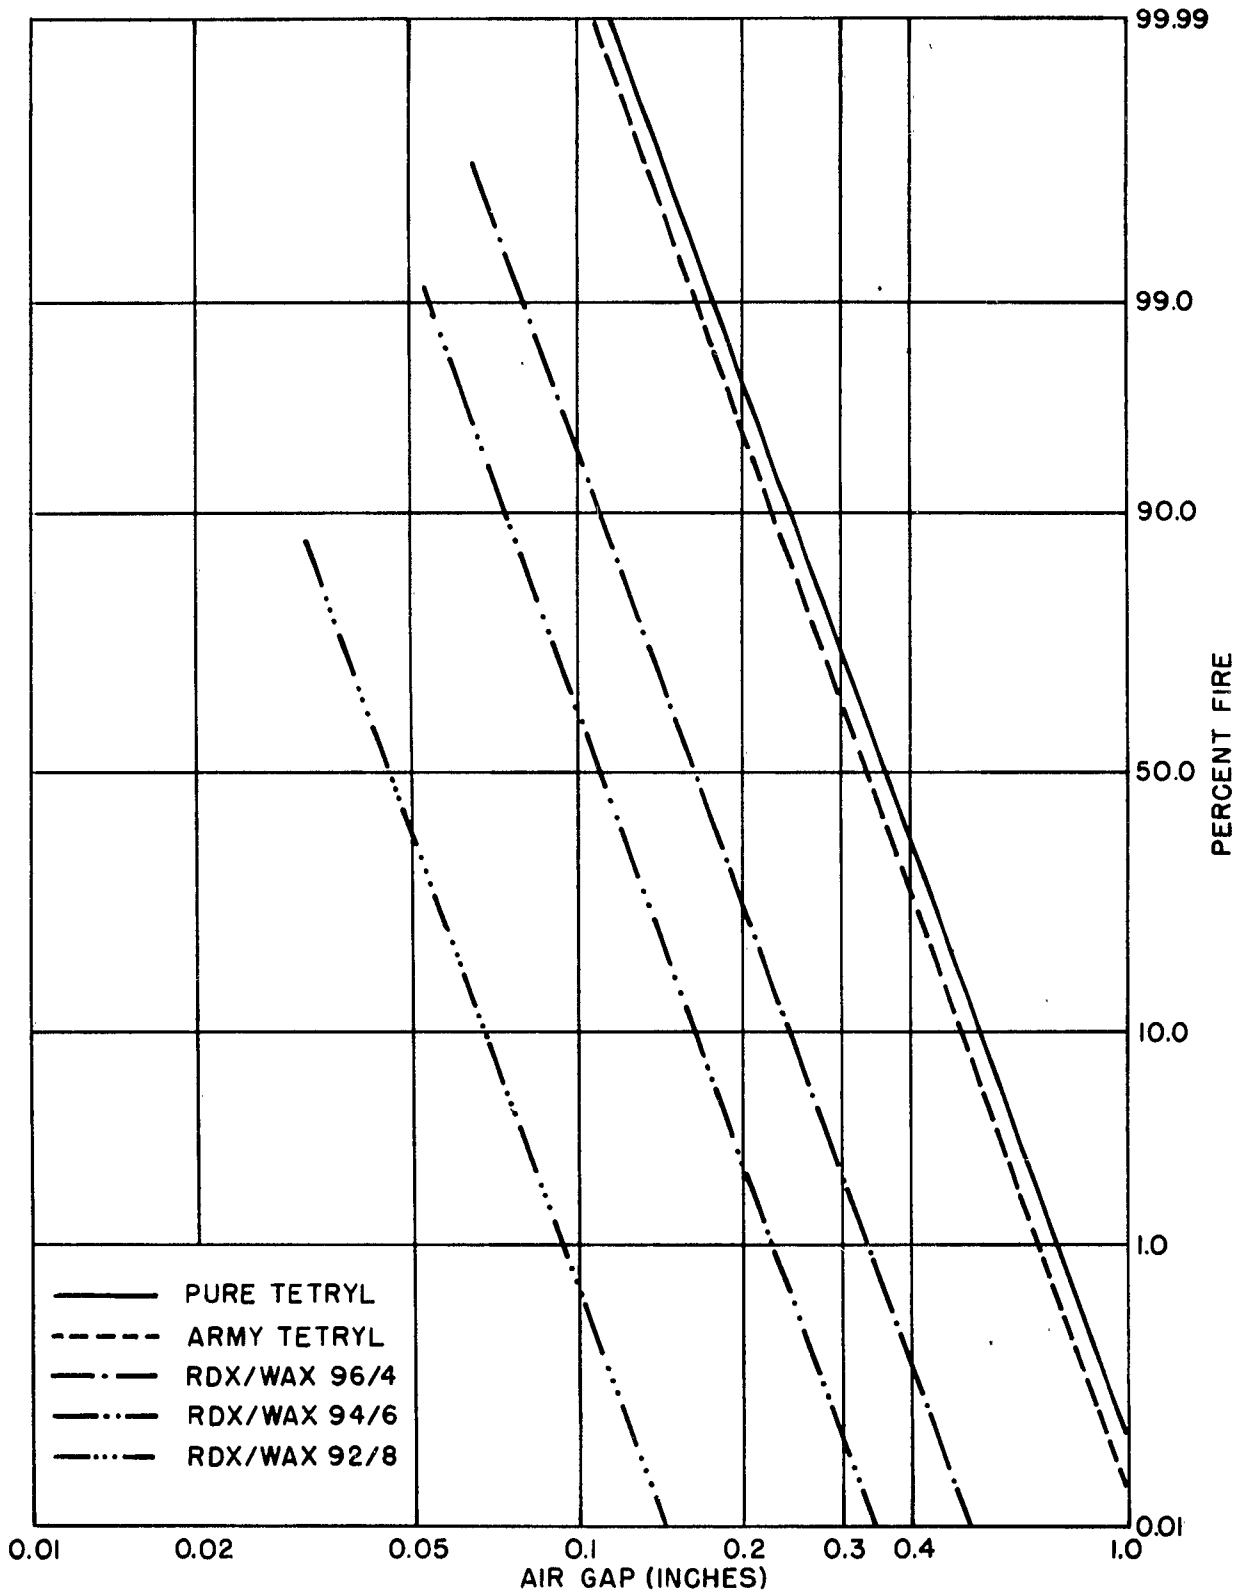


FIG. 4
RELATIVE SENSITIVITY OF BOOSTER EXPLOSIVES
0.016-INCH BARRIER AND AIR GAP

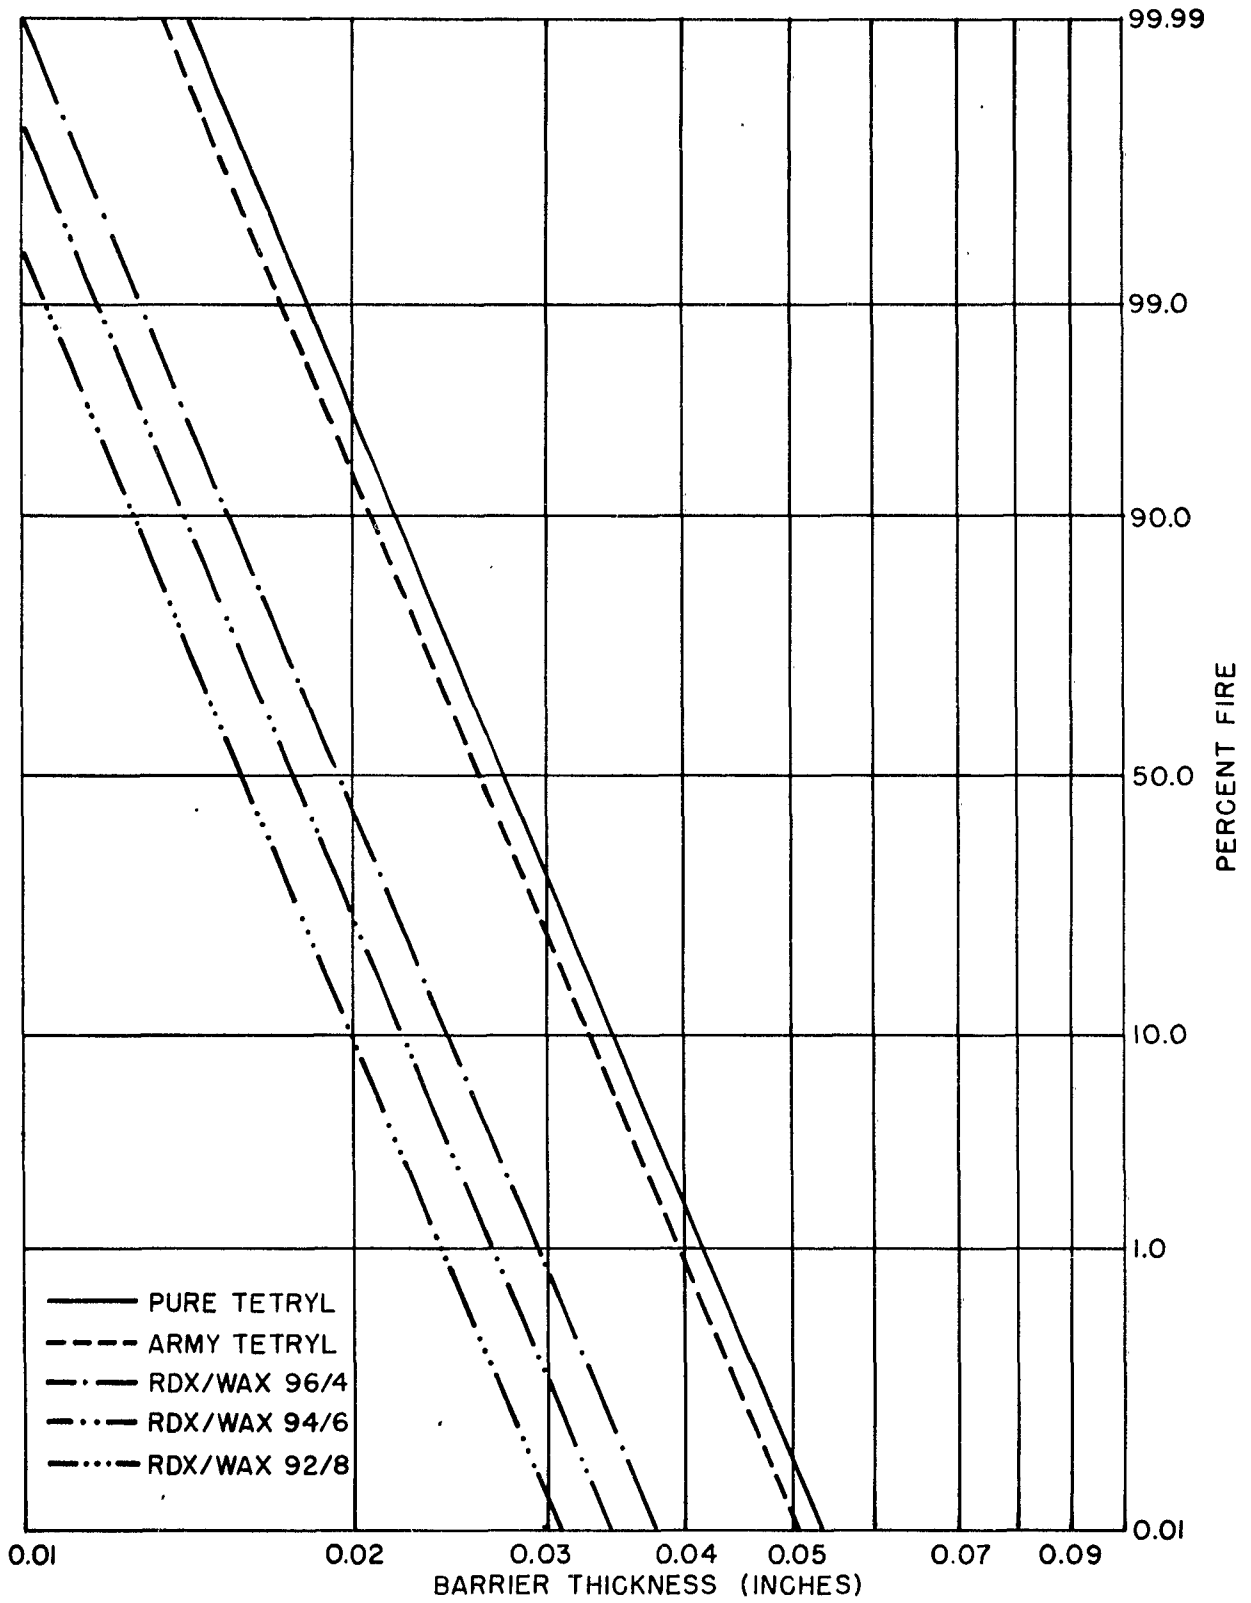


FIG. 5
RELATIVE SENSITIVITY OF BOOSTER EXPLOSIVES
BARRIER AND 0.125 INCH AIR GAP

SECURITY
INFORMATION

CONFIDENTIAL