

UNCLASSIFIED

<b>AD NUMBER</b>	
<b>AD029099</b>	
<b>CLASSIFICATION CHANGES</b>	
<b>TO:</b>	<b>unclassified</b>
<b>FROM:</b>	<b>restricted</b>
<b>LIMITATION CHANGES</b>	
<b>TO:</b>	<b>Approved for public release, distribution unlimited</b>
<b>FROM:</b>	<b>Distribution authorized to U.S. Gov't. agencies and their contractors; Foreign Government Information; JAN 1954. Other requests shall be referred to British Embassy, 3100 Massachusetts Avenue, NW, Washington, DC 20008.</b>
<b>AUTHORITY</b>	
<b>DSTL, AVIA 6/20158, 30 Jul 2008; DSTL, AVIA 6/20158, 30 Jul 2008</b>	

THIS PAGE IS UNCLASSIFIED

# Armed Services Technical Information Agency

# AD

# 29099

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY ANY PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

Reproduced by  
DOCUMENT SERVICE CENTER  
KNOTT BUILDING, DAYTON, 2, OHIO

# CONFIDENTIAL

AD NO. 22099

REPORT STRUCTURES 162  
ASTIA FILE COPY

REPORT STRUCTURES 162

TO BE HANDLED AS  
U.S. CONFIDENTIAL  
(PAR 16, A/S 14-  
44-55, S. 243 85)  
RESTRICTED

CONFIDENTIAL

ROYAL AIRCRAFT ESTABLISHMENT  
FARNBOROUGH, HANTS

REPORT No: STRUCTURES 162

Classification *changed*  
to *Confidential*  
Auth: *E.H. Mansfield*  
*1/25/51*  
*1/15/52*  
*rev 5/6/54*

# THE STRESS DISTRIBUTION IN PANELS BOUNDED BY CONSTANT STRESS EDGE MEMBERS

by

E.H. MANSFIELD, M.A.

1. THIS INFORMATION IS DISCLOSED ONLY FOR OFFICIAL USE BY THE RECIPIENT GOVERNMENT AND SUCH OF ITS CONTRACTORS UNDER SEAL OF SECRECY, AS MAY BE ENGAGED ON A DEFENCE PROJECT. DISCLOSURE TO ANY OTHER GOVERNMENT OR RELEASE TO THE PRESS OR IN ANY OTHER WAY WOULD BE A BREACH OF THESE CONDITIONS.
2. THE INFORMATION SHOULD BE SAFEGUARDED UNDER RULES DESIGNATED TO GIVE THE SAME STANDARD OF SECURITY AS THAT MAINTAINED BY HER MAJESTY'S GOVERNMENT IN THE UNITED KINGDOM.
3. THE RECIPIENT IS WARNED THAT INFORMATION CONTAINED IN THIS DOCUMENT MAY BE SUBJECT TO PRIVATELY OWNED RIGHTS.

MINISTRY OF SUPPLY

THIS DOCUMENT IS THE PROPERTY OF H.M. GOVERNMENT AND ATTENTION IS CALLED TO THE PENALTIES ATTACHING TO ANY INFRINGEMENT OF THE OFFICIAL SECRECY ACT, 1911.

It is intended for the use of the recipient only and for communication by such officers under him as may require to be acquainted with its contents in the course of their duties. The officers exercising the power of communication are responsible that such information is imparted with due caution and reserve. Any person other than the authorized holder, upon obtaining possession of this document, by finding or otherwise, should forward it, together with his name and address, to a closed employee (S).

THE SECRETARY, MINISTRY OF SUPPLY, LONDON, W.C.2

Letter postage need not be prepaid, unless postage will be refunded. All persons are hereby warned that the unauthorized receipt or destruction of this document is an offence against the Official Secrets Act.

RESTRICTED  
CONFIDENTIAL

54AA-22364

---

**NOTICE: THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE  
NATIONAL DEFENSE OF THE UNITED STATES WITHIN THE MEANING  
OF THE ESPIONAGE LAWS, TITLE 18, U.S.C., SECTIONS 793 and 794.  
THE TRANSMISSION OR THE REVELATION OF ITS CONTENTS IN  
ANY MANNER TO AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW.**

---

**RESTRICTED**

U.D.C. No.531.258 : 621-41

Report No. Structures 162

January, 1954

ROYAL AIRCRAFT ESTABLISHMENT, FARNBOROUGH

The Stress Distribution in Panels Bounded by  
Constant Stress Edge Members

by

E. H. Mansfield, M.A.

---

R.A.E. Ref: Structures C13361/EHM

SUMMARY

- Exact solutions are given for the stress distributions in long panels bounded by constant stress edge members. The influence of closely spaced stringers and ribs on the peak shear stresses is investigated.

---

**RESTRICTED**

Report No. Structures 162

LIST OF CONTENTS

	<u>Page</u>
1 Introduction	3
2 List of Symbols	3
3 Stress Distribution in a Long Panel Bounded by Constant Stress Edge Members	4
3.1 Transverse edge free	4
3.2 Transverse edge supported	7
4 Discussion of Results	7
5 Conclusions	8
References	8
Advance Distribution	8
Detachable Abstract Cards	-

LIST OF APPENDICES

	<u>Appendix</u>
Stress Distribution in an Infinitely Long Panel Bounded by Constant Stress Edge Members	I
Stress Distribution in a Finite Panel Bounded by Constant Stress Edge Members	II
Stress Distribution in an Infinitely Long Panel Bounded by Constant Area Edge Members	III

LIST OF ILLUSTRATIONS

	<u>Fig.</u>
Figure Showing Notation	1
Contours of Constant $\sigma_x/\sigma_e$	2
Contours of Constant $-\sigma_y/\sigma_e$	3
Contours of Constant $\tau_{xy}/\sigma_e$	4
Peak Shear Stresses in Reinforced Sheet	5
Contours of Constant $\sigma_x/\sigma_{e,0}$ : $F = 2bt$	6
Contours of Constant $\sigma_x/\sigma_{e,0}$ : $F = bt$	7
Contours of Constant $\sigma_x/\sigma_{e,0}$ : $F = \frac{1}{2}bt$	8

1 Introduction

The stress distributions in panels bounded by constant stress and constant area edge members have been considered by a number of writers<sup>1,2,3</sup> by assuming that the transverse strains may be neglected. This assumption is justifiable in that the longitudinal direct stresses are then determined sufficiently accurately although the peak shear stresses are in error. In this report it is shown that if the longitudinal edge members are tapered so that their stress will not vary along their length it is possible to obtain simple expressions for the stresses in an unreinforced panel without recourse to more drastic simplifying assumptions. If the panel is reinforced by stringers and ribs simple expressions for the stresses are determined on the assumption that the panel has orthotropic properties.

2 List of Symbols (see Figure 1)

Structure properties	}	$2b$	= width of panel
		$t$	= thickness of sheet
		$S$	= relative stiffness of stringers to sheet (i.e. stringer area/ $t$ x stringer pitch)
		$R$	= relative stiffness of ribs to sheet (i.e. rib area/ $t$ x rib pitch)
		$F$	= section area of longitudinal edge member
		$\nu$	= Poisson's ratio
axes	}	$Ox, Oy$	= Cartesian co-ordinates, $Ox$ measured longitudinally
		$\xi$	= $\pi x/2b$
		$\eta$	= $\pi y/2b$
stresses	}	$\sigma_x, \sigma_y, \tau_{xy}$	= stresses in the sheet.
		$\sigma_e$	= stress in the longitudinal edge members
		$\sigma_S, \sigma_R$	= stresses in the stringers and ribs
		$\bar{\sigma}_x, \bar{\sigma}_y$	= stress resultants in the reinforced panel
non-dimensional parameters	}	$K$	= $1 + S + R + SR (1 - \nu^2)$
		$\alpha$	= $1 + S (1 - \nu^2)$
		$\gamma$	= $1 + (1 + \nu) \{S + R + SR (1 - \nu^2)\}$
		$\epsilon$	= $1 + R (1 - \nu^2)$
		$n_1$	= $\sqrt{\frac{\gamma + \sqrt{\gamma^2 - \alpha\epsilon}}{\epsilon}}$
		$n_2$	= $\sqrt{\frac{\gamma - \sqrt{\gamma^2 - \alpha\epsilon}}{\epsilon}}$

non-dimensional parameters

$$\begin{aligned} \psi &= n_1 - n_2 \\ &= \sqrt{\frac{2}{\epsilon}} (\gamma - \sqrt{\alpha\epsilon}) \\ \mu &= n_1 + n_2 \\ &= \sqrt{\frac{2}{\epsilon}} (\gamma + \sqrt{\alpha\epsilon}) \end{aligned}$$

3 Stress Distribution in a Long Panel Bounded by Constant Stress Edge Members

In this paragraph expressions are given in closed form for the stresses in a long panel bounded by constant stress edge members. The analysis is given in Appendix I and is based on a series expansion for the stress function; the resulting series for the stresses are shown to be summable in terms of known functions. The boundary conditions considered along the transverse edge are either that the edge is free or that it is supported by an inextensional but flexible member.

3.1 Transverse edge free

The boundary conditions considered here are that along the longitudinal edges

$$\left. \begin{aligned} \sigma_x - \nu \sigma_y &= \sigma_e \\ \sigma_y &= 0 \end{aligned} \right\} \quad (1)$$

so that there are no transverse loads; and along the transverse edge

$$\left. \begin{aligned} \sigma_x &= 0 \\ \tau_{xy} &= 0 \end{aligned} \right\} \quad (2)$$

so that this edge is free.

3.11 Plain sheet

It is shown in Appendix I that the stresses in the panel are given by

$$\frac{\sigma_x}{\sigma_e} = 1 - \frac{2}{\pi} \left\{ \frac{\xi \cosh \xi \cos \eta}{\cosh^2 \xi - \sin^2 \eta} + \tan^{-1} \left( \frac{\cos \eta}{\sinh \xi} \right) \right\} \quad (3)$$

$$\frac{\sigma_y}{\sigma_e} = \frac{2}{\pi} \left\{ \frac{\xi \cosh \xi \cos \eta}{\cosh^2 \xi - \sin^2 \eta} - \tan^{-1} \left( \frac{\cos \eta}{\sinh \xi} \right) \right\} \quad (4)$$

$$\frac{\tau_{xy}}{\sigma_e} = -\frac{2}{\pi} \left\{ \frac{\xi \sinh \xi \sin \eta}{\cosh^2 \xi - \sin^2 \eta} \right\} \quad (5)$$

These stresses have been plotted as contours over the panel in Figures 2, 3, 4.

The maximum value of  $\sigma_y$  is  $-\sigma_e$  and it occurs along the length of the free edge. The maximum value of  $\tau_{xy}$  is  $\frac{2}{\pi} \sigma_e$  and it occurs at the corners of the panel. The variation of  $\tau_{xy}$  along the longitudinal edges of the panel assumes a particularly simple form:

$$\frac{(\tau_{xy})_e}{\sigma_e} = \frac{2\xi}{\pi \sinh \xi} \quad (6)$$

and this may be integrated to give the required variation of the section area of the constant stress edge members:

$$F = F_0 - \frac{4bt}{\pi^2} \int_0^{\xi} \frac{\xi d\xi}{\sinh \xi} \quad (7)$$

### 3.12 Reinforced sheet

It is shown in Appendix I that the stress resultants\* in the panel are given by

$$\frac{\bar{\sigma}_x}{\sigma_e} = \frac{K}{\epsilon} - \frac{2K}{\pi \psi \epsilon} \left\{ n_1 \tan^{-1} \left( \frac{\cos \eta}{\sinh (\xi/n_1)} \right) - n_2 \tan^{-1} \left( \frac{\cos \eta}{\sinh (\xi/n_2)} \right) \right\} \quad (8)$$

$$\frac{\bar{\sigma}_y}{\sigma_e} = \frac{2K}{\pi \psi \epsilon} \left\{ \frac{1}{n_1} \tan^{-1} \left( \frac{\cos \eta}{\sinh (\xi/n_1)} \right) - \frac{1}{n_2} \tan^{-1} \left( \frac{\cos \eta}{\sinh (\xi/n_2)} \right) \right\} \quad (9)$$

$$\frac{\tau_{xy}}{\sigma_e} = \frac{K}{\pi \psi \epsilon} \log \left[ \frac{\{ \cosh (\xi/n_1) - \sin \eta \} \{ \cosh (\xi/n_2) + \sin \eta \}}{\{ \cosh (\xi/n_1) + \sin \eta \} \{ \cosh (\xi/n_2) - \sin \eta \}} \right] \quad (10)$$

\*Stress resultants are here defined as (the resultant force in the stiffened sheet per unit length)  $t$ . They therefore have the dimensions of a stress, and when there is no reinforcement in a particular direction the stress resultants are the actual stresses in the sheet.

The maximum value of  $\bar{\sigma}_y$  occurs along the length of the free edge and is given by

$$\frac{(\bar{\sigma}_y)_{\max}}{\sigma_e} = -\frac{K}{\sqrt{a\epsilon}} \quad (11)$$

The maximum value of  $\tau_{xy}$  occurs at the corner of the panel and is given by

$$\frac{(\tau_{xy})_{\max}}{\sigma_e} = \left(\frac{2K}{\pi\psi\epsilon}\right) \log\left(\frac{n_1}{n_2}\right) \quad (12)$$

and this has been plotted in Figure 5 for varying values of the stringer and rib stiffness. The variation of  $\tau_{xy}$  along the longitudinal edges of the panel may be written in the form:

$$\frac{(\tau_{xy})_e}{\sigma_e} = \left(\frac{2K}{\pi\psi\epsilon}\right) \log\left\{\frac{\tanh(\xi/2n_1)}{\tanh(\xi/2n_2)}\right\} \quad (13)$$

and this may be integrated to give the required variation of the section area of the constant stress edge members:

$$F = F_0 - \left(\frac{4Kbt}{\pi^2\psi\epsilon}\right) \int_0^\xi \log\left\{\frac{\tanh(\xi/2n_1)}{\tanh(\xi/2n_2)}\right\} d\xi \quad (14)$$

### 3.13 Direct stresses in the sheet, stringers and ribs

When the panel is reinforced the direct stresses in the sheet, stringers and ribs are related to the stress resultants by the equations<sup>4</sup>

$$\sigma_x = \left(\frac{1+R}{K}\right) \bar{\sigma}_x + \frac{\nu S}{K} \bar{\sigma}_y \quad (15)$$

$$\sigma_y = \left(\frac{1+S}{K}\right) \bar{\sigma}_y + \frac{\nu R}{K} \bar{\sigma}_x \quad (16)$$

$$\sigma_S = \frac{\epsilon}{K} \bar{\sigma}_x - \frac{\nu}{K} \bar{\sigma}_y \quad (17)$$

and

$$\sigma_R = \frac{\alpha}{K} \bar{\sigma}_y - \frac{\nu}{K} \bar{\sigma}_x \quad (18)$$

### 3.2 Transverse edge supported

If the transverse edge is supported by an inextensional but flexible member the second part of equation (2) becomes

$$\sigma_R = 0 \quad (19)$$

and the other boundary conditions are unaltered.

#### 3.21 Plain sheet

It is shown in Appendix I that the stresses in the panel are given by

$$\frac{\sigma_x}{\sigma_e} = 1 - \frac{1}{\pi} \left\{ \frac{\xi \cosh \xi \cos \eta}{\cosh^2 \xi - \sin^2 \eta} + 2 \tan^{-1} \left( \frac{\cos \eta}{\sinh \xi} \right) \right\} \quad (20)$$

$$\frac{\sigma_y}{\sigma_e} = \frac{1}{\pi} \left\{ \frac{\xi \cosh \xi \cos \eta}{\cosh^2 \xi - \sin^2 \eta} \right\} \quad (21)$$

$$\frac{\tau_{xy}}{\sigma_e} = -\frac{1}{2\pi} \left\{ \frac{2\xi \sinh \xi \sin \eta}{\cosh^2 \xi - \sin^2 \eta} + \log \left( \frac{\cosh \xi + \sin \eta}{\cosh \xi - \sin \eta} \right) \right\} \quad (22)$$

and the shear stress becomes infinite at the corners because of the logarithmic term.

#### 3.22 Reinforced sheet

It is shown in Appendix I that the stress resultants in the panel are given by

$$\frac{\sigma_x}{\sigma_e} = \frac{K}{\epsilon} - \frac{2K}{\pi \mu \epsilon \psi} \left\{ n_1^2 \tan^{-1} \left( \frac{\cos \eta}{\sinh(\xi/n_1)} \right) - n_2^2 \tan^{-1} \left( \frac{\cos \eta}{\sinh(\xi/n_2)} \right) \right\} \quad (23)$$

$$\frac{\sigma_y}{\sigma_e} = \frac{2K}{\pi \mu \epsilon \psi} \left\{ \tan^{-1} \left( \frac{\cos \eta}{\sinh(\xi/n_1)} \right) - \tan^{-1} \left( \frac{\cos \eta}{\sinh(\xi/n_2)} \right) \right\} \quad (24)$$

$$\frac{\tau_{xy}}{\sigma_e} = \frac{K}{\pi \mu \epsilon \psi} \left\{ n_1 \log \left( \frac{\cosh(\xi/n_1) - \sin \eta}{\cosh(\xi/n_1) + \sin \eta} \right) - n_2 \log \left( \frac{\cosh(\xi/n_2) - \sin \eta}{\cosh(\xi/n_2) + \sin \eta} \right) \right\} \quad (25)$$

## 4 Discussion of Results

From the analysis in the appendices it appears that the exact solutions given in para.3 are the only ones capable of expression in closed form. The case of a short panel is considered in Appendix II. The expressions for the stresses are complicated but are unlikely to differ significantly from those for a long panel unless the panel length is less than three times the panel width. The stress distribution in a long

panel bounded by constant area edge members loaded at their ends is considered in Appendix III. Contours of constant  $\sigma_x/\sigma_{e,0}$  in an unreinforced panel with a free edge have been drawn in Figures 6, 7, 8 for values of  $F/bt$  equal to  $\frac{1}{2}$ , 1, 2. These contours differ appreciably near the longitudinal edges from those shown in Figure 2 which correspond to infinite  $F/bt$ . The peak value of the shear stress is independent of  $F$  and is  $\frac{2}{\pi} \sigma_{e,0}$ .

## 5 Conclusions

The stress distributions in long panels bounded by constant stress edge members are considered theoretically using the exact equations of elasticity. The stresses in the panel are expressed in closed form, and may therefore be readily determined. Contours of stress in the panel are shown and the influence of closely spaced stringers and ribs on the peak shear stresses is investigated.

---

## REFERENCES

<u>No.</u>	<u>Author</u>	<u>Title, etc.</u>
1	W.J. Duncan	Diffusion of load in certain sheet-stringer combinations. R & M No.1825, January 1938.
2	M. Fine and H.G. Hopkins	Stress diffusion adjacent to gaps in the interspar skin of a stressed skin wing. R & M No. 2618, 1951.
3	J. Hadji-Argyris	Diffusion of symmetrical loads into stiffened parallel panels with constant area edge members. R & M No.2038, 1944.
4	E.H. Mansfield	Elasticity of a sheet reinforced by stringers and skew ribs, with application to swept wings. R & M No.2758, 1953.

---

Attached: Appendices I, II, III  
Figs.1 to 8, Drg. Nos. SME 75379/R to 75386/R inc.  
Detachable Abstract Cards

### Advance Distribution:

CS(A)  
PDSR(A)  
DARD  
DMARD(RAF)  
DMARD(RN)  
ADR Structures - Action Copy  
ADSR Records  
TPA3/TIB - 170

Director RAE  
DDRÆ(A)  
Aero Dept  
RAE Library  
NAE "

Additional symbols used only in the appendices

$\phi$	=	Airy stress function
$B, C_n, C_n'$	=	constants in a summation
$\sum_n$	=	summation for $n = 0, 1, 2, \dots, \infty$
$S_1, S_2$	=	summation introduced in equation (43)
$\xi'$	=	$\xi/n_1$ or $\xi/n_2$
$S_0$	=	$S_1 + i S_2$
$S_{1,1}, S_{2,1}$	=	values of $S_1, S_2$ with $\xi' = \xi/n_1$
$S_{1,2}, S_{2,2}$	=	values of $S_1, S_2$ with $\xi' = \xi/n_2$
$\lambda$	=	$\pi \times (\text{length of panel})/4b$
$\rho$	=	$Kbt/Fe$
$r_n$	=	positive root of the equation: $r + \rho \tan r = 0$

APPENDIX IStress distribution in an infinitely long panel bounded by constant stress edge members

In determining the stress distribution in the reinforced panel it is convenient to introduce the stress function  $\phi$ , such that the stress resultants are given by

$$\left. \begin{aligned} \bar{\sigma}_x &= \frac{\partial^2 \phi}{\partial y^2} \\ \bar{\sigma}_y &= \frac{\partial^2 \phi}{\partial x^2} \\ \tau_{xy} &= -\frac{\partial^2 \phi}{\partial x \partial y} \end{aligned} \right\} \quad (26)$$

The equilibrium conditions are then automatically satisfied, and the condition of compatibility is satisfied if  $\phi$  satisfies the differential equation<sup>†</sup>:

$$\alpha \frac{\partial^4 \phi}{\partial x^4} + 2\gamma \frac{\partial^4 \phi}{\partial x^2 \partial y^2} + \epsilon \frac{\partial^4 \phi}{\partial y^4} = 0 \quad (27)$$

A suitable form for the stress function, which is a solution for this equation, is

$$\begin{aligned} \phi = & By^2 + \frac{4b^2}{\pi^2} \sum_n \frac{1}{(2n+1)^2} \left\{ C_n \exp - \left( \frac{(2n+1)\pi x}{2b n_1} \right) \right. \\ & \left. + C'_n \exp - \left( \frac{(2n+1)\pi x}{2b n_2} \right) \right\} \cos \left( \frac{(2n+1)\pi y}{2b} \right) \end{aligned} \quad (28)$$

where  $n_1$  and  $n_2$  are the positive roots of the equation

$$\alpha - 2\gamma n^2 + \epsilon n^4 = 0 \quad (29)$$

The stress resultants, obtained from equations (26) and (28), are written more conveniently in terms of  $\xi$  and  $\eta$ :

$$\bar{\sigma}_x = 2B - \sum_n \left\{ C_n e^{-(2n+1)\xi/n_1} + C'_n e^{-(2n+1)\xi/n_2} \right\} \cos (2n+1) \eta \quad (30)$$

$$\bar{\sigma}_y = \sum_n \left\{ \frac{C_n}{n_1^2} e^{-(2n+1)\xi/n_1} + \frac{C'_n}{n_2^2} e^{-(2n+1)\xi/n_2} \right\} \cos (2n+1) \eta \quad (31)$$

$$\tau_{xy} = - \sum_n \left\{ \frac{C_n}{n_1} e^{-(2n+1)\xi/n_1} + \frac{C'_n}{n_2} e^{-(2n+1)\xi/n_2} \right\} \sin (2n+1) \eta \quad (32)$$

and the actual direct stresses in the sheet, stringers and ribs are given by equations (15) to (18). The constant B is determined from the condition that as  $\xi$  tends to infinity,

$$\sigma_s = \sigma_e \quad (33)$$

so that,

$$B = \frac{K\sigma_e}{2\varepsilon} \quad (34)$$

Along the longitudinal edges  $\eta = \pm \frac{\pi}{2}$ , so that  $\cos(2n+1)\eta$  vanishes and therefore the boundary conditions represented by equation (1) are satisfied. (Note that  $\sigma_s \equiv \sigma_x - \nu\sigma_y$ ).

#### Transverse edge free

Along the transverse edge  $\xi = 0$  and the boundary conditions represented by equation (2) are

$$\frac{K\sigma_e}{\varepsilon} - \sum_n (C_n + C'_n) \cos (2n+1) \eta = 0 \quad (35)$$

and

$$\sum_n \left( \frac{C_n}{n_1} + \frac{C'_n}{n_2} \right) \sin (2n+1) \eta = 0 \quad (36)$$

Now from Fourier analysis

$$\frac{K\sigma_e}{\varepsilon} \equiv \frac{4K\sigma_e}{\pi\varepsilon} \sum_n \frac{(-1)^n \cos (2n+1) \eta}{2n+1} \quad (37)$$

so that

$$C_n + C'_n = \frac{(-1)^n 4K\sigma_e}{(2n+1) \pi \varepsilon} \quad (38)$$

and

$$\frac{C_n}{n_1} + \frac{C'_n}{n_2} = 0 \quad (39)$$

The solution of equations (38) and (39) is

$$\left. \begin{aligned} C_n &= \frac{(-1)^n 4K n_1 \sigma_e}{(2n+1) \pi \varepsilon \psi} \\ C'_n &= \frac{-(-1)^n 4K n_2 \sigma_e}{(2n+1) \pi \varepsilon \psi} \end{aligned} \right\} \quad (40)$$

Transverse edge supported

When the second part of equation (2) is replaced by equation (19), it will be found that equation (36) is replaced by

$$\frac{\nu K \sigma_e}{\varepsilon} - \sum_n \left\{ C_n \left( \nu + \frac{\alpha}{n_1} \right) + C'_n \left( \nu + \frac{\alpha}{n_2} \right) \right\} \cos (2n+1)\eta = 0 \quad (41)$$

and  $C_n$  and  $C'_n$  are given by

$$\left. \begin{aligned} C_n &= \frac{(-1)^n 4K n_1^2 \sigma_e}{(2n+1) \pi \varepsilon \mu \psi} \\ C'_n &= \frac{-(-1)^n 4K n_2^2 \sigma_e}{(2n+1) \pi \varepsilon \mu \psi} \end{aligned} \right\} \quad (42)$$

Solution in closed form

It will be seen by comparing equations (28), (41) and (42) that two distinct summations occur in the stress resultants, and these may be written as

$$\left. \begin{aligned} S_1 &= \sum_n \frac{(-1)^n e^{-(2n+1)\xi'} \cos (2n+1)\eta}{2n+1} \\ S_2 &= \sum_n \frac{(-1)^n e^{-(2n+1)\xi'} \sin (2n+1)\eta}{2n+1} \end{aligned} \right\} \quad (43)$$

and it will now be seen that  $S_1$  and  $S_2$  are respectively the real and imaginary parts of

$$\begin{aligned}
 S_0 &= \sum_n \frac{(-1)^n e^{-(2n+1)(\xi' - i\eta)}}{2n+1} \\
 &= \frac{1}{2i} \log \left( \frac{1 + i e^{-\xi' + i\eta}}{1 - i e^{-\xi' + i\eta}} \right) \\
 &= \frac{1}{2i} \log \left( \frac{\sinh \xi' + i \cos \eta}{\cosh \xi' + \sin \eta} \right) \\
 &= \frac{1}{2} \tan^{-1} \left( \frac{\cos \eta}{\sinh \xi'} \right) + \frac{i}{4} \log \left( \frac{\cosh \xi' + \sin \eta}{\cosh \xi' - \sin \eta} \right)
 \end{aligned} \tag{44}$$

so that

$$S_1 = \frac{1}{2} \tan^{-1} \left( \frac{\cos \eta}{\sinh \xi'} \right) \tag{45}$$

and

$$S_2 = \frac{i}{4} \log \left( \frac{\cosh \xi' + \sin \eta}{\cosh \xi' - \sin \eta} \right) \tag{46}$$

The stress resultants are to be determined from equations (30), (31), (32) and (40), (42), (43). If the transverse edge is free:

$$\frac{\sigma_x}{\sigma_e} = \frac{K}{\epsilon} - \frac{4K}{\pi \epsilon \psi} \{n_1 S_{1,1} - n_2 S_{1,2}\} \tag{47}$$

$$\frac{\sigma_y}{\sigma_e} = \frac{4K}{\pi \epsilon \psi} \left\{ \left( \frac{1}{n_1} \right) S_{1,1} - \left( \frac{1}{n_2} \right) S_{1,2} \right\} \tag{48}$$

$$\frac{\tau_{xy}}{\sigma_e} = - \frac{4K}{\pi \epsilon \psi} \{S_{2,1} - S_{2,2}\} \tag{49}$$

and these equations correspond to equations (8), (9) and (10) of the main text. If the transverse edge is supported:

$$\frac{\sigma_x}{\sigma_e} = \frac{K}{\epsilon} - \frac{4K}{\pi \epsilon \mu \psi} \{n_1^2 S_{1,1} - n_2^2 S_{1,2}\} \tag{50}$$

$$\frac{\bar{\sigma}_y}{\sigma_e} = \frac{4K}{\pi \epsilon \mu \psi} \{S_{1,1} - S_{1,2}\} \quad (51)$$

$$\frac{\tau_{xy}}{\sigma_e} = \frac{-4K}{\pi \epsilon \mu \psi} \{n_1 S_{2,1} - n_2 S_{2,2}\} \quad (52)$$

and these equations correspond to equations (23), (24) and (25) of the main text.

#### Plain sheet

If the panel is unreinforced the coefficients  $n_1$  and  $n_2$  are each equal to unity and the expressions derived above for the stresses assume an indeterminate form. The limiting values as  $n_1$  and  $n_2$  tend to unity may be readily found by observing that, for example in equation (47),

$$\text{Limit}_{n_1 \rightarrow n_2 \rightarrow 1} \left\{ \frac{n_1 S_{1,1} - n_2 S_{1,2}}{\psi} \right\} = \left[ \frac{\partial}{\partial n_1} \{n_1 S_{1,1}\} \right]_{n_1=1} \quad (53)$$

with similar relations for the indeterminate forms occurring in equations (48) to (52).

Now,

$$\frac{\partial}{\partial n_1} S_{1,1} = \frac{\xi \cosh \xi \cos \eta}{2(\cosh^2 \xi - \sin^2 \eta)} \quad (54)$$

and

$$\frac{\partial}{\partial n_1} S_{2,1} = \frac{\xi \sinh \xi \sin \eta}{2(\cosh^2 \xi - \sin^2 \eta)} \quad (55)$$

so that the derivation of equations (3), (4), (5), (20), (21) and (22) is now straightforward.

APPENDIX IIStress distribution in a finite panel bounded by  
constant stress edge members

The stress function is symmetrical about the line  $\xi = \lambda$ , and in the expansion for  $\phi$  (see equation (28)) the term

$$e^{-(2n+1)\xi/n_1} \text{ is therefore replaced by } \frac{\cosh\{(2n+1)(\lambda-\xi)/n_1\}}{\cosh\{(2n+1)\lambda/n_1\}} \quad (56)$$

and there is a similar replacement with  $n_2$  instead of  $n_1$ .

The stress resultants are then given by

$$\begin{aligned} \bar{\sigma}_x = 2B - \sum_n \left\{ C_n \frac{\cosh\{(2n+1)(\lambda-\xi)/n_1\}}{\cosh\{(2n+1)\lambda/n_1\}} \right. \\ \left. + C'_n \frac{\cosh\{(2n+1)(\lambda-\xi)/n_2\}}{\cosh\{(2n+1)\lambda/n_2\}} \right\} \cos_{(2n+1)\eta} \quad (57) \end{aligned}$$

$$\begin{aligned} \bar{\sigma}_y = - \sum_n \left\{ C_n \frac{\cosh\{(2n+1)(\lambda-\xi)/n_1\}}{n_1^2 \cosh\{(2n+1)\lambda/n_1\}} \right. \\ \left. + C'_n \frac{\cosh\{(2n+1)(\lambda-\xi)/n_2\}}{n_2^2 \cosh\{(2n+1)\lambda/n_2\}} \right\} \cos_{(2n+1)\eta} \quad (58) \end{aligned}$$

$$\begin{aligned} \tau_{xy} = - \sum_n \left\{ C_n \frac{\sinh\{(2n+1)(\lambda-\xi)/n_1\}}{n_1 \cosh\{(2n+1)\lambda/n_1\}} \right. \\ \left. + C'_n \frac{\sinh\{(2n+1)(\lambda-\xi)/n_2\}}{n_2 \cosh\{(2n+1)\lambda/n_2\}} \right\} \sin_{(2n+1)\eta} \quad (59) \end{aligned}$$

Transverse edge free

It is found that

$$\left. \begin{aligned} C_n &= \frac{(-1)^n 4K \sigma_e}{(2n+1) \pi e} \left( \frac{n_1 \tanh\{(2n+1)\lambda/n_2\}}{n_1 \tanh\{(2n+1)\lambda/n_2\} - n_2 \tanh\{(2n+1)\lambda/n_1\}} \right) \\ C'_n &= \frac{-(-1)^n 4K \sigma_e}{(2n+1) \pi e} \left( \frac{n_2 \tanh\{(2n+1)\lambda/n_1\}}{n_1 \tanh\{(2n+1)\lambda/n_2\} - n_2 \tanh\{(2n+1)\lambda/n_1\}} \right) \end{aligned} \right\} \quad (60)$$

Transverse edge supported

It is found that  $C_n$  and  $C_n'$  are given by equation (42).

It does not appear possible to obtain closed forms for either of these cases.

APPENDIX III

Stress distribution in an infinitely long panel bounded by constant area edge members

If the panel is bounded by constant area edge members loaded only at their ends the boundary condition along the longitudinal edges corresponding to the first part of equation (1) is replaced by the equilibrium condition

$$t \tau_{xy} \pm F \frac{\partial \sigma_x}{\partial x} = 0 \quad (61)$$

This condition will be satisfied by introducing a stress function similar to that of equation (28) with  $(2n + 1)\pi/2$  replaced by  $r_n$ , for this gives the stress resultants in the form:

$$\bar{\sigma}_x = 2B - \sum_n \left\{ C_n e^{-r_n x/bn_1} + C'_n e^{-r_n x/bn_2} \right\} \cos r_n y/b \quad (62)$$

$$\bar{\sigma}_y = \sum_n \left\{ \frac{C_n}{n_1} e^{-r_n x/bn_1} + \frac{C'_n}{n_2} e^{-r_n x/bn_2} \right\} \cos r_n y/b \quad (63)$$

$$\tau_{xy} = - \sum_n \left\{ \frac{C_n}{n_1} e^{-r_n x/bn_1} + \frac{C'_n}{n_2} e^{-r_n x/bn_2} \right\} \sin r_n y/b \quad (64)$$

and equation (64) becomes, on dividing by  $\left\{ \frac{C_n}{n_1} e^{-r_n x/bn_1} + \frac{C'_n}{n_2} e^{-r_n x/bn_2} \right\}$ :

$$t \sin r_n + \frac{F e r_n}{Kb} \cos r_n = 0 \quad (65)$$

which is satisfied because of the definition of the  $r_n$  terms. The boundary condition represented by the second part of equation (1) will not now be completely satisfied, but the effect on the stress distribution is negligible.

From generalised Fourier analysis

$$\sum_n \left( \frac{-2(1+\rho) \cos r_n}{\rho + \cos^2 r_n} \right) \cos \frac{r_n y}{b} = 1 \quad (66)$$

so that the condition that  $\bar{\sigma}_x$  vanishes along the transverse edge is:

RESTRICTED

Report No. Structures 162

$$C_n + C_n' = \frac{-2K \sigma_{e,o} (1+\rho) \cos r_n}{\epsilon (\rho + \cos^2 r_n)} \quad (67)$$

If the transverse edge is free

$$\frac{C_n}{n_1} + \frac{C_n'}{n_2} = 0 \quad (68)$$

and if the transverse edge is supported

$$\frac{C_n}{n_1^2} + \frac{C_n'}{n_2^2} = 0 \quad (69)$$

If  $C_n$  and  $C_n'$  are solved for equations (67) and (68), or (67) and (69), and substituted in equations (62)-(64) the problem is formally solved.

Plain sheet

The case when the sheet is unreinforced and the transverse edge is free is of interest. It is found that the stresses are then given by:

$$\frac{\sigma_x}{\sigma_{e,o}} = \frac{1}{1+\rho} - 2\rho \sum_n \frac{\sin r_n (1 + r_n x/b) e^{-r_n x/b} \cos (r_n y/b)}{r_n (\rho + \cos^2 r_n)} \quad (70)$$

$$\frac{\sigma_y}{\sigma_{e,o}} = -2\rho \sum_n \frac{\sin r_n (1 - r_n x/b) e^{-r_n x/b} \cos (r_n y/b)}{r_n (\rho + \cos^2 r_n)} \quad (71)$$

$$\frac{\tau_{xy}}{\sigma_{e,o}} = \frac{2\rho x}{b} \sum_n \frac{\sin r_n e^{-r_n x/b} \sin (r_n y/b)}{\rho + \cos^2 r_n} \quad (72)$$

Contours of constant  $\sigma_x/\sigma_{e,o}$  are plotted in Figures 6, 7, 8 for values of  $\frac{1}{\rho}$  equal to  $\frac{1}{2}$ , 1 and 2. The maximum value of  $\tau_{xy}$  is

$$\frac{2}{\pi} \sigma_{e,o}$$

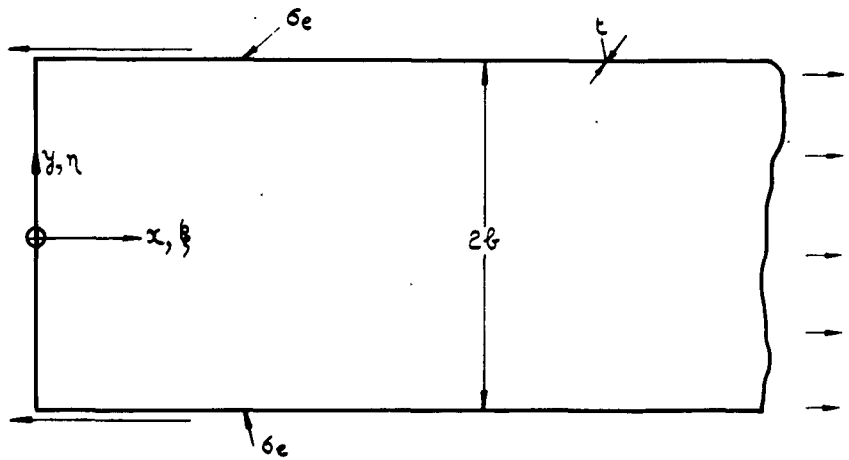
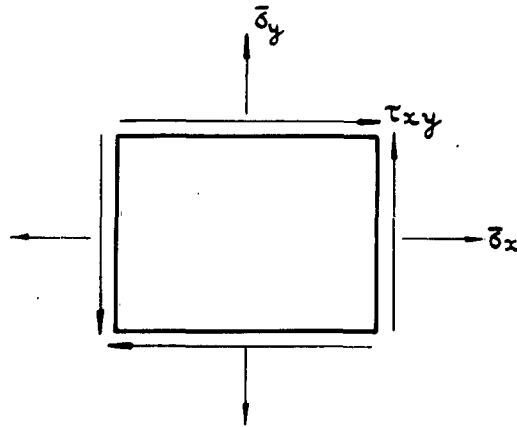


FIG. I. FIGURE SHOWING NOTATION.

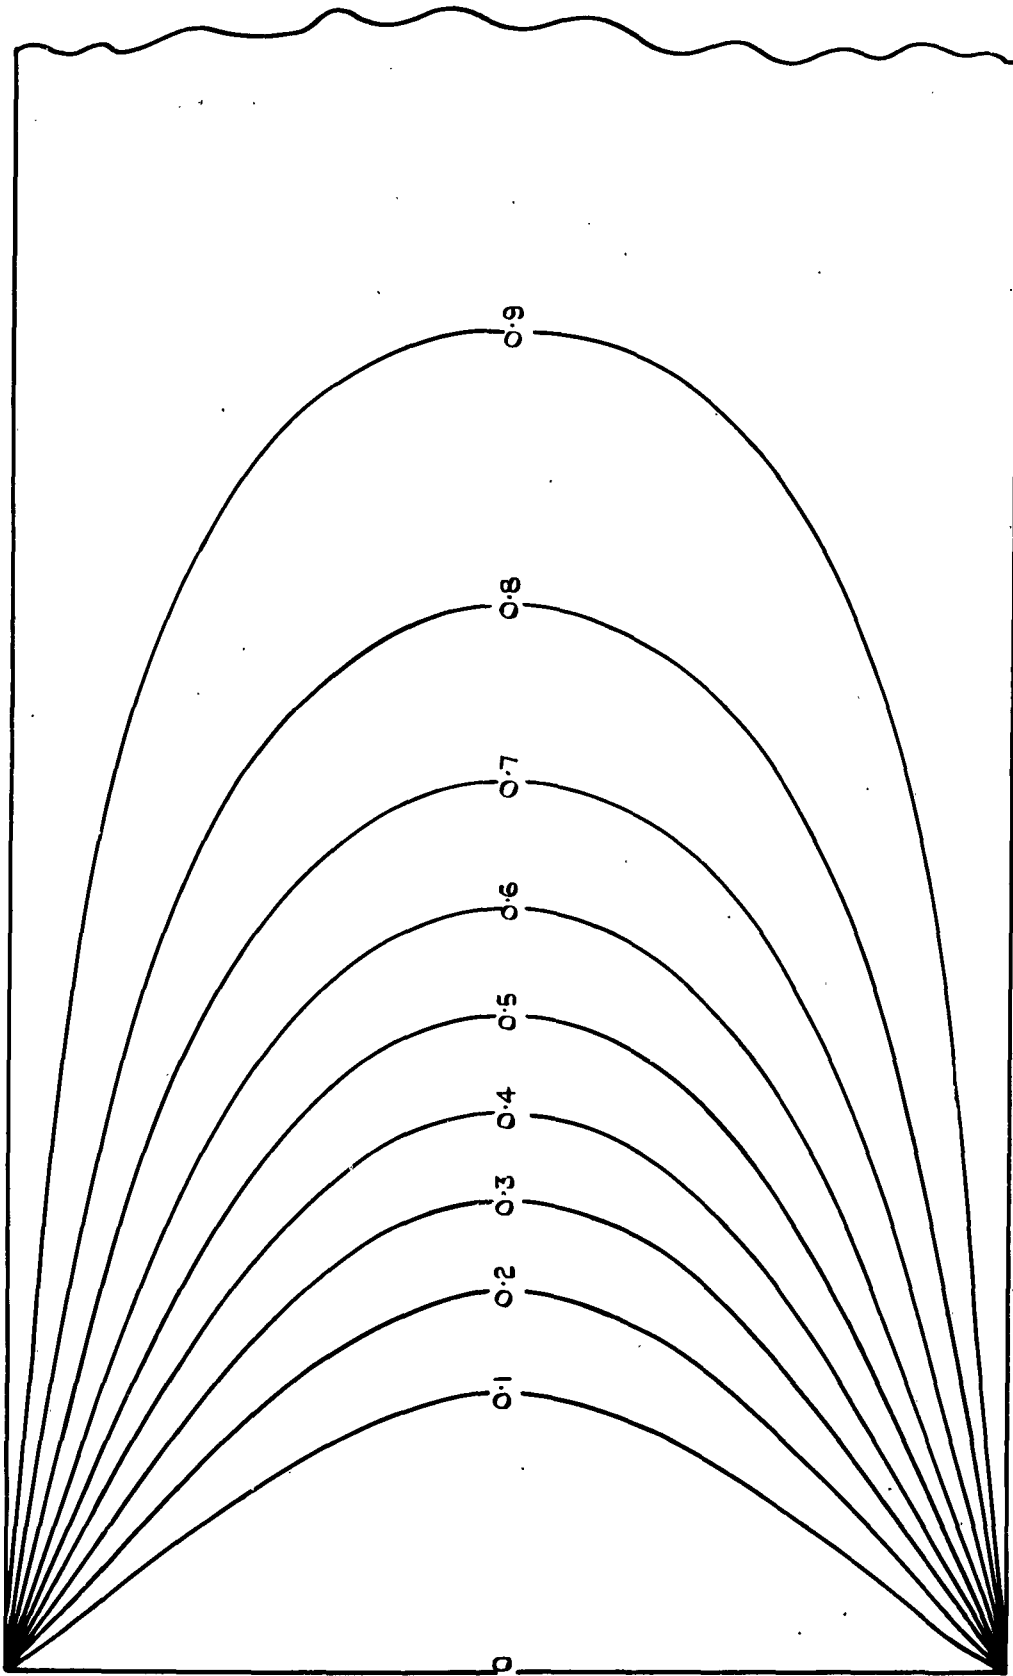


FIG. 2. CONTOURS OF CONSTANT  $6x / 6e$ .

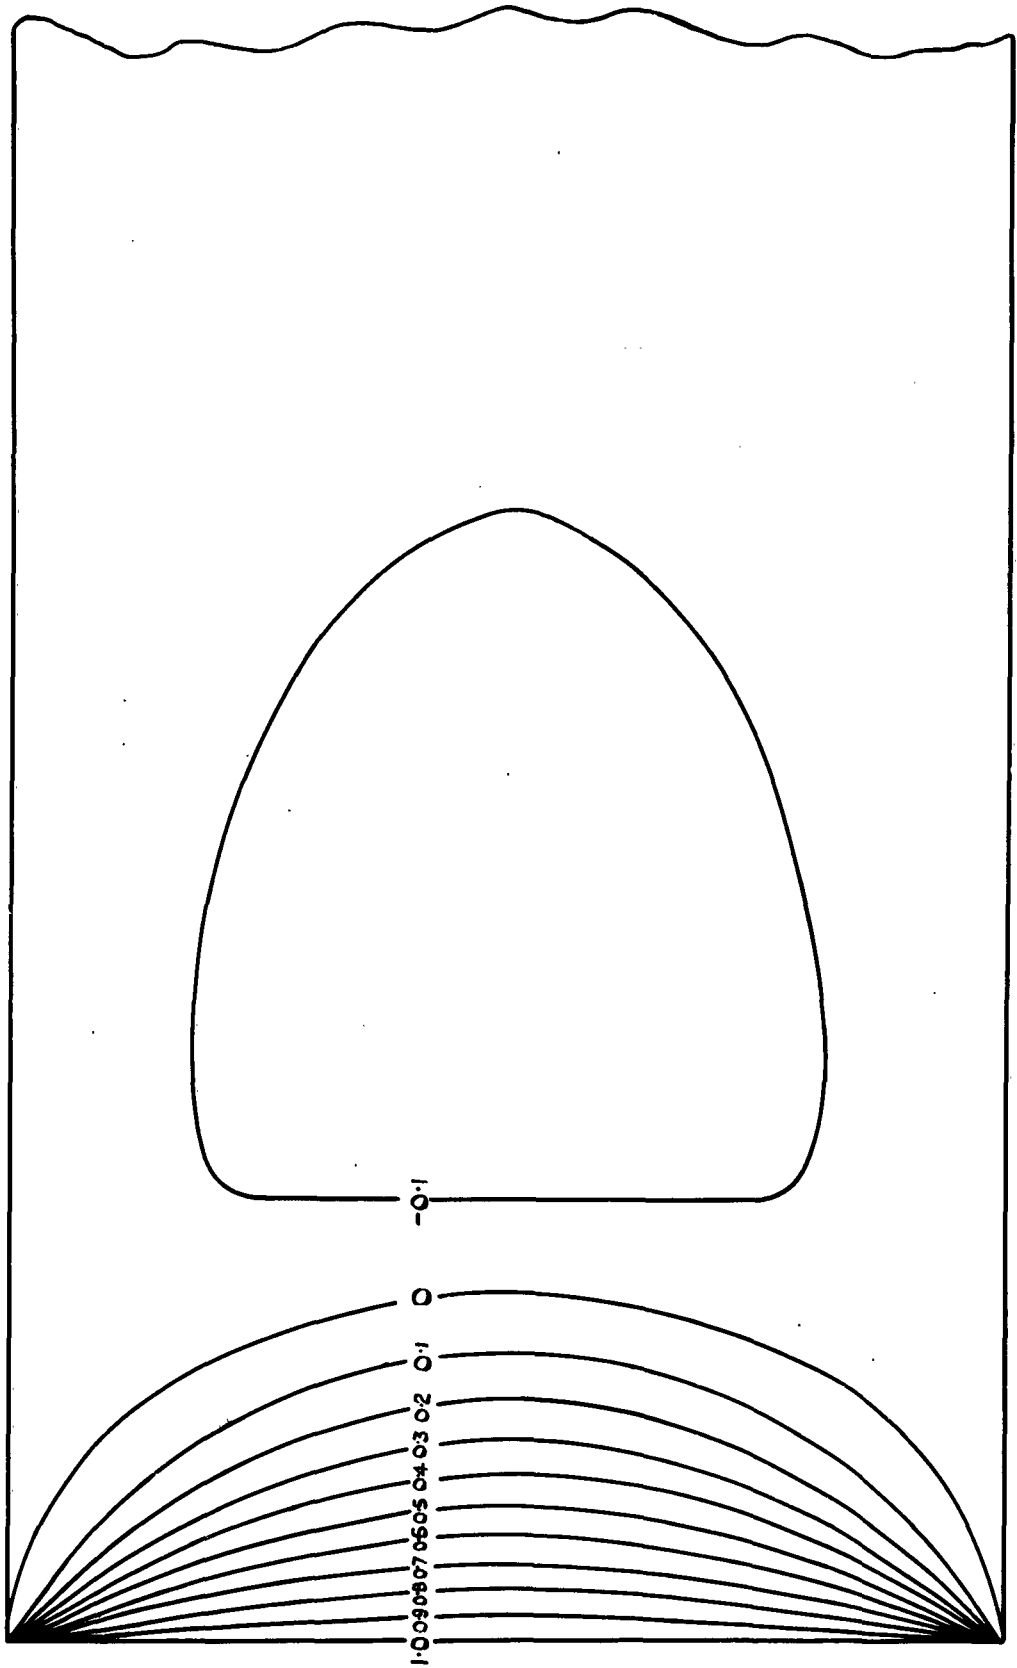


FIG. 3 CONTOURS OF CONSTANT —  $\sigma_y / 6e$

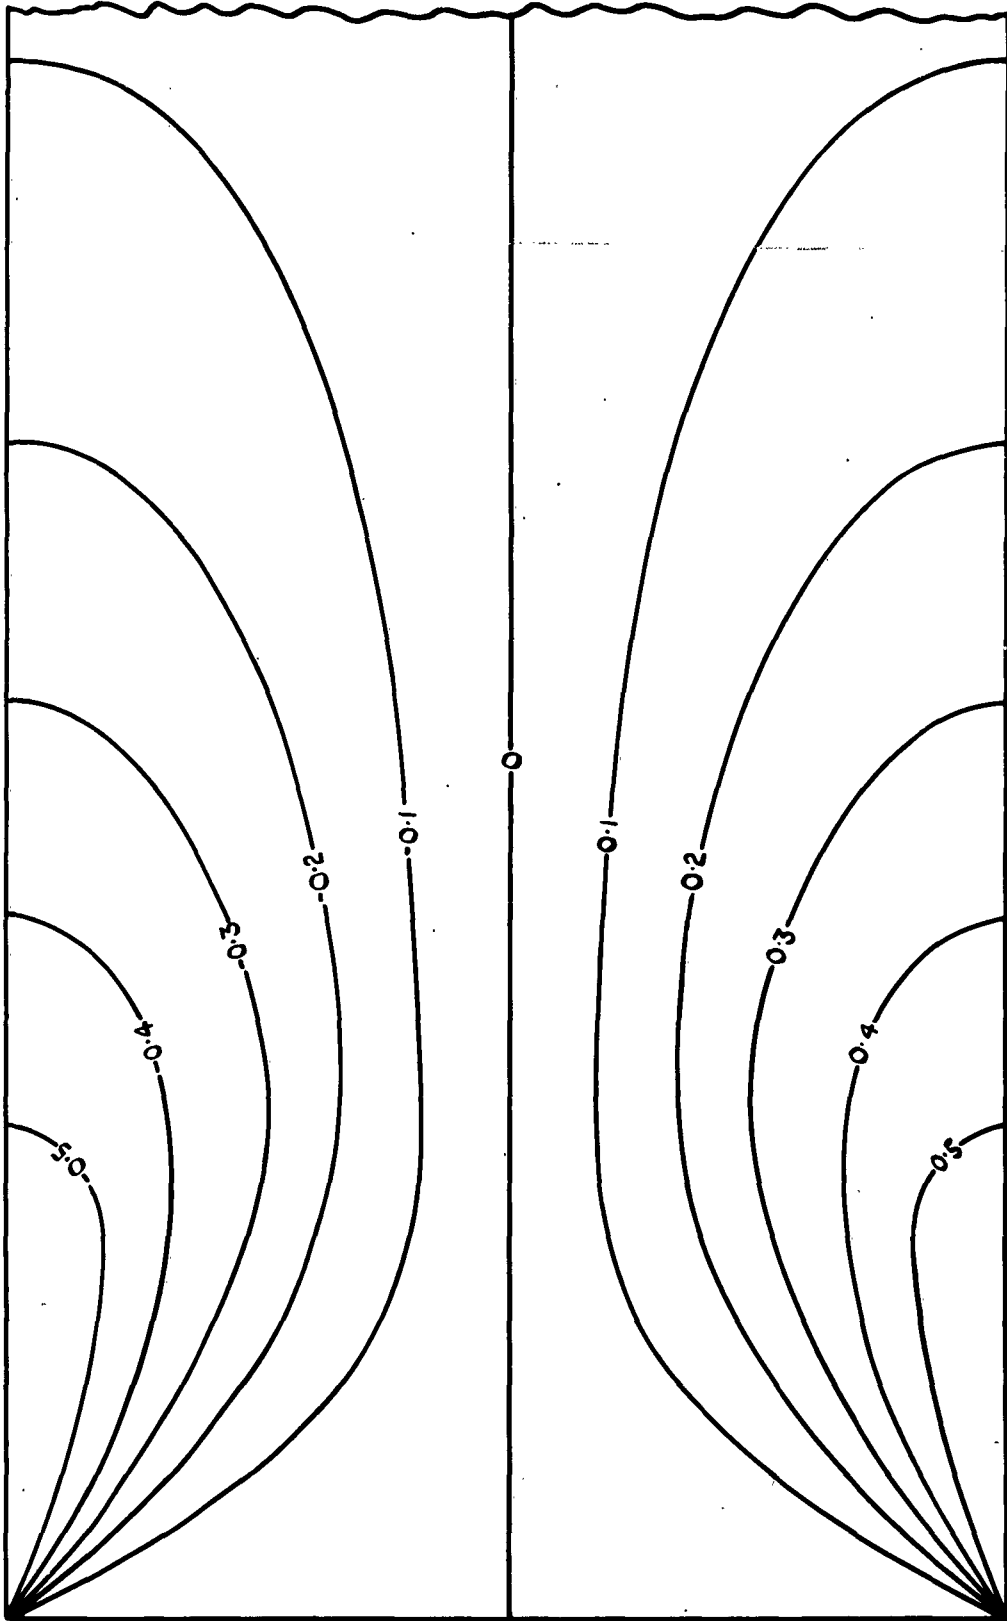


FIG.4 CONTOURS OF CONSTANT  $\tau_{xy}/6e$ .

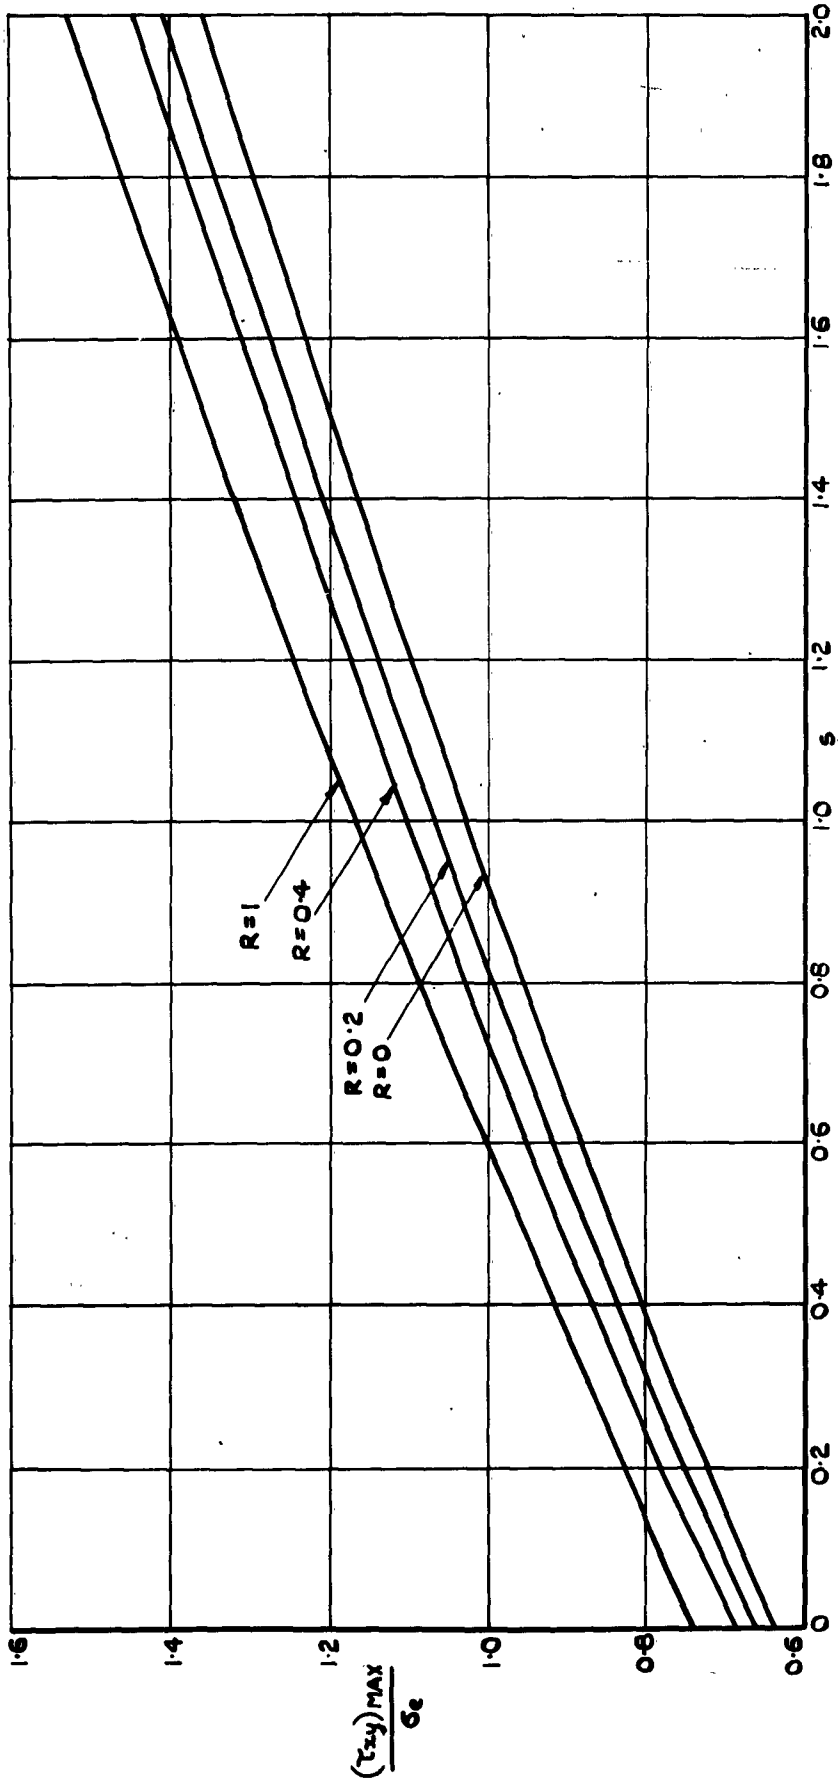


FIG. 5. PEAK SHEAR STRESSES IN REINFORCED SHEET.

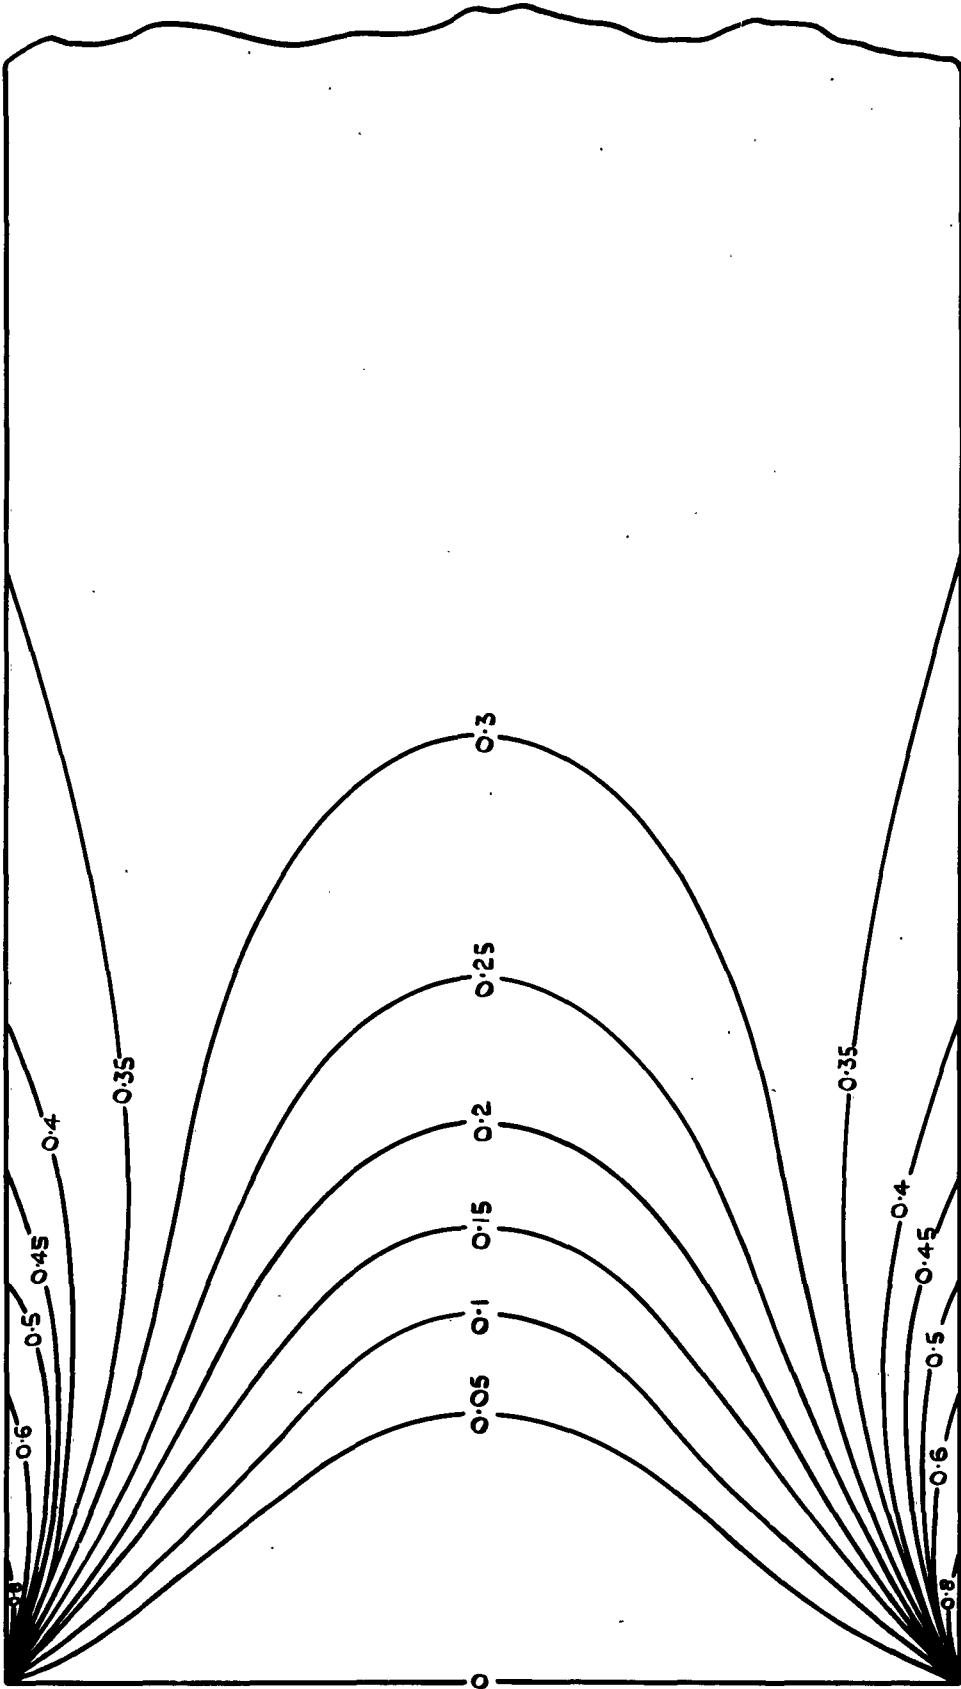


FIG. 6. CONTOURS OF CONSTANT  $6x / 6e,0 : F = \frac{1}{2} t.$

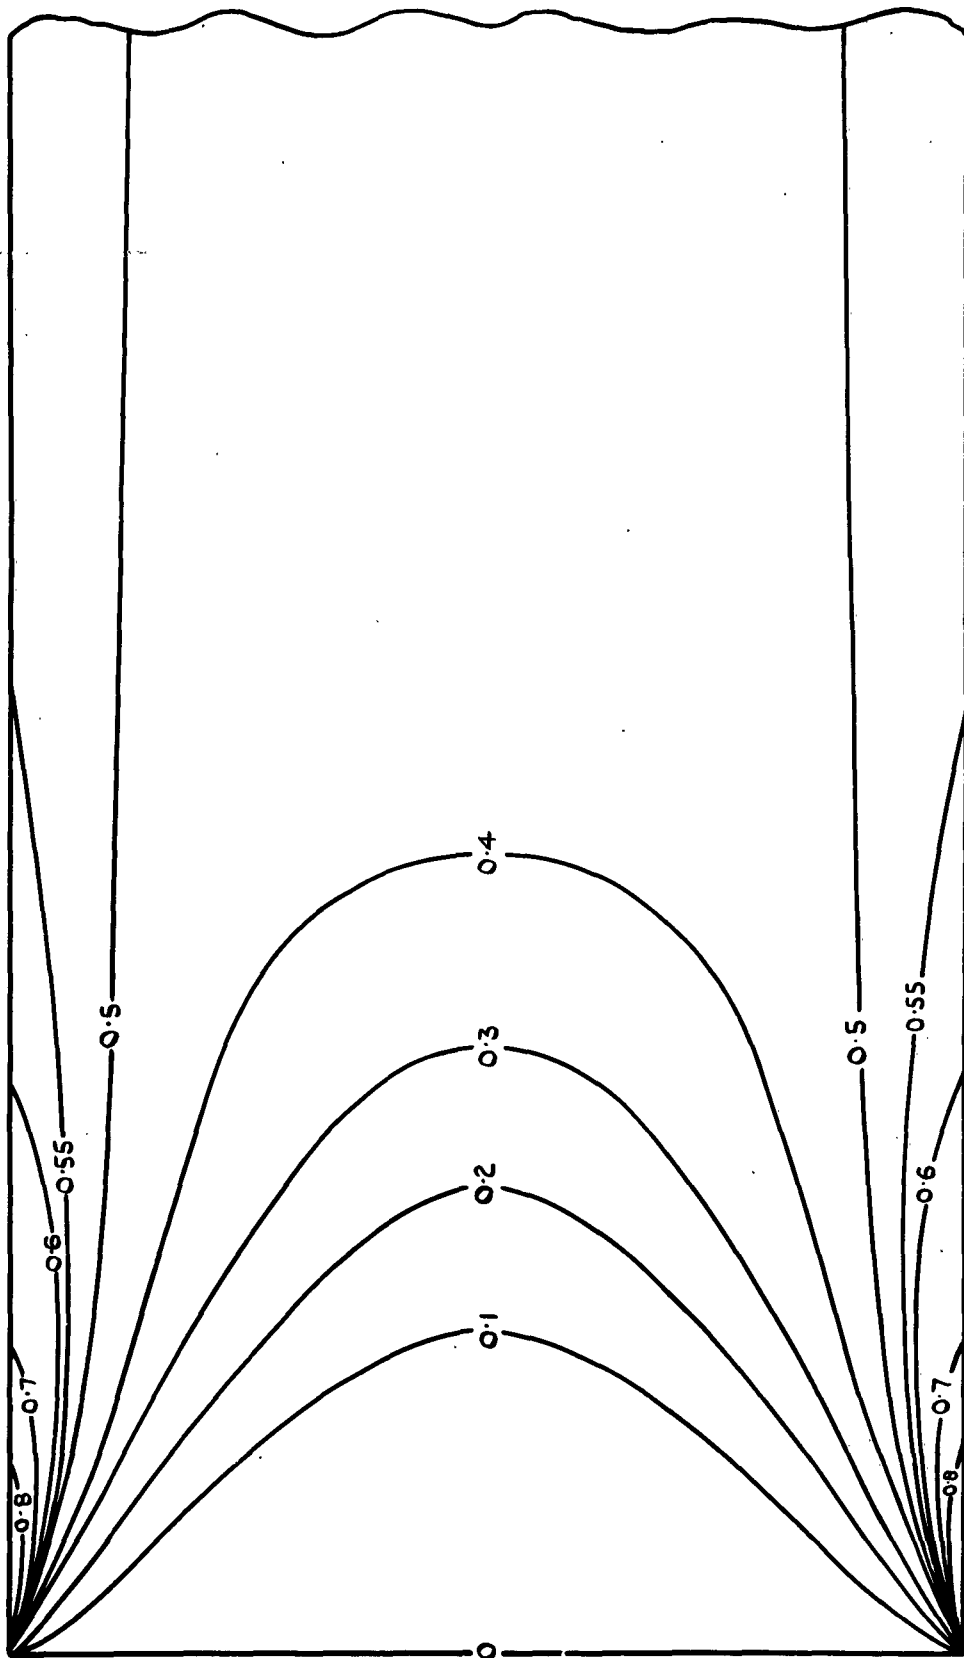


FIG. 7. CONTOURS OF CONSTANT  $\sigma_x / \sigma_{e,0} : F = 1$ .

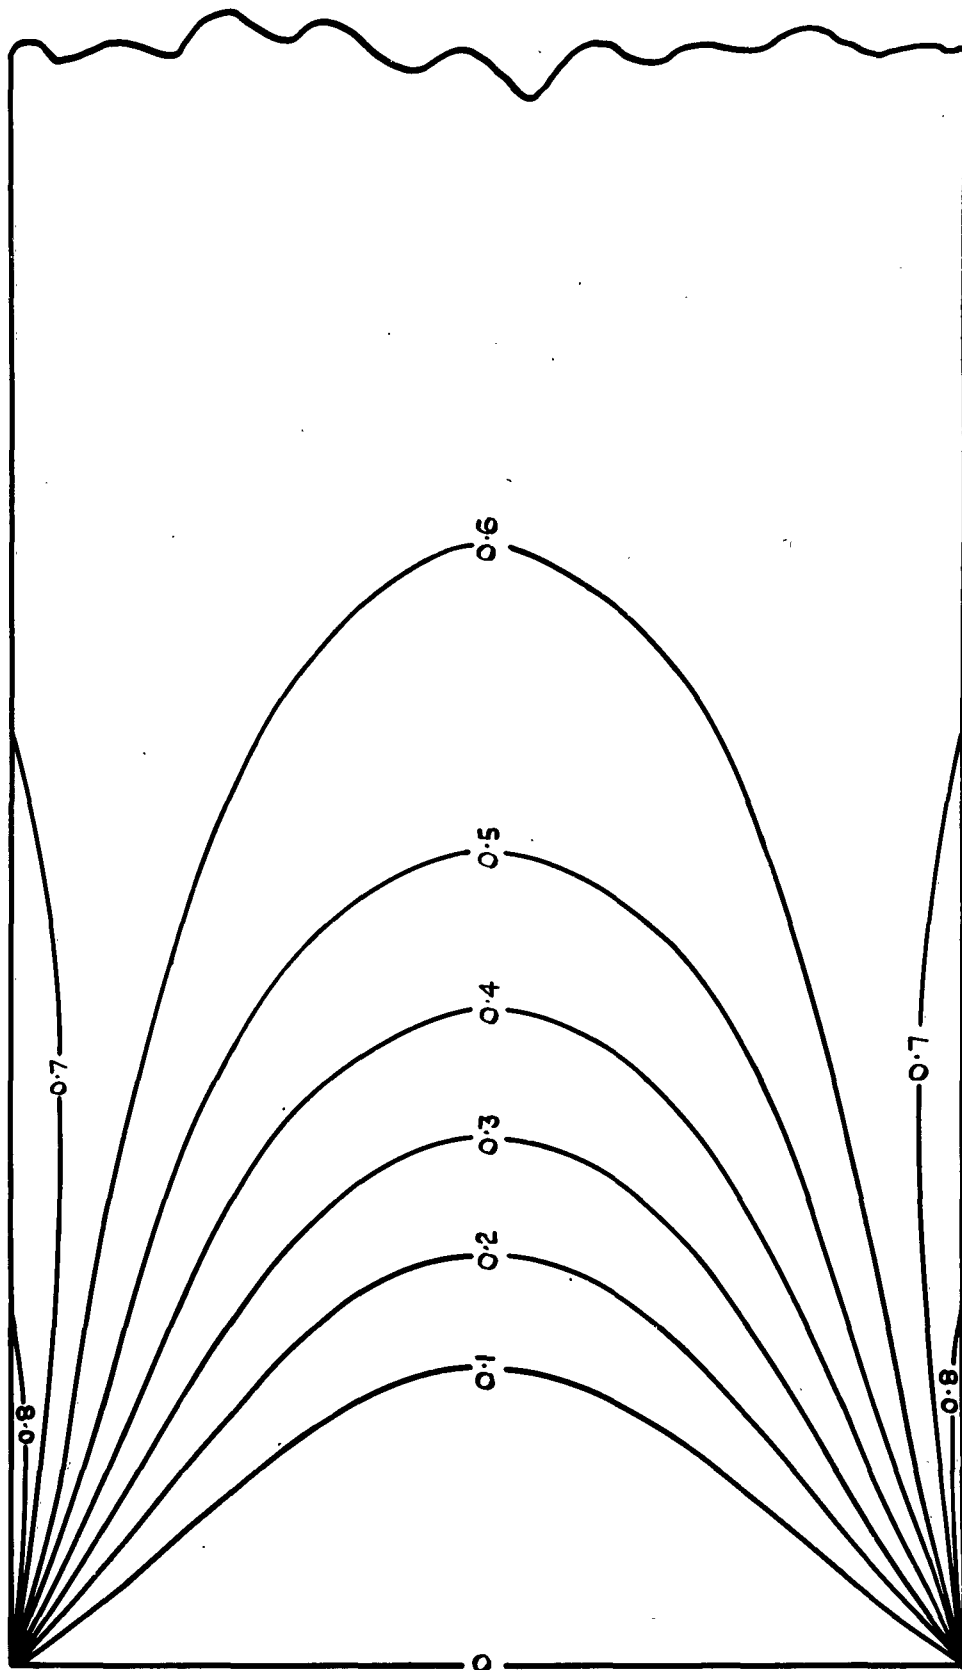


FIG. 8. CONTOURS OF CONSTANT  $6_x/6_{e_0}:F = 2 \& t.$

DETACHABLE ABSTRACT CARDS

These abstract cards are inserted in R/E Reports and Technical Notes for the convenience of Librarians and others who need to maintain an Information Index.

Detached cards are subject to the same Security Regulations as the parent document, and a record of their location should be made on the inside of the back cover of the parent document.

<p>RESTRICTED</p> <p>Royal Aircraft Est. Report Structures 162 1954.1 Mansfield, E.H.</p> <p>THE STRESS DISTRIBUTION IN PANELS BOUNDED BY CONSTANT STRESS EDGE MEMBERS</p> <p>Exact solutions are given for the stress distributions in long panels bounded by constant stress edge members. The influence of closely spaced stringers and ribs on the peak shear stresses is investigated.</p> <p>RESTRICTED</p>	<p>RESTRICTED</p> <p>Royal Aircraft Est. Report Structures 162 1954.1 Mansfield, E.H.</p> <p>THE STRESS DISTRIBUTION IN PANELS BOUNDED BY CONSTANT STRESS EDGE MEMBERS</p> <p>Exact solutions are given for the stress distributions in long panels bounded by constant stress edge members. The influence of closely spaced stringers and ribs on the peak shear stresses is investigated.</p> <p>RESTRICTED</p>
<p>RESTRICTED</p> <p>Royal Aircraft Est. Report Structures 162 1954.1 Mansfield, E.H.</p> <p>THE STRESS DISTRIBUTION IN PANELS BOUNDED BY CONSTANT STRESS EDGE MEMBERS</p> <p>Exact solutions are given for the stress distributions in long panels bounded by constant stress edge members. The influence of closely spaced stringers and ribs on the peak shear stresses is investigated.</p> <p>RESTRICTED</p>	<p>RESTRICTED</p> <p>Royal Aircraft Est. Report Structures 162 1954.1 Mansfield, E.H.</p> <p>THE STRESS DISTRIBUTION IN PANELS BOUNDED BY CONSTANT STRESS EDGE MEMBERS</p> <p>Exact solutions are given for the stress distributions in long panels bounded by constant stress edge members. The influence of closely spaced stringers and ribs on the peak shear stresses is investigated.</p> <p>RESTRICTED</p>



*Information Centre  
Knowledge Services*  
**[dstl]** *Porton Down*  
*Salisbury*  
*Wiltshire*  
*SP4 0JQ*  
*22060-6218*  
*Tel: 01980-613753*  
*Fax 01980-613970*

Defense Technical Information Center (DTIC)  
8725 John J. Kingman Road, Suit 0944  
Fort Belvoir, VA 22060-6218  
U.S.A.

AD#: AD029099

Date of Search: 30 July 2008

Record Summary: AVIA 6/20158

Title: Stress distribution in panels bounded by constant stress edge members  
Availability Open Document, Open Description, Normal Closure before FOI Act: 30 years  
Former reference (Department) REPORTS STRUCT 162  
Held by The National Archives, Kew

This document is now available at the National Archives, Kew, Surrey, United Kingdom.

DTIC has checked the National Archives Catalogue website (<http://www.nationalarchives.gov.uk>) and found the document is available and releasable to the public.

Access to UK public records is governed by statute, namely the Public Records Act, 1958, and the Public Records Act, 1967. The document has been released under the 30 year rule. (The vast majority of records selected for permanent preservation are made available to the public when they are 30 years old. This is commonly referred to as the 30 year rule and was established by the Public Records Act of 1967).

**This document may be treated as UNLIMITED.**