

UNCLASSIFIED

AD NUMBER
AD030122
NEW LIMITATION CHANGE
TO Approved for public release, distribution unlimited
FROM Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; 04 MAY 1954. Other requests shall be referred to National Aeronautics and Space Administration, Washington, DC.
AUTHORITY
NASA TR Server website

THIS PAGE IS UNCLASSIFIED

Armed Services Technical Information Agency

Because of our limited supply, you are requested to return this copy **WHEN IT HAS SERVED YOUR PURPOSE** so that it may be made available to other requesters. Your cooperation will be appreciated.

AD

30122

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

Reproduced by
DOCUMENT SERVICE CENTER
KNOTT BUILDING, DAYTON, 2, OHIO

UNCLASSIFIED

NACA RM E54B19

AD No 2072
ASTIA FILE COPY



RESEARCH MEMORANDUM

VARIATION OF SPONTANEOUS IGNITION DELAYS WITH TEMPERATURE
AND COMPOSITION FOR PROPANE-OXYGEN-NITROGEN MIXTURES
AT ATMOSPHERIC PRESSURE

By Joseph L. Jackson and Richard S. Brokaw

Lewis Flight Propulsion Laboratory
Cleveland, Ohio

NATIONAL ADVISORY COMMITTEE
FOR AERONAUTICS

WASHINGTON
May 4, 1954

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

RESEARCH MEMORANDUM

VARIATION OF SPONTANEOUS IGNITION DELAYS WITH TEMPERATURE
 AND COMPOSITION FOR PROPANE-OXYGEN-NITROGEN MIXTURES AT
 ATMOSPHERIC PRESSURE

By Joseph L. Jackson and Richard S. Brokaw

SUMMARY

The ignition delays of propane-oxygen-nitrogen mixtures as a function of temperature and composition have been determined in a flow system. The variation of the ignition lag τ at constant temperature can be represented by the equation

$$1/\tau = k [C_3H_8] [O_2]^{1/4}$$

where k is a constant. The temperature dependence of this equation over the range investigated (525° to 740° C) is given within 30 percent by the empirical equation:

$$\tau [C_3H_8] [O_2]^{1/4} = 0.030 + 5.4 \times 10^{-9} e^{14,500/T}$$

with concentrations expressed as mole fractions and temperature as degrees Kelvin.

INTRODUCTION

Spontaneous ignition processes manifest themselves in many reactions that are studied under the general classification of combustion. These processes may be deleterious, as when they produce preignition in a reciprocating engine or create fires in the storing and handling of combustible materials, or they can be beneficial by serving as the ignition source in a diesel engine or promoting smoother burning in a turbojet combustor. Some of the thermal theories of flame propagation propose that a flame is propagated by virtue of continuous spontaneous ignition occurring on the leading edge of the flame front. In any combustion process where self-ignition can occur, the time lapse before the flame appears is an important factor. Since the time delay of ignition is an

inverse measure of the rate at which the reaction proceeds, a study of the factors influencing the delays may provide information on the kinetics and mechanism that prevail in the ignition process. This paper reports a study of the effect of temperature and fuel-oxidant ratio on the ignition lag of propane.

One of the earliest and perhaps simplest types of apparatus for spontaneous ignition work is the "drop method", a modification of which has been chosen as the A.S.T.M. standard for the determination of auto-genous ignition temperatures (ref. 1). This test determines the lowest temperature of an air-filled cavity that will cause ignition when drops of liquid fuel are introduced into it, with delays measured by a stop watch. The results obtained by this method are markedly affected by the size and shape of the cavity. A fuel-concentration gradient exists from the bottom of the vessel, where evaporation takes place, to the opening at the top where dilution with the ambient air occurs, while the temperature may vary in like manner throughout the region. Although no strict control of fuel-air ratio can be exercised, it was found in previous work (ref. 2) that the amount of fuel generally has to be increased to obtain ignition as the temperature is lowered. A calculation of the fuel concentration from the size of the ignition vessel and the number of drops of fuel indicates a mixture which may contain over 50 percent fuel at the minimum spontaneous ignition temperature.

With the aim of a better understanding of the combustion processes in a reciprocating engine, several workers designed systems to determine ignition temperatures and lags in rapid-compression machines. Much of the work by this method was done at high pressure, with special emphasis on conditions which produce cool flames and zones of nonignition. Dixon and Crofts (ref. 3) reported that the ignition temperature of hydrogen-air mixtures steadily increases with fuel concentration, while Jost (ref. 4) reported that the lag of the first region is relatively independent of fuel concentration for heptane-air mixtures. More recent experiments, with isooctane (ref. 5), show minimum delays for stoichiometric compositions. In this type of apparatus, independent control of temperature and pressure is difficult and the temperature and the pressure at which ignition occurs may be quite different from those at which the initiating reaction begins.

Work has been done in constant-volume or constant-pressure systems, where premixed gases are admitted to heated vessels. The results of different investigators are in many cases contradictory. For example, in the book by Jost (ref. 6), a curve by Prettre on page 39 shows a minimum in the ignition temperature - composition plot for CO-air mixtures at about 25 percent fuel, while a curve by Bloch on page 41 gives a minimum at about 70 percent CO. In the summary table on page 45 of this reference, it is noted that lower temperatures are generally reported for richer mixtures of hydrocarbons, although Mason and Wheeler (ref. 7)

reported that a minimum temperature for methane-air mixtures was found at about 5 percent methane. Newitt and Thornes (ref. 8) found that the maximum rate of oxidation as measured by the rate of pressure increase in the ignition of propane was at about 55 volume percent fuel in oxygen.

In order to allow the combustibles to be preheated separately to the desired temperature, various flow systems have been employed. Dixon (ref. 9) used two concentric tubes with fuel flowing through the inner section and air or oxygen passing through the annulus. Heating was accomplished by winding resistance wire around the outside of the inner tube. With this type of apparatus Dykstra and Edgar (ref. 10) found a lowering of the ignition temperature with increasing fuel concentration for gasolines or octanes. On the other hand, for very lean mixtures Mullins (ref. 11) observed no effect of fuel concentration on the ignition lag when fuel was injected from a small port in the center of a large duct of heated air. In the work of Olson (ref. 12), where an attempt at rapid mixing was made, a definite shortening of the ignition lag with increasing heptane concentrations was noted.

The program reported in the present paper was started in an attempt to clarify the effect of fuel concentration on the ignition lag in particular, and with the hope of elucidating the chemistry of the ignition reaction. The initial results reported were run with propane-oxygen-nitrogen mixtures at atmospheric pressure and at temperatures from 525° to 740° C. A flow system has been chosen because it permits control of temperature and pressure from the time of mixture preparation until ignition occurs.

The reactants were preheated separately and were mixed at the desired temperature in a time very much shorter than the ignition lag. The reaction chamber was a 3-foot length of 25- or 50-millimeter Vycor tubing. Runs were made with 9.5, 20.9, and 39.5 percent oxygen in the oxygen-nitrogen mixtures with a wide range of fuel percentages.

APPARATUS AND PROCEDURE

For this research, an apparatus was desired which would accomplish the following:

- (1) Preheat the gases, air, and combustibles separately to any predetermined temperature
- (2) Mix the gases at this temperature in a time very much shorter than the ignition lag
- (3) Provide a reaction volume with the predetermined temperature constant throughout the region where ignition can result
- (4) Permit complete control over the fuel-air ratio

3235

CI-1 back

These requirements dictated a flow system; since none of the apparatus reported in the literature met these specifications, a new setup was designed, as shown in the schematic sketch of figure 1.

Fuel was supplied from a cylinder through a pressure regulator to a critical flow orifice. The size of the orifice and upstream pressure determined the flow rate. A three-way solenoid valve located just ahead of the test section normally by-passed into the exhaust line. When the valve was energized, the fuel was diverted into the mixer.

Air was supplied from the laboratory line through a pressure regulator and critical flow orifices to another three-way solenoid. This valve normally passed the air to the mixing chamber but exhausted into the room when energized. The air line could also be connected to cylinders containing various oxygen-nitrogen mixtures.

A drawing of the mixer is given in figure 2. Fuel and air were supplied to separate concentric chambers where temperature equilibrium was established with the system. The 16 holes drilled tangentially into the small inner cup were connected alternately with the two chambers. This inner cup was fitted with a thermocouple and had a volume of about 1 cubic centimeter. The temperature of the unit was controlled with a heating element and variable transformer.

From the inner cup the gases passed through a 3/16-inch hole and expanded to the wall of the tube through a diffuser fitted with 200-mesh stainless-steel screens to remove the swirl. The ignition zone consisted of a 25- or 50-millimeter Vycor tube 36 inches long (see fig. 1). The exhaust fitting at the top of the unit contained a movable thermocouple probe to check the temperature axially through the reaction volume. A constant temperature throughout the reaction volume was accomplished by wrapping resistance heaters in ascending sections on a metal tube surrounding the Vycor. Each section was individually controlled by a variable-voltage transformer. The original design had viewing windows in the outer insulating jacket and 3/4-inch slits on the metal tube which permitted visual observation to provide added information about phenomena occurring in the reaction chamber. Metal-to-glass seals were formed with compression fittings utilizing asbestos and talc as a packing medium at the mixer and exhaust couplings. Several runs were made with this feature to observe the ignition and subsequent events. However, it was decided to forego this feature in favor of a positive seal between the reaction vessel and the surroundings. This modification entailed the replacement of the metal tube by one without the viewing slits. The seals at the mixer and exhaust sections were then made with soft copper gaskets. Figure 2 shows this arrangement as well as the nozzle and screen adapters connecting the swirl cup to the 25- or 50-millimeter Vycor tubes. It was now possible to change the tube sizes without removing the insulating jacket. The results obtained were the same with either arrangement, suggesting that no appreciable leakage through the metal-to-glass seal occurred.

The bulk of the heat required was supplied by air from a 25-kilowatt electric heater. This air was injected upwards from a ring at the bottom of the chamber between the ignition tube and the insulating jacket (fig. 1) and exhausted by a collector ring at the top. The heating elements on the metal tube were adjusted to remove any temperature gradients. The pressure in the heating chamber was kept equal to that in the ignition section (atmospheric). The unit required 2 to 3 hours to establish a desired temperature in the mixer and throughout the reaction volume, but once established, it did not drift with time.

3235

Ignition lags were measured by a photocell relay and electric timer or by a pressure recorder. When an ignition was indicated by both units, the results were identical. If the flame-to-background light intensity ratio was low (weak flames, or high-temperature operation), the photocell sometimes failed to indicate; whereas, the pressure recorder always responded. With either system, the timing cycle was started automatically on introduction of a combustible mixture into the mixer. Only the pressure recorder could be used after modification of the apparatus. In general, lags were reproducible within about ± 5 percent.

The customary procedure was to set the air flow through the burner while bypassing the fuel to the exhaust. When constant-temperature conditions were reached, as indicated by the movable thermocouple probe, the fuel solenoid was energized, which diverted the flow to the mixer and started the electric timer and the recorder time-indicator. When the flame or pressure pulse appeared, the fuel valve was de-energized and the ignition delay recorded. Three or four runs were made before the fuel-air ratio was changed. A constant total flow of mixture was usually maintained for all points at a given temperature unless the delay time changed sufficiently to require a change in flow rate in order to keep the ignition within the center two thirds of the tube length.

The electrical connections were later changed to permit alternate procedures to be used. The first modification allowed the introduction of air into fuel rather than fuel into air. With either of these methods, a fuel-oxygen gradient existed within the interfacial region. In order to eliminate this concentration gradient, the second modification allowed metered nitrogen to be sent through a solenoid into the mixing cavity. In this way, all oxygen was swept out of the system. A single switch cut off the nitrogen flow, diverted fuel and air into the mixer, and started the time cycle. The fuel-oxygen ratio was thus kept the same in the interface as in the mixture.

RESULTS AND DISCUSSION

Ignition lags observed under a variety of experimental conditions are contained in tables I to IV. In the following sections, the effect of the individual variables on ignition lag will be examined.

Effect of Apparatus Parameters

Flow rate. - Runs in which ignition lags were determined at varying flow rates are contained in tables I and II. Results of a typical series of experiments are graphed in figure 3, and it is seen that the position of the minimum in the lag - flow rate plot shifts toward higher flow rates for richer mixtures. Investigations in which temperatures and tube size were varied suggested that these parameters do not affect the volumetric flow rate giving minimum lag.

Tube size. - Under comparable conditions of volumetric flow rate, fuel-air ratio, and temperature, lags observed in the 25-millimeter tube were on the average very slightly higher than in the 50-millimeter tube (e.g., see fig. 3). However, this difference was well within the experimental error, and in many cases the order was reversed. In obtaining the data of tables III and IV, an attempt was made to select flow rates such that the position of the ignition (as calculated from flow rate and ignition lag) was in the central two thirds of the tube. For the 50-millimeter tube, these conditions corresponded closely to the flow rates for minimum induction period; however, in the 25-millimeter tube, somewhat lower flows were employed and lags were correspondingly longer.

Mode of introduction of reactants. - As described in the experimental section, the apparatus was designed to permit introduction of fuel and air to the reaction tube in three different ways. Figure 4 shows typical pressure-time traces obtained by these methods; ignition is indicated by the first sharp rise in pressure. For some of the richer mixtures pressure pulses were very weak, so the recorder was used at maximum gain, as indicated in the figure.

In the first procedure, which was employed in all the runs of tables I to IV, the desired air flow through the ignition tube was first established. Next, propane was introduced, and the time required for appearance of a flame was determined. In this method the interfacial region between the leading air and the following fuel-air mixture must contain mixtures of all fuel-air ratios leaner than the one under investigation. Should any leaner mixture have a shorter lag, a spurious result might be obtained. Since richer mixtures had shorter lags by this method (see pressure-time traces of fig. 4), it was felt that the measurements were meaningful. However, to verify this point, a few experiments were performed with the order of air and fuel introduction reversed.

When the propane precedes the air, the interfacial region contains mixtures of higher fuel-air ratio only. If, as suggested previously, richer compositions have shorter delays, lags determined by this procedure (fuel lead) might be expected to correspond to the shortest lags measured in the alternate manner (air lead). In most cases, it was

3235 impossible to make delay measurements when the fuel-lead method was employed, since there was no sharp appearance of flame or pressure pulse marking ignition (e.g., see fig. 4; propane lead, 20 and 30 percent). At fuel concentrations above 30 percent, no flames were observed, although a definite temperature rise at the top of the tube indicated that some reaction was taking place. With less fuel in the final mixture, a luminous zone appeared shortly after air admission which became more distinct as the interface passed up the tube (and the region near the mixer became leaner) until finally a well defined flame was formed. Presumably, the ignition reactions were started before an explosive mixture (that is, a mixture capable of reacting rapidly enough to give a sharp pressure pulse) entered the tube. In a few cases the delay characteristic of the rich region was sufficiently long to permit an explosive mixture to enter the tube during the induction period. In these experiments lags observed were similar to those obtained for richer mixtures by the air-lead method. (See 10-percent, propane-lead experiment of fig. 4.) It appears, then, that the shorter delays observed by the propane-lead method are characteristic of the richer interfacial region rather than of the following fuel-air mixture.

In the third experimental method, a flow of nitrogen preceded both reactants into the tube; propane and air were introduced and the nitrogen was shut off simultaneously. Here fuel-oxidant ratio must be constant through the interface, with nitrogen concentration as the only variable. Lags observed with this technique have been recorded for many of the runs in tables II to IV and it may be seen that, in general, ignition delays were the same as lags obtained by the air-lead method. (Compare also nitrogen and air-lead columns of fig. 4.) Nevertheless, close scrutiny of the data reveals a trend of slightly shorter lags for mixtures leaner than 15 percent fuel, and slightly longer delays at higher propane concentrations. Furthermore, at high flow rates, the nitrogen was not adequately preheated so that some cooling of the system occurred, giving rise to increased lags. However, the generally good agreement between results of the nitrogen and air-lead methods indicates that measurements by the latter technique are characteristic of the mixture rather than the interface.

On the other hand, the nature of the interface has a marked effect on the composition range over which ignition is observable. With an air lead, sharp pressure pulses and flames were noted at all fuel-air ratios, although the violence of the explosion decreased gradually as the propane concentration increased. However, with a nitrogen lead the intensity of the pressure pulse diminished rapidly with increasing fuel content, and, in general, no pulse was detectable when the propane concentration exceeded 40 percent by volume. If the fuel flow was continued after ignition, stationary flames were seated in the tube for mixtures containing as much as 30 percent fuel in air.

These experiments indicate that the rate of the initiating reaction, as measured by the ignition delay, is characteristic of the regions of highest fuel-air ratio, even though a homogeneous mixture of the same fuel concentration may be incapable of supporting a flame. When a flammable mixture exists near a region of very high propane concentration (as in the case of air-lead experiments), it may be ignited by reactions initiated in the richer zone.

The phenomena obtaining in very rich mixtures appear to be analogous to those observed by Prettre (ref. 13) in studying the oxidation of pentane in a static system at 250° to 360° C. Three types of pressure-time curves were observed. One type was characterized by an induction period followed by explosion. In a second type, the induction period preceded an extremely rapid reaction, which did not, however, lead to ignition. Presumably, it was the lag for this type of reaction which was measured in the present investigation in the case of very rich propane mixtures with an air lead. The final type of curve observed by Prettre was one in which rate of pressure rise was slow through the entire course of the reaction.

Inasmuch as the air-lead method gave results comparable to those obtained with the nitrogen lead, it was employed in obtaining the data discussed in the following sections, since sharper indications of ignition were observed by this technique and better temperature control could be maintained at high flow rates (no cooling by the leading gas).

Effect of Propane Concentration

When only fuel-oxidant ratio was varied, ignition lags decreased with increasing propane concentration. Figure 5 shows typical logarithmic plots of ignition lag for propane-air mixtures against volume percent propane at various temperatures in 25- and 50-millimeter tubes. In general, these plots are linear, so that the dependence of ignition delay on propane concentration may be expressed by an equation of the type

$$1/\tau = \text{const} [C_3H_8]^n \quad (1)$$

where

τ the ignition lag, sec

$[C_3H_8]$ propane concentration

n a constant

The slopes of the straight lines (given by n in eq. (1)) lie between the extremes of 0.74 and 1.0, with an average of 0.93. For half the runs, the slopes are unity, and there does not seem to be any trend in the slope variations.

Effect of Oxygen Concentration

In order to determine the dependence of ignition lag on oxygen concentration, delays were obtained for mixtures in which the volume percent of propane was held constant while oxygen-nitrogen mixtures containing 9.5, 20.9 (air), and 39.5 percent oxygen were employed. In figure 6, ignition lag is plotted against $[O_2]/([O_2]+[N_2])$ for four different propane concentrations. It is seen that the dependence of ignition delay on the oxygen content of the oxygen-nitrogen mixture is slight, being somewhat more pronounced at the higher propane percentages. The dependence at constant fuel concentration is given approximately by

$$1/\tau = \text{const } [O_2]^{1/4} \quad (2)$$

where $[O_2]$ is the mole fraction of oxygen in the total mixture, although an equation of the form

$$1/\tau = \text{const } [O_2]/(1 + k[O_2])^2 \quad (2a)$$

where k is a constant describes the results somewhat better, by implying a greater dependence of lag on oxygen concentration in richer mixtures. The constant k has a value of approximately 4 when concentrations are expressed as mole fractions.

Combining equations (1) and (2) results in

$$1/\tau = \text{const } [C_3H_8]^n [O_2]^{1/4} \quad (3)$$

which should apply for variations of both fuel and oxygen concentration. In figure 7 data obtained in a 25-millimeter tube at 666° C are plotted according to equations (1) and (3), and it is seen that the latter equation, which accounts for the effect of varying oxygen concentration, fits the experimental data somewhat better.

Effect of Temperature

Ignition lags decreased with increasing temperature, as might be expected since chemical reaction rates are accelerated as temperature is raised. Data at constant temperature may be fairly well represented by

3235

2-10

equation (3) with the exponent n taken as unity. The effect of temperature on lag is illustrated in figure 8 in which the quantity $\tau [C_3H_8] [O_2]^{1/4}$ is plotted against reciprocal temperature on semi-logarithmic paper. The open symbols refer to the data of tables III and IV; solid symbols are obtained from the shortest lags of tables I and II. The nonlinearity of the plot illustrates the fact that the temperature dependence is not of the simple Arrhenius type with a constant activation energy. In lower-temperature ignition studies, two induction periods are often observed: the first one for the appearance of cool flames, followed by a second time lag to explosion. If the ignition lags observed in this research are also the sum of two delays, then an Arrhenius type of temperature dependence is not to be expected (see, for example, ref. 14). Alternatively, the nonlinearity of figure 8 might be a result of a change in mechanism with changing temperature, or may perhaps be due to some effect of the apparatus.

The mean line of figure 8 is given by the empirical expression

$$\tau [C_3H_8] [O_2]^{1/4} = 0.030 + 5.4 \times 10^{-9} e^{14,500/T} \quad (4)$$

where concentrations are expressed as mole fractions, temperature in degrees Kelvin, and ignition lag in seconds. This equation represents the data within 30 percent.

Interpretation in Terms of Slow Reaction Kinetics





While the slow oxidation of propane has been the subject of considerable research (refs. 8 and 15 to 18), most of this work has been concerned with reaction rates and product analysis. The induction period prior to the onset of rapid reaction has not been closely scrutinized; indeed, in many instances it has been deliberately altered either by the addition of aldehydes or by treatment of vessel walls. The ignition-delay measurements described in this report have been carried out at higher temperatures (525° to 740° C) than can be employed in slow oxidation (280° to 475° C) studies. Kinetic measurements have not been made at higher temperatures since the induction period is followed by explosion in which the reaction proceeds to completion with a considerable temperature rise. Rates are, by present methods, immeasurably high and analysis of final products cannot be expected to yield information on reaction intermediates and thereby the chain of reactions involved in the explosion.

In considering the events leading to the thermal ignition of propane-oxygen-nitrogen mixtures an examination must therefore be made of the reactions proposed to explain the products in the partial oxidation of propane-oxygen mixtures at the highest temperature for which

measurements have been carried out. Satterfield and Wilson (ref. 19) suggest a scheme involving some 20 reactions in order to indicate the origin of all reaction products. The propyl radical is a key intermediate and may react with oxygen in two ways: (1) to form propylene and HO₂, and (2) to form oxygenated organic products. At 375° C, it is suggested that approximately 60 percent of the propyl radical - oxygen reaction proceeds by the first path; at 475° C this increases to 90 percent. For simplicity, then, the second mode of reaction will not be considered significant at the higher temperatures at which ignition lag measurements have been made.

In general, kinetic analysis of explosion phenomena has been concerned with the existence or nonexistence of a finite reaction rate (the steady state). Such considerations serve to define the conditions of temperature, pressure, and so forth under which explosion may occur, that is, the limits for spontaneous inflammation.

The ignition lag, on the other hand, is a measure of the time required to achieve the unsteady state (explosion). The kinetic scheme adopted must therefore be one in which no steady-state solution exists. The following reactions, selected from reference 19, can serve to explain, at least qualitatively, the ignition lags of this report.



In this scheme, the initiating reaction is the only chain-branching step. The propyl and methyl radicals are highly reactive, so that a steady state in these species is assumed. (That is, the rate of production is equal to the rate of destruction.) On the other hand, the HO₂ radical is assumed to be chemically less active, so that its concentration builds up during the induction period. These considerations lead to the following expressions for the rates of change of propane and HO₂ concentration:

3235

back 2-1-CI

$$-\frac{d[C_3H_8]}{dt} = \left(1 + \frac{k_2}{k_3[O_2]}\right) (k_1 [C_3H_8] [O_2] + k_4 [C_3H_8] [HO_2]) \quad (5)$$

$$d[HO_2]/dt = 2k_1 [C_3H_8] [O_2] \quad (6)$$

Equation (6) is easily integrated if it is assumed that during the preignition period the propane and oxygen concentrations are substantially constant. Equation (5) becomes:

$$-\frac{1}{[C_3H_8]} \frac{d[C_3H_8]}{dt} = k_1 (k_2/k_3 + [O_2]) (1 + 2k_4 [C_3H_8] t) \quad (7)$$

This equation describes the observed lags if it is assumed that $k_4 [C_3H_8] \gg 1$ and that ignition occurs when the fractional rate of propane consumption reaches a critical value characteristic for a given temperature and pressure. If this is so, then

$$(k_2/k_3 + [O_2]) [C_3H_8]^\tau = \text{const} \quad (8)$$

The first assumption is reasonable since reaction (iv) is an exothermic radical reaction and therefore probably has a large rate constant. The postulate that a critical fractional rate of propane consumption is attained at the time of ignition is not so easily justified. However, if the explosion is thermal in origin (that is, if heat is generated by the slow reaction more quickly than it is dissipated by conduction to the surroundings so that temperature rises and, with it, reaction rates), it might be expected that more propane should be required to prereact in rich mixtures for the following reasons: First, in richer mixtures, initial reaction of propane to give cracked products (methane and ethylene) will occur more frequently relative to partial oxidation (to propylene and hydrogen peroxide). This may result in less heat generated per molecule of propane consumed. Second, for a given heat evolution, the resultant temperature rise will be lower at higher propane concentrations because of the higher heat capacity and thermal conductivity of rich mixtures.

The dependence of ignition lag on oxygen concentration as given by equation (8) is qualitatively correct if k_2/k_3 is of the order of unity. (e.g., if $k_2/k_3 = 1$ and $[O_2] \cong 0.2$, the variation would be $[O_2]^{1/6}$.) However, experimentally the effect of oxygen concentration was more pronounced for mixtures of low oxygen-nitrogen ratio (best described by eq. (2a), while eq. (8) predicts the opposite).

The variation of ignition lag with temperature should involve principally the energies of activation of reactions (i) and (ii). Reaction (i) is endothermic by roughly 50 kilocalories, so its activation energy must be at least that large. However, the observed variation of ignition delay with temperature is not compatible with such a high energy of activation, unless nonkinetic factors are playing a dominant role in the temperature effect.

Alternatively, the effect of propane and oxygen concentration on ignition delay might be explained in terms of initiation by means of a bimolecular surface reaction between propane and oxygen. If the induction period varies inversely with the initiation rate, then

$$1/\tau \propto \text{initiation rate} = k' \theta_{O_2} \theta_{C_3H_8} \quad (9)$$

where θ_{O_2} and $\theta_{C_3H_8}$ are the fractions of the surface covered by oxygen and propane, respectively, and represent surface concentrations; k' is a constant. For monolayer adsorption on a homogeneous surface, with oxygen moderately adsorbed, θ_{O_2} is given by

$$\theta_{O_2} = \frac{k'' p_{O_2}}{1 + k'' p_{O_2}} = \frac{k [O_2]}{1 + k [O_2]} \quad (10)$$

where p_{O_2} is the partial pressure of oxygen (see ref. 20). When the mole fraction of oxygen is used as a concentration unit, the constant of equation (10) is pressure-dependent. If propane is weakly adsorbed, its surface concentration will be proportional to its gas phase partial pressure and to the bare surface $(1 - \theta_{O_2})$.

$$\theta_{C_3H_8} = a(1 - \theta_{O_2}) [C_3H_8] = \frac{a [C_3H_8]}{1 + k [O_2]} \quad (11)$$

Substitution of (10) and (11) into equation (9) yields an expression for the ignition delay:

$$1/\tau \propto \frac{[O_2] [C_3H_8]}{(1 + k [O_2])^2} \quad (12)$$

Note that the dependence of lag on propane and oxygen concentration is as given in equations (1) and (2a), respectively.

It might at first appear surprising that lags observed in the 25- and 50-millimeter tubes are the same if a surface reaction is involved. This might be explained by the fact that while the smaller tube (with a larger surface-volume ratio) gives greater surface concentrations of reactants per unit volume of gas, the smaller tube also offers more surface per unit volume for the removal of heat or the destruction of chain carriers.

SUMMARY OF RESULTS

The variation of spontaneous ignition delays of propane with temperatures, fuel concentration, and oxygen concentration at atmospheric pressure has been studied in a flow system. The reactants were mixed in a time much shorter than the ignition lag at the temperature of the reaction chamber. Ignition delays were measured with a photocell relay and timer, or alternatively with a pressure recorder.

Ignition lags were found to be:

1. Inversely proportional to the 0.74 to 1.0 power of the propane concentration
2. Inversely proportional to approximately the 0.25 power of the oxygen concentration
3. Decreased by increasing temperature
4. Unaffected by changing tube size under comparable flow conditions. Over the range of temperatures investigated, ignition delays τ in seconds were given within 30 percent by the empirical relation

$$\tau [\text{C}_3\text{H}_8] [\text{O}_2]^{1/4} = 0.030 + 5.4 \times 10^{-9} e^{14,500/T}$$

with concentrations expressed as mole fractions and temperature T in degrees Kelvin.

Lewis Flight Propulsion Laboratory
National Advisory Committee for Aeronautics
Cleveland, Ohio, February 23, 1954

REFERENCES

- 3235
1. Anon.: Standard Method of Test for Autogeneous Ignition Temperature of Petroleum. (Adopted 1930.) A.S.T.M. Designation: D 286-30. A.S.T.M. Standards on Petroleum Products and Lubricants, Nov. 1948, pp. 199-200.
 2. Jackson, Joseph L.: Spontaneous Ignition Temperatures of Pure Hydrocarbons and Commercial Fluids. NACA RM E50J10, 1950. (See also Ind. and Eng. Chem., vol. 43, no. 12, Dec. 1951, pp. 2869-2870.)
 3. Dixon, Harold Baily, and Crofts, James Murray: The Firing of Gases by Adiabatic Compression. Pt. II. The Ignition-points of Mixtures Containing Electrolytic Gas. Jour. Chem. Soc. Trans. (London), vol. 105, 1914, pp. 2036-2053.
 4. Jost, W.: Reactions of Adiabatically Compressed Hydrocarbon-Air Mixtures. Third Symposium on Combustion and Flame and Explosion Phenomena, The Williams & Wilkins Co. (Baltimore), 1949, pp. 424-432.
 5. Jovellanos, J. U., Taylor, E. S., Taylor, C. F., and Leary, W. A.: An Investigation of the Effect of Tetraethyl Lead and Ethyl Nitrite on the Autoignition Characteristics of Isooctane and Triptane. NACA TN 2127, 1950.
 6. Jost, Wilhelm: Explosion and Combustion Processes in Gases. McGraw-Hill Book Co., Inc., 1946, pp. 36-42.
 7. Mason, Walter, and Wheeler, Richard Vernon: The Ignition of Gases. Pt. II. Ignition by a Heated Surface. Mixtures of Methane and Air. Jour. Chem. Soc. Trans. (London), vol. 121, 1922, pp. 2079-2091.
 8. Newitt, D. M., and Thornes, L. S.: The Oxidation of Propane. Pt. I. The Products of Slow Oxidation at Atmospheric and at Reduced Pressures. Jour. Chem. Soc. (London), 1937, pp. 1656-1676.
 9. Dixon, Harold Baily, and Coward, Hubert Frank: The Ignition-Temperatures of Gases. Jour. Chem. Soc. Trans. (London), vol. 95, 1909, pp. 514-543.
 10. Dykstra, T. J., and Edgar, Graham: Spontaneous Ignition Temperatures of Liquid Hydrocarbons at Atmospheric Pressure. Ind. and Eng. Chem., vol. 26, no. 5, May 1934, pp. 509-510.
 11. Mullins, B. P.: Studies of the Spontaneous Ignition Fuels Injected into a Hot Air Stream. II. Effect of Physical Factors upon the Ignition Delay of Kerosene-Air Mixtures. Fuel, vol. XXXII, no. 2, Apr. 1953, pp. 234-252.

12. Olson, Donald R.: Spontaneous Ignition Time for Mixtures of Heptane Vapor and Air. Eng. D. Thesis, Yale Univ., 1951.
13. Prettre, M.: Researches on the Combustion of Mixtures of Normal Pentane and Oxygen Between 250° and 360° C. Third Symposium on Combustion and Flame and Explosion Phenomena, The Williams & Wilkins Co. (Baltimore), 1949, pp. 397-404.
14. Lewis, Bernard, and von Elbe, Guenther: Combustion, Flames and Explosions of Gases. Academic Press, Inc., 1951, pp. 150-151.
15. Pease, Robert N.: The Negative Temperature Coefficient in the Rate of Propane Oxidation. Jour. Am. Chem. Soc., vol. 60, no. 9, Sept. 7, 1938, pp. 2244-2246.
16. Pease, Robert N.: The Slow Combustion of Gaseous Paraffins, Especially Propane. Chem. Rev., vol. 21, no. 2, Oct. 1937, pp. 279-286.
17. Pease, Robert N., and Munro, Wendell P.: The Slow Oxidation of Propane. Jour. Am. Chem. Soc., vol. LVI, July-Dec. 1934, pp. 2034-2038.
18. Harris, E. J., and Egerton, A.: Observation on the Oxidation of Propane. Chem. Rev., vol. 21, no. 2, Oct. 1937, pp. 287-297.
19. Satterfield, C. N., and Wilson, R. E.: Partial Oxidation of Propane. Rep. No. 37, D.I.C. 6552, Div. Ind. Cooperation, M.I.T., Apr. 10, 1953. (Office Naval Res. Contract No. N5ORI-07819, NR-092-008.)
20. Taylor, Hugh S., and Taylor, H. Austin: Elementary Physical Chemistry. D. Van Nostrand Co., Inc., 1942, p. 443.

TABLE I. - EFFECT OF FLOW RATE ON IGNITION DELAY AT VARIOUS TEMPERATURES AND OXYGEN CONCENTRATIONS IN 25-MILLIMETER REACTION TUBE

Run	Temperature, °C	Total flow rate, l/min	O ₂ /(O ₂ +N ₂) (by vol.)	Volume percent propane	Ignition delay with air lead, sec	Run	Temperature, °C	Total flow rate, l/min	O ₂ /(O ₂ +N ₂) (by vol.)	Volume percent propane	Ignition delay with air lead, sec
Temperature, 560° C; date, 8/26/53						Temperature, 685° C; date, 9/9/53					
18	560	1.0	0.209	10	3.8	13	685	0.5	0.209	10	0.57
17	568	2.0	↓	↓	2.65	12	685	1.0	↓	↓	.51
16	560	4.0	↓	↓	2.5	11	688	2.0	↓	↓	.57
15	563	8.0	↓	↓	^a 14	10	682	4.0	↓	↓	.66
19	560	8.0	↓	↓	12.0	9	690	8.0	↓	↓	.70
20	560	16.0	↓	↓	6.2	8	690	16.0	↓	↓	.77
14	560	16.0	↓	↓	8.0	7	688	32.0	↓	↓	1.18
1	560	.5	↓	20	3.2	1	685	1.0	↓	20	.48
2	558	1.0	↓	↓	2.7	2	685	2.0	↓	↓	.46
3	557	2.0	↓	↓	2.05	3	690	4.0	↓	↓	.38
4	566	4.0	↓	↓	1.55	4	688	8.0	↓	↓	.35
7	560	4.0	↓	↓	1.6	5	685	16.0	↓	↓	.40
5	557	8.0	↓	↓	1.7	6	690	32.0	↓	↓	.52
6	580	16.0	↓	↓	4.4	14	685	1.0	↓	40	.25
11	560	.5	↓	40	1.61	15	682	2.0	↓	↓	.17
10	560	1.0	↓	↓	1.19	16	688	4.0	↓	↓	.16
9	557	2.0	↓	↓	.94	17	688	8.0	↓	↓	.18
8	566	4.0	↓	↓	.78	18	685	16.0	↓	↓	.18
12	563	8.0	↓	↓	.96	Temperature, 743° C; date, 9/21/53					
13	566	16.0	↓	↓	1.06	10	741	2.0	0.209	5	^c >30
Temperature, 629° C; date, 9/20/53						8	741	4.0	↓	↓	1.16
9	632	2.0	0.209	5	2.44 ^t	9	741	8.0	↓	↓	1.22
8	632	4.0	↓	↓	1.90	7	746	8.0	↓	↓	1.24
7	632	8.0	↓	↓	1.93	6	743	16.0	↓	↓	^d 1.47
6	632	16.0	↓	↓	3.96	1	743	1.0	↓	10	^e >30
1	638	1.0	↓	10	1.74	2	743	2.0	↓	↓	^f 10.7
2	632	2.0	↓	↓	1.29	3	738	4.0	↓	↓	7.7
3	632	4.0	↓	↓	1.04	4	749	8.0	↓	↓	.580
4	632	8.0	↓	↓	1.04	5	743	16.0	↓	↓	.629
5	632	16.0	↓	↓	1.37	11	743	2.0	↓	20	^e >30
19	632	2.0	↓	20	.74	12	741	4.0	↓	↓	.291
10	632	2.0	↓	↓	.714	13	743	9.0	↓	↓	.295
11	632	4.0	↓	↓	.549	14	743	16.0	↓	↓	.378
12	629	9.0	↓	↓	.502	17	743	4.0	↓	40	.128
18	632	9.0	↓	↓	.53	16	743	8.0	↓	↓	.096
17	629	16.0	↓	↓	.62	15	749	15.0	↓	↓	.098
13	629	16.0	↓	↓	.596	22	746	1.0	.095	10	.68
16	627	4.0	↓	40	.344	18	735	2.0	↓	20	.397
15	624	8.0	↓	↓	.313	19	746	4.0	↓	↓	.437
14	632	15.0	↓	↓	.290	20	746	9.0	↓	↓	.421
21	627	2.0	.095	10	1.79	21	738	16.0	↓	↓	.493
22	627	4.0	↓	10	1.53	23	743	1.0	.395	↓	^g 4.45
20	627	4.0	↓	20	.90	24	746	2.0	↓	↓	^h .26
Temperature, 685° C; date, 9/1/53						25	743	4.0	↓	↓	.214
1	685	1.0	0.209	20	0.52	26	743	9.0	↓	↓	.226
2	682	1.0	↓	↓	.50	27	743	16.0	↓	↓	.307
3	685	2.0	↓	↓	.46						
4	688	4.0	↓	↓	.38						
5	682	8.0	↓	↓	.35						
6	682	16.0	↓	↓	.40						
7	679	32.0	↓	↓	.53						
8	685	32.0	↓	10	^b 1.24						

^aTemperature rise, in 2.7 sec.
^bMixer heater burned out.
^cNo ignition.
^dMay be too long.

^eNo pressure pulse; temperature rise in mixer.
^fSmall temperature rise in mixer.
^gFlash in mixer.
^hWeak pulse; strong at 0.64 sec.

3235

CI-3

TABLE II. - EFFECT OF FLOW RATE ON IGNITION DELAY AT VARIOUS TEMPERATURES IN 50-MILLIMETER

REACTION TUBE

Run	Temperature, °C	Total flow rate, l/min	O ₂ /(O ₂ +N ₂) (by vol.)	Volume percent propane	Ignition delay, sec		Run	Temperature, °C	Total flow rate, l/min	O ₂ /(O ₂ +N ₂) (by vol.)	Volume percent propane	Ignition delay with air lead, sec
					Air lead	N ₂ lead						
Temperature, 529° C; date, 9/24/53							Temperature ^e , 632° C; date, 9/16/53					
7	532	1.16	0.209	5	18.2		10	632	1.0	0.209	5	2.15
6	529	2.0			^a 22.8		9	632	2.0			1.87
5	527	4.0			^b 35.2		8	630	4.0			1.71
8	532	.6		10	14.8		7	635	8.0			2.06
1	529	1.0			11.0		6	632	16.0			2.33
2	529	2.0			9.0		1	630	1.0		10	2.19
3	524	4.0			8.8		2	630	2.0			1.41
4	527	8.0			^c >30		3	632	4.0			1.01
9	527	.5		20	8.7		4	627	8.0			.99
10	524	1.0			7.0		5	632	16.0			1.15
11	528	2.0			6.2		11	632	1.0		20	1.04
12	529	4.0			5.2		12	632	2.0			.78
13	527	9.0			4.7		13	632	4.0			.60
14	527	16.0			^d >40		14	632	8.0			.50
19	532	1.0		40	3.3		15	632	9.0			.50
18	529	2.0			2.3		16	632	16.0			.55
17	529	4.0			2.3		17	632	32.0			.76
16	535	8.0			2.45		21	632	2.0		40	.481
15	521	16.0			3.2		20	632	4.0			.359
20	527	1.5		80	2.2		19	632	8.0			.281
21	527	2.0			1.9		18	632	15.0			.256
22	532	4.0			1.77		Temperature, 685° C; date, 9/2/53					
23	532	8.0			1.52		10	690	2.0	0.209	2.5	2.0
Temperature, 577° C; date, 8/17/53							11	682	4.0			2.4
4	579	1.0	0.209	10	2.87	2.43	12	685	10.0			2.5
3	574	2.0			2.50	2.45	13	688	20.0			3.6
2	577	4.0			1.99	2.36	3	688	2.0		10	.70
9	577	4.0			1.74	2.18	2	688	4.0			.60
5	582	8.0			1.99	2.32	8	685	4.0			.64
6	585	16.0			2.18	2.40	7	690	10.0			.67
8	582	32.0			2.30	2.62	1	685	10.0			.68
7	582	28.7		11.1	1.99	2.28	5	688	20.0			.85
12	574	1.0		20	1.91	1.83	6	696	35.0			1.14
11	574	2.0			1.28	1.41	19	685	1.0		20	.61
10	577	4.0			1.02	1.34	18	682	2.0			.434
1	574	4.0			1.11		20	685	4.0			.42
16	574	4.0			1.07	1.41	21	685	8.0			.36
13	579	8.0			.87	1.31	22	685	16.0			.40
14	574	16.0			1.07	1.36	23	685	32.0			.52
15	579	32.0			1.15	1.34	4	685	.4		25	.60
19	577	1.0		40	1.19		9	685	.4			1.53
18	577	2.0			.91		17	685	2.0		40	.275
17	574	4.0			.72	.83	16	685	4.0			.243
22	574	4.0			.72		14	688	16.0			.180
20	574	8.0			.62		15	688	9.1		47	.177
21	574	16.0			.59							

Run	Temperature, °C	Total flow rate, l/min	O ₂ /(O ₂ +N ₂) (by vol.)	Volume percent propane	Ignition delay with air lead, sec
Temperature, 740° C; date, 9/14/53					
12	746	2.0	0.209	5	1.8
13	743	4.0			1.14
14	738	8.0			1.05
15	743	16.0			1.11
16	743	32.0			1.97
11	746	1.0		10	1.45
10	738	2.0			.85
9	740	4.0			.540
8	738	8.0			.438
7	738	16.0			.62
6	746	32.0			.90
1	740	1.0		20	1.59
2	743	2.0			1.30
3	743	4.0			.24
4	743	8.0			.28
5	746	16.0			.39
18	743	6.4		25	.21
20	738	4.0		40	.131
19	738	8.0			.107
17	743	14.0			.088

^aTemperature rise before ignition, 10° to 30° C.
^bTemperature rise, 30° C; pulse after shut off.
 Only one ignition.
^cTemperature rise, 20° C.
^dTemperature rise, 25° C.
^eNumber 6 heater out, reducing tube length to 23 in.
^fTemperature rise in mixer.
^gNo sharp pressure pulses.

5235

TABLE III. - EFFECT OF TEMPERATURE AND OXYGEN CONCENTRATION ON IGNITION DELAY IN 25-MILLIMETER REACTION TUBE

Run	Temperature, °C	Total flow rate, l/min	O ₂ /(O ₂ +N ₂) (by vol.)	Volume percent propane	Ignition delay, sec		Run	Temperature, °C	Total flow rate, l/min	O ₂ /(O ₂ +N ₂) (by vol.)	Volume percent propane	Ignition delay, sec	
					Air lead	N ₂ lead						Air lead	N ₂ lead
Temperature, 546° C; date, 3/3/53							Temperature, 593° C; date, 6/28/53						
6	549	1.0	0.209	7.5	6.6	6.5	1	593	2.0	0.209	20	1.21	1.26
7	549	2.0		7.5	7.9	8.2	2	593	2.0		30	.89	.92
5	546	1.0		10	6.0	5.9	3	593	2.0		40	.71	.72
4	545	1.0		15	4.28	4.3	4	593	2.0		60	.56	
3	546	2.0		15	3.39		Temperature, 621° C; date, 5/15/53						
8	546	2.0		15	4.32	3.35	7	624	2.0	0.209	3	3.2	2.9
2	543	2.0		20	2.57	2.63	6	624	2.0		5	2.54	2.04
1	543	2.0		30	1.93	1.94	5	621	2.0		7.5	1.58	1.50
9	546	2.0		30	2.12		4	621	2.0		7.5	1.74	1.56
10	546	2.0		40	1.59	1.64	3	621	2.0		10	1.36	1.44
11	546	2.0		50	1.25	1.28	8	621	2.0		10	1.44	
12	546	2.0		75	.97		20	621	2.0		10	1.25	
Temperature, 554° C; date, 6/30/53							Temperature, 621° C; date, 5/15/53						
5	557	1.0	0.209	6	8.3	8.2	2	621	2.0		15	.99	.90
4	557	1.0		7.5	5.3	4.7	1	621	2.0		20	.79	.70
3	554	1.0		10	4.2	3.8	9	621	2.0		20	.77	
12	554	1.0		10	4.0	3.8	10	621	2.0		30	.54	f.58
1	551	1.0		15	4.0	3.8	11	621	2.0		40	.44	.48
1	549	1.0		20	2.7	2.5	19	621	2.0		40	.44	
6	554	1.0		20	2.5	2.4	14	621	2.0	0.095	10	1.66	1.56
7	554	2.0		20	2.1	2.0	13	621	2.0		20	g.90	
8	554	2.0		40	1.50	1.40	12	621	2.0		40	h.48	
9	554	2.0		40	1.21	1.20	15	621	2.0	.395	10	1.17	1.03
10	554	2.0		60	.81	1.0	16	624	2.0		20	.79	.68
11	554	2.0		80	.60		17	624	2.0		33.3	.48	.66
Temperature, 563° C; date, 4/23/53							Temperature, 666° C; date, 4/14/53						
11	563	1.0	0.209	5.5	6.4	4.7	8	666	2.0	0.209	2.5	2.46	2.00
10	563	1.0		7.5	5.3	4.4	7	666	2.0		3.5	2.01	1.76
9	566	2.0		7.5	4.5	4.3	6	663	4.0		3.5	2.22	2.00
12	566	1.0		10	4.1	4.0	5	663	4.0		5	1.62	1.30
12	566	2.0		10	3.20	3.22	23	666	4.0		5	1.46	
17	563	2.0		10	4.4		4	663	4.0		7.5	1.13	
25	566	2.0		10	4.4		3	663	4.0		10	.88	.96
7	566	2.0		15	2.35	2.32	9	666	2.0		10	.87	.94
13	568	1.0		20	2.32	2.24	2	663	4.0		15	.644	.55
14	563	2.0		20	1.92		1	663	4.0		20	.502	.47
1	563	2.0		20	1.98	2.08	10	666	4.0		20	.481	.47
6	566	2.0		20	1.91		11	566	4.0		30	.54	.34
2	563	2.0		30	1.51		12	666	4.0		40	.288	.30
3	566	2.0		40	1.18	1.24	22	666	4.0		40	.282	
4	566	2.0		60	.92	1.02	13	666	4.0		50	.235	
5	563	2.0		80	.81		18	666	4.0	.095	5	1.84	
23	568	2.0	.095	10	4.7		19	666	4.0		10	1.07	
22	568	2.0		20	a2.39		20	666	4.0		20	.614	
21	568	2.0		40	b1.27	2.30	21	666	4.0		40	.429	
16	563	2.0	.395	10	5.1		17	666	4.0	.395	5	1.45	
18	563	2.0		10	4.8	5.2	16	666	4.0		10	.78	
24	568	2.0		10	4.9		15	666	4.0		20	.424	
15	563	2.0		20	1.98	1.80	14	668	4.0		40	.247	
19	563	2.0		40	1.07	1.08	Temperature, 679° C; date, 6/29/53						
20	563	2.0		80	.88		5	682	4.0	0.209	5	1.55	1.10
Temperature, 568° C; date, 4/7/53							4	679	4.0		7.5	1.02	.74
4	568	1.0	0.209	15	2.11	2.16	3	677	4.0		10	.78	.53
1	568	1.0		20	1.60	1.61	2	677	4.0		15	.53	.46
2	568	1.0		25	1.26	1.25	1	674	4.0		20	.45	.46
3	568	1.0		30	1.06	1.07	6	679	4.0		20	.40	.43
Temperature, 579° C							8	677	2.0		20	.48	
20	582	2.0	0.209	8	3.06	3.10	7	682	6.0		40	.23	
14	577	2.0		8.3	2.82	2.88	Temperature, 685° C; date, 6/29/53						
19	582	2.0		10	2.33	2.40	7	685	2.5	0.209	2.5	3.8	3.2
18	582	2.0		12.5	1.88	1.93	6	688	2.5		5	1.61	1.45
17	582	2.0		15	1.50	1.60	5	685	2.5		10	.88	.82
16	579	2.0		20	1.21	1.29	4	685	8.0		10	.92	1.04
13	577	.50		25	1.52		3	685	8.0		15	.63	.68
15	579	2.0		30	.83	.90	2	682	8.0		20	.455	.49
Temperature, 593° C; date, 7/2/53							1	679	7.75		25	.376	.44
12	593	2.0	0.209	5	3.4		9	685	2.50		25	.409	.38
11	593	2.0		7.5	2.67	2.40	10	685	6.0		25	.380	.47
10	593	2.0		10	2.01	1.87	11	685	6.0		30	.316	.34
9	596	2.0		15	1.33	1.32	12	685	5.0		40	.249	
1	593	2.0		20	1.12	1.24	15	685	4.0		50	.227	
7	593	2.0		20	c.98		14	685	2.66		75	.257	
8	593	2.0		20	d1.05	1.20	Temperature, 738° C; date, 4/21/53						
13	596	2.0		20	1.05		5	738	4.0	0.209	5	1.10	
24	596	2.0		20	1.03		4	735	4.0		7.5	.75	
2	593	2.0		30	.76	.70	3	732	4.0		10	.582	0.39
3	593	2.0		40	.57	.60	2	732	4.0		15	.354	.30
4	593	2.0		60	.46		1	732	4.0		20	.291	.32
5	593	2.0		80	.43		6	738	4.0		23	.281	
16	593	2.0	.095	5	3.7	2.6	9	738	4.0		20	.294	
15	593	2.0		10	2.14		8	738	6.0		20	.328	
14	593	2.0		20	1.31		7	738	8.0		20	.418	
17	598	2.0		40	.95		12	738	4.0	.095	5	1.12	
23	596	2.0		5	3.4		11	738	4.0		10	.69	
22	593	2.0	.395	10	1.98		10	739	4.0		20	4.04	
21	593	2.0		20	.96		14	738	4.0	.395	5	.97	
18	593	2.0		40	.43		13	738	4.0		10	.490	
20	599	2.0		60	.40		15	738	4.0		20	.243	

^aFirst pulse weak; second at 2.80.

^bFirst pulse weak; second at 1.73.

^cRun immediately after extremely rich trial; may be in error because of soot on tube.

^dRun 20 minutes after above.

^eDiscovered after 4 runs that 25-mm. tube was broken; not known how long it had been so.

^fOn N₂ lead; no visible flash but definite pressure pulse.

^gFirst pulse weak; second at 1.04.

^hFirst pulse weak; second at 0.68.

3235

CI-3 back

TABLE IV. - EFFECT OF TEMPERATURE AND OXYGEN CONCENTRATION ON IGNITION DELAY IN


50-MILLIMETER REACTION TUBE

Run	Temperature, °C	Total flow rate, l/min	O ₂ /(O ₂ +N ₂) (by vol.)	Volume percent propane	Ignition delay, sec		Run	Temperature, °C	Total flow rate, l/min	O ₂ /(O ₂ +N ₂) (by vol.)	Volume percent propane	Ignition delay, sec	
					Air lead	N ₂ lead						Air lead	N ₂ lead
Temperature, 521 °C; date, 10/10/52							Temperature, 613 °C; date, 10/17/52						
10	524	5.0	0.209	9	12.0		1	610	10.0	0.209	1.5	6.45	
9	521	5.0		11	7.0		2	610	10.0		2	3.6	
11	527	5.0		15	5.7		3	610	10.0		6	2.05	
8	521	5.0		15	4.8		4	613	10.0		10	1.22	
15	527	1.0		15	11.1		5	613	10.0		15	1.32	
7	521	5.0		20	3.80		6	616	10.0		22.5	1.63	
6	521	5.0		24.6	3.20		7	616	10.0		60	1.32	
1	516	25.0		25	3.0		8	616	10.0		80	1.27	
14	527	1.0		25	5.07		9	618	10.0		90	1.26	
12	527	5.0		40	3.01		Temperature, 624 °C; date, 10/2/52						
13	527	1.0		40	3.27		13	621	10.0	0.209	1.5	k6.6	
5	516	25.0		40	3.0		14	621	10.0		2	k5.1	
3	516	25.0		52	3.0		15	627	10.0		3	k3.4	
4	518	10.0		55	1.70		6	618	5.0		3	3.8	
5	518	10.0		70	1.35		7	621	5.0		5	1.95	
Temperature, 538 °C; date, 1/20/53							Temperature, 624 °C; date, 10/2/52						
13	546	2.5	0.209	6	7.5		16	627	10.0		6	k1.8	
11	543	5.0		5	7.8		8	621	5.0		7	1.33	
1	527	5.0		9	8.8		19	624	2.0		7	k4.10	
2	535	5.0		11	5.35		1	699	2.0		7	2.62	
10	543	5.0		11	3.20		1	692	2.0	6.5	1.92		
12	543	2.65		11.2	3.51		3	607	2.0		10	1.99	
3	532	5.0		12.5	b4.55		17	624	10.0		10	k1.04	
4	532	5.0		15	b2.97		4	610	2.0		12.5	1.58	
5	538	5.0		17.5	b2.45		9	621	5.0		12.5	.81	
6	540	4.87		30	b2.20		5	616	2.0		15	1.14	
7	540	5.0		20	c1.75		10	624	5.0		15	k1.75	
8	543	5.0		25	c1.45		11	624	5.0		20	k.5	
9	546	5.0		30	c1.21		12	624	5.0		30	k.4	
Temperature, 554 °C; date, 7/5/53							Temperature, 679 °C; date, 7/9/53						
6	554	4.0	0.209	3.75	3.0	8.4	10	692	10.8	0.209	1.25	6.5	8.3
5	554	4.0		5	6.8	6.5	8	692	9.0		1.75	13.9	6.7
4	554	4.0		7.5	4.6	5.4	9	692	9.0		2.50	m2.7	4.5
3	554	4.0		10	4.0	3.5	7	692	9.0		2.50	n2.7	4.6
7	554	4.0		10	3.2		6	679	9.0		3.75	1.91	2.90
2	554	4.0		15	2.24	2.50	5	679	9.0		5	1.39	2.32
1	551	4.0		20	1.76	2.04	4	679	12.0		7.5	1.02	1.64
8	554	4.0		20	1.60	1.72	3	679	12.0		10	.76	1.20
14	554	4.0		20	1.55	1.76	2	679	12.0		15	.52	.80
23	554	4.0		20	1.54		1	679	12.0		20	.40	.56
9	554	4.0		30	1.16	1.40	17	679	12.0		20	.37	
10	554	4.0		40	.97	1.06	26	679	12.0		20	.38	
11	557	15.0		40	.88	1.08	11	682	12.0		20	.38	
12	557	15.0		60	.65		12	682	30.0		20	.46	
13	557	15.0		80	.59		13	679	30.0		30	.21	
22	554	4.0	.095	5	6.3		14	682	30.0		40	.10	
21	554	4.0		10	3.5		15	679	30.0		40	.11	
20	554	4.0		20	d1.76		15	677	30.0		60	.10	
19	554	4.0		40	e1.08		22	679	9.0	.095	2.5	3.3	
17	554	4.0	.395	5	5.9		23	677	9.0		5	1.76	
16	554	4.0		10	2.8		24	677	12.0		10	1.00	
15	554	4.0		20	1.42	1.76	25	677	12.0		20	.50	
18	554	4.0		40	.84	1.04	21	679	9.0	.395	2.5	2.9	
Temperature, 607 °C; date, 7/7/53							Temperature, 738 °C; date, 7/10/53						
9	607	10.4	0.209	1.25	f8.8	14	9	735	11.5	0.209	3.75	01.66	
8	610	7.4		1.75	5.7		8	735	11.6		5	p1.30	
7	607	5.22		2.50	4.3		7	738	11.9		7.5	.90	
6	607	3.8		3.75	3.1		6	735	12.0		10	.69	
5	607	3.8		5	2.4		5	738	12.0		15	.42	
4	610	4.0		7.5	1.70		4	735	12.0		20	.32	
3	607	4.0		10	1.21		10	735	12.0		20	.23	
2	607	4.0		15	.87		1	740	30.0		20	.35	
1	610	4.0		20	.74		2	738	30.0		30	.19	
10	607	4.0		20	.67	.68	3	738	30.0		40	.11	
15	607	4.0		20	.67	.76							
24	610	4.0		20	.63								
30	610	4.0		20	.64								
11	610	30.0		21.6	.66								
12	607	30.0		32.1	.41								
13	607	30.0		42.3	.36								
14	607	30.0		62.3	.28								
19	607	5.2	.095	2.5	4.6	4.8							
18	607	4.0		5	2.5	2.6							
17	610	4.0		10	1.43	1.50							
16	607	4.0		20	.93	.94							
20	607	5.2	.395	2.5	3.3								
21	610	4.0		5	1.90	1.78							
22	607	4.0		10	1.03								
23	607	4.0		20	.87	.58							

^aPoor temperature control in this set.
^bPersistent flame.
^cVery faint blue flame seated, 4 in. above mixer.
^dFirst pip weak; second at 2.13 sec.
^eFirst pip weak; second at 1.80 sec.
^fFirst pip weak; second at 11.0 air lead; 16.0 N₂ lead.
^gOn this set, photocell did not detect some flames that were visible to the eye.
^hInstantaneous temperature rise, 250° C.
ⁱSmall instantaneous temperature rise.
^jNo instantaneous temperature rise.
^kPhotocell failed; manual shut-off of timer.
^lFirst pip weak; second at 4.5 air lead; 7.2 N₂ lead.
^mFirst pip weak; second at 2.6 air lead; 4.8 N₂ lead.
ⁿFirst pip weak; second at 3.1 air lead; 5.0 N₂ lead.
^oFirst pip weak; second at 1.86.
^pFirst pip weak; second at 1.50.

3235

3235

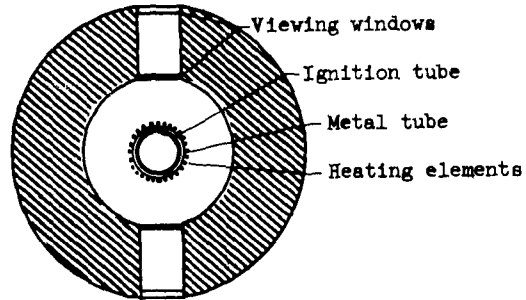

Section A-A

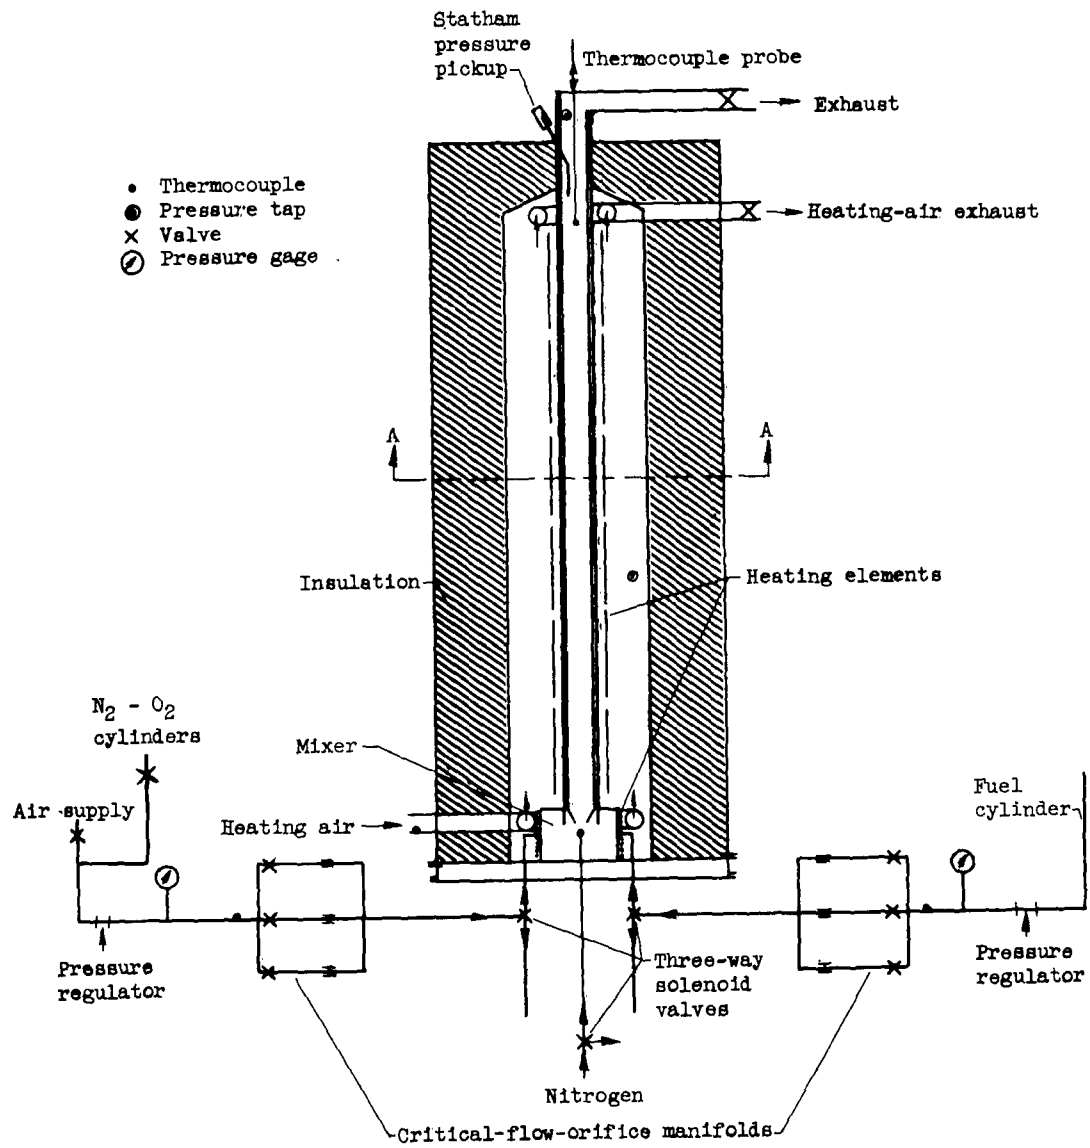


Figure 1. - Schematic drawing of spontaneous ignition apparatus.

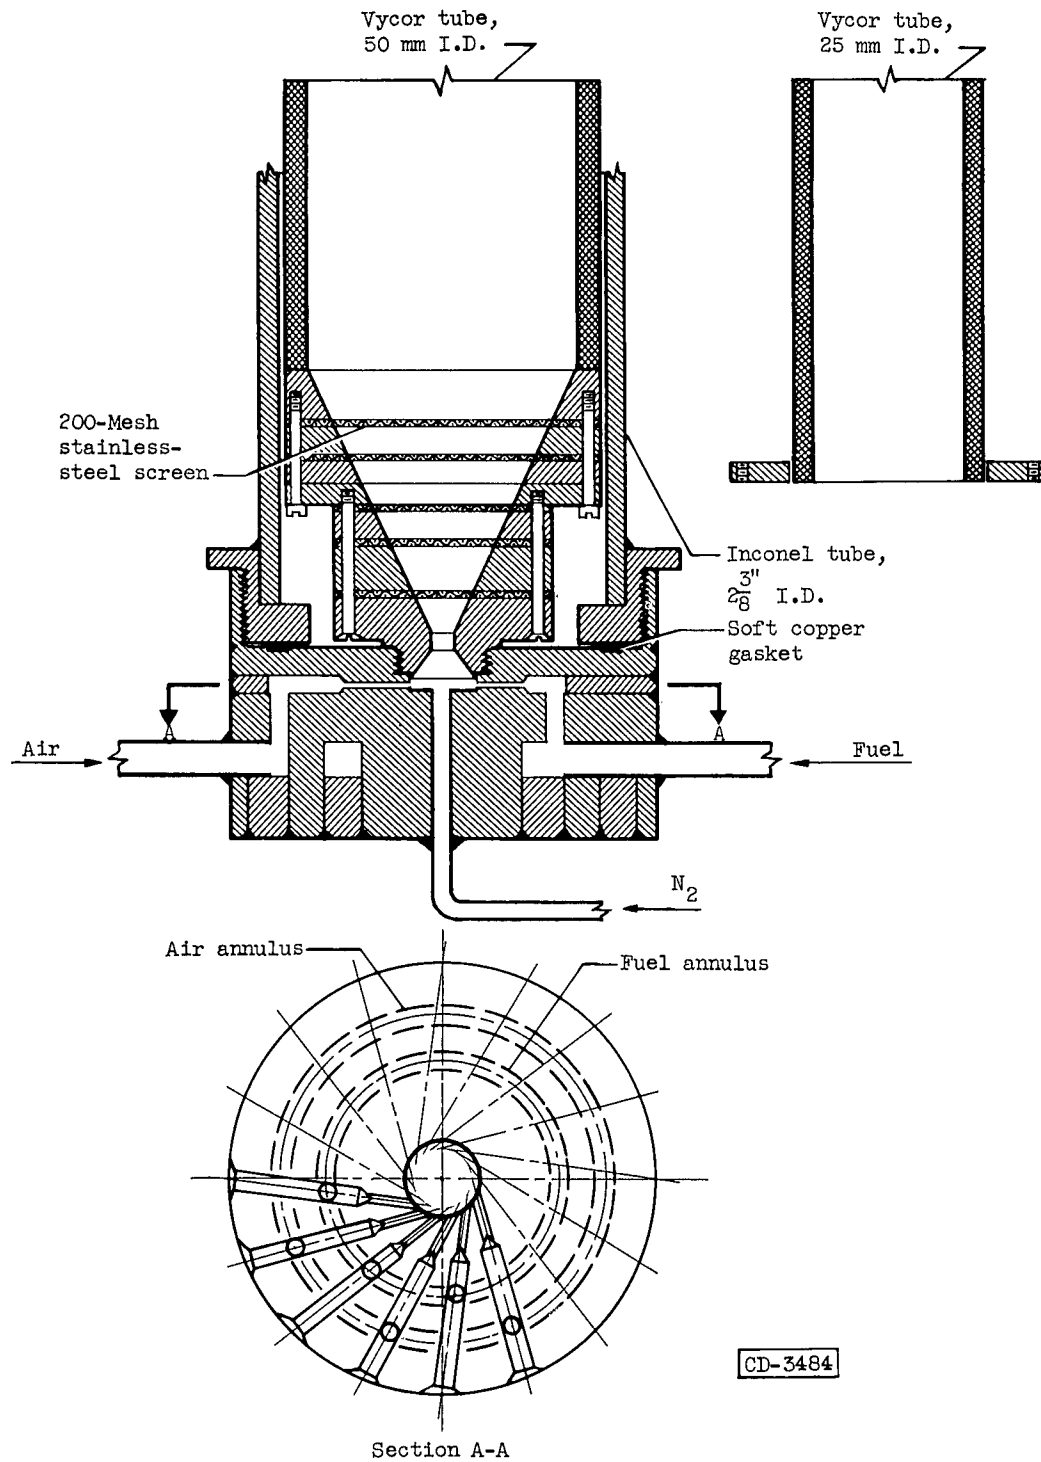


Figure 2. - Mixing chamber for spontaneous ignition apparatus.

3235

3235

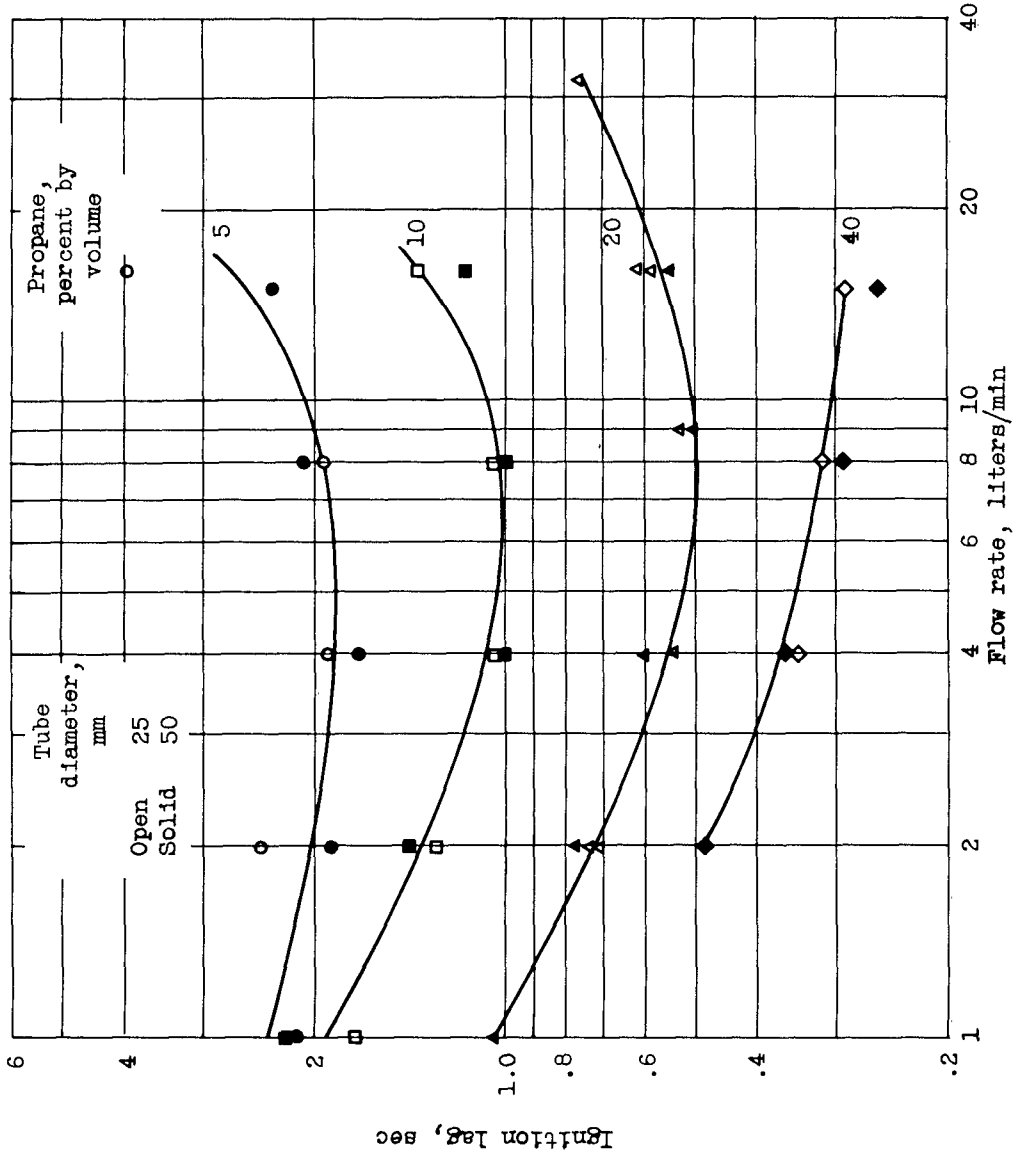


Figure 3. - Effect of flow rate on ignition lag. Temperature, 629° C.


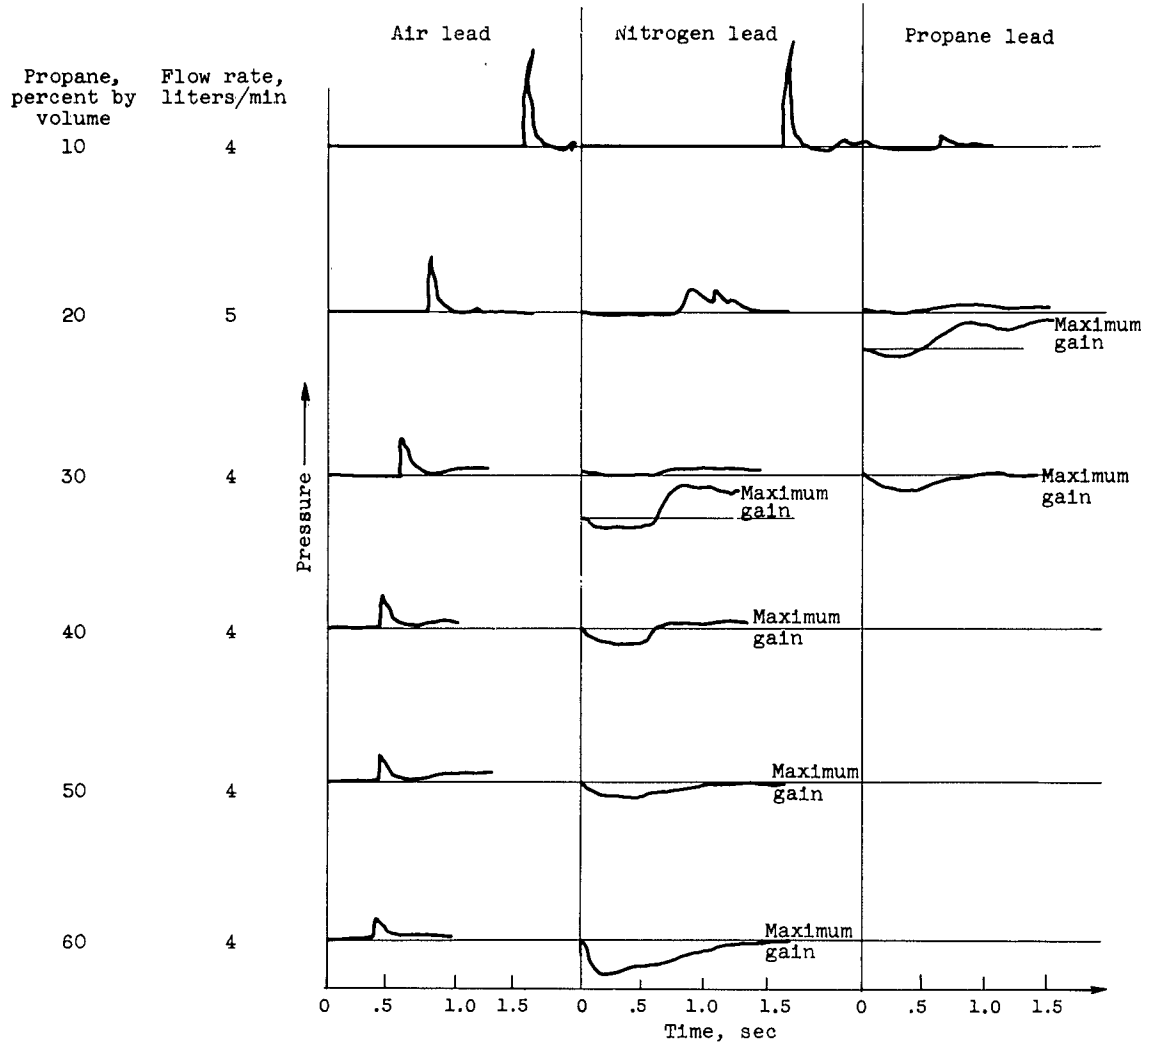



Figure 4. - Typical pressure traces for ignition of propane-air mixtures.

3235

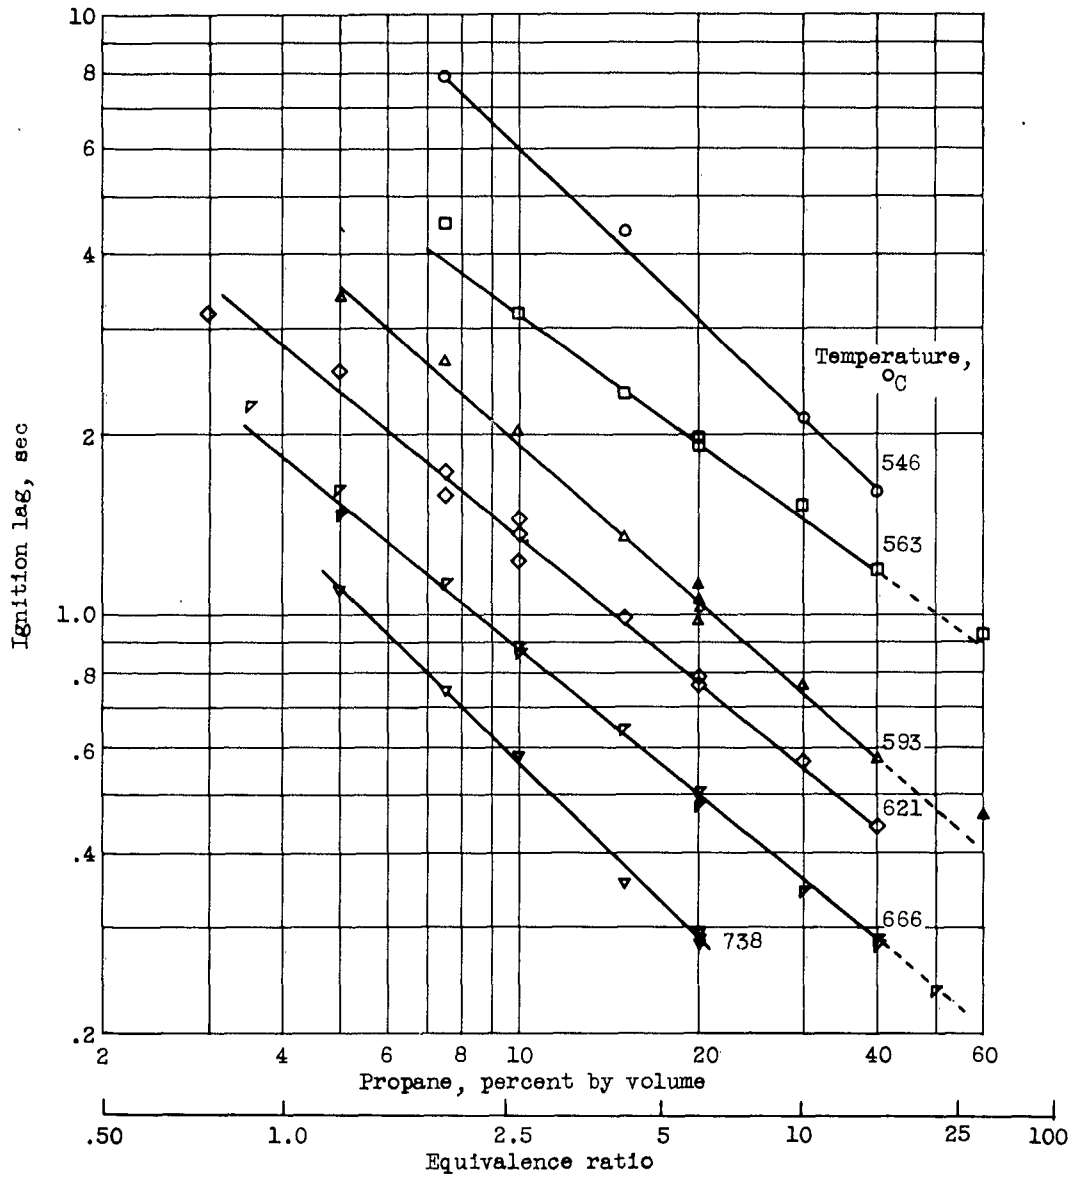

(a) Tube diameter, 25 millimeters.

Figure 5. - Variation of ignition lag with propane concentration.

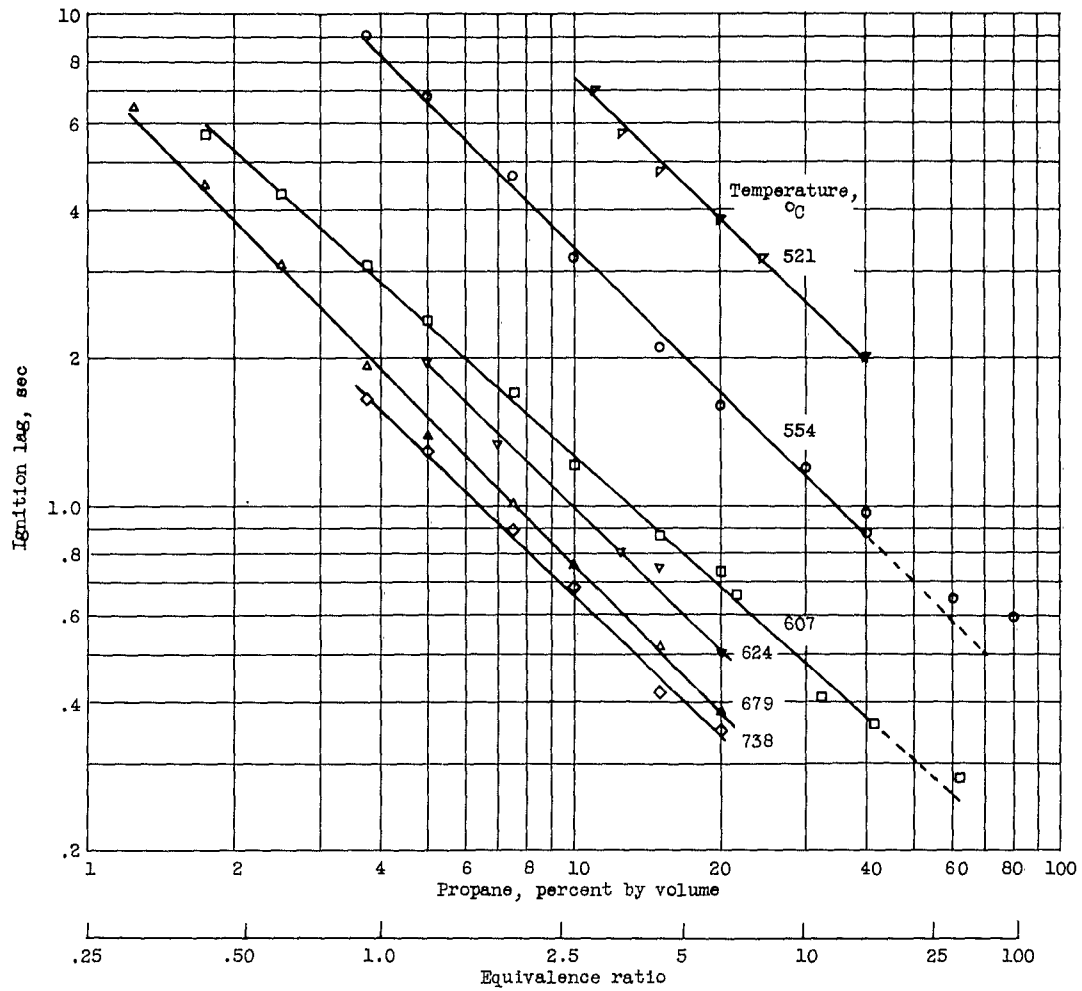

(b) Tube diameter, 50 millimeters.

Figure 5. - Concluded. Variation of ignition lag with propane concentration.



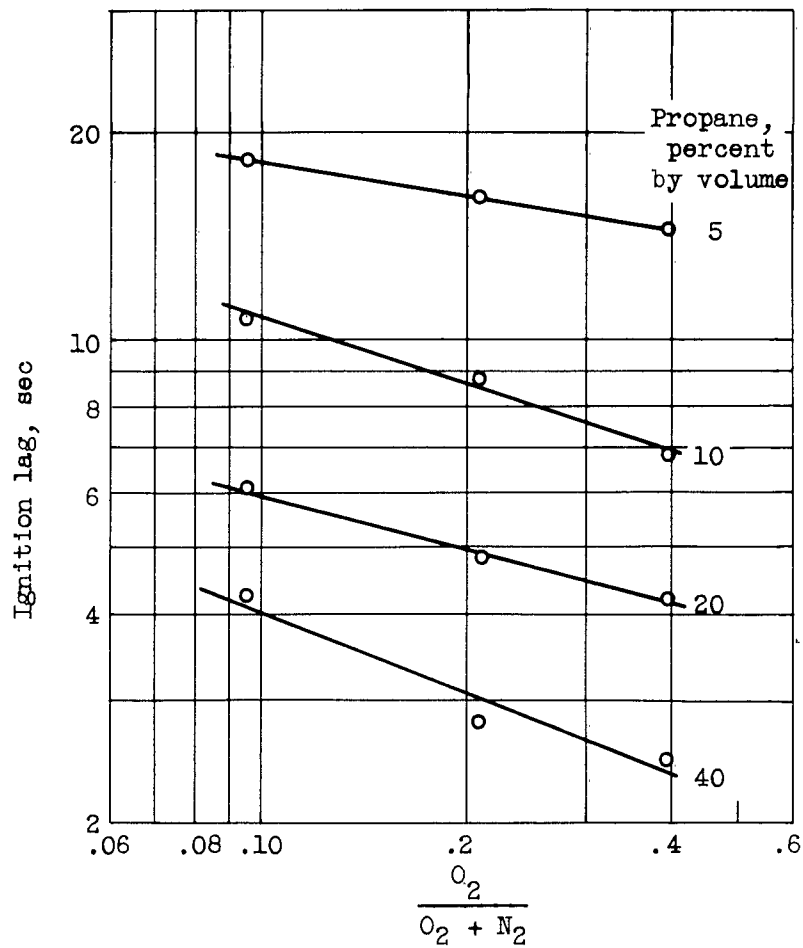


Figure 6. - Variation of ignition lag with oxygen concentration in 25-millimeter tube. Temperature, 666° C.

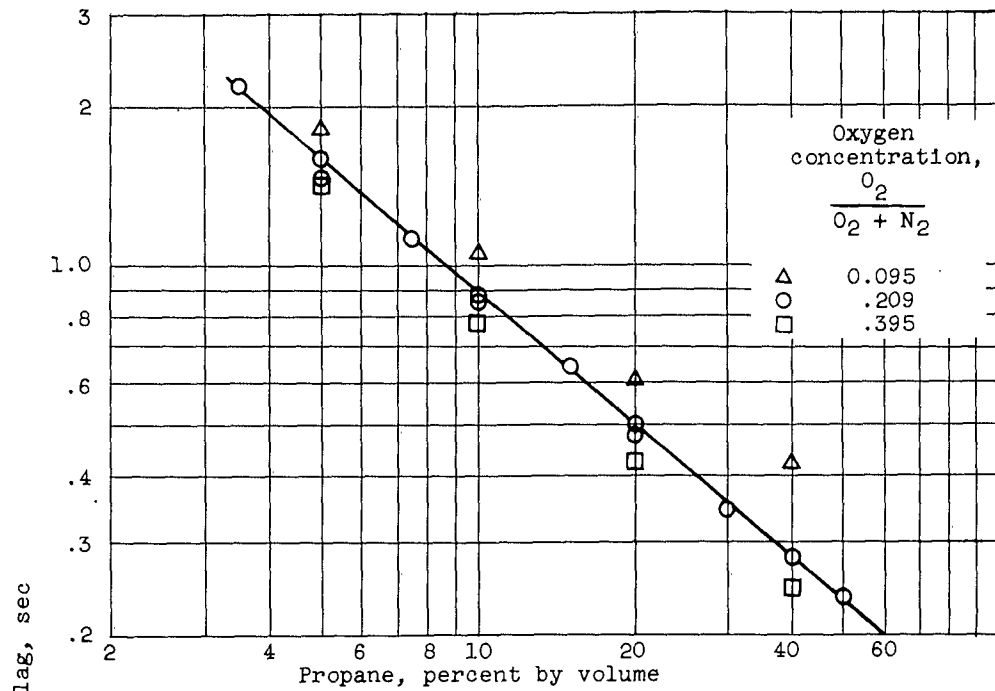

(a) Neglecting oxygen concentration (eq. (1)).

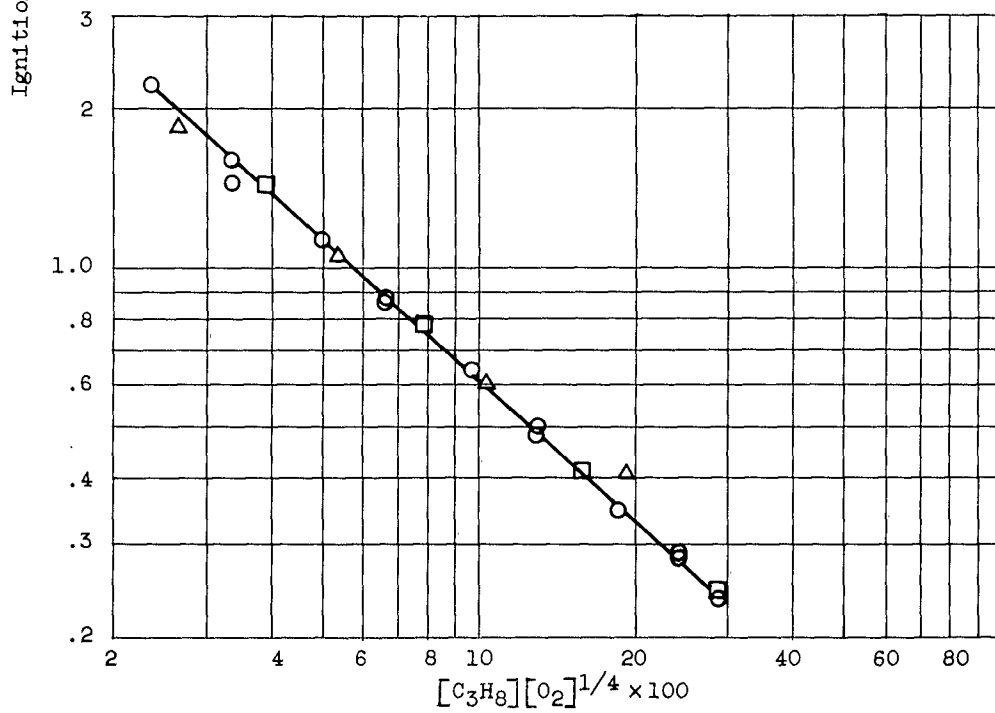

(b) Including oxygen concentration (eq. (3)).

Figure 7. - Variation of ignition lag with propane and oxygen concentrations in 25-millimeter tube. Temperature, 666° C.

3235

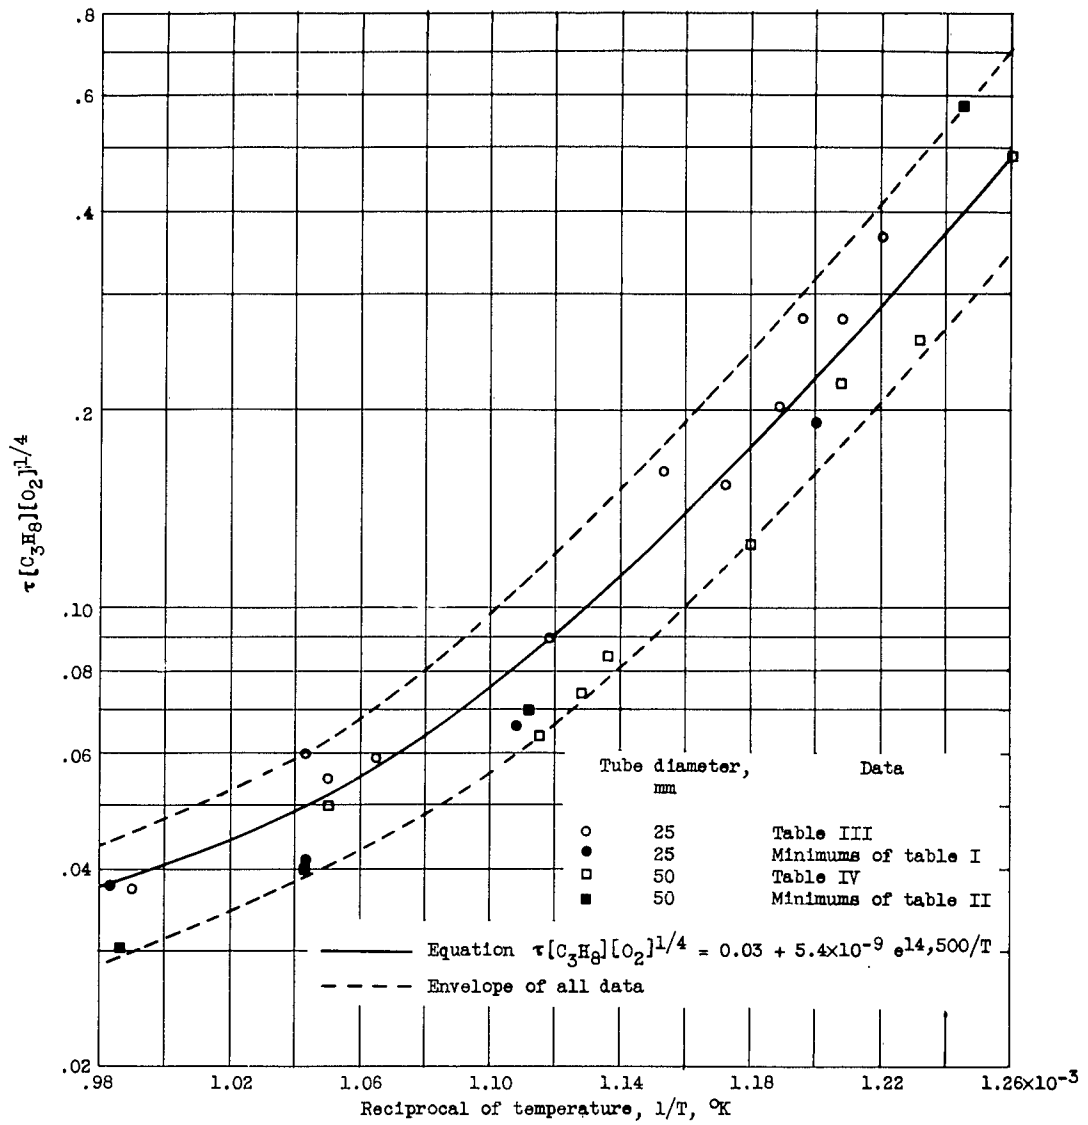


Figure 8. - Variation of parameter $\tau[C_3H_8][O_2]^{1/4}$ with reciprocal of temperature.

<p>NACA RM E54B19 National Advisory Committee for Aeronautics. VARIATION OF SPONTANEOUS IGNITION DELAYS WITH TEMPERATURE AND COMPOSITION FOR PROPANE-OXYGEN-NITROGEN MIXTURES AT ATMOSPHERIC PRESSURE. Joseph L. Jackson and Richard S. Brokaw. May 1954. 29p. diags., 4 tabs. (NACA RM E54B19)</p> <p>The ignition delays of propane-oxygen-nitrogen mixtures as a function of temperature and composition have been determined in a flow system. The variation of the ignition lag τ at constant temperature can be represented by the equation</p> $1/\tau = k [C_3H_8] [O_2]^{1/4}$ <p>where k is a constant. The temperature dependence of this equation over the range investigated (525° to 740° C) is given within 30 percent by the empirical equation:</p>	<p>NACA RM E54B19 National Advisory Committee for Aeronautics. VARIATION OF SPONTANEOUS IGNITION DELAYS WITH TEMPERATURE AND COMPOSITION FOR PROPANE-OXYGEN-NITROGEN MIXTURES AT ATMOSPHERIC PRESSURE. Joseph L. Jackson and Richard S. Brokaw. May 1954. 29p. diags., 4 tabs. (NACA RM E54B19)</p> <p>The ignition delays of propane-oxygen-nitrogen mixtures as a function of temperature and composition have been determined in a flow system. The variation of the ignition lag τ at constant temperature can be represented by the equation</p> $1/\tau = k [C_3H_8] [O_2]^{1/4}$ <p>where k is a constant. The temperature dependence of this equation over the range investigated (525° to 740° C) is given within 30 percent by the empirical equation:</p>	<p>NACA RM E54B19 National Advisory Committee for Aeronautics. VARIATION OF SPONTANEOUS IGNITION DELAYS WITH TEMPERATURE AND COMPOSITION FOR PROPANE-OXYGEN-NITROGEN MIXTURES AT ATMOSPHERIC PRESSURE. Joseph L. Jackson and Richard S. Brokaw. May 1954. 29p. diags., 4 tabs. (NACA RM E54B19)</p> <p>The ignition delays of propane-oxygen-nitrogen mixtures as a function of temperature and composition have been determined in a flow system. The variation of the ignition lag τ at constant temperature can be represented by the equation</p> $1/\tau = k [C_3H_8] [O_2]^{1/4}$ <p>where k is a constant. The temperature dependence of this equation over the range investigated (525° to 740° C) is given within 30 percent by the empirical equation:</p>	<p>NACA RM E54B19 National Advisory Committee for Aeronautics. VARIATION OF SPONTANEOUS IGNITION DELAYS WITH TEMPERATURE AND COMPOSITION FOR PROPANE-OXYGEN-NITROGEN MIXTURES AT ATMOSPHERIC PRESSURE. Joseph L. Jackson and Richard S. Brokaw. May 1954. 29p. diags., 4 tabs. (NACA RM E54B19)</p> <p>The ignition delays of propane-oxygen-nitrogen mixtures as a function of temperature and composition have been determined in a flow system. The variation of the ignition lag τ at constant temperature can be represented by the equation</p> $1/\tau = k [C_3H_8] [O_2]^{1/4}$ <p>where k is a constant. The temperature dependence of this equation over the range investigated (525° to 740° C) is given within 30 percent by the empirical equation:</p>
<p>Fuels - Properties, Physical and Chemical (3.4.2) Combustion Research - General (3.5.1) Combustion - Reaction Mechanism (3.5.1.5) Combustion - Ignition of Gases (3.5.1.6) I. Jackson, Joseph L. II. Brokaw, Richard S. III. NACA RM E54B19</p>	<p>Fuels - Properties, Physical and Chemical (3.4.2) Combustion Research - General (3.5.1) Combustion - Reaction Mechanism (3.5.1.5) Combustion - Ignition of Gases (3.5.1.6) I. Jackson, Joseph L. II. Brokaw, Richard S. III. NACA RM E54B19</p>	<p>Fuels - Properties, Physical and Chemical (3.4.2) Combustion Research - General (3.5.1) Combustion - Reaction Mechanism (3.5.1.5) Combustion - Ignition of Gases (3.5.1.6) I. Jackson, Joseph L. II. Brokaw, Richard S. III. NACA RM E54B19</p>	<p>Fuels - Properties, Physical and Chemical (3.4.2) Combustion Research - General (3.5.1) Combustion - Reaction Mechanism (3.5.1.5) Combustion - Ignition of Gases (3.5.1.6) I. Jackson, Joseph L. II. Brokaw, Richard S. III. NACA RM E54B19</p>
<p>Fuels - Properties, Physical and Chemical (3.4.2) Combustion Research - General (3.5.1) Combustion - Reaction Mechanism (3.5.1.5) Combustion - Ignition of Gases (3.5.1.6) I. Jackson, Joseph L. II. Brokaw, Richard S. III. NACA RM E54B19</p>	<p>Fuels - Properties, Physical and Chemical (3.4.2) Combustion Research - General (3.5.1) Combustion - Reaction Mechanism (3.5.1.5) Combustion - Ignition of Gases (3.5.1.6) I. Jackson, Joseph L. II. Brokaw, Richard S. III. NACA RM E54B19</p>	<p>Fuels - Properties, Physical and Chemical (3.4.2) Combustion Research - General (3.5.1) Combustion - Reaction Mechanism (3.5.1.5) Combustion - Ignition of Gases (3.5.1.6) I. Jackson, Joseph L. II. Brokaw, Richard S. III. NACA RM E54B19</p>	<p>Fuels - Properties, Physical and Chemical (3.4.2) Combustion Research - General (3.5.1) Combustion - Reaction Mechanism (3.5.1.5) Combustion - Ignition of Gases (3.5.1.6) I. Jackson, Joseph L. II. Brokaw, Richard S. III. NACA RM E54B19</p>



NACA RM E54B19

$$\tau \left[\text{C}_3\text{H}_8 \right] \left[\text{O}_2 \right]^{1/4} = 0.030 + 5.4 \times 10^{-9} e^{14,500/T}$$

with concentrations expressed as mole fractions and temperature as degrees Kelvin.

Copies obtainable from NACA, Washington



NACA RM E54B19

$$\tau \left[\text{C}_3\text{H}_8 \right] \left[\text{O}_2 \right]^{1/4} = 0.030 + 5.4 \times 10^{-9} e^{14,500/T}$$

with concentrations expressed as mole fractions and temperature as degrees Kelvin.

Copies obtainable from NACA, Washington



NACA RM E54B19

$$\tau \left[\text{C}_3\text{H}_8 \right] \left[\text{O}_2 \right]^{1/4} = 0.030 + 5.4 \times 10^{-9} e^{14,500/T}$$

with concentrations expressed as mole fractions and temperature as degrees Kelvin.

Copies obtainable from NACA, Washington



NACA RM E54B19

$$\tau \left[\text{C}_3\text{H}_8 \right] \left[\text{O}_2 \right]^{1/4} = 0.030 + 5.4 \times 10^{-9} e^{14,500/T}$$

with concentrations expressed as mole fractions and temperature as degrees Kelvin.

Copies obtainable from NACA, Washington

