

UNCLASSIFIED

AD NUMBER
AD030286
NEW LIMITATION CHANGE
TO Approved for public release, distribution unlimited
FROM Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; JAN 1954. Other requests shall be referred to Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD 21005-5066.
AUTHORITY
15 Jun 1970, ST-A per USABRL ltr

THIS PAGE IS UNCLASSIFIED

Armed Services Technical Information Agency

Because of our limited supply, you are requested to return this copy WHEN IT HAS SERVED YOUR PURPOSE so that it may be made available to other requesters. Your cooperation will be appreciated.

AD


30286

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

Reproduced by
DOCUMENT SERVICE CENTER
KNOTT BUILDING, DAYTON, 2, OHIO

UNCLASSIFIED

AD 120 30286
ASTIA FILE COPY

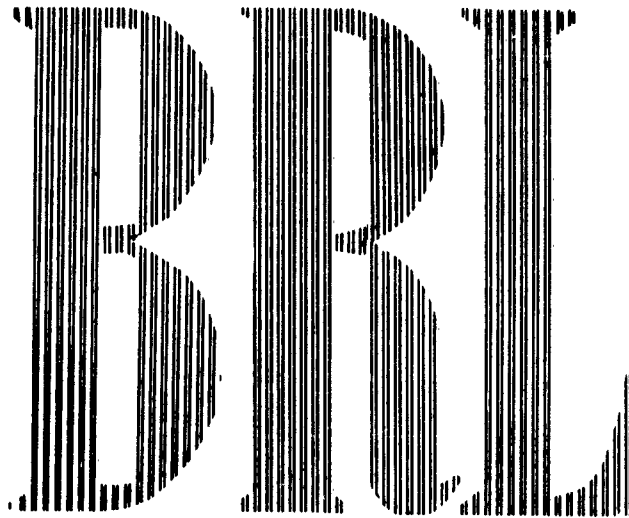

REPORT No. 894

**Degenerate Unsteady
Compressible Flows**

J. H. GIESE

DEPARTMENT OF THE ARMY PROJECT Nos. 503-03-001 AND 503-06-002
ORDNANCE RESEARCH AND DEVELOPMENT PROJECT Nos. TB3-0108H
AND TB3-0007K

BALLISTIC RESEARCH LABORATORIES



ABERDEEN PROVING GROUND, MARYLAND

BALLISTIC RESEARCH LABORATORIES

REPORT NO. 894

January 1954

DEGENERATE UNSTEADY COMPRESSIBLE FLOWS

J. H. Giese

Department of the Army Project Nos. 503-03-001 and 503-06-002
Ordnance Research and Development Project Nos. TB3-0108H and TB3-0007K

ABERDEEN PROVING GROUND, MARYLAND

BALLISTIC RESEARCH LABORATORIES

REPORT NO. 894

JHGiese/ddh
Aberdeen Proving Ground, Md.
January 1954

DEGENERATE UNSTEADY COMPRESSIBLE FLOWS

ABSTRACT

Characteristic conditions are derived for non-linearized three dimensional compressible flows in which the entropy of any fluid particle remains constant.

Irrotational isentropic flows for which the maps x, y, z, t

$$\longrightarrow \partial\phi/\partial x, \partial\phi/\partial y, \partial\phi/\partial z, \partial\phi/\partial t$$

have fewer than four dimensions have been studied by applying a degenerate Legendre transformation to the equation of the velocity potential function, ϕ . The class of such flows includes steady conical flows and pseudo-stationary flows, for example. All results presented are in the nature of statements about geometrical properties of the map, of certain characteristic hypersurfaces in space-time, etc.

A number of problems which could be expected to lead to pseudo-stationary flows are outlined. Most, but not all, are well known problems that have been solved at least in linearized form.

1. Introduction.

The development of the theory of compressible perfect fluids has been impeded by the fact that the basic equations are non-linear. Therefore it has been profitable to consider special examples to discover general principles and to gain insight into the structure of flows. Specializations are usually based on such properties as irrotationality, reduction in number of dimensions, radial, cylindrical, or axial symmetry, etc.

For steady irrotational flow it has been found instructive to study those flows for which the mapping $(x, y, z) \rightarrow (u, v, w) = \nabla\phi$, where ϕ is the velocity potential, takes the physical space onto a one- or two-dimensional image in the hodograph space [5]¹. This leads to consideration of the class of conical flows which are interesting and important not only in their own right, but also for the fact that they appear to be connected with the singularities of steady flow fields near the tips or edges of bodies with discontinuous normals. That is, the limits attained by the velocity components and other flow functions at the tip will depend, in general, on the direction from which the tip is approached. An argument can be devised which makes it plausible to conclude that the (u, v, w) image or hodograph is the same as that for the flow which would occur about the tangent cone at the tip under the same free stream conditions.

Such considerations have suggested that it would be equally profitable to undertake the study of non-steady irrotational flows for which the mapping $(t, x, y, z) \rightarrow (\partial\phi/\partial t, u, v, w) = (\partial\phi/\partial t, \nabla\phi)$, where ϕ is the velocity potential, takes space-time onto a one-, two-, or three-dimensional image. The image will be called the hodograph, and when it has fewer than four dimensions, the hodograph and the flow will be said to be degenerate. The study leads, eventually, to the consideration of non-steady conical flows, also referred to as pseudo-stationary or self-similar flows. Such flows occur in the establishment of steady conical flows about conical bodies in shock tubes, not to mention other examples discussed at the end of the paper. It is to be expected that they are also related to the behavior of flow fields near singular points in space-time. That is, the limits attained by velocity components and other flow functions at the singular point should depend, in general, on the direction from which the singular point is approached. If this is in a region of potential flow, one would conjecture that the $(\partial\phi/\partial t, u, v, w)$ image or hodograph is the same as that for one of the degenerate unsteady flows considered here. This phenomenon would occur, for example, in the one-dimensional flow behind a piston which is withdrawn with increasing speed and which experiences a discontinuous increase in speed at some instant. The singular point would be on the piston curve at the time and place where the discontinuity in velocity occurs.

1. Bracketed numbers designate references at the end of the paper.

Much of the discussion is concerned with characteristic subspaces of space-time or of the hodographs. To clarify this discussion, and also because it casts some light on the general wave nature of unsteady flows, a section on the characteristic conditions for general unsteady flows has been included.

2. Fundamental Equations.

Non-steady, non-viscous flow is governed by the equations of motion

$$(2.1) \quad \partial u_i / \partial t + u_j \partial u_i / \partial x_j = - \rho^{-1} \partial p / \partial x_i$$

the equation of continuity

$$(2.2) \quad \partial \rho / \partial t + \partial (\rho u_j) / \partial x_j = 0$$

a pressure density relation

$$(2.3) \quad p = e^{s/c_v} \rho^\gamma$$

and constancy of entropy for a fluid particle (between passages through successive shock fronts)

$$(2.4) \quad \partial s / \partial t + u_j \partial s / \partial x_j = 0$$

Here $u_i(x, t)$ ($i = 1, 2, 3$) are cartesian velocity components at time t at the point with rectangular coordinates x_1, x_2, x_3 ; $p(x, t)$, $\rho(x, t)$, and $s(x, t)$ are the pressure, density, and entropy per unit mass, respectively; and γ is the ratio of the specific heat at constant pressure to that at constant volume. The convention has been adopted that repeated indices in any sum imply summation over their range. The pressure can be eliminated from (2.1) by means of (2.3). It will be assumed hereafter that this has been done.

Occasionally it will be more advantageous to use vector notation. Then the preceding equations take the form

$$(2.1v) \quad \partial \bar{u} / \partial t + \bar{u} \cdot \nabla \bar{u} = - \rho^{-1} \nabla p$$

$$(2.2v) \quad \partial \rho / \partial t + \nabla \cdot (\rho \bar{u}) = 0$$

$$(2.4v) \quad \partial s / \partial t + \bar{u} \cdot \nabla s = 0$$

In some parts of the following discussion it will be convenient to consider irrotational isentropic flows. For these $s = \text{constant}$, and

$$(2.5) \quad \partial u_i / \partial x_j = \partial u_j / \partial x_i$$

Now there exists a velocity potential ϕ such that

$$(2.6) \quad u_i = \partial \phi / \partial x_i$$

Then (2.1), (2.3), and (2.6) imply Bernoulli's equation $\partial \phi / \partial t + \frac{1}{2} u_i u_i + \gamma p / (\gamma - 1) \rho = df/dt$ for some function $f(t)$. Since $f(t)$ can be absorbed into ϕ without affecting (2.1) to (2.6), Bernoulli's equation can be expressed as

$$(2.7) \quad a^2 = \partial p / \partial \rho = \gamma p / \rho = -(\gamma - 1) \left(\frac{1}{2} u_i u_i + \partial \phi / \partial t \right)$$

where a is the speed of sound. Finally, eliminate p and ρ from (2.1) and (2.2) by means of (2.3) and (2.7) to obtain

$$(2.8) \quad (a^2 \delta_{ij} - u_i u_j) \partial \phi / \partial x_i \partial x_j - 2u_j \partial^2 \phi / \partial x_j \partial t - \partial^2 \phi / t^2 = 0$$

where Kronecker's delta, $\delta_{ij} = 1$ (0) accordingly as $i =$ (\neq) j .

3. Characteristic Conditions.

A standard exercise in the theory of partial differential equations is Cauchy's problem. For the system (2.1v), (2.2v), and (2.4v) this can be stated as follows. Consider a three-dimensional initial hypersurface in space-time.

$$(3.1) \quad \bar{x} = \bar{X}(r_1, r_2, r_3) = \bar{X}(r), \quad t = T(r_1, r_2, r_3) = T(r)$$

where the

$$(3.2) \quad \text{rank of } \left\| \frac{\partial \bar{X}}{\partial r_i}, \frac{\partial T}{\partial r_i} \right\| = 3$$

Construct solutions $\bar{u}(\bar{x}, t)$, $\rho(\bar{x}, t)$, and $s(\bar{x}, t)$ which assume on (3.1) the prescribed initial values

$$(3.3) \quad \begin{aligned} \bar{u}(\bar{X}(r), T(r)) &= \bar{U}(r) \\ \rho(\bar{X}(r), T(r)) &= R(r) \\ s(\bar{X}(r), T(r)) &= S(r) \end{aligned}$$

subject to appropriate assumptions about the continuity and differentiability of the functions (3.1) and (3.3).

If the function $T(r)$ is a constant, T_0 , then (3.1) is merely some three-dimensional region of the $x_1 x_2 x_3$ space at a fixed time $t = T_0$.

If $T(r)$ is not a constant function, then for the solutions of $T(r) = T_0 = \text{constant}$ the functions $\bar{X}(r)$ define a surface in the $x_1 x_2 x_3$ -space,

the shape, location, and orientation of which depend on the time T_0 .

In other words, (3.1) can be interpreted as defining a moving twisting, deforming surface in the $x_1x_2x_3$ -space.

If \bar{X} , T , \bar{U} , R , and S are analytic in r_1 , r_2 , and r_3 , try to expand $\bar{u}(\bar{x}, t)$, $\rho(\bar{x}, t)$, and $s(\bar{x}, t)$ in Taylor's series about some point \bar{X}^* , T^* of (3.1). The values of

$$(3.4) \quad \nabla \bar{u}, \partial \bar{u} / \partial t, \nabla \rho, \partial \rho / \partial t, \nabla s, \partial s / \partial t$$

required for this expansion must satisfy (2.1v), (2.2v), (2.4v), and the strip conditions:

$$(3.5) \quad \bar{X}_i \cdot \nabla \bar{u} + T_i \partial \bar{u} / \partial t = \bar{U}_i$$

$$(3.6) \quad \bar{X}_i \cdot \nabla \rho + T_i \partial \rho / \partial t = R_i$$

$$(3.7) \quad \bar{X}_i \cdot \nabla s + T_i \partial s / \partial t = S_i$$

where $f_i = \partial f / \partial r_i$ for any $f(r)$, and $i = 1, 2, 3$. If these twenty equations have a unique solution (3.4) on (3.1), then the values of all partial derivatives of all orders are uniquely determined on (3.1). By the Cauchy-Kowalewski theorem, the Taylor's series for $\bar{u}(\bar{x}, t)$, $\rho(\bar{x}, t)$, and $s(\bar{x}, t)$ are unique, converge near \bar{X}^* , T^* , and satisfy (2.1v), (2.2v), (2.4v), and (3.3).

In all flow problems \bar{u} , ρ , and s must be continuous in regions of space-time between shock fronts or contact discontinuities, but (3.4) or the partial derivatives of higher order merely need to be continuous almost everywhere, so \bar{u} , ρ and s are not necessarily analytic. Hence some partial derivatives of \bar{u} , ρ , or s may have a discontinuity. If this is interpreted as a weak disturbance, it is important from physical and computational considerations to determine how this is propagated. For simplicity, suppose some of (3.4) are discontinuous at \bar{X}^* , T^* on (3.1), though the discussion can also be adapted to partial derivatives of higher order. Then it must be impossible to determine (3.4) uniquely at \bar{X}^* , T^* from (2.1v), (2.2v), (2.4v), and (3.5) to (3.7), but this system must still be compatible. For theoretical and numerical applications the most interesting situation is that in which (3.4) fail to be uniquely determined everywhere on (3.1) rather than just at \bar{X}^* , T^* . In this case (3.1) will be said to be a characteristic hypersurface, and the compatibility conditions for the system of twenty linear equations, which are expressed solely in terms of (hyper-)surface data (3.1) and (3.3) and their surface (tangential) derivatives, will be called characteristic conditions.

An application of Cramer's rule to (3.4) yields $(\bar{X}_1 \bar{X}_2 \bar{X}_3) \nabla \bar{u} =$

$$\sum_j (\bar{X}_{j+1} \times \bar{X}_{j+2}) (\bar{U}_j - T_j \partial \bar{u} / \partial t), \text{ where } (\bar{A} \bar{B} \bar{C}) = \bar{A} \cdot \bar{B} \times \bar{C} \text{ for any}$$

vectors \bar{A} , \bar{B} , \bar{C} , and $j+1$ and $j+2$ are to be reduced mod 3. Now the four components N_0 , \bar{N} of a normal to (3.1) satisfy

$$(3.8) \quad N_0 T_i + \bar{N} \cdot \bar{X}_i = 0$$

By (3.2) this system has one linearly independent solution $N_0 = (\bar{X}_1 \bar{X}_2 \bar{X}_3)$,

$$\bar{N} = - \sum_j T_j \bar{X}_{j+1} \times \bar{X}_{j+2}. \text{ Hence}$$

$$(3.9) \quad \begin{aligned} N_0 \nabla \bar{u} &= \bar{N} \partial \bar{u} / \partial t + \sum_j \bar{X}_{j+1} \times \bar{X}_{j+2} \bar{U}_j \\ N_0 \nabla \rho &= \bar{N} \partial \rho / \partial t + \sum_j \bar{X}_{j+1} \times \bar{X}_{j+2} R_j \\ N_0 \nabla s &= \bar{N} \partial s / \partial t + \sum_j \bar{X}_{j+1} \times \bar{X}_{j+2} S_j \end{aligned}$$

Then by (2.1v), (2.2v), (2.4v), and (3.9)

$$(3.10) \quad \begin{aligned} (N_0 + \bar{U} \cdot \bar{N}) \partial \bar{u} / \partial t + R^{-1} \bar{N} \left[A^2 \partial \rho / \partial t + (\partial P / \partial s) \partial s / \partial t \right] + \\ \sum_j (\bar{X}_{j+1} \times \bar{X}_{j+2}) \left[\bar{U} \bar{U}_j + R^{-1} (A^2 R_j + S_j \partial P / \partial s) \right] = 0 \end{aligned}$$

$$(3.11) \quad (N_0 + \bar{U} \cdot \bar{N}) \partial \rho / \partial t + R \bar{N} \partial \bar{u} / \partial t + \sum_j (\bar{X}_{j+1} \times \bar{X}_{j+2}) \cdot (R \bar{U})_j = 0$$

$$(3.12) \quad (N_0 + \bar{U} \cdot \bar{N}) \partial s / \partial t + \sum_j (\bar{U} \cdot \bar{X}_{j+1} \bar{X}_{j+2}) S_j = 0$$

where $P = e^{S/cv_R Y}$ and $A^2 = \partial P / \partial R$. The scalar product of \bar{N} and (3.10) yields

$$\begin{aligned} (N_0 + \bar{U} \cdot \bar{N}) \bar{N} \cdot \partial \bar{u} / \partial t + R^{-1} \bar{N}^2 \left[A^2 \partial \rho / \partial t + (\partial P / \partial s) \partial s / \partial t \right] + \\ \sum_j \left[\bar{N} \cdot \bar{U}_j (\bar{U} \cdot \bar{X}_{j+1} \bar{X}_{j+2}) + R^{-1} (A^2 R_j + S_j \partial P / \partial s) (\bar{N} \cdot \bar{X}_{j+1} \bar{X}_{j+2}) \right] = 0 \end{aligned}$$

The determinant of the coefficients of

$$(3.14) \quad \bar{N} \cdot \partial \bar{u} / \partial t, \quad \partial \rho / \partial t, \quad \partial s / \partial t$$

in (3.11) to (3.13) is

$$(3.15) \quad \Delta = (N_0 + \bar{U} \cdot \bar{N}) \left[(N_0 + \bar{U} \cdot \bar{N})^2 - A^2 \bar{N}^2 \right]$$

If $\Delta \neq 0$, then (3.14) are uniquely determined, and since $N_0 + \bar{U} \cdot \bar{N} \neq 0$, $\partial \bar{u} / \partial t$ are unique by (3.10). If in addition $N_0 \neq 0$, then by (3.9) $\nabla \bar{u}$, $\nabla \rho$, and ∇s are unique. Thus a necessary condition for non-unique values of (3.4) is

$$(3.16) \quad N_0 \Delta = 0$$

Case 1: If the Jacobian

$$(3.17) \quad N_0 = (\bar{X}_1 \bar{X}_2 \bar{X}_3) = 0$$

its rank is two by (3.2), and also $T_i \neq 0$ for some i . Hence $F(\bar{X}) = 0$ for some F . In other words, the initial surface in the $x_1 x_2 x_3$ - space does not vary with the passage of time. Now (3.9) are compatible since $\bar{N} \cdot \bar{X}_i = 0$, and hence $\bar{N} \times (\bar{X}_{j+1} \times \bar{X}_{j+2}) = 0$. Their unique solutions satisfy

$$N^2 \partial \bar{u} / \partial t = \sum_j (\bar{N} \bar{X}_{j+1} \bar{X}_{j+2}) \bar{U}_j, \quad N^2 \partial \rho / \partial t = \sum_j (\bar{N} \bar{X}_{j+1} \bar{X}_{j+2}) R_j$$

$$N^2 \partial s / \partial t = \sum_j \bar{N} \bar{X}_{j+1} \bar{X}_{j+2} S_j$$

By means of these equations eliminate $\partial \bar{u} / \partial t$, $\partial \rho / \partial t$, and $\partial s / \partial t$ from

(3.10) to (3.12) to obtain

$$(3.18) \quad \sum_j (\bar{N} \bar{X}_{j+1} \bar{X}_{j+2}) \left[\bar{U} \cdot \bar{N} \bar{U}_j + R^{-1} \bar{N} (A^2 R_j + S_j \partial \rho / \partial s) \right] +$$

$$N^2 \sum_j (\bar{X}_{j+1} \times \bar{X}_{j+2}) \left[\bar{U} \bar{U}_j + R^{-1} (A^2 R_j + S_j \partial \rho / \partial s) \right] = 0$$

$$(3.19) \quad \sum_j \left[(\bar{N} \bar{X}_{j+1} \bar{X}_{j+2}) \bar{N} + N^2 \bar{X}_{j+1} \times \bar{X}_{j+2} \right] \cdot (R \bar{U})_j = 0$$

$$(3.20) \quad \sum_j \left[\bar{U} \cdot \bar{N} (\bar{N} \bar{X}_{j+1} \bar{X}_{j+2}) + N^2 (\bar{U} \bar{X}_{j+1} \bar{X}_{j+2}) \right] S_j = 0$$

Case 2: Suppose $N_0 \neq 0$, but

$$(3.21) \quad N_0 + \bar{U} \cdot \bar{N} = 0$$

Then the compatibility conditions for (3.10) become

$$(3.22) \quad \bar{N} \times \sum_j (\bar{X}_{j+1} \times \bar{X}_{j+2}) \left[\bar{U} \bar{U}_j + R^{-1} (A^2 R_j + S_j \partial \rho / \partial s) \right] = 0$$

If these are satisfied, then (3.10) is equivalent to the single equation (3.13), which now takes the form

$$(3.13.2) \quad 0 = R^{-1} N^2 A^2 \partial \rho / \partial t + (\partial P / \partial S) \partial s / \partial t +$$

$${}_j \bar{N} \cdot \bar{U}_j (\bar{U} \bar{X}_{j+1} \bar{X}_{j+2}) + R^{-1} (A^2 R_j + S_j \partial P / \partial S) (\bar{N} \bar{X}_{j+1} \bar{X}_{j+2})$$

while (3.11) becomes

$$(3.11.2) \quad R \bar{N} \cdot \partial \bar{u} / \partial t + {}_j (\bar{X}_{j+1} \bar{X}_{j+2}) \cdot (R \bar{U})_j = 0$$

Finally (3.12) yields

$$(3.23) \quad {}_j (\bar{U} \bar{X}_{j+1} \bar{X}_{j+2}) S_j = 0$$

By (3.11.2) and (3.13.2) three of the five functions (3.14) are arbitrary. Hence there is a three-parameter family of solutions (3.4).

To interpret (3.21) proceed as follows. Suppose a solution

$u(\bar{x}, t)$, $\rho(\bar{x}, t)$, $s(\bar{x}, t)$ of (2.1v), (2.2v), and (2.4v) is known. First seek an integral $t = f(\bar{x})$ of (3.21). In this case $N_0 = -1$, $\bar{N} = \nabla f \equiv \bar{p}$, and (3.21) becomes

$$(3.24) \quad \bar{u} \cdot \bar{p} - 1 = 0$$

where $\bar{u} = \bar{u}(\bar{x}, f)$. Solutions of this first order partial differential equation can be constructed by passing through each point of some two-dimensional initial manifold

$$(3.25) \quad \bar{x} = \bar{x}^*(r_1, r_2), \quad t = t^*(r_1, r_2)$$

integral curves of the system

$$(3.26) \quad \begin{aligned} d\bar{x} / dr_3 &= \bar{u}, & dt / dr_3 &= \bar{u} \cdot \bar{p} = 1 \\ d\bar{p} / dr_3 &= - (\bar{u} \cdot \bar{p} - (p \cdot \partial \bar{u} / \partial t) \bar{p}) \end{aligned}$$

with initial conditions $\bar{u} = \bar{u}^*(r_1, r_2)$ (known, of course) and $\bar{p} = \bar{p}^*(r_1, r_2)$ chosen to be solutions of $\bar{u}^* \cdot \bar{p}^* = 1$ and $\partial t^* / \partial r_\alpha + \bar{p}^* \cdot \partial \bar{x}^* / \partial r_\alpha = 0$

($\alpha = 1, 2$). By (3.26) assume $r_3 = t$ with no loss of generality. Hence $d\bar{x} / dt = \bar{u}$. In other words, at all times t the surface $\bar{x} = \bar{x}(r_1, r_2; t)$

is always composed of the same particles, i.e., the integral surfaces $t = f(\bar{x})$ of (3.21) are particle fronts.

Integral surfaces of (3.21) which cannot be represented by $t = f(\bar{x})$ must satisfy some equation $g(\bar{x}) = 0$, where g is independent of t . On such a surface $N_0 = 0$, contrary to the hypotheses for this case.

Case 3: Suppose $N_0(N_0 + \bar{U} \cdot \bar{N}) \neq 0$, but

$$(3.27) \quad (N_0 + \bar{U} \cdot \bar{N})^2 - A^2 N^2 = 0$$

By (3.12) $\partial s / \partial t$ is unique. A compatibility condition for (3.11) and (3.13) is

$$(3.28) \quad \sum_j \left\{ (\bar{U} \cdot \bar{x}_{j+1} \bar{x}_{j+2}) \left[(N_0 + \bar{U} \cdot \bar{N}) \bar{N} \cdot \bar{U}_j - R^{-1} N^2 (A^2 R_j + S_j \partial P / \partial S) \right] + \right. \\ \left. (\bar{N} \cdot \bar{x}_{j+1} \bar{x}_{j+2}) (N_0 + \bar{U} \cdot \bar{N}) R^{-1} (A^2 R_j + S_j \partial P / \partial S) - \right. \\ \left. A^2 N^2 (\bar{U}_j \cdot \bar{x}_{j+1} \bar{x}_{j+2}) \right\} = 0$$

If this is satisfied, only three of (3.10) and (3.11) are independent, and there is a one-parameter family of solutions (3.4).

To interpret (3.27), again suppose a solution of $\bar{u}(\bar{x}, t)$, $\rho(\bar{x}, t)$, $s(\bar{x}, t)$ of (2.1v), (2.2v), and (2.4v) is known. Seek integrals $t = f(\bar{x})$ of (3.27). Again $N_0 = -1$, $\bar{N} = \nabla f \equiv \bar{p}$, and (3.27) becomes

$$(3.29) \quad (\bar{u} \cdot \bar{p} - 1)^2 - a^2 p^2 = 0$$

Solutions of this first order partial differential equation can be constructed by passing through each point of some two-dimensional initial manifold (3.25) integral curves of the system

$$(3.30) \quad \frac{d\bar{x}}{dr_3} = (\bar{u} \cdot \bar{p} - 1) \bar{u} - a^2 \bar{p}, \quad \frac{dt}{dr_3} = \bar{p} \cdot \frac{d\bar{x}}{dr_3} = \bar{u} \cdot \bar{p} - 1 \\ \frac{d\bar{p}}{dr_3} = - (\bar{u} \cdot \bar{p} - 1) (\nabla \bar{u}) \cdot \bar{p} + p^2 a \nabla a \\ - \left[(\bar{u} \cdot \bar{p} - 1) \bar{u}_t \cdot \bar{p} - a a_t p^2 \right] \bar{p}$$

with initial conditions $\bar{p}^*(r_1, r_2)$ determined by

$$(3.31) \quad (u^* \cdot p^* - 1)^2 - a^{*2} P^{*2} = 0$$

$$(3.32) \quad \partial t^* / \partial r_\alpha + \bar{p}^* \cdot \partial \bar{x}^* / \partial r_\alpha = 0, \quad \alpha = 1, 2$$

An important special case is that for which (3.25) degenerates into a single point $\bar{x}^* = \text{constant}$, $t^* = \text{constant}$. Then (3.32) need not be considered, and (3.31) yields a two-parameter set of initial values $\bar{p}^*(r_1, r_2)$. The set of all integral curves of (3.30) through \bar{x}^* , t^* for each set of initial values forms a characteristic hyperconoid. Eliminate r_3 from (3.30) to find

$$(3.33) \quad d\bar{x}/dt = \bar{u} - a^2 \bar{p}/(\bar{u} \cdot \bar{p} - 1)$$

and a similar equation for $d\bar{p}/dt$. At each instant t , the points $\bar{x}(r_1, r_2; t)$ on the characteristic hyperconoid integrals of (3.33) determine the boundary of the region into which a weak disturbance at (or sound wave) from \bar{x}^* at time t^* has propagated. By (3.29) and (3.33) $(d\bar{x}/dt - \bar{u})^2 = a^2$. Thus to find the possible initial velocities $d\bar{x}/dt$ at time t^* , to draw all vectors from the point \bar{x}^* in $x_1 x_2 x_3$ -space to the surface of the sphere with center at $\bar{x}^* + \bar{u}^*$ and radius a^* . This yields the well known result that weak disturbances at \bar{x}^* at time t^* propagate in all directions in subsonic flows, but only into the downstream nappe of the Mach conoid with vertex at \bar{x}^* in supersonic flows.

To put the results just obtained into a more familiar light consider one-dimensional unsteady flow. Now (3.1) can be given the form $t = t(r_1)$, $\bar{x} = (x(r_1), r_2, r_3)$, and $\bar{u} = (u(r_1), 0, 0)$. (3.21) and (3.23) yield

$$(3.33) \quad dx = u dt, \quad ds = 0$$

while (3.27) and (3.28) yield $(dx - u dt)^2 = a^2 (dt)^2$, and if $dx \neq 0$,

$(dx - u dt) du + \rho^{-1} dt (a^2 dp + \partial p / \partial s ds) = 0$. In their usual form these are

$$(3.35) \quad dx = \pm a dt, \quad du = \pm^{-1} (a dp + a^{-1} \partial p / \partial s ds)$$

Similarly, for

$$\bar{u} = (ux/r, uy/r, 0), \quad r^2 = x^2 + y^2$$

$$[\bar{u} = (ux/r, uy/r, uz/r), \quad r^2 = x^2 + y^2 + z^2]$$

where $u = u(r, t)$, and for (3.1) of the form $t = t(r_1)$,

$$\bar{x} = (r(r_1) \cos r_2, r(r_1) \sin r_2, r_3)$$

$$[\bar{x} = (r(r_1) \cos r_2 \cos r_3, r(r_1) \sin r_2 \cos r_3, r(r_1) \sin r_3)]$$

equations (3.21), (3.22), (3.27), and (3.28) reduces to the characteristic equations for unsteady cylindrically [spherically] symmetrical flow.

4. Specializations. Degenerate Legendre transformations. (2.1), (2.2), and (2.4) form a system of non-linear partial differential equations for five functions of four independent variables. At present the theory is much more highly developed for systems with two independent variables than for three or four. Hence it is profitable to consider examples of unsteady flows with special properties that make it possible to reduce the number of independent variables. A common procedure is to consider one-dimensional or cylindrically or spherically symmetrical flows. A slightly more general technique which has proved fruitful in the study of steady flows [5] is to seek solutions of the form

$$(4.1) \quad u_i = u_i(\mu), \quad \rho = \rho(\mu), \quad s = s(\mu)$$

where $\mu = \mu_1, \dots, \mu_n$; $\mu_\alpha = \mu_\alpha(x_1, x_2, x_3, t) = \mu_\alpha(x, t)$; $\alpha = 1, \dots, n$;

$1 \leq n \leq 4$; and the

$$(4.2) \quad \text{rank of } \left\| \frac{\partial \mu_\alpha}{\partial x_i}, \frac{\partial \mu_\alpha}{\partial t} \right\| = n$$

As in the steady case, this leads to very interesting classes of flows. Several important examples of this type, investigation of which should yield valuable results both in fluid mechanics and in the theory of partial differential equations, will be mentioned in Section 8. For simplicity the discussion in this and the three following sections will be restricted to irrotational isentropic flow. Now $s = \text{constant}$, and

$$(4.3) \quad u_i = \partial \phi / \partial x_i$$

where ϕ , p , and ρ satisfy the partial differential equation (2.8) and Bernoulli's equation (2.7). Let

$$(4.4) \quad x_0 = t, \quad u_0 = \partial \phi / \partial t$$

where by (2.7) $u_0 = u_0(\mu)$. Assume that the

$$(4.5) \quad \text{rank of } \left\| \frac{\partial u_I}{\partial \mu_\alpha} \right\| = n,$$

where $I = 0, 1, 2, 3$.

By analogy with the usage in [5], the image u_I of x_I under the mapping $x_I \rightarrow u_I$ will be called its hodograph. Now (4.1) defines an n -dimensional subspace in the hodograph space. The flow will be said to be a single, double, or triple wave accordingly as $n=1, 2$, or 3 ; n -dimensional subspaces of either the hodograph space or of space time will be called curves for $n = 1$; surfaces for $n = 2$ and hypersurfaces for $n = 3$. If $n \leq 3$ the hodograph and

the flow will be said to be degenerate. With no loss of generality assume that $1 \leq n \leq 3$. Now let $k(x, t) = \phi - x_I u_I(\mu)$. Then $\partial k / \partial x_J = - (x_I \partial u_I / \partial \mu_\alpha) (\partial \mu_\alpha / \partial x_J)$, and the rank of $\| \partial k / \partial x_J, \partial \mu_\alpha / \partial x_J \| = n$ also, which implies $k = k(\mu)$. Now

$$(4.6) \quad \phi = k(\mu) + x_I u_I(\mu)$$

and by (4.2)

$$(4.7) \quad x_I \partial u_I / \partial \mu_\alpha + \partial k / \partial \mu_\alpha = 0$$

whence

$$(4.8) \quad (x_I \partial^2 u_I / \partial \mu_\alpha \partial \mu_\beta + \partial^2 k / \partial \mu_\alpha \partial \mu_\beta) \partial \mu_\beta / \partial x_J = - \partial u_J / \partial \mu_\alpha$$

Again by (4.2) the

$$(4.9) \quad \text{rank of } \| x_I \partial^2 u_I / \partial \mu_\alpha \partial \mu_\beta + \partial^2 k / \partial \mu_\alpha \partial \mu_\beta \| = n$$

Hereafter, assume that $u_I(\mu)$ and $k(\mu)$ have been chosen to satisfy (4.9).

Then (4.7) can be inverted to yield $\mu_\alpha(x)$.

By (4.1) a point on the hodograph is determined by setting $\mu_\alpha = \mu_{\alpha 0}$.

The set of points in space-time which is mapped onto $u_I(\mu_0)$ will be called its prototype. (4.7) implies

Theorem 4.1: Suppose the coordinate axes of space-time and the hodograph spaces are parallel. Then the prototype of a point $u_I(\mu_0)$ on an n-dimensional hodograph is the $(4 - n)$ - dimensional intersection of n hyperplanes (4.7) with normals parallel to the tangent vectors $\partial u_I / \partial \mu_\alpha$ at $u_I(\mu_0)$.

Let $D_\alpha = (\partial u_I / \partial \mu_\alpha) (\partial u_I / \partial \mu_\alpha)$, where α is not summed. If $D_\beta = 0$, but $\partial u_0 / \partial \mu_\beta \neq 0$ for some β , then (4.7) defines a $(4 - n)$ - dimensional region of $x_1 x_2 x_3$ -space at time $t = 1$ $(\partial k / \partial \mu_\beta) / (\partial u_0 / \partial \mu_\beta)$. If $D_\alpha \neq 0$ for all α , then (4.7) corresponds to the intersection of a set of n planes in $x_1 x_2 x_3$ -space which move with constant velocities $-(\partial u_0 / \partial \mu_\alpha) (\partial u_I / \partial \mu_\alpha) / D_\alpha$, where α is not summed. That is the points x_i that bear given values $u_i(\mu_0)$, $p(\mu_0)$, and $\rho(\mu_0)$ move with a constant velocity that depends on $\mu_{\alpha 0}$. This suggests

examining the possibility, considered at length in Section 8, of seeking flows with uniformly expanding geometry, in which all flow functions depend only on x_i/t , so-called unsteady conical flows [2] or pseudo-stationary flows [4,6].

So far ϕ has merely been compelled to yield a degenerate map. For an unsteady compressible flow (2.7) and (2.8) must also be satisfied. In

(2.8) $\partial^2 \phi / \partial x_I \partial x_J$ is required. By (4.3) and (4.4)

$$(4.10) \quad \partial^2 \phi / \partial x_I \partial x_J = (\partial u_I / \partial \mu_\alpha) (\partial \mu_\alpha / \partial x_J) = (\partial u_J / \partial \mu_\alpha) (\partial \mu_\alpha / \partial x_I)$$

Let $v_{I\Gamma}(\mu)$ be $4 - n$ mutually orthogonal unit normals² to $u_I = u_I(\mu)$.

That is,

$$(4.11) \quad v_{I\Gamma} \partial v_{I\Gamma} / \partial \mu_\alpha = 0, \quad v_{I\Gamma} v_{I\Delta} = \delta_{\Gamma\Delta}$$

By (4.10) $(\partial u_I / \partial \mu_\alpha) (\partial \mu_\alpha / \partial x_J) v_{J\Gamma} = 0$, and by (4.5)

$$(4.12) \quad (\partial \mu_\alpha / \partial x_J) v_{J\Gamma} = 0$$

By (4.5) and (4.11)

$$(4.13) \quad \partial \mu_\alpha / \partial x_J = A_{\alpha\beta} \partial u_J / \partial \mu_\beta$$

for some $A_{\alpha\beta}$. Now by (4.8), (4.10), and (4.5) $(x_I \partial^2 u_I / \partial^2 \mu_\alpha \partial \mu_\beta + \partial^2 k / \partial \mu_\alpha \partial \mu_\beta) A_{\beta\gamma} = -\delta_{\alpha\gamma}$. The general solution of (4.7) is of the form

$$(4.14) \quad x_I = x_{I0} + r_\Gamma v_{I\Gamma}$$

where x_{I0} is a particular solution, and r_Γ are independent of the μ 's and each other. Write

$$(4.15) \quad x_{I0} = A_\alpha \partial u_I / \partial \mu_\alpha$$

2. To summarize the conventions regarding indices in the following discussion, Roman lower case range from 1 to 3; Roman capitals from 0 to 3; Greek lower case from 1 to n ; and Greek capitals from 1 to $4 - n$.

Then by (4.7)

$$(4.16) \quad A_\alpha (\partial u_I / \partial \mu_\alpha) (\partial u_I / \partial \mu_\beta) + \partial k / \partial \mu_\beta = 0$$

defines $A_\alpha(\mu)$, and

$$(4.17) \quad [(x_{10} + r_\Gamma v_{I\Gamma}) \partial^2 u_I / \partial \mu_\alpha \partial \mu_\beta + \partial^2 k / \partial \mu_\alpha \partial \mu_\beta] A_{\beta\gamma} = -\delta_{\alpha\gamma}$$

defines $A_{\beta\gamma}(\mu, r)$. Finally, by (2.8), (4.10), and (4.13)

$$(4.18) \quad \left\{ a^2 \left[(\partial u_I / \partial \mu_\alpha) (\partial u_I / \partial \mu_\beta) - (\partial u_0 / \partial \mu_\alpha) (\partial u_0 / \partial \mu_\beta) \right] - \right. \\ \left. (\partial u_0 / \partial \mu_\alpha + u_i \partial u_i / \partial \mu_\alpha) (\partial u_0 / \partial \mu_\beta + u_i \partial u_i / \partial \mu_\beta) \right\} A_{\alpha\beta} = 0$$

5. Simple waves. When $n = 1$, $A_{\alpha\beta}$ consists of a single element, and (4.18) yields

$$(5.1) \quad (u'_0 + u_i u'_i)^2 = a^2 u'_i u'_i$$

where primes denote ordinary derivatives with respect to μ_1 , and by Bernoulli's equation

$$(5.2) \quad a^2 = -(\gamma - 1) (u_0 + \frac{1}{2} u_i u_i)$$

If $a^2 \neq 0$ (5.1) and (5.2) imply

$$(5.3) \quad u'_i u'_i = 4a^2 / (\gamma - 1)^2$$

Now let

$$(5.4) \quad d\sigma / d\mu_1 = (u'_i u'_i)^{\frac{1}{2}} = \pm 2a' / (\gamma - 1)$$

to obtain

$$(5.5) \quad \sigma \pm 2a / (\gamma - 1) = \sigma_0 \pm 2a_0 / (\gamma - 1)$$

where σ_0 and a_0 are constants. Note that σ is simply the arc length of the projection of $u_I = u_I(\mu)$ onto any hyperplane $u_0 = \text{constant}$. In a one-dimensional simple wave (5.5) reduces to the familiar form (3.25) with $s = \text{constant}$. Since (5.1) is of the form (3.27), the prototype

hyperplanes are characteristic hypersurfaces. Since u_I , ρ , and s are constant thereon, (3.28) is satisfied. Further note that each prototype hyperplane corresponds to a plane moving with constant velocity

$$-u'_0(\mu)u'_1(\mu)/u'_j(\mu)u'_k(\mu) = \left[u_j u'_j (u'_k u'_k)^{-\frac{1}{2}} + a \right] u'_1 (u'_m u'_m)^{-\frac{1}{2}}.$$

Since $u_j u'_j (u'_k u'_k)^{-\frac{1}{2}}$ is the component of fluid velocity normal to this plane, its speed is exactly what one would expect in one-dimensional flow.

In general $k(\sigma)$ and two of the functions $u_I(\sigma)$ can be chosen arbitrarily in constructing a simple wave in accordance with (4.7), (5.2), and (5.5).

6. Double waves. When $n = 2$, let $g_{\alpha\beta}$ be the covariant metric tensor of the surface $u_I = u_I(\mu)$ based on the euclidean metric $ds^2 = du_I du_I$, and let $b_{\alpha\beta}^\epsilon$ be two second fundamental tensors [3]. By definition

$$(6.1) \quad g_{\alpha\beta} = (\partial u_I / \partial \mu_\alpha) (\partial u_I / \partial \mu_\beta)$$

$$(6.2) \quad b_{\alpha\beta}^\epsilon = v_{M\epsilon} \partial^2 u_M / \partial \mu_\alpha \partial \mu_\beta$$

where $v_{M\epsilon}$ are two mutually orthogonal unit normals which satisfy (4.11).

Also

$$(6.3) \quad u_k \partial u_k / \partial \mu_\alpha = q \partial q / \partial \mu_\alpha$$

where $q^2 = u_k u_k$. Write $\partial q / \partial \mu_\alpha = q_{,\alpha}$ where the subscript $_{,\alpha}$ denotes the covariant derivatives with respect to μ_α and based on $g_{\alpha\beta}$

By (4.15), (4.16), and (6.1)

$$(6.4) \quad x_{10} = - (\partial k / \partial \mu_\gamma) g^{\gamma\delta} (\partial u_I / \partial \mu_\delta)$$

where $g^{\gamma\delta}$ is the inverse of $g_{\alpha\beta}$. Since the Christoffel symbols of the first kind, based on $g_{\alpha\beta}$, are $[\alpha \beta, \gamma] = (\partial u_I / \partial \mu_\gamma) (\partial^2 u_I / \partial \mu_\alpha \partial \mu_\beta)$, the second covariant derivative of k becomes

$$(6.5) \quad k_{,\alpha\beta} = \partial^2 k / \partial \mu_\alpha \partial \mu_\beta - (\partial k / \partial \mu_\gamma) g^{\gamma\delta} (\partial u_I / \partial \mu_\delta) (\partial^2 u_I / \partial \mu_\alpha \partial \mu_\beta)$$

Now (4.17) becomes $(k_{,\alpha\beta} + r_{\alpha\beta}^\epsilon) A_{\beta\gamma}^\epsilon = -\delta_{\alpha\gamma}$. Since (4.18) is homogeneous

in $A_{\alpha\beta}$, only the adjoint of $(k_{,\alpha\beta} + r_{\epsilon} b_{\alpha\beta}^{\epsilon} = (-1)^{\alpha+\beta} (k_{,\alpha+1 \beta+1} + r_{\epsilon} b_{\alpha+1 \beta+1}^{\epsilon})$

is required. Then since all four of r_{ϵ} and μ_{α} are independent, (4.18) yields

$$(6.6) \quad \left[a^2 (g_{\alpha\beta} - u_{o,\alpha} u_{o,\beta}) - (u_{o,\alpha} + q_{q,\alpha})(u_{o,\beta} + q_{q,\beta}) \right] (-1)^{\alpha+\beta} b_{\alpha+1 \beta+1}^{\epsilon} = 0$$

$$(6.7) \quad \left[a^2 (g_{\alpha\beta} - u_{o,\alpha} u_{o,\beta}) - (u_{o,\alpha} + q_{q,\alpha})(u_{o,\beta} + q_{q,\beta}) \right] (-1)^{\alpha+\beta} k_{,\alpha+1 \beta+1} = 0$$

Note that the

$$(6.8) \quad \text{rank of } \left\| a^2 (g_{\alpha\beta} - u_{o,\alpha} u_{o,\beta}) - (u_{o,\alpha} + q_{q,\alpha})(u_{o,\beta} + q_{q,\beta}) \right\| > 0$$

For, suppose the rank were zero. Then $u_{o,\alpha} + q_{q,\alpha} \neq 0$ for some α since $g_{\alpha\beta}$

is non-singular. Let L_{α} be a non-trivial solution of $(u_{o,\alpha} + u_{i,\alpha} L_{i,\alpha}) L_{\alpha} = 0$.

Now rank zero implies $(u_{i,\alpha} L_{i,\alpha})(u_{i,\beta} L_{i,\beta}) = 0$, whence $u_{i,\alpha} L_{i,\alpha} = 0$. Thus $u_{i,\alpha} = A_i (u_{o,\alpha} + u_{j,\alpha} L_{j,\alpha})$ for some A_i . If $u_{i,\alpha} = 0$, then $u_{i,\alpha} = A_i u_{o,\alpha}$, and $g_{\alpha\beta} =$

$(1 + A_i A_i) u_{o,\alpha} u_{o,\beta}$, which is singular. If $u_{i,\alpha} = 1$, then $u_{o,\alpha} = 0$, so $u_{o,\alpha} =$

$\partial\phi/\partial t = \text{constant}$, and $\phi = u_o t + f(x_1, x_2, x_3)$ which yields a steady flow field,

to be excluded from the present discussion. If $u_{i,\alpha} \neq 0$ or 1, $u_{i,\alpha} = A_i u_{o,\alpha} / (1 - u_{j,\alpha} L_{j,\alpha})$, whence $(1 - u_{i,\alpha} L_{i,\alpha})^2 g_{\alpha\beta} = [(1 - u_{i,\alpha} L_{i,\alpha})^2 + A_i A_i] u_{o,\alpha} u_{o,\beta}$

is singular.

(6.6) is a system of two second order quasilinear partial differential equations for four functions. To determine $u_I(\mu)$ requires two more equations which may be obtained by assigning a special form to the coefficient tensor of (6.6). The resulting systems are classified according to the nature of the characteristic curves of their integral surfaces. A characteristic is a curve on which the coordinate functions, their first partial derivatives, and hence the metric tensor are continuous, while the components of the second fundamental tensors may have discontinuities. Suppose $\partial u_i / \partial \mu_{\alpha}$ are known along $\mu_{\alpha} = \mu_{\alpha}(t)$ on $u_I = u_I(\mu)$. By (6.2) the strip conditions $d(\partial u_M / \partial \mu_{\alpha}) / dt = (\partial^2 u_M / \partial \mu_{\alpha} \partial \mu_{\beta}) d\mu_{\beta} / dt$ imply

$$(6.9) \quad b_{\alpha\beta}^{\epsilon} d\mu_{\beta} / dt = v_{M\epsilon} d(\partial u_M / \partial \mu_{\alpha}) / dt$$

Then $b_{\alpha\beta}^{\epsilon}$ fail to be uniquely determined along $\mu_{\alpha} = \mu_{\alpha}(t)$ by (6.6) and (6.9) if and only if

$$(6.10) \quad \left[a^2 (g_{\alpha\beta} - u_{o,\alpha} u_{o,\beta}) - (u_{o,\alpha} + q_{q,\alpha})(u_{o,\beta} + q_{q,\beta}) \right] (d\mu_{\alpha} / dt)(d\mu_{\beta} / dt) = 0$$

This defines the characteristic directions $d\mu_\alpha/dt$. By (6.5), if $u_I(\mu)$ are known, then (6.7) is a linear partial differential equation for k which also has the characteristic directions (6.10). Equations (6.6) and (6.7) will be said to be of hyperbolic, parabolic, or elliptic type whenever $\Omega = \det \|a^2(g_{\alpha\beta} - u_{0,\alpha} u_{0,\beta}) - (u_{0,\alpha} + qq_{,\alpha})(u_{0,\beta} + qq_{,\beta})\| < 0, = 0, > 0$. Hereafter (6.6) and (6.7) will be assumed to be hyperbolic.

If σ_c is the arc-length of a characteristic, then (6.10) becomes

$$(6.11) \quad (du_o/d\sigma_c + qq/d\sigma_c)^2 = a^2 [1 - (du_o/d\sigma_c)^2]$$

which is identical with (5.1). Hence

Theorem 6.1: The characteristics of the hodographs of double waves are one-dimensional hodographs.

By (6.11) the component of $u_{o,\alpha} + qq_{,\alpha}$ along either characteristic is $(u_{o,\alpha} + qq_{,\alpha}) d\mu_\alpha/d\sigma_c = \pm a [1 - (du_o/d\sigma_c)^2]^{1/2}$. Hence

Theorem 6.2: On the hodographs of double waves the curves of constant speed of sound and their orthogonal trajectories bisect the angles between the characteristics.

In general, curves $x_I = x_I(t)$ (where t is any parameter, not necessarily time) in space-time are mapped onto curves $\mu_\alpha = \mu_\alpha(t)$ on the hodograph. It is convenient to know the relation between tangent vectors of a pair of corresponding curves. By (4.7), (4.14), (6.4), and (6.5) (6.12)

$$(6.12) \quad (dx_I/dt)(\partial u_I/\partial \mu_\alpha) + [r_\epsilon(t)b_{\alpha\beta}^\epsilon + k_{,\alpha\beta}] d\mu_\beta/dt = 0$$

for some $r_\epsilon(t)$. Unless $\det \|r_\epsilon b_{\alpha\beta}^\epsilon + k_{,\alpha\beta}\| = 0$, this determines $d\mu_\beta/dt$.

Conversely, if the curve $\mu_\alpha = \mu_\alpha(t)$ is given on a hodograph surface, its prototype is the hypersurface

$$(6.13) \quad x_I(r, t) = x_{I0}(t) + [r_\epsilon - A_\epsilon(t)] v_{I\epsilon}(t)$$

where the normals $v_{I\epsilon}$ to the hodograph satisfy (4.11), $x_{I0}(t)$ is defined by (6.4), and $A_\epsilon(t)$ by $dA_\epsilon/dt = v_{I\epsilon} dx_{I0}/dt$ (to make the three families of curves of parameters r_1, r_2 or t mutually orthogonal, as a matter of convenience): For (6.13) an analog of (6.12) is

$$(6.14) \quad (\partial x_I/\partial t)(\partial u_I/\partial \mu_\alpha) + [(r_\epsilon - A_\epsilon) b_{\alpha\beta}^\epsilon + k_{,\alpha\beta}] d\mu_\beta/dt = 0$$

Since $v_{I\epsilon} \partial x_I / \partial t = 0$, (6.14) implies

$$(6.15) \quad \partial x_I / \partial t = - (\partial u_I / \partial \mu_\alpha) g^{\alpha\beta} (r_\epsilon - A_\epsilon) b_{\alpha\beta}^\epsilon + k_{,\beta\gamma} d\mu_\gamma / dt$$

In general the direction of $\partial x_I / \partial t$ varies with r_1 and r_2 on the prototype of $\mu_\alpha(t)$, so the hypersurface (6.13) need not be flat. This raises the question, what curves on the hodograph have flat prototypes? Since $\partial^2 x_I / \partial r_\alpha \partial r_\beta = 0$, (6.13) will be flat if and only if [3]

$$(6.16) \quad \det \left\| \partial x_I / r_1, \partial x_I / r_2, \partial x_I / \partial t, \partial^2 x_I / \partial r_\epsilon \partial t \right\| = 0$$

The product of (6.16) and $\det \left\| v_{I\alpha}, \partial u_I / \partial \mu_\beta \right\|$ yields

$$(6.17) \quad \text{rank of } \left\| b_{\beta\gamma}^i d\mu_\gamma / dt \right\| \leq 1$$

where $b_{\alpha\beta}^3 \equiv k_{,\alpha\beta}$. Now let $n_\beta d\mu_\beta / dt = 0$, $n_\beta n_\beta = 1$. Then for some B_i, C_i , and D_i , $b_{\beta\gamma}^i = B_i n_\beta n_\gamma + C_i (n_\beta d\mu_\gamma / dt + n_\gamma d\mu_\beta / dt + D_i (d\mu_\beta / dt)(d\mu_\gamma / dt))$. By

(6.17) the rank of $\left\| C_i n_\beta + D_i d\mu_\beta / dt \right\| \leq 1$. Hence $C_i = CE_i$, $D_i = DE_i$ for some C, D , and non-null E_i . Now

$$(6.18) \quad b_{\beta\gamma}^i = B_i n_\beta n_\gamma + E_i \left[C(n_\beta d\mu_\gamma / dt + n_\gamma d\mu_\beta / dt) + D(d\mu_\beta / dt)(d\mu_\gamma / dt) \right]$$

Suppose B_i and E_i are linearly independent. Let $F_{i\alpha}$ be two linearly independent solutions of $E_i F_{i\alpha} = 0$. Then $F_{i\epsilon} b_{\alpha\beta}^i = (B_i F_{i\epsilon}) n_\alpha n_\beta$, (6.6), and (6.7) imply (6.10), i.e. $\mu_\alpha = \mu_\alpha(t)$ is a characteristic.

Next show that the prototypes of both families of characteristics are flat. Let $\mu_\alpha = \mu_\alpha^\epsilon(t)$ define one characteristic from each family through a given point P of the hodograph. At P , by (6.18)

$$2 \left[a^2 (g_{\alpha\beta} - u_{o,\alpha} u_{o,\beta}) - (u_{o,\alpha} + q_{q,\alpha}) (u_{o,\beta} + q_{q,\beta}) \right] = (-1)^{\alpha+1} \left[(d\mu_{\alpha+1} / dt)(d\mu_{\beta+1}^2 / dt) + (d\mu_{\beta+1}^1 / dt)(d\mu_{\alpha+1}^2 / dt) \right] f$$

for some $f \neq 0$. Then by (6.6) and (6.7)

$$(6.19) \quad b_{\alpha\beta} (d\mu_\alpha^{\epsilon+1} / dt)(d\mu_\beta^\epsilon / dt) = 0$$

where ϵ is not summed. Since these have non-trivial solutions $d\mu_\alpha^{\epsilon+1} / dt$,

$$(6.19) \text{ implies (6.17) for } \mu_\alpha = \mu_\alpha^\epsilon.$$

Now investigate the relation between tangents to characteristics and unit normals n_I^ϵ to prototypes $x_I^\epsilon = (r, t)$ of characteristics $\mu_\alpha = \mu_\alpha^\epsilon(t)$. By (6.13) $n_I^\epsilon v_{I\gamma}^\epsilon = n_I^\epsilon \partial x_I^\epsilon / \partial r_\gamma = 0$. For some A_α^ϵ

$$(6.20) \quad n_I^\epsilon = A_\alpha^\epsilon \partial u_I / \partial \mu_\alpha$$

Since $n_I^\epsilon \partial x_I^\epsilon / \partial t = 0$, then by (6.18)

$$(6.21) \quad A_\alpha^\epsilon \left[(r_\gamma - A_\gamma) b_{\alpha\beta}^\gamma + k_{,\alpha\beta} \right] d\mu_\beta^\epsilon / dt = 0$$

If

$$(6.22) \quad \det \| c_\gamma b_{\alpha\beta}^\gamma + k_{,\alpha\beta} \| \neq 0$$

where $c_\gamma = r_\gamma - A_\gamma$, then by (6.19) the general solution of (6.21) is a $A_\alpha^\epsilon = g d\mu_\alpha^{\epsilon+1} / dt$ for some g . By (6.20)

$$(6.23) \quad n_I^\epsilon = g (\partial u_I / \partial \mu_\alpha) (d\mu_\alpha^\epsilon) (d\mu_\alpha^{\epsilon+1} / dt)$$

i.e. the tangent to $\mu_\alpha = \mu_\alpha^{\epsilon+1}(t)$ is normal to the prototype of $\mu_\alpha = \mu_\alpha^\epsilon$.

These considerations and elementary calculation yield

Theorem 6.3: If for a double wave the rank of $\| b_{\alpha\beta}^1, b_{\alpha\beta}^2, k_{,\alpha\beta} \| = 2$, then

- (1) The characteristics are the only curves on the hodograph with flat prototypes.
- (2) The tangent at any point P of a characteristic is parallel to the normal, at points on the prototype of P, to the prototype hypersurface of the other characteristic through P.
- (3) The prototype of a characteristic is a (sound wave) characteristic hypersurface.

For the omitted cases, first suppose (6.22) is false for all c_γ . Then $b_{\alpha\beta}^\epsilon = K_\epsilon B_\alpha B_\beta$ and $k_{,\alpha\beta} = K B_\alpha B_\beta$ for some B_α, K_ϵ , and K . Now the Riemann tensor of $u_I = u_I(\mu)$ is

$$(6.24) \quad R_{\alpha\beta\gamma\delta} = b_{\alpha\gamma}^\epsilon b_{\beta\delta}^\epsilon - b_{\alpha\delta}^\epsilon b_{\beta\gamma}^\epsilon$$

[3], where ϵ is summed. But now $R_{\alpha\beta\gamma\delta} = 0$, so the parameters μ_α can be chosen so that

$$(6.25) \quad g_{\alpha\beta} = \delta_{\alpha\beta}$$

which implies

$$(6.26) \quad (\partial u_I / \partial \mu_\gamma) (\partial^2 u_I / \partial \mu_\alpha \partial \mu_\beta) = 0$$

so by (4.11), (6.2), (6.25), and (6.26) $\partial^2 u_I / \partial \mu_\alpha \partial \mu_\beta = v_I K B_\alpha B_\beta$ and by

$$(6.5) \quad \partial^2 k / \partial \mu_\alpha \partial \mu_\beta = K B_\alpha B_\beta. \quad \text{Hence the rank of } \left\| x_I \partial^2 u_I / \partial \mu_\alpha \partial \mu_\beta + \right.$$

$\partial^2 k / \partial \mu_\alpha \partial \mu_\beta \left\| \leq 1, \text{ contradicting (4.9).} \right.$

Next suppose the rank of $\left\| b_{\alpha\beta}^1, b_{\alpha\beta}^2, k_{,\alpha\beta} \right\| < 2$. Then

$$(6.27) \quad b_{\alpha\beta}^i = E_i a_{\alpha\beta}$$

for some E_i and $a_{\alpha\beta}$. If $E_\alpha E_\alpha = 0$, then

$$(6.28) \quad b_{\alpha\beta}^\epsilon = v_I \epsilon \partial^2 u_I / \partial \mu_\alpha \partial \mu_\beta = 0$$

which implies $R_{\alpha\beta\gamma\delta} = 0$. Choose parameters such that (6.25) and (6.26)

hold. Then $\partial^2 u_I / \partial \mu_\alpha \partial \mu_\beta = 0$, and

$$(6.29) \quad u_I = a_{I\alpha} \mu_\alpha + b_I$$

where $a_{I\alpha}$ and b_I are constants with $a_{I\alpha} a_{I\beta} = \delta_{\alpha\beta}$. Since $v_{I\epsilon}$ may be chosen to have constant components, the hodograph is the intersection of the two hyperplanes $v_{I\epsilon} (u_I - b_I) = 0$. This implies that the velocity potential must be of the form

$$(6.30) \quad \phi = b_I x_I + F(\psi_1, \psi_2)$$

where $\psi_\alpha = a_{I\alpha} x_I$ and F is arbitrary. If both $a_{\alpha\alpha} = 0$, the flow is a steady plane flow in planes normal to the lines $a_{i\alpha} (x_i - x_i^*) = 0$. Now assume $a_{\alpha\alpha}$ is non-null. Since the rank of $a_{I\alpha}$ is two, rotate space axes to obtain the same form for ϕ with $\psi_1 = t \cos \alpha + x_1 \sin \alpha$, $\psi_2 = x_2 \sin \beta + (x_1 \cos \alpha - t \sin \alpha) \cos \beta$ for constants α and β , and suitably redefined b_I . Since $\partial \phi / \partial x_3 = u_3 = b_3$, these are swept $x_1 x_2$ -plane flows. If $\sin \alpha \sin \beta \neq 0$ the basic plane flow is any plane flow steady relative to axes translated with uniform velocity $x_1^1, x_2^1, 0$ defined by $\cos \alpha + x_1^1 \sin \alpha = 0$, $(x_1^1 \cos \alpha - \sin \alpha) \cos \beta + x_2^1 \sin \beta = 0$. Now $\mu_\alpha = \partial F / \partial \psi_\alpha$.

If $\sin \alpha \sin \beta = 0$, by a rotation of x_1, x_2 - axes at most, ϕ can be reduced to the form $\phi = h_1 x_1 + F(x_1, t)$, which corresponds to any swept unsteady one-dimensional flow.

Finally, suppose $E_\alpha E_\alpha \neq 0$. Then $c \in b_{\alpha\beta}^\epsilon = 0$ for non-trivial solutions of $c \in E_\epsilon = 0$. Since $u_0 = \text{constant}$ leads to steady flows, assume $\mu_1 = u_0$, $\mu_2 = u_3$. Then $c \in v_\gamma \epsilon \partial^2 u_\gamma / \partial \mu_\alpha \partial \mu_\beta = 0$. If both $c \in v_\gamma \epsilon = 0$, then $v_\gamma \epsilon = r_\gamma E_\epsilon$ for some r_γ . Now $v_0 \epsilon = -E_\epsilon r_\alpha \partial u_\alpha / \partial \mu_1$ and $v_3 \epsilon = -E_\epsilon r_\alpha \partial u_\alpha / \partial \mu_2$. Then $\delta_\delta \epsilon = v_{1\delta} v_{1\epsilon} = E_\delta E_\epsilon \left[(r_\alpha \partial u_\alpha / \partial \mu_1)^2 + r_\alpha r_\alpha + (r_\alpha \partial u_\alpha / \partial \mu_2)^2 \right]$ is impossible. Hence assume

$$(6.31) \quad \partial^2 u_2 / \partial \mu_\alpha \partial \mu_\beta = c \partial^2 u_1 / \partial \mu_\alpha \partial \mu_\beta$$

If c is a constant, then by (6.31) the hodograph lies entirely in a hyperplane $a_1(u_1 - b_1) = 0$ for some constants a_1 and b_1 , with $a_1 a_1 \neq 0$. After a rotation of space axes this yields $\partial \phi / \partial x_3 - A \partial \phi / \partial t = B$ for some constants A and B , with the general solution $\phi = Bx_3 + F(x_1, x_2, Ax_3 + t)$. If $A = 0$ this is a swept unsteady plane flow, which still has to be chosen to have a two-dimensional hodograph. If $A \neq 0$, the flow will be steady relative to axes translated with uniform velocity $0, 0, 1/A$. If c is not constant, the integrability conditions of (6.31), $(\partial c / \partial \mu_\gamma) (\partial^2 u_1 / \partial \mu_\alpha \partial \mu_\beta) = (\partial c / \partial \mu_\beta) (\partial^2 u_1 / \partial \mu_\alpha \partial \mu_\gamma)$ yield $\partial^2 u_\gamma / \partial \mu_\alpha \partial \mu_\beta = a_\gamma B_\alpha B_\beta$ for some $B_\alpha = \partial c / \partial \mu_\alpha$ and some a_γ , whence $b_{\alpha\beta}^\epsilon = K_\epsilon B_\alpha B_\beta$ for some K_ϵ . If $K_\epsilon \in K_\epsilon B_\alpha B_\alpha \neq 0$, then by (6.27) $k_{,\alpha\beta} = KB_\alpha B_\beta$ for some K , which yields a previously obtained contradiction. If $K_\epsilon \in K_\epsilon B_\alpha B_\alpha = 0$, then $b_{\alpha\beta}^\epsilon = 0$, a case discussed in the preceding paragraph.

The foregoing discussion and an application of (6.17) yield

Theorem 6.4: If for a double wave the rank of $\|b_{\alpha\beta}^1, b_{\alpha\beta}^2, K_{,\alpha\beta}\| \leq 1$, then

(1) The flow is a uniformly translated swept steady plane flow or a swept unsteady one-dimensional flow.

(2) Any curve on the hodograph has a flat prototype.

(3) Conclusions (2) and (3) of Theorem 6.3 apply to these flows.

7. Triple waves. When $n = 3$, let g_{ij} be the covariant metric tensor of the hypersurface $u_I = u_I(\mu)$ based on the euclidean metric $ds^2 = du_I du_I$, and let b_{ij} be its second fundamental tensor [3] By definition

$$(7.1) \quad g_{ij} = (\partial u_I / \partial \mu_i)(\partial u_I / \partial \mu_j)$$

$$(7.2) \quad b_{ij} = v_I \partial^2 u_I / \partial \mu_j \partial \mu_i$$

where $v_I = v_{II}$ is the unit normal defined to within sign by (4.11). Also

$$(7.3) \quad u_k \partial u_k / \partial \mu_i = q \partial q / \partial \mu_i$$

where $q^2 = u_k u_k$. Write $\partial q / \partial \mu_i = q_{,i}$, where the subscript $,i$ denotes the covariant derivative with respect to μ_i and based on g_{ij} .

By (4.15), (4.16), and (7.1)

$$(7.4) \quad x_{10} = -(\partial k / \partial \mu_i) g^{ij} (\partial u_I / \partial \mu_j)$$

where g^{hi} is the inverse of g_{jk} . Since the Christoffel symbols of the first kind, based on g_{ij} , are $[ij, k] = (\partial u_I / \partial \mu_k)(\partial^2 u_I / \partial \mu_i \partial \mu_j)$, the second covariant derivative of k becomes

$$(7.5) \quad k_{,ij} = \partial^2 k / \partial \mu_i \partial \mu_j - (\partial k / \partial \mu_h) g^{hk} (\partial u_I / \partial \mu_k) (\partial^2 u_I / \partial \mu_i \partial \mu_j)$$

Now (4.17) becomes $(k_{,ij} + r b_{ij}) A_{jk} = -\delta_{ik}$, where $r = r_1$. Since (4.18) is homogeneous in A_{ij} , only the

$$(7.6) \quad \text{adjoint of } (k_{,ij} + r b_{ij}) = r^{m-1} R_{ij}^m$$

is required, where

$$2R_{ij}^1 = R(k_{,ij}, k_{,ij}), \quad R_{ij}^2 = R(k_{,ij}, b_{ij}), \quad 2R_{ij}^3 = R(b_{ij}, b_{ij})$$

$$(7.7) \quad R(k_{,ij}, b_{ij}) = k_{,i+1j+1} b_{i+2j+2} - k_{,i+1j+2} b_{i+2j+1} \\ + k_{,i+2j+2} b_{i+1j+1} - k_{,i+2j+1} b_{i+1j+2}$$

Since all four of r and μ_i are independent, (4.18), (7.6), and (7.7) yield

$$(7.8) \quad [a^2(g_{ij} - u_{o,i} u_{o,j}) - (u_{o,i} + q q_{,i})(u_{o,j} + q q_{,j})] R_{ij}^m = 0$$

Since R_{ij}^m is a relative contravariant tensor of weight m , the system (7.8) may be considered to be tensor equations. Furthermore, note

that

$$(7.9) \quad R_{ij}^3 = b_{i+1j+1} b_{i+2j+2}^{-b_{i+1j+2} b_{i+2j+1}} = R_{i+1i+2j+1j+2}$$

are the components of the Riemann tensor of the hodograph hypersurface.

(7.8) is a system of three second order partial differential equations for the five functions u_I and k . If $k \neq (=) 0$, to determine $u_i(\mu)$ and $k(\mu)$ requires two (three) additional equations, which may be obtained by assigning a special form to the coefficient tensor of (7.8). The resulting systems are classified according to the nature of the characteristic surfaces of their internal hypersurfaces. In the present context a characteristic is a surface on which the coordinate functions, their first partial derivatives, and hence the metric tensor, are continuous, while the components of the second fundamental tensor may have discontinuities there.

One might hope, by analogy with Theorem 6.1, that the characteristics of the hodographs of triple waves would be two-dimensional hodographs. Although it has not been possible to prove this, it will be shown that two of the equations for these characteristics are consequences of the equations (6.6) and (6.7) for two-dimensional hodographs.

To find the characteristic conditions corresponding to (7.8), consider a triple of functions $M_i(t_1, t_2)$ of class C_2 with Jacobian matrix $\| \partial M_i / \partial t_\alpha \|$ of rank two. Assume that on the surface

$$(7.10) \quad \mu_i = M_i(t_1, t_2)$$

the values of

$$(7.11) \quad u_i(M(t)) = U(t), \quad k(M(t)) = K(t)$$

$$(7.12) \quad \partial u_I / u_i = P_{Ii}(t), \quad \partial k / \partial \mu_i = Q_i(t)$$

are known. Also on this surface let $g_{ij} = G_{ij}$, $b_{ij} = B_{ij}(t)$, and $k_{,ij} = K_{,ij}(t)$ be the values of the three dimensional metric tensor, second fundamental tensor, and covariant derivative of k , which will now be calculated. Define non-trivial L_i , N_I , and $N_{I\gamma}$ by

$$(7.13) \quad N_I P_{Ii} = 0, \quad N_I N_I = 1$$

$$(7.14) \quad N_{I\gamma} \partial u_I / \partial t_\alpha = (N_{I\gamma} P_{Ii}) \partial M_i / \partial t_\alpha = 0, \alpha, \gamma = 1, 2.$$

$$N_{I1} N_{I2} = 0$$

$$(7.15) \quad L_j \partial M_j / \partial t_\alpha = 0$$

By (7.13) and (7.14)

$$(7.16) \quad N_I = C_\epsilon N_{I\epsilon} \quad \epsilon = 1, 2$$

for some $C_\epsilon(t)$. Since

$$(7.17) \quad \partial^2 I / \partial t_\alpha \partial t_\beta = (\partial^2 u_I / \partial \mu_i \partial \mu_j) (\partial M_i / \partial t_\alpha) (\partial M_j / \partial t_\beta) + P_{Ii} \partial^2 M_i / \partial t_\alpha \partial t_\beta$$

then by (7.2)

$$(7.18) \quad B_{ij} (\partial M_i / \partial t_\alpha) (\partial M_j / \partial t_\beta) = N_I \partial^2 U_I / \partial t_\alpha \partial t_\beta$$

Also (7.13) implies

$$(7.19) \quad B_{ij} \partial M_j / \partial t_\alpha = - P_{Ii} \partial N_I / \partial t_\alpha$$

Since $\partial M_i / \partial t_\alpha$ and L_i are independent

$$(7.20) \quad B_{ij} = H_{\alpha\beta} (\partial M_i / \partial t_\alpha) (\partial M_j / \partial t_\beta) + H_\alpha (L_j \partial M_i / \partial t_\alpha + L_i \partial M_j / \partial t_\alpha) + B L_i L_j$$

for some $H_{\alpha\beta}$, H_α , and B . Let

$$(7.21) \quad h_{\alpha\beta} = (\partial M_i / \partial t_\alpha) (\partial M_i / \partial t_\beta), \quad h_{\alpha\beta} h^{\beta\gamma} = \delta_{\alpha\gamma}$$

$$(7.22) \quad b_{\alpha\beta}^{\epsilon*} = N_{I\epsilon} \partial^2 U_I / \partial t_\alpha \partial t_\beta$$

Then by (7.20), (7.18), and (7.19)

$$(7.23) \quad H_{\alpha\beta} = C_\epsilon b_{\alpha\beta}^{\epsilon*} h^{\alpha\gamma} h^{\beta\delta}$$

$$(7.24) \quad H_\alpha L_i h_{\alpha\gamma} + H_{\alpha\beta} h_{\beta\gamma} \partial M_i / \partial t_\alpha + P_{Ii} \partial N_I / \partial t_\gamma = 0$$

Since these determine $H_{\alpha\beta}$, and H_α , everything in the right hand member of (7.20) except B can be found in terms of surface data on (7.10).

Next, consider $K_{,ij}$. First note that

$$(7.25) \quad \partial P_{Ii} / \partial t_\alpha = (\partial^2 u_I / \partial \mu_i \partial \mu_j) (\partial M_j / \partial t_\alpha)$$

By (7.5) and (7.25)

$$(7.26) \quad K_{,ij} \partial M_j / \partial t_\alpha = \partial Q_i / \partial t_\alpha - Q_h G^{hk} P_{Ik} \partial P_{Ii} / \partial t_\alpha$$

Now let $K^*_{;\alpha\beta}$ be the second covariant derivative of $K(t)$ with respect to t_α, t_β based on $g^*_{\alpha\beta} = (\partial U_I / \partial t_\alpha) (\partial U_I / \partial t_\beta)$.

By (6.5)

$$(7.27) \quad K^*_{;\alpha\beta} = \partial^2 K / \partial t_\alpha \partial t_\beta - (\partial K / \partial t_\gamma) g^{*\gamma\delta} (\partial U_I / \partial t_\delta) \partial^2 U_I / \partial t_\alpha \partial t_\beta$$

By (7.5), (7.25), and (7.27)

$$(7.28) \quad K_{,ij} (\partial M_i / \partial t_\alpha) (\partial M_j / \partial t_\beta) - K^*_{;\alpha\beta} = \\ - (Q_k G^{kh} P_{ih} - \partial K / \partial t_\gamma g^{*\gamma\delta} \partial U_I / \partial t_\delta) \partial^2 U_I / \partial t_\alpha \partial t_\beta$$

Since the vector in parentheses in the right hand member is normal to $\partial M_i / \partial t_\epsilon$, then for some $S_\epsilon(t)$ $Q_k G^{kh} P_{ih} - \partial K / \partial t_\gamma g^{*\gamma\delta} \partial U_I / \partial t_\delta = S_\epsilon N_I^\epsilon$

$$(7.29) \quad K_{,ij} (\partial M_i / \partial t_\alpha) (\partial M_j / \partial t_\beta) = K^*_{;\alpha\beta} - S_\epsilon b_\alpha^\epsilon \beta$$

As in the case of B_{ij} , expand

$$(7.30) \quad K_{,ij} = M_{\alpha\beta} (\partial M / \partial t_\alpha) (\partial M / \partial t_\beta) + M_\alpha (L_j \partial M_i / \partial t_\alpha + L_i \partial M_j / \partial t_\alpha + CL_i L_j$$

for some $M_{\alpha\beta}$, M_α , and C . Then from

$$M_{\alpha\beta} h_{\alpha\gamma} h_{\beta\delta} = K_{,ij} \partial M_i / \partial t_\gamma \partial M_j / \partial t_\delta$$

$$L_i M_\alpha h_{\alpha\gamma} + M_{\alpha\beta} h_{\beta\gamma} = K_{,ij} \partial M_j / \partial t_\gamma$$

and with the aid of (7.25) to (7.29) one can find $M_{\alpha\beta}$ and M_α in terms of surface data.

Only B and C remain to be found, if possible, from (4.18) which may be rewritten as

$$F_{ij} \text{ adjoint } (K_{,ij} + r B_{ij}) = 0$$

for all r , where B_{ij} and $K_{,ij}$ are to be evaluated by means of (7.20) and (7.30),

where

$$(7.31) \quad F_{ij} = A^2 (G_{ij} - P_{0,i} P_{0,j}) - (P_{0,i} + U_h P_{hi}) (P_{0,j} + U_k P_{kj})$$

The fundamental equation may also be rewritten in the form

$$(7.32) \quad F_{ij}^1 \text{ adjoint } (K^1, ij + B_{ij}^1) = 0$$

where $F_{hk}^1 = F_{ij} J_{hi} J_{kj}$, $K^1, ij + r B_{ij}^1 = (K, ij + r B_{ij}) J_{hi} J_{kj}$,

and $\| J_{hi} \| = \| \partial M_i / \partial t_1, \partial M_i / \partial t_2, L_i \|$. Now B and C appear in the adjoint in (7.32) only in the combination $(C + r B) (L_i L_i)^2$. Then B and C will fail to be uniquely determined if the coefficient of this product vanishes, i.e. if

$$F'_{\alpha \beta} (-1)^{\alpha + \beta} \left[K^* ; \alpha + 1 \beta + 1 + (r C \epsilon - S \epsilon) b_{\alpha + 1 \beta + 1}^{\epsilon*} \right] = 0$$

where $F_{ij} \partial M_i / \partial t_\alpha \partial M_j / \partial t_\beta =$

$$F'_{\alpha \beta} = a^{*2} (g_{\alpha \beta}^* - u_o^* ; \alpha \ u_o^* ; \beta \\ -(u_o^* ; \alpha + q^* q^* ; \alpha) (u_o^* ; \beta + q^* q^* ; \beta)$$

Since r is arbitrary, this yields

$$(7.33) \quad C \epsilon_{\alpha \beta}^* (-1)^{\alpha + \beta} b_{\alpha + 1 \beta + 1}^{\epsilon*} = 0$$

$$(7.34) \quad F'_{\alpha \beta} (-1)^{\alpha + \beta} (K^* ; \alpha + 1 \beta + 1 - S \epsilon b_{\alpha + 1}^{\epsilon*}) = 0$$

Owing to the presence of $C \epsilon$ $S \epsilon$ (7.33) and (7.34) are implied by but not equivalent to (6.6) and (6.7). The three consistency conditions obtained from (7.33) by requiring the coefficients of 1, r, r^2 to vanish and formally setting $B = C = 0$ may conceivably contain additional information which can be combined with (7.33) and (7.34) to obtain (6.6) and (6.7), but the author has been unable to reach a conclusion on this matter.

It should be remarked that the form of (7.33) can be simplified considerably. By (7.2), (7.13), (7.16), and (7.22) $C \epsilon b_{\alpha \beta}^{\epsilon*} = N_I \partial^2 u_I / \partial t_\alpha \partial t_\beta = B_{ij} M_{i\alpha} M_{j\beta}$, where $M_{i\alpha} = \partial M_i / \partial t_\alpha$. Then (7.33) becomes

$$F_{rs} B_{ij} (-1)^{\alpha + \beta} M_{r\alpha} M_{s\beta} M_{i\alpha + 1} M_{j\beta + 1} = 0$$

Since the terms with $r = i$ and $s = j$ vanish, this may be rewritten as

$$(7.35) \quad (B_{ij} F_{i+1j+1} - B_{i+1j} F_{ij+1} - B_{ij+1} F_{i+1j} + B_{i+1j+1} F_{ij}) L_{i+2} L_{j+2} = 0$$

where solutions L_i of (7.15) may be defined as

$$(7.36) \quad L_{i+2} = M_{i1}M_{i+12} - M_{i2}M_{i+11}$$

In a given triple wave $B_{ij}(M)$ and $F_{ij}(M)$ are known functions of M_i . If the form (7.35) is not definite, then as one would expect, (7.35) with L_i defined by (7.36) is a first order partial differential equation for the $M_i(t_1, t_2)$. If $k = 0$, as in the next section, (7.34) is satisfied

trivially. If $k \neq 0$, one must also verify that (7.34) is satisfied by the selected solution of (7.35).

8. Examples. Homogeneous Flows:

To construct a simple wave $k(\mu)$ may be chosen arbitrarily. To construct double or triple waves it must be chosen to satisfy (6.7) or the first two equations of (7.8). In all cases $k = 0$ is a possible solution, and then by (4.7) the corresponding μ_α are homogeneous of degree zero in the x_I . This suggests considering flows, not necessarily isentropic, in which $u_i, p, \rho,$ and s are homogeneous of degree zero in the x_I . If all of these functions are independent of t , a steady conical flow field is obtained. If some of these functions actually depend on t , let (8.1) $X_i = x_i/t$. Then $u_i, p, \rho,$ and s may be taken to be functions of X_i , and the geometry of the flow field simply expands at a uniform rate with the passage of time. Let $\nabla^* = \partial/\partial X_1, \partial/\partial X_2, \partial/\partial X_3$. Then (2.1 v) to (2.4 v) become

$$(8.2) \quad (\bar{u} - \bar{X}) \cdot \nabla^* \bar{u} = -\rho^{-1} \nabla^* p$$

$$(8.3) \quad (\bar{u} - \bar{X}) \cdot \nabla^* \rho + \rho \nabla^* \bar{u} = 0$$

$$(8.4) \quad (\bar{u} - \bar{X}) \cdot \nabla \zeta = 0$$

In a homogeneous flow it is natural to seek characteristic hypersurfaces, defined by $f(X) = \text{constant}$. These are conical hypersurfaces with vertices at the origin of space-time. Now the characteristic conditions take the form

$$(8.5) \quad (\bar{u} - \bar{X}) \cdot \nabla^* f = 0$$

$$(8.6) \quad [(\bar{u} - \bar{X}) \cdot \nabla^* f]^2 = a^2 (\nabla^* f)^2$$

Note that if \bar{u} is too close to \bar{X} , for example $\bar{u} = \bar{X}$, there are no solutions of (8.6), i.e. one cannot construct a conical characteristic hypersurface of the sound-wave type.

Three classical one dimensional examples of degenerate unsteady flows come immediately to mind. First, the early stages flow in a shock tube. Second, the very closely associated flows produced when a piston impulsively starts to advance into or recede from stagnant gas at constant speed. Third, the early stages of Lagrange's problem in interior ballistics, in which a mass of gas initially in a uniform state of rest propels a projectile down a tube without friction. These suggest the following generalizations to homogeneous unsteady flows.

1. Flows about cones in a shock tube of infinite cross-section.

Consider flows produced when an infinite plane shock moving with uniform velocity into stagnant gas and followed by an infinite region of uniform flow encounters a conical obstacle. Such flow include:

- A. Development of Prandtl-Meyer flow around a corner (Fig. 1A 6, 7, 8). This would also arise in the early stages of the flow out of a plane shock tube with a flared exit (Fig. 1B).
- B. Development of steady conical flow about cones not inclined too much relative to the flow (Fig. 2) [6]
- C. Shock diffraction about and reflection from conical obstacles at large inclination to the flow (Fig. 3) [1, 4]


2. Conical Piston Problems.

These involve the flow about a conical object impulsively started into uniform translatory motion advancing into or receding from stagnant gas.


3. Conical Boundaries in Relative Motion.

An example of this type is an idealized model of an emerging projectile. Consider a plane block sliding along a fixed wall with a corner, and eventually separating from the corner. Assume that behind the block there is a region of uniform flow at high pressure, while between the block and the wall is stagnant gas at low pressure. Consider the homogeneous flow field after the block separates from the wall (Fig. 4).

J. H. Giese
J. H. GIESE

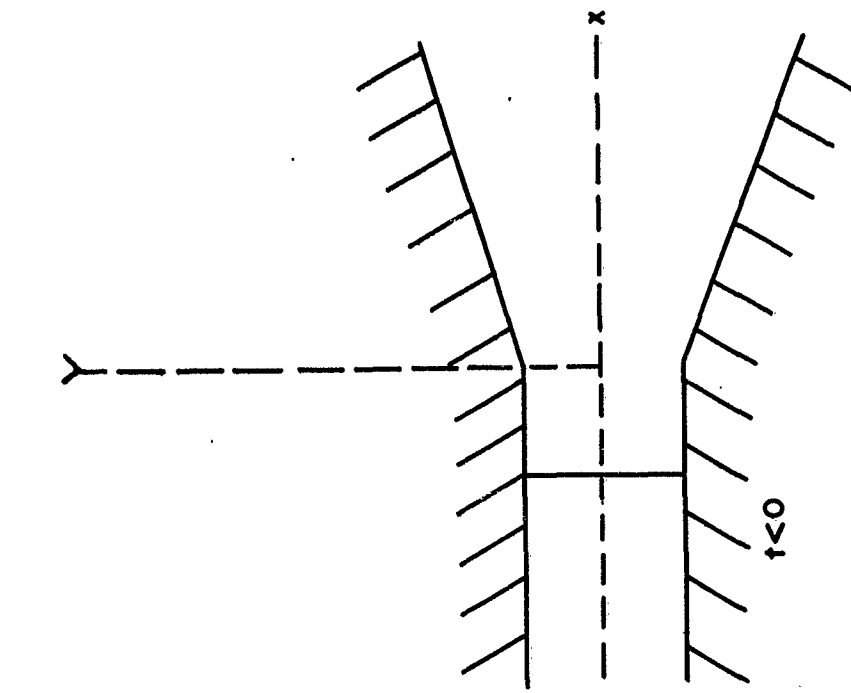

A. INCIPIENT PRANDTL MEYER FLOW

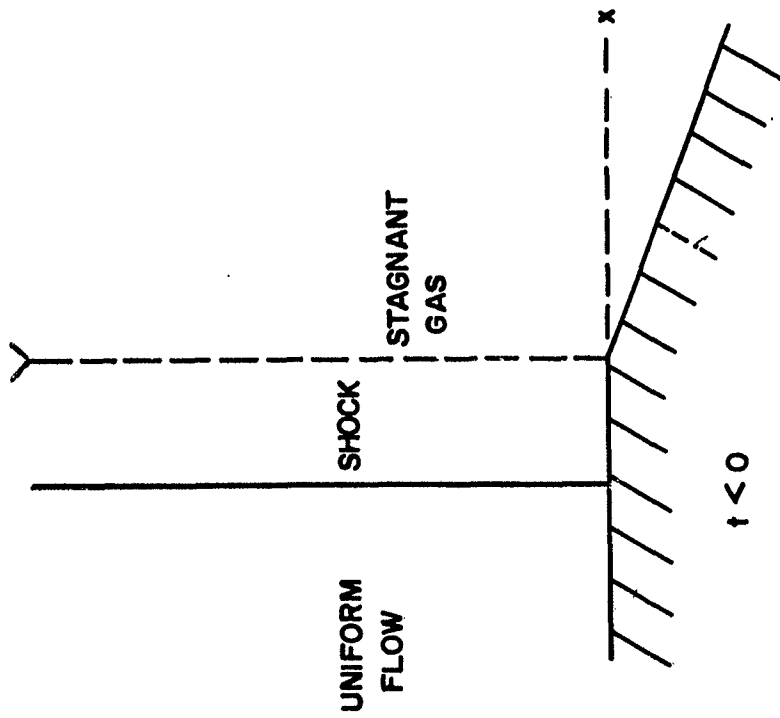

B. FLARED SHOCK TUBE

FIGURE I

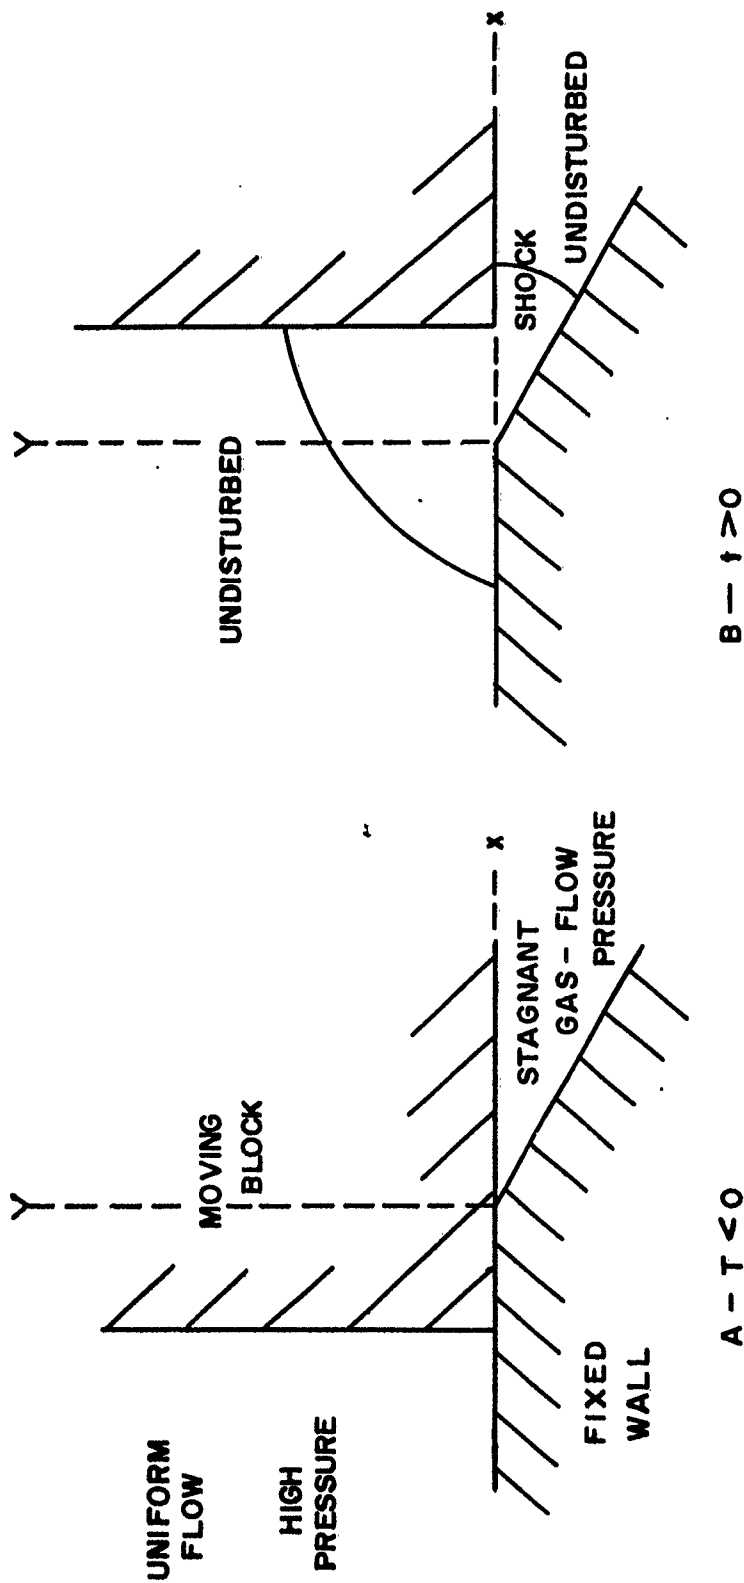


FIGURE 4 - EMERGING PROJECTILE

REFERENCES

1. W. BLEAKNEY and A. H. TAUB, Interaction of Shock Waves, Reviews of Modern Physics 21, 584-605 (1949)
2. S. F. BORG, On Unsteady Non-linearized Conical Flow, J. Aero. Sci. 19, 85-93 (1953)
3. L. P. EISENHART, Riemannian Geometry, Princeton, 1926.
4. C. H. FLETCHER, A. H. TAUB, and W. BLEAKNEY, The Mach Reflection of Shock Waves at Nearly Glancing Incidence, Reviews of Modern Physics 23, 271-286 (1951)
5. J. H. GIESE, Compressible Flows with Degenerate Hodographs, Quart. Appl. Math. 9, 237-246 (1951)
6. DORIS M. JONES, P. M. E. MARTIN and C. K. THORNHILL, A Note on the Pseudo-Stationary Flow Behind a Strong Shock Diffracted or Reflected at a Corner., Proc. Roy. Soc. A 209, pp 238-248 (1951)
7. M. J. LIGHTHILL, The Diffraction of Blast, I, Proc. Roy. Soc. A., Vol 198, 454-470 (1949)
8. M. J. LIGHTHILL, The Diffraction of Blast, II, Proc. Roy. Soc. A, Vol 200, 554-565 (1950)

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
4	Chief of Ordnance Department of the Army Washington 25, D. C. Attn: ORDTB - Bal Sec	5	Director Armed Services Technical Information Agency Documents Service Center Knott Building Dayton 2, Ohio Attn: DSC - SA
10	British - ORDTB for distribution		
4	Canadian Joint Staff - ORDTB for distribution	1	National Advisory Committee for Aeronautics Langley Aeronautical Laboratory Langley Field, Virginia
4	Chief, Bureau of Ordnance Department of the Navy Washington 25, D. C. Attn: Re3	3	National Advisory Committee for Aeronautics 1724 F. Street, N.W. Washington 25, D. C.
1	Commander Naval Proving Ground Dahlgren, Virginia	1	National Advisory Committee for Aeronautics Lewis Flight Propulsion Laboratory Cleveland Airport Cleveland 11, Ohio
4	ASTIA Reference Center Library of Congress Washington 25, D. C.		
2	Commander Naval Ordnance Laboratory White Oak Silver Spring 19, Maryland	1	National Advisory Committee for Aeronautics Ames Aeronautical Laboratory Moffett Field, California
1	Commander Naval Ordnance Test Station Inyokern P. O. China Lake, California Attn: Technical Library	1	Professor F. H. Clauser Johns Hopkins University School of Engineering Department of Aeronautics Baltimore 18, Maryland
1	Superintendent Naval Postgraduate School Monterey, California	1	Professor Garrett Birkhoff 21 Vanser Building Harvard University Cambridge 38, Massachusetts
1	Director Air University Library Maxwell Air Force Base, Alabama	1	Professor J. von Neumann Institute for Advanced Study Princeton, New Jersey

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>
1	Professor H. Emmons Graduate School of Engineering Harvard University Cambridge, Massachusetts
1	Dr. A. E. Puckett 4747 Gold Avenue LaConada, California
1	Professor P. A. Lagerstrom California Institute of Technology Pasadena, California
1	Professor C. A. Trvesdell University of Indiana Bloomington, Indiana
1	Professor H. Cohn Wayne University Detroit 1, Michigan
1	Professor M. H. Martin University of Maryland College Park, Maryland
1	Professor C. L. Dolph University of Michigan Ann Arbor, Michigan
1	Professor R. Courant Institute for Mathematics & Mechanics New York University New York 3, New York
1	Professor H. F. Ludloff Department of Aeronautics New York University New York, New York