

THIS REPORT HAS BEEN DELIMITED  
AND CLEARED FOR PUBLIC RELEASE  
UNDER DOD DIRECTIVE 5200.20 AND  
NO RESTRICTIONS ARE IMPOSED UPON  
ITS USE AND DISCLOSURE.

DISTRIBUTION STATEMENT A

APPROVED FOR PUBLIC RELEASE;  
DISTRIBUTION UNLIMITED.

# Services Technical Information Agency

of our limited supply, you are requested to return this copy WHEN IT HAS SERVED  
PURPOSE so that it may be made available to other requesters. Your cooperation  
appreciated.

# 40343

THE U. S. GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA  
FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED  
PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS  
LIABILITY, NOR ANY OBLIGATION WHATSOEVER, AND THE FACT THAT THE  
U. S. GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE  
DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY  
ANY OTHER PERSON OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER  
CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE,  
OR TO USE, ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

Reproduced by  
**DOCUMENT SERVICE CENTER**  
SCOTT BUILDING, DAYTON, 2, OHIO

# UNCLASSIFIED

#12

1936-2-T

AD No. 442348


ASTIA FILE

# UNIVERSITY MICHIGAN

*A Method for the Determination of  
the Critical Angle of Reflection of  
Sound from the Bottom of the Ocean*

R. P. GOODMAN

August, 1954



Office of Naval Research, U. S. Navy Department  
N6onr-23221, ONR Project No. NR 261 008

ENGINEERING RESEARCH INSTITUTE  
ANN ARBOR

ENGINEERING RESEARCH INSTITUTE  
UNIVERSITY OF MICHIGAN  
ANN ARBOR

A METHOD FOR THE DETERMINATION  
OF THE CRITICAL ANGLE OF REFLECTION OF SOUND  
FROM THE BOTTOM OF THE OCEAN

R. R. GOODMAN

Project M936

OFFICE OF NAVAL RESEARCH, U. S. NAVY DEPARTMENT  
N6onr-23221, ONR PROJECT NO. NR 261 008

August, 1954

A METHOD FOR THE DETERMINATION  
OF THE CRITICAL ANGLE OF REFLECTION OF SOUND  
FROM THE BOTTOM OF THE OCEAN

INTRODUCTION

In the past many sound transmission experiments were made in the ocean using sound pulses on the order of 0.2 seconds long. For transmission runs made in shallow water (i.e. 100 fathoms or less) it is possible not only to obtain information concerning the attenuation of the sound with increasing range but also to observe the relationship between the length of the received pulse and range. It is shown in this report that this relationship gives additional information concerning the critical angle of reflection of sound from the bottom, and therefore, the velocity of sound in the bottom. A simple derivation is made which predicts the pulse length as a function of range, water depth and the critical angle for total reflection of the sound from the bottom. The critical angles for two transmission runs made by UCDWR in 1945 using frequencies

of 200 and 600 cps are obtained and a discussion of the method is presented.

DERIVATION OF RELATIONSHIP BETWEEN RANGE,  
WATER DEPTH AND CRITICAL ANGLE

The model used for the transmission run experiment is shown in Fig. 1. Several assumptions are made to simplify the derivation. These are:

1. Both the source and the receiver are omnidirectional.
2. The medium is isovelocity water.
3. Reflection is specular from both top and bottom and the surfaces are parallel to one another.
4. There is total reflection from the top surface but from the bottom surface there is a loss due to transmission into the bottom which has the following reflection coefficient\*,  $\mu(\theta)$ :

$$\begin{array}{ll} \text{for } \theta < \theta_c & \mu(\theta) \leq A \\ \text{for } \theta > \theta_c & \mu(\theta) = 1 \end{array}$$

where  $A < 1$  and  $\theta_c$  is the angle between the direction of the sound rays and the normal to the bottom surface (see Fig. 1).

---

\* The  $\mu(\theta)$  given here is an approximation of the reflection coefficients calculated by J.M. Ide, R.F. Post and W.J. Fry, The Propagation of Underwater Sound at Low Frequencies as a Function of the Acoustic Properties of the Bottom. NRL Rept. No. S 2113, pp. 58, 115. (Unclassified)

5. Both the source and the receiver are close enough to the top surface to be considered at the surface (i.e. the depths of source and receiver are very small compared to the depth of the water.

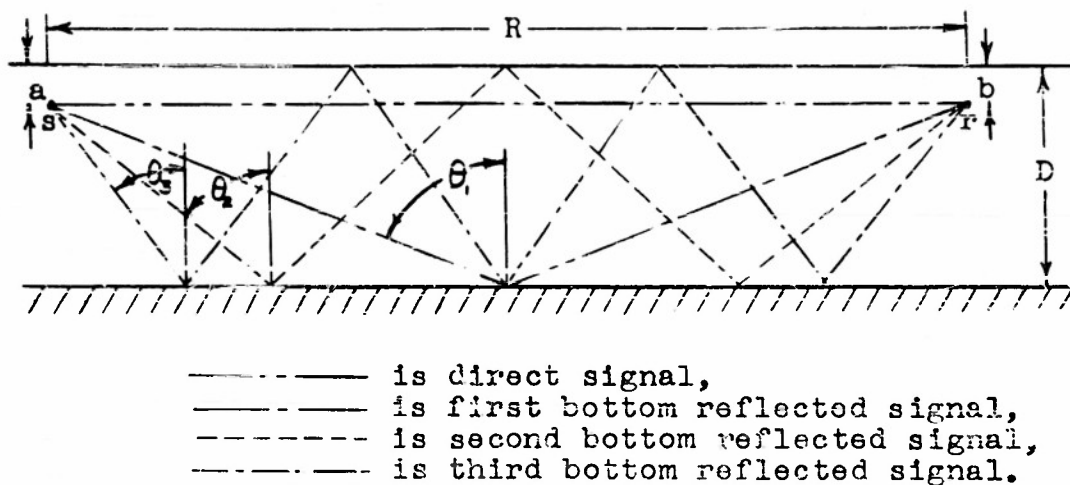


Fig. 1. Model for sound propagation in shallow water. s and r designate the positions of the source and receiver respectively.

The difference in the path length of a signal that has been reflected n times from the bottom and the path length of the direct signal is seen to be

$$\Delta r_n = \sqrt{R^2 + (2nD)^2} - R \quad (1)$$

where R is the distance between the source and the receiver and D is the depth of the water. The sound pulse that is reflected n times will therefore arrive a short time later than the direct signal. If the difference between the two arrival times is designated as  $\Delta t_n$ , then

$$\Delta t_n = \frac{\Delta r_n}{c} = \frac{R}{c} \left\{ \sqrt{1 + \left(\frac{2nD}{R}\right)^2} - 1 \right\} \quad (2)$$

where  $c$  is the velocity of sound in the water. The range dependence of the time difference  $\Delta t_n$  for various values of  $n$  are shown in Fig. 2.

The angle of incidence of the  $n$ 'th reflected ray upon the bottom is

$$\theta_n = \cotan^{-1}\left(\frac{2nD}{R}\right) \quad (3)$$

If  $\theta_n < \theta_c$  then the contribution of the  $n$ 'th ray to the signal will not be observed since this signal will be attenuated by at least  $A^n$  due to the reflection coefficient that is assumed. This quantity becomes negligible for large values of  $n$ . This implies that the  $\Delta t_n$  is only observed for the highest value of  $n$  such that  $\theta_n > \theta_c$  when  $n$  is large. As the range increases more modes of reflection are possible since  $\theta_n$  increases monotonically with the range for all values of  $n$ .

Ideally this means that at some range  $R$ ,  $\theta_n$  reaches the value  $\theta_c$  and then the  $n$ 'th reflected signal contributes to the total pulse making it longer in time. It can, therefore be expected that the signal would increase incrementally in time, with the range interval between the jumps constant for the entire range. Figure 3 shows the pulse length dependence on the range for various assumed values of  $\theta_c$ . By superposing Fig. 3 on Fig. 2 it is easy to see how the curves on Fig. 3 were obtained.

For a sound transmission run whose oceanographic conditions approximate those used in the derivation above, it is possible to find experimentally the critical angle

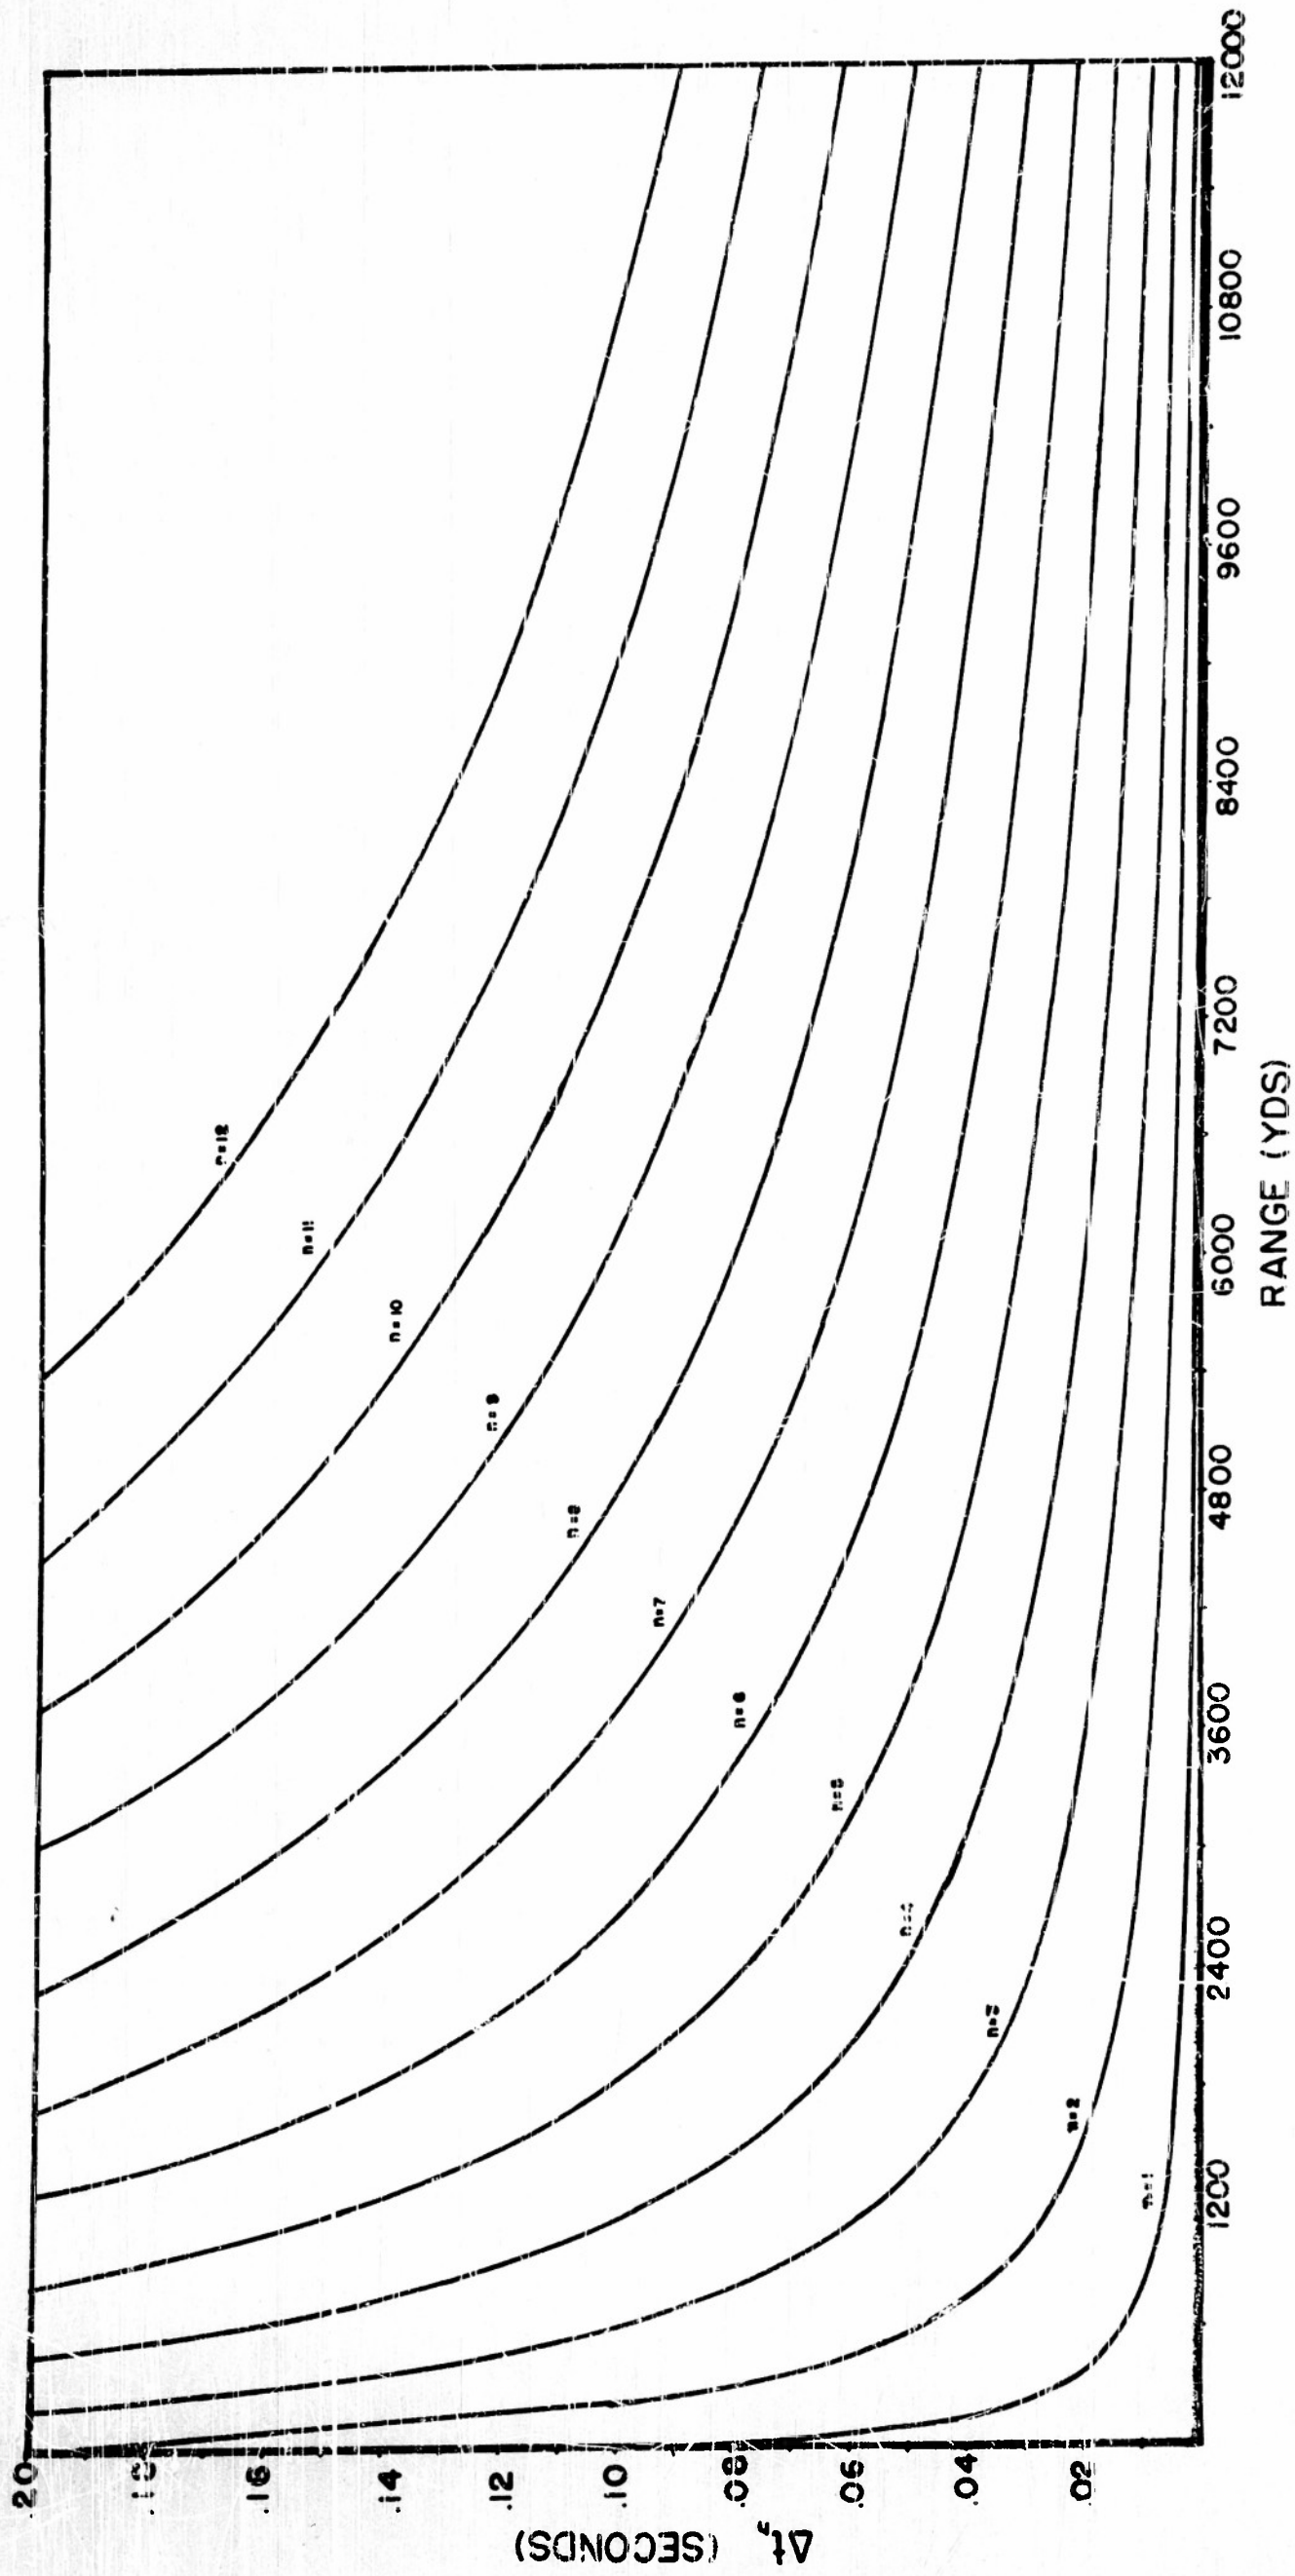


Fig. 2. The time difference between a signal that has reflected  $n$  times from the bottom and a direct signal,  $\Delta t_n$ , vs range,  $R$ , using Eq. (2). The depth  $D = 80$  yds, the velocity of sound in water  $c = 1670$  yds per second, and  $n$  varies from one to twelve.

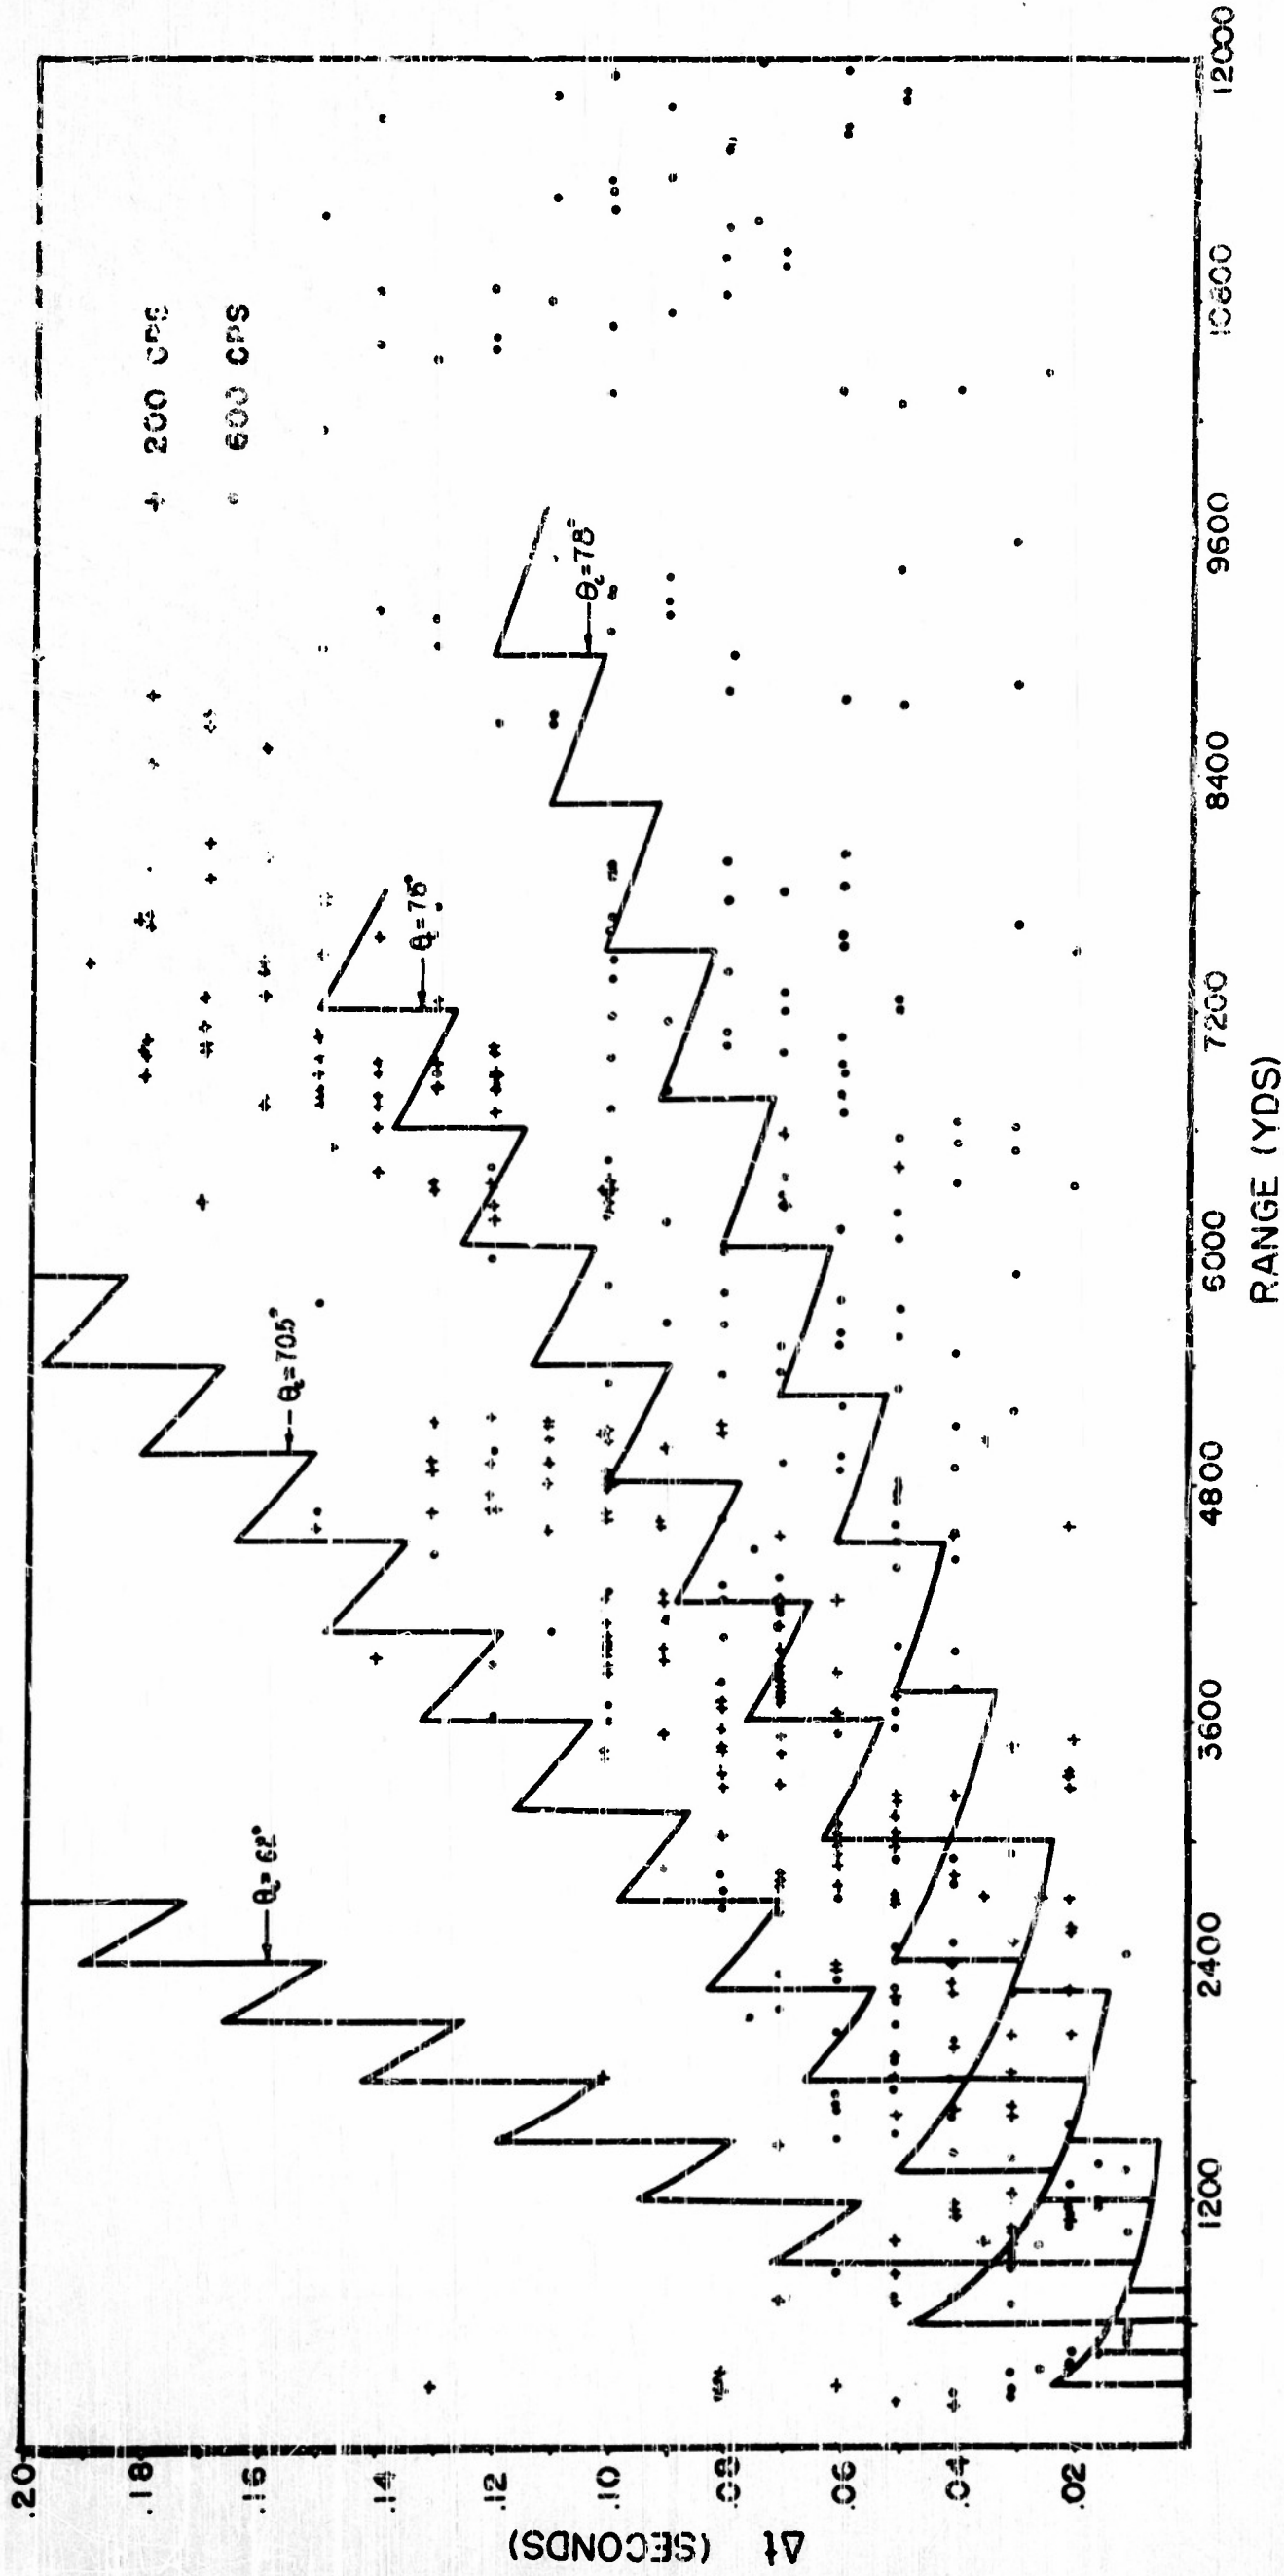


Fig. 3. The time difference between the length of the pulse received and the pulse sent,  $\Delta t$ , vs range R, for the depth  $D = 80$  yds, the velocity of sound in water 1670 yds per second. The solid lines are theoretical curves for various values of the critical angle for bottom reflection (measured from a line normal to the bottom). The circles and crosses are values of  $\Delta t$  measured from UCIDWR data at 200 and 600 cps.

of the bottom reflected sound by plotting the observed time difference  $\Delta t$  as a function of range. The choice of the theoretical curve in Fig. 3 which best fits the data determines the value of the critical angle.

#### EXPERIMENTAL RESULTS

As an example of the method described above, 0.6 kc and 0.2 kc sound transmission runs were analyzed. These runs were made by UCDWR off the coast of California on May 20, 1945, and were chosen because the oceanographic data show them to have a shallow (40 fathom), flat, mud bottom and a negative water temperature gradient.

The UCDWR data have a sound signal and a radio signal recorded on each run. The radio signal is the same length as the transmitted sound signal, hence it is assumed to be the same length as the direct signal. Thus  $\Delta t$  can be measured by subtracting the length of the radio signal from the observed sound pulse. An ideal record of the sound pulse is shown in Fig. 4.

Measurements of  $\Delta t$  were made for records in which the range varied from 200 yards to 12,000 yards. These measurements are plotted in Fig. 3. The theoretical curves which give best fit to the maximum experimental values of  $\Delta t$  can be seen to lie between  $72^\circ$  and  $78^\circ$  for the 0.6 kc

run and between  $72^\circ$  and  $75^\circ$  for the 0.2 kc run. These limits of the critical angle give ratios for the velocity of sound in the mud bottom to the velocity in water of 1.05 to 1.02. These values are in fair agreement with measurements made elsewhere.<sup>1</sup>

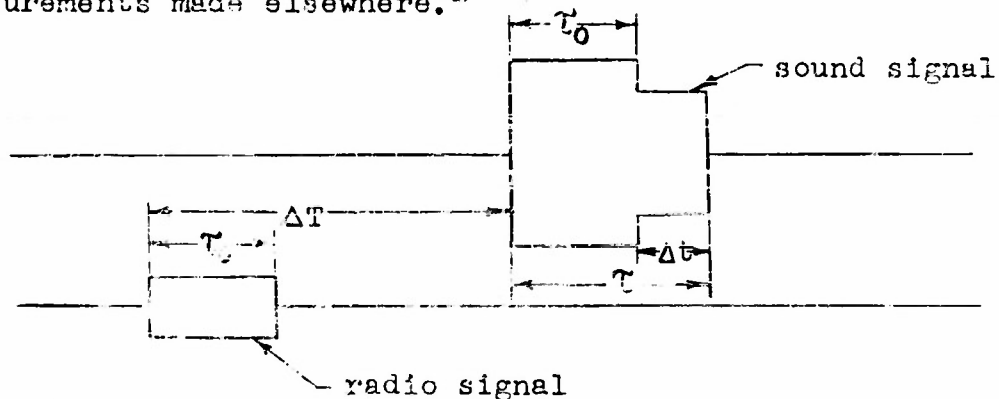


Fig. 4. An idealized picture of the sound and radio signals.  $\tau_0$  is the length of the radio signal (and the direct signal).  $\tau$  is the length of the observed sound signal.  $\tau - \tau_0 = \Delta t$ .  $\Delta T \times c$ , where  $c$  is the velocity of sound in the water, is equal to the range  $R$ .

#### DISCUSSION

The above method for finding the critical angle is straightforward; however there are some difficulties which are only evident when actual analysis is attempted. The first of these difficulties arises from the fact that the attenuation per reflection may be small, thus making

1. J.A. Oliver and C.L. Drake, Bull. of Geol. Soc. of Am. 62, 1287, (Nov. 1951)

difficult the distinction between a signal whose angle of incidence on the bottom is less than the critical angle  $\theta_c$ , and one whose angle is greater than  $\theta_c$ . However the attenuation after several reflections becomes large, so at longer ranges, where the only signals with an angle of incidence less than  $\theta_c$  are those undergoing many bottom reflections, the distinction between  $\theta_n > \theta_c$  and  $\theta_n < \theta_c$  is no longer difficult. Another difficulty, and perhaps the greatest is caused by interference phenomenon, both in the combined signal and in the separate contributions to the signal. Since the source and receiver are both located below the top surface by a distance which is usually greater than or equal to the wavelength, interference is present for the direct signal as well as the reflected components. Constructive interference clearly presents no problem, but destructive interference frequently makes a component of the signal so small that it is not observed in measuring  $\Delta t$ . This clearly leads to a value of  $\theta_c$  which is greater than the actual critical angle. However this error is a periodic one, and if a theoretical curve that lies above most experimental points is chosen, the value of  $\theta_c$  will be fairly accurate.

Since the thermal structure in the ocean is at best an approximation to an isovelocity medium an error is introduced in using the model set forth here. However if care is taken to limit the experimental runs used to those

having negative velocity gradients whose ray patterns are similar to those of isovelocity media, the error is small and the results could be corrected if desired by taking into account the change in the angle of incidence on the bottom due to the thermal pattern. Velocity gradients other than those which are negative or isovelocity give complicated ray patterns and are not approximated by the isovelocity case.

In the presence of a negative velocity gradient the direct signal usually disappears at ranges close to 1000 yards due to the downward refraction of the sound rays. This, however, presents a small error, as the time difference between the direct signal and the first reflected signal is already very small at a range of 1000 yards (see Fig. 2).

It must be noted that the bottom surface must be very flat for the above approach to be valid. It can be shown that a slope of  $\alpha$  degrees in the bottom will change the angle of incidence on the bottom  $2n\alpha$  degrees after being reflected from the bottom  $n$  times, the sign of the change depending on whether the propagation is up or down the slope. So a limit must be placed on the permissible slope of the bottom if the present model is to be applicable; this limit is given by

$$2n\alpha \ll \theta_n \quad .$$

SUMMARY

A method of measuring the critical angle of bottom reflection by observing the range dependence of the length of a pulsed signal is found. Measurements are made on data for a mud bottom with 0.2 and 0.6 kc sound signals which give values from  $72^\circ$  to  $78^\circ$  as the critical angle of incidence. These values of the critical angle give a velocity of sound in the mud bottom around 1.02 and 1.05 times the velocity of sound in water.

2-8-54

(UNCLASSIFIED)

Distribution List for Technical Reports  
University of Michigan  
Contract N6onr-232(21), NR 385-203

Chief of Naval Research  
Acoustics Branch (Code 411)  
Washington 25, D.C. (2 copies)

Chief of Naval Research  
Undersea Warfare Branch (Code 466)  
Washington 25, D.C. (1 copy)

Director,  
Naval Research Laboratory  
Technical Information Officer  
Washington 25, D.C. (6 copies)

Commanding Officer  
Office of Naval Research  
Branch Office  
1030 F. Green Street  
Pasadena 1, Calif. (1 copy)

Commanding Officer  
Office of Naval Research  
Branch Office, 10th Floor  
The John Brerar Library Bldg.  
86 E. Randolph St.  
Chicago 1, Ill. (1 copy)

Commanding Officer  
Office of Naval Research  
Branch Office  
346 Broadway  
New York 13, N.Y. (1 copy)

Commanding Officer  
Office of Naval Research  
Branch Office  
1000 Geary Street  
San Francisco, Calif. (1 copy)

Commanding Officer  
Office of Naval Research  
Navy No. 200, Fleet Post Office  
New York, New York (1 copy)

Office of Technical Services  
Department of Commerce  
Washington, D.C. (1 copy)

→ Armed Services Technical  
Information Agency  
Document Service Center  
Knott Building  
Dayton 2, Ohio (5 copies)

Director,  
Naval Ordnance Laboratory  
White Oak, Md.  
Attn: Sound Division (1 copy)

Commanding Officer and Director  
U.S. Navy Underwater Sound  
Laboratory  
Fort Trumbull, New London,  
Conn. (1 copy)

Commanding Officer and Director  
U.S. Navy Electronics Laboratory  
San Diego 52, Calif. (1 copy)

Commander,  
Naval Air Development Center  
Johnsville, Pa. (1 copy)

Chief,  
Bureau of Ships (Code 847)  
Navy Department  
Washington 25, D.C. (1 copy)

Superintendent,  
U.S. Navy Postgraduate School  
Physics Department  
Monterey, Calif.  
Attn: Prof. L.E. Kinsler  
(1 copy)

Harvard University  
Acoustics Laboratory  
Division of Applied Science  
Cambridge 38, Mass. (1 copy)

Catholic University of  
America  
Department of Physics  
Washington 17, D.C. (1 copy)

Distribution List (cont'd)

Brown University  
Department of Physics  
Providence 12, Rhode Island (1 copy)

Massachusetts Institute of Technology  
Acoustics Laboratory  
Cambridge 39, Mass. (1 copy)

Director,  
Marine Physical Laboratory  
University of California  
U.S. Navy - Physics Laboratory  
San Diego 52, Calif. (1 copy)

Hewson Laboratories  
Columbia University  
111 Palisades St.  
Rocky Point Ferry, N.Y. (1 copy)

Marine Geological Laboratory  
Columbia University  
111 Palisades  
Palisades, N.Y. (1 copy)

Woods Hole Oceanographic Institution  
Woods Hole, Mass.  
Attn: Mr. Vine (1 copy)

U.S. Undersea Warfare Committee  
Navy Department  
Washington 25, D.C.

UNCLASSIFIED

UNCLASSIFIED