

UNCLASSIFIED



AD NUMBER

AD-830 498

CLASSIFICATION CHANGES

TO UNCLASSIFIED

FROM CONFIDENTIAL

AUTHORITY

DD 254 MSCG WS107A; May 14, 1965 by Richard J. Cook
IAW Document Markings

19991004289

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED



AD NUMBER

AD-830 498

NEW LIMITATION CHANGE

TO

DISTRIBUTION STATEMENT: A

Approved for public release; Distribution Unlimited.

LIMITATION CODE: 1

FROM

No Prior DoD Distr Scty Cntrl St'mt Assgn'd

AUTHORITY

SAMSO, USAF Ltr; Feb 28, 1972

THIS PAGE IS UNCLASSIFIED

Reproduced From
Best Available Copy

AD830498

a

UNCLASSIFIED

REPORT NO. ZL-7-037
DATE 14 Nov. 1958
NO. OF PAGES

CONVAIR ASTRONAUTICS

CONVAIR DIVISION OF GENERAL DYNAMICS CORPORATION

LAUNCH FACILITIES DESIGN CRITERIA
FOR
LAUNCH AND SERVICE BUILDING AT
OPERATIONAL DEVELOPMENT TEST SITE
(ODTS), VANDENBERG AFB

REPORT NO. ZL-7-037

14 November 1958

RECEIVED

NOV 20 '58

ASTRONAUTICS
TECHNICAL
LIBRARY

Classification Changed to:
UNCLASSIFIED
Authorized By:
D D 254 MSCG
Reclassified By:
Richard

Date 5/14/65
Date 12/1/65
Date 12/1/65

This document is subject
to controls and
is not to be
distributed
outside only
with approval of:
Hq. USAF, Ca. 90045
Attn: SMSD

PREPARED BY W. R. Gordon
W. R. Gordon
CHECKED BY W. J. Bottoms
W. J. Bottoms

APPROVED BY H. Coughlin
H. Coughlin
APPROVED BY R. S. Sherry
R. S. Sherry

Approved by C. J. Dunn
C. J. Dunn

REVISIONS

NO.	DATE	BY	CHANGE	PAGES AFFECTED

UNCLASSIFIED

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

FORM NO. A-700-2

UNCLASSIFIED

UNCLASSIFIED

CONVAIR ASTRONAUTICS

REPORT ZL-7-037

PAGE 11

INTRODUCTION

The technical design criteria included in this document represents these standards of the WS107A-1 for which the Operational Development Test Site (ODTS) facilities are to be designed. This report is submitted in accordance with AFMMD-MCPTC-6-181-E TWX dated 28 October, requirements as amended by AFPR TWX to AMC, #SARSMC-10-206E dated 3 November 1958. The criteria is based upon a 3 by 3 Complex configuration.

The facility criteria requirements presented in this report are intended to provide sufficient detail for the design for a Launch and Service Building to be used for the operational development testing and evaluation of Atlas Missile and its associated Ground Support Equipment by Convair-Astronautics.

The data includes inputs from Associate Contractors as specified for the Fairchild squadron and/or Complex 68-T criteria. These contractors include North American Aviation/Rocketdyne, Arthur D. Little, General Electric (Re-entry Vehicle), Kellogg Switchboard and Supply Co. and Sundstrand Turbo. The All Inertial Guidance (AIG) system inputs are provided by the American Bosch Arma Corp.

It should be noted that any change in the design criteria and technical data affecting other AIG-Series "E" sites will apply to ODTS. Therefore subsequent revisions to this document may be expected.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

FORM NO. A-700-2

UNCLASSIFIED

UNCLASSIFIED

CONVAIR ASTRONAUTICS

REPORT ZL-7-037

PAGE 111

TABLE OF CONTENTS

	<u>Page</u>
1. DESIGN OBJECTIVES	1
1.1 CONCEPT	1
1.2 TEST REQUIREMENTS	1
1.3 FIRING REQUIREMENTS	1
1.4 REFERENCES	2
1.5 GUIDANCE SYSTEM DESCRIPTION	2
1.6 INSTRUMENTATION	3
2. SITING	4
2.1 GENERAL	4
2.2 GUIDANCE	4
3. CIVIL CRITERIA	4
3.1 GENERAL AREA PLAN	4
3.2 ACCESS ROADS AND PARKING AREAS	4
3.3 FENCING	6
3.4 INTERCONNECTING CABLEWAYS	6
4. ARCHITECTURAL	9
4.1 GENERAL	9
4.2 MISSILE STORAGE AREA	11
4.3 MECHANICAL AND ELECTRICAL ROOM	12
5. STRUCTURAL CRITERIA	18
5.1 GENERAL	18
5.2 MISSILE STORAGE AREA	18
5.3 STRUCTURAL REQUIREMENTS	22

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

FORM NO. A-700-2

UNCLASSIFIED

UNCLASSIFIED

CONVAIR ASTRONAUTICS

REPORT ZL-7-037

PAGE 14

TABLE OF CONTENTS (Cont'd)

8.4	TOTAL MASS REQUIREMENTS	28
8.5	COLLIMATOR ASSEMBLY	22
8.6	STRUCTURAL DESIGN LOAD REQUIREMENTS	23
6.	MECHANICAL CRITERIA	24
6.1	ENVIRONMENTAL REQUIREMENTS	24
6.2	EQUIPMENT COOLING	24
6.3	FLUID STUDUPS	25
6.4	FLUID REQUIREMENTS	25
6.5	PROPELLANT SYSTEM	26
7.	ELECTRICAL CRITERIA	50
7.1	POWER CHARACTERISTICS	50
7.2	POWER REQUIREMENTS	50
7.3	GROUND REQUIREMENTS	52
7.4	LIGHTING	57
7.5	OUTLETS	58
7.6	COMMUNICATIONS	58

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

FORM NO. A-782-2

UNCLASSIFIED

UNCLASSIFIED

CONVAIR ASTRONAUTICS

REPORT 2L-7-037

PAGE 1

1. DESIGN OBJECTIVES

1.1 CONCEPT

The Operational Development Test Site (ODTS) planned for Vandenberg AFB will consist of one Launch Operations Building and one Launch and Service Building. The site will be used by civilian test personnel concerned with evaluation and development of the Weapon System 107A-1. The testing will include all phases of maintenance and operations performed in conjunction with Series "E" Atlas Missile and the All-Inertial Guidance (AIG) systems. The following ground rules establish requirements for evaluation and test facility.

1.1.1 The buildings will not be hardened to the extent of the Fairchild installation but will provide personnel protection from hazards associated with accidental explosions from other complex installations in the area.

1.1.2 The facility will be as austere as practical, consistent with personnel safety requirements.

1.1.3 The general arrangement of operational support equipment located within the building will be similar in detail to the Fairchild installation.

1.2 TEST REQUIREMENTS

The test program will consist of performing various tests on ground support and missile systems equipment for the following:

1.2.1 Improvement and simplification of the operational procedures.

1.2.2 Evaluation and proofing of major improvement changes to the GSE prior to incorporation into production.

1.2.3 Evaluation and proofing of modifications of the GSE necessitated by missile improvement.

1.3 FIRING REQUIREMENTS

1.3.1 Missile launchings will be made periodically for the purpose of determining that the development and improvement changes to the weapon system are satisfactory.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

UNCLASSIFIED

UNCLASSIFIED

CONVAIR ASTRONAUTICS

REPORT ZL-7-037

PAGE 2

- 1.3.2 Short duration static firings will be conducted from launcher for evaluation test not requiring actual flight environment.
- 1.3.3 Television monitoring of missile operation will be required.
- 1.3.4 Special test instrumentation equipment and space will be provided.
- 1.3.5 Flame deflector and fire control systems will be similar to the Complex 65-T installation.
- 1.3.6 Provisions will be made for accommodating the Instrumentation Range Safety System (IRSS) equipment requirements applicable to Vandenberg AFB activities.
- 1.4 REFERENCES
 - 1.4.1 Convair-Astronautics Report No. ZM-7-357 "Operational Ground Support Equipment" (Figure "A" List)
 - 1.4.2 Convair-Report FT 3287 (Rev. B) "General Requirements for WS107A-1 IOC Type Facility Complex 65 ODTS".
- 1.5 GUIDANCE SYSTEM DESCRIPTION
 - 1.5.1 The guidance system is an All-Inertial type manufactured by the American Bosch Arma Corporation (ARMA). With this system the missile flight is controlled entirely by equipment contained in the missile.
 - 1.5.2 With the exception of approximately 50 wires for data and control links to the Launch Operations Building, the target constant modules, mobile test set, and ground support equipment (GSE) for the guidance system is located in the Launch and Service Building. This equipment affords the capability of both launch and checkout of a missile installed on the Launcher.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

UNCLASSIFIED


UNCLASSIFIED**1.6 INSTRUMENTATION****1.6.1 GENERAL**

The extent of instrumentation to be incorporated at this site has not been clearly defined at this time. Additional data will be provided at a later date.

1.6.2 It is expected that television monitoring and motion picture documentation will be included. Preliminary requirements have specified approximately six movie and TV Pads will be required. This would involve the installation of conduits to the various locations for control purposes.

1.6.3 Other instrumentation items will include termination and cathode follower type equipment. Power requirements are not available at this time and will be supplied at a later date.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.


UNCLASSIFIED

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT ZL-7-037

PAGE 4

2. SITING

2.1 GENERAL

The proposed location of the ODTS site is mid-way between Complex 65-2 and the proposed Complex 65-T. The relative distance between the Launch Operations Building and Launch and Service Building will be approximately 600 feet to be consistent with Fairchild layout as planned. The launcher will be oriented to the missile's centerline of fire trajectory.

2.2 GUIDANCE

2.2.1 The launcher area is to be located by high-order survey for determining accurate locations of erected missile, alignment stations and bench marks relative to geographic North. It is required that the star Polaris be visible by line-of-site from alignment stations. Other line-of-site requirements are from alignment stations to the Missile Guidance System (MGS) in both horizontal and erected missile positions and the associated optical bench marks.

2.2.2 The Launch Operations Building will be located according to the following considerations:

- (a) Line-of-site between launch operations and launcher areas for television and/or visual monitoring of activities.
- (b) Line-of-site of both launch operations and launcher to Vandenberg IRSS installations.
- (c) Water and Electrical Power utilities location and accessibility.
- (d) Interference of other Complexes and other right-of-ways within the confines of the base.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR  ASTRONAUTICS

REPORT ZL-7-037

PAGE 15

3. CIVIL CRITERIA

3.1 GENERAL AREA PLAN

The establishment of ODTS at Vandenberg AFB will consider the following:

- 3.1.1** Topography is to allow proper drainage of fluids dispensed during a normal static firing or missile launch operation.
- 3.1.2** Power plant and pumphouse location and routing of these utilities to the complex.
- 3.1.3** Relative location of reference bench marks required by the All Inertial Guidance system.
- 3.1.4** Accessibility to complex from maintenance and administration areas on the base.
- 3.1.5** Location to be consistent with requirements established by Instrumentation Range Safety System and associated installations.

3.2 ACCESS ROADS AND PARKING AREAS

- 3.2.1** The Access road required from maintenance and administration areas to the launch complex is to accommodate the missile handling trailer with eight wheels and tractor.
 - (a)** Tractor-Trailer overall length approximately 1100 inches and width of 190 inches.
 - (b)** Minimum height with vernier engine is 15'-3". Minimum height without vernier engine is 13'-10".
 - (c)** Total weight of missile and trailer approximately 37,500 pounds.
 - (d)** Trailer wheel base of 747 inches and 38 inch road clearance in center of trailer.
 - (e)** Grade change limitation from up-grade to level to 17%.
 - (f)** Surfacing suitable for high speed requirements of type III Mobility (50 mph).

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

REPORT ZL-7-037

CONVAIR ASTRONAUTICS

PAGE 6

(g) Accelerations not to exceed 2.5 g's positive and .5 g's negative.

3.2.2 Adequate paved surface must be provided around the Launch and Service Building for maneuvering and parking of propellant and gas servicing equipment, and for missile entrance and egress from the Missile Storage Area. It must be assumed that all servicing and maintenance vehicles are in the area at the same time.

3.3 FENCING

Safety fencing or guard rails will be provided in all hazardous areas such as transformer banks, flame deflector, drainage ditch, etc.

3.4 INTERCONNECTING CABLEWAYS

3.4.1 A cableway must be provided between the Launch Operations Building and each launcher to provide physical support and protection from the elements for wires and cables associated with the launch control and checkout equipment. It is estimated that 4000 wires will be required for launch control and checkout of each launcher. Most of the wires will be in 39 conductor cables (1.25 inches in diameter).


3.4.2 The cableways, consisting of precast concrete shapes, will run above ground on berms. When necessary to run underground, consideration should be given to drainage, accessibility, etc. Cableway details are shown in Fig. C-2 & C-3.

3.4.3 Changes in direction (either vertical or horizontal) of the cableways should be kept to a minimum. Abrupt changes in direction should allow for cable flexibility restrictions.

3.4.4 Cables will enter the crawl space under the Launch and Checkout Equipment Room direct from the cableways. Cable access details are shown in Fig. C-4.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

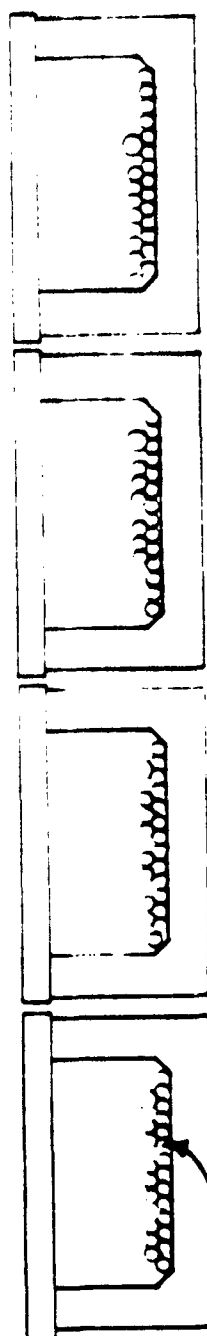

39 CONDUCTORS PER CABLE (TYP)
ACTUAL O.D. = 1.25 IN.

CABLEWAY DETAIL
SCALE 1"=1'-0"

FIGURE C-2


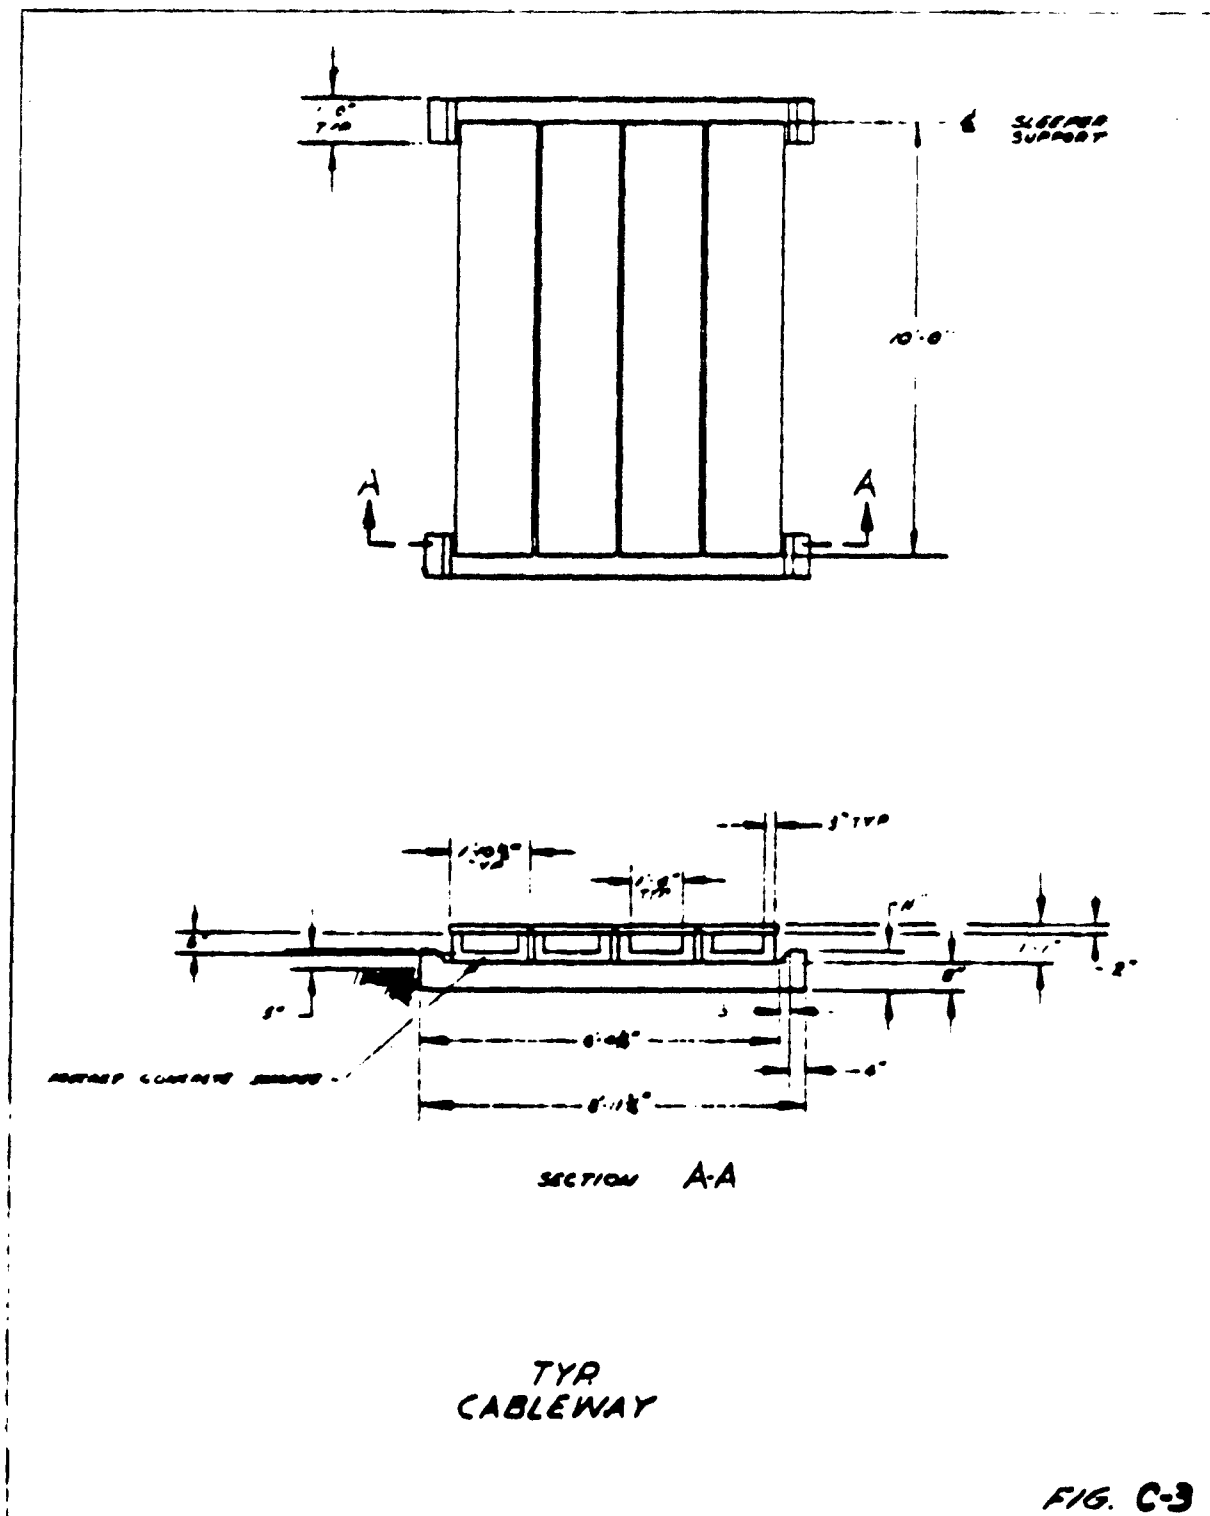


FIG. C-3

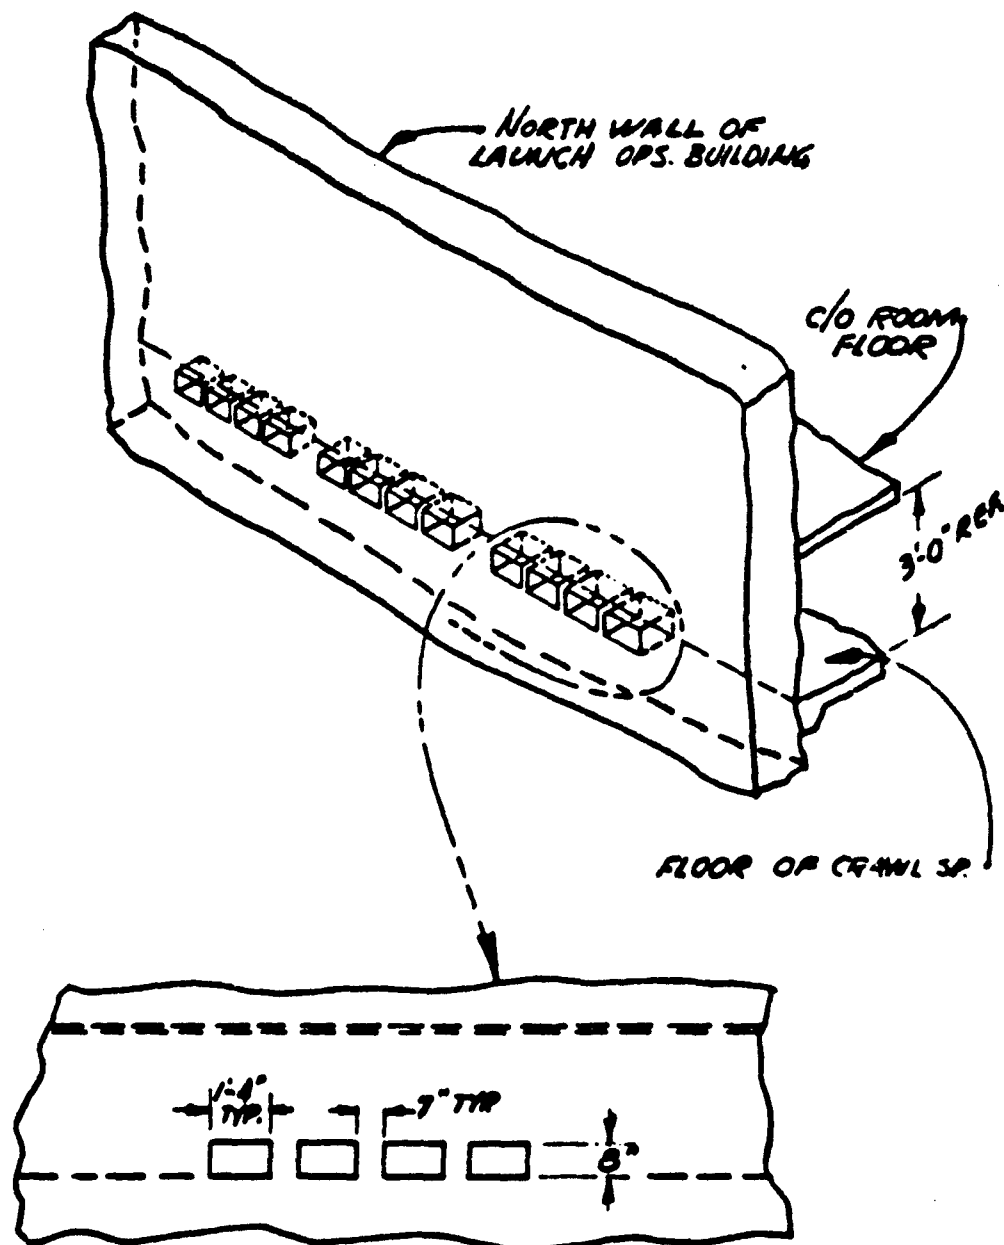

CABLEWAY ENTRANCES

FIGURE C-4

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT ZL-7-037

PAGE 9

4. ARCHITECTURAL

4.1 GENERAL

- 4.1.1 The Launch and Service Building will contain ground support equipment and fixed facilities necessary to test, erect, service and launch a missile. The missile will be maintained in a horizontal position except for active countdown and infrequent sightings of Polaris from alignment station. Umbilical connections, instrumentation and service lines will be attached to the missile to provide control and test recording from Launch Operations Building during checkout, static firing and active countdown.
- 4.1.2 General layout of Launch and Service Building will be similar to Fairchild AFB sites to present actual environment for testing purposes. (See Fig. A-1). The basic elevation grade level will necessarily be altered to accommodate the 65-2 type flame deflector for refire and static test capability. Propellant and high pressure gas loading will be accomplished on grade level. Missile loading will also be at grade level. Earth fill and retaining walls will be utilized according to the minimum hardness requirement with exception of the flame deflector opening. Propellant and gas storage areas may be partially or entirely earth covered except for loading points.
- 4.1.3 Missile envelope for handling, maintenance and guidance system alignment equipment will require 2550 square feet. Overall length of 104 ft. 8 inches and minimum of 20 feet width and height clearance shall be maintained. A machinery platform approximately 12 feet deep at 13 feet 4 inches above pad level will be required for erection mechanism motors. This platform will be located at the flame pit end of the missile storage area.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, U.S.C., Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT ZL-7-037

PAGE 10

4.1.4 Room envelopes for support equipment will approximate the following: (See Fig. A-1)

- (a) Hydraulic Equipment Area
- (b) Power Sub-Station Area
- (c) Air Conditioning and Ventilating Equip. Area
- (d) Mechanical, Electrical & Electronic Equip. Area
- (e) Fuel Control Area
- (f) Nitrogen and Helium Area
- (g) Liquid Oxygen Piping and Control Area
- (h) Instrumentation

To Bz A9080

Overall total for Launch & Service Building will be approximately sq. ft.

4.1.5 Removable roof over missile and erection mechanism shall include the minimum area of 104'-8" in length and 20'-4" width. The removal time from closed to fully opened (90° movement) will be 30 seconds.

4.1.6 Access doors and openings will be in accordance with the following minimum schedule:

- (a) Missile storage area (missile loading) 17'-0"X17'0
- (b) A.C. & Ventilating Equipment 5'-0"X STD. HT.
- (c) Mechanical & Elect. Electronic Equip. Area 5'-0 X STD. HT.
- (d) Liquid Oxygen Piping Area 8'-0 X STD. HT.
- (e) Nitrogen and Helium Area 4'-0 X STD. HT.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT ZL-7-037

PAGE 11

- (f) Fuel Control Area 4'-0 X STD. HT.
- (g) Other Area doors 3'-0 X STD. HT.
- (h) Equipment Access Hatch to M&E Area 8'-0"X 13'-0" opening
- (i) Instrumentation 5'-0 X STD. HT.

4.1.7 Roll-up door for flame deflector exhaust opening will be required for environmental protection of missile and equipment only. The maximum time required to fully open position will be 10 minutes, or minimum rate of 1 ft. per min.

4.1.8 Cabling to the Mechanical and Electrical Room will be routed under the electrical equipment platform. Hydraulic lines from Hydraulic Supply Unit to the stub-up plate will be carried in a trench below floor level. A small trench inter-connecting the Liquid Oxygen Control Room will be required.

4.1.9 Conduit runs within the Launch and Service Building between equipment is suggested in Fig. A-3. (To be added).

4.1.10 Conduit runs to TV & Movie Camera pads will be required.

4.2 MISSILE STORAGE AREA

4.2.1 The Missile Storage Area will be of sufficient size to perform routine maintenance function with the missile mated to the boom and launcher. Additional space will be provided to separate the booster section with the missile on its handling trailer within the enclosure. (See Figure A-1).

4.2.2 The Missile Storage Area entrance door may be hinged on either or both sides. There is no requirement for rapid opening of the missile entrance door.

4.2.3 Space will be provided on the Missile Storage Area walls for the Umbilical Junction boxes, AIG amplifier assembly, and a Nitrogen Charge Panel and instrumentation terminal panels.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

FORM NO. A-700-2

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT ZL-7-037

PAGE 12


- 4.2.4 A covered well will be provided 10'X10'X8' deep as shown in Figure 3- . This will house the Guidance system optical alignment equipment collimator. Two bench marks in 4'X4'X8' rooms adjoining the collimator room. Provision will be made for sighting on the missile guidance pod, bench marks and the star Polaris with the collimator.
- 4.2.5 Blast protection will be required for exposed portions of collimator during static firing and repeated launchings from the site.
- 4.2.6 Two bench marks per collimator are to be provided.
- 4.3 MECHANICAL AND ELECTRICAL ROOM (Figure A-1)
- 4.3.1 The Mechanical and Electrical room will contain Instrumentation, Launch Control and Checkout Equipment racks, special electrical power equipment, Hydraulic Supply Unit, Pressurization-Control Unit, Dynamic Checkout Unit, Ullage Simulation Assembly, Nitrogen Control Unit, Erection Mechanism Meter Control Center (See Fig. A-4), and Hydraulic Power Unit.
- 4.3.2 A minimum of 11'-0" clear head room will be provided for piping, cable tray, and air ducts.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.


~~CONFIDENTIAL~~

SEE SHT 2 OF 2 FOR CONTINUATION

MISSILE STORAGE AREA

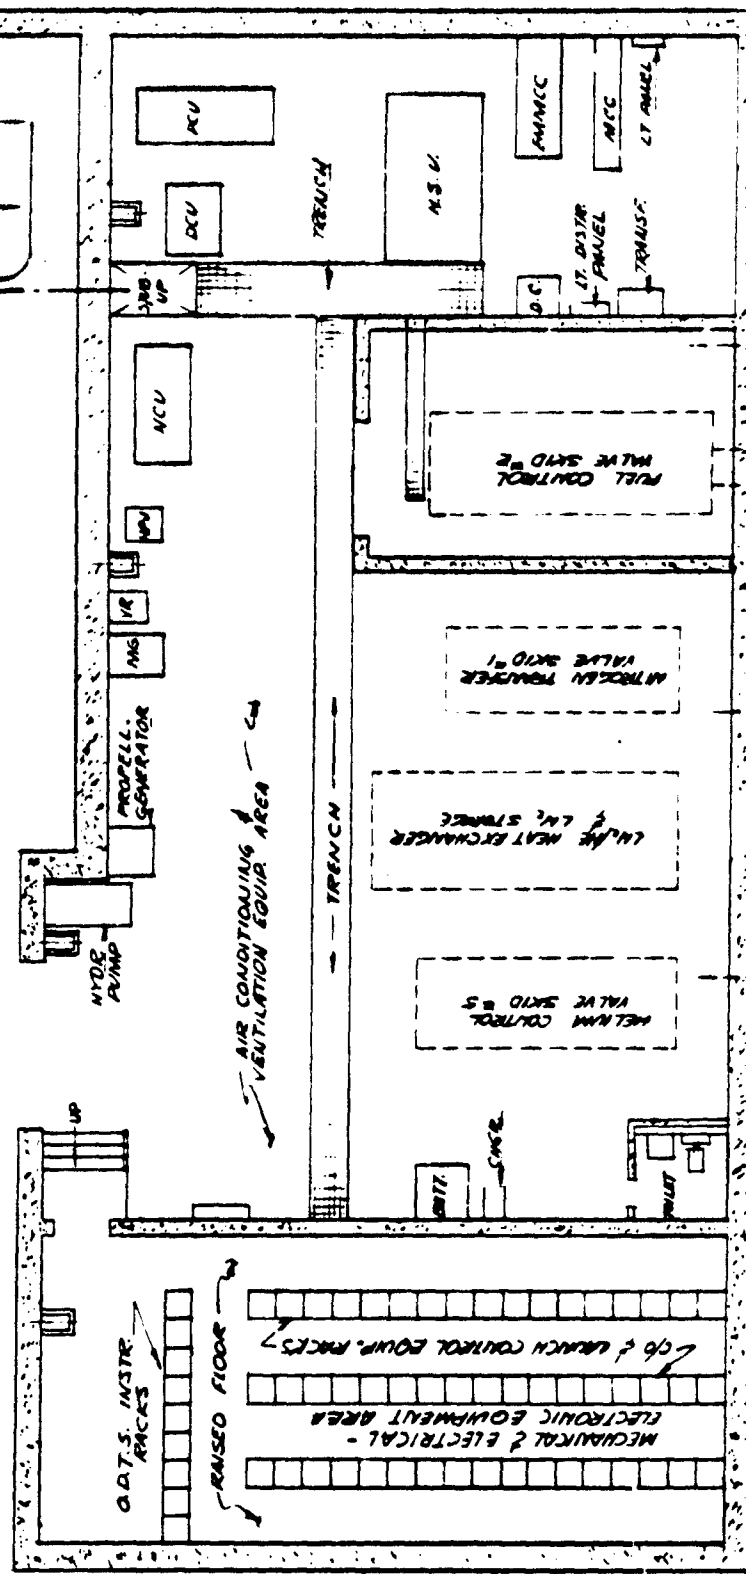

OOTS L&S BUILDING FLOOR PLAN (PRELIMINARY)

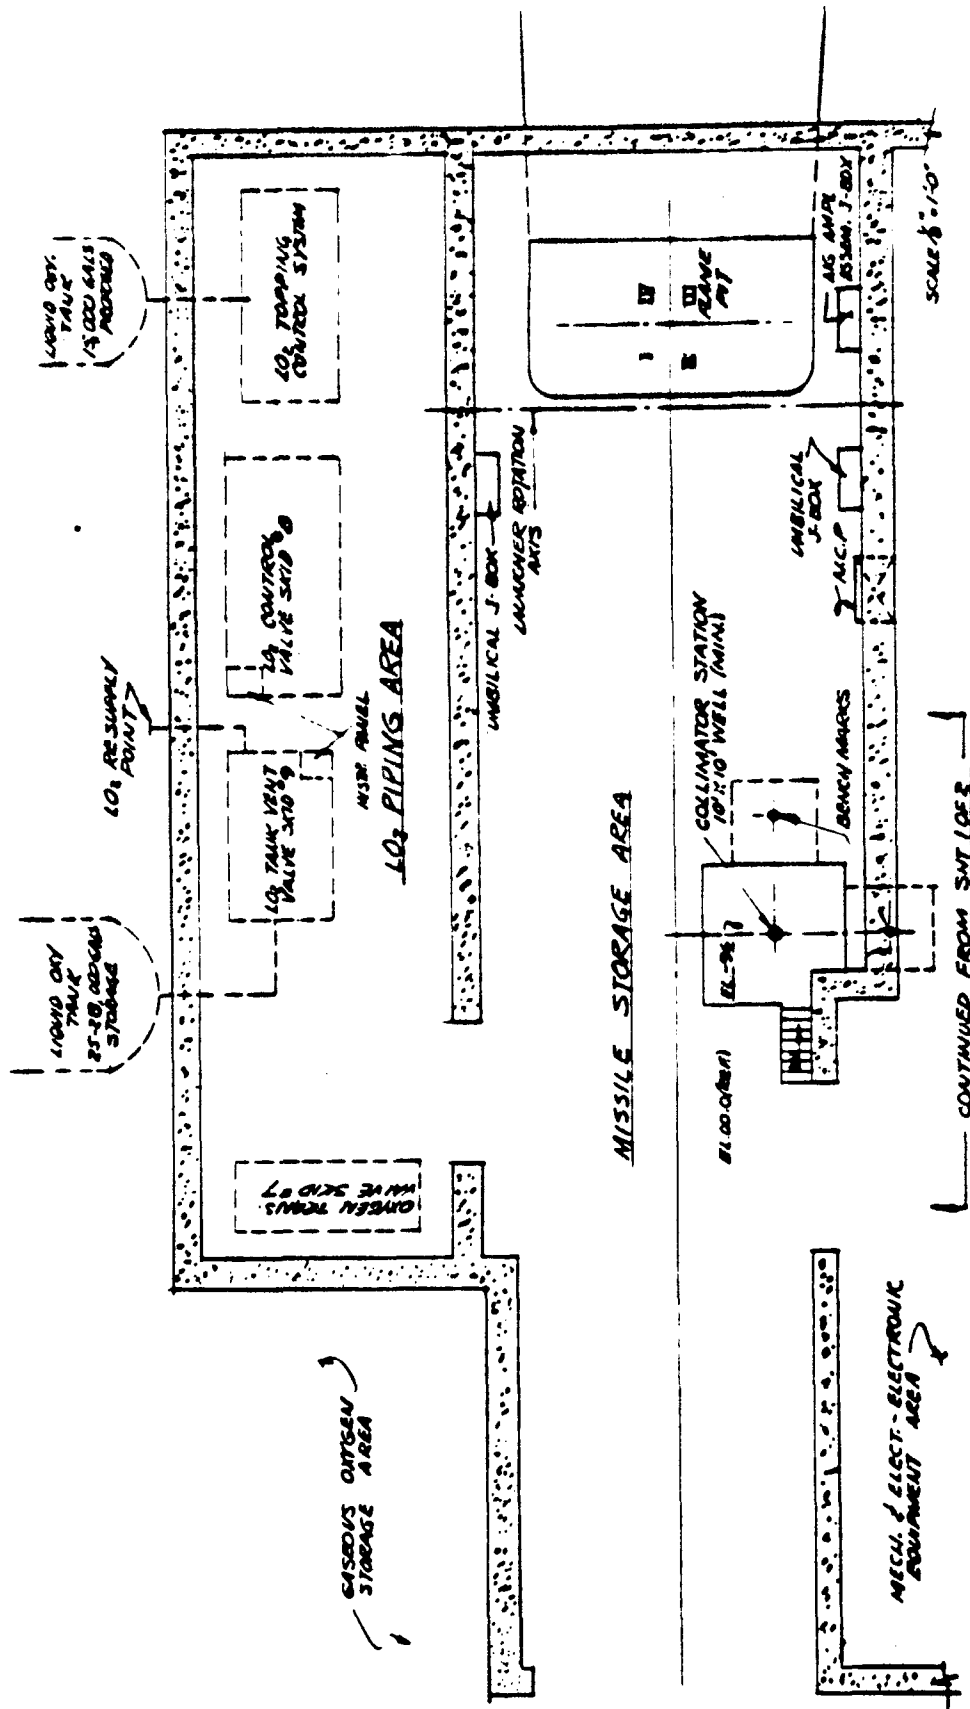

4075-LE'S BUILDING FLOOR PLAN (PRELIMINARY)

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT ZL-7-037

PAGE 15

GROUND SUPPORT EQUIPMENT

C-30.2	-	Supply Unit, Hydraulic
C-24	-	Checkout Unit, Pneumatic Dynamic
C-31	-	Simulation Assembly, Ullage
C-26	-	Control Unit, Pressurization
C-25.1	-	Control Unit, Nitrogen
C-26.03	-	Charge Panel, Nitrogen
C-85	-	Motor Generator (400 cps)
C-87	-	Power Supply - DC
C-76	-	Battery Charger
C-77	-	Emergency Battery
NAA 18.1	-	Engine Flushing Module (IF REQUIRED)
HPU	-	Hydraulic Power Unit (Erection Boom)
NAA 10.4	-	Combustion Stability Monitor
NAA 9.1	-	Relay Assembly
C-80.6	-	Control Unit, Camera TV (65-T only)
C-53.6.0	-	Auxiliary Switching Unit, Launcher
C-51.1.0	-	Distribution Unit, Signal
C-51.0	-	Amplifier Unit, Line Driving
C-94.1	-	Power Supply Unit, Launcher
C-83.2.0	-	Measuring Unit, Pressure
C-80.5.0	-	Control Unit, Target Data
C-80.7	-	Control Unit, Ground, Autopilot
C-80.4.0	-	Exerciser Unit, Propellant Utilization
C-89.1	-	-Sequencer, Propellant Loading
C-84.5	-	Signal Responder, Launch
C-96	-	Switching Unit, Transf., Launch Control
C-83.4	-	-Sequencer, Pneumatic Test
C-89.8.0	-	-Sequencer, Control Unit, Pressurization
C-89.7.0	-	Control Unit, Ground Power, Missile
C-95.1	-	Control Unit, Relay
APS	-	APS, Ground Support Equipment
C-79.1.0	-	Distribution Unit, Power
C-79.8	-	Distribution Unit, No. 1 Cable, Launcher
AIG	-	Arms Countdown Group
C-X	-	Erection Mechanism Motor Control Center (EMMCC)
C-79.3	-	Distribution Unit No. 2, Cable, Launcher
IRSS/CAB	-	Instrumentation Range Safety System, Cabinet
C-97.7	-	Cabinet, Spare
C-82.2.0	-	Junction Box, Umbilical, Right

Figure A-2a

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR  ASTRONAUTICS

REPORT ZL-7-037

PAGE 10

This page is intentionally left


BLANK

Figure to be provided later.

Figure A-3

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

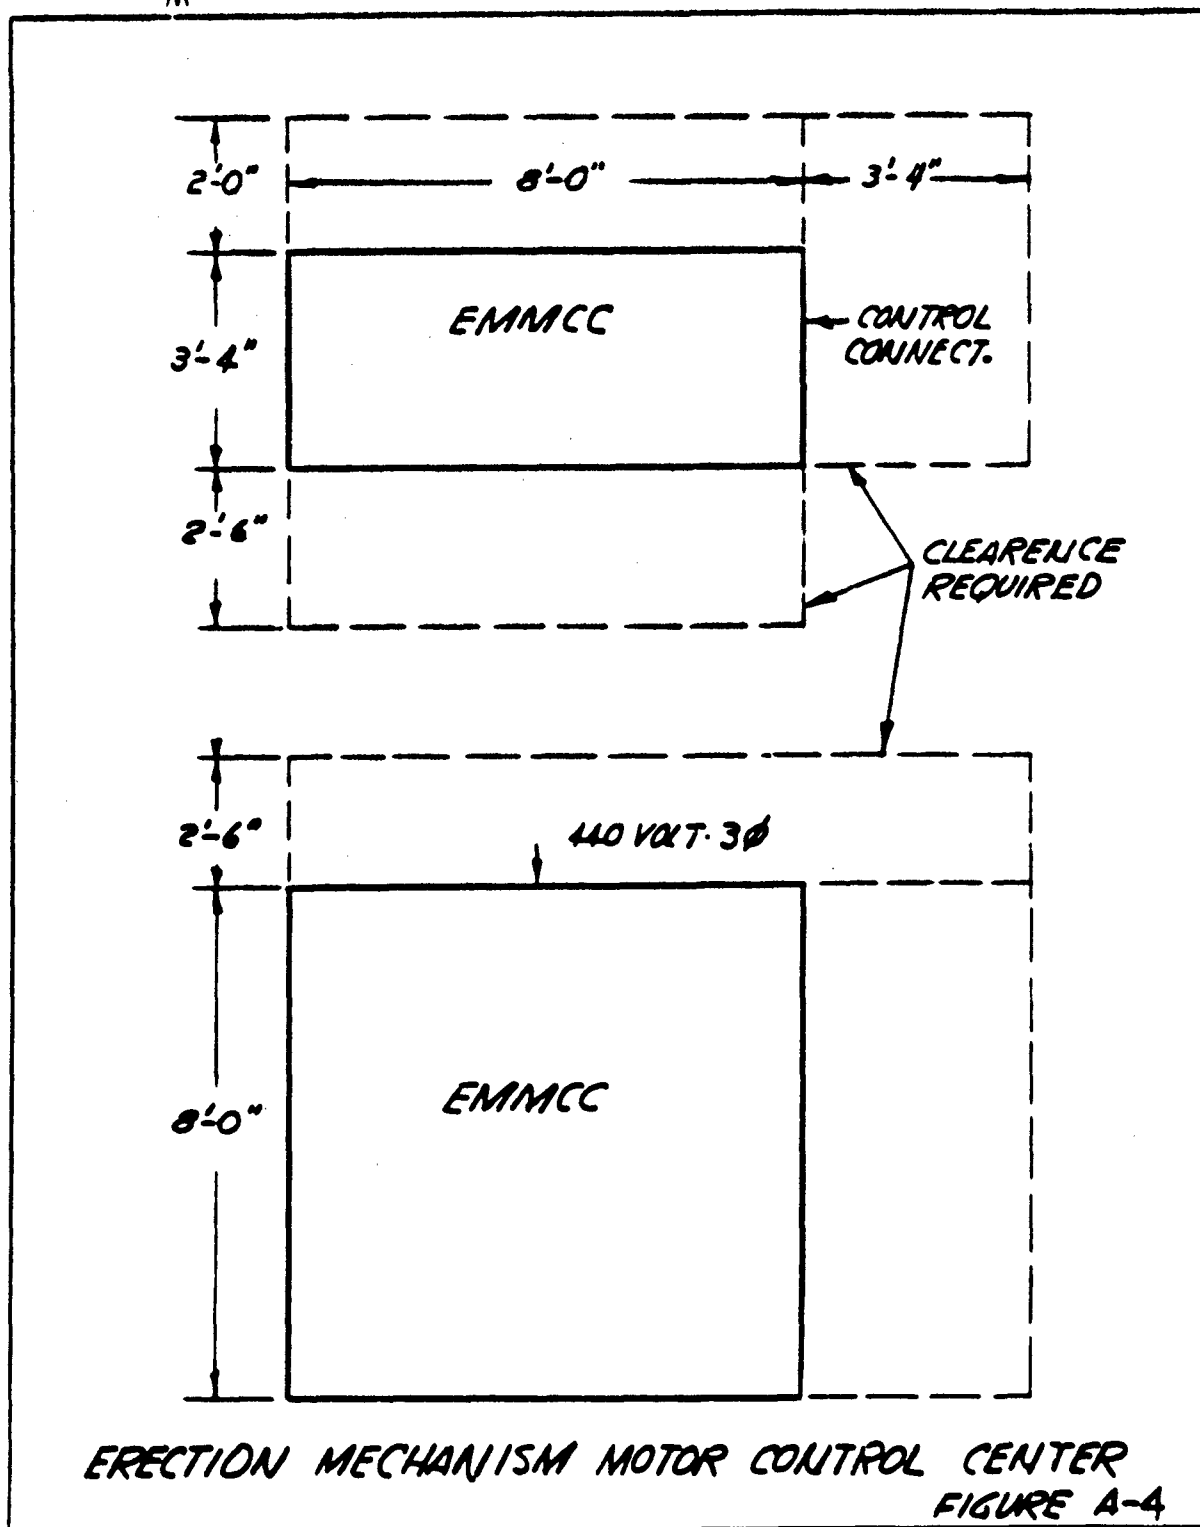

5. STRUCTURAL CRITERIA

5.1 GENERAL

5.1.1 The development of structural drawings must be done after careful perusal of other sections of this criteria and in accordance with data stated below.

5.1.2 Load point locations and load magnitudes are both subject to change, due to the preliminary design stage of the ground support equipment. When final configurations are established, information contained herein will be revised for final facility design.

5.2 MISSILE STORAGE AREA

5.2.1 The ODTS complex facility will have static and refire capability and engine exhaust pressure and temperature after launch will be a design consideration. The pressures and temperatures may be obtained from the following reports that will be available through AFEMD at a later date. It is recommended that the pressures found therein be increased by 25 percent to allow for future engine development.

- (a) AZJ-27-004 TN - "Impingement Heating and Blast Load Pressures on Launcher and G.S.E. During Rise-Off, XSM-65 D&E, I.O.C. Missile", dated 6 August 1958.
- (b) ZA-7-163 - "Horizontal Loads, Resulting from Missile Exhaust Gases", dated 26 June 1958.
- (c) AZS-27-232 TN - "Method of Determination of Structural Resistance to Impingement Heating and Blast Loading on Launcher and G.S.E. During Rise-Off", Preliminary.

5.2.2 Flame Deflector Pressure: No information available at this time. Data will be added at a later date.

5.2.3 Thermuclear Blast Considerations:

- (a) Pressure: Information not available at this time. Data will be added at a later date.
- (b) Ground Shock: Information not available. Data will be added at a later date.

~~CONFIDENTIAL~~

CONVAIR  ASTRONAUTICS

REPORT ZL-7-037

PAGE 19

5.2.4 Maintenance Platforms

The facility shall provide retractable platforms for missile maintenance accessibility where shown in 27-09002. Six inch clearance from any part of the trailer, erection beam, or launcher must be maintained. Access ladders must be provided from the Missile Storage Area floor.

The platforms must withstand a uniform load of 40 lbs. per sq. ft. or a 2000 lb. load concentrated on a 2.5 sq. ft. area, whichever is more severe.

5.2.5 Configuration

Preliminary configuration of flame deflector and collimator are shown in 27-09002 drawing. The load points and configuration are not firm and subject to change.



This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

FORM NO. A-700-2


~~CONFIDENTIAL~~

8



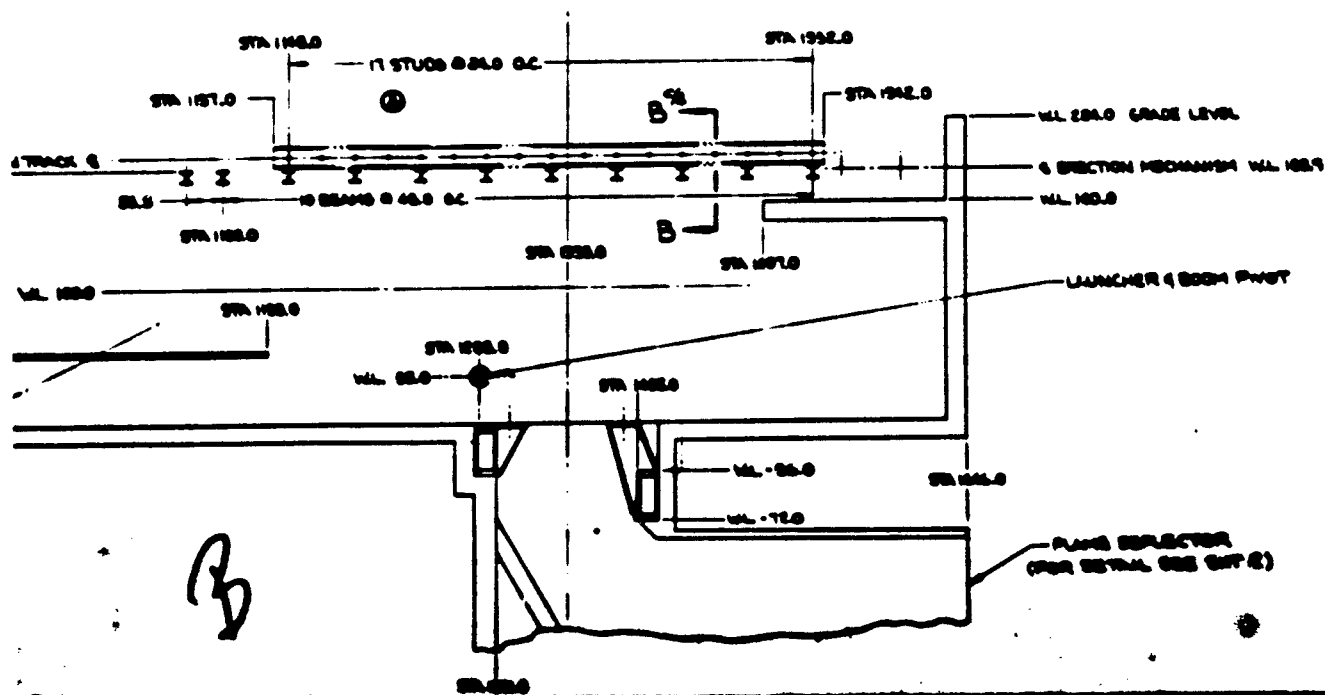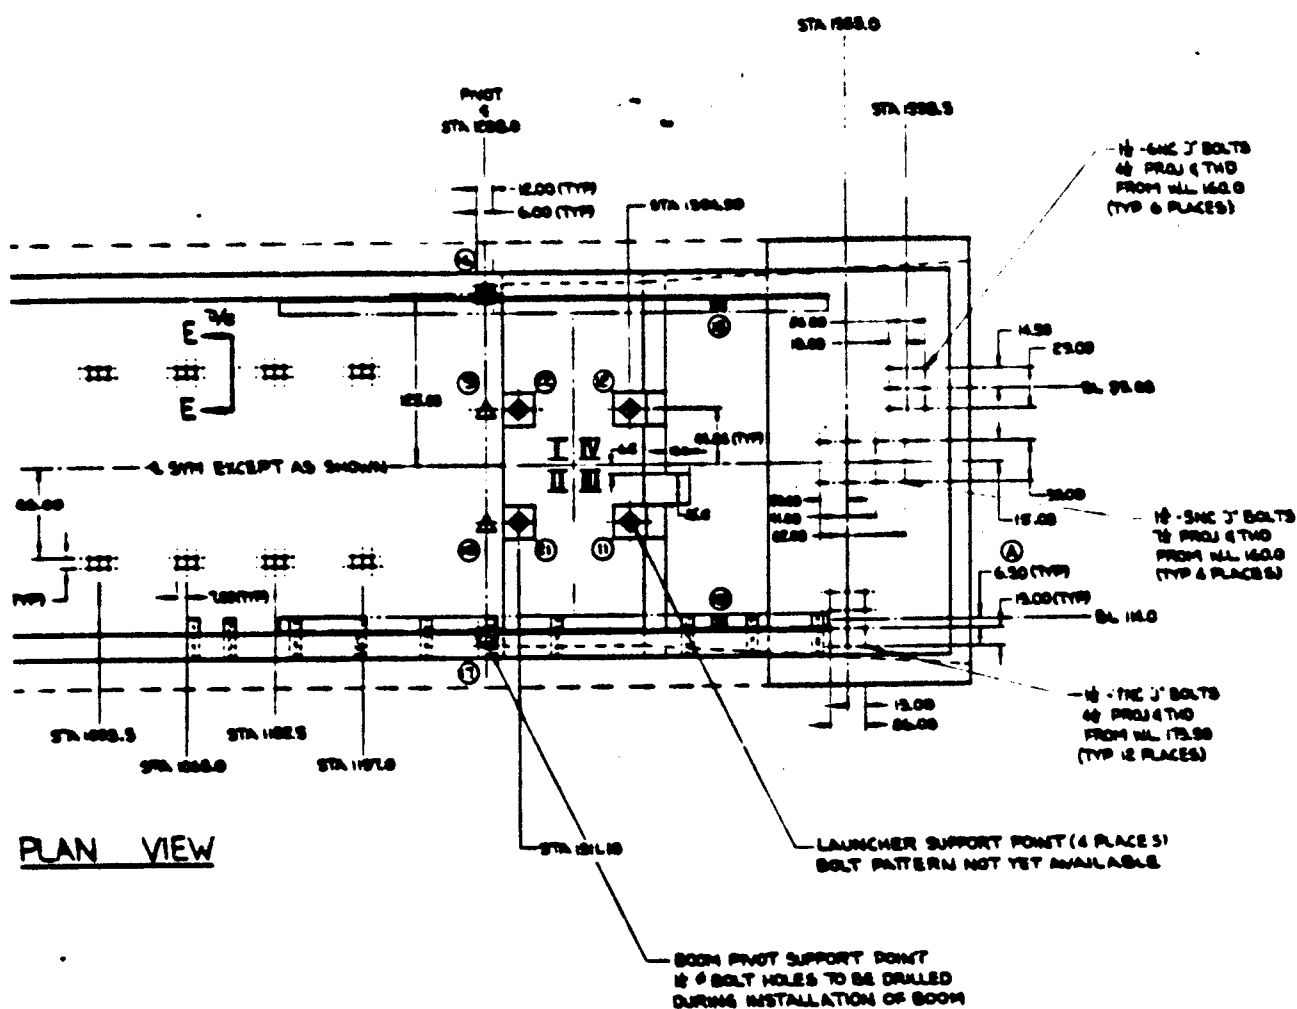

1/2" - 5/8" J BOLTS
44 PROJ (TWO
FROM ALL 160.0
(TYP 6 PLACES)

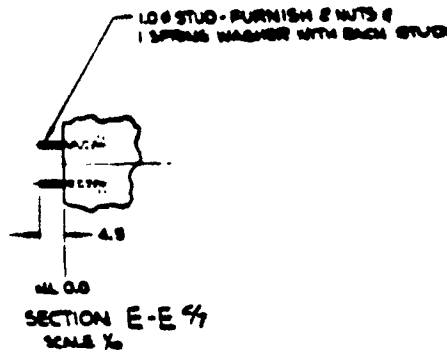


160.0
—BL 95.00

1/2" - 5/8" J BOLTS
70 PROJ (TWO
FROM ALL 160.0
(TYP 6 PLACES)

160.0
—BL 110.0

1/2" - 7/8" J BOLTS
44 PROJ (TWO
FROM ALL 170.0
(TYP 12 PLACES)

F (6 PLACES)
AVAILABLE

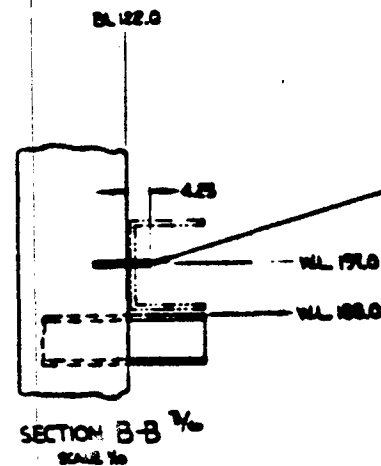

L 234.0 GRADE LEVEL



SECTION MECHANISM WALL 160.0
L 160.0

—LAUNCHER (ROOM PIVOT)

PLANE REFLECTION
IN DETAIL (SEE SHEET 2)

4. 234.0 GRADE LEVEL
5. ALL DIMENSIONS
6. PER DETAIL
7. DETAIL 1/4
8. 1/2" LONG P
9. 1/2" LONG P
10. 1/2" LONG P
11. 1/2" LONG P






PLAN VIEW



A

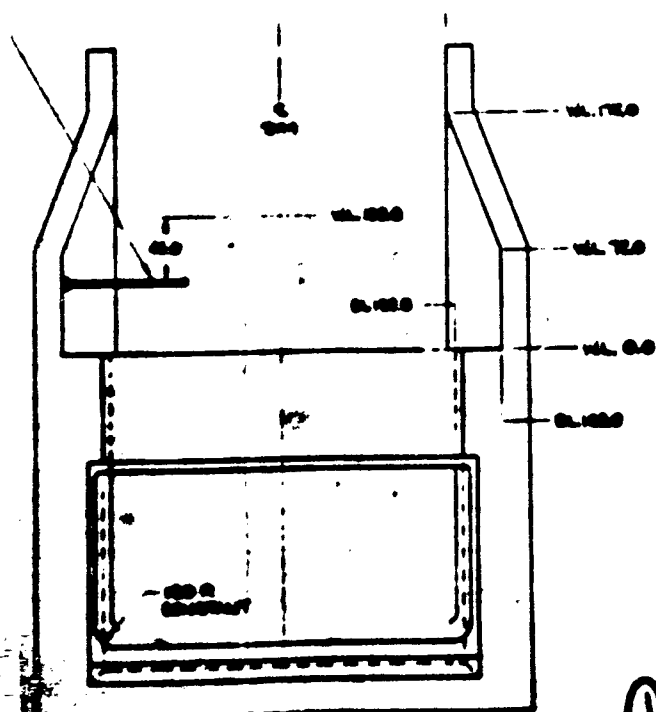

SECTION A-A



24

23

22

[illegible][illegible]

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675	676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702	703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729	730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783	784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810	811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837	838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864	865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891	892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972	973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991	992	993	994	995	996	997	998	999	1000	1001	1002	1003	1004	1005	1006	1007	1008	1009	1010	1011	1012	1013	1014	1015	1016	1017	1018	1019	1020	1021	1022	1023	1024	1025	1026	1027	1028	1029	1030	1031	1032	1033	1034	1035	1036	1037	1038	1039	1040	1041	1042	1043	1044	1045	1046	1047	1048	1049	1050	1051	1052	1053	1054	1055	1056	1057	1058	1059	1060	1061	1062	1063	1064	1065	1066	1067	1068	1069	1070	1071	1072	1073	1074	1075	1076	1077	1078	1079	1080	1081	1082	1083	1084	1085	1086	1087	1088	1089	1090	1091	1092	1093	1094	1095	1096	1097	1098	1099	1100	1101	1102	1103	1104	1105	1106	1107	1108	1109	1110	1111	1112	1113	1114	1115	1116	1117	1118	1119	1120	1121	1122	1123	1124	1125	1126	1127	1128	1129	1130	1131	1132	1133	1134	1135	1136	1137	1138	1139	1140	1141	1142	1143	1144	1145	1146	1147	1148	1149	1150	1151	1152	1153	1154	1155	1156	1157	1158	1159	1160	1161	1162	1163	1164	1165	1166	1167	1168	1169	1170	1171	1172	1173	1174	1175	1176	1177	1178	1179	1180	1181	1182	1183	1184	1185	1186	1187	1188	1189	1190	1191	1192	1193	1194	1195	1196	1197	1198	1199	1200	1201	1202	1203	1204	1205	1206	1207	1208	1209	1210	1211	1212	1213	1214	1215	1216	1217	1218	1219	1220	1221	1222	1223	1224	1225	1226	1227	1228	1229	1230	1231	1232	1233	1234	1235	1236	1237	1238	1239	1240	1241	1242	1243	1244	1245	1246	1247	1248	1249	1250	1251	1252	1253	1254	1255	1256	1257	1258	1259	1260	1261	1262	1263	1264	1265	1266	1267	1268	1269	1270	1271	1272	1273	1274	1275	1276	1277	1278	1279	1280	1281	1282	1283	1284	1285	1286	1287	1288	1289	1290	1291	1292	1293	1294	1295	1296	1297	1298	1299	1300	1301	1302	1303	1304	1305	1306	1307	1308	1309	1310	1311	1312	1313	1314	1315	1316	1317	1318	1319	1320	1321	1322	1323	1324	1325	1326	1327	1328	1329	1330	1331	1332	1333	1334	1335	1336	1337	1338	1339	1340	1341	1342	1343	1344	1345	1346	1347	1348	1349	1350	1351	1352	1353	1354	1355	1356	1357	1358	1359	1360	1361	1362	1363	1364	1365	1366	1367	1368	1369	1370	1371	1372	1373	1374	1375	1376	1377	1378	1379	1380	1381	1382	1383	1384	1385	1386	1387	1388	1389	1390	1391	1392	1393	1394	1395	1396	1397	1398	1399	1400	1401	1402	1403	1404	1405	1406	1407	1408	1409	1410	1411	1412	1413	1414	1415	1416	1417	1418	1419	1420	1421	1422	1423	1424	1425	1426	1427	1428	1429	1430	1431	1432	1433	1434	1435	1436	1437	1438	1439	1440	1441	1442	1443	1444	1445	1446	1447	1448	1449	1450	1451	1452	1453	1454	1455	1456	1457	1458	1459	1460	1461	1462	1463	1464	1465	1466	1467	1468	1469	1470	1471	1472	1473	1474	1475	1476	1477	1478	1479	1480	1481	1482	1483	1484	1485	1486	1487	1488	1489	1490	1491	1492	1493	1494	1495	1496	1497	1498	149
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	-----

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

- 5.3 Stiffness Requirements: The launcher supporting Structure shall have a minimum stiffness defined by the following spring constant.

$$K_z = 1.04 \times 10^6 \text{ \#/in (Vertical)}$$

This value is the stiffness requirement for each individual support, namely Load Points 11, 12, 21 and 22. The vertical stiffness of these points shall be equal within 10%.

Spring constant, as used here, is defined as the force required to deflect the structure one inch in the vertical direction. It is not a requirement that the support must be capable of supporting the load or the deflection equal to the spring constant, but the ratio of the actual forces (as described in 5.4.4.2) to the spring constant gives the maximum actual deflection allowed.

$$\frac{P_{\text{actual}}}{K_{\text{min}}} = \Delta_{\text{max. in \#/in}}$$

$$* = 0.4$$

- 5.4 Total Mass Requirements: Due to dynamic considerations the total mass of the substructure shall not be less than 300,000#. This mass shall consist of rigid material, such as steel and concrete, only.

5.5 COLLIMATOR ASSEMBLY

- 5.5.1 Structural design will consider the following requirements of the All-Inertial Guidance equipment due to ground shock.

- (a) Collimator and Bench Mark rotational stability displacement (static) to be maintained at 2 seconds of arc maximum.
- (b) Collimator rests on three pads individually attached to steel plates grouted to top of pedestal. Three studs imbedded in the pedestal provide hold down for collimator assembly. Weight of collimator approximately 1000 pounds.
- (c) Bench Marks (two required) weigh approximately 10 pounds and are independently mounted on flat plate atop ground pedestals, each having a 1 foot mounting surface.

~~CONFIDENTIAL~~

CONVAIR | ASTRONAUTICS

REPORT ZL-7-037

PAGE 23

5.6 STRUCTURAL DESIGN LOAD REQUIREMENTS

Data included in Appendix A to be supplied at a later date.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

FORM NO. A-703-2

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT ZL-7-037

PAGE 24

6. MECHANICAL CRITERIA

6.1 ENVIRONMENTAL REQUIREMENTS

6.1.1 The equipment in the Mechanical and Electrical Room is designed to operate in an environment of $+35^{\circ}\text{F}$ to $+110^{\circ}\text{F}$, 95% RH. It is recommended that a minimum temperature of $+50^{\circ}\text{F}$ and a minimum ventilation rate of four air changes per hour be maintained when personnel are performing maintenance in the building.

6.2 EQUIPMENT COOLING

6.2.1 Cooling air for Launch Control, Instrumentation, Test and Checkout Equipment and the missile equipment pod free of corrosion or explosive fumes and cleaned by standard mechanical filters. The air circuit shall be capable of operation independent of the refrigerant circuit.

6.2.2 Cooling air to Launch Control, Instrumentation and Checkout Equipment racks will be fed from a plenum underneath and be returned through a duct overhead. (Figure M-11). The system will be designed for 100% recirculation. (Figure M-8). Provision should be made to convert the system to 100% outside air remotely in the event of refrigeration failure. The system will provide a total of 4000 SCFM at $55^{\circ}\text{F} \pm 3^{\circ}\text{F}$, 65% RH max. Air average flow of 150 SCFM at 0.5" SP will be supplied to each rack as specified in Figure A-2. *(TO BE SUPPLIED WHEN AVAILABLE)*

6.2.3 Cooling air to the missile equipment pods will be fed to stubups on either side of the Missile Storage Area. (Exact location of these stubups has not been determined). The system will be designed 100% outside air. 1670 SCFM will be supplied at $40^{\circ}\text{F} \pm 5^{\circ}\text{F}$, 30" SP, at 50% RH (Fig. M-8). Additional 1000 SCFM at $40^{\circ} \pm 5^{\circ}\text{F}$ will be required in the second pod for telemetering and range safety equipment. A smaller amount will be required to maintain proper conditioning of AIG equipment in pod during standby.

6.2.4 The Hydraulic Supply Unit requires cooling water from the building supply system. One - 2" supply line and one - 2 1/2" drain line will be required. A maximum flow of 65 GPM of 40°F to 70°F water with 60 psig supply pressure is required. A total of 1000 gals. will be used during countdown.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

REPORT ZL-7-037

PAGE 28

CONVAIR ASTRONAUTICS

6.3 FLUID STUBUPS (Figure M-7)

6.3.1 Fluids will be supplied to the missile (except propellants) through flexible lines and hard tubing contained in an 18" caisson which passes through the Missile Storage Area wall and the erection boom trunnion. This caisson is attached to and rotates with the launcher. The flexible lines on the Mechanical and Electrical Room end are attached to a fixed plate and from there are routed to the proper unit of Ground Support Equipment. A sleeve must be provided in the building wall in which the caisson will rotate.

6.3.2 Propellants will be supplied to the missile through three additional stubups. Exact location of these stubups are shown in Fig. M-12 and M-13.

6.4 FLUID REQUIREMENTS

6.4.1 Fluid storage will be adequate to support one missile through load held one hour, unload, load, and launch. This must be accomplished after a ten day period of isolation commencing anytime in the resupply schedule.

The fluids supplied shall meet the following specifications:

Nitrogen MIL-N-6011 Type I Grade A

Oxygen MIL-P-25508

RP-1 MIL-P-25576

Trichloroethylene MA2-01512

Helium - Convair Specification No. 0-73002

6.4.2 Liquid oxygen must be stored in sufficient quantity to provide approximately 171,000 lbs. on board at launch.

6.4.3 Liquid nitrogen use is 390 gallons during countdown plus 980 gallons for a one hour hold.

6.4.4 200X gallons of trichloroethylene shall be stored at the launcher. (IF REQUIRED - WILL NOT BE FACILITY STORED)

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT ZL-7-037

PAGE 28

6.4.5 RP-1 must be stored at a temperature between +35°F and 77°F. Approximately 75,000 pounds are required on board at launch.

6.4.6 Uses and recommended storage for gaseous nitrogen are shown in Figure M-9 (sheets one through three).

6.4.7 Uses and recommended storage for helium are shown in Figure M-10.

6.4.8 Instrument air at 300 psig is required by the Pressurization Control Unit at a flow of 0.6 lbs. per min. -65°F dew point.

6.5 PROPELLANT SYSTEM

6.5.1 GENERAL

The propellant-loading system for this complex will be designed by Arthur D. Little (ADL), Inc. of Cambridge, Mass. Propellant system schematic is shown in Figure M-1. Sub-system flow diagrams for Liquid Oxygen, Fuel, Liquid Nitrogen, and Helium as proposed is shown in figures M-2 to M-5 respectively.

6.5.2 Storage Vessel Requirements

See Figure M-14.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

REPORT ZL-7-037

CONVAIR  ASTRONAUTICS

PAGE 27

This page intentionally left blank.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

FORM NO. A-700-2

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR  ASTRONAUTICS

REPORT ZL-7-037

PAGE 28

This page intentionally left blank.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

FORM NO. A-700-2


~~CONFIDENTIAL~~

CONFIDENTIAL

CONVAIR  ASTRONAUTICS

REPORT ZL 7-037


PAGE 30

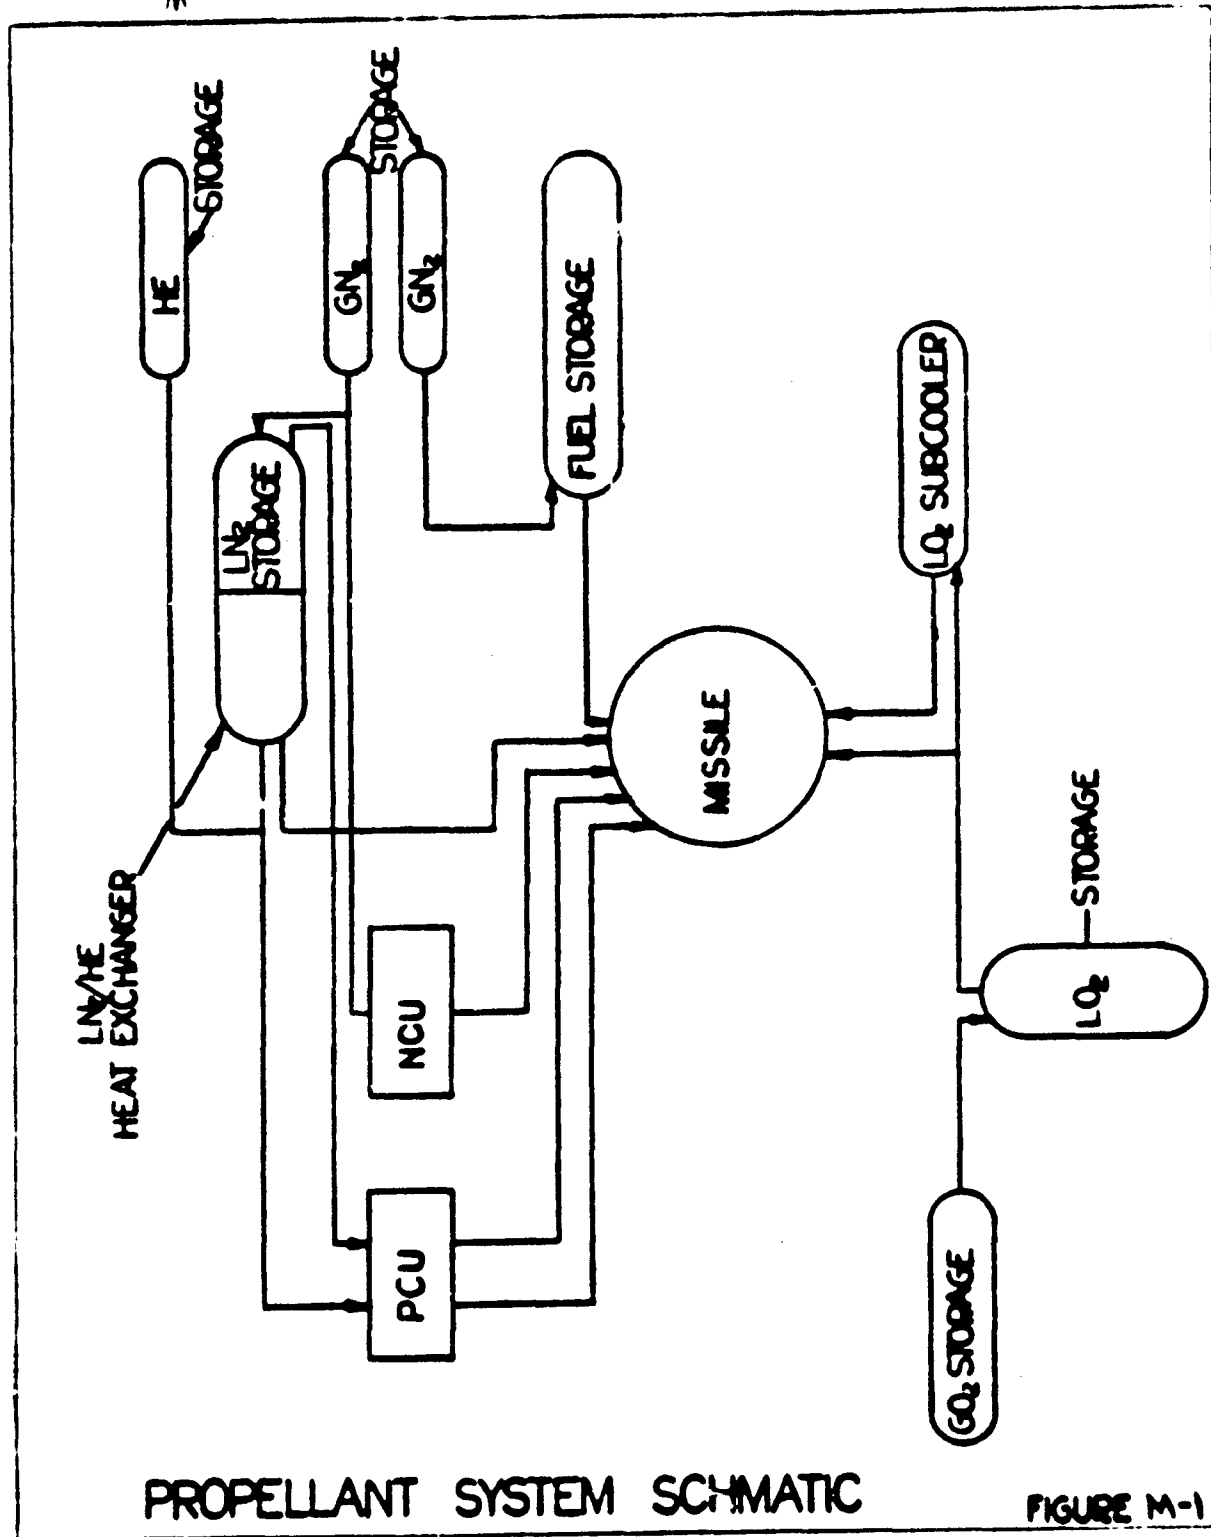

CONFIDENTIAL

~~CONFIDENTIAL~~

ZL-7-037
PAGE 31

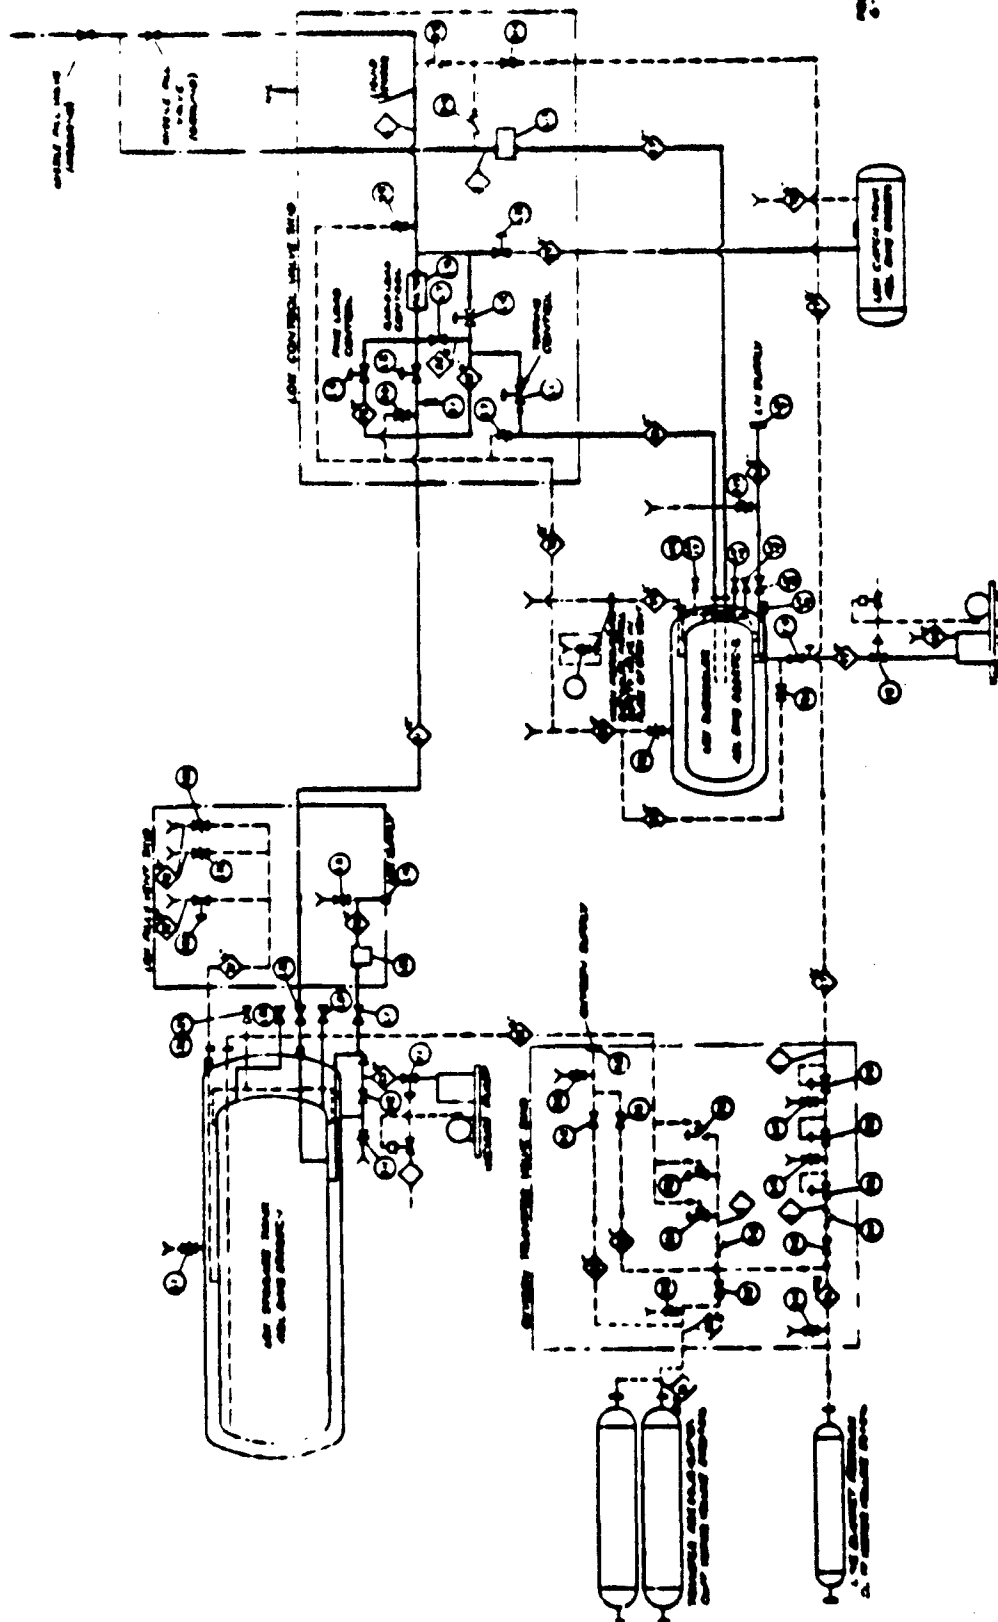

ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED


FLOW DIAGRAM OF LIQUID - OXYGEN SYSTEM FOR 66-T COMPLEX

FIGURE M-2

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

ZL-7-037
PAGE 32

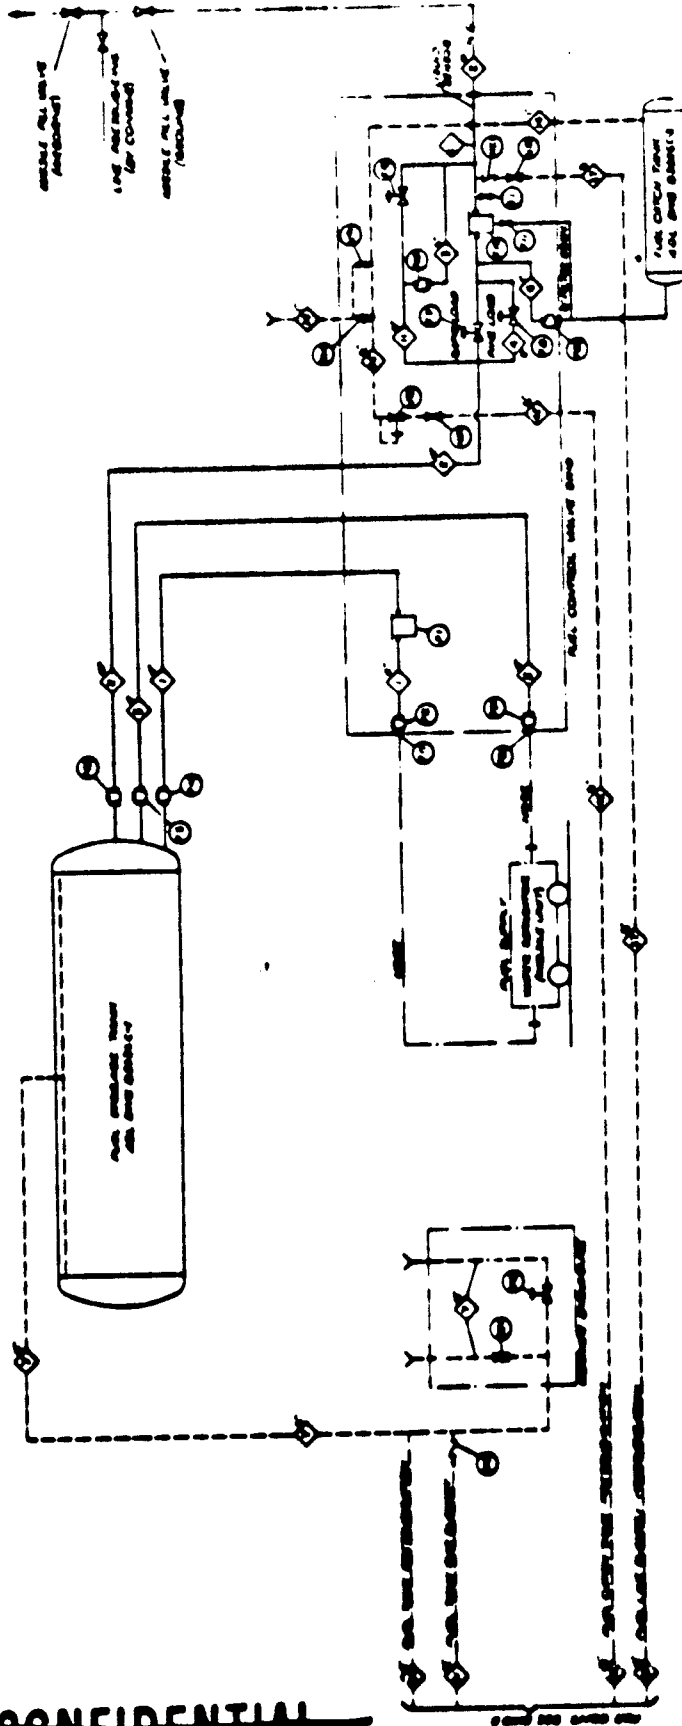


FLOW DIAGRAM OF FUEL SYSTEM FOR 65-T COMPLEX

~~CONFIDENTIAL~~

FIGURE M-3

~~CONFIDENTIAL~~

ZL-7-037
PAGE 33

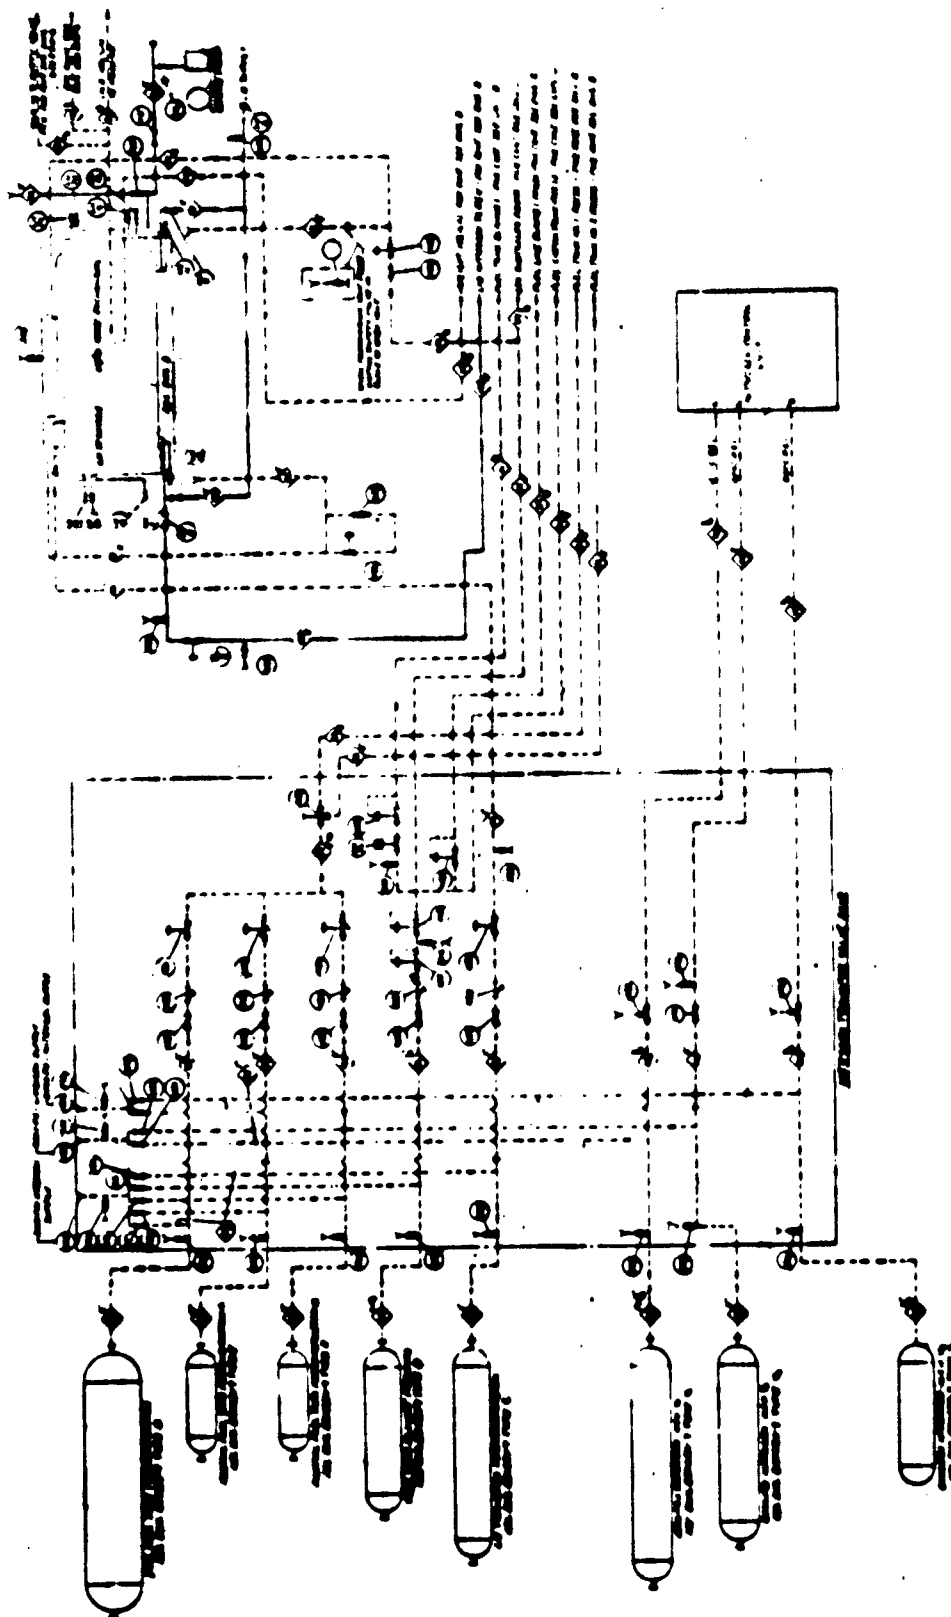


FLOW DIAGRAM OF NITROGEN SYSTEM FOR 65-T COMPLEX

~~CONFIDENTIAL~~

FIGURE M-4

~~CONFIDENTIAL~~


ZL-7-037
PAGE 34

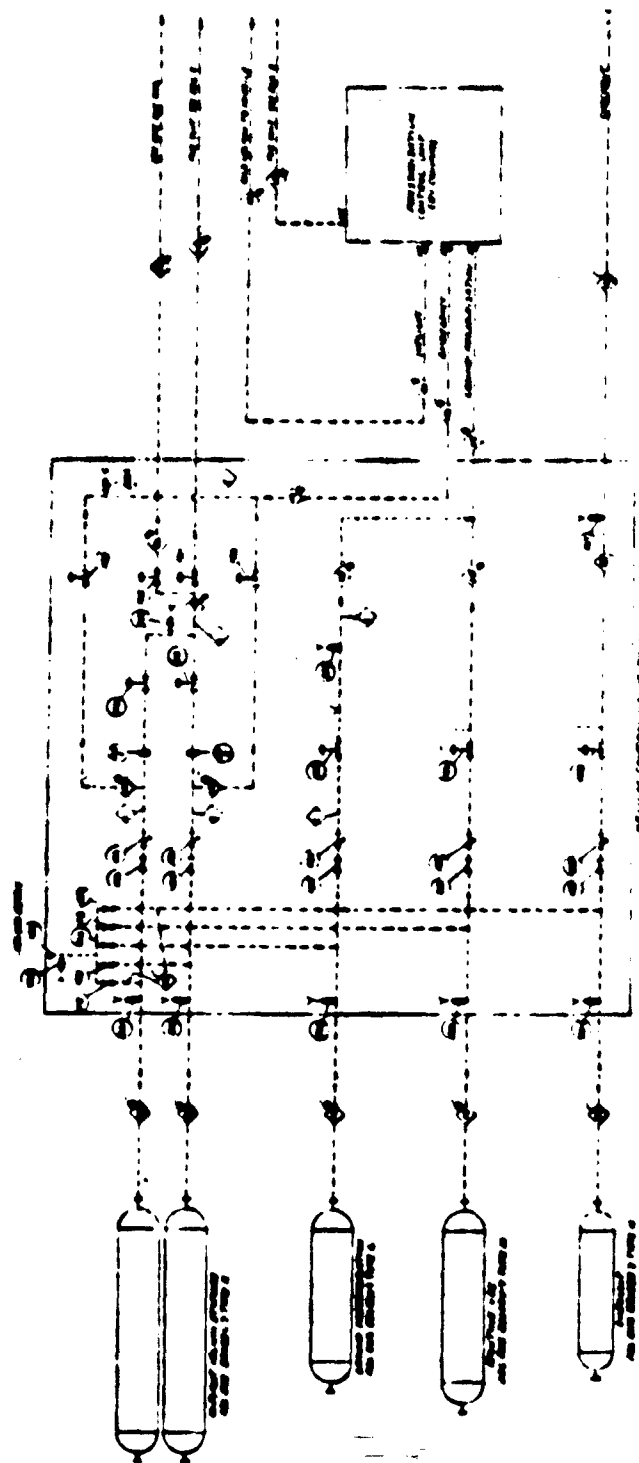


FLOW DIAGRAM OF HELIUM SYSTEM FOR 65-T COMPLEX


~~CONFIDENTIAL~~

FIGURE M-5

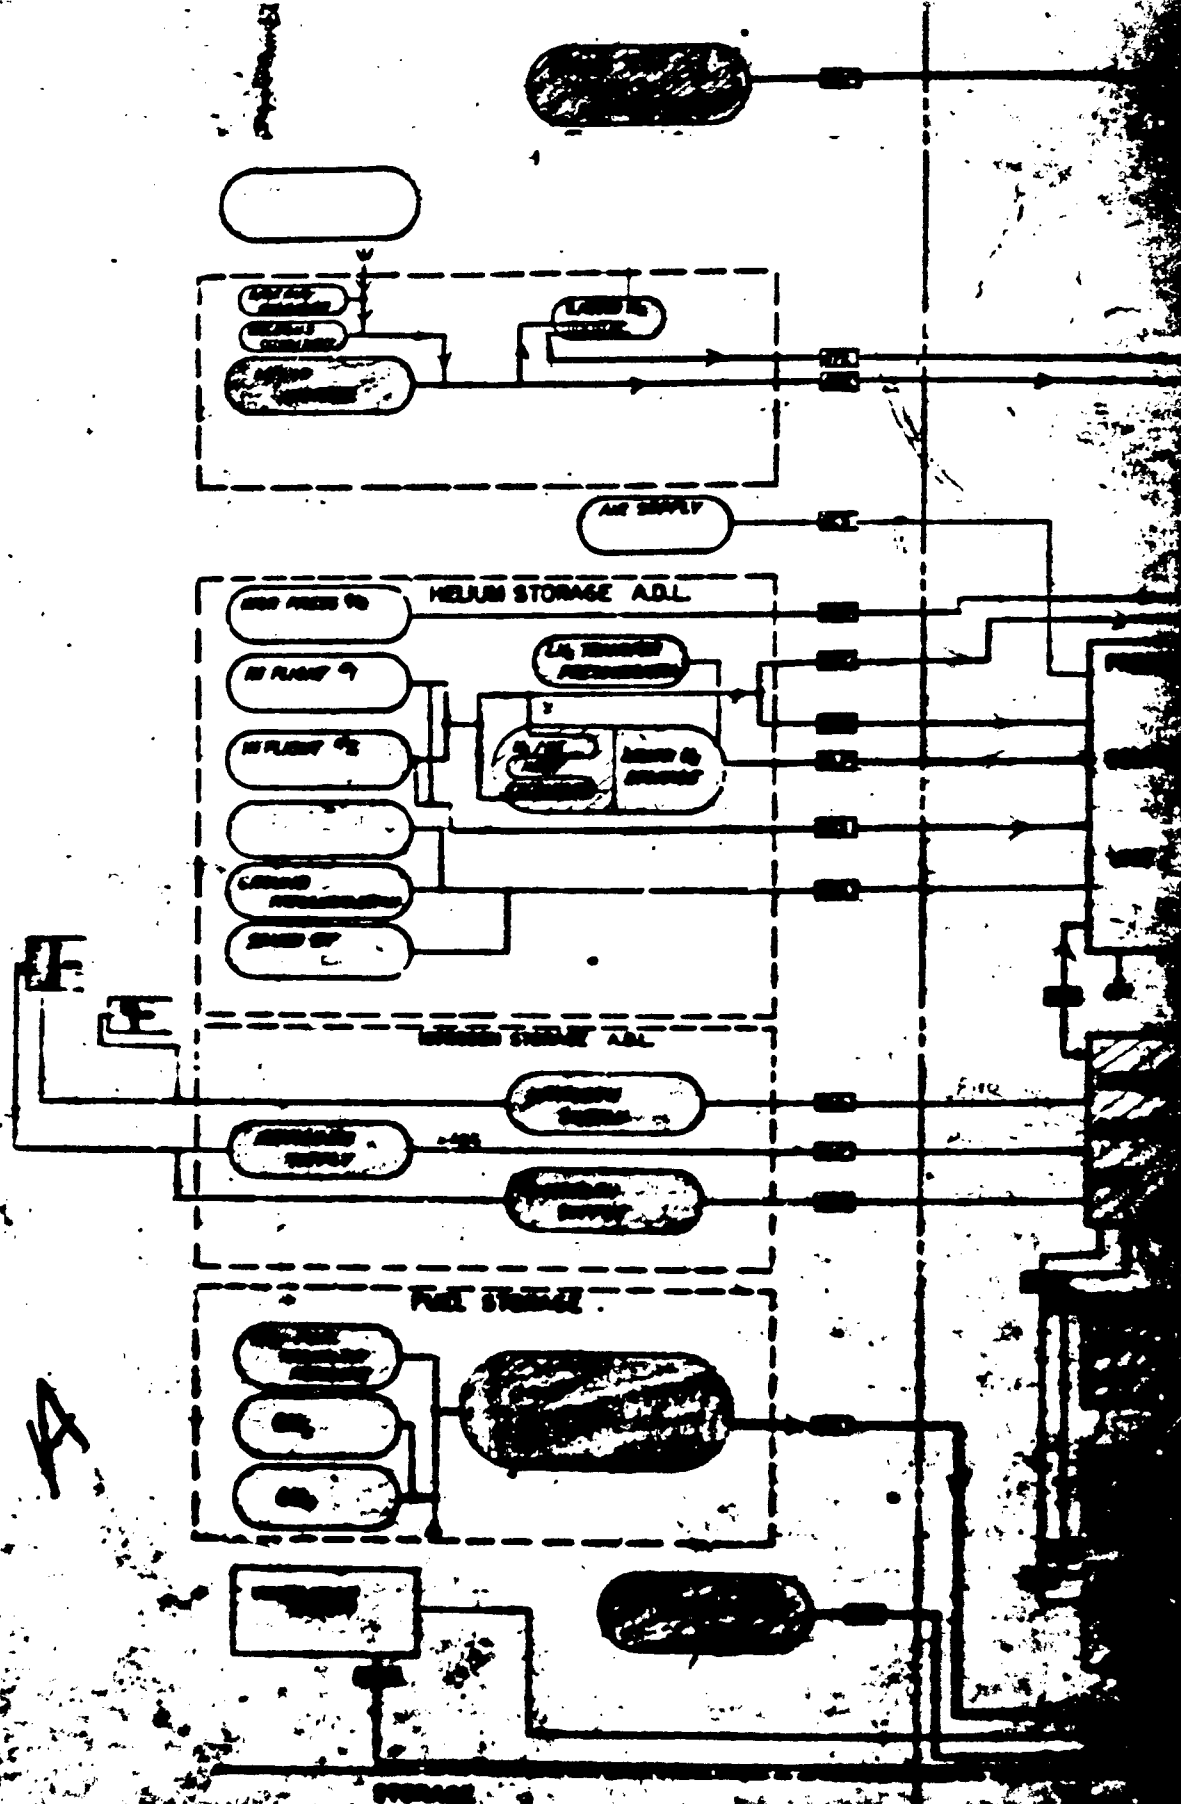

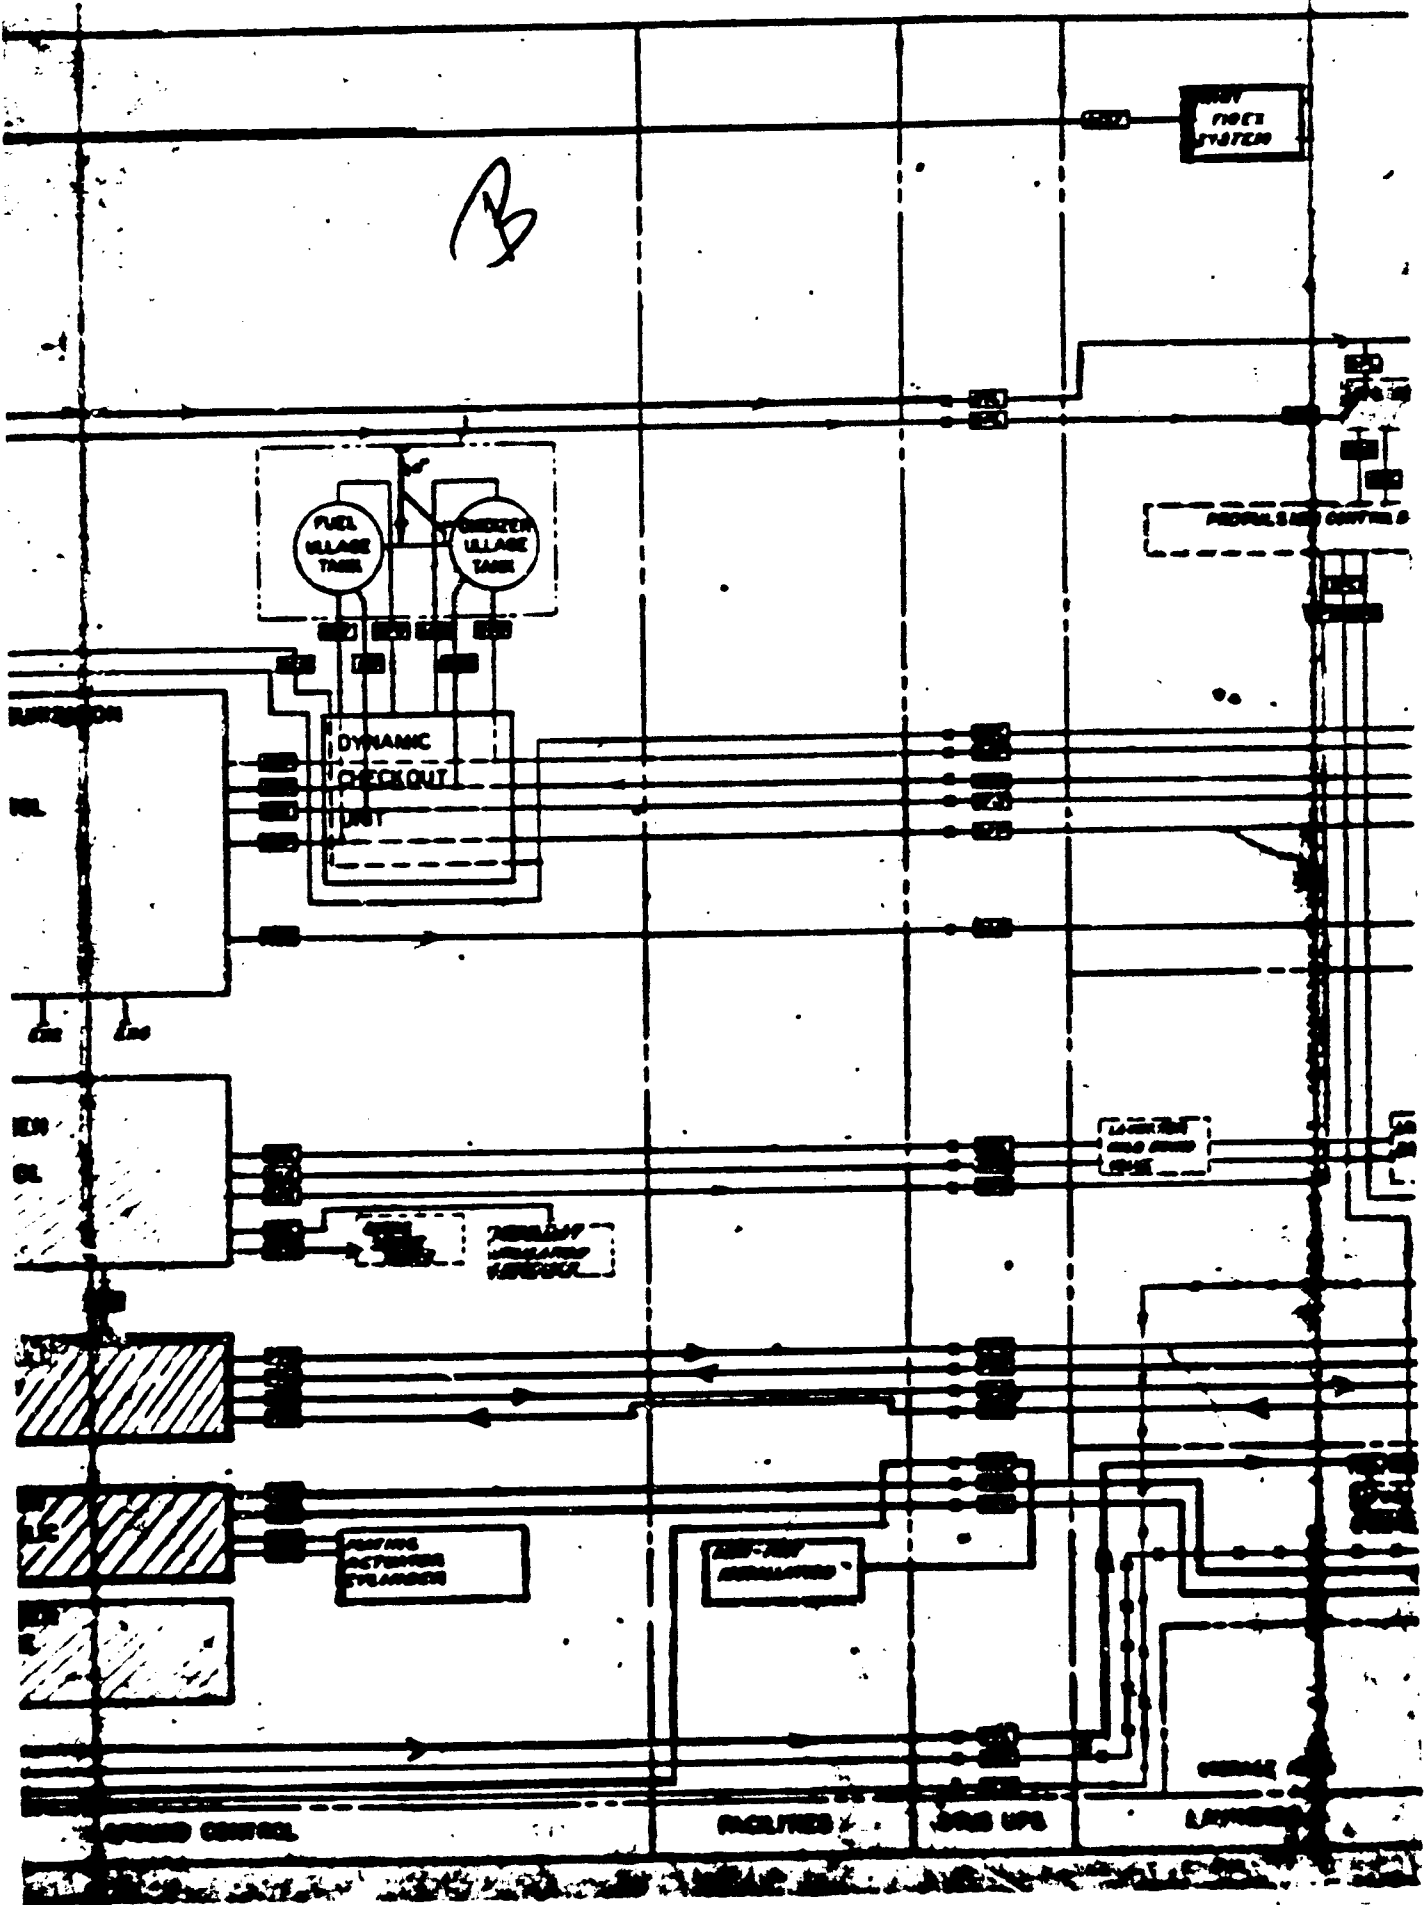

C

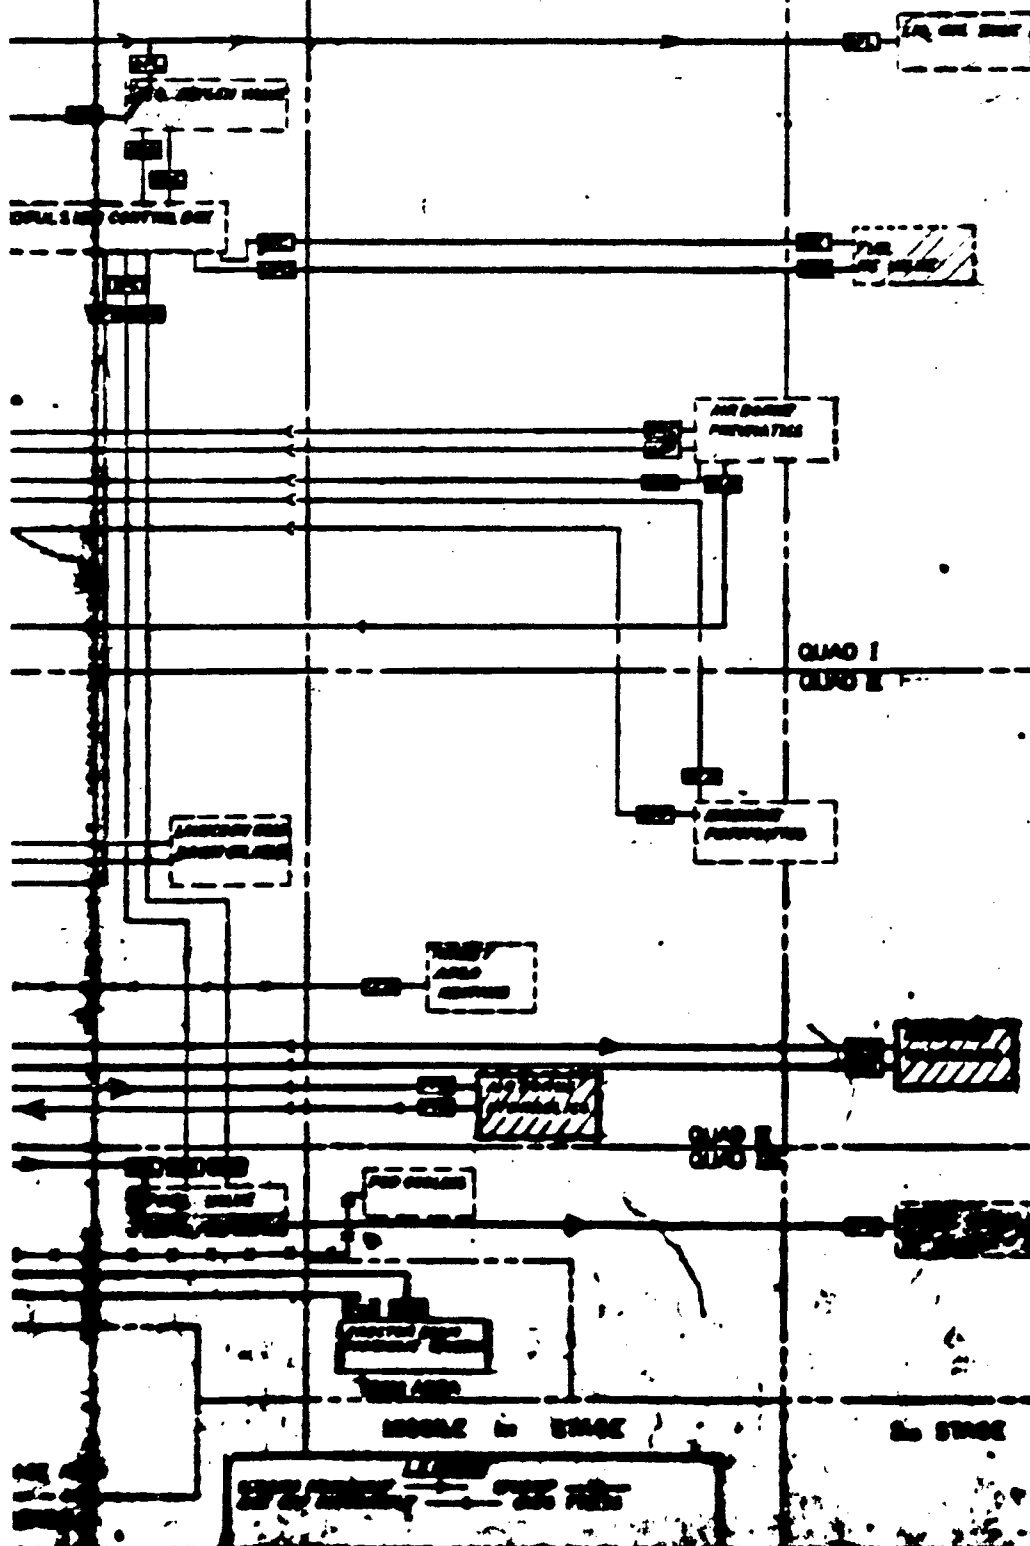

LINE	ITEM	QTY	UNIT	DESCRIPTION	REMARKS	REMARKS
101	101	1	CU	COMPRESSED AIR SUPPLY		
102	102	1	CU	AIR TO FWD COOLING		
103	103	1	CU	AIR TO FWD HEATING		
104	104	1	CU	AIR TO FWD LAMP		
105	105	1	CU	AIR TO FWD LAMP		
106	106	1	CU	AIR TO FWD LAMP		
107	107	1	CU	AIR TO FWD LAMP		
108	108	1	CU	AIR TO FWD LAMP		
109	109	1	CU	AIR TO FWD LAMP		
110	110	1	CU	AIR TO FWD LAMP		
111	111	1	CU	AIR TO FWD LAMP		
112	112	1	CU	AIR TO FWD LAMP		
113	113	1	CU	AIR TO FWD LAMP		
114	114	1	CU	AIR TO FWD LAMP		
115	115	1	CU	AIR TO FWD LAMP		
116	116	1	CU	AIR TO FWD LAMP		
117	117	1	CU	AIR TO FWD LAMP		
118	118	1	CU	AIR TO FWD LAMP		
119	119	1	CU	AIR TO FWD LAMP		
120	120	1	CU	AIR TO FWD LAMP		
121	121	1	CU	AIR TO FWD LAMP		
122	122	1	CU	AIR TO FWD LAMP		
123	123	1	CU	AIR TO FWD LAMP		
124	124	1	CU	AIR TO FWD LAMP		
125	125	1	CU	AIR TO FWD LAMP		
126	126	1	CU	AIR TO FWD LAMP		
127	127	1	CU	AIR TO FWD LAMP		
128	128	1	CU	AIR TO FWD LAMP		
129	129	1	CU	AIR TO FWD LAMP		
130	130	1	CU	AIR TO FWD LAMP		
131	131	1	CU	AIR TO FWD LAMP		
132	132	1	CU	AIR TO FWD LAMP		
133	133	1	CU	AIR TO FWD LAMP		
134	134	1	CU	AIR TO FWD LAMP		
135	135	1	CU	AIR TO FWD LAMP		
136	136	1	CU	AIR TO FWD LAMP		
137	137	1	CU	AIR TO FWD LAMP		
138	138	1	CU	AIR TO FWD LAMP		
139	139	1	CU	AIR TO FWD LAMP		
140	140	1	CU	AIR TO FWD LAMP		
141	141	1	CU	AIR TO FWD LAMP		
142	142	1	CU	AIR TO FWD LAMP		
143	143	1	CU	AIR TO FWD LAMP		
144	144	1	CU	AIR TO FWD LAMP		
145	145	1	CU	AIR TO FWD LAMP		
146	146	1	CU	AIR TO FWD LAMP		
147	147	1	CU	AIR TO FWD LAMP		
148	148	1	CU	AIR TO FWD LAMP		
149	149	1	CU	AIR TO FWD LAMP		
150	150	1	CU	AIR TO FWD LAMP		
151	151	1	CU	AIR TO FWD LAMP		
152	152	1	CU	AIR TO FWD LAMP		
153	153	1	CU	AIR TO FWD LAMP		
154	154	1	CU	AIR TO FWD LAMP		
155	155	1	CU	AIR TO FWD LAMP		
156	156	1	CU	AIR TO FWD LAMP		
157	157	1	CU	AIR TO FWD LAMP		
158	158	1	CU	AIR TO FWD LAMP		
159	159	1	CU	AIR TO FWD LAMP		
160	160	1	CU	AIR TO FWD LAMP		
161	161	1	CU	AIR TO FWD LAMP		
162	162	1	CU	AIR TO FWD LAMP		
163	163	1	CU	AIR TO FWD LAMP		
164	164	1	CU	AIR TO FWD LAMP		
165	165	1	CU	AIR TO FWD LAMP		
166	166	1	CU	AIR TO FWD LAMP		
167	167	1	CU	AIR TO FWD LAMP		
168	168	1	CU	AIR TO FWD LAMP		
169	169	1	CU	AIR TO FWD LAMP		
170	170	1	CU	AIR TO FWD LAMP		
171	171	1	CU	AIR TO FWD LAMP		
172	172	1	CU	AIR TO FWD LAMP		
173	173	1	CU	AIR TO FWD LAMP		
174	174	1	CU	AIR TO FWD LAMP		
175	175	1	CU	AIR TO FWD LAMP		
176	176	1	CU	AIR TO FWD LAMP		
177	177	1	CU	AIR TO FWD LAMP		
178	178	1	CU	AIR TO FWD LAMP		
179	179	1	CU	AIR TO FWD LAMP		
180	180	1	CU	AIR TO FWD LAMP		
181	181	1	CU	AIR TO FWD LAMP		
182	182	1	CU	AIR TO FWD LAMP		
183	183	1	CU	AIR TO FWD LAMP		
184	184	1	CU	AIR TO FWD LAMP		
185	185	1	CU	AIR TO FWD LAMP		
186	186	1	CU	AIR TO FWD LAMP		
187	187	1	CU	AIR TO FWD LAMP		
188	188	1	CU	AIR TO FWD LAMP		
189	189	1	CU	AIR TO FWD LAMP		
190	190	1	CU	AIR TO FWD LAMP		
191	191	1	CU	AIR TO FWD LAMP		
192	192	1	CU	AIR TO FWD LAMP		
193	193	1	CU	AIR TO FWD LAMP		
194	194	1	CU	AIR TO FWD LAMP		
195	195	1	CU	AIR TO FWD LAMP		
196	196	1	CU	AIR TO FWD LAMP		
197	197	1	CU	AIR TO FWD LAMP		
198	198	1	CU	AIR TO FWD LAMP		
199	199	1	CU	AIR TO FWD LAMP		
200	200	1	CU	AIR TO FWD LAMP		

GENERAL SITE SCHEMATIC - FIGURE M-6
FLUID SYSTEMS "E" SERIES (SEE M-6-001)

A

PAUSE PATTERN OF THESE
PLATES TO BE DETERMINED
AT A LATER DATE

SECTION

SECTION
BODY

LAUNCHER

SECTION
BODY

c

D

~~CONFIDENTIAL~~

C

~~CONFIDENTIAL~~

2

ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED

DATE 11/11/01 BY 1045

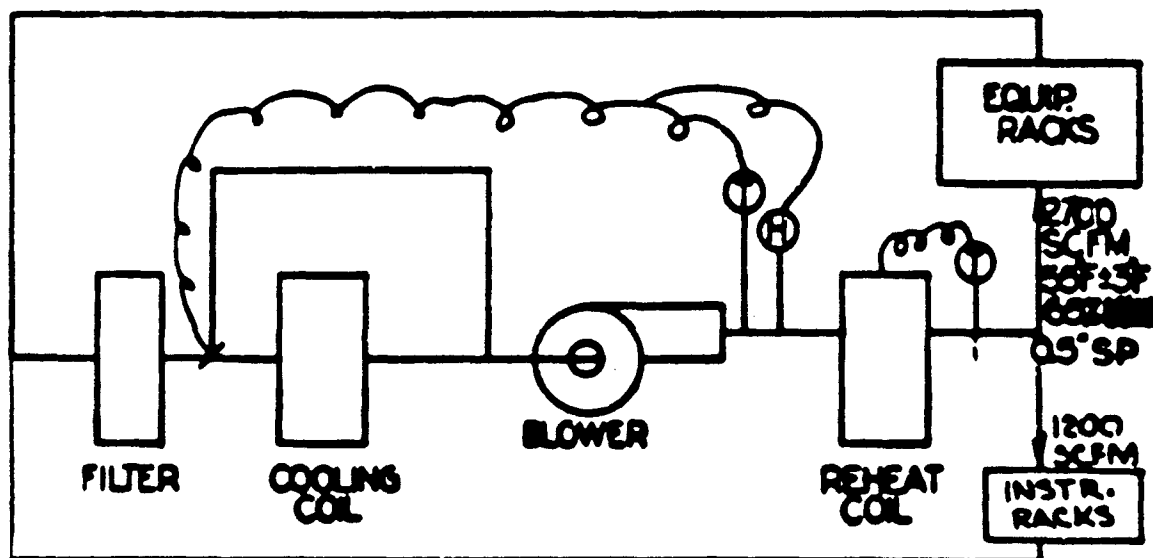
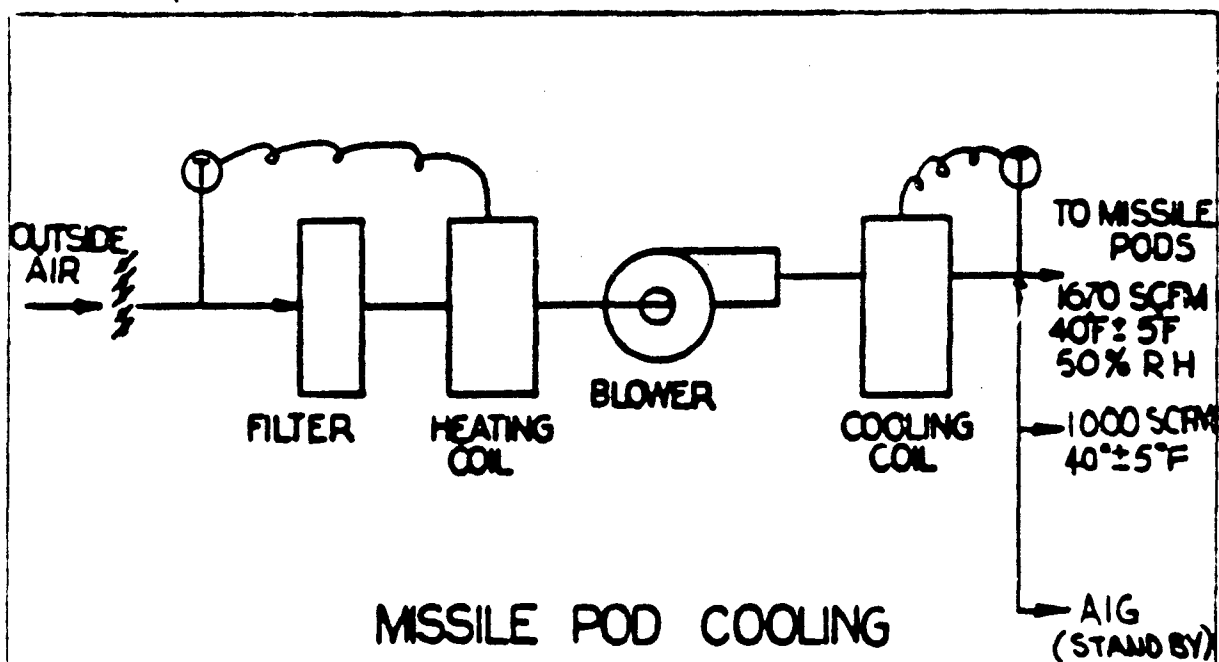
~~CONFIDENTIAL~~

FIGURE 14-8

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT ZL-7-037

PAGE 38

GN₂ Storage Requirements

		<u>Lbs.</u>	
1. Checkout			
(a) 4000 - 1200 PSIG Storage Cylinder			
(1) Engine Service Trailer		7.4	
(2) Purge System		185.0	
(3) Nitrogen Charge Panel Low Pressure		9.038	
Total			192.4
(b) 8000 - 4700 PSIG Storage Cylinder			
(1) Booster and Sustainer Accumulators		3.6	
Total			3.6
(c) 4000 - 2500 PSIG Storage Cylinder			
(1) P.U. Exerciser		1.0	
Total			1.0
2. Leakage and Usage - Twenty Days			
(a) 4000 - 1200 PSIG Storage Cylinder			
(1) Hydraulic Supply Unit		4.7	
Total			4.7
(b) 8000 - 4700 PSIG Storage Cylinder			
(1) Booster and Sustainer Accumulators		1.1	
Total			1.1
(c) 4000 - 2500 PSIG Storage Cylinder			
(1) Release System		10	
(2) Standby Nitrogen Supply to the PCU		13.3	
Total			23.3

Figure M-6
Sheet 1 of 3

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, U.S.C., Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

FORM NO. 6-700-2

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT ZL-7-037

PAGE 39

		<u>Lbs.</u>	
3. First Launch			
(a)	8000 - 4700 PSIG Storage Cylinder		
(1)	S-T Monopropellant APS	4.6	
	Total		4.6
(b)	4000 - 2500 PSIG Storage Cylinder		
(1)	Launcher Release System	6.0	
	Total		6.0
4. Abort			
(a)	4000 - 1200 PSIG Storage Cylinder		
(1)	Booster Gas Generator Lox Purge	51.7	
(2)	Booster LOX Dome Purge	133.2	
(3)	Sustainer Gas Generator Fuel Purge	88.6	
(4)	Sustainer Gas Generator LOX Purge	3.7	
(5)	Sustainer LOX Dome Purge	66.6	
(6)	Vernier LOX Purge	7.4	
(7)	Vernier Fuel Purge	5.6	
(8)	Trichler Purge	36.4	
	Total		393.2
(b)	8000 - 4700 PSIG Storage Cylinder		
(1)	S-T Monopropellant APS	4.6	
	Total		4.6

Figure M-6
Sheet 2 of 3

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR | ASTRONAUTICS

REPORT 21-7-017

PAGE 40

5. Launch Aborted Missile

Lbs.

(a) 4000 - 1200 PSIG Storage Cylinder			
(1)	Booster GG LOX Dome Pre-Ignition Purge	4.4	
(2)	Sustainer GG LOX Dome Pre-Ignition Purge	1.8	
	Total		6.2
(b) 8000 - 4700 Storage Cylinder			
(1)	Booster Accumulator Charge	3.3	
(2)	Sustainer Accumulator Charge	.2	
(3)	S-T Monopropellant APS	4.6	
	Total		8.1
(c) 4000 - 2500 PSIG Storage Cylinder			
(1)	Launcher Release System	6.0	
	Total		6.0

6. The maximum demand needed in accordance with the established ground rules are:

(a) 4000 - 1200 PSIG Storage Cylinder			
(1)	Total (1,2,4,5)	596.5	
(2)	Recommended Design	700.0	
(b) 8000 - 4700 PSIG Storage Cylinder			
(1)	Total (1,2,4,5)	17.4	
(2)	Recommended Design	25.0	
(c) 4000 - 2500 PSIG Storage Cylinder			
(1)	Total (1,2,4,5)	* 32.0	
(2)	Recommended Design	40.0	

*For release system charge during missile to launcher mating.

Figure M-9
Sheet 3 of 3

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT ZL-7-037

PAGE 41

HELIUM STORAGE REQUIREMENTS

1. Checkout of Pneumatics Systems on Missile

- A. Fill in-flight spheres to 3000 psi with ambient Helium (through ADL valve H-8 or H-18)..... 51.0#/CO
- B. ADL High Pressure C/O Storage
- 1. Raise pressure on in-flight spheres from 3000 psi to 3300 psi..... 5.0#/CO
 - 2. To conduct leak tests on missile pneumatics system..... 0.2#/CO
 - 3. To overpressurize LO₂ ullage tank and crack airborne LO₂ relief valve..... 0.3#/CO
 - 4. To overpressurize fuel ullage tank & crack airborne fuel relief valve..... 0.3#/CO
 - 5. To crack fuel pressurization line relief valve in PCU..... 0.1#/CO
 - 6. To flow airborne (in-flight) bottle relief valves..... 6.6#/CO
- C. From ADL Storage - "Ground Pressurization"
- 1. Pressurize fuel ullage tank to 60 psig..... 2.0#/CO
 - 2. Pressurize LO₂ ullage tank to 26 psig..... 1.8#/CO
- D. To exercise emergency pressurization system & valves..... 0.2#/CO

(This quantity comes to PCU through line H-3)

2. To Launch a Missile Without a Hold

	Quantity
A. Put in-flight helium aboard.....	137.0#
B. For engine-start demand.....	3.0#
C. Pressurize fuel tank to 30 psig.....	24.5#
D. Pressurize fuel tank from 30 to 60 psig.....	0.9#
E. Pressurize LO ₂ tank from 2.2 to 26 psig.....	2.4#
F. Pressurization console leakage.....	0.3#

3. If a one-hour hold occurs during launch, add:

- A. Engine bleed and leakage..... 7.6#/hr.
- B. PCU leakage..... 1.2#/hr.

Figure M-10
Sheet 1 of 3

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 2L-7-007

PAGE 42

4. To Static Fire (based on one-hour maximum hold)

A. Lead in-flight spheres with refrigerated helium.....	137.0#
B. For engine start demand.....	3.0#
C. Engine bleed and leakage.....	7.6#/hr.
D. Pressurize fuel tank to 30 psig.....	24.5#
E. Pressurize fuel tank from 30 to 60 psig.....	0.9#
F. Pressurize LO ₂ tank from 2.2 to 26 psig.....	2.4#
G. PCU leakage.....	1.2#/hr.
H. Pressurize LO ₂ tank at 2.2 psig during deloxing.....	42.3#
J. Pressurize fuel tank at 8.5 psig during defueling...	24.1#
K. Raise LO ₂ tank pressure from 2.2 to 5.5 psig for standby.....	6.2#

5. To delox and defuel after aborted flight. (Assumes no LO₂ or fuel used, that missile was completely loaded with fuel and LO₂ and was pressurized to 26 and 60 psig)

A. Pressurize LO ₂ tank at 2.2 psig during deloxing.....	44.0#
B. Pressurize fuel tank at 8.5 psig during defueling...	25.0#
C. Raise LO ₂ tank pressure from 2.2 to 5.5 psig for standby.....	6.2#

6. Routine uses (extended periods on standby):

A. PCU leakage.....	25.0#/mo.
B. Propulsion & Pneumatic Valve Leakage.....	95.0#/mo.
C. Leakage through fill and drain valve.....	0.8#/mo.

7. Summary of Data Upon Which the Helium Storage in Enclosure (B) Was Based

A. High pressure checkout supply (to Dynamic Checkout Unit):	
Requirement per checkout of I.B.1 thru 6.	12.5#
For two (2) checkout capability = $12.5 \times 2 =$	25.0#
Allowance for contingencies =	5.0#
Total-High pressure checkout supply for DCU	30.0#
B. In-Flight helium and checkout supply	
In-flight helium requirement of II.A. & B	140.0#
Engine bleed and leakage for one hour - III.A	7.6#
Checkout of missile pneumatics system - I.A.	51.0#
Per two (2) launch & checkout capability =	
$198.6 \times 2 =$	397.2#
Exercise emerg. press. system & valves - I.D.	0.2#
Allowance for contingencies =	22.3#
Total-In-flight & checkout supply =	420.0#

Figure M-10
Sheet 2 of 3

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 4L-7-0:7

PAGE 43

- C. Engine Controls Supply
Deleted - Engine controls helium to be supplied
from the In-Flight Helium and Checkout Supply
- D. Ground pressurization supply
Assume:
- | | |
|---|--------|
| 1. One abort (includes one-hour hold):
of IV.D thru G and V.A. thru C. = | 104.2# |
| 2. One launch (includes a one-hour hold):
of II.C. thru F and III.B | 29.3# |
| 3. Check of 2 missiles:
of I.C.1. thru 2. x 2 = | 7.6# |
| 4. Allowance for contingencies | 38.9# |
| Total-Ground Pressurization Supply = | 180.0# |
- E. Routine uses supply:
of V.A. thru C. = 120.8#
Allowance for contingencies = 29.2#
Total-Routine Use Supply= 150.0#

Figure M-10
Sheet 3 of 3

~~CONFIDENTIAL~~

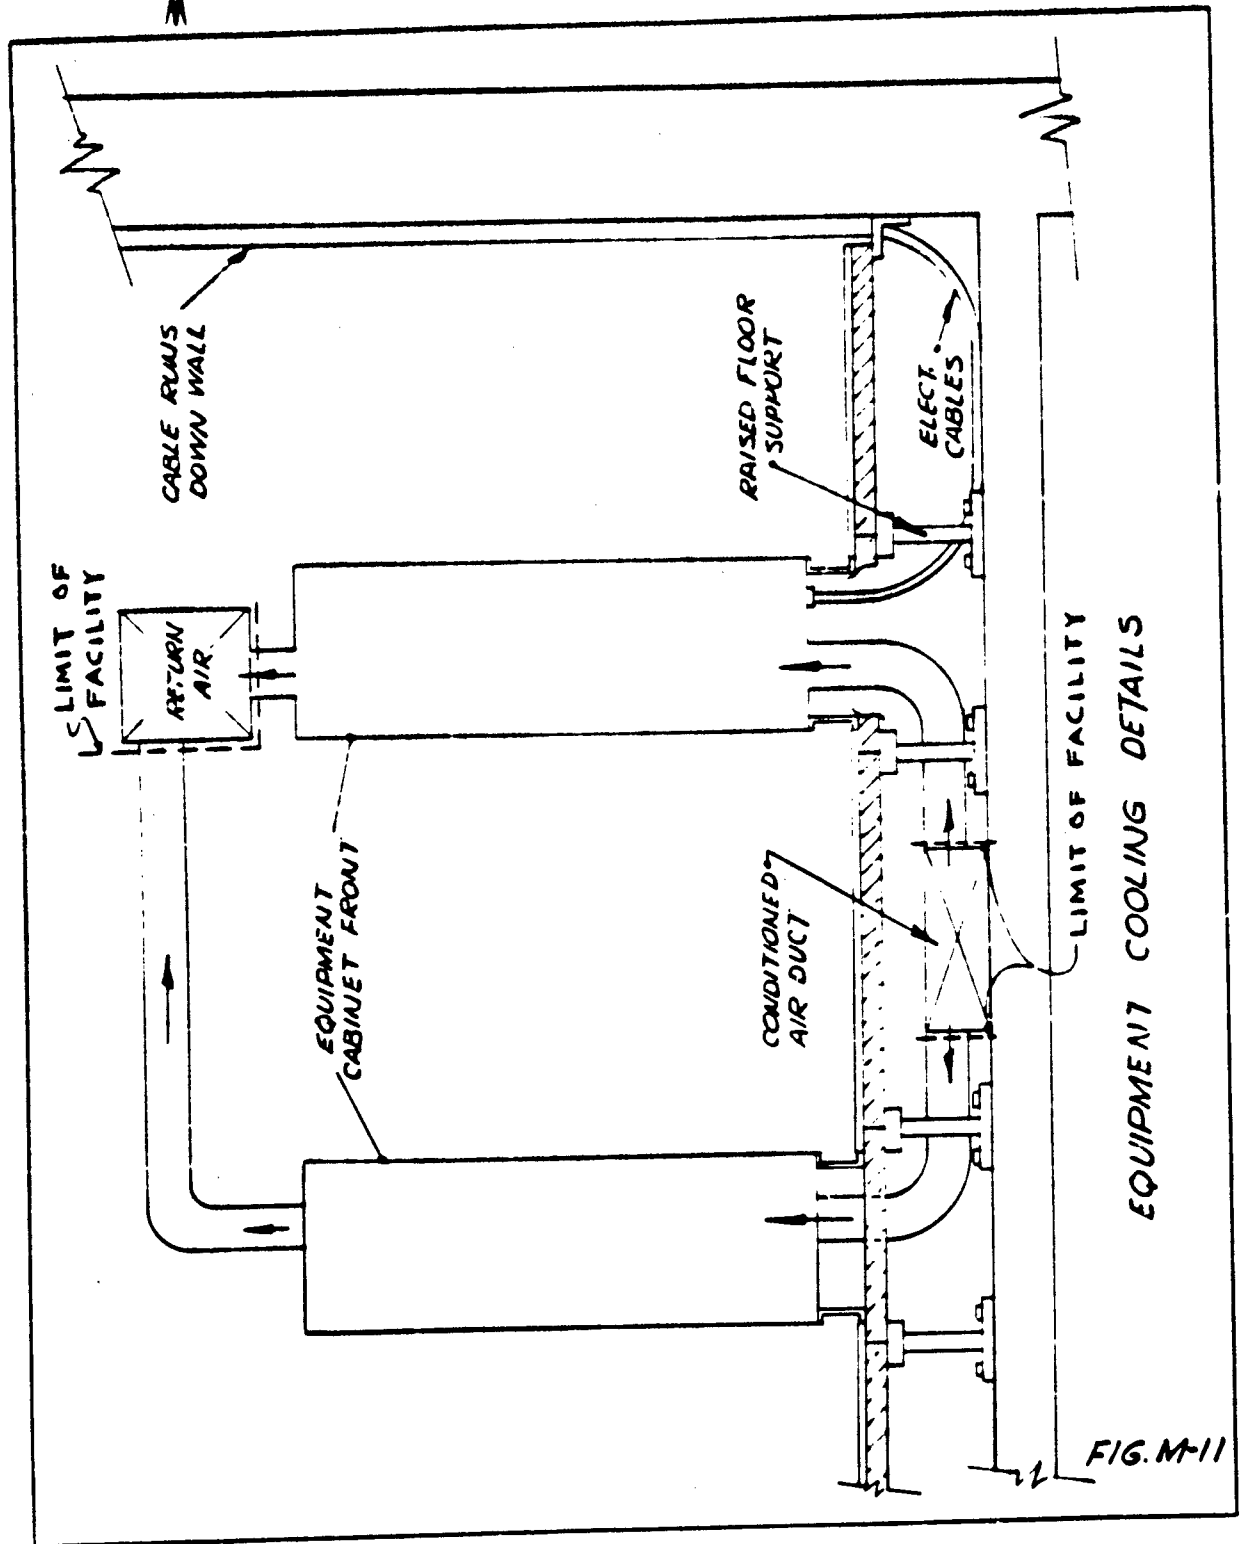


FIG. M-11

~~CONFIDENTIAL~~

CONVAIR | ASTRONAUTICS

REPORT ZL 7-037

PAGE 45

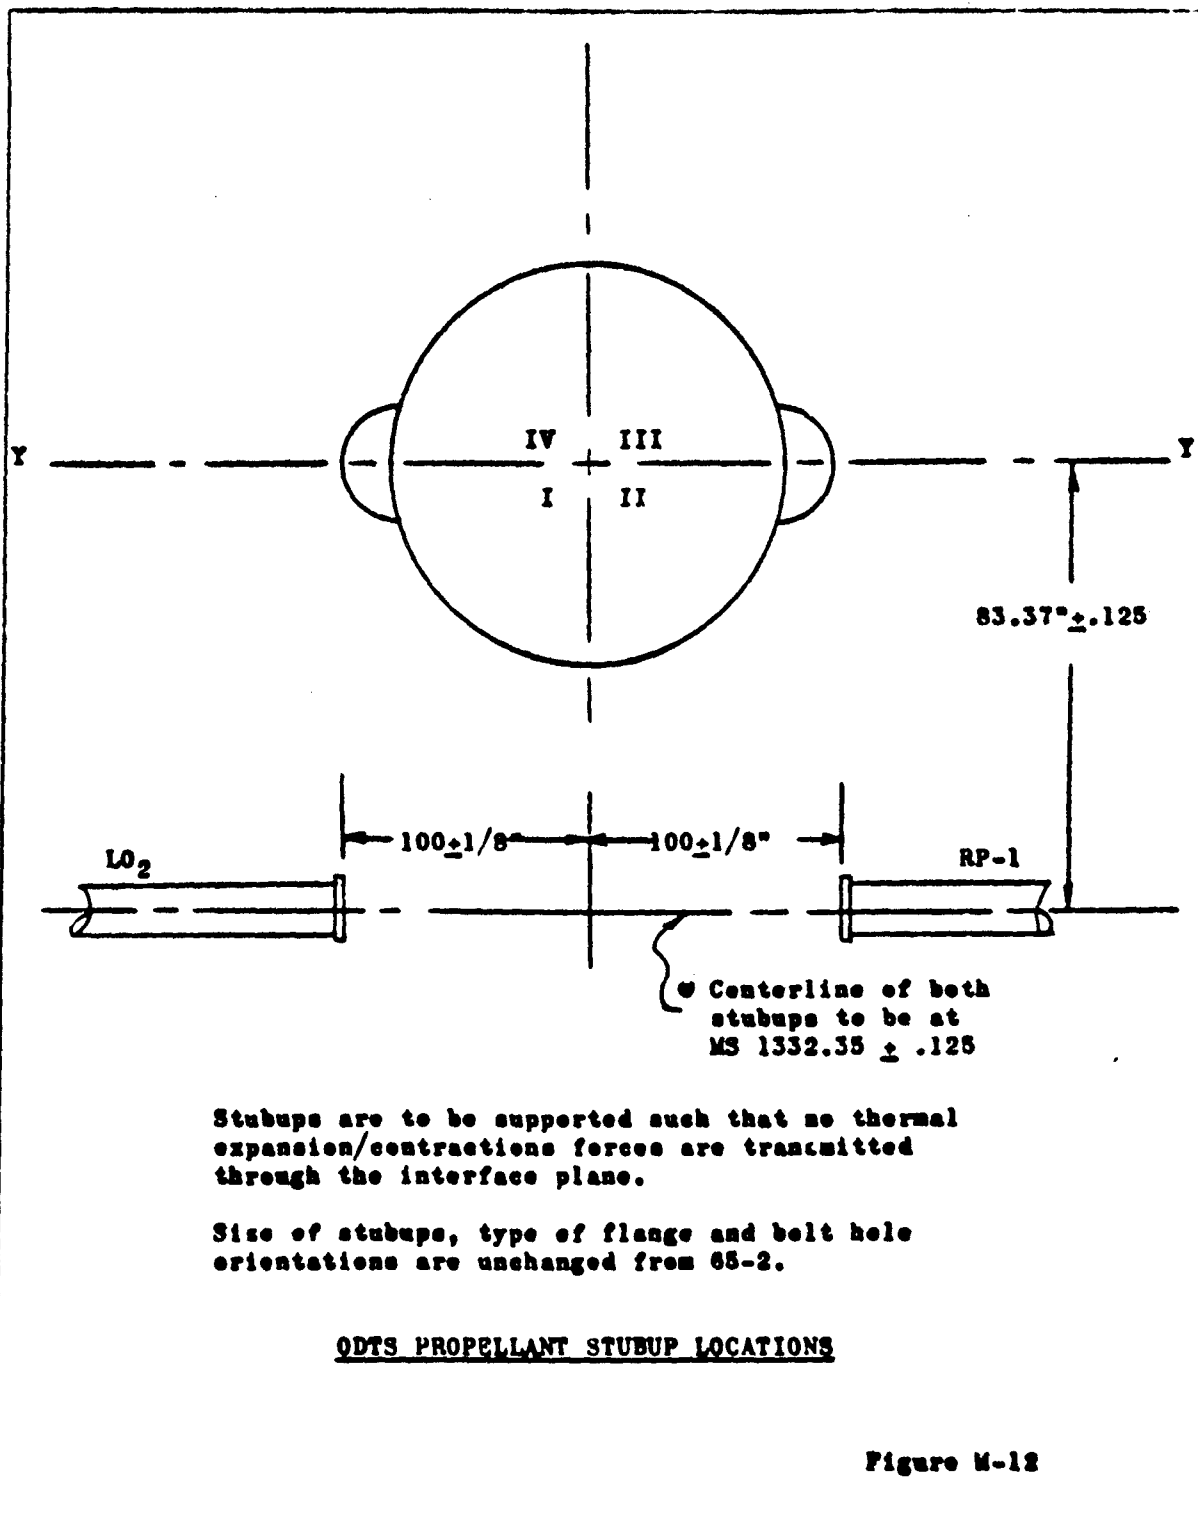


Figure M-12

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.


~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT ZL-7-037

PAGE 46

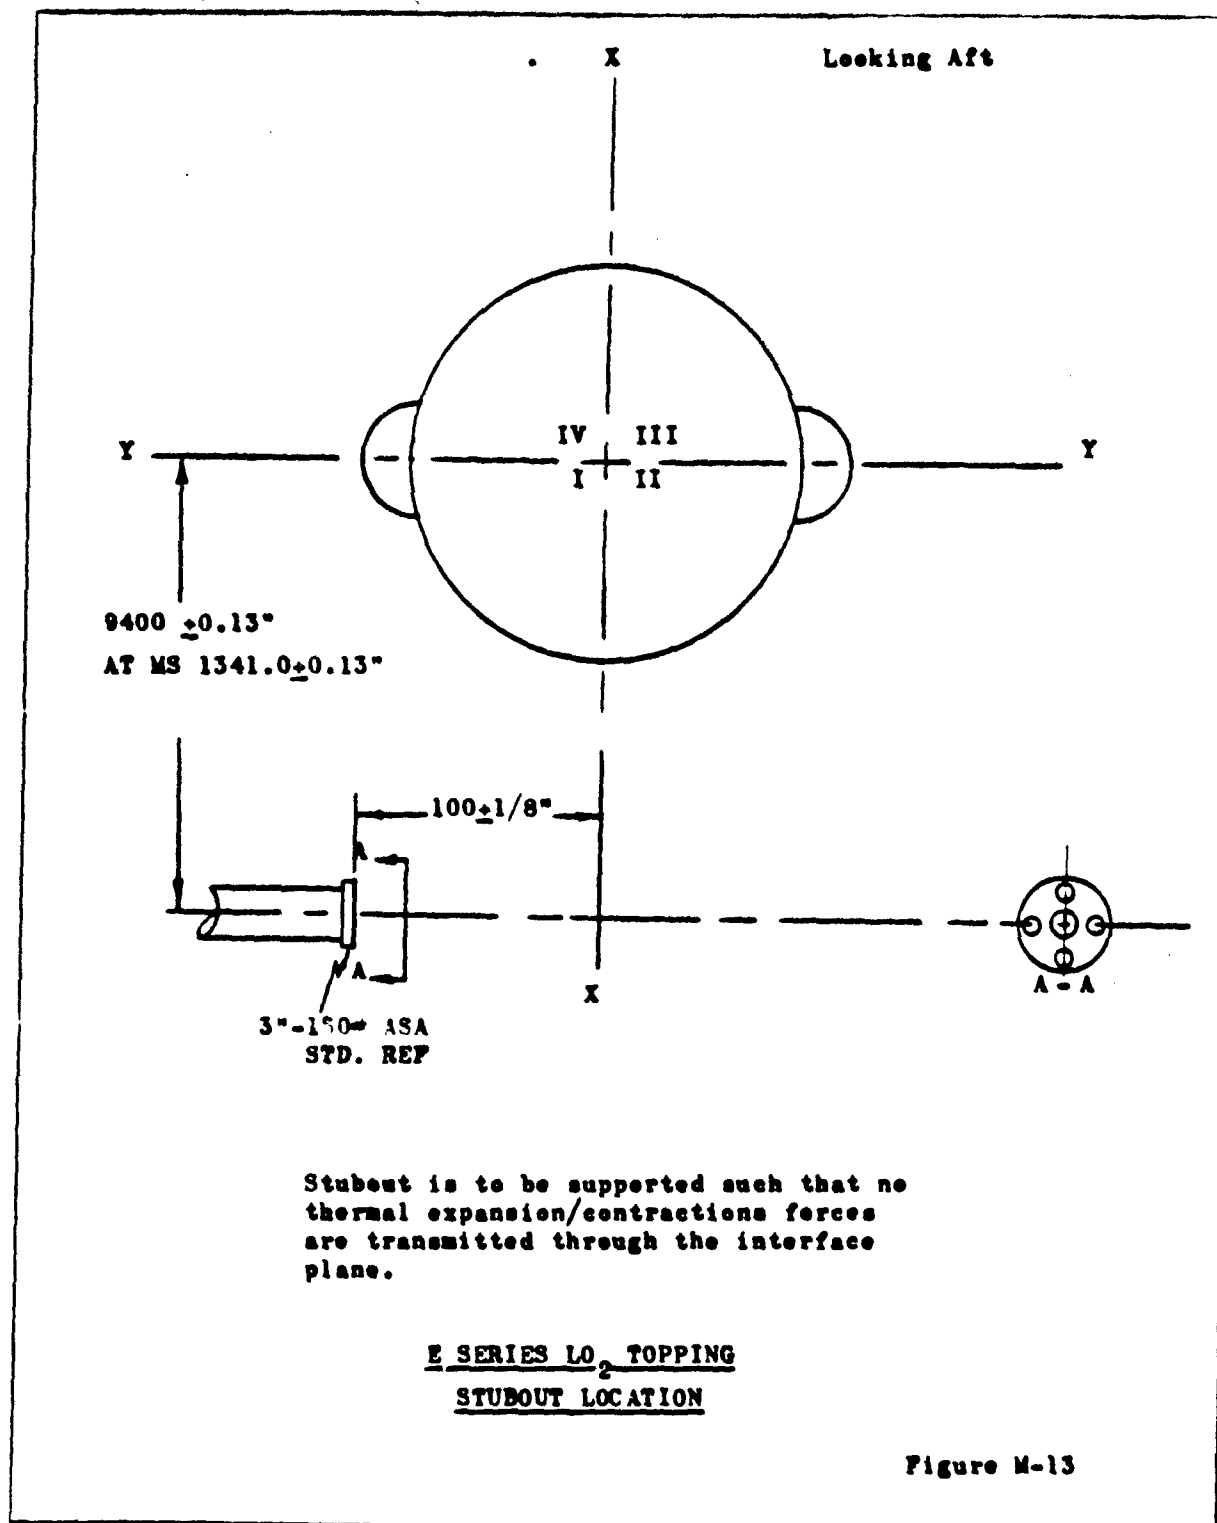

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

FORM NO. A-702-2

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT ZL-7-037

PAGE 47

STORAGE VESSEL REQUIREMENTS

<u>Size</u>	<u>Pressure</u>	<u>Gas or Fluid</u>	<u>Use</u>
28,000 gal.	150 psi	Lex	Missile Load
15,000 gal.	150 psi	RP1	Missile Load
21.6 cf	6000 psi	He	Checkout Supply
300 cf	6000 psi	He	In-flight Supply
106 cf	6000 psi	He	Ground Pressurization
53.5 cf	6000 psi	He	Routine Uses
213 cf	2400 psi	N ₂	Fuel Transfer Pressurization
106 cf	2400 psi	N ₂	LN ₂ Transfer Pressurization
8.6 cf	2400 psi	N ₂	Fuel Precharge Supply
27 cf	2400 psi	N ₂	Fuel Blanket Pressure
78.6 cf	4000 psi	N ₂	Launcher System Supply
32.8 cf	8000 psi	N ₂	Charge Panel Hi-press. Supply
10.7 cf	8000 psi	N ₂	Release Cylinder Supply
14.5 cf	2400 psi	He	Fluid Transfer Supply
311.25 cf	2400 psi	O ₂	Lex Transfer Supply
53.2 cf	2400 psi	O ₂	Lex Line Blanket Pressure

Figure M-14

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR | ASTRONAUTICS

REPORT ZL 7-077

PAGE 2078

7. ELECTRICAL CRITERIA

7.1 POWER CHARACTERISTICS

7.1.1 ~~Power supplied by the facility shall be as follows:~~

~~440V $\pm$ 10%, 3 phase, 60 cps $\pm$ 3%~~
~~208V $\pm$ 10%, 3 phase, 60 cps $\pm$ 3%~~
~~120V $\pm$ 10%, 1 phase, 60 cps $\pm$ 3%~~
*delete; detailed
freq. & voltage req.
req. at later date.*

7.1.2 Special electric power (DC, 400 cps AC, and AC with more critical regulation than that of paragraph 7.1.1) will be provided by special rectifiers, motor-generators, self-contained power supplies, etc. These special power supplies (and distribution systems) will be provided by the contractor that has equipment requiring special power.

7.2 POWER REQUIREMENTS

7.2.1 Power requirements for facility items (heating, lighting, air conditioning, etc.) will be determined by the Architect-Engineer.

7.2.2 The GSE connected load is presented in the following table:

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT ZL 7-037

PAGE 49

	44GV 3 phase (KVA)	208V 3 phase (KVA)	120V 1 phase (KVA)
ELECTRICAL AND MECHANICAL AREA			
Launch Control & Checkout Equip.		1.30	8.00
Power Supply, Ground DC	10		
Charger, Battery	1.3		
Motor Generator, 400 cps, Grn'd Power	5		
APS Voltage Regulator			2
EQUIPMENT ROOM			
Hydraulic Supply Unit	125		
Missile Erection Boom, Hydraulic Power Unit	8		
MISSILE STORAGE AREA			
Erection Boom			
Erection Motor	75 (200 KVA for 5 sec.)		
Re-entry Vehicle Lift Trailer (outlet only)	3		
Engine Service Trailer (Recp. Pyle National P-200186)	25		
GASEOUS OXYGEN STORAGE			
Recharger - Oxygen (Plug Crouse-Hinds DP-20468)	100		
GASEOUS NITROGEN STORAGE			
Recharger - Nitrogen (Plug Crouse-Hinds DP-20468)	100		
HELIUM STORAGE			
Helium compressor (Plug Crouse-Hinds DP-20468)	100		
FUEL STORAGE			
Mobile Fuel Separator (Recp. Crouse-Hinds ARE6425)	4		
TOTAL	572.6	4	26

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

FORM NO. A-782-1

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT ZL-7-037
PAGE 50

- 7.2.3 The maximum load demand imposed during countdown by the GSE at each Launch and Service Building is estimated to be as follows:

440V - 125 KVA
208V - 4 KVA
120V - 10 KVA

*See fig E-6. Report
ZL-7-038*

Hydraulic unit will not be operated simultaneously with Erection Boom Motor.

- 7.2.4 The electrical demand for facility equipment which must be operated in conjunction with certain GSE must be determined by the A&E.

7.3 GROUND REQUIREMENTS

7.3.1 SIGNAL AND POWER FREQUENCY GROUND SYSTEM

The basic element of the grounding system of the Launch and Service Building is a grid matrix under the building. All equipment, structures, power and signal systems, etc., requiring grounding will be common with the grid matrix.

7.3.1.1 Grid Matrix (Figure E-3)

a. Structure:

1. Grid will be No. 4/0 bare copper conductors.
2. Matrix spacing will not exceed 12 feet.
3. Intersection joints will be brazed (silver brazed, cadweld, or similar)
4. Copper clad steel rods (minimum dia. 3/4 inch; minimum length 10 feet) will be driven in the ground at periphery joint intersections and connected (brazed connections) to the grid.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR | ASTRONAUTICS

REPORT ZL 7-037

PAGE 3751

b. Grid Extensions (Figure E-2):

Flush mounted ground connections (for grounding portable equipment, tools, etc.) shall be installed in the floors or walls inside of the building. Suggested locations for the grid extensions are shown in Figure E-1. It should be noted that since the purpose of the grid extensions is only to provide readily accessible ground points, considerable freedom is permissible in locating the extensions so that they do not interfere with other architectural features of the building.

These ground grid connections will be connected to the grid matrix by 4/0 bare copper conductors.

c. Grid Location (Figure E-3):

The grid shall be at least 18 inches below the floor of the Launch and Service Building. If conflict with a subsurface rock formation is involved, this dimension may be reduced to 6 inches (trenches with protective earth fill added over the grid).

If it is necessary to contour a vertical wall, the spacing between the wall and the grid shall be no less than 6 inches.

d. Grid Limits:

The periphery of the grid will include the area bounded by the outside walls of the Launch and Service Building.

e. Grid Protection:


There shall be an earth fill over the grid with the minimum vertical dimensions as indicated in paragraph 7.3.1.3.c.

7.3.1.2 Power Distribution System Grounds

- a. Initially, the neutrals of the power distribution systems will be grounded only at one point on each major grid matrix (the matrices for the Launch Operations Building and the Launch and Service Buildings).

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

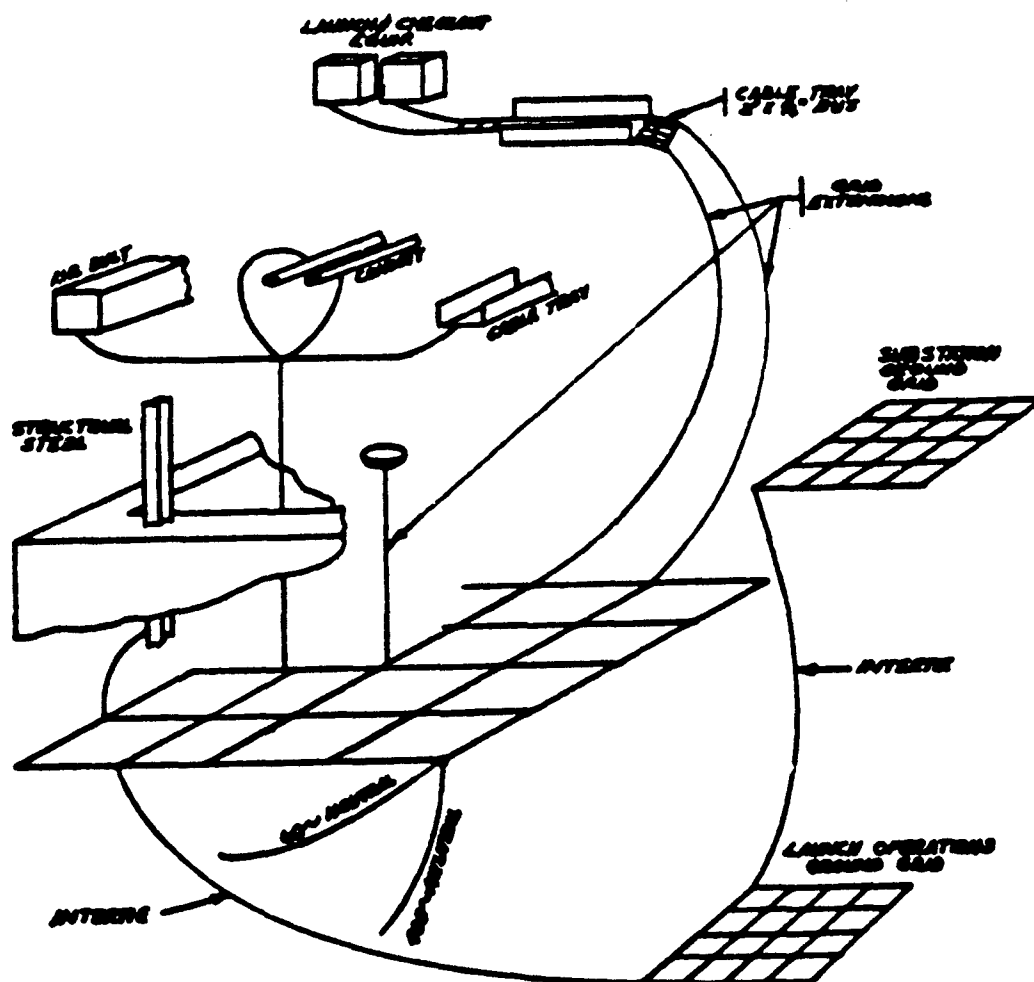

GROUNDING SYSTEM CONCEPT

FIG. E-2

UNCLASSIFIED

CONVAIR ASTRONAUTICS

REPORT ZL 7-037

PAGE 53

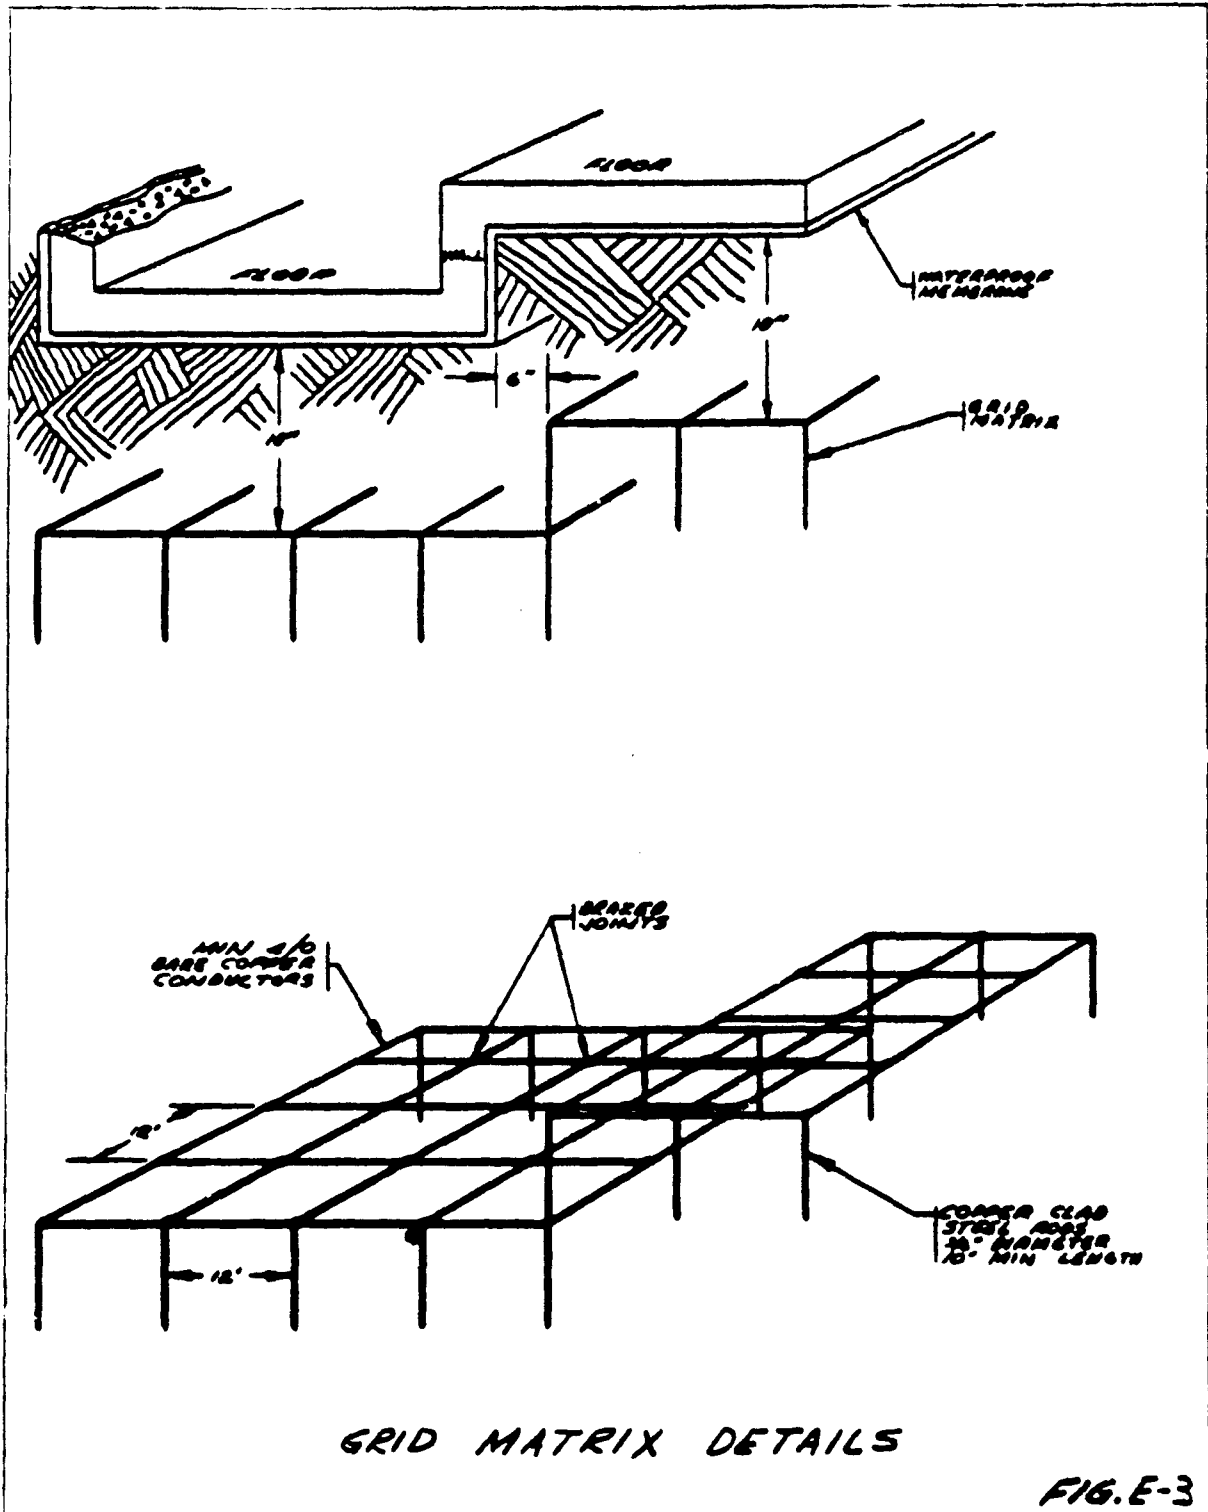


FIG. E-3

UNCLASSIFIED

In order to avoid circulating currents within a grid, the neutrals will be connected to the same point on a grid. If a water well is used, this point should be as near to the well as possible.

- b. Should it develop that after equipment is installed and operated that this grounding is inadequate, additional grounding of the neutrals may be necessary. Installation of this additional grounding will be the responsibility of the contractor requesting it.

7.3.1.3 Interties

- a. The grid matrix of each Launch and Service Building will be intertied to the grid of the Launch Operations Building.
- b. Each intertie will consist of a minimum of 8 No. 4/0 bare copper conductors.
- c. Interties should be buried.

7.3.1.4 Metal Work Bonding and Grounding

- a. In order to insure proper functioning of the electronic equipment in the building, it is necessary that large metal objects such as structural steel (excluding reinforcing rods), frames, metal doors, gratings, conduit, duct, cable trays, etc. be provided with a continuous electrical path to ground. Otherwise, these objects may act as antennas and become sources of radio frequency interference. All such metal work should be bonded in accordance with good construction practice and ultimately connected to the ground grid system.
- b. Bonding and grounding of the instrumentation consoles and equipment will be the responsibility of the installing contractor.

7.3.1.5 Launch Control and Checkout Equipment

A 1/32 inch by 12 inch copper strap will be run on the floor under the platform supporting launch control and checkout equipment. One strap should be provided for each row. These straps should be connected to a ground

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

grid extension at least every 12 feet. Cabinet ground busses will be connected to the ground plane formed by the copper straps.

7.3.2 LIGHTNING GROUNDS

The necessity for general lightning protection for the Launch and Service Building will be determined by the Architect-Engineer.

7.4 LIGHTING

7.4.1 INTENSITIES

Lighting intensities for the areas requiring frequent access for performing maintenance shall be as follows (measured 3 ft. above the floor):

<u>Area</u>	<u>Intensity</u> <u>(ft-candles/ft²)</u>
Mechanical-Electrical and Electronic Area	25
Missile Storage Area	
(a) Roof closed	25
(b) Roof open	10
Outside perimeter of building and fluid service areas	5

The lighting intensity for the utility tunnels (any maintenance performed in the tunnels will be extraordinary), LO₂ Piping Area, Nitrogen and Helium Area, Fuel Control Area, Air Conditioning and Ventilating Equipment Area, Hydraulic Equipment Area, and the Power Substation Area will be determined by the Architect-Engineer. These areas are such that access to them will be infrequent or the functions performed are such that there are no specific lighting requirements indicated.

7.4.2 TYPE OF LIGHTING

Lighting fixtures must be consistent with MIL-I-26600.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

UNCLASSIFIED

CONVAIR ASTRONAUTICS

REPORT 717-037

PAGE 556

7.4.3 SUPPLEMENTAL LIGHTING

Supplemental lighting will be provided by the employment of portable fixtures. These fixtures will operate on 120 volt AC.

7.5 OUTLETS

Power outlets for portable equipment, trouble lights, etc. will be located about the building. In hazardous areas (LO, Piping, Fuel Control, Missile Storage) these outlets shall be explosion proof. 120 volt outlets shall be located at convenient intervals along the walls. Two mandatory 440 volt outlets should be located as near as possible to the positions shown in Figure E-1. (To BE Supplied)

7.5.1 PROVISIONS FOR SUPPLEMENTAL GRID MATRIX GROUNDING

Provide a ground steel in the wall near each corner of the building for accessible external connection to the ground matrix. These connections will be used for additional grounding if required in the future. Installation of this additional grounding will not be the responsibility of the construction contractor.

7.6 COMMUNICATIONS

7.6.1 DIAL PHONE SYSTEM

A communications network within a complex is required for coordinating routine activities of personnel. This network will also link a complex to other squadron installations. Within the complex this network will be a dial phone system. Installations at the Launch and Service Building will include wall-mounted phones and dial phone communications panels installed in certain equipment cabinets.

7.6.1.1 Wall Mounted Phones

A suggested location for wall-mounted phone outlets is presented in Figure E-1. It should be noted that installations in hazardous areas will in general be explosion proof. Only one phone in the Missile Storage Area will be explosion proof; others will be deenergized during countdown.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

FORM NO. 2-702-2

UNCLASSIFIED

7.6.1.2 Cabinet Communications Panels

The locations of cabinet communications panels are shown in Figure E-1. Personnel working in the cabinet area will utilize the communications system by connecting portable handsets to the panels. (FIG. E-1 TO BE SUPPLIED)
(AT A LATER DATE)

7.6.2 PUBLIC ADDRESS SYSTEM

Although there is no technical requirement for a PA system, such a system is considered operationally desirable. Criteria for a PA system is not within the scope of this report; however, a layout of speakers inside the building is presented in Figure E-1, for information purposes. This layout is based on speaker locations of previous installations. Speaker installations outside the building should be anticipated.

UNCLASSIFIED

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.