

AD-A040 398

HARRY DIAMOND LABS ADELPHI MD

F/G 9/2

USER'S MANUAL FOR THE NLINE MULTICONDUCTOR TRANSMISSION-LINE CO--ETC(U)

MAY 77 J KLEBERS

UNCLASSIFIED

HDL-TR-1803

NL

| OF |


AD  
A040 398



END

DATE  
FILMED

6-77



MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS-1963-A

① NW

TR-1803—User's Manual for the NLINE Multiconductor Transmission-Line Computer Code, by Janis Klebers

MAY 1977



**AU NO. \_\_\_\_\_**  
**DDC FILE COPY**



**U.S. Army Materiel Development  
and Readiness Command  
HARRY DIAMOND LABORATORIES  
Adelphi, Maryland 20783**

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED.

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturers' or trade names does not constitute an official indorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

| REPORT DOCUMENTATION PAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                           | READ INSTRUCTIONS<br>BEFORE COMPLETING FORM                                                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| 1. REPORT NUMBER<br>HDL-TR-1803 ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 2. GOVT ACCESSION NO.                                     | 3. RECIPIENT'S CATALOG NUMBER<br>9                                                                     |
| 4. TITLE (and Subtitle)<br>User's Manual for the NLINE Multiconductor Transmission-Line Computer Code.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 5. TYPE OF REPORT & PERIOD COVERED<br>Technical Report, ✓ |                                                                                                        |
| 7. AUTHOR(s)<br>Janis Klebers                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                           | 6. PERFORMING ORG. REPORT NUMBER                                                                       |
| 9. PERFORMING ORGANIZATION NAME AND ADDRESS<br>Harry Diamond Laboratories ✓<br>2800 Powder Mill Road<br>Adelphi, MD 20783                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                           | 8. CONTRACT OR GRANT NUMBER(s)<br>MIPR: 7T-546                                                         |
| 11. CONTROLLING OFFICE NAME AND ADDRESS<br>Director<br>Defense Nuclear Agency<br>Washington, DC 20305                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                           | 10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS<br>Program Ele: 6.27.04.H<br>Work Unit: 64 |
| 14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)<br>1252p                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                           | 12. REPORT DATE<br>May 1977                                                                            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                           | 13. NUMBER OF PAGES<br>57                                                                              |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                           | 15. SECURITY CLASS. (of this report)<br>UNCLASSIFIED                                                   |
| 16. DISTRIBUTION STATEMENT (of this Report)<br>Approved for public release; distribution unlimited.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                           | 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE                                                             |
| 17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                           |                                                                                                        |
| 18. SUPPLEMENTARY NOTES<br>This work was sponsored by the Defense Nuclear Agency under Subtask R99QAXEB075/64. Work Unit Title: "Ground-Based Antenna System Characteristics and NLINE Manual."<br>HDL Project: EL9TE3 DRCMS Code: 6970000000000                                                                                                                                                                                                                                                                                                                                                |                                                           |                                                                                                        |
| 19. KEY WORDS (Continue on reverse side if necessary and identify by block number)<br>EMP Distributed excitation of<br>Transmission line transmission lines<br>Electromagnetic coupling Transmission-line computer<br>Cables code<br>Multiconductor transmission line Computer methods                                                                                                                                                                                                                                                                                                          |                                                           |                                                                                                        |
| 20. ABSTRACT (Continue on reverse side if necessary and identify by block number)<br>This manual describes applications of the multiconductor transmission-line computer program, NLINE. The program computes the voltages and currents induced by an incident plane electromagnetic wave on the conductors or in the loads of a lossless transmission line made up of 11 conductors or less. The solution is provided both in the frequency and time domains. The program accepts arbitrary angles of incidence, transmission-line length, and resistive terminations. The Thévenin equivalent |                                                           |                                                                                                        |

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

1 UNCLASSIFIED  
SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

163 050

LB

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

lumped-parameter method is described for use of NLINE with non-linear loads. Computational agreement with experimental data is demonstrated. A complete FORTRAN program listing is included.

## CONTENTS

|                                                                                                                   | Page. |
|-------------------------------------------------------------------------------------------------------------------|-------|
| 1. INTRODUCTION .....                                                                                             | 5     |
| 2. TYPES OF PROBLEMS SOLVED BY NLINE .....                                                                        | 5     |
| 3. OUTLINE OF EQUATIONS USED IN NLINE .....                                                                       | 8     |
| 4. DEFINITION OF NLINE INPUT PARAMETERS .....                                                                     | 10    |
| 5. ABBREVIATED FLOW DIAGRAM FOR THE MAIN DECK .....                                                               | 13    |
| 6. NLINE STANDARD DECK (NSD) LISTING .....                                                                        | 18    |
| 7. INPUT DATA FORMAT .....                                                                                        | 33    |
| 8. OUTPUT FORMAT .....                                                                                            | 33    |
| 9. SAMPLE PROBLEM .....                                                                                           | 37    |
| 10. NLINE APPLICATIONS: INTRODUCTION OF NONLINEAR LOADS BY<br>LUMPED-PARAMETER NETWORK SYNTHESIS .....            | 41    |
| 11. APPLICATION OF NLINE TO REAL CABLES: COMPARISON OF<br>NUMERICAL PREDICTIONS WITH MEASURED RESULTS .....       | 47    |
| APPENDIX A. PROGRAM LISTING FOR THE CAPACITANCE AND<br>MAGNETIC-FIELD COUPLING PARAMETER CODE, <i>PTNTL</i> ..... | 51    |

## ILLUSTRATIONS

|     |                                                                                                                                                                                |    |
|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| 1.  | Physical and electrical transmission-line parameters .....                                                                                                                     | 6  |
| 2.  | Basic pulse shapes of the input EMP to NLINE .....                                                                                                                             | 7  |
| 3.  | Sample NLINE output .....                                                                                                                                                      | 34 |
| 4.  | Sample NLINE frequency-domain output .....                                                                                                                                     | 35 |
| 5.  | Sample NLINE time-domain output .....                                                                                                                                          | 35 |
| 6.  | Sample NLINE time-domain output .....                                                                                                                                          | 36 |
| 7.  | Sample NLINE incident EMP output .....                                                                                                                                         | 36 |
| 8.  | Sample problem conductor cross section, and orientation with respect to the incident EMP .....                                                                                 | 37 |
| 9.  | SAMPLE PROBLEM: Frequency-domain plot of voltage induced on conductor No. 1 by Pulse(-1) .....                                                                                 | 39 |
| 10. | SAMPLE PROBLEM: Time-domain plot of voltage induced on conductor No. 1 by Pulse(-1) .....                                                                                      | 39 |
| 11. | SAMPLE PROBLEM: Frequency-domain plot of voltage induced on conductor No. 2 by Pulse(-1) .....                                                                                 | 40 |
| 12. | SAMPLE PROBLEM: Time-domain plot of voltage induced on conductor No. 2 by Pulse(-1) .....                                                                                      | 40 |
| 13. | INCIDENT EMP FOR SAMPLE PROBLEM: Time-domain plot of Pulse(-1) obtained by numerical<br>Fourier transform from the frequency-domain expression .....                           | 41 |
| 14. | Lumped-parameter network synthesis by NLINE computations .....                                                                                                                 | 42 |
| 15. | Open-circuit voltage computed by NLINE for use with the lumped-parameter network model .....                                                                                   | 44 |
| 16. | Short-circuit current computed by NLINE for use with the lumped-parameter network model .....                                                                                  | 45 |
| 17. | Transmission-line impedance computed by NLINE - $l = 30$ m, $\psi = 90^\circ$ , $Q = 1.16$ .....                                                                               | 45 |
| 18. | Equivalent lumped-parameter network transmission-line impedance obtained from 20 R-L-C circuits-<br>$l = 30$ m, $\psi = 90^\circ$ , $Q = 1.19$ .....                           | 46 |
| 19. | Time-domain plot of voltage induced on conductor No. 1; computed from the lumped-parameter<br>network model .....                                                              | 46 |
| 20. | (a) Magnetic field measured in the AESOP simulator at 75 m on the center line. (b) Pulse(-1)<br>approximation of the AESOP magnetic field used in the NLINE computations ..... | 48 |
| 21. | Comparison of the load current measured in the AESOP environment and the load current computed<br>by NLINE for the three-conductor transmission line .....                     | 48 |
| 22. | Comparisons of measured and computed results for the eleven-conductor transmission line .....                                                                                  | 49 |

|                                 |                       |
|---------------------------------|-----------------------|
| DISTRIBUTION/AVAILABILITY CODES |                       |
| DIST.                           | AVAIL. AND/OR SPECIAL |
| A                               |                       |

## 1. INTRODUCTION

Applications of the multiconductor transmission-line computer program, NLINE, are described in this manual. Previous reports<sup>1,2</sup> have detailed theoretical development and semi-empirical methods on which NLINE is based.

It is assumed that the reader knows computer programming in FORTRAN. The annotated listing of the NLINE Standard Deck (NSD) given in section 6 represents the complete NLINE code. The NSD is compatible with the CDC 6600/6700 computers. If IBM computers are used, it is necessary to modify the alpha-numeric statements (i.e., change dimensioning due to different word length).

It is recommended that an output plotting capability, compatible with the user's computer, be added to the NSD for most efficient output display.

## 2. TYPES OF PROBLEMS SOLVED BY NLINE

The NLINE code computes currents and voltages induced by a plane-wave electromagnetic pulse (EMP) impinging on the conductors and terminations of a lossless multiconductor transmission line. Computations are initially done in the frequency domain. Time-domain results are obtained by a numerical Fourier transform subroutine. The response depends on the physical and electrical characteristics of the transmission line and upon the orientation, pulse shape, and amplitude of the incident EMP. The transmission line may be located in free space or above a ground plane, and it is described by its length,  $l$ , conductor cross section, propagation velocity,  $v$ , terminating impedances, and choice of reference conductor. Figure 1 illustrates the above properties for a typical line.

The total number of conductors in the transmission line is designated here by  $n$ , and by "NWIRES" in the NSD. A convenient reference conductor (e.g., the ground plane, if one is present) is chosen, and numbered 0, with the remaining  $(n-1)$  conductors numbered consecutively as shown in figure 1(a), where  $n = 3$ . The propagation velocity,  $v$ , for the transmission line is assumed to be known. As a matter of consistency, in this report the  $x$ -axis is always chosen parallel to the longitudinal axis of the line. The point of voltage and current computation is thus designated by a value of  $x$  within the limits  $0 \leq x \leq l$ . Values of  $x = 0$  and  $x = l$  give results at the terminations. Figure 1(b) illustrates these parameters.

Terminations between conductors are represented by the doubly subscripted variables,  $Z_{ij}$ , in figure 1(a). NLINE is programmed for all possible connections between the conductors. The termination values are assumed known, or must be measured or estimated (e.g., assume open, short, or matched conditions) for the line. The NSD accepts only *real* values for the  $Z_{ij}$ . The *Thévenin Equivalent* method described later in this report may be used with NLINE if complex or nonlinear loads are required.

The incident EMP waveshape is represented in NLINE by two independent expressions made up of exponential terms. The user can choose either when making an NLINE run. In addition, the option of using a unit impulse as the input has been incorporated into the code. The first of the exponential pulse forms is designated as Pulse(1). This pulse is the familiar two-exponential form given below.

### Pulse(1). Two-exponential representation


$$E_y^e(t) = A \left( e^{-\alpha_1 t} - e^{-\alpha_2 t} \right) / M \quad (1)$$

$$M = e^{-\alpha_1 t_0} - e^{-\alpha_2 t_0}$$


where  $E_y^e(t)$  is the y-component of the incident EMP electric field in volts/meter.  
 $t_0 = \ln(\alpha_2/\alpha_1) / (\alpha_2 - \alpha_1)$  is the zero-to-peak rise time of the pulse.

<sup>1</sup> Sidney Frankel, *Cable and Multiconductor Transmission Line Analysis*, Harry Diamond Laboratories TR-091-1 (28 June 1974).

<sup>2</sup> Janis Klebers, *Electromagnetic Pulse Coupling with Lossless Multiconductor Transmission Lines*, Harry Diamond Laboratories TR-1711 (June 1975).



(a) Cross-section geometry and terminations for a three-conductor transmission line.

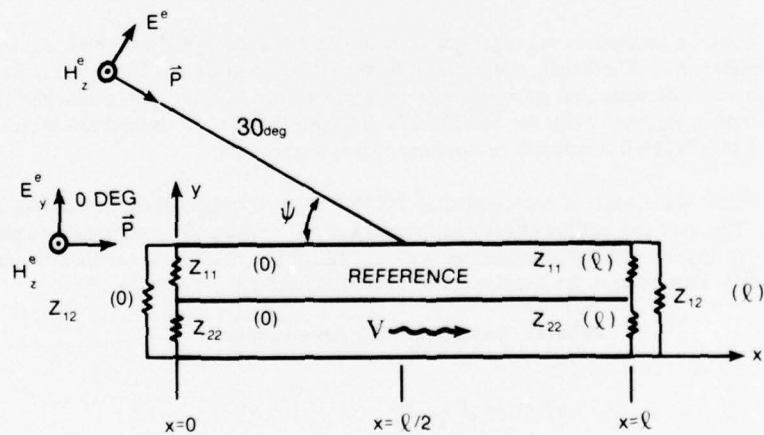

(b) Axial parameters.  $x, l$ . Propagation velocity,  $v$ . Angle of EMP incidence  $\psi$ . Incident electric and magnetic fields

$E^e, H_z^e$ . Poynting vector  $\vec{P}$ .

**Figure 1.** Physical and electrical transmission line parameters.

$A$  = peak amplitude of the pulse in volts/meter.

$M$  = normalization factor which makes the pulse reach amplitude,  $A$ , for all  $\alpha_1$  and  $\alpha_2$ .

$\alpha_1$  and  $\alpha_2$  are pulse-shaping constants.

The second of the exponential pulse forms is designated as Pulse(-1). This pulse is made up of several exponential terms, has a zero time derivative at time equal to zero, and can be made to have a zero crossover at designated late times. Pulse(-1) is useful in representing EMP simulator fields such as those generated by AESOP (Army Electromagnetic Pulse Simulator Operations) and TEMPS (Transportable Electromagnetic Pulse Simulator) simulators at HDL.<sup>3</sup>

**Pulse(-1). Time-domain expression for the electric field\***

$$E_y^e(t) = (a-b)(1+gt)e^{-gt} + (b+d)(1+ht)e^{-ht} - a(1+mt)e^{-mt} - d(1+pt)e^{-pt} \quad (2)$$

where the pulse-shaping constants are given below with their corresponding FORTRAN variable equivalents in NLINE.

$m = B1, h = B2, g = B3, p = B4, a = B5, b = B6, d = B7.$

The basic waveshapes of Pulse(1) and Pulse(-1) are shown in figure 2.

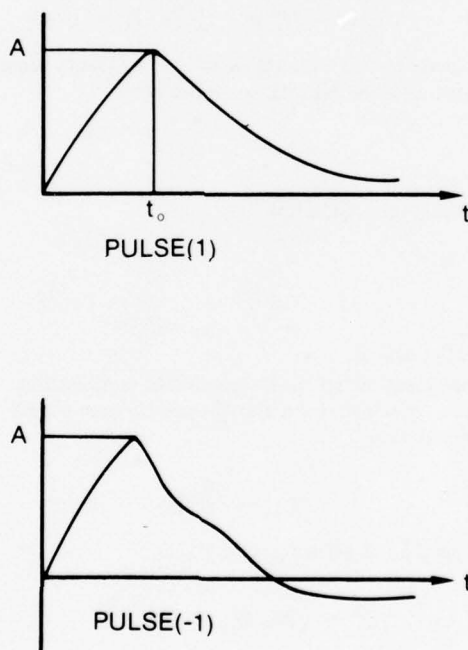


**Figure 2.** Basic pulse shapes of the input EMP to NLINE.

<sup>3</sup>E. Patrick, S. SooHoo, *Transportable Electromagnetic Pulse Simulator (TEMPS) Preliminary Field Mapping Report*, Harry Diamond Laboratories TM-74-15 (October 1974).

\*After a pulse representation by R. F. Gray, HDL.

### 3. OUTLINE OF EQUATIONS USED IN NLINE

NLINE is based on a solution for the TEM mode currents and voltages induced by the distributed external electromagnetic fields along the conductors. The equations governing the values of the current,  $I$ , and the voltage  $V$ , along the axial  $x$ -direction of the transmission line are given below.

$$\frac{d\underline{I}}{dx} + j\omega \underline{C} \underline{V} = \underline{H}^e \quad (3)$$

$$\frac{d\underline{V}}{dx} + j\omega \underline{L} \underline{I} = \underline{E}^e \quad (4)$$

where the underlined quantities denote matrix form. The matrices are of the order  $(n-1)$ . Solutions for the voltages  $\underline{V}$  and the currents  $\underline{I}$  are derived in Frankel,<sup>1</sup> and are given in the form

$$\underline{I} = \underline{Y}(\underline{P}^i \cos\theta + j\underline{I} \sin\theta) \underline{S}^{-1} \underline{K}(f) + \underline{W}(x) \quad (5)$$

$$\underline{V} = (\underline{I} \cos\theta + j\underline{P}^i \sin\theta) \underline{S}^{-1} \underline{K}(f) + \underline{U}(x) \quad (6)$$

The FORTRAN version of equations (5) and (6) is in the frequency domain and combined with the numerical Fourier transform, constitutes the NLINE computer code.

$\underline{I}$  = the unit matrix order of  $(n-1)$ .

$n$  = number of conductors in the transmission line.

$j$  =  $\sqrt{-1}$

$\theta$  =  $kx$

$k$  =  $\omega/v$

$\omega$  = radian frequency in rad/s.

$v$  = transmission-line propagation velocity.

$\underline{C}$  = Maxwell's capacitance coefficient matrix for the conductor cross section.

$\underline{L}$  = inductive coefficient matrix obtained from the  $\underline{C}$  matrix, unit matrix  $\underline{I}$ , and the line propagation velocity  $v$  by the following relation

$$\underline{L}\underline{C} = \frac{1}{v^2} \underline{I} \quad (7)$$

The driving functions in equations (3) and (4) are given by

$$\underline{H}^e = (H_1, H_2, \dots, H_{n-1})^T \quad (8)$$

$$\underline{E}^e = (E_1, E_2, \dots, E_{n-1})^T.$$

<sup>1</sup> Sidney Frankel, *Cable and Multiconductor Transmission Line Analysis*, Harry Diamond Laboratories TR-091-1 (28 June 1974).

where  $T$  denotes transpose, converting  $\underline{H}^e$  and  $\underline{E}^e$  to column matrices. The  $i^{\text{th}}$  elements of equations (2),  $i = 1, 2, \dots, (n-1)$  are defined by

$$\begin{aligned} H_i^e &= j\omega C_i^e E_y(\omega) e^{j(\omega t - kx \cos\psi)} \\ E_i^e &= j\omega L_i^e H_z(\omega) e^{j(\omega t - kx \cos\psi)} \end{aligned} \quad (9)$$

Terms in equations (9) are outlined below.

$t$  = time in seconds.

$\psi$  = angle of EMP incidence shown in figure 1(b).

$E_y(\omega)$  = the resultant y-component of the external electric field, in volts/meter.

$H_z(\omega)$  = the resultant z-component of the external magnetic field, in amperes/meter.

The magnetic-field coupling parameter is defined in transpose form as follows:

$$\underline{L}^e = (L_1^e, L_1^e, \dots, L_{n-1}^e)^T \quad (10)$$

$\underline{L}^e$  is an input parameter to NLINE, and is defined by Frankel<sup>1</sup> and Klebers.<sup>2</sup>

$$\underline{C}^e = (C_1^e, C_2^e, \dots, C_{n-1}^e)^T \quad (11)$$

$C_i^e$  is computed in NLINE from

$$C_i^e = -\frac{1}{\mu} \sum_{j=1}^{n-1} L_j^e C_{ij} \quad (12)$$

where  $\mu$  is the permeability of free space.

The electric and magnetic fields are integrated over the parameter  $x$  in the following relations.

$$\underline{U}(x) = \int_0^x \left\{ \underline{E}^e(\xi) \cos[k(x-\xi)] - j \underline{Z} \underline{H}^e(\xi) \sin[k(x-\xi)] \right\} d\xi \quad (13)$$

$$\underline{W}(x) = \underline{Y} \int_0^x \left\{ \underline{Z} \underline{H}^e(\xi) \cos[k(x-\xi)] - j \underline{E}^e(\xi) \sin[k(x-\xi)] \right\} d\xi \quad (14)$$

where

$$\underline{Z} = v \underline{L} \quad (15)$$

$$\underline{Y} = v \underline{C}.$$

<sup>1</sup> Sidney Frankel, *Cable and Multiconductor Transmission Line Analysis*, Harry Diamond Laboratories TR-091-1 (28 June 1974).

<sup>2</sup> Janis Klebers, *Electromagnetic Pulse Coupling with Lossless Multiconductor Transmission Lines*, Harry Diamond Laboratories TR-1711 (June 1975).

Other terms in equations (3) and (4) are

$$\underline{S} = (\underline{P}^i + \underline{P}^o) \cos k l + j(\underline{1} + \underline{P}^o \underline{P}^i) \sin k l \quad (16)$$

$$\underline{P}^o = \underline{Z} \underline{Y}^o \quad (17)$$

$$\underline{P}^i = \underline{Z} \underline{Y}^i \quad (18)$$

$$\underline{K}(l) = \underline{Z} [\underline{W}(l) - \underline{Y}^o \underline{U}(l)] \quad (19)$$

The load impedances of the transmission line are introduced in the equations through admittance matrices  $\underline{Y}^i$  and  $\underline{Y}^o$ , where the superscript "i" refers to loads at  $x = 0$ , and the superscript "o" refers to loads at  $x = l$ .

Elements of  $\underline{Y}^i$  and  $\underline{Y}^o$  are defined by

$$Y_{ij}^i = \begin{cases} -Y_{ij}^L; & i \neq j \\ \sum_{j=1}^{n-1} Y_{ij}^L; & i = j \end{cases} \quad (20)$$

$$Y_{ij}^o = \begin{cases} -Y_{ij}^L; & i \neq j \\ \sum_{j=1}^{n-1} Y_{ij}^L; & i = j \end{cases} \quad (21)$$

where  $Y_{ij}^L$  is the load admittance between the  $i^{\text{th}}$  and  $j^{\text{th}}$  conductors of the transmission line at the  $x = 0$  end in equation (20), and at the  $x = l$  end in equation (21), respectively.

In each case, the impedance between the  $i^{\text{th}}$  and  $j^{\text{th}}$  conductors is

$$Z_{ij}^L = \frac{1}{Y_{ij}^L} \quad (22)$$

The  $Z_{ij}^L$  values are input parameters to NLINE.

#### 4. DEFINITION OF NLINE INPUT PARAMETERS

The input parameters are defined and listed in sequence, as they are read from data cards in NLINE. The two-exponential Pulse(1) is read by data cards. The parameters for Pulse(-1) are changed within the NLINE deck. Setting the FORTRAN variable IMP = 1 in the NSD implies use of Pulse(1) for the computation. Setting IMP = -1 implies use of Pulse(-1) for the computation.

The FORTRAN variables read by data cards into NLINE in the following order:

- A = amplitude of the incident EMP in volts/meter.
- A1 =  $\alpha_1$  in equation (1).
- A2 =  $\alpha_2$  in equation (1).

The FORTRAN statements as they appear in NLINE for the above and subsequent variables are:

```
      READ(5,5000) A, A1, A2
5000  FORMAT(3E 10.0)
```

PERCEN = percent of free space propagation velocity observed in the transmission line.

```
      READ(5,5001)PERCEN
5001  FORMAT(F 5.0)
```

COMNT = user's comment (up to 80 characters)

```
      READ(5,505)(COMNT(MN),MN=1,8)
505   FORMAT(8A10)
```

MSETS = number of data sets where values for the transmission-line terminations, and/or angle of incidence, and/or line length may be parametrically changed, while holding reference conductor, cable cross section, and axial orientation with respect to the incident EMP constant.

NWIRES = total number of conductors in the transmission line. NLINE is dimensioned so that the limit for NWIRES is  $1 \leq \text{NWIRES} \leq 11$ .

```
      READ(5,500)MSETS,NWIRES
500   FORMAT(2I5)
```

CMAXWL = Maxwell's capacitance coefficients<sup>4</sup> for the transmission-line conductor configuration. A reduced matrix is used because the off-diagonal terms are symmetrical. These coefficients can be measured or computed by various methods. A program, PTNTL (Capacitance and Magnetic Field Coupling Code), is included in appendix A for one computation method.

The capacitance matrix is

$$(CMAXWL) = \begin{bmatrix} C_{11} & C_{12} & \cdots & C_{1n} \\ & C_{22} & \cdots & C_{2n} \\ & & \ddots & \vdots \\ \text{Symmetric} & & & \\ \text{terms not} & & & \\ \text{punched on} & & & \\ \text{data cards.} & & & C_{nn} \end{bmatrix}$$

For example  $n = 3$  for a three-conductor transmission line. The CMAXWL array would be punched in the order given below:

$$(C_{11}, C_{12}, C_{13}, C_{22}, C_{23}, C_{33})$$

where the symmetrical off-diagonal terms  $C_{21}$ ,  $C_{31}$ , and  $C_{32}$  are not required. In general, for  $n$  conductors,  $n(n+1)/2$  terms are read into the CMAXWL array.

```
      NCAPS=NWIRES*(NWIRES+1)/2
      READ(5,501)(CMAXWL(J),J=1,NCAPS)
501   FORMAT(8E10.0)
```

It is important to note that the CMAXWL array is converted to the full  $n$  by  $n$ -capacitance array in NLINE. However, the  $i^{\text{th}}$  row and  $i^{\text{th}}$  column are deleted from the array, after the  $i^{\text{th}}$  conductor has been designated as the reference conductor.

<sup>4</sup>S. Ramo and J. R. Whinnery, *Fields and Waves in Modern Radio*, John Wiley & Sons, Inc., New York (1964), 264-265.

For example:  $n = 3$ , the Maxwell's capacitance array generated from CMAXWL in NLINE is:

$$\underline{C} = \begin{bmatrix} C_{11} & C_{12} & C_{13} \\ C_{21} & C_{22} & C_{23} \\ C_{31} & C_{32} & C_{33} \end{bmatrix} \quad (23)$$

For example, if conductor number three is chosen as the reference ( $i = 3$ ), it is then redesignated as the 0<sup>th</sup> conductor, and the reduced capacitance matrix used for the computations becomes

$$\underline{C}^1 = \begin{bmatrix} C_{11} & C_{12} \\ C_{21} & C_{22} \end{bmatrix} \quad (24)$$

Hence, the values for  $C_{13}$ ,  $C_{23}$ , and  $C_{33}$  are not needed if the choice of reference conductor remains fixed for all computations.

ELI = the magnetic-field coupling parameter array,  $\underline{L}^e$ . The (NWIRES-1) terms are written into NLINE.

```
503      READ(5,503)(ELI(J),J=1,(NWIRES-1)
          FORMAT(8E10.0)
```

The magnetic-field coupling parameters can be measured, or computed.<sup>1,2</sup> The PTNTL program listed in appendix A performs this computation.

IQ = the integer number designating the chosen reference conductor.

```
504      READ(5,504)IQ
          FORMAT(I5)
```

ZI =  $\underline{Z}^L$ , the array of terminating impedances at the  $x = 0$  end of the line.

ZO =  $\underline{Z}^L$ , the array of terminating impedances at the  $x = l$  end of the line.

After IQ is chosen, the reference conductor is renumbered as zero (0), and the remaining conductors are renumbered consecutively 1 through  $(n-1)$ . The like subscripts,  $ii$ , designate impedance connected between the  $i^{\text{th}}$  conductor and the reference conductor (0). The subscripts,  $ij$ , designate impedances between the  $i^{\text{th}}$  and  $j^{\text{th}}$  conductors. The values for ZI and ZO are read row by row, left to right. For example:  $n = 3$ , the sequence of  $Z_{ij}^L$  stored in ZI is

$$(Z_{11}^L, Z_{12}^L, Z_{21}^L, Z_{22}^L)$$

```
      N2=(NWIRES-1)**2
      READ(5,501)(ZI(J),J=1,N2)
      READ(5,501)(ZO(J),J=1,N2)
501      FORMAT(8E10.0)
```

PSI =  $\psi$ , the angle of incidence, in degrees, shown in figure 1(b).

TL =  $l$ , line length, in meters.

```
502      READ(5,502)PSI,TL
          FORMAT(2F10.0)
```

<sup>1</sup> Sidney Frankel, *Cable and Multiconductor Transmission Line Analysis*, Harry Diamond Laboratories TR-091-1 (28 June 1974).

<sup>2</sup> Janis Klebers, *Electromagnetic Pulse Coupling with Lossless Multiconductor Transmission Lines*, Harry Diamond Laboratories TR-1711 (June 1975).

The remaining parameters under user control in NLINE are punched and changed within the deck itself. These parameters are listed below.

IMP = the parameter that determines which input EMP field is used. IMP=0 calls the unit impulse, IMP=1, calls Pulse(1), and IMP=-1 calls Pulse(-1).

B1, B2, B3, B4, B5, B6, and B7 are the Pulse(-1) parameters listed in equation (2).

IDATE = any integer number set by user as an identification number for the computation.

NXTIME = number of desired axial x-positions at which the computation is made.

X87 = fraction of the line length at which the NXTIME computations are to be made. For example, if computations are desired at  $x = 0$ ,  $x = 0.5l$ , and  $x = l$ , holding all other line parameters constant, the user sets NXTIME=3 and X87(1)=0, X87(2)=0.5, X87(3)=1.0.


NCOUNT = number of frequency points at which the computations are made.


NTIME = number of time points at which the computations are made.

These parameters can be changed to adjust NLINE run time and Fourier transform accuracy. Maximum allowable values for NCOUNT and NTIME are 600.


## 5. ABBREVIATED FLOW DIAGRAM FOR THE MAIN DECK


A flow diagram for the NLINE main program is listed in this section. Only the basic sequential events are included.

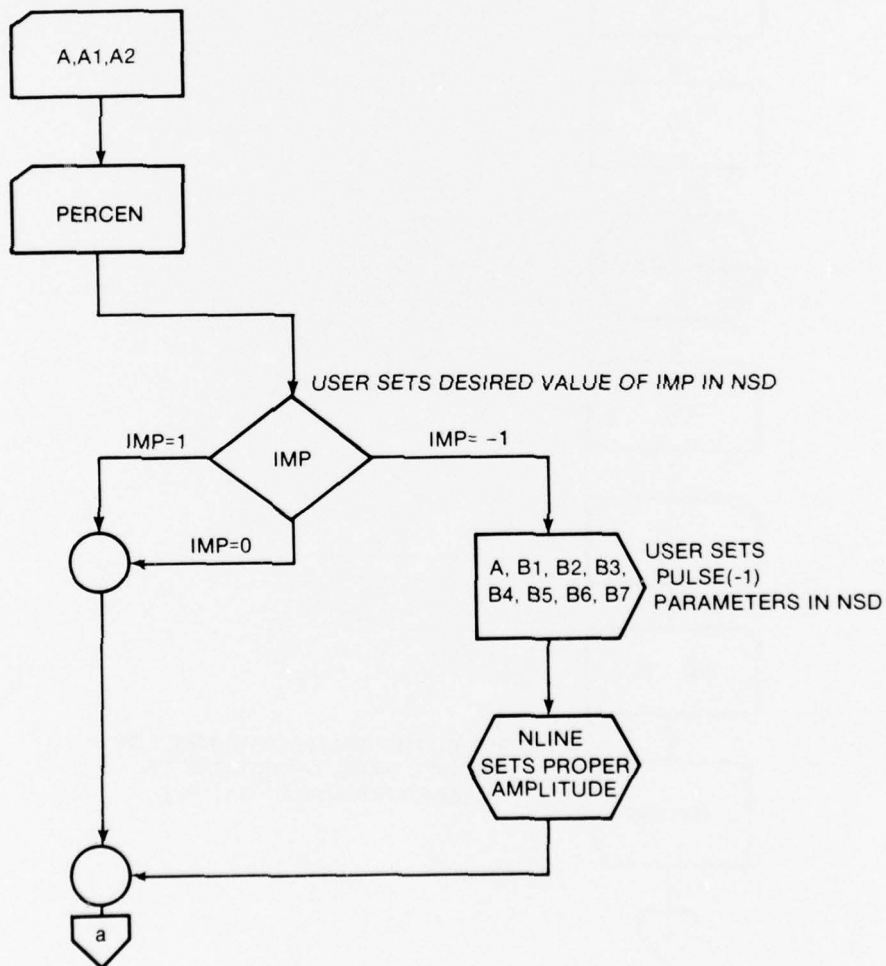


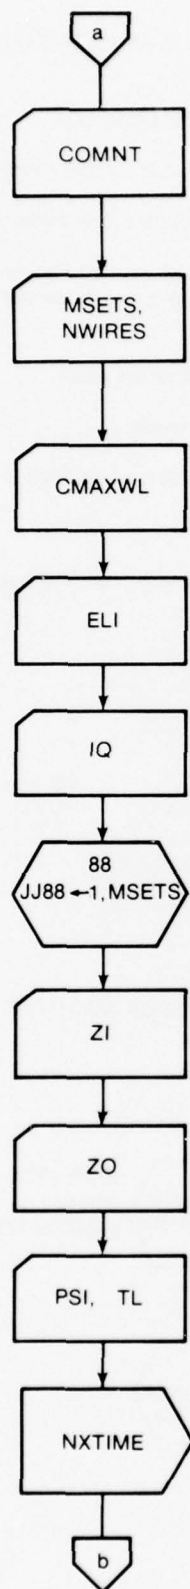

USER SPECIFIES VALUE OF NUMBER OF  
DESIRED AXIAL X-POSITIONS OF  
COMPUTATION ALONG CABLE.

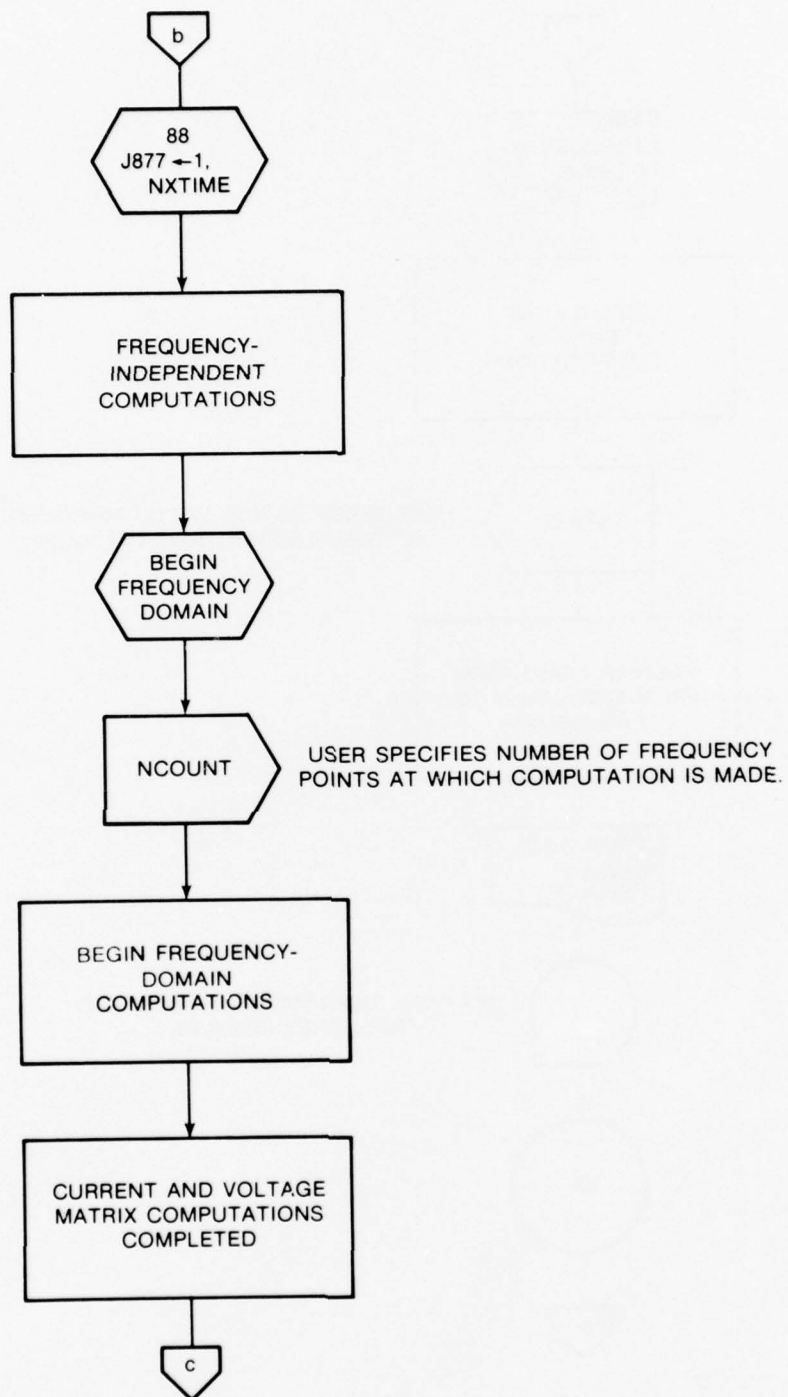

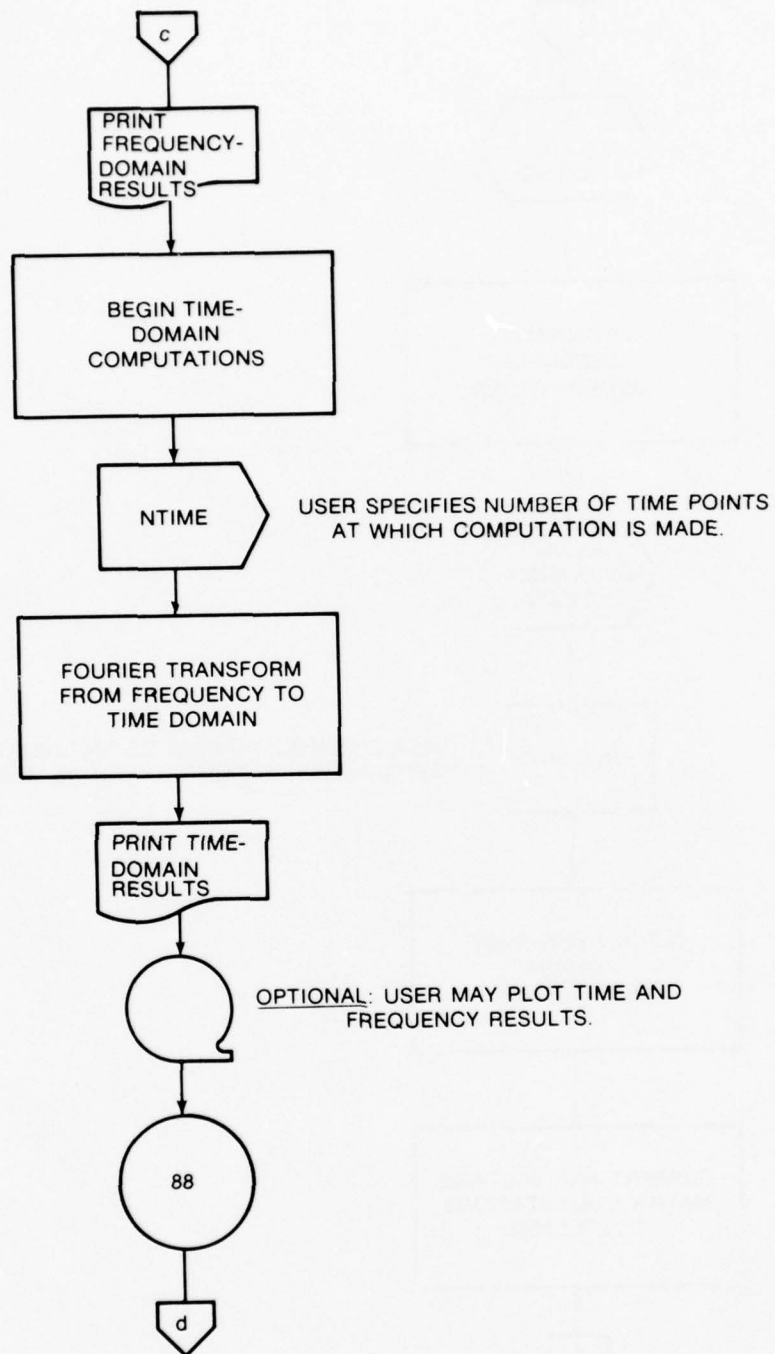

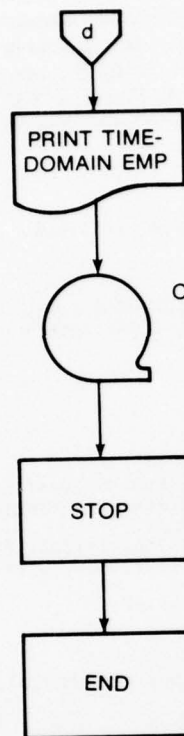

OPTIONAL: USER MAY PLOT TIME-DOMAIN  
VALUES OF INCIDENT EMP.

This section includes the listing for the entire NLINE computer program, including the main program and all subroutines and functions required for an NLINE run. A considerable amount of comment cards has been added for the user's benefit. Three types of comment cards have been placed in the deck. A plain "C" in the listing left margin designates location of an informative comment for the user. A "CR" in the margin locates a position in the deck where data are read in from data cards. Finally, a "CU" in the margin locates a point in the deck where the user can modify a particular parameter within the NLINE deck. This listing was tested on the CDC 6700 computer.

18

```

      IF(IMP.EQ.-1)GO TO 1106
      GO TO 1107
1106 CONTINUE
C
C   SAMPLE VALUES FOR THE 4-EXPONENTIAL PULSE PARAMETERS ARE GIVEN HERE.
C   REFER TO COMPLEX FUNCTION HZFREE.
C
      A=1.E2

      B1=7.E8
      B2=6.5E6
      B3=0.
      B4=0.
      B5=5.E4
      B6=5.E4
      B7=0.
      T=0.
      DTAU=5.E-10
      AMPTQ=0.
      DO 1105 NJQ3=1,300
      T=T+DTAU
      CALL TEMPLT(T,ETST,A,A1,A2,IMP)
      IF (ETST.GT.AMPTQ)AMPTQ=ETST
1105 CONTINUE
      A=A*AMPTQ
1107 CONTINUE
      IRUND=0
C
CU   USER SETS DESIRED VALUE OF RUN IDENTIFICATION NUMBER HERE.
C   IDATE=RUN IDENTIFICATION NUMBER.
C   FOR EXAMPLE, DESIGNATE DATE OF RUN AS FOLLOWS.
C
      IDATE=04066
C
      IDATE=IIJJK
C   II=DAY,JJ=MONTH,K=YEAR
C
      IDNTFN=IDATE*1000
      IDNTFN=IDNTFN+IRUND
C
      IDNTFN=I.D. NUMBER=IIJJKLLL,LLL=RUN NO.
C
C
C   USER GENERATED COMMENT OF FORTRAN CHARACTERS READ IN FROM
C   COLUMNS 1 THROUGH 80 ON DATA CARD.
CR
      READ(5,505)((COMNT(MN),MN=1,8)
505  FORMAT(8A10)
      WRITE(6,602)((COMNT(MN),MN=1,8)
602  FORMAT(1H1,8A10//))
C
C   MSETS=NUMBER OF DATA SETS WHERE VALUES FOR THE TRANSMISSION LINE
C   TERMINATIONS (Z1,Z0), AND/OR ANGLE OF EM WAVE INCIDENCE (PSI),
C   AND/OR TRANSMISSION LINE LENGTH (TL) MAY BE PARAMETRICALLY
C   CHANGED, WHILE HOLDING REFERENCE CONDUCTOR, CABLE CROSS SECTION,
C   AND AXIAL ORIENTATION WITH RESPECT TO INCIDENT EM FIELD CONSTANT.
C   NWIRES=NUMBER OF CABLE CONDUCTORS INCLUDING REFERENCE
CR
      READ(5,500)MSETS,NWIRES
      500  FORMAT(2I5)
      NCAPS=NWIRES*(NWIRES+1)/2
      NP=NWIRES-1
      N2=NP*NP
      06
C
C   MAXWELL CAPACITANCE COEFFICIENTS FOR THE
C   TRANSMISSION LINE ARE READ AT THIS POINT.
CR
      READ(5,501)(CMAXWL(J),J=1,NCAPS)
      501  FORMAT(8E10.0)
      06
C
C   MAGNETIC FIELD COUPLING PARAMETERS FOR THE
C   TRANSMISSION LINE ARE READ AT THIS POINT.
CR
      READ(5,503)(ELI(J),J=1,NP)
      503  FORMAT(6E10.0)
      06

```

```

C      IQ=REFERENCE CONDUCTOR NUMBER. ONE OF THE (NWIRE) NUMBER OF CONDUCTORS
C      IN THE TRANSMISSION LINE IS CHOSEN AS THE REFERENCE.
CR
      READ(5,504)IQ
      504 FORMAT(I15)
      DD 88 JJ88=1,MSETS
C
C      READ TERMINATION RESISTANCE VALUES AT X=0 END (ZI) AND X=TL END (ZD)
C      OF THE TRANSMISSION LINE. TL=LENGTH OF THE TRANSMISSION LINE.
CR
      READ(5,501)(ZI(J),J=1,N2)
      READ(5,501)(ZD(J),J=1,N2)
      CALL RAR(ZI,2HZI,NP)
      CALL RAR(ZD,2HZD,NP)
C
C      ANGLE OF EMP INCIDENCE (PSI), AND TRANSMISSION LINE LENGTH (TL)
C      ARE READ HERE.
CR
      READ(5,502)PSI,TL
      502 FORMAT(2F10.0)
      CALL RVEC(ELI,2HLE,NP)
C
CU      USER SPECIFIES (NXTIME) AND X87(1),AS DEFINED BELOW, HERE.
C      NXTIME=NUMBER OF DESIRED AXIAL POSITIONS OF COMPUTATION
C      ALONG THE CABLE.
C      X87(1)=FRACTION OF TOTAL LENGTH OF CABLE AT WHICH
C      COMPUTATION IS MADE, I=1,2,...,NXTIME.
C      COMPUTATION IS MADE AT THE AXIAL POSITION, X=X87(1)*TL, WHERE
C      TL= LENGTH OF THE CABLE.
C
      NXTIME=1
      X87(1)=0.
      X87(2)=0.25
C
      DD 88 J877=1,NXTIME
      X=X87(J877)*TL
      CALL YDYI(YO,YI,ZD,ZI,NP)
      CALL RAR(YO,2HYO,NP)
      CALL RAR(YI,2HYI,NP)
      CALL PDI(NWIRES,IQ,YO,YI,PO,PI,Y,Z,CMAXWL)
      CALL RAR(PO,2HPO,NP)
      CALL RAR(PI,2HPI,NP)
C
C*****BEGIN FREQUENCY DEPENDENT COMPUTATIONS.
C
CU      USER SPECIFIES (NCOUNT), AS DEFINED BELOW, HERE.
C      NCOUNT=NUMBER OF FREQUENCY POINTS.
C
      NCOUNT=600
C
C      OMEG1 FILLS THE ARRAY FREK WITH THE RADIAN FREQUENCY VALUES.
C      SEE SUBROUTINE OMEG1 FOR FREQUENCY GENERATION SCHEME.
C
      CALL OMEG1(FREK,NCOUNT)
      DD 87 LL8=1,NCOUNT
      W=FREK(LL8)
      BETA=W/V
      THETA=BETA*TL
      CC=COS(THETA)
      SN=SIN(THETA)
      CALL DADD(PO,PI,PP,N2)
      CALL SMLT(PP,CC,NP,PP)
      CALL SMLT(PO,SN,NP,SO)
      DD 56 JXX=1,N2
      56 XP(JXX)=PI(JXX)
      CALL MPRD(SO,XP,2,NP,NP,0,0,NP)
      CALL XIDENT(NP,SO)
      DD 10 J=1,N2
      10 RC(J)=CMPLX(SO(J),0.)
      CALL SMLT(SO,SN,NP,SO)
      CALL DADD(SO,Q,Q,N2)
      DD 13 J=1,N2

```

```

C      CS=S MATRIX
C
13  CS(J)=CMPLX(PPL(J),Q(J))
    CALL CGELG(RC,CS,NP,NP,1.E-10,IER)
C
C      RC=S INVERSE MATRIX
C
    CALL UWOFX(X,W,Z,PSI,UX,WX,Y,NP,ELI)
    CALL UWOFX(TL,W,Z,PSI,UL,WL,Y,NP,ELI)
    DO 11 J=1,N2
    COMPZ(J)=CMPLX(Z(J),0.)
11  YOC(J)=CMPLX(-YD(J),0.)
    CALL CMPRD(YOC,UL,CS,NP,NP,0,0,1)
    CALL CMADD(WL,CS,CS,NP)
    CALL CMPRD(COMPZ,CS,XKL,NP,NP,0,0,1)
C
C      XKL=K(L) VECTOR
C
    CALL FINIX,BETA,PVX,PIX,Y,PI,NP)
    CALL CMPRD(RC,XKL,CS,NP,NP,0,0,1)
    DO 15 K=1,NP
15  CX(K)=CS(K)
    CALL CMPRD(PVX,CS,XKL,NP,NP,0,0,1)
    CALL CMADD(XKL,UX,VX,NP)
    ZUZ8=CEXP(SJ*BETA*CGS(PSI*PI*180/PI)*TL)
    CALL CSMLT(VX,ZUZ8,NP,VX)
C
C      VX=VOLTAGE VECTOR AT X
C
    CALL CMPRD(PIX,CX,XKL,NP,NP,0,0,1)
    CALL CMADD(XKL,WX,CX,NP)
    CALL CSMLT(CX,ZUZ8,NP,CX)
C
C      CX=CURRENT VECTOR AT X
C
    DO 14 J=1,NP
    CALL SMAG(CX(J),CXMG(LL8,J),CXAT(LL8,J))
14  CALL SMAG(VX(J),VXMG(LL8,J),VXAT(LL8,J))
87  CONTINUE
C
C****END FREQUENCY DEPENDENT COMPUTATIONS.

C      FREQUENCY DOMAIN RESULTS ARE PRINTED OUT BY SUBROUTINE (HEAD) AT EVERY
C      J-TH FREQUENCY VALUE. J=1 PRINTS OUT ENTIRE FREQUENCY ARRAY OF RESULTS.
CU     USER SPECIFIES VALUE OF (J) HERE.
C
      J=30
      CALL HEAD(O,J,FREK,CXMG,CXAT,VXMG,VXAT,COMNT,TL,PSI,IQ,
INWIRES,IDNTFN,NP,NCOUNT,X)
C
C****BEGIN TIME DOMAIN COMPUTATIONS.
C      TIME ARRAY IS GENERATED HERE.
C      THE USER MAY WISH TO MODIFY FREQUENCY AND TIME
C      ARRAYS TO ACHIEVE MOST ACCURATE FOURIER TRANSFORM.
CU     USER SPECIFIES (NTIME), AS DEFINED BELOW, HERE.
C      NTIME=NUMBER OF TIME POINTS.
C
      NTIME=600
      TAU=TL/V
      DDTAU=100.
      DTAU=TAU/DDTAU
      TIME(1)=1.E-12
      ITIM8=1
      DO 1003 ITIM=2,50
      ITIM8=ITIM8+1
1003  TIME(ITIM)=TIME(ITIM-1)+.1*DTAU
      NTMME=NTIME-ITIM8
      ITIM8=ITIM8+1
      DO 713 ITIM=ITIM8,NTMME

```

```

713 TIME(ITIM)=TIME(ITIM-1)+DTAU
      NTIME =NTMME
      DO 89 NTH=1,NP
      DO 90 JJ=1,NCOUNT
90 TEMP(JJ)=VXMG(JJ,NTH)*CEXP(SJ*VXAT(JJ,NTH)/57.2958)
C
C      FOURIER TRANSFORM FROM FREQUENCY TO TIME DOMAIN PERFORMED HERE.
C      USER MAY WISH TO SUBSTITUTE PERSONAL PREFERRED SUBROUTINE HERE.
C      SUBROUTINE TRANS IS USED HERE FOR THE FOURIER TRANSFORM.
C
      CALL TRANS(TEMP,VTIM,FREK,TIME,NCOUNT,NTIME,1.,0)
      DO 91 JJ=1,NCOUNT
91 TEMP(JJ)=CXMG(JJ,NTH)*CEXP(SJ*CXAT(JJ,NTH)/57.2958)
C
C      SUBROUTINE TRANS IS USED HERE FOR THE FOURIER TRANSFORM.
C
      CALL TRANS(TEMP,CTIM,FREK,TIME,NCOUNT,NTIME,1.,0)
C
C      TIME DOMAIN RESULTS ARE PRINTED OUT BY SUBROUTINE (HTIM) AT EVERY J-TM
C      TIME VALUE. J=1 PRINTS OUT ENTIRE TIME ARRAY OF RESULTS.
CU      USER SPECIFIES VALUE OF (J) HERE.
C
      J=20
      CALL HTIM(COMNT,IDNTFN,VTIM,CTIM,TIME,NTIME,J)
C
CU      USER MAY PLOT FREQUENCY AND TIME DOMAIN RESULTS FOR RESPONSE AT EACH
C      CONDUCTOR HERE. USER MUST WRITE OWN PLOTTING INSTRUCTIONS COMPATIBLE
C      WITH LOCAL COMPUTER.
C
      89 CONTINUE
C
C**** END TIME DOMAIN COMPUTATIONS.
C
      88 CONTINUE
      DO 22211 LXJK=1,NCOUNT
22211 E2TESS(LXJK)=377.*HZFREE(FREK(LXJK),A,A1,A2,IMP)
      CALL TRANS(E2TESS,E2TT,FREK,TIME,NCOUNT,NTIME,1.,0)
C
C      TIME DOMAIN ELECTRIC FIELD USED AS THE
C      DRIVING SOURCE IS PRINTED AT THIS POINT.
C
      DO 22212 J=1,NTIME
22212 CALL TEMPLT(TIME(J),HZFTM(J),A,A1,A2,IMP)
      WRITE(6,700)IDNTFN,(COMNT(MN),MN=1,8),IDNTFN
      700 FORMAT(1H1,5HI.D.=,19,10X8A10,10X5HI.D.=,19//)
      WRITE(6,701)
      701 FORMAT(1H ,8SHINCIDENT ELECTRIC FIELD FROM EXACT EQUATION AND FROM
      1 FOURIER TRANSFORM IN VOLTS/METER/)
      WRITE(6,702)
      702 FORMAT(1H ,4X9HTIME(SEC),7X5HEXACT,6X9HTRANSFORM)
      WRITE(6,703)(TIME(J),HZFTM(J),E2TT(J),J=1,NTIME,20)
      703 FORMAT(1P3E14.4)
      STOP
      END

      SUBROUTINE OMEG1(FREK,NCOUNT)
      THIS SUBROUTINE GENERATES THE RADIAN FREQUENCY ARRAY.
      DIMENSION FREK(600)
      PIE=3.1415927
      NPD=NUMBER OF FREQUENCY POINTS PER DECADE.
      NPD=120
      NDC=NCOUNT/NPD
      D=L*WEST FREQUENCY VALUE.
      D=1.E5
      D=1.E7
      D=1.E9
      FR=D
      DW=D/FLDAT(NPD)*10.
      LL=D
      DO 2 J=1,NDC
      DO 3 L=1,NPD
      LL=LL+1
      FR=FR+DW
      3 FREK(LL)=FR
      2 DW=10.*DW
      RETURN
      END

```

```

      SUBROUTINE CVEC(VEC,LABL,NP)
C     CVEC PRINTS OUT THE COMPLEX VECTOR (VEC) NAMED (LABL)
      COMPLEX VEC(1)
      WRITE(6,9)LABL
9     FORMAT(1H ,1A2)
      WRITE(6,10)(VEC(J),J=1,NP)
10    FORMAT(10E11.3)
      RETURN
      END

      SUBROUTINE XIDENT(N,R1)
C     XIDENT GENERATES AN N BY N UNIT MATRIX.
C     CALLED FROM FIN,POPI
      DIMENSION R1(1)
      L=0
      DO 10J=1,N
      DO 10K=1,N
      L=L+1
      IF(J.EQ.K)GJ=1012
      R1(L)=0.
      GO TO 10
12    R1(L)=1.
10    CONTINUE
      RETURN
      END

      SUBROUTINE MPROD(A,B,R,NRA,NCARB,L,N,NCB)
C     MPROD PERFORMS THE MATRIX PRODUCT (A)*(B), AND
C     RETURNS RESULTING MATRIX INTO (R).
C     CALLED FROM UWDGX,POPI
      DIMENSION A(1),B(1),R(1)
      LN=N*L
      DO 10 I=1,NRA
      DO 10 J=1,NCB
      Q=0.
      DO 10 K=1,NCARB
      IKA=(I-1)*NCARB+K
      KJB=(K-1)*NCR+J
      IJR=(I-1)*NCR+J
      Q=Q+A(IKA)*B(KJB)
10    R(IJR)=Q
      RETURN
      END

      SUBROUTINE CAR(AR,LABL,NP)
C     CAR PRINTS OUT THE COMPLEX MATRIX (AR) NAMED (LABL)
      COMPLEX AR(1)
      N2=NP*NP
      WRITE(6,7)LABL
7     FORMAT(1H ,1A2)
      WRITE(6,8)(AR(J),J=1,N2)
8     FORMAT(10E11.3)
      RETURN
      END

      SUBROUTINE CMPROD(A,B,R,NRA,NCARB,L,N,NCB)
C     CMPROD PERFORMS MULTIPLICATION OF TWO
C     COMPLEX MATRICES (R)=(A)*(B).
C     CALLED FROM FIN,UWDGX,NLINE
      COMPLEX A(1),B(1),R(1),Q
      LN=N*L
      DO 10 I=1,NRA
      DO 10 J=1,NCB
      Q=CMPLX(0.,0.)
      DO 10 K=1,NCARB
      IKA=(I-1)*NCARB+K
      KJB=(K-1)*NCR+J
      IJR=(I-1)*NCR+J
      Q=Q+A(IKA)*B(KJB)
10    R(IJR)=Q
      RETURN
      END

      SUBROUTINE DADD(A,B,C,N)
C     DADD ADDS THE MATRIX (B) TO MATRIX (A).
C     CALLED FROM NLINE
      DIMENSION A(1),B(1),C(1)
      DO 2 J=1,N
      C(J)=A(J)+B(J)
2     RETURN
      END

      SUBROUTINE RVEC(VEC,LABL,NP)
C     RVEC PRINTS OUT THE VECTOR (VEC) NAMED (LABL)
C     CALLED FROM NLINE
      DIMENSION VEC(1)
      WRITE(6,7)LABL
7     FORMAT(1H ,1A2)
      WRITE(6,6)(VEC(J),J=1,NP)
6     FORMAT(1H ,10E11.3)
      RETURN
      END

```

```

C      SUBROUTINE FIELDS(PSI,DXL,HZCOS,HZSIN,EYCOS,EYSIN,W)
C      THIS SUBROUTINE PERFORMS INTERMEDIATE CALCULATIONS.
C      CALLED FROM UWDFX
      COMPLEX HZCOS,HZSIN,EYCOS,EYSIN,SJ,EJK,EJM,HOW,EH,HZFREE
      COMMON/PPAR/A1,A2,A
      DATA Z/377./
      DXL2=DXL/2.
      SJ=CMPLX(D.,1.)
      XK=4/V
      RPSI=PSI/57.29578
      CPSI=COS(RPSI)
      PK=XK*CPSI
      PP=XK*PK
      PM=XK*PK
      SP=SIN(PP*DXL2)
      SM=SIN(PM*DXL2)
      EJK=CEXP(-SJ*XK*DXL2)*SP/PP
      IF(PM.EQ.0.)GOTO 11
      EJM=CEXP(SJ*XK*DXL2)*SM/PM
      GO TO 12
11 EJM=CEXP(SJ*PK*DXL2)
12 HOW=HZFREE(W,A,A1,A2,IMP)
      EH=HOW*CEXP(-SJ*PK*DXL2)
      HZCS=EH*(EJM+EJK)
      HZSIN=-SJ*EH*(EJM-EJK)
      EYCOS=HZCOS*Z*CPSI
      EYSIN=HZSIN*Z*CPSI
      RETJRN
      END

C      SUBROUTINE RAR(AR,LABL,NP)
C      RAR PRINTS OUT THE MATRIX (AR) NAMED (LABL)
C      CALLED FROM POP1,NLINE
      DIMENSION AR(1)
      N2=NP*NP
      WRITE(6,7)LABL
7  FORMAT(1H ,IA2)
      WRITE(6,8)AR(J),J=1,N2
8  FORMAT(1OE11.3)
      RETJRN
      END

C      SUBROUTINE TEMPLT(T,E,A,A1,A2,IMP)
C      COMMON/YDOLL/B1,B2,B3,B4,B5,B6,B7
C      IF (IMP)2,3,4
3  E=1.
      RETJRN
4  TT=ALOG(A2/A1)/(A2-A1)
      TM=EXP(-A1*TT)-EXP(-A2*TT)
      AM=A/TM
      E=AM*(EXP(-A1*T)-EXP(-A2*T))
      RETJRN
2  CONTINUE
      B8=(B5-B6)*(1.+B3*T)*EXP(-B3*T)
      B9=(B6+B7)*(1.+B2*T)*EXP(-B2*T)
      B10=-B5*(1.+B1*T)*EXP(-B1*T)
      B11=-B7*(1.+B4*T)*EXP(-B4*T)
      E=A*(B8+B9+B10+B11)
      RETJRN
      END

C      SUBROUTINE CMADD(A,B,C,N)
C      CMADD ADDS TWO N BY N COMPLEX MATRICES (A) AND (B).
C      CALLED FROM FIN,UWDFX,NLINE
      COMPLEX A(1),B(1),C(1)
      DO 2 J=1,N
2  C(J)=A(J)+B(J)
      RETJRN
      END

C      SUBROUTINE SMLT(RIN,V,N,ROUT)
C      SMLT MULTIPLIES THE MATRIX (RIN) BY THE CONSTANT (V).
C      CALLED FROM FIN,POP1,NLINE
      DIMENSION RIN(1),ROUT(1)
      NN=V*NN
      DO 10 J=1,NN
10 ROUT(J)=V*RIN(J)
      RETJRN
      END

C      SUBROUTINE GELG(R,A,M,N,EPS,IER)
C      GELG PERFORMS MATRIX INVERSION FOR REAL MATRICES.
C      CALLED FROM POP1
C      TAKEN FROM IBM SYSTEM/360 SCIENTIFIC SUBROUTINE PACKAGE, 1967,
C      REPORT NO. H20-0166-4, PAGES 179-181.
      DIMENSION A(1),R(1)
      DATA ZERO/0.000/,HALF/0.500/,ONE/1.000/
      IER=0
1  PIV=ZERO
      MM=MM
      NN=NN
      DO 3 L=1,MM
      TB=A(L)
      IF(TB.LT.ZERO) TB=-TB
      IF(TB=PIV)3,3,2

```

```

2   PIV=TB
   I=L
3   CONTINUE
   TOL=EPS*PIV
   LST=I
   DO 17 K=1,M
   IF(PIV-23,23,4
   IF(IER)7,5,7
4   IF(PIV-TOL)6,7
5   IER=K-1
6   PIV=ONE/A(I)
7   J=(I-1)/M
   I=I-J*M-K
   J=J-I-K
   DO 8 L=K,NM,M
   LL=L+1
   TB=PIV*R(LL)
   R(LL)=R(L)
8   R(L)=TB
   IF(K-N)9,18,18
9   LEND=LST+M-K
   IF(J)12,12,10
   II=J*M
10  DO 11 L=LST,LEND
   TB=A(L)
   LL=L+1
   A(L)=A(LL)
11  A(LL)=TB
12  DO 13 L=LST,MM,M
   LL=L+1
   TB=PIV*A(LL)
   A(LL)=A(L)
13  A(L)=TB
   ALLST=J

   PIV=ZERO
   LST=LST+1
   J=0
   DO 16 II=LST,LEND
   PIV=-A(II)
   IST=II+M
   J=J+1
   DO 15 L=IST,MM,M
   LL=L-J
   A(L)=A(L)+PIV*A(LL)
   TB=A(L)
   IF(TB-1E-15) TB=-TB
   IF(TB-PIV)15,15,14
14  PIV=TB
   I=L
15  CONTINUE
   DO 16 L=K,NM,M
   LL=L+J
16  R(LL)=R(LL)+PIV*R(L)
17  LST=LST+M
18  IF(M-1)23,22,19
19  IST=MM+M
   LST=M+1
   DO 21 I=2,M
   II=LST-I
   IST=IST-LST
   L=IST-M
   L=A(L)+HALF
   DO 21 J=II,NM,M
   TB=R(J)
   LL=J
   DO 20 K=IST,MM,M
   LL=LL+1
20  TB=TB-A(K)*R(LL)
   K=J+L
   R(J)=R(K)
21  R(K)=TB
22  RETJRN
23  IER=-1
   RETURN
   END

SUBROUTINE CGELG(R,A,M,N,EPS,IER)
CGELG PERFORMS COMPLEX MATRIX INVERSION.
C   CALLED FROM NLINE
C
C   COMPLEX R(I),A(I),PIV,CTB
C   IF(M)23,23,1
C
C   SEARCH FOR GREATEST ELEMENT IN MATRIX A
1  IER=0
   PIV=0.
   MM=4*M
   NM=4*M

```

```

      DO 3 L=1,MM
      TB=CABS(A(L))
      IF(TB-PIV)3,3,2
2     PIV=TB
      I=L
3     CONTINUE
      A(I) IS PIVOT ELEMENT. PIV CONTAINS THE ABSOLUTE VALUE OF A(I).
      TOL=EPS*PIV
C
C
C     START ELIMINATION LOOP
      LST=1
      DO 17 K=1,M
C
C     TEST ON SINGULARITY
      IF(PIV)23,23,4
      IF(IER)7,5,7
5     IF(PIV-TOL)6,6,7
6     IER=K-1
7     PIV=1./A(I)
      J=(I-1)/M
      I=J*M-K
      J=J+1-K
C     I+K IS ROW-INDEX. J+K COLUMN-INDEX OF PIVOT ELEMENT
C
C     PIVOT ROW REDUCTION AND ROW INTERCHANGE IN RIGHT HAND SIDE R
      DO 3 L=K,NM,M
      LL=L+1
      CTB=PIV*A(LL)
      R(LL)=R(L)
8     R(L)=CTB
C
C     IS ELIMINATION TERMINATED
      IF(K-M)9,18,18
C
C     COLUMN INTERCHANGE IN MATRIX A
9     LEND=LST+M-K
      IF(J)12,12,10
10    II=J*M
      DO 11 L=LST,LEND
      CTB=A(L)
      LL=L+II
      A(L)=A(LL)
11    A(LL)=CTB
C
C     ROW INTERCHANGE AND PIVOT ROW REDUCTION IN MATRIX A
12    DO 13 L=LST,MM,M
      LL=L+1
      CTB=PIV*A(LL)
      A(LL)=A(L)
13    A(L)=CTB
C
C     SAVE COLUMN INTERCHANGE INFORMATION
      X=REAL(A(LST))
      X=J
      A(LST)=CMPLX(X,0.)
C
C     ELEMENT REDUCTION AND NEXT PIVOT SEARCH
      PIV=0.
      LST=LST+1
      J=0
      DO 16 I=LST,LEND
      PIV=-A(I)
      IST=I+M
      J=J+1
      DO 15 L=IST,MM,M
      LL=L-J
      A(L)=A(L)+PIV*A(LL)
      TB=CABS(A(L))
      IF(TB-PIV)15,15,14
14     PIV=TB
      I=L
15    CONTINUE
      DO 16 L=K,NM,M
      LL=L+J

```

```

16 R(LL)=R(LL)+PIVI*R(L)
17 LST=LST+M
END OF ELIMINATION LOOP
C
C
C
BACK SUBSTITUTION AND BACK INTERCHANGE
18 IF (M-1) 23,22,19
19 IST=NM+M
LST=M+1
DO 21 I=2,M
II=LST-I
IST=IST-LST
L=IST-M
L=REAL(A(L))+.5
DO 21 J=II,NM,M
CTB=R(J)
LL=J
DO 20 K=IST,M,M
LL=LL+1
20 CTB=CTB-A(K)*R(LL)
K=J+1
R(J)=R(K)
21 R(K)=CTB
22 RETURN
C
C
C
ERRJR RETURN
23 IER=-1
RETURN
END

```

```

COMPLEX FUNCTION HZFREE(W,A,A1,A2,IMP)
COMPLEX B8,B9,B10,B11
C HZFREE=COMPLEX AMPLITUDE OF INCIDENT MAGNETIC FREE FIELD
C IN THE TRANSVERSE PLANE OF THE NLINE AS A FUNCTION OF W(RAD/SEC).
C CALLED FROM FIELDS
C A=PEAK TIME DOMAIN ELECTRIC FREE FIELD AMPLITUDE IN VOLTS/METER
C A1,A2=TWO EXPONENTIAL PULSE SHAPE PARAMETERS
C IMP SPECIFIES TYPE OF MAGNETIC FIELD INPUT PULSE SHAPE
C IMP=0, HZFREE=UNIT IMPULSE
C IMP=+1, HZFREE=TWO EXPONENTIAL PULSE
C IMP=-1, HZFREE=SPECIAL 4-EXPONENTIAL PULSE
COMMON/YOOLL/B1,B2,B3,B4,B5,B6,B7
TO=ALOG(A2/A1)/(A2-A1)
TM=EXP(-A1*TO)-EXP(-A2*TO)
XA=A/TM/377.
IF(IMP)5,2,3
2 HZFREE=CMPLX(1.,0.)
GO TO 4
3 HZFREE=XA*(1./CMPLX(A1,W)-1./CMPLX(A2,W))
GO TO 4
5 XA=A/377.
B8=(B7+B6)*(1.+B2/CMPLX(B2,W))/CMPLX(B2,W)
B9=-B5*(1.+B1/CMPLX(B1,W))/CMPLX(B1,W)
B10=(B5-B6)*(1.+B3/CMPLX(B3,W))/CMPLX(B3,W)
B11=-B7*(1.+B4/CMPLX(B4,W))/CMPLX(B4,W)
HZFREE=XA*(B8+B9+B10+B11)
4 CONTINUE
RETURN
END
SUBROUTINE HEAD(I,J,FREK,CXMG,CXAT,VXMG,VXAT,COMNT,TL,PSI,IQ,
INWIRES,IDNTFN,NP,NCOUNT,X)
C HEAD PRINTS OUT THE FREQUENCY DOMAIN RESULTS.
C CALLED FROM NLINE
C DIMENSION FREK(600),CXMG(600,10),CXAT(600,10),VXMG(600,10),
VXAT(600,10),COMNT(8)
C
C I=0, PRINT VX...I=1,PRINT IX
C J=PRINT EVERY J-TH VALUE.(J=1 PRINTS ALL FREK VALUES)
C
IDNTFN=IDNTFN+1
XX=X/TL
WRITE(6,600)IDNTFN,(COMNT(MN),MN=1,8),IDNTFN

```

```

600 FORMAT(1H1,SHI.D.=,I9,10X8A10,10X5HI.D.=,I9//)
    IF(I)2,3,2
    3 WRITE(6,601)XX,TL,PSI
601 FORMAT(1H ,14HVOLTAGES AT X=,1F4.2,12H*LINE LENGTH,3X2HL=,
11E14.4,3X4HPSI=,1F6.2//)
604 FORMAT(1H ,14CURRENTS AT X=,1F4.2,12H*LINE LENGTH,3X2HL=,
11E14.4,3X4HPSI=,1F6.2//)
    WRITE(6,605)
605 FORMAT(1H ,2X7HRAD/SEC,1X11HCONDUCTOR 1,7X1H2,10X1H3,10X1H4,10X1H5
1,10X1H6,10X1H7,10X1H8,10X1H9,9X2H10/)
    DO 10 K=1,NCOUNT,J
    WRITE(6,602)FREQ(K),(VXMG(K,M),M=1,NP)
    10 WRITE(6,603)(VXAT(K,M),M=1,NP)
602 FORMAT(1H ,1E10.2,11E11.3)
603 FORMAT(1H ,6X3HARG,1X11E11.3)
    GO TO 4
    2 WRITE(6,604)XX,TL,PSI
    WRITE(6,605)
    DO 11 K=1,NCOUNT,J
    WRITE(6,602)FREQ(K),(CXMG(K,M),M=1,NP)
    11 WRITE(6,603)(CXAT(K,M),M=1,NP)
    4 RETURN
    END

SUBROUTINE CSMLT(RIN,V,N,ROUT)
C CALLED FROM FIN,UWOFX,NLINE
C COMPLEX RIN(I),ROUT(I),V
C MATRIX OR VECTOR RIN(J) MULTIPLIED BY A COMPLEX CONSTANT, V.
    DO 10 J=1,N
    ROUT(J)=V*RIN(J)
    10 RETURN
    END

SUBROUTINE FIN(X,BETA,PVX,PIX,Y,PI,NP)
C THIS SUBROUTINE PERFORMS INTERMEDIATE CALCULATIONS.
C CALLED FROM NLINE
    DIMENSION PI(100),XI(100),P8(100),Y(100)
    COMPLEX PVX(1),PIX(1),SJ,S,CC,XC(100),XX(100),PP(100),P9(100)
    SJ=CMPLX(0.,1.)
    N2=NP*NP
    CALL XIDENT(NP,XI)
    DO 10 J=1,N2
    P9(J)=CMPLX(PI(J),0.)
    10 XX(J)=CMPLX(XI(J),0.)
    THETA=BETA*X
    C=CJS(THETA)
    S=SIN(THETA)*SJ
    CALL CSMLT(P9,S,N2,PVX)
    CC=CMPLX(C,0.)
    CALL CSMLT(XX,CC,N2,XC)
    CALL CMADD(XC,PVX,PVX,N2)
    CALL SMLT(PI,C,NP,P8)
    CALL CSMLT(XX,S,N2,XC)
    DO 11 J=1,N2
    PP(J)=CMPLX(P8(J),0.)
    CALL CMADD(PP,XC,XC,N2)
    CALL SMLT(Y,-1.,NP,XI)
    DO 12 J=1,N2
    12 XX(J)=CMPLX(XI(J),0.)
    CALL CMPRD(XX,XC,PIX,NP,NP,0,0,NP)
    RETURN
    END

SUBROUTINE SMAG(A,B,AGMT)
C SMAG CONVERTS THE COMPLEX NUMBER (A) TO POLAR FORM. B=MAGNITUDE OF (A)
C AND (AGMT) IS THE ARGUMENT OF (A).
C CALLED FROM NLINE
    COMPLEX A,C
    C=CONJG(A)
    C=A*C
    2 B=SQRT(REAL(C))
    AR=REAL(A)
    AI=AIMAG(A)
    IF(AR)3,4,3
    4 IF(AI)5,6,7

```

```

6 AGMT=0.
GO TO 8
5 AGMT=270.
GO TO 8
7 AGMT=90.
GO TO 8
3 AGMT=57.29578*ATAN2(AI,AR)
IF(AGMT)9,8,8
9 AGMT=AGMT+360.
8 RETJRN
END

SUBROUTINE DELETX(I,N,A,B)
C CALLED FROM POP1
C DELETES I-TH COLUMN AND ROW OF N*N MATRIX A, AND RETURNS N1*N1 B.
DIMENSION A(1),B(1)
N1=N-1
L=0
DO 10 J=1,N
DO 10 K=1,N
IF(J.EQ.I)GOTO 10
IF(K.EQ.I)GOTO 10
L=L+1
B(L)=A(N*(J-1)+K)
10 CONTINUE
RETJRN
END

SUBROUTINE JWOFX(X,W,Z,PSI,UX,WX,Y,N,ELJ)
C CALLED FROM NLINE
DIMENSION Z(1),ELJ(10),CAP(100),ECI(10),Y(1),EC2(10),Q(100)
COMPLEX UX(1),WX(1),SJ,HZCOS,HZSIN,EYCOS,CELJ(10),ELJC(10),
1YY(100),ECIC(10),EC2C(10),WB(10),EB(10),EYSIN
COMMON/XSAV/CAP
U=1.25663706E-6
SJ=CMPLX(0.,1.)
N2=N*N
CALL FIELDS(PSI,X,HZCOS,HZSIN,EYCOS,EYSIN,W)
HZCOS=HZCOS*SJ*W
HZSIN=HZSIN*W
EYCOS=EYCOS*SJ*W
EYSIN=EYSIN*W
DO 14 I=1,N
C=0.
DO 9 J=1,N
NQ=N*(I-1)+J
9 C=C+ELJ(J)*CAP(NQ)
14 ECI(I)=-C/U
DO 10 J=1,N
10 ELJC(J)=CMPLX(ELJ(J),0.)
CALL CSMLT(ELJC,HZCOS,N,CELJ)
DO 13 JQ=1,N2
13 Q(JQ)=Z(JQ)
CALL MPRD(Q,ECI,EC2,N,N,0,0,1)
DO 12 K=1,N
12 EC2C(K)=CMPLX(EC2(K),0.)
CALL CSMLT(EC2C,EYSIN,N,EB)
CALL CMADD(CELJ,EB,UX,N)
CALL CSMLT(ELJC,HZSIN,N,ELJC)
CALL CSMLT(EC2C,EYCOS,N,ECIC)
CALL CMADD(ECIC,ELJC,WB,N)
DO 11 J=1,N2
11 YY(J)=CMPLX(Y(J),0.)
CALL CMPRD(YY,WB,WX,N,N,0,0,1)
RETJRN
END
SUBROUTINE POP1(NWIRES,IQ,YO,YI,PO,PI,Y,Z,C)
C THIS SUBROUTINE PERFORMS INTERMEDIATE CALCULATIONS.
C CALLED FROM NLINE
DIMENSION PO(1),PI(1),YO(1),YI(1),Y(1),Z(1),C(1),RI(100),CAP(100)
1,CC(100),CDP(100)
COMMON/XEL/V,IMP
COMMON/XSAV/CAP
DATA EP/1.E-10/
NP=NWIRES-1
N2=NP*NP
L=0

```

```

      DD 10 I=1,NWIRES
      DD 10 J=I,NWIRES
      L=L+1
      NQ=NWIRES*(I-1)+J
      NR=NWIRES*(J-1)+I
      CC(NQ)=C(L)
10  CC(NR)=CC(NQ)
C   CC=EXPANDED CAPACITANCE MATRIX
      CALL RAR(CC,2HCC,NWIRES)
      CALL XIDENT(NP,RI)
      CALL DELETX(IQ,NWIRES,CC,CAP)
C   CAP=REDUCED CAPACITANCE MATRIX
      CALL RAR(CAP,2HC,NP)
      CALL SMLT(CAP,V,NP,Y)
C   Y=Y MATRIX
      DD 30 KM=1,N2
30  COP(KM)=CAP(KM)
      CALL GELG(RI,COP,NP,NP,EP,IER)
C   RI=CAP INVERSE
      IF(IER.NE.0)GOTO 16
      GO TO 17
16  WRITE(6,601)I,IER
601  FORMAT(1H,48HUNSUCCESSFUL INVERSION OF CAPACITANCE MATRIX**N=,I1
      13,3X4HIER=,I13////)
17  Q=1./V
      CALL SMLT(RI,Q,NP,Z)
C   Z=Z MATRIX
      CALL RAR(RI,2HC-,NP)
      CALL RAR(Y,2HY,NP)
      CALL RAR(Z,2HZ,NP)
      CALL MPRD(Z,YI,PI,NP,NP,0,0,NP)
      CALL MPRD(Z,YO,PO,NP,NP,0,0,NP)
      RETURN
      END

      SUBROUTINE HTTM(COMNT,IDNTFN,VT,CT,T,NTIME,N)
C   HTTM WRITES TIME DOMAIN HEADINGS IN THE PRINTOUT.
C   CALLED FROM NLINE
      DIMENSION VT(1),CT(1),T(1)
      DIMENSION COMNT(8)
      COMMON/XYZ/KTCNT,NTH,TL,PSI,X
      COMMON/XEL/V,IMP
      TAU=TL/V
      IDNTFN=IDNTFN+1
      XX=X/TL
      WRITE(6,600)IDNTFN,(COMNT(MN),MN=1,8),IDNTFN
600  FORMAT(1H1,5H1.D.=,I9,10X8A10,10X5H1.D.=,I9//)
      WRITE(6,601)XX,TL,PSI
601  FORMAT(1H,14HRESPONSE AT X=,1F4.2,12H*LINE LENGTH,3X2HL=,
      1,1E14.4,3X4HPSI=,1F6.2//)
      WRITE(6,606)V,TAU
606  FORMAT(1H,30HCABLE PROPAGATION VELOCITY, V=,1P1E9.2,11HMETERS/SEC
      1,2X35HTRANSIT TIME OVER ONE CABLE LENGTH=,1E9.2,4HSEC.//)
      WRITE(6,605)NTH
605  FORMAT(1H,4X9HTIME(SEC),7X5HVOLTS,9X4HAMPS,5X
      116HAT CONDUCTOR NO.,I2//)
      WRITE(6,604)(T(J),VT(J),CT(J),J=1,NTIME,N)
604  FORMAT(1P3E14.4)
      RETURN
      END

      SUBROUTINE YDVI(YO,YI,ZO,ZI,N)
C   CALLED FROM NLINE
C   DIMENSION YO(1),YI(1),ZO(1),ZI(1),AI(100),AO(100)
C   SET ZI AND/OR ZO NEGATIVE (LESS THAN ZERO) TO REPRESENT OPEN
C   CIRCUIT.
      DO 5 IR=1,N
      DO 5 JC=IR,N
      NQ=N*(IR-1)+JC
      NP=N*(JC-1)+IR
      IF(ZI(NQ).LT.0.)GOTO 6
      AI(NQ)=1./ZI(NQ)
      GO TO 7

```

```

6  A1(NQ)=0.
7  IF(Z0(NQ).LT.0.)GOTO 8
   AD(NQ)=1./Z0(NQ)
   GO TO 9
8  AD(NQ)=0.
9  A1(NP)=A1(NQ)
5  AQ(NP)=AQ(NQ)
   DO 10 I=1,N
   DO 10 J=1,N
   NQ=V*(I-1)+J
   NP=N*(J-1)+I
   Y1=0.
   Y2=0.
   IF(I-J)1,2,1
2  DO 11 JJ=1,N
   JK=I
   M=N*(JK-1)+JJ
   Y1=Y1+A1(M)
11  Y2=Y2+AQ(M)
   Y1(NQ)=Y1
   Y0(NQ)=Y2
   GO TO 12
1  Y1(VQ)=-A1(NQ)
   Y0(NQ)=-AQ(NQ)
12  Y1(NP)=Y1(NQ)
10  Y0(NP)=Y0(NQ)
   RETJRN
   END

```

```

SUBROUTINE TRANS(FW,FT,W,TT,IW,IT,H,KONTRL) TRANS002
TRANS PERFORMS THE NUMERICAL FOURIER TRANSFORM OF FREQUENCY DOMAIN
C TO TIME DOMAIN.
C CALLED FROM NLINE
C FW=ARRAY OF F(W) POINTS COMPLEX INPUT TRANS003
C FT= ARRAY OF F(T) POINTS OUTPUT TRANS004
C W= ARRAY OF W POINTS INPUT TRANS005
C TT= ARRAY OF TIME POINTS INPUT TRANS006
C IW= NUMBER OF W POINTS TRANS007
C IT= NUMBER OF TIME POINTS TRANS008
C KONTRL = .NE.0 PRINT BH,W,F(W),A,B,C. .EQ.0 NO PRINT TRANS009
   DIMENSION FT(1000),TT(1000),W(1000),A(500),B(500),C(500) TRANS010
   DIMENSION G(3) TRANS011
   COMPLEX FW(1000) TRANS012
   DOUBLE PRECISION T,C1,C2,C3,C4,C5,C6,C52,CS0,SN2,SN0,XP,X TRANS013
   DOUBLE PRECISION W1,W2,W3,W12,W22,W32,ET1,ET2,ET3,DELTA TRANS014
   G(1)=2. TRANS015
   G(2)=24. TRANS016
   G(3)=720. TRANS017
C ARE DIMENSIONS EXCEEDED TRANS018
   IF(IW.GT.1000.OR.IT.GT.1000) GOTO1 TRANS019
   PI=3.1415927 TRANS020
   IF(KONTRL) 6,4,6 TRANS021
6  WRITE(6,600) TRANS022
4  II=IW-3 TRANS023
   JJ=(II/2)+2 TRANS024
   IF(JJ.EQ.II) II=II+1 TRANS025
   DO5 I=1,II,2 TRANS026
   W1=W(I) TRANS027
   W2=W(I+1) TRANS028
   W3=W(I+2) TRANS029
   W12=W1**2 TRANS030
   W22=W2**2 TRANS031
   W32=W3**2 TRANS032
   ET1=REAL(FW(I)) TRANS033
   ET2=REAL(FW(I+1)) TRANS034
   ET3=REAL(FW(I+2)) TRANS035
   DELTA=W22*W3-W32*W2-W12*W3+W32*W1+W12*W2-W22*W1 TRANS036
   L=I/2+1 TRANS037
   A(L)=(W2-W3)*ET1-(W1-W3)*ET2+(W1-W2)*ET3/DELTA TRANS038
   B(L)=(-(W22-W32)*ET1+(W12-W32)*ET2-(W12-W22)*ET3)/DELTA TRANS039
   C(L)=(W22*W3-W32*W2)*ET1-(W12*W3-W32*W1)*ET2+(W12*W2-W22*W1)*ET3 TRANS040
1  )/DELTA TRANS041
   IF(KONTRL)3,5,3 TRANS042
3  BH=W(I)*H/2.99E+8 TRANS043
   WRITE(6,601) L,BH,W(I),FW(I),A(L),B(L),C(L) TRANS044
601 FORMAT(15,F10.6,1P2E15.3,E11.3,3E15.3) TRANS045
600 FORMAT(1H1,8X2HBH,14X1HW,13X2HRE,9X2HIM,14X1HA,14X1HB,14X1HC ///) TRANS046
5  CONTINUE TRANS047
   DD40 ITC=1,IT TRANS048

```

|                                                                       |          |
|-----------------------------------------------------------------------|----------|
| X=0.0                                                                 | TRANS049 |
| T=TT(ITC)                                                             | TRANS050 |
| DO 7 I=1,11,2                                                         | TRANS051 |
| L=I/2+1                                                               | TRANS052 |
| IF((W(I)*T).LT.1.0) GOTO 41                                           | TRANS053 |
| IF(W(I+2)*T.GE.3.3E7) GOTO 40                                         | TRANS054 |
| C1=3(L)/T**2                                                          | TRANS055 |
| C2=2.*A(L)/T**2                                                       | TRANS056 |
| C3=C(L)/T                                                             | TRANS057 |
| C4=2.*A(L)/T**3                                                       | TRANS058 |
| C5=3(L)/T                                                             | TRANS059 |
| C6=A(L)/T                                                             | TRANS060 |
| CS2=DCOS(W(I+2)*T)                                                    |          |
| CS0=DCOS(W(I)*T)                                                      |          |
| SN2=DSIN(W(I+2)*T)                                                    |          |
| SNO=DSIN(W(I)*T)                                                      |          |
| XP=2./PI*(C1*(CS2-CS0)+C2*(W(I+2)*CS2-W(I)*CS0)+(C3-C4)*(SN2-SNO)     | TRANS065 |
| 1+CS*(W(I+2)*SN2-W(I)*SNO)+C6*(W(I+2)**2*SN2-W(I)**2*SNO)             | TRANS066 |
| GOTO 7                                                                | TRANS067 |
| 41 W1=W(I)                                                            | TRANS068 |
| W2=W(I+2)                                                             | TRANS069 |
| AA=A(L)                                                               | TRANS070 |
| BB=3(L)                                                               | TRANS071 |
| CC=C(L)                                                               | TRANS072 |
| Q1=W1*(AA*W1**2/3. + BB*W1/2. + CC)                                   | TRANS073 |
| Q2=W2*(AA*W2**2/3. + BB*W2/2. + CC)                                   | TRANS074 |
| SUM=0.                                                                | TRANS075 |
| IF(W1*T.LT.0.1) GO TO 73                                              | TRANS076 |
| DO 71 K=1,3                                                           | TRANS077 |
| XX=K                                                                  | TRANS078 |
| S=(-1.)**K*(W1*T)**(2*K)*W1*(AA*W1**2/(3.+2.*XX)+BB*W1/(2.+2.*XX)     | TRANS079 |
| X +CC/(1.+2.*XX))/G(K)                                                | TRANS080 |
| 71 SUM=SUM+S                                                          | TRANS081 |
| 73 TERM1=SUM+Q1                                                       | TRANS082 |
| SUM=0.                                                                | TRANS083 |
| IF(W2*T.LT.0.1) GO TO 83                                              | TRANS084 |
| DO 81 K=1,3                                                           | TRANS085 |
| XX=K                                                                  | TRANS086 |
| S=(-1.)**K*(W2*T)**(2*K)*W2*(AA*W2**2/(3.+2.*XX)+BB*W2/(2.+2.*XX)     | TRANS087 |
| X +CC/(1.+2.*XX))/G(K)                                                | TRANS088 |
| 81 SUM=SUM+S                                                          | TRANS089 |
| 83 TERM2=SUM+Q2                                                       | TRANS090 |
| XP=2./PI*(TERM2-TERM1)                                                | TRANS091 |
| 7 X=X+XP                                                              | TRANS092 |
| 40 FT(ITC)=X                                                          | TRANS093 |
| RETURN                                                                | TRANS094 |
| 1 WRITE(5,610) IW,IT                                                  | TRANS095 |
| 610 FORMAT(34H DIMENSIONS OF TRANS ARE EXCEEDED.////4H IW=,16,4H IT=, | TRANS096 |
| 1 16////14H CALLING DUMP./ )                                          | TRANS097 |
| STOP                                                                  | TRANS099 |
| END                                                                   | TRANS100 |

## 7. INPUT DATA FORMAT

A summary of the order and format by which data are read into NLINE is given in FORTRAN statements below.

```

      READ(5,5000)A,A1,A2
      READ(5,5001)PERCEN
      READ(5,505)(COMNT(MN),MN=1,8)
      READ(5,500)MSETS,NWIRES
      READ(5,501)(CMAXWL(J),J=1,NCAPS)
      READ(5,503)(ELI(J),J=1,NP)
      READ(5,504)IQ

      DO88 JJ88=1,MSETS

      READ(5,501)(ZI(J),J=1,N2)
      READ(5,501)(ZO(J),J=1,N2)
      READ(5,502)PSI,TL

      88 CONTINUE
5000 FORMAT(3E10.0)
5001 FORMAT(F5.0)
505  FORMAT(8A10)
500  FORMAT(2I5)
501  FORMAT(8E10.0)
504  FORMAT(I5)
502  FORMAT(2F10.0)

```

where,  $NCAPS = NWIRES * (NWIRES + 1) / 2$ ,  $NP = NWIRES - 1$ , and  $N2 = NP * NP$ .

A listing of a sample data set consisting of 10 data cards follows. The FORTRAN card columns are indicated.

| Data Card Columns:      |      |      |      |      |    |          |           |          |  |
|-------------------------|------|------|------|------|----|----------|-----------|----------|--|
| 1                       | 5    | 10   | 20   | 30   | 40 | 50       | 60        |          |  |
|                         |      |      |      |      |    |          |           |          |  |
|                         |      |      |      |      |    |          |           |          |  |
|                         |      | 1.+2 | 3.+6 | 5.+8 |    |          |           |          |  |
|                         | 7    |      |      |      |    |          |           |          |  |
| **NLINE STANDARD DECK** |      |      |      |      |    |          |           |          |  |
| 1                       | 3    |      |      |      |    |          |           |          |  |
| 1.                      | +0   | 1.   | +0   | 1.   | +0 | 3.279-11 | -1.704-11 | 3.279-11 |  |
| 3.                      | 74-7 | 1.   | 58-7 |      |    |          |           |          |  |
| 1                       |      |      |      |      |    |          |           |          |  |
| 1.                      | +2   | 1.   | +2   | 1.   | +2 | 1.       | +2        |          |  |
| 1.                      | +2   | 1.   | +2   | 1.   | +2 | 1.       | +2        |          |  |
| 90                      |      | 30   |      |      |    |          |           |          |  |

## 8. OUTPUT FORMAT

NLINE output in the Standard Deck is in line-printer form. The user may add optional plotting instructions at the locations indicated in the deck. Frequency-domain results are printed out when the subroutine HEAD is called. Time-domain results are printed out when the subroutine HTTM is called. The control parameter J in the listing is used to limit lines printed if other forms of output, such as tapes or plots, are used. Informative comments are included in the listings of the two subroutines.

Figures 3 through 7 show samples of a typical NLINE printout. This printout is generated when the NSD is run with the sample data listed in section 7.

Figure 3 shows the first page of the output, where several arrays of interest are printed in linear form (i.e., the ZI array shows values of  $Z_{11}^L$ ,  $Z_{12}^L$ ,  $Z_{21}^L$ ,  $Z_{22}^L$ ). ZI and ZO are the terminating impedance arrays defined in section 4. LE is the magnetic-field coupling parameter vector. YI and YO are defined by equations (19) and (20). CC is the Maxwell capacitance coefficient array. C is the Maxwell capacitance array after the  $i^{\text{th}}$  row and  $i^{\text{th}}$  columns have been deleted from CC, the  $i^{\text{th}}$  conductor being the reference conductor.  $C^-$  is the

matrix inverse of C. Y and Z are defined in equations (15). PO and PI are defined in equations (17) and (18), respectively.

Figure 4 shows the second page of the output for this run. The radian frequency, amplitude, and phase of the voltage induced on each conductor (see listing for subroutine HEAD for printout instructions of the current, if desired). For example, the first frequency is  $1.1 \times 10^4$  rad/s and the voltage magnitude on conductor 1 is  $4.94 \times 10^{-9}$  V, the phase is given directly below, marked by "ARG", and has the value of 270 deg. Similarly, in column "2", the voltage and phase induced on conductor 2 is given as  $2.09 \times 10^{-9}$  at 270 deg, respectively.

Figures 5 and 6 show printouts of the time-domain voltages and currents induced on conductors 1 and 2, respectively. The heading indicates that the computations were made at  $x = 0$ , on a transmission line of length  $l = 30$  m, with angle of incidence  $\psi = 90$  deg. Cable propagation velocity and transit time over one cable length are also printed.

Figure 7 shows printouts of the incident electric field used for the computations. The exact time-domain value of the field is obtained from subroutine TEMPLT, and is printed in column "EXACT." The column "TRANSFORM" gives the results from the NLINE numerical transform of the frequency-domain electric field obtained from subroutine HZFREE. The close agreement for most of the values indicates the relative accuracy of the numerical transformation.

```

**NLINE STANDARD DECK**

Z1
.100E+03 .100E+03 .100E+03 .100E+03
Z0
.100E+03 .100E+03 .100E+03 .100E+03
LE
.374E-06 .158E-06
Y0
.200E-01 -.100E-01 -.100E-01 .200E-01
Y1
.200E-01 -.100E-01 -.100E-01 .200E-01
CC
.100E+01 .100E+01 .100E+01 .100E+01
C
.328E-10 -.170E-10 -.170E-10 .328E-10
C-
.415E+11 .217E+11 .217E+11 .418E+11
Y
.689E-02 -.358E-02 -.358E-02 .689E-02
Z
.199E+03 .103E+03 .103E+03 .199E+03
PD
.295E+01 .783E-01 .783E-01 .295E+01
PI
.295E+01 .783E-01 .783E-01 .295E+01

```

Figure 3. Sample NLINE output (first page).

```

I.D.= 4066001      **NLINE STANDARD DECK**
I.D.= 4066001

VOLTAGES AT X=0.00*LINE LENGTH  L= .3000E+02  PSI= 90.00

RAD/SEC CONDUCTOR 1      2      3      4      5      6      7      8      9      10
.11E+03 .494E-08 .209E-08
ARG .270E+03 .270E+03
.35E+05 .163E-07 .650E-03
ARG .269E+03 .269E+03
.61E+05 .277E-07 .117E-07
ARG .269E+03 .269E+03
.85E+05 .391E-07 .165E-07
ARG .269E+03 .269E+03
.12E+06 .539E-07 .220E-07
ARG .267E+03 .267E+03
.37E+05 .167E-06 .705E-07
ARG .261E+03 .260E+03
.62E+05 .277E-06 .117E-06
ARG .254E+03 .254E+03
.87E+05 .384E-06 .142E-06
ARG .242E+03 .247E+03
.12E+07 .513E-06 .216E-06
ARG .240E+03 .235E+03
.37E+07 .106E-05 .437E-06
ARG .187E+03 .186E+03
.62E+07 .102E-05 .415E-06
ARG .153E+03 .151E+03
.87E+07 .837E-06 .339E-06
ARG .131E+03 .130E+03
.12E+08 .641E-06 .258E-06
ARG .114E+03 .113E+03
.37E+08 .166E-06 .676E-07
ARG .533E+02 .547E+02
.62E+08 .113E-06 .454E-07
ARG .858E+02 .855E+02
.87E+08 .170E-07 .717E-08
ARG .359E+03 .359E+03
.12E+09 .554E-07 .233E-07
ARG .556E+02 .564E+02
.37E+09 .148E-07 .593E-08
ARG .406E+02 .403E+02
.62E+09 .399E-08 .165E-08
ARG .582E+02 .557E+02
.87E+09 .298E-08 .120E-08
ARG .327E+03 .328E+03

```

Figure 4. Sample NLINE frequency-domain output (second page).

```

I.D.= 4066002      **NLINE STANDARD DECK**
I.D.= 4066002

RESPONSE AT X=0.00*LINE LENGTH  L= .3000E+02  PSI= 90.00

CABLE PROPAGATION VELOCITY, V= 2.10E+08 METERS/SEC, TRANSIT TIME OVER ONE CABLE LENGTH= 1.43E-07 SEC.

TIME(SEC)      VOLTS      AMPS      AT CONDUCTOR NO. 1
1.0000E-12      -3.5920E-01      5.7100E-03
2.8551E-09      -2.9779E+00      4.7465E-02
5.7153E-09      -4.8067E+00      7.5611E-02
2.2715E-08      -5.4322E+00      9.3601E-02
5.1237E-08      -4.8008E+00      7.7089E-02
7.7855E-08      -4.8360E+00      7.7080E-02
1.0645E-07      -4.5002E+00      7.1718E-02
1.3700E-07      -4.0672E+00      6.4824E-02
1.5557E-07      -1.0859E+00      1.6880E-02
1.9414E-07      -7.6236E-01      1.1746E-02
2.2272E-07      -6.7466E-01      1.0355E-02
2.5129E-07      -4.9944E-01      7.5666E-03
2.7666E-07      -2.8673E-01      4.2220E-03
3.0843E-07      1.0957E+00      -1.7764E-02
3.3700E-07      1.1207E+00      -1.8136E-02
3.6557E-07      1.0602E+00      -1.7145E-02
3.9414E-07      1.0103E+00      -1.6330E-02
4.2272E-07      1.0590E+00      -1.7060E-02
4.5129E-07      1.5837E+00      -2.5300E-02
4.7986E-07      1.4733E+00      -2.3533E-02
5.0843E-07      1.3432E+00      -2.1387E-02
5.3700E-07      1.2097E+00      -1.9309E-02
5.6557E-07      1.2005E+00      -1.9127E-02
5.9414E-07      1.3361E+00      -2.1194E-02
6.2272E-07      1.2211E+00      -1.9370E-02
6.5129E-07      1.0834E+00      -1.7169E-02
6.7986E-07      9.6901E-01      -1.5358E-02
7.0843E-07      9.4423E-01      -1.4443E-02

```

Figure 5. Sample NLINE time-domain output (third page).

I.D.\* 4066003      \*\*NLINE STANDARD DECK\*\*      I.D.\* 4066003

RESPONSE AT X=0.00\*LINE LENGTH L\* .3000E+02 PSI= 90.00

CABLE PROPAGATION VELOCITY, V= 2.10E+08 METERS/SEC, TRANSIT TIME OVER ONE CABLE LENGTH= 1.43E-07 SEC.

| TIME(SEC)  | VOLTS       | AMPS        | AT CONDUCTOR NO. 2 |
|------------|-------------|-------------|--------------------|
| 1.0000E-12 | -1.4536E-01 | -6.7474E-04 |                    |
| 2.8581E-09 | -1.2092E+00 | -5.5950E-03 |                    |
| 5.7153E-09 | -1.9515E+00 | -9.0367E-03 |                    |
| 2.2715E-08 | -2.1238E+00 | -9.8456E-03 |                    |
| 5.1287E-08 | -1.9828E+00 | -9.2525E-03 |                    |
| 7.9858E-08 | -1.9643E+00 | -9.0794E-03 |                    |
| 1.0843E-07 | -1.8285E+00 | -8.4305E-03 |                    |
| 1.3700E-07 | -1.6520E+00 | -7.6319E-03 |                    |
| 1.6557E-07 | -4.8376E-01 | -1.1835E-03 |                    |
| 1.9414E-07 | -3.4984E-01 | -6.2685E-04 |                    |
| 2.2272E-07 | -3.1384E-01 | -4.5592E-04 |                    |
| 2.5129E-07 | -2.4025E-01 | -1.8941E-04 |                    |
| 2.7986E-07 | -1.5127E-01 | 1.5801E-04  |                    |
| 3.0843E-07 | 4.1505E-02  | 2.6562E-03  |                    |
| 3.3700E-07 | 4.2818E-01  | 2.6453E-03  |                    |
| 3.6557E-07 | 4.0584E-01  | 2.4851E-03  |                    |
| 3.9414E-07 | 3.8750E-01  | 2.3527E-03  |                    |
| 4.2272E-07 | 4.1190E-01  | 2.3516E-03  |                    |
| 4.5129E-07 | 6.3728E-01  | 3.0910E-03  |                    |
| 4.7986E-07 | 5.9318E-01  | 2.8691E-03  |                    |
| 5.0843E-07 | 5.4170E-01  | 2.5678E-03  |                    |
| 5.3700E-07 | 4.8839E-01  | 2.3287E-03  |                    |
| 5.6557E-07 | 4.8835E-01  | 2.2381E-03  |                    |
| 5.9414E-07 | 5.5285E-01  | 2.3040E-03  |                    |
| 6.2272E-07 | 5.0533E-01  | 2.1049E-03  |                    |
| 6.5129E-07 | 4.4988E-01  | 1.8349E-03  |                    |
| 6.7986E-07 | 4.0223E-01  | 1.6454E-03  |                    |
| 7.0843E-07 | 3.9414E-01  | 1.5596E-03  |                    |

Figure 6. Sample NLINE time-domain output (fourth page).

I.D.\* 4066003      \*\*NLINE STANDARD DECK\*\*      I.D.\* 4066003

INCIDENT ELECTRIC FIELD FROM EXACT EQUATION AND FROM FOURIER TRANSFORM IN VOLTS/METER

| TIME(SEC)  | EXACT      | TRANSFORM  |
|------------|------------|------------|
| 1.0000E-12 | 2.4596E-05 | 7.0230E+00 |
| 2.8581E-09 | 5.9657E+01 | 5.7101E+01 |
| 5.7153E-09 | 9.1186E+01 | 9.1883E+01 |
| 2.2715E-08 | 9.4454E+01 | 9.9364E+01 |
| 5.1287E-08 | 9.5964E+01 | 9.5763E+01 |
| 7.9858E-08 | 9.0800E+01 | 9.0578E+01 |
| 1.0843E-07 | 8.4630E+01 | 8.4395E+01 |
| 1.3700E-07 | 7.7943E+01 | 7.7702E+01 |
| 1.6557E-07 | 7.1091E+01 | 7.0848E+01 |
| 1.9414E-07 | 6.4323E+01 | 6.4078E+01 |
| 2.2272E-07 | 5.7807E+01 | 5.7561E+01 |
| 2.5129E-07 | 5.1852E+01 | 5.1405E+01 |
| 2.7986E-07 | 4.5923E+01 | 4.5473E+01 |
| 3.0843E-07 | 4.0652E+01 | 4.0405E+01 |
| 3.3700E-07 | 3.5849E+01 | 3.5602E+01 |
| 3.6557E-07 | 3.1506E+01 | 3.1259E+01 |
| 3.9414E-07 | 2.7605E+01 | 2.7360E+01 |
| 4.2272E-07 | 2.4122E+01 | 2.3877E+01 |
| 4.5129E-07 | 2.1026E+01 | 2.0783E+01 |
| 4.7986E-07 | 1.8287E+01 | 1.8045E+01 |
| 5.0843E-07 | 1.5872E+01 | 1.5631E+01 |
| 5.3700E-07 | 1.3751E+01 | 1.3511E+01 |
| 5.6557E-07 | 1.1892E+01 | 1.1655E+01 |
| 5.9414E-07 | 1.0289E+01 | 1.0033E+01 |
| 6.2272E-07 | 8.8543E+00 | 8.6198E+00 |
| 6.5129E-07 | 7.6242E+00 | 7.3912E+00 |
| 6.7986E-07 | 6.5567E+00 | 6.3255E+00 |
| 7.0843E-07 | 5.6320E+00 | 5.4026E+00 |

Figure 7. Sample NLINE incident EMP output (fifth page).

## 9. SAMPLE PROBLEM

This sample problem is compatible with the NLINE Standard Deck listing and with the sample data set included in this manual. The procedure for solving a typical transmission-line problem with NLINE is outlined in this section and computation of EMP coupling with a configuration of three parallel conduits is described. The EMP environment and the environment orientation with respect to the conductors are assumed known.

The conductor cross section for the sample problem is shown in figure 8.

For the sample problem, the EMP is defined to arrive at broadside incidence ( $\psi = 90$  deg). Thus, the magnetic and the electric fields are oriented entirely along the  $Z$  and  $X$  directions. The Poynting vector  $\vec{P}$  is oriented in the minus- $\hat{y}$  direction, as shown in figure 8. A specific orientation of the magnetic field  $H_z^e$  with respect to the conductor cross section determines a unique set of values for the magnetic-field coupling parameters  $\underline{L}^e$  (eq. (10)).

The conductor length is chosen to be 30 m and all terminations are chosen to be 100 ohms. The propagation velocity among the conductors is chosen to be 70% of the free space velocity of light. This is a typical value for propagation along many classes of transmission lines analyzed in nuclear EMP technology. The point of computation of currents and voltages is chosen at the  $x = 0$  end of the conductors. Pulse(-1) is used for this run. The thin-wire approximations are used to obtain the Maxwell's capacitance coefficients and magnetic-field coupling parameters.<sup>2</sup>

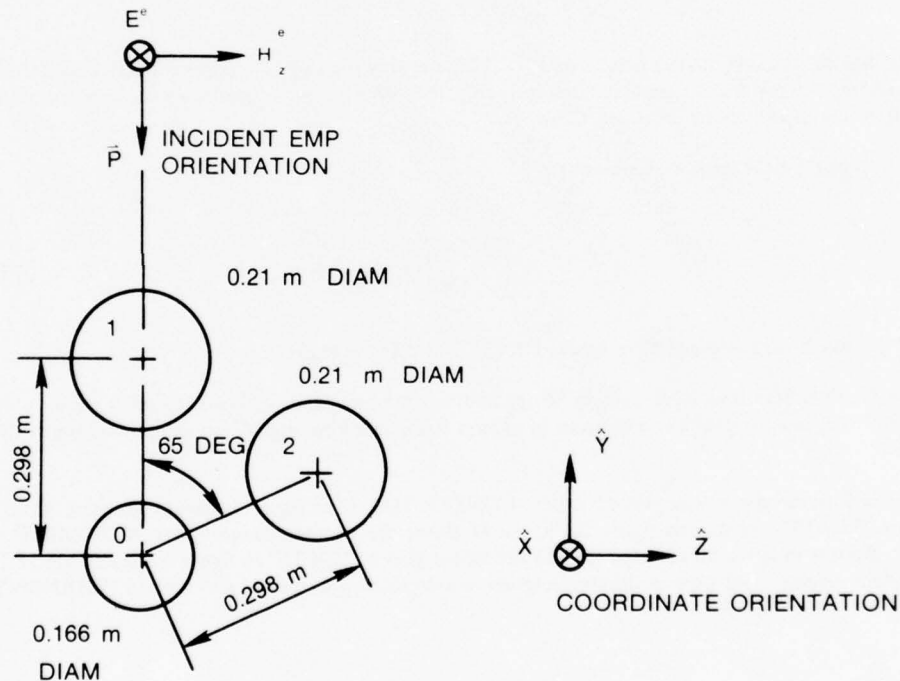


Figure 8. Sample problem conductor cross section, and orientation with respect to the incident EMP.

<sup>2</sup> Janis Klebers, *Electromagnetic Pulse Coupling with Lossless Multiconductor Transmission Lines*, Harry Diamond Laboratories TR-1711 (June 1975).

The sample problem parameters are summarized below.

- (a) Incident EMP: Pulse(-1).
- (b) Angle of incidence:  $\psi = 90$  deg.
- (c) Orientation of  $H_z^e$ : as shown in figure 8.
- (d) Conductor length:  $l = 30$  m.
- (e) Conductor propagation velocity:  $v = 2.1 \times 10^8$  m/s.
- (f) Conductor terminations (chosen identically at  $x = 0$  and  $x = l$ ):  $Z_{11} = Z_{12} = Z_{22} = 100$  ohms, connected as shown in figure 1.
- (g) Reference conductor designated as the zero-th conductor, 0.
- (h) The Maxwell's capacitance coefficient matrix:

$$\underline{C} = \begin{bmatrix} 1.* & 1.* & 1.* \\ 1.* & 32.8 & -17.0 \\ 1.* & -17.0 & 32.8 \end{bmatrix} \text{ pf/m} \quad (25)$$

\*Arbitrary capacitance values have been listed for the reference conductor, since NLINE uses only the reduced capacitance matrix for these computations:

$$\underline{C}' = \begin{bmatrix} 32.8 & -17.0 \\ -17.0 & 32.8 \end{bmatrix} \text{ pf/m} \quad (26)$$

The full capacitance matrix is read into NLINE, allowing the user to change the reference conductor. In that case, the values for *all* capacitances including the reference conductor must, of course, be included correctly in the capacitance matrix (eq. (25)).

- (i) The magnetic-field coupling parameters:

$$\underline{L}^e = \begin{bmatrix} 3.74 \\ 1.58 \end{bmatrix} \times 10^{-7} \text{ H} \quad (27)$$

$\underline{C}'$  and  $\underline{L}^e$  have been computed by program PTNTL, listed in appendix A.

The NLINE Standard Deck accepts all the above parameters and performs the computations. The NSD printout of this sample problem was given in section 8. Figures 9 through 13 show optional plotter output of the results.

Figure 9 shows the results printed under "CONDUCTOR 1" in figure 4. Results in figure 10 correspond with the "VOLTS" column in figure 5. Figure 11 shows the results printed under "CONDUCTOR 2" in figure 4. Results in figure 12 correspond with the results under "VOLTS" in figure 6. Finally, figure 13 shows the incident electric field used in the computation, corresponding to the column labeled "TRANSFORM" in figure 7.

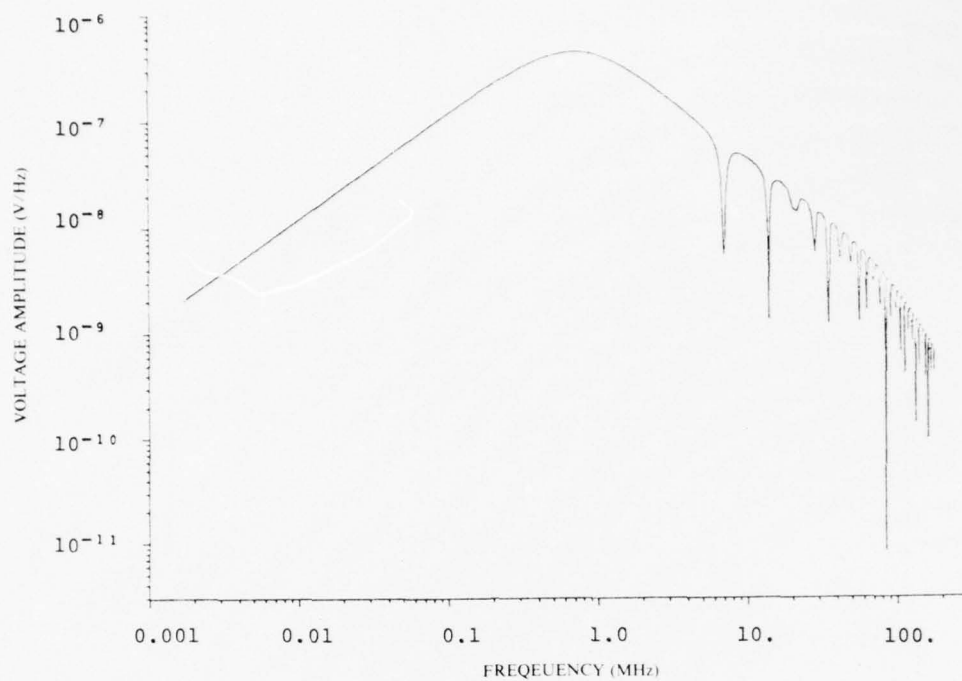


**Figure 9.** SAMPLE PROBLEM: Frequency-domain plot of voltage induced on conductor No. 1 by Pulse(-1).

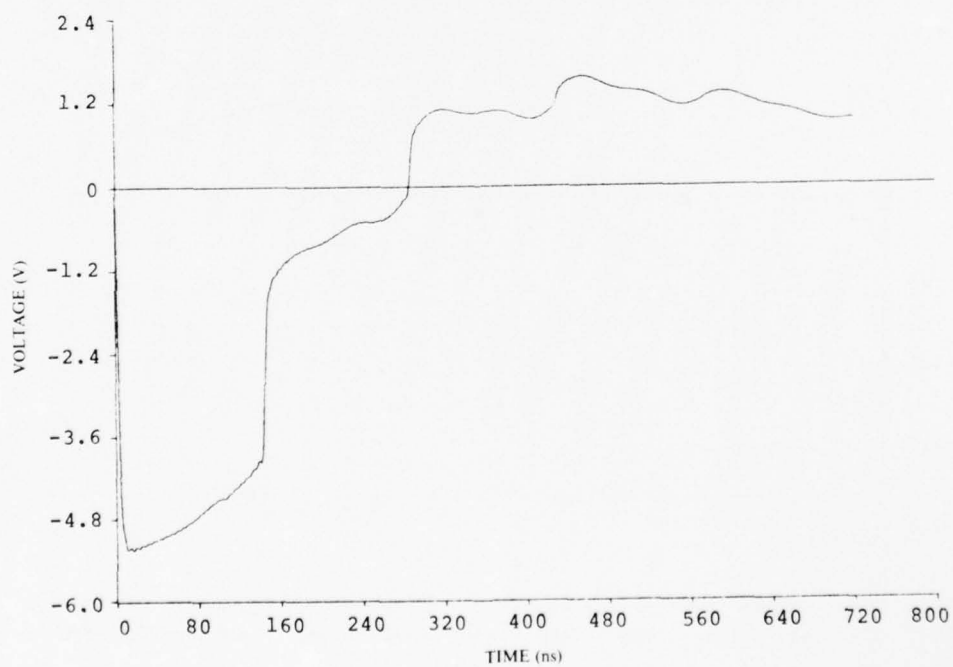


**Figure 10.** SAMPLE PROBLEM: Time-domain plot of voltage induced on conductor No. 1 by Pulse(-1).

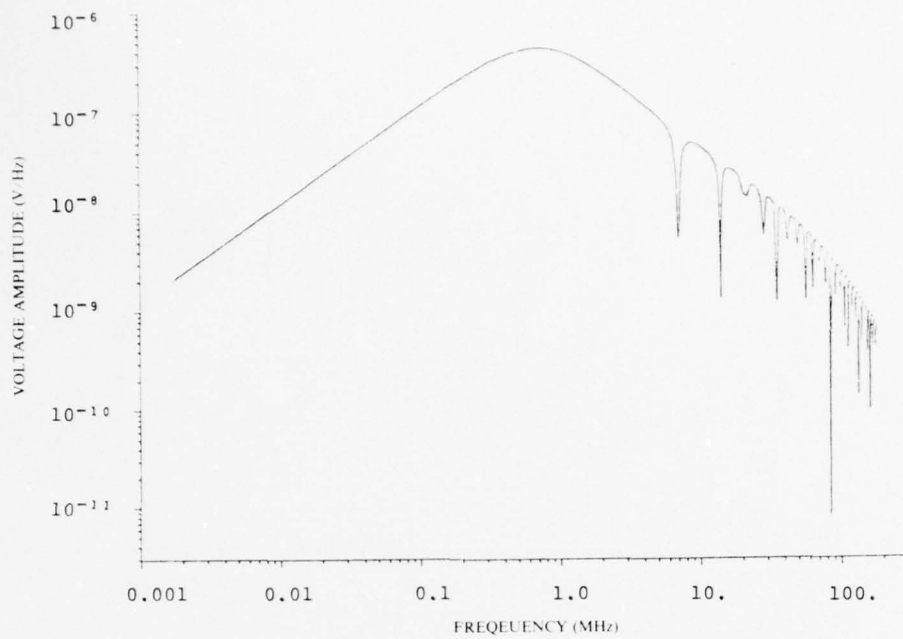


**Figure 11.** SAMPLE PROBLEM: Frequency-domain plot of voltage induced on conductor No. 2 by Pulse(-1).

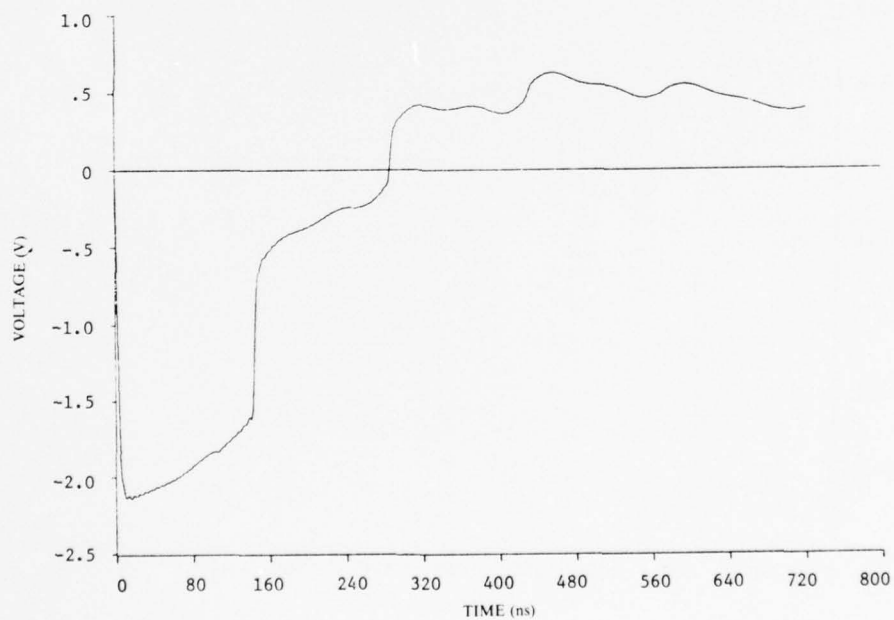


**Figure 12.** SAMPLE PROBLEM: Time-domain plot of voltage induced on conductor No. 2 by Pulse(-1).

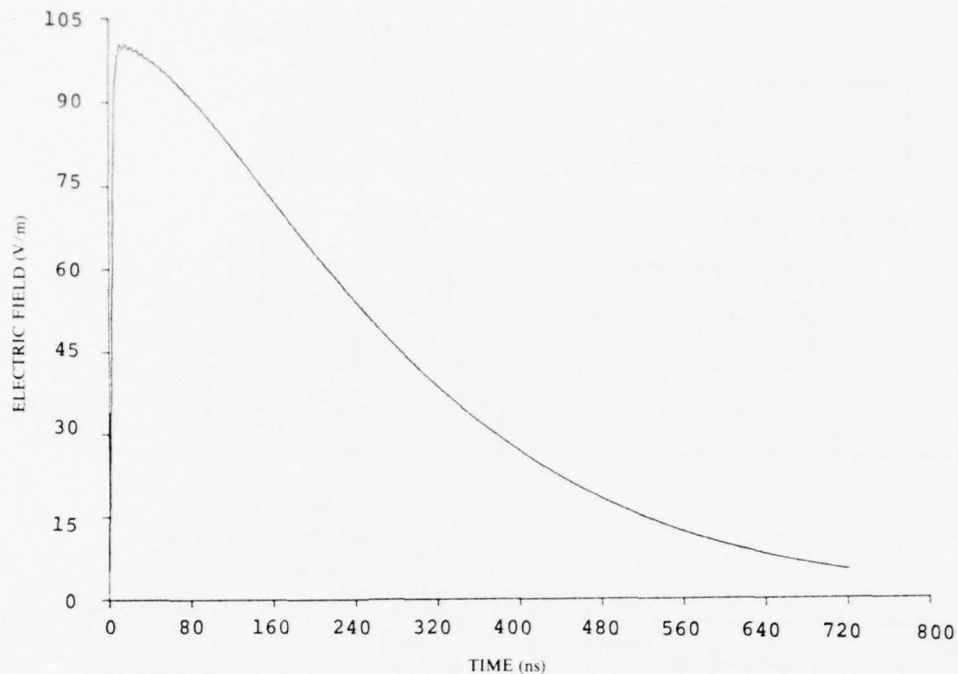


**Figure 13. INCIDENT EMP FOR SAMPLE PROBLEM:** Time-domain plot of Pulse(-1) obtained by numerical Fourier transform from the frequency-domain expression.

#### 10. NLINE APPLICATIONS: INTRODUCTION OF NONLINEAR LOADS BY LUMPED-PARAMETER NETWORK SYNTHESIS.

For many NLINE computations for cables in Army systems, it is sufficient to represent the terminations of the multiconductor transmission line by "open," "short," or "matched" resistive loads (*i.e.*, load resistance large compared to the characteristic line impedance, load resistance small compared to the characteristic line impedance, or load resistance close to the characteristic line impedance). Direct computations of current and voltage are made by NLINE for the above types of problems. Nonlinear loads, such as terminal protection devices, surge arrestors, and other electrical circuits may be added by incorporating the NLINE output with circuit analysis codes—such as DAMTRAC—used at HDL.<sup>5</sup> The NLINE code represents the solution for the transmission-line response due to a *continuously* distributed EMP excitation. The NLINE output is not directly compatible with typical circuit analysis codes in this form since the circuit analysis codes require *discrete* lumped-parameter circuits and *discrete* current or voltage sources as input parameters.

Figure 14 shows symbolically the method employed to convert the continuous source output from the transmission-line theory to the equivalent discrete voltage source and lumped-parameter network. The approach is to obtain the Thévenin voltage and circuit for the particular transmission line and for the particular EMP illumination. Once this has been done, the load can be arbitrarily specified at one end of the transmission line. In particular, complex circuits can be attached to the transmission line at this end and the response can be computed by circuit analysis codes. By this method, the other end of the transmission line must still have real loads compatible with the NLINE Standard Deck. The outline below summarizes the NLINE computations required for the network synthesis.

<sup>5</sup>G. Baker, A. McNutt, B. Shea, D. Rubenstein, *Damage Analysis Modified TRAC Computer Program (DAMTRAC)*, Harry Diamond Laboratories TM-75-6 (May 1975)

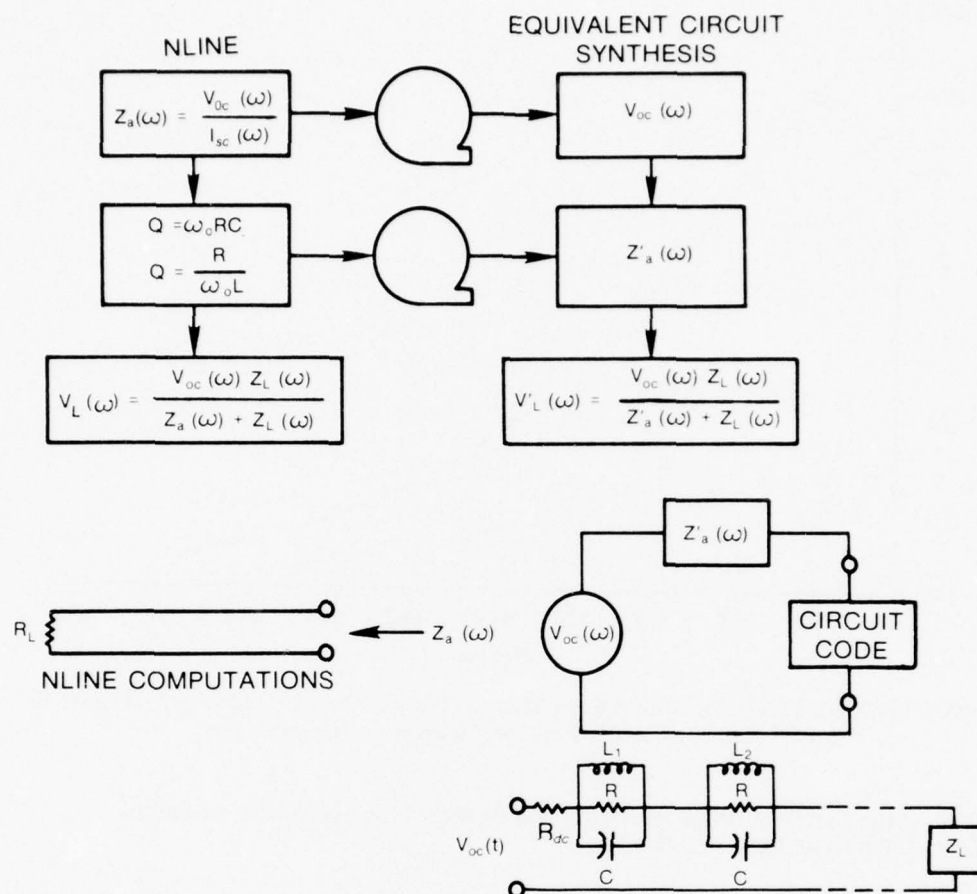


Figure 14. Lumped-parameter network synthesis by NLINE computations.

NLINE THÉVENIN EQUIVALENT CIRCUIT METHODS FOR USE WITH CIRCUIT ANALYSIS CODES AND NONLINEAR LOADS AT ONE END OF THE TRANSMISSION LINE

- Specify all NLINE input parameters for the particular problem.
- Designate *one end* of the transmission line (i.e.,  $x = 0$  or  $x = l$ ) where complex load conditions are to be analyzed.
- Specify loads at the *other end* of the transmission line which best approximate the actual terminating conditions and are compatible with the NSD (i.e., real loads having values best approximated to be large, intermediate, equal, or small compared to the transmission-line impedance).
- Leaving the above parameters fixed, use NLINE to compute the open circuit voltage and the short circuit current at the *circuit end*. To accomplish this, run NLINE once with arbitrary negative values of load impedances at the *circuit end* (NLINE treats negative terminating resistance values as open circuits). Store the open circuit voltages  $V_{oc}(\omega)$  on tape. Next, compute the short circuit current  $I_{sc}(\omega)$ , with small (e.g., 1 ohm or less) values for the terminations at the circuit end, and store on tape.

- (e) Compute the transmission-line impedance  $Z_a(\omega)$  by

$$Z_a(\omega) = \frac{V_{oc}(\omega)}{I_{sc}(\omega)} \quad (28)$$

- (f) Construct an equivalent circuit with lumped parameters for  $Z_a(\omega)$ . For broadside EMP incidence,  $\psi = 90^\circ$ ,  $|Z_a(\omega)|$  clearly exhibits the impedance characteristics of a series of parallel R-L-C circuits whose component values are determined from the Quality Factor,  $Q$ , which is obtained from  $|Z_a(\omega)|$ .  $Q$  is determined from the fundamental resonant frequency  $f_0$  of  $|Z_a(\omega)|$  and the corresponding half-power frequencies  $f_1$  and  $f_2$  from<sup>6</sup>

$$Q = \frac{f_0}{2(f_2 - f_1)}, f_2 > f_1 \quad (29)$$

Knowing  $Q$ , the values of  $R$ ,  $L$ , and  $C$  are determined from

$$Q = \omega_0 R C \quad (30)$$

$$Q = \frac{R}{\omega_0 L}$$

The equivalent lumped-parameter circuit is constructed from a series of R-L-C circuits, as shown in figure 14, where the value of  $L$  is varied, holding  $R$  and  $C$  constant. Generally, a low-frequency element must be included to account for the low-frequency characteristics of  $|Z_a(\omega)|$ . For the following example, this component is a resistance  $R_{dc}$ . The values of  $L$  are chosen so that each tank circuit resonates at the odd harmonics of  $f_0$ . Hence, the values of  $L_i$  are

$$L_i = \frac{L_0}{m_i}, m_i = 1, 3, \dots, \text{odd} \quad (31)$$

and  $i = 1, 2, \dots, N_c$ , where  $N_c$  is the number of tank circuits used in the synthesis.  $L_0$  is determined from  $Q$ ,  $R$ , and  $\omega_0$  in the second of equations (30). The larger the value of  $N_c$  used, the higher the high-frequency cutoff point beyond which the transmission line is no longer adequately represented by the lumped-parameter model.

The input impedance  $Z_a'(\omega)$  of the equivalent lumped-parameter circuit approximates very closely the transmission-line impedance  $Z_a(\omega)$  for frequencies less than the high frequency cutoff. Hence,  $Z_a'(\omega)$  can be used to replace the continuous-source transmission-line impedance by a specified series of R-L-C tank circuits programable into circuit analysis codes.

- (g) The load voltage at the *circuit end*, due to an arbitrary load,  $Z_L$ , can now be computed from

$$V_L(\omega) = \frac{V_{oc}(\omega)Z_L(\omega)}{Z_a(\omega) + Z_L(\omega)} \quad (32)$$

or from:

$$V_L'(\omega) = \frac{V_{oc}(\omega)Z_L(\omega)}{Z_a'(\omega) + Z_L(\omega)} \quad (33)$$

Equations (32) and (33) describe Thévenin equivalent circuits for the transmission line.

<sup>6</sup>R. E. Collin, *Foundations for Microwave Engineering*, McGraw-Hill Book Co., NY (1966), 314-315.

- (h) As a final step,  $V_{oc}(\omega)$  is transformed to the time domain.  $Z_L$  is programmed in the circuit analysis code along with the lumped-parameter representation of  $Z'_a$  and the time domain representation of  $V_{oc}$ . The problem is solved in the time domain by the circuit analysis code.

The NLINE Standard Deck was modified to perform the above steps. The *sample problem* data parameters were used for the computations. Figures 15 and 16 show the open circuit voltage and the short circuit current, respectively. The transmission-line impedance computed by NLINE is shown in figure 17. The corresponding result for the lumped-parameter model appears in figure 18. Twenty R-L-C circuits were used, giving a high-frequency cutoff at 70 MHz. A higher cutoff can be attained by increasing the number of circuits used in the model.

Equation (33) is used to test the accuracy of the model. Figure 19 shows the voltage on Conductor No. 1 of the sample problem computed from the lumped-parameter model. Comparison of this result with the result from figure 10 shows that the lumped-parameter model gives a relatively accurate representation of the transmission-line response. The frequency and time arrays are selected in the NSD on the basis of transmission-line length and on five transit times of the pulse as it is reflected back and forth along the transmission line. Some of the high-frequency spikes appearing in the lumped-parameter results are due to the numerical Fourier transform "noise," and can be corrected by a choice of more appropriate frequency and time points in the transform. In general, an optimum frequency and time-array selection scheme is not available for a fixed number of points (600 in the NSD) and for a wide range of transmission-line lengths. Guidance on numerical transforms is given in the DNA EMP Handbook,<sup>7</sup> and should be used to select the frequency and time arrays appropriate for a specific problem. When properly used, the lumped-parameter technique provides a useful application of the NLINE code for problems where circuit analysis codes must be used to treat EMP coupling with transmission lines terminated into complex circuits.

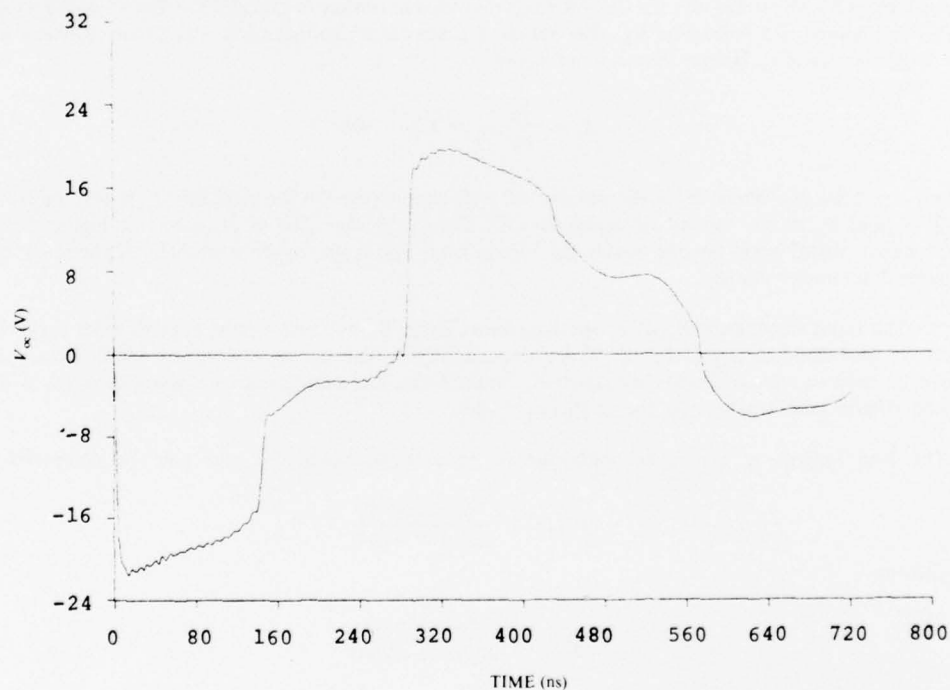


**Figure 15.** Open-circuit voltage computed by NLINE for use with the lumped-parameter network model.

<sup>7</sup>R. L. Hutchins, Defense Nuclear Agency EMP Handbook Chapter 14: EMP Data Analysis, BDM/A-135-75-TR-R1, 24 Sept 1975.

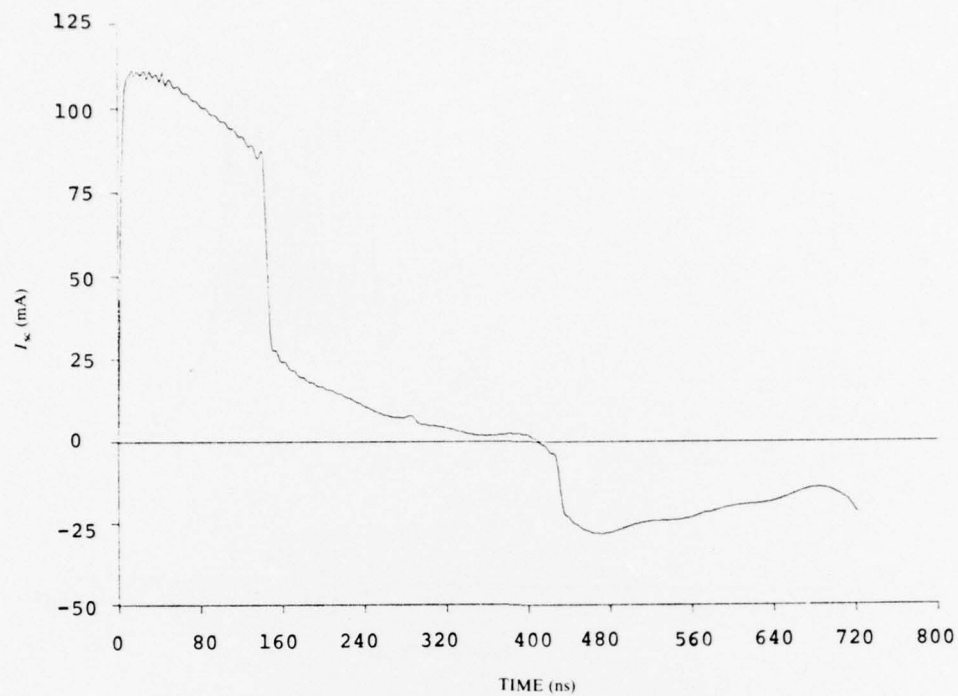


Figure 16. Short-circuit current computed by NLINE for use with the lumped-parameter network model.

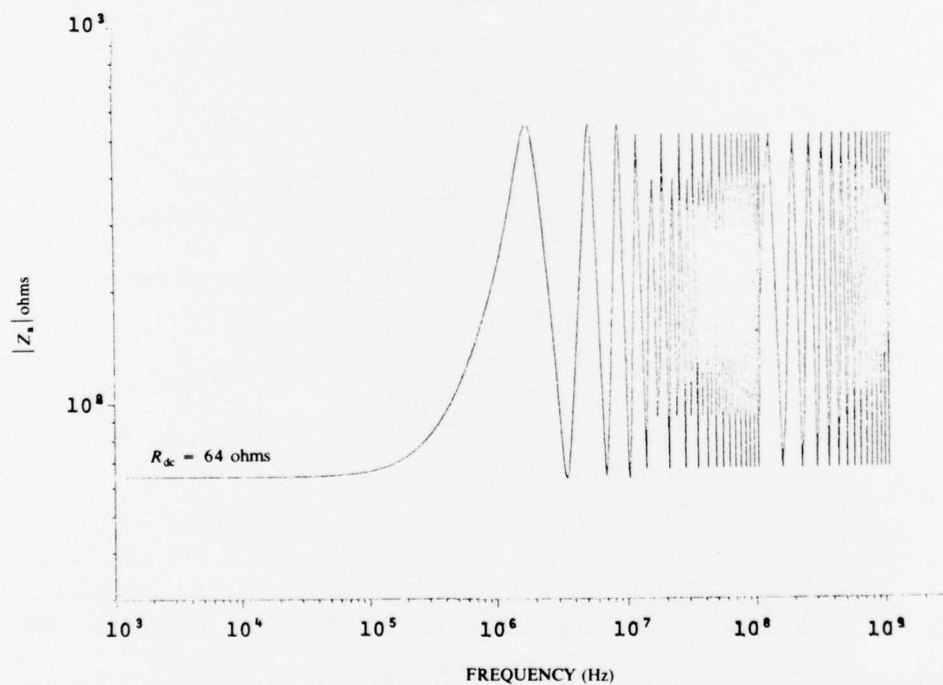


Figure 17. Transmission-line impedance computed by NLINE— $l = 30$  m,  $\psi = 90$  deg,  $Q = 1.16$ .

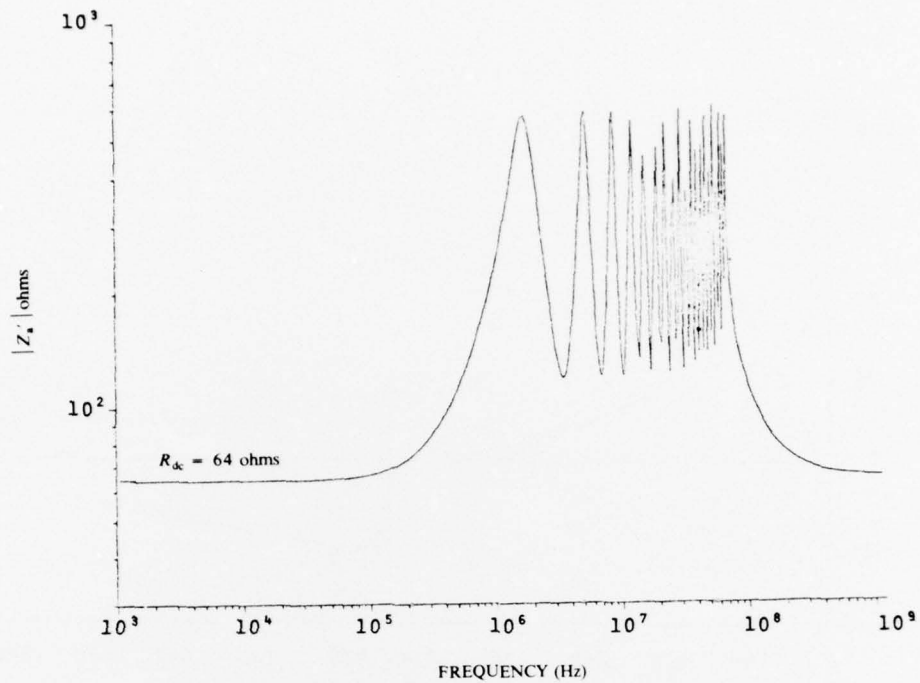


**Figure 18.** Equivalent lumped-parameter network transmission-line impedance obtained from 20 R-L-C circuits— $l = 30$  m,  $\psi = 90$  deg,  $Q = 1.19$ .

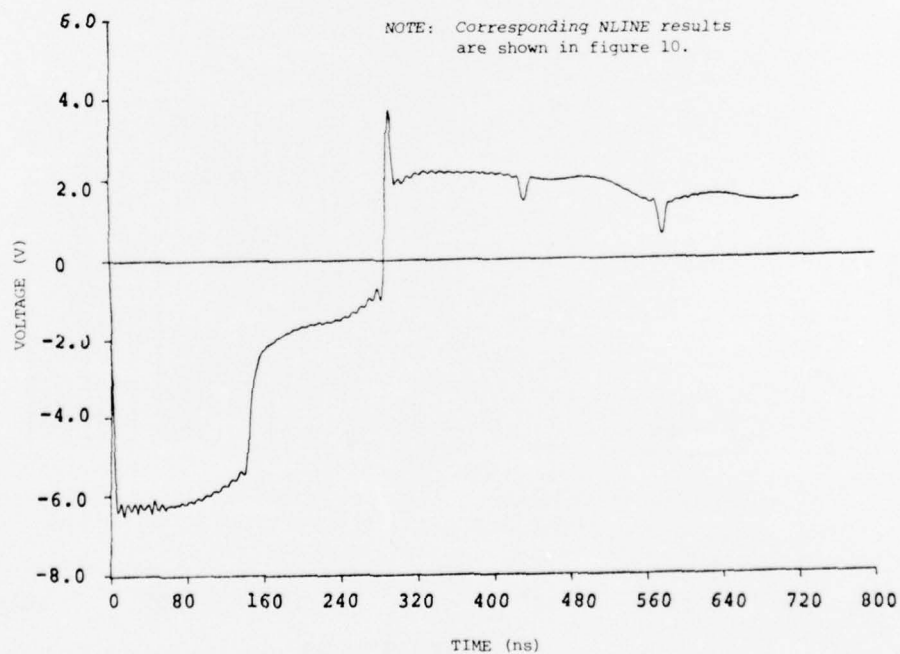


**Figure 19.** Time-domain plot of voltage induced on conductor No. 1; computed from the lumped-parameter network model.

## 11. APPLICATION OF NLINE TO REAL CABLES: COMPARISON OF NUMERICAL PREDICTIONS WITH MEASURED RESULTS.

The NLINE code is designed to predict nuclear or simulator generated EMP coupling with cables used in systems under EMP evaluation. A confidence level must be established for the NLINE computations in order for the code to be successfully applied. The AESOP radiating-dipole EMP facility at HDL was used to obtain experimental coupling data for comparison with NLINE predictions. The results of that test are discussed in this section following a summary of important aspects to be considered when applying NLINE to real cables.

The NLINE code requires several input parameters discussed in previous sections which either must be determined experimentally or computed by approximate methods for complex cables. How accurately these parameters are specified for the experimental conditions ultimately determines how well NLINE computations agree with measured results. The accuracy in measuring differential voltages or currents in the radiated EMP experimental environment also can be expected to vary with the type of cable tested and instrumentation problems (e.g., common-mode rejection capability, low signal level, etc.) encountered in the experiment. The above factors can be expected to produce differences between the computed and measured results.

Coupling measurements and NLINE computations are presented in this section for 3-m-long transmission-line samples made up of three and eleven conductors illuminated by the AESOP environment. Determination of the coupling parameters for these cables has been discussed.<sup>2</sup> The cables were oriented in the test area parallel to the AESOP antenna, and were located 0.35 m above ground at a range of 75 m on the center-line. The significant differential-mode coupling is due only to the radial component of the AESOP magnetic field in this configuration. Figure 20 shows the radial magnetic-field component, along with the Pulse(-1) approximation used in NLINE for the computations. The general waveshape and peak amplitude for Pulse(-1) adequately represent the AESOP pulse. The early time ramp and the irregular plateau characteristics have not been included in the curve fit. Some error results from these omissions. To eliminate this type of error, the user can modify COMPLEX FUNCTION HZFREE in NLINE to return the exact frequency characteristics of the measured environment.

*Unshielded transmission lines made up of two and three conductors represent an important class of interest for nuclear EMP analysis. A very large group of Army systems uses these types of transmission lines for communication and power-transmission. The NLINE code can be used with a high confidence level for these types of cables. Figure 21 shows the measured and computed results for the three-conductor test sample. The peak values agree very closely, but more ringing appears in the measurement than in the computation of the load current. This is probably due to the reactive load/instrumentation conditions existing in the experiment which are not accounted for in the lossless NLINE model.*

The increase in the number of conductors in the transmission line increases the margin of expected difference between predictive computations and measurements. The decrease in accuracy for determining the coupling parameter values and increased lossy conditions in the cable can account for this difference.

Figure 22(a) shows the eleven-conductor sample cross-section with the computed and measured coupling parameters listed by each conductor. Agreement is not always good between the experimental and numerical methods employed here. Admittedly, more accurate means are available for the user to determine the parameters. The thin-wire approximations are used here to demonstrate the degree of success attainable from the easy to use approximations. Also, for some cables, values obtained by these methods may be as good as those obtained by more exact methods in the practical case, where the coupling parameters are subject to change (due to cable stretching, twisting, bending, etc.) with every deployment of the cable.

Figure 22(b) lists the measured and computed peak currents for the eleven-conductor sample. The dB variation is computed from

<sup>2</sup> Janis Klebers, *Electromagnetic Pulse Coupling with Lossless Multiconductor Transmission Lines*, Harry Diamond Laboratories TR-1711 (June 1975).

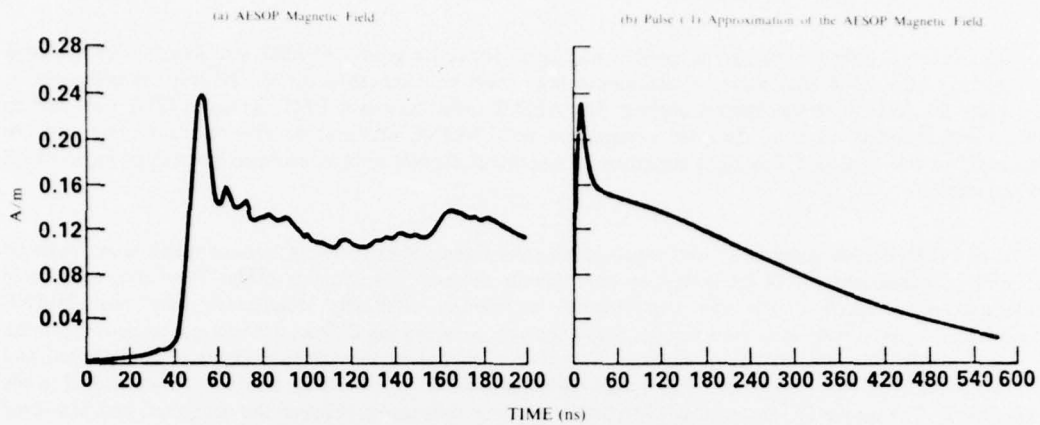


**Figure 20.** (a) Magnetic field measured in the AESOP simulator at 75 m on the center line. (b) Pulse(-1) approximation of the AESOP magnetic field used in the NLINE computations.


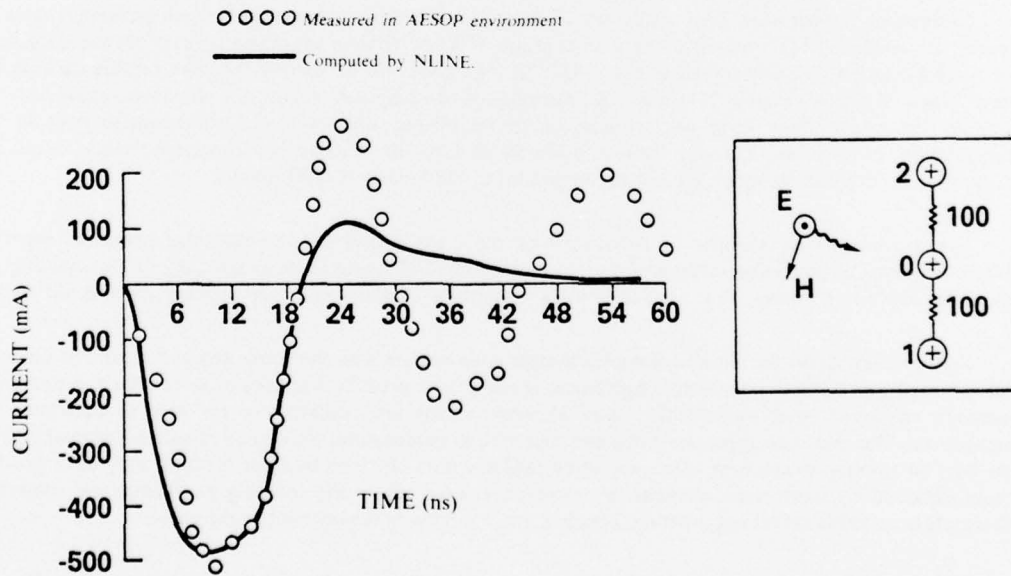


**Figure 21.** Comparison of the load current measured in the AESOP environment and the load current computed by NLINE for the three-conductor transmission line.

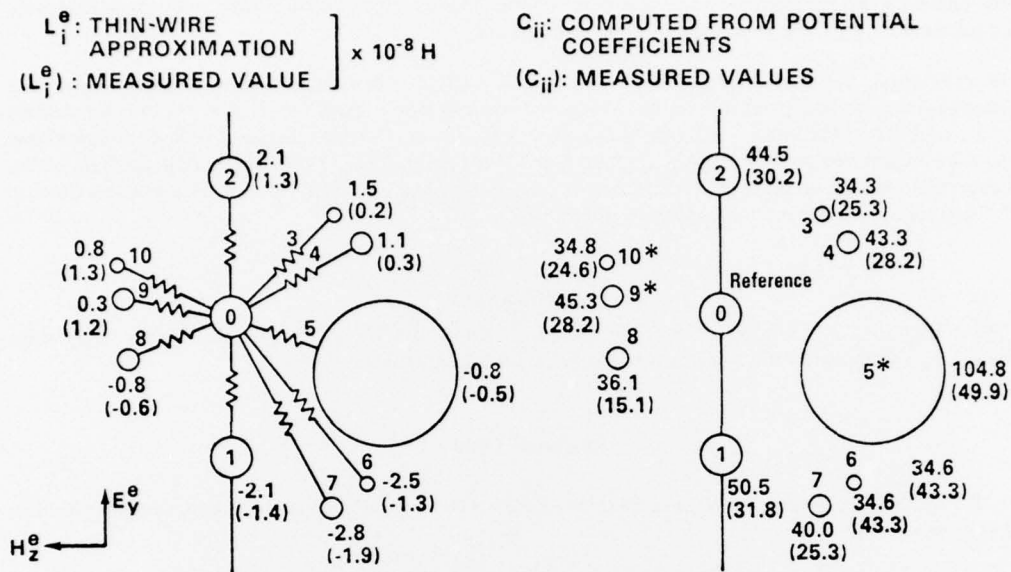

(a) Conductor geometry and cable-coupling parameters.

| Conductor No. | Measured           | Computed by |              |
|---------------|--------------------|-------------|--------------|
|               | Peak Current in mA | NLINE       | dB Variation |
| 1             | +500               | +340        | + 3.35       |
| 2             | -400               | -475        | - 1.49       |
| 3             | -240               | -205        | + 1.37       |
| 4             | -140               | -190        | - 2.65       |
| 5             | +280               | + 85*       | +10.35       |
| 6             | +280               | +230        | + 1.71       |
| 7             | +340               | +330        | + 0.26       |
| 8             | +240               | +100        | + 7.60       |
| 9             | +120               | - 45*       | *            |
| 10            | +120               | - 48*       | *            |

(b) Peak induced currents: Measured and computed for the AESOP environment.

\* Indicates large error introduced either in the measurement or computation of the coupling parameters.

Figure 22. Comparisons of measured and computed results for the eleven-conductor transmission line.

$$dB = 20 \log_{10}(\text{measured peak}/\text{computed peak}) . \quad (34)$$

It is evident from the table (fig. 22b) that the conditions for conductors 5, 9, and 10 were not adequately treated, either by the experiment, or by the computation. However, at least six conductors show relatively good agreement between the computed and measured results.

In conclusion, the application of the NLINE code to real cables requires use of good engineering judgement in order to obtain reliable results. Whenever possible, it is desirable to combine both computations and radiated EMP environment response measurements for the cable under analysis. A level of confidence can then be established for the NLINE computations. It is then possible to introduce circuit analysis codes, to change terminations or other NLINE input parameters, and use the NLINE code as a powerful tool in EMP vulnerability assessment and hardening programs.

---

#### Acknowledgements

The author thanks S. Frankel, J. N. Bombardt, R. F. Gray, and W. J. Stark for their helpful suggestions offered during the course of this work and L. Ambrose for his experimental work.

#### Literature Cited

1. S. Frankel, *Cable and Multiconductor Transmission Line Analysis*, Harry Diamond Laboratories TR-091-1 (28 June 1974).
2. J. Klebers, *Electromagnetic Pulse Coupling with Lossless Multiconductor Transmission Lines*, Harry Diamond Laboratories TR-1711 (June 1975).
3. E. Patrick, S. Soohoo, *Transportable Electromagnetic Pulse Simulator (TEMPS) Preliminary Field Mapping Report*, Harry Diamond Laboratories TM-74-15 (October 1974).
4. S. Ramo and J. R. Whinnery, *Fields and Waves in Modern Radio*, John Wiley and Sons, Inc., New York (1964).
5. G. Baker, A. McNutt, B. Shea, D. Rubenstein, *Damage Analysis Modified TRAC Computer Program (DAMTRAC)*, Harry Diamond Laboratories TM-75-6 (May 1975).
6. R. E. Collin, *Foundations for Microwave Engineering*, McGraw-Hill Book Company, New York (1966).
7. R. L. Hutchins, *Defense Nuclear Agency EMP Handbook*, BDM/A-135-75-TR-R1 (24 Sep 1975), Ch 14: EMP Data Analysis.

## APPENDIX A. PROGRAM LISTING FOR THE CAPACITANCE AND MAGNETIC-FIELD COUPLING PARAMETER CODE, PTNTL

The determination of the capacitive and the inductive coupling parameters for multiconductor transmission lines has been defined and documented by many investigators, some of which are listed.<sup>1,2,3,4,5</sup> The methods for determining the parameters vary widely with respect to the degree of accuracy and the degree of difficulty in computation. Generally, all the methods are assumed to have the same degree of accuracy when the conductor spacings are large relative to the conductor radii, and the thin-wire conditions are approached. The thin-wire approximations appear to be adequate for some applications, and are desirable because of ease in computing the parameters.

The program in this section computes the Maxwell's capacitance coefficients from the potential coefficients, and computes the magnetic-field coupling parameters from the thin-wire approximation. The number of conductors,  $N$ , and the reference conductor,  $IQ$ , are designated by the user in the main deck as indicated by the "CU" comments. An 80-character FORTRAN comment COMNT is read in by

```
500      READ(5,500)(COMNT(MN),MN=1,8)
        FORMAT(8A10)
```

The cable-conductor cross-section coordinates are read into the program by

```
501      READ(5,501)(R(NN),T(NN),NN=1,N)
        FORMAT(8F10.3)
```

where  $R(NN), T(NN)$  are the  $r, \theta$  polar coordinates of the centers of each conductor of the cable. The variable  $r$  is in meters and  $\theta$  is in degrees. The angle  $\theta$  is measured clockwise from the y-axis, as shown in figure 8, body of this report.

The conductor radii  $A(I)$  are given in meters and are specified by the user in the main deck. As an example, the coupling parameters for the Sample Problem were computed by PTNTL. The listing follows.

```

CU      PROGRAM PTNTL(INPUT,OUTPUT,TAPES=INPUT,TAPE6=OUTPUT)
C      SUBROUTINES GELG, XIDENT, AND DELETX FROM NLINE MUST BE
C      ATTACHED TO THIS DECK.
C
C      THIS PROGRAM COMPUTES THE REDUCED MAXWELL'S CAPACITANCE MATRIX, AND THE
C      MAGNETIC FIELD COUPLING PARAMETERS FOR THE MULTICONDUCTOR TRANSMISSION
C      LINE. THE CAPACITANCE MATRIX IS COMPUTED BY THE POTENTIAL COEFFICIENT
C      METHOD, AND THE MAGNETIC FIELD COUPLING PARAMETERS ARE COMPUTED FROM THE
C      THIN WIRE APPROXIMATION.
C      DIMENSION RI(100),PI(121),PP(121)
C      DIMENSION P(11,11),X(11),Y(11),R(11),T(11),B(11,11),A(11),
C      ICOMNT(8)
C      DATA C,RAD/1.8E10,.01745329/
CU      USER SETS EPR= TO EFFECTIVE VALUE OF THE RELATIVE DIELECTRIC
C      CONSTANT OF THE CABLE.
C      EPR=1.
CU      USER SETS N= TO NUMBER OF CONDUCTORS IN THE CABLE.
C      N=3
CU      USER SETS IQ= TO THE REFERENCE CONDUCTOR NUMBER.
C      IQ=1
C      KREF=IQ
CR      USER GENERATED COMMENT OF FORTRAN CHARACTERS READ IN FROM COLUMNS 1
C      THROUGH 80 ON DATA CARD.
C      READ(5,500)(COMNT(MN),MN=1,8)
500      FORMAT(8A10)
CR      COORDINATES OF THE CABLE CONDUCTOR CROSS SECTION ARE READ
C      HERE, IN POLAR FORM.
C      THETA IS MEASURED CLOCKWISE FROM THE Y-AXIS.
C      R IS IN METERS, AND THETA IS IN DEGREES.
```

<sup>1</sup>J. D. Clements and C. R. Paul, *Computation of the Capacitance Matrix for Dielectric-Coated Wires*, University of Kentucky, RADC-TR-74-89, Phase Report (March 1974).

<sup>2</sup>S. Frankel, *Cable and Multiconductor Transmission Line Analysis*, Harry Diamond Laboratories TR-091-1 (28 June 1974).

<sup>3</sup>K. Kajfez, *Multiconductor Transmission Lines*, Interaction Note 1-51, Air Force Weapons Laboratory, Kirtland AFB, (June 1972).

<sup>4</sup>R. C. Keyser, *Modeling Techniques for Multiconductor Cables. Theory and Practice*, Air Force Weapons Laboratory AFWL-TR-72-89 (March 1973).

<sup>5</sup>S. Ramo and J. R. Whinnery, *Fields and Waves in Modern Radio*, John Wiley and Sons, Inc., 2nd ed., New York (1964), 263.

```

501 READ(5,501)(R(NN),T(NN),NN=1,N)
   FORMAT(8F10.3)
   EP=1.E-15
   DA=6.163E-02
   DAA=0.
   NP=N-1
CU  USER PROVIDES VALUES FOR A(I)=RADIUS OF THE I-TH CONDUCTOR.
C   FOR ALL CONDUCTORS IN THE TRANSMISSION LINE.
   A(1)=.083
   A(2)=.105
   A(3)=.105
   DO 11 J=1,N
   X(J)=R(J)*SIN(RAD*T(J))
11  Y(J)=R(J)*COS(RAD*T(J))
   DO 12 I=1,N
   DO 12 J=1,N
   IF(I.EQ.J)GOTO13
   B(I,J)=SQRT((X(I)-X(J))**2+(Y(I)-Y(J))**2)
   GOTO12
13  B(I,J)=A(J)
12  CONTINUE
   DO 14 I=1,N
   DO 14 J=1,N
14  P(I,J)=CALOG(B(I,KREF)*E(KREF,J)/B(I,J)/B(KREF,KREF))/EPR
   WRITE(6,599)(CONNT(MN),MN=1,8)
   WRITE(6,702)
702 FORMAT(1H ,9X1HX,9X1HY/)
   DO 16 J=1,N
16  WRITE(6,600)(X(J),Y(J))
   WRITE(6,703)
703 FORMAT(1H0,22HPOTENTIAL COEFFICIENTS///)
   DO 15 I=1,N
15  WRITE(6,601)(P(I,M),M=1,N)
599 FORMAT(1H1,8A10///)
600 FORMAT(1H ,2E14.4)
601 FORMAT(1H ,1P11E12.3)
   CALL XIDENT(NP,RI)
   L=0
   DO 19 J=1,N
   DO 19 K=1,N
   L=L+1
19  PI(L)=P(J,K)
   CALL DELETX(IQ,N,PI,PP)
   CALL GELG(RI,PP,NP,NP,EP,IER)
C   RI=CAPACITANCE MATRIX
   L=0
   DO 17 J=1,NP
   DO 17 K=1,NP
   L=L+1
17  P(J,K)=RI(L)
   WRITE(6,701)IER,DAA
701 FORMAT(1H-,4HIER=,1I3,3X,1F6.2,5H*A(J)///)
   WRITE(6,700)
700 FORMAT(1H-,1RHCAPACITANCE MATRIX/)
   DO 18 I=1,NP
18  WRITE(6,601)(P(I,M),M=1,NP)
   WRITE(6,800)
800 FORMAT(1H0,78HMAGNETIC FIELD COUPLING PARAMETERS L(1),L(2),...,L(N)
1) ,WITH REFERENCE L(IQ)=0//)
   DO 801 K8=1,N
   XL=1.256637E-6*(Y(K8)-Y(IQ))
801 WRITE(6,802)XL
802 FORMAT(1P1E17.7)
   STOP
   END

```

# DISTRIBUTION

DEFENSE DOCUMENTATION CENTER  
CAMERON STATION, BUILDING 5  
ALEXANDRIA, VA 22314  
ATTN DDC-TCA (12 COPIES)

COMMANDER  
USA RSCH & STD GP (EUR)  
BOX 65  
FPO NEW YORK 09510  
ATTN LTC JAMES M. KENNEDY, JR.  
CHIEF, PHYSICS & MATH BRANCH

COMMANDER  
US ARMY MATERIEL DEVELOPMENT  
& READINESS COMMAND  
5001 EISENHOWER AVENUE  
ALEXANDRIA, VA 22333  
ATTN DRAM-TL, HQ TECH LIBRARY

COMMANDER  
USA ARMAMENT COMMAND  
ROCK ISLAND, IL 61201  
ATTN DRSAR-ASF, FUZE DIV  
ATTN DRSAR-RDF, SYS DEV DIV - FUZES

COMMANDER  
USA MISSILE & MUNITIONS CENTER  
& SCHOOL  
REDSTONE ARSENAL, AL 35809  
ATTN ATSK-CTD-F

COMMANDER IN CHIEF  
US EUROPEAN COMMAND, JCS  
APO NEW YORK 09128  
ATTN TECHNICAL LIBRARY

DIRECTOR  
DEFENSE ADVANCED RSCH PROJ AGENCY  
ARCHITECT BUILDING  
1400 WILSON BLVD.  
ARLINGTON, VA 22209  
ATTN AD/E&PS GEORGE H. HALMEIER  
ATTN TECHNICAL LIBRARY

DIRECTOR  
DEFENSE CIVIL PREPAREDNESS AGENCY  
ASSISTANT DIRECTOR FOR RESEARCH  
WASHINGTON, DC 20301  
ATTN TS (AED), ROOM 1C 535  
ATTN ADMIN OFFICER  
ATTN RE(EO)

DEFENSE COMMUNICATION ENGINEER CENTER  
1860 WIEHLE AVENUE  
RESTON, VA 22090  
ATTN CODE R720, C. STANSBERRY  
ATTN CODE R400  
ATTN CODE R124C, TECH LIB

DIRECTOR  
DEFENSE COMMUNICATIONS AGENCY  
WASHINGTON, DC 20305  
ATTN CODE 540.5  
ATTN CCTC/C672, FRANKLIN D. MOORE  
ATTN CODE 930, MONTE I. BURGETT, JR.

DIRECTOR  
DEFENSE NUCLEAR AGENCY  
WASHINGTON, DC 20305  
ATTN RATN  
ATTN DDST  
ATTN RAEV  
ATTN STTL TECH LIBRARY  
ATTN STSI ARCHIVES  
ATTN STVL

DIRECTOR OF DEFENSE RESEARCH  
& ENGINEERING  
DEPARTMENT OF DEFENSE  
WASHINGTON, DC 20301  
ATTN DD/S&SS

COMMANDER  
FIELD COMMAND  
DEFENSE NUCLEAR AGENCY  
KIRTLAND AFB, NM 87115  
ATTN FCPR  
ATTN FCSM-F3, CDR SMITH

DIRECTOR  
INTERSERVICE NUCLEAR WEAPONS SCHOOL  
KIRTLAND AFB, NM 87115  
ATTN TECH LIB  
ATTN DOCUMENT CONTROL

DIRECTOR  
JOINT STRATEGIC TARGET PLANNING  
STAFF, JCS  
OFFUTT AFB  
OMAHA, NE 68113  
ATTN STINFO LIBRARY  
ATTN JSAS  
ATTN JPST

CHIEF  
LIVERMORE DIVISION, FIELD COMMAND DNA  
LAWRENCE LIVERMORE LABORATORY  
P.O. BOX 808  
LIVERMORE, CA 94550  
ATTN FCPRL

NATIONAL COMMUNICATIONS SYSTEM  
OFFICE OF THE MANAGER  
WASHINGTON, DC 20305  
ATTN NCS-TS, CHARLES D. BODSON

NATIONAL COMMUNICATIONS SYSTEM  
OFFICE OF THE MANAGER  
WASHINGTON, DC 20305  
ATTN NCS-TS, CHARLES D. BODSON

DIRECTOR  
NATIONAL SECURITY AGENCY  
FT. GEORGE G. MEADE, MD 20755  
ATTN O. O. VAN GUNTEN-R-425  
ATTN TECHNICAL LIBRARY

OJCS/J-6  
THE PENTAGON  
WASHINGTON, DC 20301  
(COMMUNICATIONS-ELECTRONICS)  
ATTN J-6, ESD-2

DIRECTOR  
BMD ADVANCED TECH CTR  
HUNTSVILLE OFFICE  
PO BOX 1500  
HUNTSVILLE, AL 35807  
ATTN TECH LIB

COMMANDER  
BMD SYSTEM COMMAND  
PO BOX 1500  
HUNTSVILLE, AL 35807  
ATTN TECHNICAL LIBRARY  
ATTN BDMSC-TEN, NOAH J. HURST

DEP CHIEF OF STAFF FOR RSCH DEV & ACQ  
DEPARTMENT OF THE ARMY  
WASHINGTON, DC 20310  
ATTN DAMA-CSM-N, LTC G. OGDEN

COMMANDER  
FICATIMMY ARSENAL  
DOVER, NJ 07801  
ATTN SARPA-ND-D-B, EDWARD J. ARBER  
ATTN PAUL HARRIS  
ATTN SARPA-ND-D-C-2  
ATTN SARPA-ND-W  
ATTN SARPA-ND-DA-4  
ATTN SARPA-TN, BURTON V. FRANKS  
ATTN TECHNICAL LIBRARY  
ATTN HYMAN POSTERNAK

COMMANDER  
TRASANA  
WHITE SANDS MISSILE RANGE, NM 88002  
ATTN ATAA-EAC, FRANCIS N. WINANS

COMMANDER  
US ARMY ARMOR CENTER  
FORT KNOX, KY 40121  
ATTN TECHNICAL LIBRARY

CHIEF  
US ARMY COMMUNICATIONS SYSTEMS AGENCY  
FORT MONMOUTH, NJ 07703  
ATTN SCCM-AD-SV (LIBRARY)

COMMANDER  
US ARMY COMPUTER SYSTEMS COMMAND  
FORT BELVOIR, VA 22060  
ATTN TECHNICAL LIBRARY

COMMANDER  
US ARMY ELECTRONICS COMMAND  
FORT MONMOUTH, NJ 07703  
ATTN DRSEL-CT-HDK, ABRAHAM E. COHEN  
ATTN DRSEL-CE, T. PREIFFER  
ATTN DRSEL-TL-MD, GERHART K. GAULE  
ATTN DRSEL-GG-TD, W. R. WERK  
ATTN DRSEL-TL-ENV, HANS A. BOMKE  
ATTN DRSEL-TL-ME, M. W. POMERANTZ  
ATTN DRSEL-TL-IR, ROBERT A. FREIBERG  
ATTN DRSEL-WL-D  
ATTN DRSEL-NL-D

COMMANDER-IN-CHIEF  
US ARMY EUROPE AND SEVENTH ARMY  
APO NEW YORK 09403  
(HEIDELBERG)  
ATTN TECHNICAL LIBRARY

DIRECTOR  
US ARMY MATERIAL SYS ANALYSIS AGCY  
ABERDEEN PROVING GROUND, MD 21005  
ATTN TECHNICAL LIBRARY  
ATTN DRXSY-CC, MR. DONALD R. BARTHEL

COMMANDER  
US ARMY MISSILE COMMAND  
REDSTONE ARSENAL, AL 35809  
ATTN DRSMI-RGP, HUGH GREEN  
ATTN DRCPM-LCEX, HOWARD H. HENRIKSEN  
ATTN DRCPM-PE-EA, WALLACE O. WAGNER  
ATTN DRSI-RGP, VICTOR W. RUWE

COMMANDER  
US ARMY MOBILITY EQUIPMENT R & D CENTER  
FORT BELVOIR, VA 22060  
ATTN STSFB-MW, JOHN W. BOND, JR.  
ATTN TECHNICAL LIBRARY

COMMANDER  
US ARMY NUCLEAR AGENCY  
FORT BLISS, TX 79916  
ATTN ATCN-W, LTC LEONARD A. SLUGA  
ATTN TECH LIB  
ATTN COL. DEVERILL

DISTRIBUTION (Cont'd)

COMMANDER  
US ARMY SECURITY AGENCY  
ARLINGTON HALL STATION  
4000 ARLINGTON BLVD  
ARLINGTON, VA 22212  
ATTN TECHNICAL LIBRARY

COMMANDER  
US ARMY TEST AND EVALUATION COMMAND  
ABERDEEN PROVING GROUND, MD 21005  
ATTN DRSTE-EL, RICHARD I. KOLCHIN  
ATTN DRSTE-NB, R. R. GALASSO  
ATTN TECHNICAL LIBRARY

COMMANDER  
US ARMY TRAINING AND DOCTRINE COMMAND  
FORT MONROE, VA 23651  
ATTN TECH LIBRARY

COMMANDER  
WHITE SANDS MISSILE RANGE  
WHITE SANDS MISSILE RANGE, NM 88002  
ATTN TECHNICAL LIBRARY  
ATTN STEWS-TE-NT,  
MR. MARVIN P. SQUIRES  
ATTN STEWS-TE-AN, A. DE LA PAZ

CHIEF OF NAVAL OPERATIONS  
NAVY DEPARTMENT  
WASHINGTON, DC 20350  
ATTN CODE 604C3, ROBERT PIACESI

CHIEF OF NAVAL RESEARCH  
DEPARTMENT OF THE NAVY  
ARLINGTON, VA 22217  
ATTN TECHNICAL LIBRARY  
ATTN CODE 464, R. GRACEN JOINER  
ATTN CODE 427  
ATTN CODE 464, THOMAS P. QUINN

COMMANDER  
NAVAL AIR SYSTEMS COMMAND  
HEADQUARTERS  
WASHINGTON, DC 21360  
ATTN TECH LIB  
ATTN AIR-350F, LCDR HUGO HART

COMMANDER  
NAVAL ELECTRONIC SYSTEMS COMMAND  
HEADQUARTERS  
WASHINGTON, DC 20360  
ATTN TECH LIB  
ATTN PME-117-T  
ATTN PME 117-21  
ATTN PM117-215A, GUNTER BRUNHART

COMMANDER  
NAVAL ELECTRONICS LABORATORY CENTER  
SAN DIEGO, CA 92152  
ATTN CODE 2400, S. W. LICHTMAN  
ATTN CODE 2200 1,  
VERNE E. HILDEBRAND  
ATTN CODE 3100, E. E. MCCOWN  
ATTN TECHNICAL LIBRARY

COMMANDING OFFICER  
NAVAL INTELLIGENCE SUPPORT CENTER  
4301 SUITLAND ROAD, BLDG 5  
WASHINGTON, DC 20390  
ATTN TECHNICAL LIBRARY

SUPERINTENDENT  
NAVAL POSTGRADUATE SCHOOL  
MONTEREY, CA 93940  
ATTN CODE 2124, TECH RPTS LIBRARIAN

DIRECTOR  
NAVAL RESEARCH LABORATORY  
WASHINGTON, DC 20375  
ATTN CODE 6631, JAMES C. RITTER  
ATTN CODE 7706, JAY P. BORIS  
ATTN CODE 4004, EMANUEL L. BRANCATO  
ATTN CODE 2027, TECH LIB  
ATTN CODE 2627, DORIS P. POLEN  
ATTN CODE 7701, JACK D. BROWN

COMMANDER  
NAVAL SEA SYSTEMS COMMAND  
NAVY DEPARTMENT  
WASHINGTON, DC 20362  
ATTN SEA-9931, RILEY B. LANE

COMMANDER  
NAVAL SURFACE WEAPONS CENTER  
WHITE OAK, SILVER SPRING, MD 20910  
ATTN CODE 431, EDWIN B. DEAN  
ATTN CODE WX21, TECH LIB  
ATTN CODE WA501, NAVY MUC PRGMS OFF  
ATTN CODE 431, EDWIN R. RATHBURN  
ATTN CODE WA50, JOHN H. MALLOY  
ATTN CODE 223, L. LIBELLO  
ATTN CODE WR43

COMMANDER  
NAVAL SURFACE WEAPONS CENTER  
DAHLGREN LABORATORY  
DAHLGREN, VA 22448  
ATTN TECHNICAL LIBRARY  
ATTN CODE FUR, ROBERT A. AMADORI

COMMANDING OFFICER  
NAVAL WEAPONS EVALUATION FACILITY  
KIRTLAND AIR FORCE BASE  
ALBUQUERQUE, NM 87117  
ATTN LAWRENCE R. OLIVER  
ATTN CODE ATG, MR. STANLEY

COMMANDING OFFICER  
NAVAL WEAPONS SUPPORT CENTER  
CRANE, IN 47522  
ATTN TECHNICAL LIBRARY  
ATTN CODE 7024, JAMES RAMSEY

DIRECTOR  
STRATEGIC SYSTEMS PROJECT OFFICE  
NAVY DEPARTMENT  
WASHINGTON, DC 20376  
ATTN SP2701, JOHN W. PITSENBERGER  
ATTN NSP-2342, RICHARD L. COLEMAN  
ATTN NSP-43, TECH LIB  
ATTN NSP-230, DAVID GOLD

COMMANDER  
ADCOM/XPD  
ENT AFB, CO 80912  
ATTN XPDQ, MAJ G. KUCH  
ATTN XPDQ  
AF GEOPHYSICS LABORATORY, AFSC  
HANSCOM AFB, MA 01731  
ATTN J. EMERY CORMIER

AF WEAPONS LABORATORY, AFSC  
KIRTLAND AFB, NM 87117  
ATTN EL, MR. JOHN DARRAH  
ATTN DYX, DONALD C. WUNSCH  
ATTN SAT  
ATTN ELA  
ATTN ELC  
ATTN ELP, CARL E. BAUM  
ATTN EL

AF WEAPONS LABORATORY, AFSC (Cont'd)  
ATTN SAS  
ATTN SUL  
ATTN ELA, J. P. CASTILLO  
ATTN EL (LIBRARY)

AFTAC  
PATRICK AFB, FL 32925  
ATTN TECH LIB

HEADQUARTERS  
AIR FORCE SYSTEMS COMMAND  
ANDREWS AFB  
WASHINGTON, DC 20331  
ATTN TECHNICAL LIBRARY

COMMANDER  
AIR UNIVERSITY  
MAXWELL AFB, AL 36112  
ATTN AUL/LSE-70-250

COMMANDER  
ASD  
WPAB, OH 45433  
ATTN ENTV  
ATTN ASD-YH-EX

HEADQUARTERS  
ELECTRONIC SYSTEMS DIVISION, (AFSC)  
HANSCOM AFB, MA 01731  
ATTN YWEI  
ATTN TECHNICAL LIBRARY  
ATTN XRT, LTC JOHN M. JASINSKI  
ATTN YSEV

COMMANDER  
FOREIGN TECHNOLOGY DIVISION, AFSC  
WRIGHT-PATTERSON AFB, OH 45433  
ATTN TD-BTA, LIBRARY  
ATTN ETET, CAPT RICHARD C. HUSEMANN

HQ USAF/RD  
WASHINGTON, DC 20330  
ATTN RDQPN

COMMANDER  
OGDEN AIR LOGISTICS CENTER  
HILL AFB, UT 84401  
ATTN TECH LIB  
ATTN MMEWM, ROBERT JOFFS

COMMANDER  
ROME AIR DEVELOPMENT CENTER, AFSC  
GRIFFISS AFB, NY 13440  
ATTN EMTLD, DOC LIBRARY

SAMSO/DY  
POST OFFICE BOX 92960  
WORLDWAY POSTAL CENTER  
LOS ANGELES, CA 90009  
(TECHNOLOGY)  
ATTN DYS, MAJ LARRY A. DARDA

SAMSO/MN  
NORTON AFB, CA 92409  
(MINUTEMAN)  
ATTN MNNH, CAPT B. STEWART  
ATTN MNNH, MAJ M. BARAN

SAMSO/SK  
POST OFFICE BOX 92960  
WORLDWAY POSTAL CENTER  
LOS ANGELES, CA 90009  
(SPACE COMM SYSTEMS)  
ATTN SKF, PETER H. STADLER

DISTRIBUTION (Cont'd)

COMMANDER IN CHIEF  
STRATEGIC AIR COMMAND  
OFFUTT AFB, NE 68113  
ATTN NRI-STINFO LIBRARY  
ATTN DEF, FRANK N. BOUSHA  
ATTN XFFS, MAJ BRIAN STEPHAN

DIVISION OF MILITARY APPLICATION  
US ENERGY RSCH & DEV ADMIN  
WASHINGTON, DC 20545  
ATTN DOC CON FOR CLASS TECH LIB

EG&G, INC.  
LOS ALAMOS DIVISION  
PO BOX 809  
LOS ALAMOS, NM 85544  
ATTN TECH LIB

LOS ALAMOS SCIENTIFIC LABORATORY  
P.O. BOX 1663  
LOS ALAMOS, NM 87544  
ATTN DOC CONTROL FOR  
REPORTS LIBRARY  
ATTN DOC CON FOR ARTHUR FREED  
ATTN DOC CON FOR RICHARD L. WAKEFIELD

SANDIA LABORATORIES  
PO BOX 5800  
ALBUQUERQUE, NM 87115  
ATTN DOC CON FOR ORD 9353,  
R. L. PARKER  
ATTN DIV 5231, JAMES H. RENKEN  
ATTN DOC CON FOR GERALD W. BARR, 1114  
ATTN DOC CON FOR 3141 SANDIA RFT COLL  
ATTN DOC CON FOR ELMER P. HARTMAN

UNION CARBIDE CORPORATION  
HOLIFIELD NATIONAL LABORATORY  
P.O. BOX X  
OAK RIDGE, TN 37830  
ATTN PAUL R. BARNES  
ATTN DOC CON FOR TECH LIBRARY

UNIVERSITY OF CALIFORNIA  
LAWRENCE LIVERMORE LABORATORY  
PO BOX 808  
LIVERMORE, CA 94550  
ATTN HANS KRUGER, L-96  
ATTN WILLIAM J. HOGAN, L-531  
ATTN TERRY R. DONICH, L-96  
ATTN LELAND C. LOQUIST, L-154  
ATTN FREDERICK R. KOVAR, L-31  
ATTN E. K. MILLER, L-156  
ATTN DONALD J. MEEKER, L-545  
ATTN L-153, ROBERT A. ANDERSON  
ATTN TECH INFO DEPT, L-3  
ATTN LOUIS F. WOUTERS, L-48

AERONUTRONIC FORD CORPORATION  
AEROSPACE & COMMUNICATIONS OPS  
AERONUTRONIC DIVISION  
FORD & JAMBOREE ROADS  
NEWPORT BEACH, CA 92663  
ATTN E. R. PONCELET, JR.  
ATTN KEN C. ATTINGER  
ATTN TECH INFO SECTION

AEROSPACE CORPORATION  
PO BOX 92957  
LOS ANGELES, CA 90009  
ATTN C. B. PEARLSTON  
ATTN IRVING M. GARFUNKEL  
ATTN JULIAN REINHHEIMER  
ATTN LIBRARY  
ATTN MELVIN J. BERNSTEIN

AEROSPACE CORPORATION (Cont'd)  
ATTN S. P. BOWER  
ATTN NORMAN D. STOCKWELL  
ATTN BAL KRISHAN

BATTIELLE MEMORIAL INSTITUTE  
505 KING AVENUE  
COLUMBUS, OH 43201  
ATTN TECHNICAL LIBRARY

BDM CORPORATION, THE  
1920 ALINE AVE  
VIENNA, VA 22180  
ATTN TECHNICAL LIBRARY  
ATTN T. H. NEIGHBORS

BDM CORPORATION, THE  
PO BOX 9274  
ALBUQUERQUE INTERNATIONAL  
ALBUQUERQUE, NM 87119  
ATTN TECH LIB

BOEING COMPANY, THE  
PO BOX 3707  
SEATTLE, WA 98124  
ATTN HOWARD W. WICKLEIN, MS 17-11  
ATTN D. E. ISBELL  
ATTN DAVID DYE, MS 87-75  
ATTN DAVID KEMLE  
ATTN AEROSPACE LIBRARY  
BOOZ-ALLEN AND HAMILTON, INC.  
106 APPLE STREET  
NEW SHREWSBURY, NJ 07724  
ATTN TECH LIB  
ATTN R. J. CHRISNER

BROWN ENGINEERING COMPANY, INC.  
CUMMINGS RESEARCH PARK  
HUNTSVILLE, AL 35807  
ATTN JOHN M. MCSWAIN, MS 18  
ATTN TECH LIB, MS12, P. SHELTON

BURROUGHS CORPORATION  
FEDERAL AND SPECIAL SYSTEMS GROUP  
CENTRAL AVE AND ROUTE 252  
PO BOX 517  
PAOLI, PA 19301  
ATTN ANGELO J. MAURIELLO  
ATTN TECH LIB

CALSPAN CORPORATION  
PO BOX 235  
BUFFALO, NY 14221  
ATTN TECH LIBRARY

CHARLES STARK DRAPER LABORATORY INC.  
68 ALBANY STREET  
CAMBRIDGE, MA 02139  
ATTN TECH LIB  
ATTN KENNETH FERTIG

COMPUTER SCIENCES CORPORATION  
P.O. BOX 530  
6565 ARLINGTON BLVD  
FALLS CHURCH, VA 22046  
ATTN TECH LIB

COMPUTER SCIENCES CORPORATION  
201 LA VETA DRIVE, NE  
ALBUQUERQUE, NM 87108  
ATTN RICHARD H. DICKHAUT  
ATTN ALVIN SCHIFF

CUTLER-HAMMER, INC.  
AIL DIVISION  
COMAC ROAD  
DEER PARK, NY 11729  
ATTN CENTRAL TECH FILES, ARI ANTHONY

DIKEWOOD CORPORATION, THE  
1009 BRADBURY DRIVE, SE  
UNIVERSITY RESEARCH PARK  
ALBUQUERQUE, NM 87106  
ATTN TECH LIB  
ATTN L. WAYNE DAVIS  
ATTN K. LEE

EG&G, INC.  
ALBUQUERQUE DIVISION  
PO BOX 10218  
ALBUQUERQUE, NM 87114  
ATTN TECHNICAL LIBRARY

ESL, INC.  
495 JAVA DRIVE  
SUNNYVALE, CA 94086  
ATTN TECHNICAL LIBRARY

EXP AND MATH PHYSICS CONSULTANTS  
P. O. BOX 66331  
LOS ANGELES, CA 90066  
ATTN THOMAS M. JORDAN

GARRETT CORPORATION  
PO BOX 92248  
LOS ANGELES, CA 90009  
ATTN ROBT. WEIR, DEPT. 93-9  
ATTN TECH LIB

GENERAL ELECTRIC COMPANY  
TEMPO-CENTER FOR ADVANCED STUDIES  
816 STATE STREET (PO DRAWER QQ)  
SANTA BARBARA, CA 93102  
ATTN DASAC  
ATTN ROYDEN R. RUTHERFORD

GENERAL ELECTRIC COMPANY-TEMPO  
ATTN: DASAC  
C/O DEFENSE NUCLEAR AGENCY  
WASHINGTON, DC 20305  
ATTN WILLIAM ALFONTE

GENERAL RESEARCH CORPORATION  
P.O. BOX 3587  
SANTA BARBARA, CA 93105  
ATTN TECH INFO OFFICE  
ATTN JOHN ISE, JR.

GEORGIA INSTITUTE OF TECHNOLOGY  
GEORGIA TECH RESEARCH INSTITUTE  
ATLANTA, GA 30332  
ATTN R. CURRY

GTE SYLVANIA, INC.  
ELECTRONICS SYSTEMS GRP-EASTERN DIV  
77 A STREET  
NEEDHAM, MA 02194  
ATTN CHARLES A. THORNHILL, LIBRARIAN  
ATTN LEONARD L. BLAISDELL  
ATTN JAMES A. WALDON

GTE SYLVANIA, INC.  
189 B STREET  
NEEDHAM HEIGHTS, MA 02194  
ATTN CHARLES H. RAMSBOTTOM  
ATTN A S M DEPT, S. E. PERLMAN  
ATTN DAVID F. FLOOD  
ATTN COMM SYST DIV, EMIL P. MOTCHOK  
ATTN HERBERT A. ULLMAN  
ATTN H & V GROUP, MARIO A. NUREFORA

DISTRIBUTION (Cont'd)

HARRIS CORPORATION  
HARRIS SEMICONDUCTOR DIVISION  
P.O. BOX 883  
MELBOURNE, FL 32901

ATTN C. F. DAVIS, MS 17-220  
ATTN WAYNE E. ABARE, MS 16-111  
ATTN T. CLARK, MS 4040  
ATTN TECH LIB  
ATTN CHARLES DENTON, JR., MS 1-500

HONEYWELL INCORPORATED  
AEROSPACE DIVISION  
13350 U.S. HIGHWAY 19  
ST. PETERSBURG, FL 33733  
ATTN TECHNICAL LIBRARY  
ATTN HARRISON H. NOBLE, MS 725-5A

IIT RESEARCH INSTITUTE  
10 WEST 35TH STREET  
CHICAGO, IL 60616  
ATTN TECHNICAL LIBRARY  
ATTN JACK E. BRIDGES  
ATTN IRVING N. MINDEL

INSTITUTE FOR DEFENSE ANALYSES  
400 ARMY-NAVY DRIVE  
ARLINGTON, VA 22202  
ATTN IDA, LIBRARIAN, RUTH S. SMITH

IRT CORPORATION  
PO BOX 81087  
SAN DIEGO, CA 92138  
ATTN TECHNICAL LIBRARY  
ATTN MDC  
ATTN R. L. MERTZ

JAYCOR  
1401 CAMINO DEL MAR  
DEL MAR, CA 92014  
ATTN ERIC P. WEENAS  
ATTN RALPH H. STAHL

JAYCOR  
205 S. WHITTING STREET, SUITE 500  
ALEXANDRIA, VA 22304  
ATTN ROBERT SULLIVAN  
ATTN CATHERINE TURESKO

JOHNS HOPKINS UNIVERSITY  
APPLIED PHYSICS LABORATORY  
JOHNS HOPKINS ROAD  
LAUREL, MD 20810  
ATTN TECH LIB

KAMAN SCIENCES CORPORATION  
P.O. BOX 7463  
COLORADO SPRINGS, CO 80933  
ATTN LIBRARY  
ATTN J. R. CURRY  
ATTN DONALD H. BRYCE  
ATTN ALBERT P. BRIDGES  
ATTN W. POSTER RICH  
ATTN WALTER E. WAPE

LITTON SYSTEMS, INC.  
AMECOM DIVISION  
5115 CALVERT ROAD  
COLLEGE PARK, MD 20740  
ATTN TECH LIB

LOCKHEED MISSILES AND SPACE  
COMPANY, INC.  
P.O. BOX 504  
SUNNYVALE, CA 94088

ATTN DEPT 85-85, SAMUEL I. TAIMUTY  
ATTN G. F. HEATH, D/81-14  
ATTN BENJAMIN T. KIMURA, DEPT 81-14,  
ATTN KEVIN MCCARTHY O-85-71  
ATTN EDWIN A. SMITH, DEPT 85-85  
ATTN L-365 DEPT 81-20  
ATTN DEPT 81-01, G. H. MORRIS  
ATTN L. ROSSI, DEPT 81-64  
ATTN PHILIP J. HART, DEPT 81-14  
ATTN TECHNICAL LIBRARY

M.I.T. LINCOLN LABORATORY  
P.O. BOX 73  
LEXINGTON, MA 02173  
ATTN LEONA LOUGHLIN, LIBRARIAN A-082

MARTIN MARIETTA CORPORATION  
DENVER DIVISION  
PO BOX 179  
DENVER, CO 80201

ATTN RESEARCH LIB, 6617, J. R. MCKEE  
ATTN BEN T. GRAHAM, MS PO-454

MAXWELL LABORATORIES, INC.  
9244 BALBOA AVENUE  
SAN DIEGO, CA 92123  
ATTN TECH LIB  
ATTN VICTOR FARGO

MISSION RESEARCH CORPORATION  
735 STATE STREET  
SANTA BARBARA, CA 93101  
ATTN TECH LIB  
ATTN CONRAD L. LONGMIRE  
ATTN WILLIAM C. HART  
ATTN DANIEL F. HIGGINS

MISSION RESEARCH CORPORATION  
P.O. BOX 8693, STATION C  
ALBUQUERQUE, NM 87108  
ATTN LARRY D. SCOTT  
ATTN TECH LIB  
ATTN DAVID E. MEREWETHER

MISSION RESEARCH CORPORATION-SAN DIEGO  
7650 CONVOY COURT  
SAN DIEGO, CA 92111  
ATTN V. A. J. VAN LINT

MITRE CORPORATION, THE  
P.O. BOX 208  
BEDFORD, MA 01730  
ATTN LIBRARY  
ATTN THEODORE JARVIS  
ATTN M. F. FITZGERALD

NORTHROP CORPORATION  
ELECTRONIC DIVISION  
1 RESEARCH PARK  
PALOS VERDES PENINSULA, CA 90274  
ATTN TECH LIB  
ATTN JOHN M. REYNOLDS  
ATTN VINCENT R. DEMARTINO

NORTHROP CORPORATION  
NORTHROP RESEARCH AND TECHNOLOGY CENTER  
3401 WEST BROADWAY  
HAWTHORNE, CA 92050  
ATTN DAVID N. POCOCCO  
ATTN LIBRARY

PHYSICS INTERNATIONAL COMPANY  
2700 MERCED STREET  
SAN LEANDRO, CA 94577  
ATTN DOC CON FOR TECH LIB  
ATTN DOC CON FOR JOHN H. HUNTINTON

PULSAR ASSOCIATES, INC.  
7911 HERSCHEL AVENUE  
LA JOLLA, CA 92037  
ATTN CARLETON H. JONES

R & D ASSOCIATES  
PO BOX 9695  
MARINA DEL REY, CA 90291  
ATTN TECHNICAL LIBRARY  
ATTN S. CLAY ROGERS  
ATTN WILLIAM R. GRAHAM, JR.  
ATTN LEONARD SCHLESSINGER  
ATTN CHARLES MO  
ATTN RICHARD R. SCHAEFER  
ATTN WILLIAM J. KARZAS  
ATTN GERARD K. SCHLEGEL

RCA CORPORATION  
GOVERNMENT & COMMERCIAL SYSTEMS  
ASTRO ELECTRONICS DIVISION  
PO BOX 800, LOCUST CORNER  
PRINCETON, NJ 08540  
ATTN TECH LIB  
ATTN GEORGE J. BRUCKER

ROCKWELL INTERNATIONAL CORPORATION  
3370 MIROLOMA AVENUE  
ANAHEIM, CA 92803  
ATTN M. J. RUDIE, FA53  
ATTN J. L. MONROE, DEPT 243-027,  
DIV 031  
ATTN L. APODACA, FA53  
ATTN K. F. HULL  
ATTN TECHNICAL LIBRARY  
ATTN JAMES E. BELL, HA10  
ATTN DONALD J. STEVENS, FA70

SCIENCE APPLICATIONS, INC  
PO BOX 2351  
LA JOLLA, CA 92038  
ATTN R. PARKINSON  
ATTN TECHNICAL LIBRARY  
ATTN LEWIS M. LINSON

SCIENCE APPLICATIONS, INC.  
HUNTSVILLE DIVISION  
2109 W. CLINTON AVENUE  
SUITE 700  
HUNTSVILLE, AL 35805  
ATTN NOEL R. BYRN  
ATTN TECH LIB

SCIENCE APPLICATIONS, INC.  
PO BOX 3507  
ALBUQUERQUE, NM 87110  
ATTN RICHARD L. KNIGHT  
ATTN JAMES R. HILL

SCIENCE APPLICATIONS, INCORPORATED  
8400 WESTPARK DRIVE  
MCLEAN, VA 22101  
ATTN WILLIAM L. CHADSEY

SIMULATION PHYSICS, INC.  
41 "B" STREET  
BURLINGTON, MA 01803  
ATTN JOHN R. UGLUM

DISTRIBUTION (Cont'd)

STANFORD RESEARCH INSTITUTE  
3980 EL CAMINO REAL  
PALO ALTO, CA 94306  
ATTN MR. PHILIP DOLAN  
ATTN GEORGE CARPENTER  
ATTN ARTHUR LEE WHITSON  
ATTN MEL BERNSTEIN

SYSTEMS, SCIENCE AND SOFTWARE  
P.O. BOX 4803  
HAYWARD, CA 94540  
ATTN TECH LIB

SYSTEMS, SCIENCE AND SOFTWARE, INC.  
PO BOX 1620  
LA JOLLA, CA 92038  
ATTN TECHNICAL LIBRARY

TEXAS INSTRUMENTS, INC.  
P.O. BOX 5474  
DALLAS, TX 75222  
ATTN TECH LIB  
ATTN DONALD J. MANUS, MS 72

TRW SYSTEMS GROUP  
ONE SPACE PARK  
REDONDO BEACH, CA 90278  
ATTN TECH INFO CENTER/S-1930  
ATTN ROBERT M. WEBB, R1-2410  
ATTN AARON H. NAREVSKY, R1-2144  
ATTN JERRY I. LUBELL, R1-1144

TRW SYSTEMS GROUP  
SAN BERNARDINO OPERATIONS  
PO BOX 1310  
SAN BERNARDINO, CA 92402  
ATTN F. B. FAY, 527/710

TRW SYSTEMS GROUP  
PO BOX 368  
CLEARFIELD, UT 84015  
ATTN TECH LIB

VECTOR RESEARCH ASSOCIATES  
735 STATE STREET, RM 314  
SANTA BARBARA, CA 93101  
ATTN W. A. RADASKY

HARRY DIAMOND LABORATORIES  
ATTN MCGREGOR, THOMAS, COL, COMMANDER/  
FLYER, I.N./LANDIS, P.E./  
SOMMER, H./OSWALD, R. B.  
ATTN CARTER, W.W., DR., TECHNICAL  
DIRECTOR/MARCUS, S.M.  
ATTN KIMMEL, S., PAO  
ATTN CHIEF, 0021  
ATTN CHIEF, 0022  
ATTN CHIEF, LAB 100  
ATTN CHIEF, LAB 200  
ATTN CHIEF, LAB 300  
ATTN CHIEF, LAB 400  
ATTN CHIEF, LAB 500  
ATTN CHIEF, LAB 600  
ATTN CHIEF, DIV 700  
ATTN CHIEF, DIV 800  
ATTN CHIEF, LAB 900  
ATTN CHIEF, LAB 1000  
ATTN RECORD COPY, BR 041  
ATTN HDL LIBRARY (3 COPIES)  
ATTN CHAIRMAN, EDITORIAL COMMITTEE  
ATTN CHIEF, 047  
ATTN TECH REPORTS, 013  
ATTN PATENT LAW BRANCH, 071  
ATTN GIDEF OFFICE, 741  
ATTN LANHAM, C., 0021  
ATTN ROSADO, J. A., 200  
ATTN MILETTA, J. R., 200  
ATTN WONG, R., 1000  
ATTN TOMPKINS, J. E., 230  
ATTN WYATT, W. T., 1000  
ATTN WIMENITZ, P. N., 0024  
ATTN SWETON, J. F., 1000  
ATTN BEILFUSS, J. W., 1000  
ATTN KLEBERS, J., 230 (10 COPIES)  
ATTN GRAY, R. F., 1000  
ATTN PFEFFER, R., 1010  
ATTN AGEE, J., 1000  
ATTN GORNAK, G., 1000  
ATTN LOWERY, A., LTC, 1000  
ATTN DANDO, J., 1000  
ATTN BOMBARDT, J., 1000 (30 COPIES)  
ATTN BRANCH 1030 (20 COPIES)

DEFENSE DOCUMENTATION CENTER  
ATTN: IC  
CAMERON STATION  
ALEXANDRIA, VA 22314