

UNCLASSIFIED

AD NUMBER
AD835581
NEW LIMITATION CHANGE
TO Approved for public release, distribution unlimited
FROM Distribution authorized to U.S. Gov't. agencies and their contractors; Critical Technology; 11 AUG 1959. Other requests shall be referred to Space and Missile Systems Organization, Los Angeles, CA.
AUTHORITY
SAMSO ltr, 28 Feb 1972

THIS PAGE IS UNCLASSIFIED

~~CONFIDENTIAL~~

REPORT NO. 7B 2124-1
DATE 11 August 1959
NO. OF PAGES 65

CONVAIR ASTRONAUTICS

CONVAIR DIVISION OF GENERAL DYNAMICS CORPORATION

UNCLASSIFIED

AD 835581

CONVAIR - ARMA BENCH

TEST COMPATIBILITY

PROGRAM

REPORT NO. 7B 2124-1

CONVAIR-
ASTRONAUTICS

SEP 30 1959

LIBRARY

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of: Hq. SAMSO, LA., Ca. 90045 Attn: SMSD

PREPARED BY W. S. Curry D. E. Carson
W. S. Curry D. E. Carson

APPROVED BY F. Waller
F. Waller
Test Lab Group Mgr.

CHECKED BY E. Godenschwager
E. Godenschwager

APPROVED BY K. S. Campbell
K. S. Campbell
Chief of Test Labs

CHECKED BY H. E. Shaw
H. E. Shaw

Classification Changed To:

UNCLASSIFIED

Authorized By:

D D 254 MSCG

Reclassified By:

Date 5-14-65

WS107A

Dept. Date

Richard J. Cook 130-1 5-14-65

REVISIONS

NO.	DATE	BY	CHANGE	PAGES AFFECTED
1a				

UNCLASSIFIED

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

UNCLASSIFIED ~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

PAGE 1

11 August 1959

TABLE OF CONTENTS

<u>PARAGRAPH</u>	<u>TOPIC</u>	<u>PAGE NUMBER</u>
1.0	INTRODUCTION.....	1
2.0	SECTION I - SUMMARY OF ARMA AIG AUTOPILOT COMPATIBILITY TESTS.....	1
2.1	OBJECTIVES.....	1
2.2	CONCLUSIONS.....	2
2.3	TEST SPECIMENS.....	2
2.4	TEST PROCEDURES.....	2
2.4.1.	INITIAL INSTALLATION.....	2
2.4.2	INITIAL TESTING.....	3
2.4.3	DETAILED TESTING.....	4
2.5	TEST RESULTS.....	5
2.5.1	INITIAL TEST RESULTS.....	5
2.5.2	DETAILED TEST RESULTS.....	6
2.6	REFERENCES.....	13
3.0	SECTION II - ELECTRICAL SYSTEM COMPATIBILITY TEST RESULTS	14
3.1	INTRODUCTION.....	14
3.2.0	OBJECTIVES.....	14
3.2.1	LOAD ANALYSIS.....	14
3.2.2	HARMONIC ANALYSIS.....	14
3.2.3	TRANSFER CHARACTERISTICS.....	14
3.3.0	CONCLUSIONS.....	14
3.3.1	LOAD ANALYSIS.....	14
3.3.2	HARMONIC ANALYSIS.....	14
3.3.3	TRANSFER CHARACTERISTICS.....	14
3.4	RECOMMENDATIONS.....	14
3.5	DESCRIPTION OF SPECIMENS.....	14
3.6	TEST PROCEDURE.....	16
3.6.1	GENERAL PROCEDURE.....	16
3.6.2	SPECIFIC PROCEDURE.....	18
3.7	TEST RESULTS.....	18
3.7.1	LOAD ANALYSIS.....	19
3.7.2	HARMONIC ANALYSIS.....	19
3.7.3	POWER TRANSFER.....	20
4.0	SECTION III - ILLUSTRATIONS.....	22
4.1	LIST OF ILLUSTRATIONS.....	22
4.2	FIGURES 1 THROUGH 43.....	23-65 (INCL.)

UNCLASSIFIED

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~
UNCLASSIFIED

FORM 7B 2124-1

PAGE 1

11 August 1959

1.0 INTRODUCTION:

With reference to STL Document GM437-335 Engineering Bench Compatibility Test Plan and Arma Document DAG 4562 Laboratory Compatibility Program, STL requested that engineering bench compatibility tests between Convair Autopilot and Arma Inertial Guidance System Components be conducted. Accordingly, the Servo-Mechanisms Group requested that these tests be performed in the Systems Test Laboratory, as specified in Convair Report AZM-27-073, dated 27 October 1958.

The purpose of the bench tests was to determine any system incompatibilities as early in the D/AIG program as possible. Primarily, these tests were made to determine the nature and cause of any interface problems that might exist between the available Convair and Arma equipment. Overall missile system compatibility is to be determined during the 300 Tests.

The bench tests were divided into two categories; measurements to determine that interface signal requirements were met, and measurements to determine if the system component power requirements were compatible with the airborne power supply.

→ This report is therefore divided in two sections. The first section contains Guidance-Autopilot signal compatibility information, while the second section contains the data on the compatibility of the guidance system with the airborne power supply. The first part of this report is based primarily on information supplied by Arma, and on information contained in reports issued by the Servo-Mechanisms Group as listed under reference.

2.0 SECTION I: Summary of Arma/AIG Autopilot Compatibility Tests.**2.1 OBJECTIVES:**

Determine -

- 2.1.1 Signal compatibility between Convair AIG Autopilot and Arma MGS.
- 2.1.2 Operational characteristics of the guidance system on the airborne power supply.
- 2.1.3 Operational characteristics of the guidance system during power changeover.

UNCLASSIFIED

UNCLASSIFIED

REPORT 7B 2124-1

PAGE 2

11 August 1959

2.2 CONCLUSIONS:

- 2.2.1 No serious incompatibilities were detected between the Convair Autopilot system and the Arma MGS during these tests.
- 2.2.2 The guidance system performed correctly on both ground and airborne power supplies over a wide range of power system load conditions.
- 2.2.3 The operational status of the AMG Autopilot was recovered within a fraction of a second after power changeover, while the Arma equipment was fully operational within five seconds in all tests run.

2.3 TEST SPECIMENS:

- 2.3.1 Convair D/AMG Autopilot Components
 - Gyro Package
 - Servo Amplifier Package
 - Digital Programmer Package
- 2.3.2 Convair special test equipment
 - Control Maneuvers Servo Table
 - Package Control Units
- 2.3.3 Convair Power Supply Components
 - Inet-Palmer ground power unit
 - Airborne Inverter power unit

For a more detailed description of these units, refer to the Electrical Section of this report.

- 2.3.4 Arma Lot II Missile Guidance System
 - Computer
 - Inertial Platform
 - Analog Signal Converter
 - Digital Signal Converter
 - Control Central
- 2.3.5 Arma Special Test Equipment
 - ET-1 MGS Test Racks
 - Computer Test Kit
 - Simulated Break Away Panel

2.4 TEST PROCEDURES:

2.4.1 Initial Installation

A walled in, limited access area at Columns J, K-1, Bldg. 5 was created for equipment security, 25 January 1959. The Arma Test hardware was then installed and connected. Power lines, control boxes and outlets were installed, furnishing as necessary:

UNCLASSIFIED

~~CONFIDENTIAL~~
UNCLASSIFIED

REPORT 78 2124-1

PAGE 3

11 August 1959

2.4 TEST PROCEDURES: (Continued)**2.4.1 Initial Installation (Continued)**

440 volts, 60 cps, 3 phase

117 volts, 400 cps, 3 phase

117 volts, 60 cps, 1 phase

28 volts, DC

Forced air, dry ice equipment coolers were designed and built for Arma equipment, as were a few minor pieces of special test equipment. The required test instruments were obtained and the area was checked out and operational by 9 February 1959. See Figures 1 through 5.

2.4.2 Initial Arma/AIG Gyro Canister Compatibility Tests -

2.4.2.1 On 9 February 1959 the first prototype AIG gyro canister was tested for compatibility with the Arma MGS. The object of this test was to determine if any discrepancies existed when pitch and yaw steering signals were supplied to the gyro canister.

2.4.2.2 In the first test pitch steering signals from the pitch gimbal synchro of the Arma Inertial Platform were supplied to the pitch guidance input of the torque amplifier in the gyro canister. Signals ranging from +5.0 to -5.0 volts in 1 volt increments were used as inputs. The parameters recorded on a Sanborn recorder were as follows: Input Signal, Pitch Gyro Output, Pitch Amplifier Output and Pitch Torque Current. At each voltage input level, the pitch guidance was disabled through an electronic switch in the gyro canister and the gyro was electrically nulled. The nulling loop was then opened and the pitch guidance was enabled, allowing the signal to torque the gyro. The resulting ramp outputs and torquing current were recorded at that time.

2.4.2.3 The second test was to apply yaw steering signals from the computer to the yaw guidance input of the torque amplifier in the gyro canister. The inputs ranged from +3 volts to -3 volts in 0.5 volt increments. The parameters recorded on the Sanborn recorder were as follows: Input Signal, Yaw Gyro Output, Yaw Signal Amplifier Output, and Yaw Torque Current. As in the case of the pitch channel, the yaw guidance was disabled through the electronic switch, and the gyro was electrically nulled.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~
UNCLASSIFIED

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REF ID: A782124-1

4

11 August 1959

2.4 TEST PROCEDURES: (Continued)

2.4.2.3 (Continued)

The nulling loop was then opened and the yaw guidance was enabled, allowing the signal to torque the gyro.

2.4.2.4 In phase and quadrature components of Arma pitch and yaw steering signals were measured.

2.4.2.5 Arma-Convaair guidance interface impedances were investigated.

2.4.2.6 The efficiencies of the torque amplifier guidance enable switches were evaluated by noting their attenuation of the guidance input in the disable mode.

2.4.3.0 After these initial checks, the detailed testing program was undertaken, and completed by 8 May 1959. The following areas were investigated:

2.4.3.1 Pitch and Yaw Steering

- a) Open Autopilot gyro loop
- b) Closed Autopilot gyro loop
- c) Closed Autopilot gyro loop about a flight maneuvers serve table.

2.4.3.2 The pitch and yaw steering tests were conducted to determine the compatibility of the Arma system with the autopilot gyro computer as well as to compare gyro torquing rates measured three separate ways; open and closed gyro loop, and closed loop through the maneuvers table.

Autopilot gyro peak-to-peak servo loop parameters were also investigated.

2.4.3.3 Pitch gyro drift due to pitch steering null signal was investigated.

2.4.3.4 Yaw gyro drift due to yaw steering null signal was investigated.

2.4.3.5 Effect of yaw steering signal ripple on gyro amplifier output was measured.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, U.S.C., Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

PAGE 5

11 August 1959

2.4 TEST PROCEDURES: (Continued)

- 2.4.3.6 A normal Lot B 1-G problem yaw steering signal was fed from the Arma Computer to the Autopilot while the computer cutoff signals were sent to the programmer. The tests were run on ground power and repeated using the airborne power supply. The autopilot was operated closed loop using an external nulling amplifier.
- 2.4.3.7 Simulated Lot C 1-G Test - closed loop. Lot C is a more advanced form of the Arma MGS. A simulated Lot C yaw steering profile was generated by manually setting the yaw steering signal levels in the proper time sequence with the Arma computer test kit. The tests conducted with the simulated Lot C sequence profile were the same as for the normal 1-G profile with the exception that cut-off signals were not available.
- 2.4.3.8 Sensitivity of discrete signal circuits to over and under supply voltages was measured.
- 2.4.3.9 The effect of switching on and off the simulated loads on the guidance system power supply was investigated. Arma MGS operation at the specification limits of power supply amplitude and frequency was measured.
- 2.4.3.10 Effects of power changeover, from ground to airborne, on the guidance system was measured.

2.5 TEST RESULTS:

- 2.5.1.0 Initial Arma/AIG Gyro Canister Compatibility Tests.
- 2.5.1.1 The results of the pitch steering tests may be seen in Figure 6 where input voltage is plotted versus Autopilot gyro output, amplified gyro output, and torque current. This data appeared to be consistent with what was expected.
- 2.5.1.2 Figure 7 shows the results of the yaw steering tests. The null voltage input was 60mv total with negligible phase sensitive component. The recorded gyro drift at this time was approximately 0.005 volts/second or 25 degrees/hour using the nominal gyro sensitivity of 0.7 volts/degree.
- 2.5.1.3 The in-phase and quadrature components of Arma MGS yaw and pitch output steering signals were measured and recorded by Arma at this time also. Their results are shown in Figures 8, 9, 10 and 11.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

PAGE 6

11 August 1959

2.5 TEST RESULTS: (Continued)

2.5.1.4 The tests of Figures 6 and 7 were made by adjusting the Arma outputs to the desired torquer amplifier input voltage levels. This cancelled any loading effects on the Arma equipment which may have existed. However, Arma supplied the following information on its pitch and yaw source impedances:

Pitch	$370 \pm 20\%$	$+ j250 \pm 20\%$ ohms
Yaw	6000 ohms	

These impedances drive the pitch and yaw guidance input circuits of the gyro torquer amplifiers, each of which offers a load of 100,000 ohms with guidance disabled and about 190,000 ohms with guidance enabled ensuring a good impedance match with Arma.

2.5.1.5 The enable - disable guidance switches appeared to function efficiently. With 3 volts RMS steering signal applied to the guidance input, and with the switch in the disable condition, .00417 volts per second appeared at the amplifier output. Using a sensitivity of 4.5 volts/degree this is equivalent to a drift rate of 3.34 degrees/hour.

2.5.2 Results of Main Testing Program -

2.5.2.1 Pitch and yaw steering

The pitch steering tests were similar to those run in the initial checks, with signals ranging from null to ± 4 volts used as inputs. All testing was done on both ground and airborne power. With the Autopilot gyro loop open, the ramp output from the signal amplifier was recorded at each voltage level after initially nulling the gyro and disabling the guidance input. Simultaneously, the nulling loop was opened and the guidance was enabled allowing the gyro to slew to its stop.

For the second test, the gyro nulling loop was left closed, and the guidance was enabled, while the gyro displacement was measured at the nulling amplifier output for each steering input level. The third test was to close the loop about the control maneuvers servo table and monitor the table rate at each input level. Sample recordings of these tests can be seen in Figures 12 and 13. With the servo loop closed, the rate gyro output was recorded to determine whether any inconsistencies existed in table rate.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

PAGE 7

11 August 1959

2.5 TEST RESULTS: (Continued)

2.5.2.1 Pitch and yaw steering (Continued)

The yaw steering tests were run in a similar manner, with signals ranging from null to ± 3 volts used as inputs. The open loop tests were performed as before by applying the yaw steering signals to the guidance input after which the nulling loop was opened and the guidance enabled allowing the gyro to slew to its stop. The ramp output from the gyro signal amplifier was recorded as shown in Figure 14. The same test was repeated with the nulling loop closed and the output of the nulling amplifier recorded, also shown in Figure 14.

2.5.2.2 Autopilot Gyro Package Torquing Rates and Parameters -

Figure 16 is a block diagram of a floated rate integrating gyro and its associated circuitry. The blocks inside the dotted lines represent the components of a floated rate gyro, while those outside represent needed circuitry for open or closed loop operation. Open loop torquing is accomplished with S1 and S2 open, and with the signal applied to the guidance input. Closed servo table loop torquing is accomplished with S1 closed and S2 open. Closed gyro loop torquing is accomplished with switch S1 open and switch S2 closed.

The gyro open loop torquing rate may be defined by

$$\frac{s\theta_0}{E_1} = \frac{\dot{\theta}_0}{E_1} = \frac{K_t S_t}{C} \frac{\text{deg/sec}}{\text{volt}}$$

Where K_t = torquer amplifier gain in volts/volt

S_t = torque generator transfer function in volts/deg.

C = viscous damping torque of the gyro in dynes - cm/deg/sec

The open loop torquing rate is calculated from the voltage ramp output of the signal amplifier using the displacement sensitivity which is calibrated to $\pm 5.5\%$.

Closing the loop about a servo table on which the gyro package is mounted, the torquing rate becomes

$$\frac{s\theta_0}{E_1} = \frac{\dot{\theta}_0}{E_1} = \frac{K_t S_t}{H}$$

where H is the gyro angular momentum.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR | ASTRONAUTICS

REPORT 7B 2124-1

PAGE 8

11 August 1953

2.5 TEST RESULTS: (Continued)

2.5.2.2 (Continued)

It can be seen that the torquing rates obtained using these two methods of measurement could differ considerably especially if the damping should vary some percentage over a specified temperature range. Figure 17 does show, however, a fairly good correspondence between open and closed servo loop torquing rates.

The third method tried was to close the loop about the gyro itself, torque the gyro electrically with the Arma steering signals, and record the output of the nulling amplifier for each input level. Since the input summing resistors at the input to the torquer amplifier are in the ratio of 1.21 to 1, the voltage E_n should be $1.21 \times E_i$ at any input level. This is verified in Figure 17.

The predominate time constant of the Autopilot gyro nulling loop as computed to be 0.5 second. This seems to agree with the time constant recorded in the simulated Lot C 1-G Test shown in Figure 8. In this test the gyro loop was closed and the nulling amplifier output was recorded, showing a nulling loop time constant of about 0.5 seconds. If necessary, the loop gain could probably be increased sufficiently to lower the time constant, as the loop possesses an ample gain margin.

Summarizing, the gyro nulling loop had a computed natural frequency of 3.5 cps, a damping ratio of 5.62, and a time constant of 0.5 seconds. All these parameters are a function of loop gain which can be controlled by adjusting the gain of the nulling amplifier.

2.5.2.3 The pitch steering signal was nulled by pinning the inertial platform pitch gimbal with a zero pin.

The effect of the Arma pitch steering null signal on the apparent Autopilot gyro drift was then recorded as shown in Figure 18. This null drift was recorded for six minutes. The drift in degrees per hour was calculated using the pitch displacement sensitivity which was calibrated to 3.5 volts/degrees. This calculated drift is shown as follows:

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

9

PAGE
11 August 1959

2.5 TEST RESULT : (Continued)

2.5.2.3 (Continued)

Drift at the end of six minutes	0.9 volts
Drift per hour	9 volts/hour
Drift in degrees/hour	$9 \text{ volts/hour} = 2.57 \text{ deg/hr.}$ 3.5 volts/deg.

2.5.2.4 The Arma yaw steering signal was nulled by use of the computer test kit in the "zero subtract" position. The effect of the yaw steering null signal on the apparent Autopilot gyro drift is shown in Figure 19. The gyro drift was recorded for three minutes in each direction by reversing the Arma computer reference voltages' phase. In either direction the drift appeared to be low, 2.27 deg/hr. to 3.46 deg/hr., both within tolerance. The difference between these two drift rates is 1.19 deg/hr. which is the true gyro drift rate caused by the imperfect null signal.

2.5.2.5 The 2 cps ripple on the yaw output of the Arma computer did appear at the output of the nulling amplifier as a 0.1 volt peak-peak signal. The amplitude of the 2 cps ripple is dependent on the steering input signal level. As shown in Figures 14 and 15, the input signal level for 1.1 volts peak-peak was about 3 volts RMS. To determine the effect of the 2 cps ripple on the entire Autopilot system including the sustainer and vernier engines, the resulting 2 cps ripple was recorded at the output of the yaw signal amplifier. See Figure 20. With a 3 volts RMS input signal, the peak-peak voltage appearing at the output of the signal amplifier was 0.2 volts. The sustainer and vernier engine deflection for a peak-peak input of 0.2 volts can be calculated as follows: the end to end sustainer pitch and yaw displacement gain is 1.85 deg/deg. The yaw vernier displacement gain is 15.3 deg/deg. A one degree displacement input produces 3.5 volts signal amplifier out. It follows that the sustainer displacement sensitivity is

$$\frac{1.85 \text{ deg/deg.}}{3.5 \text{ volts/deg.}} = 0.53 \text{ deg/volt}$$

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

PAGE 10

11 August 1959

2.5 TEST RESULTS: (Continued)

2.5.2.5 Therefore a 0.2 volt peak-peak signal amplifier output produces a sustainer deflection of

$$0.53 \times 0.2 = 0.106 \text{ degrees peak-peak at 2 cps.}$$

The vernier displacement sensitivity is

$$\frac{15.3}{3.5} = 4.37 \text{ deg/volt.}$$

Thus a 0.2 volt peak-peak signal amplifier output produces a vernier deflection of

$$4.37 \times 0.2 = 0.874 \text{ degrees peak-peak at 2 cps.}$$

From the above calculations, it appears that these small engine deflections will not be detrimental to the autopilot control system. The calculated sustainer deflection should be within the dead zone of the engine servo system.

The third test performed with yaw steering input signals was to close the loop about the control maneuvers servo table. This test is shown in Figure 15 where the rate gyro output shows a 0.04 volt peak to peak 2 cps oscillation. This is equivalent to 0.2 deg/sec. peak-peak modulation upon the table rate of 1.24 deg/sec.

2.5.2.6 The normal Lot B 1-G yaw steering profile using airborne power is shown in Figure 21. This test was done with the Autopilot gyro nulling loop closed and the output of the nulling amplifier recorded. No unusual transients appeared on the recording and the output appeared normal. Figure 10 shows another recording taken on airborne power.

2.5.2.7 The simulated Lot C 1-G test is shown in Figure 22. In this test the gyro loop was closed and the nulling amplifier output was recorded.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR | ASTRONAUTICS

REPORT 7B 2124-1

PAGE 11

11 August 1959

2.5 TEST RESULTS: (Continued)

2.5.2.8 On 12 March 1959, the Arma MCS and Convair Autopilot were run as a system. One G problems were run with the computer cut-off signals going to the programmer. The DC power supply was adjusted for nominal, under and over voltage levels. The performance of the MCS-Autopilot discretas circuitry was normal under all conditions.

2.5.2.9 The entire simulated load was switched on and off to simulate an extreme airborne power profile. No significant variations appeared in the recorded outputs of either Arma or Convair guidance components. The Arma MCS operation was normal at the specification limits of power supply amplitude and frequency.

2.5.2.10 Power Transfer Tests were made to determine the effect on the operational status of the MCS and Autopilot components. Phase switch-over times were unequal, and transients lasted as long as thirty milliseconds. However, total separation from the ground supply was always achieved before the airborne inverter was switched in.

The servo package recovered operational status within several milliseconds and therefore posed no problems.

Changeover tests were performed with the programmer at zero ready to receive a launch command. At power changeover the programmer power supply voltage decreased which resulted in programmer logic commanding a satisfactory reset to zero as the voltages returned to normal values. No undesirable voltage transients were noted in critical programmer outputs.

The effects of power changeover on the gyro package are shown in Figures 23, 24 and 25. There appear to be no problem areas except for a 0.3 volt transient spike lasting for 0.1 second appearing at the output of the signal amplifier. This should have a negligible effect on system operation.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR | ASTRONAUTICS

REPORT 7B 2124-1

PAGE 12

11 August 1959

2.5 TEST RESULTS: (Continued)

2.5.2.10 (Continued)

The first area of investigation on the Arma equipment was the effect on platform alignment. As the system power was switched from ground to airborne, the steering resolver and pendulum outputs were recorded, as in Figures 26, 27 and 28. Any change in resolver or pendulum outputs would indicate gimbal motion. There was no change in pendulum output as a result of power changeover. A 2.5 millivolt change in roll resolver output was recorded indicating a twenty second error. As the resolver output is directly proportional to line voltage, a major factor in the resolver output change is the difference between the voltage levels of the ground and airborne supplies. The voltage difference was about 1% at the time of this measurement.

Platform azimuth alignment was monitored optically using a Watts autocollimator to sight on the platform porro prism. The angular offset of the platform in azimuth due to power transfer was less than five seconds for repeated runs.

The recovery of azimuth alignment from an offset was normally observed to be accomplished within two or three seconds as a result of the ET-1 Equipment Gyro Torquing Amplifiers. At no time did recovery exceed seven seconds. On the basis of these figures, Arma states that the platform will have fully recovered from any offset due to power transfer prior to launch.

The power transfer transient was reflected in the platform and computer power supplies. There was no significant increase in ripple or noise on the DC voltages after transfer. Observed control and power supply voltages of the Arma equipment are tabulated in Figure 30 to give qualitative definition to the supply variations after changeover.

The Arma MGS servo amplifier output showed a ripple at the difference frequency of the two supplies. See Figure 29. Maximum ripple was about 1 volt peak to peak. Total voltage was within specifications. Servo response was normal judging by the recovery time from a step input. It is presumed that this "hum" pickup will not be present in the missile once the umbilical is detached.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR | ASTRONAUTICS

REPORT 7B 2124-1

PAGE 13

11 August 1959

2.5 TEST RESULTS: (Continued)

2.5.2.10 (Continued)

Computer operation was normal on airborne power when reset after transfer. Figure 30 offers a qualitative indication of the transfer effects on the computer operating voltages.

2.6 REFERENCES:

Report ES-59-SM-322 dated 18 March 1959, Results of Initial Arma/AIG Gyro Canister Compatibility Tests.

Report ES-59-SM-384 dated 25 May 1959, Summary of Arma/AIG Autopilot Compatibility Tests.

Engineering Work Book No. 7404.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, U.S.C., Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

PAGE 14

11 August 1959

3.0 SECTION II: Electrical System Compatibility Test Results.

3.1.0 INTRODUCTION:

The purpose of this phase of testing was to evaluate the electrical compatibility of the D/AH power system with the Arma MDE - AH Auto-pilot guidance system.

3.2.0 OBJECTIVES:

3.2.1 Obtain a load analysis for the D/AH Missile Power System.

3.2.2 Obtain a harmonic analysis of the airborne power system.

3.2.3 Determine power system characteristics prior to transfer, during transfer, and after transfer.

3.3.0 CONCLUSIONS:

3.3.1 The nominal load on the D/AH Missile Power System was 1620 watts. The Arma Inertial Guidance System constituted three-fourths of the nominal load.

3.3.2 The harmonic analysis of the airborne inverter indicated that the voltage harmonic content from the second to twentieth harmonic was approximately 0.033 of the fundamental.

3.3.3 Recordings taken of power system transfer indicate that the position transfer time (power interruption) exceeds the maximum specified of 15 milliseconds.

Arma total current transients at transfer are not excessive in magnitude and are generally less than 2.5 milliseconds in duration.

3.4.0 RECOMMENDATION:

It is recommended that further testing of the changeover switch be conducted on the systems level.

3.5.0 DESCRIPTION OF SPECIMENS:

There were four major electrical components used in this tests.

3.5.1 Power Changeover Switch -

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

PAGE 15

11 August 1959

3.5.1 Power Changeover Switch - (Continued)

Kinetics Corp. M-160-2

Serial No. 002 CVAC 27-06106-3

3.5.2 Airborne A.C. Power-

Inverter - Bendix, Red Bank Division 32B77-5-B

Serial Number R-14

Output: 115/200 volts AC 400 cycles,

3000VA, 3 Phase, 0.8 pf.

Input: 28 volts DC 185 amps.

3.5.3 Ground A.C. Power

Variable Frequency Motor - Generator

Inet-Palmer Division of Leach Corp.

Model A1264 Serial Number 3673-1

Convair Specification No. 7-06205

Input	Output
Voltage: 390/510	120/208
Freq: 58/62 cyc.	380/420 cyc.
Phase: 3	3
Amps: 30.5	41.6
P.F.: 0.8	0.95 lead to 0.75 lag
KVA:	15

3.5.4 Ground-Airborne D.C. Power

Stavolt D.C. Power Supply

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, U.S.C., Sec. 793 and 794, and the transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR | ASTRONAUTICS

REPORT 7B 2124-1

PAGE 16

11 August 1959

3.5.4 Ground-Airborne D.C. Power - (Continued)

Mc Colpin - Christie Corp. 431-400K4

Serial Number K-458

Output: 400 amps 25-29 volts DC

Input: 440v 3 Phase 60Cyc. 30 Amps.

3.5.5 D. C. Power to Arma Ground Equipment -

Rectifier, Metallic

Christie Electric Corp. MH32-100 K4

Serial Number K-1804

Output: 100 amp. 24-32v DC

Input: 460 volts 60 cyc. 3 Phase

3.6.0 TEST PROCEDURE:

3.6.1 General Procedure -

3.6.1.1 The electrical power system used followed the schematic Drawing (SX 545-7-159) furnished by the Electrical Design Group, Dept, 545-7. Additions and changes were incorporated to facilitate instrumentation and system grounding. Basically, the system conforms to the power system diagram given in Figure 31. The solid lines indicate flow of power whereas, the dashed lines indicate measurement or instrumentation coverage.

The system was so arranged as to provide Arma ground control equipment with AC ground power at all times.

The electrical wiring was of the three-phase, four wire, configuration. Two No. 0 cables were connected between each package load and converter to simulate missile grounding. The common neutral (fourth wire) between airborne and ground AC power supplies was separated during airborne compatibility testing.

This document contains information affecting the national defense of the United States within the meaning of the espionage laws, Title 18, U.S.C., Sec. 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

FORM 7b 2124-1

PAGE 17

11 August 1960

3.6.1.1 (Continued)

The test inverter and changeover switch had been used in several other tests by Systems and Components Test Laboratories.

3.6.1.2 The system loads were operated in the ready mode during electrical power tests. The airborne loads consisted of the following:

3.6.1.2.1 Arms MGS

- a, Platform Package
- b, Computer Package
- c, Control Package
- d, Analogue Signal Converter
- e, Digital Signal Converter

3.6.1.2.2 AE Autopilot:

- a, Phase A transducer (simulated)
- b, Gyro Package
- c, Programmer Package
- d, Servo Amplifier Package
- e, Programmer and Servo Amplifier Monitoring Panels

3.6.1.2.3 Simulated Loads:

- a, Propellant Utilization
- b, Instrumentation (Model 3)

These simulated loads were lumped together and consisted of a transformer-rectifier resistive load and an inductive load.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

PAGE 18

11 August 1959

3.6.2 Specific Procedure:

The load analysis and harmonic analysis measurements were taken at the analyser. Both analyses were performed on airborne inverter power with the external ground wire disconnected.

3.6.2.1 The load analysis was performed using a voltmeter, ammeter and wattmeter with associated current transformers. Pictures of the phase voltage and current waveforms were taken with a Type 2614 Dumont attachment and camera and a Type 53/54C Tektronix Dual-Trace Plug-In Unit in a Type 545 Tektronic Oscilloscope.

3.6.2.2 The harmonic analysis was performed using a Model 300A Hewlett-Packard Harmonic Analyser. The half band width selectivity was set at 145 cycles. Frequencies outside this bandwidth were attenuated by a minimum of 40db. The voltage harmonics were measured directly across the line and the current harmonics were measured across a 50 millivolt, 10 ampere shunt in the line.

3.6.2.3 Power changeovers (transfers) were performed with over, nominal, and under voltage outputs from the inverter. Recordings were obtained on a Type 5-119 CEC oscillograph. Type 7-326 Galvanometers were used for the AC traces. These galvanometers have a frequency response flat to 3000 cycles. A Weston, Model 461 current transformer and CEC Linear Amplifier, Type 1-112-C were used to isolate and amplify the instrumentation signal of each line current. This instrumentation circuit gave erroneous indications of the line currents during transfer and was therefore revised for subsequent testing. The revised circuitry utilized a 7.5 ampere, 50 millivolt shunt in each line and a Type 7-319 Galvanometer. This galvanometer has a frequency response flat to 300 cycles.

3.7.0 TEST RESULTS:

3.7.1 The load analysis data are given in Figure 22. The power factor was calculated from measured values of voltage, amperes, and watts. All values with the exception of watts, given in the total rows of the table are calculated on the basis of 115 volts. The system line voltages and inverter direct current and voltage are given at the right.

The loads were not steady because of heaters turning off and on in the Autopilot packages. Therefore two load analyses were run.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

PAGE 19

11 August 1959

3.7 TEST RESULTS: (Continued)

3.7.1.1 A nominal value of system loading was 1620 watts. In comparing the loads of Run 1; Arma MCS comprised 73.5%, AIG Autopilot was 10.6% and the simulated load was 15.9% of the total load. The AIG Autopilot load had the greatest variance in phase current and power factor.

3.7.1.2 The waveforms of voltage and current are given in Figure 33. These pictures show the distortion in the waveforms and the phase angle between the phase voltage and current. The photograph on the right shows the waveforms with total system load on the airborne inverter. The photograph on the left shows the waveforms with the simulated load dropped from the total system load. The system load without the simulated load is given in the load analysis table.

3.7.1.3 The simulated load was used for nominal and extreme variations in loading on the power supply for power system compatibility testing.

3.7.2 The harmonic analysis data are given in Figure 34. The values of harmonic voltages given are from direct measurements. The values of harmonic currents given are calculated from the voltage drop measured across a 10 ampere, 50 millivolt shunt in each line. Here again the load on the system was not steady and two sets of data were taken.

3.7.2.1 The middle portion of the analysis table gives the harmonics in percent of the fundamental. The seventh and eleventh harmonics are the most prominent voltages, whereas the second, third, fourth, fifth, seventh, eleventh and fifteenth harmonics are the most prominent currents.

3.7.2.2 The harmonic content of the voltage is given at the bottom of the table. Interface requirements of AZM-27-075 call out that the RMS sum of the voltage harmonics from the second through the tenth shall be equal to or less than 4% of the fundamental. Also, the RMS sum of the harmonics from the second through the fortieth shall be equal to or less than 0.05 of the fundamental. The voltage harmonic content of the tested inverter clearly meets the first part of the specification. The harmonic content was only measured to the twentieth therefore a categorical statement about its harmonic content to the fortieth is impossible. Nevertheless, if the harmonic content to the twentieth is doubled the calculated R.M.S. content is 0.0495 of the fundamental. It is unlikely that the harmonic content from the twentieth through the fortieth will be as great as the content from the second through the twentieth. Therefore it is assured that the harmonic content of the inverter meets the second part of the specification.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR | ASTRONAUTICS

REPORT 7B 2124-1

PAGE 20

11 August 1959

3.7 TEST RESULTS: (Continued)

- 3.7.3 Power transfer recordings are given in Figures 35 through 43. The changeover switch used in this test was not of the type that will be on the D/AIG Series. A proper changeover switch was not procured for this test. The essential difference between the two switches consists of the number of switching circuits. The switch used in the test had three sets of three AC load switching circuits. A set consists of either three Phase A, Phase B or Phase C switches. The changeover switch that will be used on the D/AIG Series has three sets of five AC load switching circuits.

The changeover switch used did not have the required number of switching circuits. Therefore, the packages of each subsystem; Arma MCS, AIG Autopilot and Simulated were connected to a single switching circuit. The effect this had on the test is probably negligible. However, the exact time of transfer for each package would be different. Also, the transfer time sequence would cause a change in the time and magnitude of the total system transfer transient.

- 3.7.3.1 With the system loads as in the load analysis test, several power transfers were run. Typical recordings of these changeovers are given in Figures 35 and 36. These recordings are of total system load currents and voltages. These recordings show inconsistent transfer times. This characteristic was discussed with the Electrical Design Group. Upon investigation it was learned that the electrical system wiring was improper. Each set of load switching circuits had been connected together in order to instrument the total load current at transfer. Referring to the system diagram, Figure 31, the proper circuitry is to have the distribution coincide with the changeover switch. The proper changes were incorporated. The above mentioned recordings, Figures 35 and 36 are included here to show what the total system or each package saw for power transfer testing. When the changeover circuitry was properly revised, the Autopilot packages were no longer available for test.

- 3.7.3.2 In order to determine the electrical characteristics at transfer for the Arma MCS equipment, further power transfer testing was conducted. The AIG Autopilot load was lumped into the simulated load. Figure 37 is a recording of Arma voltage and current at transfer. It clearly shows the presence of high frequency transients. High frequency current transients are also apparent at the transfer command time. At this time the motor driven changeover switch begins to move.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

PAGE 21

11 August 1959

3.7 TEST RESULTS: (Continued)

3.7.3.3 The apparent DC displacement of the currents at break and make of transfer are spurious. To check on these spurious displacements, a step function was applied to the recorder circuit and it responded approximately at two cycles, damped exponentially. The recorder current instrumentation circuit which caused the spurious displacement and its revision are discussed in Paragraph 3.6.2.3.

3.7.3.4 Figures 38 through 43 are records of Arma MGS electrical characteristics at transfer using the revised current instrumentation circuitry. The response of the Type 7-319 Galvanometer is down approximately seven percent at 400 cycles. These records show progressively power transfers from external to internal and internal to external, with over, nominal, and under voltage on the inverter. The position transfer time is more clearly defined than was indicated by the high frequency response records. The position transfer time is definitely outside the maximum specified time of 15 milliseconds. Phase A current transfer time approaches 30 milliseconds.

3.7.3.5 These records also serve to indicate the current switching transients. The transients are somewhat variable because of their dependence upon the time displacement of the voltage cycle at switching and the mode or power factor of the load.

It may be observed that the voltages are small in magnitude before the completed operation of switching at make and break. A possible cause of this may be the construction of the switching contacts. The switches are of the sliding pin-socket type and their area of contact, or contact resistance will change with the time-position of the sliding contact.

3.8.0 BIBLIOGRAPHY:

Test data from which this report was prepared are recorded in Engineering Test Laboratories Data Notebook No. 7134.

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

PAGE 22

11 August 1959

4.0 SECTION III - ILLUSTRATIONS:

4.1 LIST OF ILLUSTRATIONS -

<u>FIGURE NO.</u>	<u>TITLE</u>	<u>PAGE NUMBER</u>
1	CONVAIR - ARMA COMPATIBILITY BENCH TEST AREA.....	23
2	ARMA EQUIPMENT GROUP.....	24
3	ARMA TEST GROUP.....	25
4	ELECTRICAL TEST GROUP.....	26
5	AIRBORNE POWER GROUP.....	27
6	INITIAL PITCH STEERING TESTS.....	28
7	INITIAL YAW STEERING TESTS.....	29
8	ARMA PITCH RESOLVER OUTPUT COMPONENTS.....	30
9	ARMA YAW COMPUTER OUTPUT COMPONENTS.....	31
10	ARMA PITCH RESOLVER OUTPUT PERCENTAGE COMPONENTS.....	32
11	ARMA YAW COMPUTER OUTPUT PERCENTAGE COMPONENTS.....	33
12	PITCH CLOSED LOOP TORQUING TEST.....	34
13	PITCH GYRO AMPLIFIER TEST.....	35
14	YAW GYRO AMPLIFIER TEST.....	36
15	YAW CLOSED LOOP TORQUING TEST.....	37
16	BLOCK DIAGRAM OF RATE GYRO.....	38
17	TABLE OF GYRO PACKAGE TEST RESULTS.....	39
18	PITCH GYRO DRIFT RATE TEST.....	40
19	YAW GYRO DRIFT RATE TEST.....	41
20	YAW SIGNALS ON AIRBORNE POWER.....	42
21	LOT B 1-G YAW STEERING PROFILE.....	43
22	LOT C1-G YAW STEERING PROFILE.....	44
23	YAW CLOSED LOOP POWER CHANGEOVER TESTS.....	45
24	YAW OPEN LOOP POWER CHANGEOVER TEST.....	46
25	YAW GUIDANCE ENABLED CHANGEOVER TEST.....	47
26	ARMA INERTIAL PLATFORM RESOLVER OUTPUTS.....	48
27	ARMA INERTIAL PLATFORM PENDULUM OUTPUTS.....	49
28	ARMA INERTIAL PLATFORM PENDULUM OUTPUTS.....	50
29	ARMA SERVO AMPLIFIER OUTPUTS.....	51
30	COMPUTER AND CONTROL VOLTAGES.....	52
31	POWER SYSTEM DIAGRAM.....	53
32	LOAD ANALYSIS TABLE.....	54
33	PHASE VOLTAGE AND CURRENT WAVEFORMS.....	55
34	HARMONIC ANALYSIS TABLE.....	56
35	TOTAL SYSTEM POWER TRANSFER.....	57
36	TOTAL SYSTEM POWER TRANSFER.....	58
37	ARMA POWER TRANSFER (HIGH FREQUENCY CURRENT TRANSIENTS).....	59
38	ARMA POWER TRANSFER (EXTERNAL-INTERNAL, OVER VOLTAGE).....	60
39	ARMA POWER TRANSFER (INTERNAL-EXTERNAL, OVER VOLTAGE).....	61
40	ARMA POWER TRANSFER (EXTERNAL-INTERNAL, NOMINAL VOLTAGE).....	62
41	ARMA POWER TRANSFER (INTERNAL-EXTERNAL, NOMINAL VOLTAGE).....	63
42	ARMA POWER TRANSFER (EXTERNAL-INTERNAL, UNDER VOLTAGE).....	64
43	ARMA POWER TRANSFER (INTERNAL-EXTERNAL, UNDER VOLTAGE).....	65

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~


~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

PAGE 23

11 August 1959

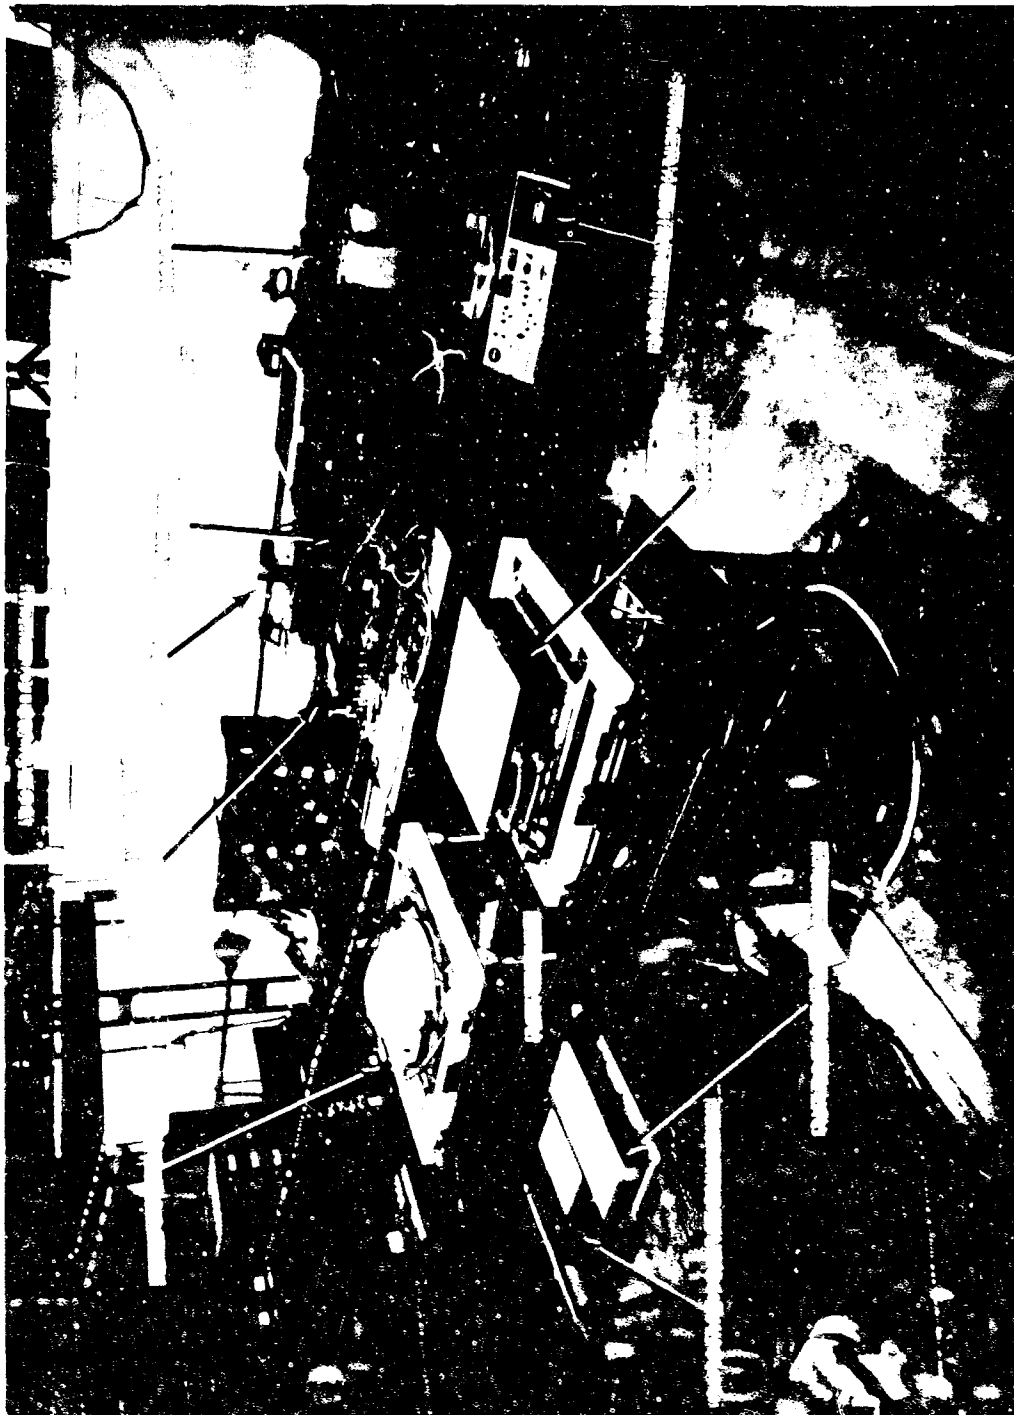

CONVAIK-AKMA COMPATIBILITY BENCH TEST AREA

FIGURE 1

This document contains information affecting the national defense of the United States within the meaning of the espionage laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~


~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7E 2124-1

PAGE 24

11 August 1959

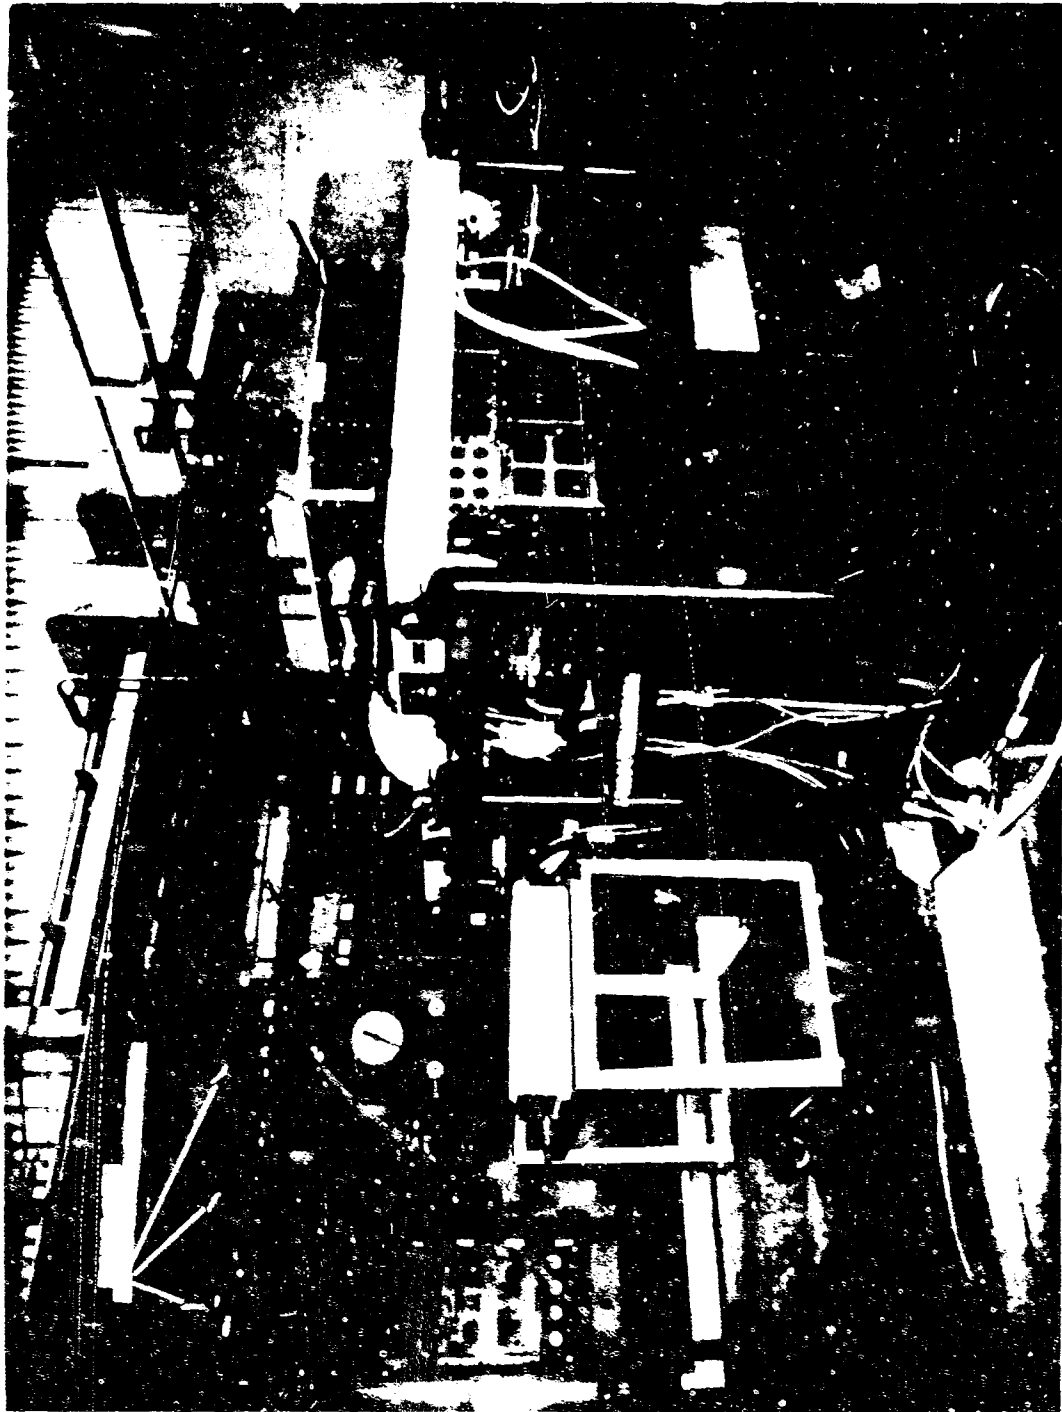

ARCA EQUIPMENT GROUP

FIGURE 2

This photograph shows the ARCA equipment group, which is the primary component of the ARCA system. It is a complex assembly of structural members, including beams, supports, and a central rectangular frame. The equipment is designed to be mounted on the exterior of a spacecraft and to provide a stable platform for the ARCA system.


~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

REPORT 7B 2124-1

PAGE 25

11 August 1959

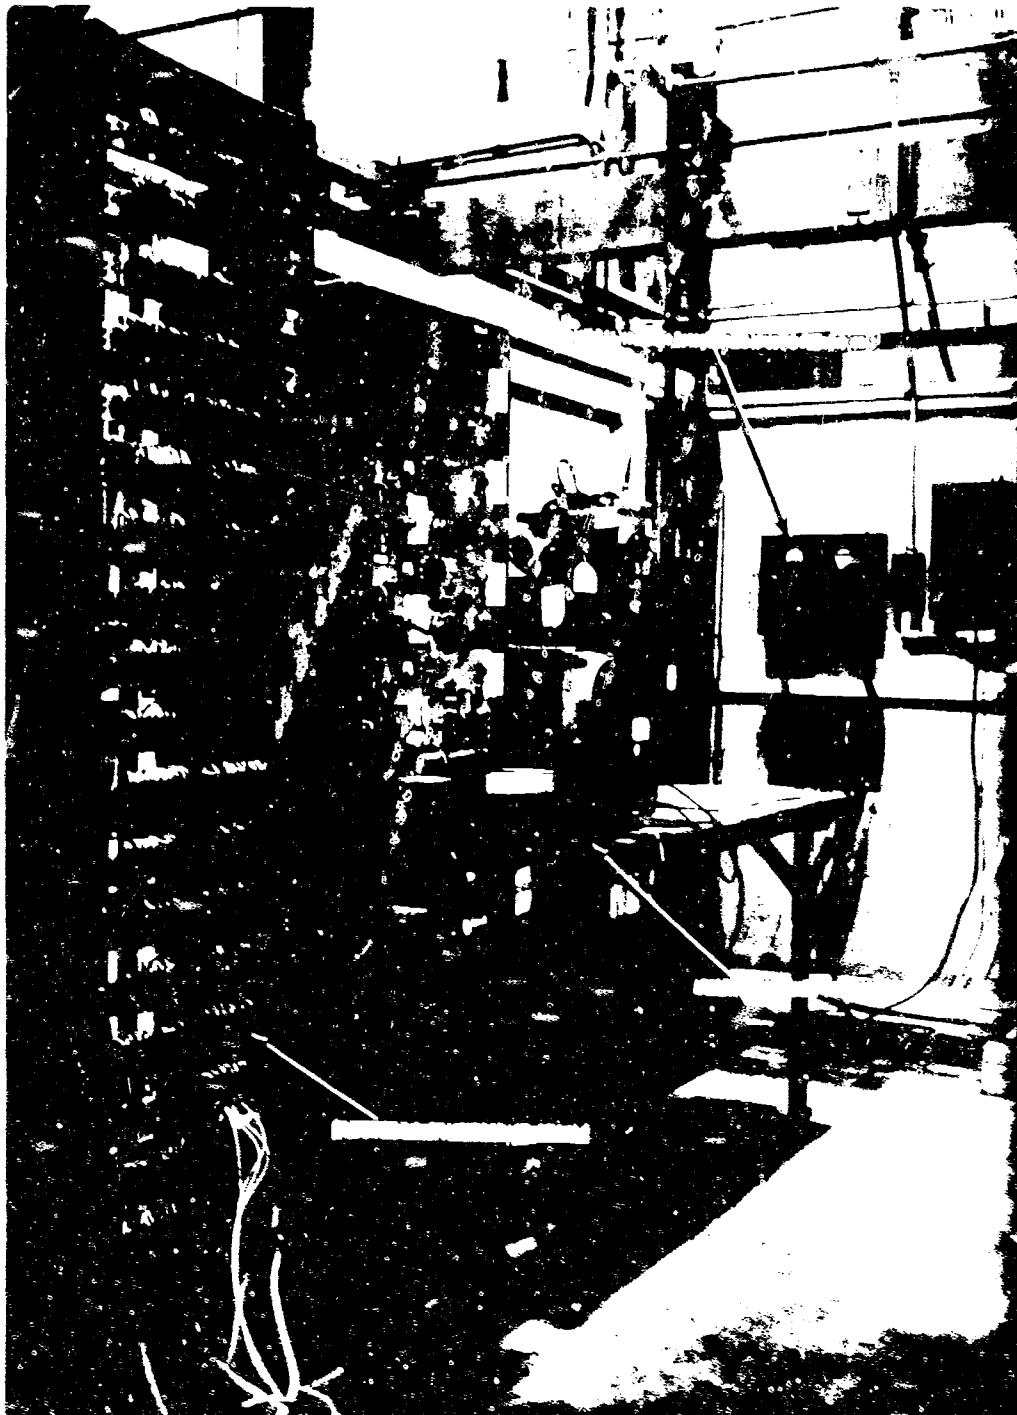

ARMA TEST GROUP

FIGURE 3

The photograph shows the internal structure of the ARMA test group, which is a complex assembly of various components, including pipes, beams, and mechanical parts. The structure is designed to support and test various components under simulated conditions.

~~CONFIDENTIAL~~


~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

PAGE 26

11 August 1959

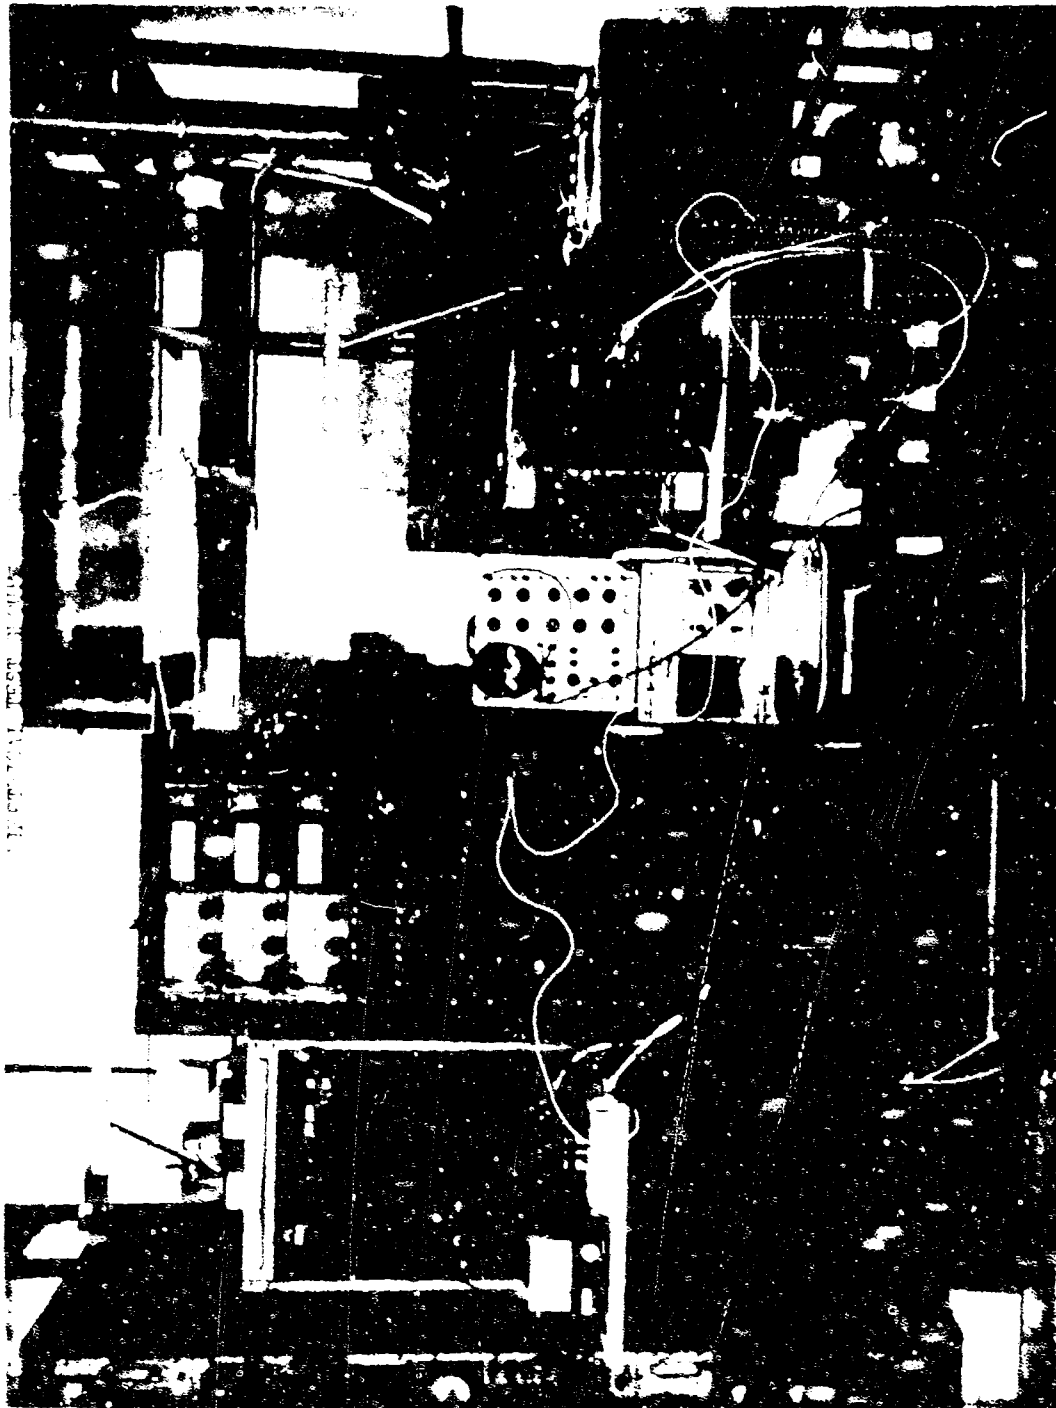

ELECTRICAL TEST GROUP

FIGURE 4

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, U.S.C. Sec. 793 and 794, the transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS


~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

PAGE 27

11 August 1959

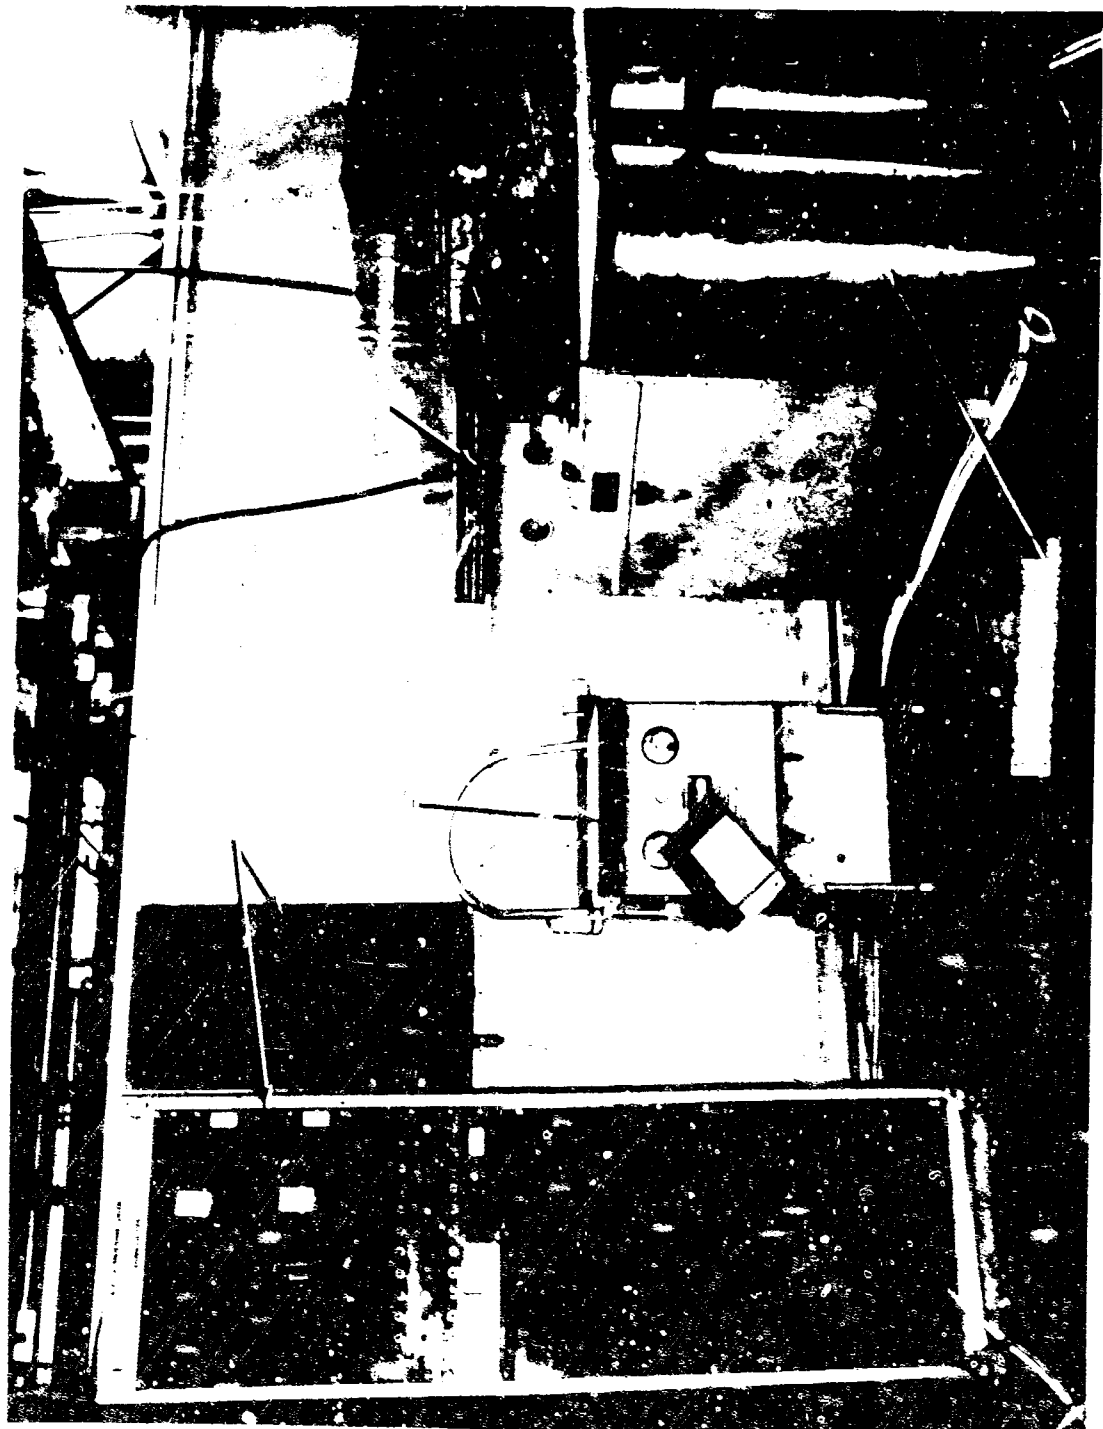



AIRBORNE POWER GROUP

FIGURE 5

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, United States Code, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.


~~CONFIDENTIAL~~

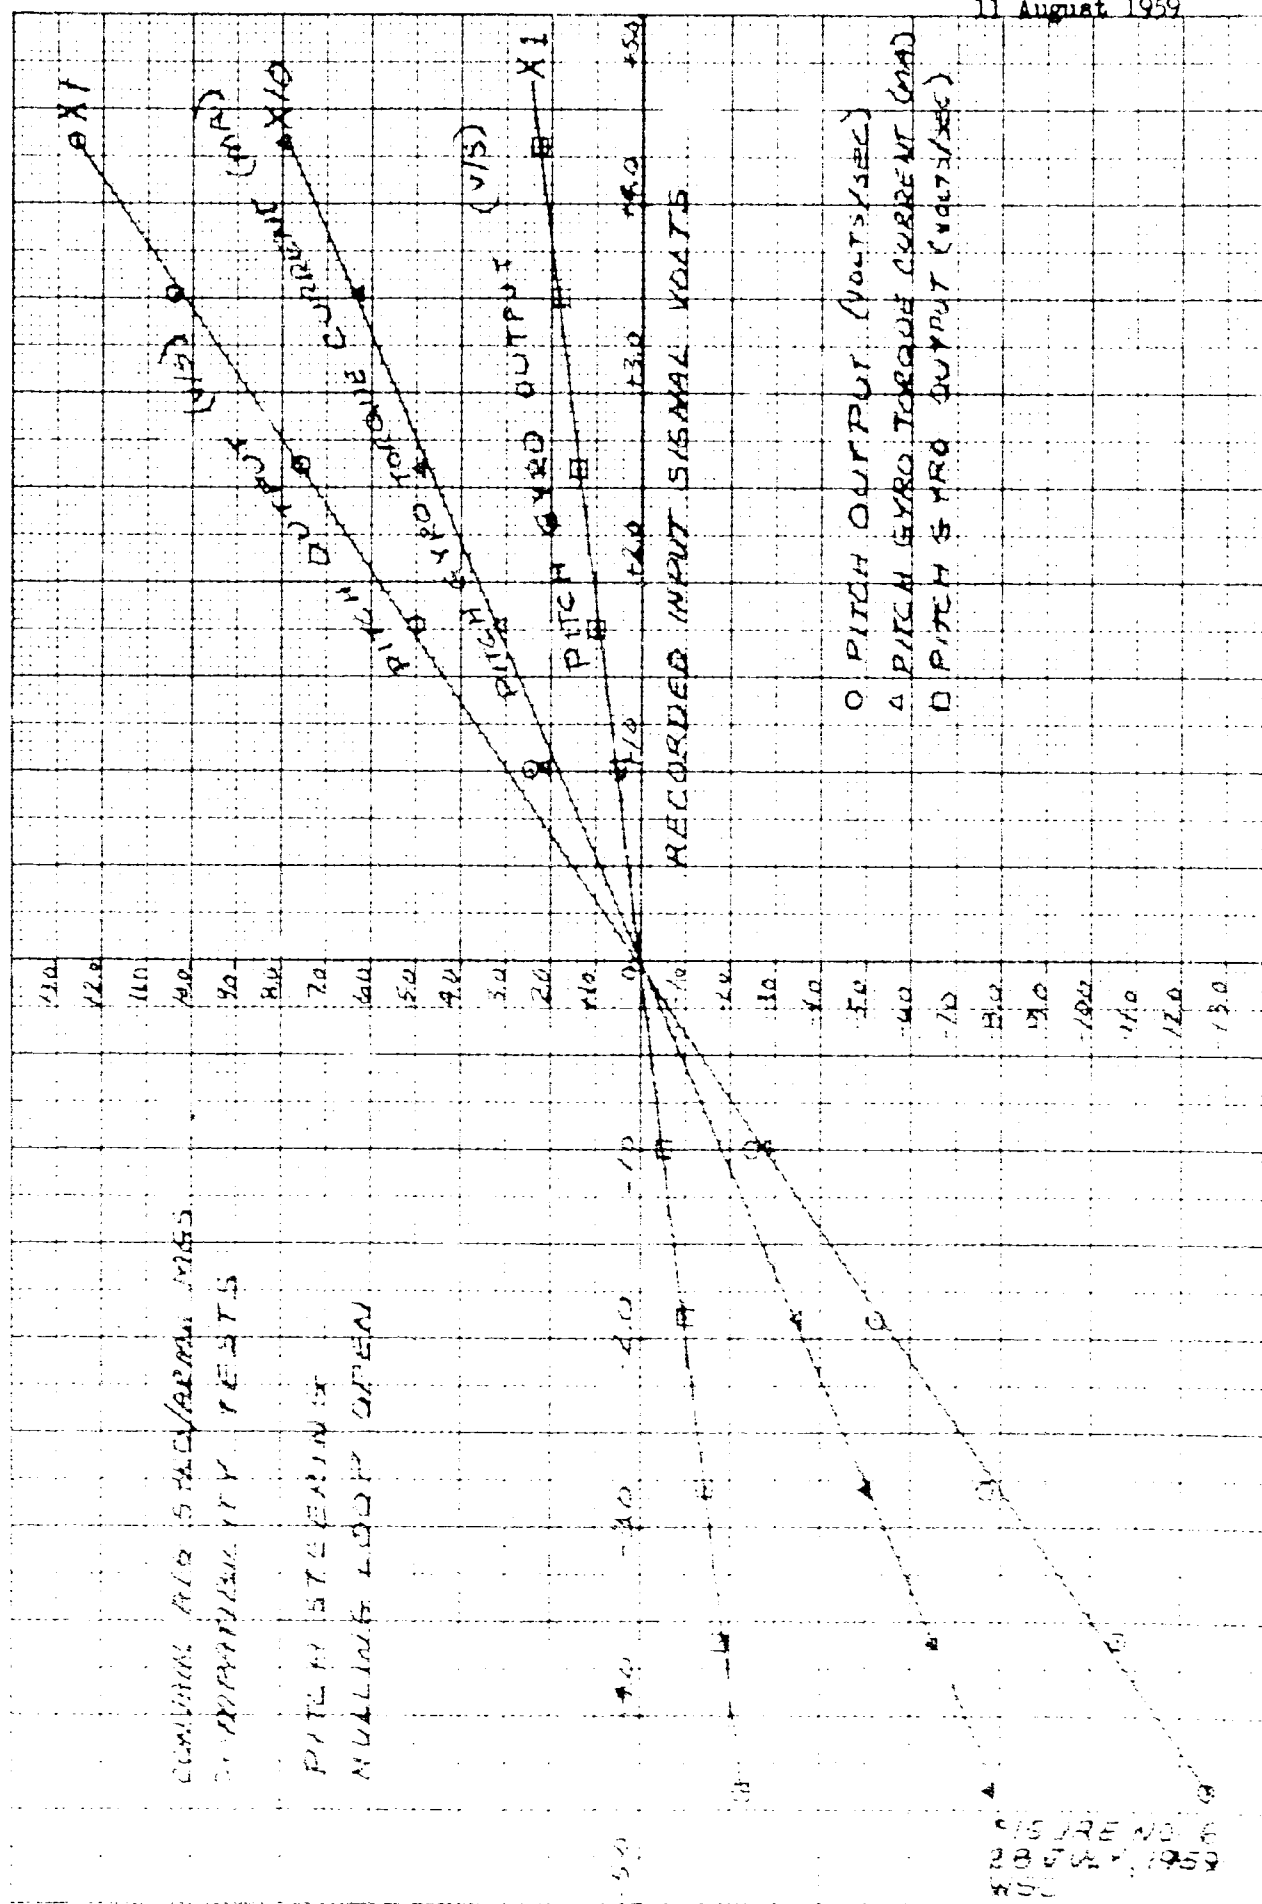

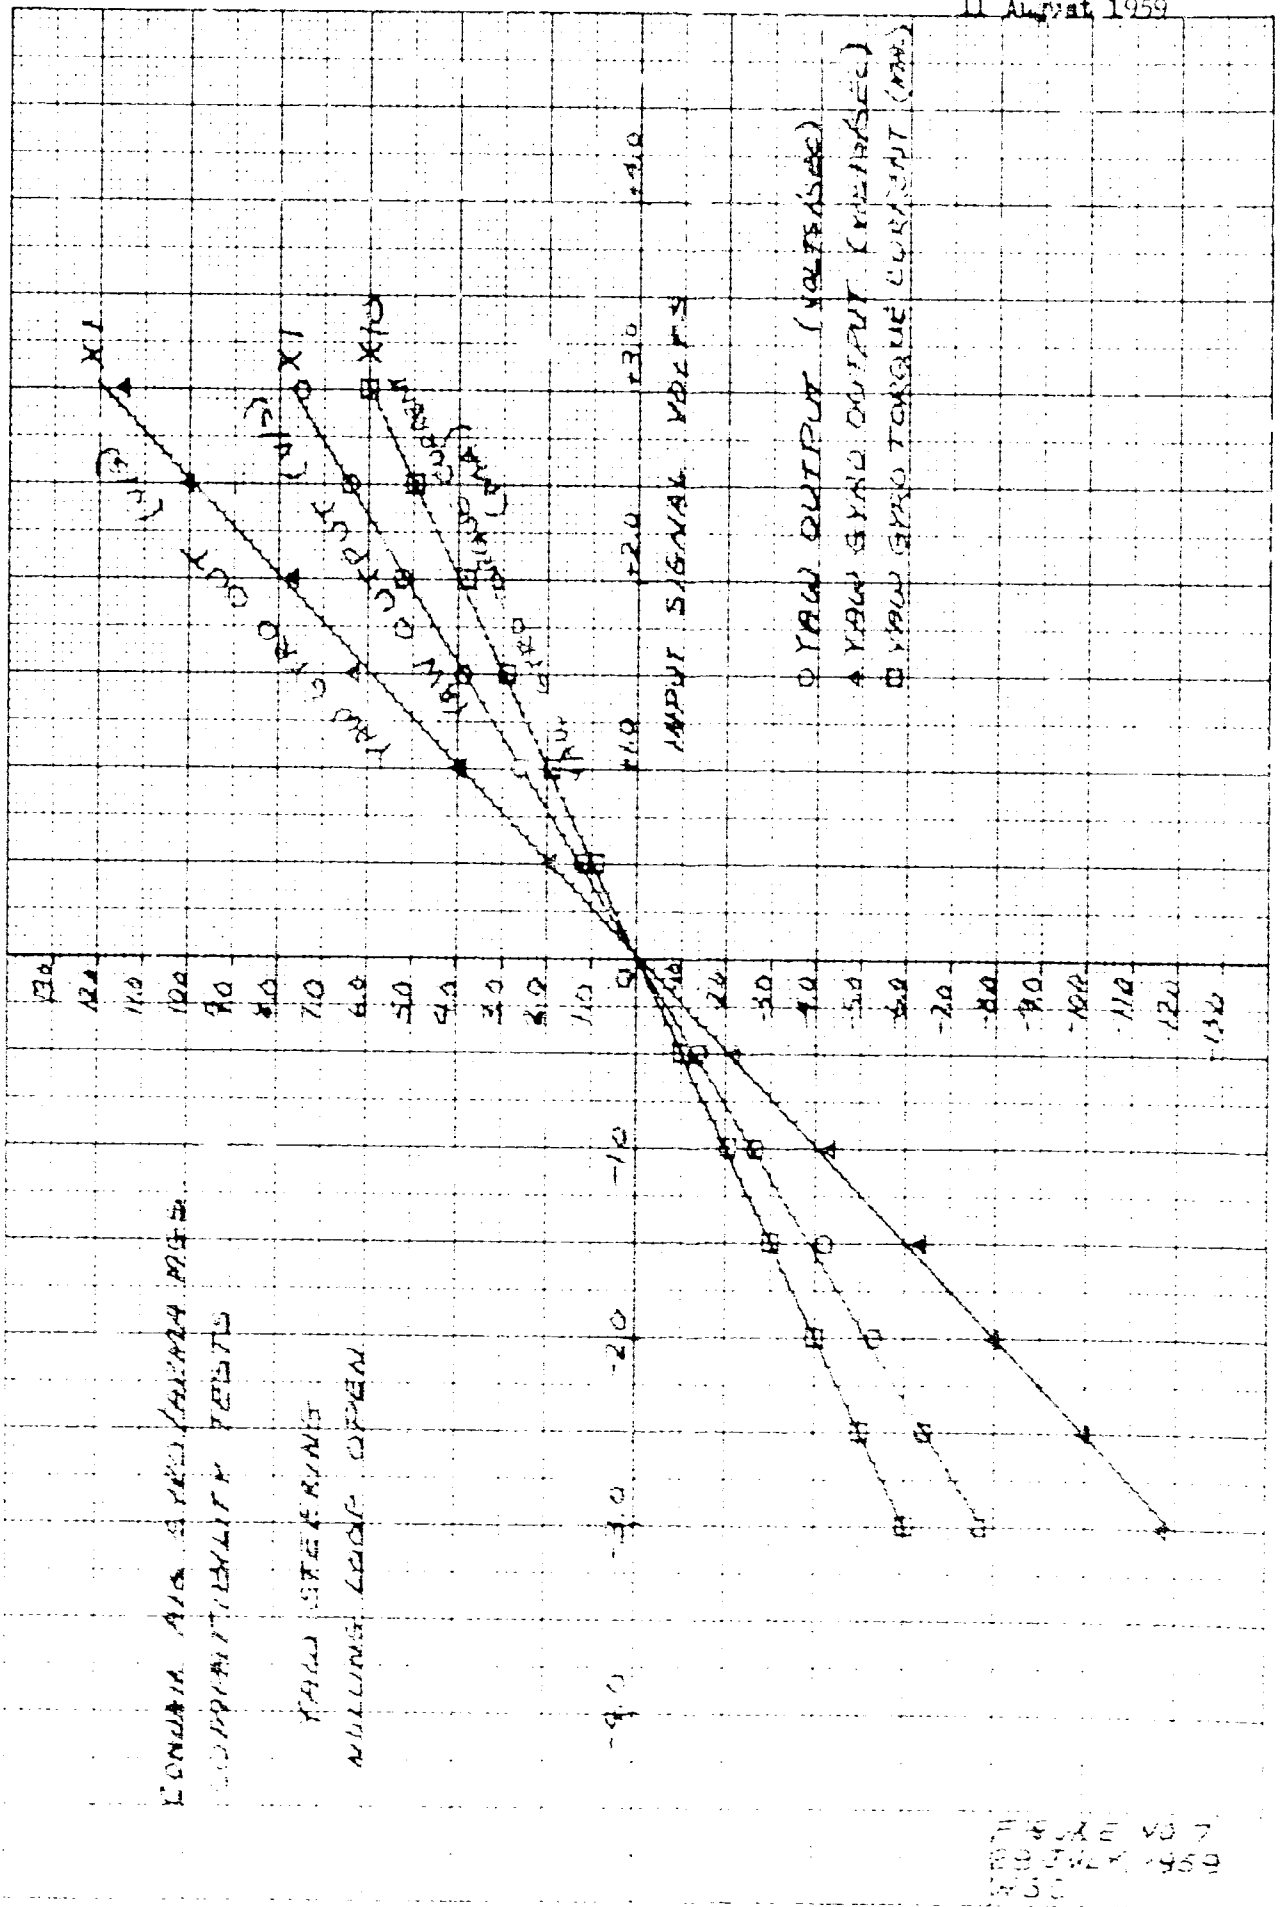

7B 2124-1
 11 AUG 1959
 29

11 August 1959

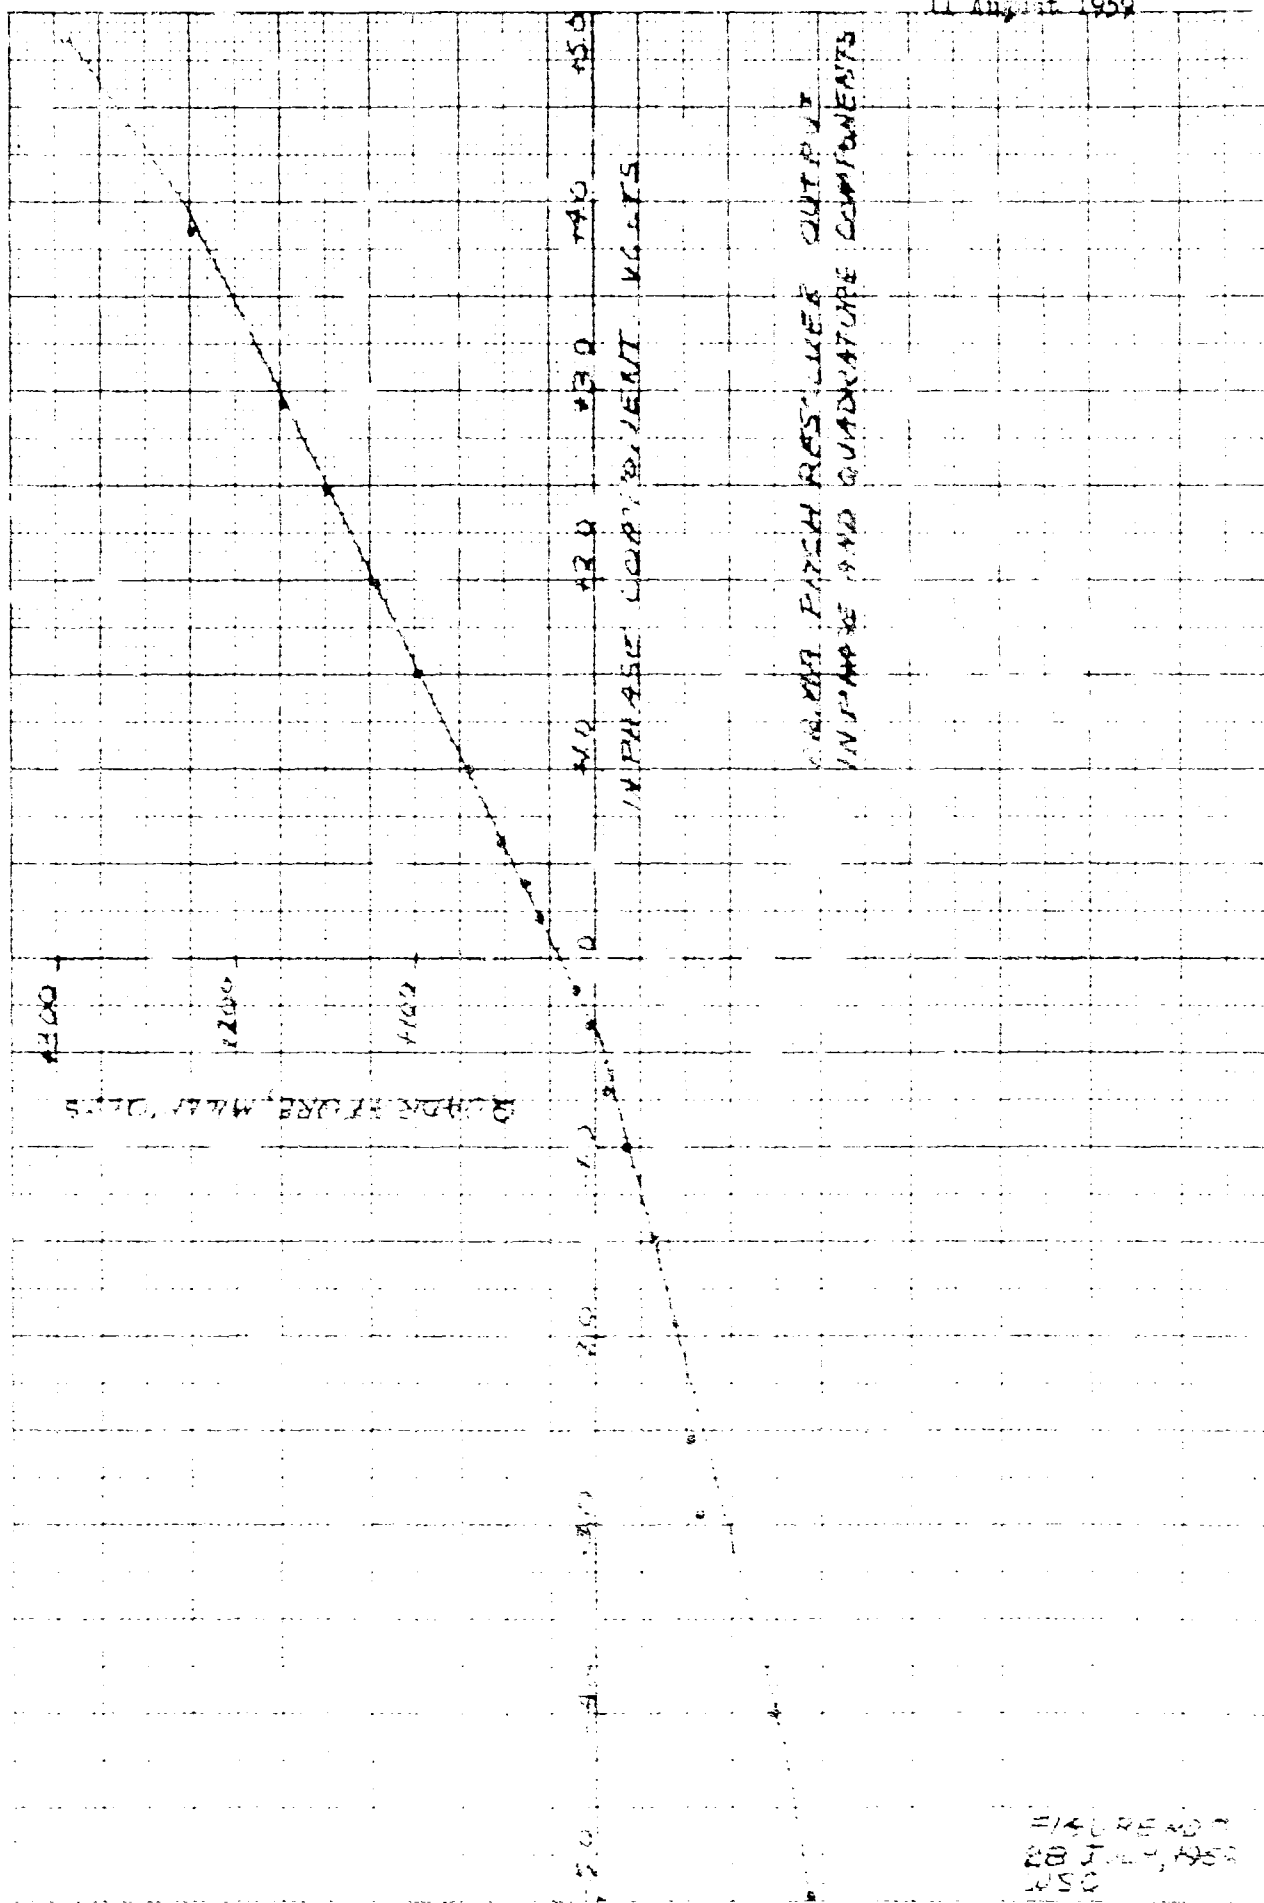

ORIGIN: PITCH RES' LINES OUTPUT
IN PHASE AND QUADRATURE COMPONENTS

FIGURE 20
28 JULY, 1959
WSC

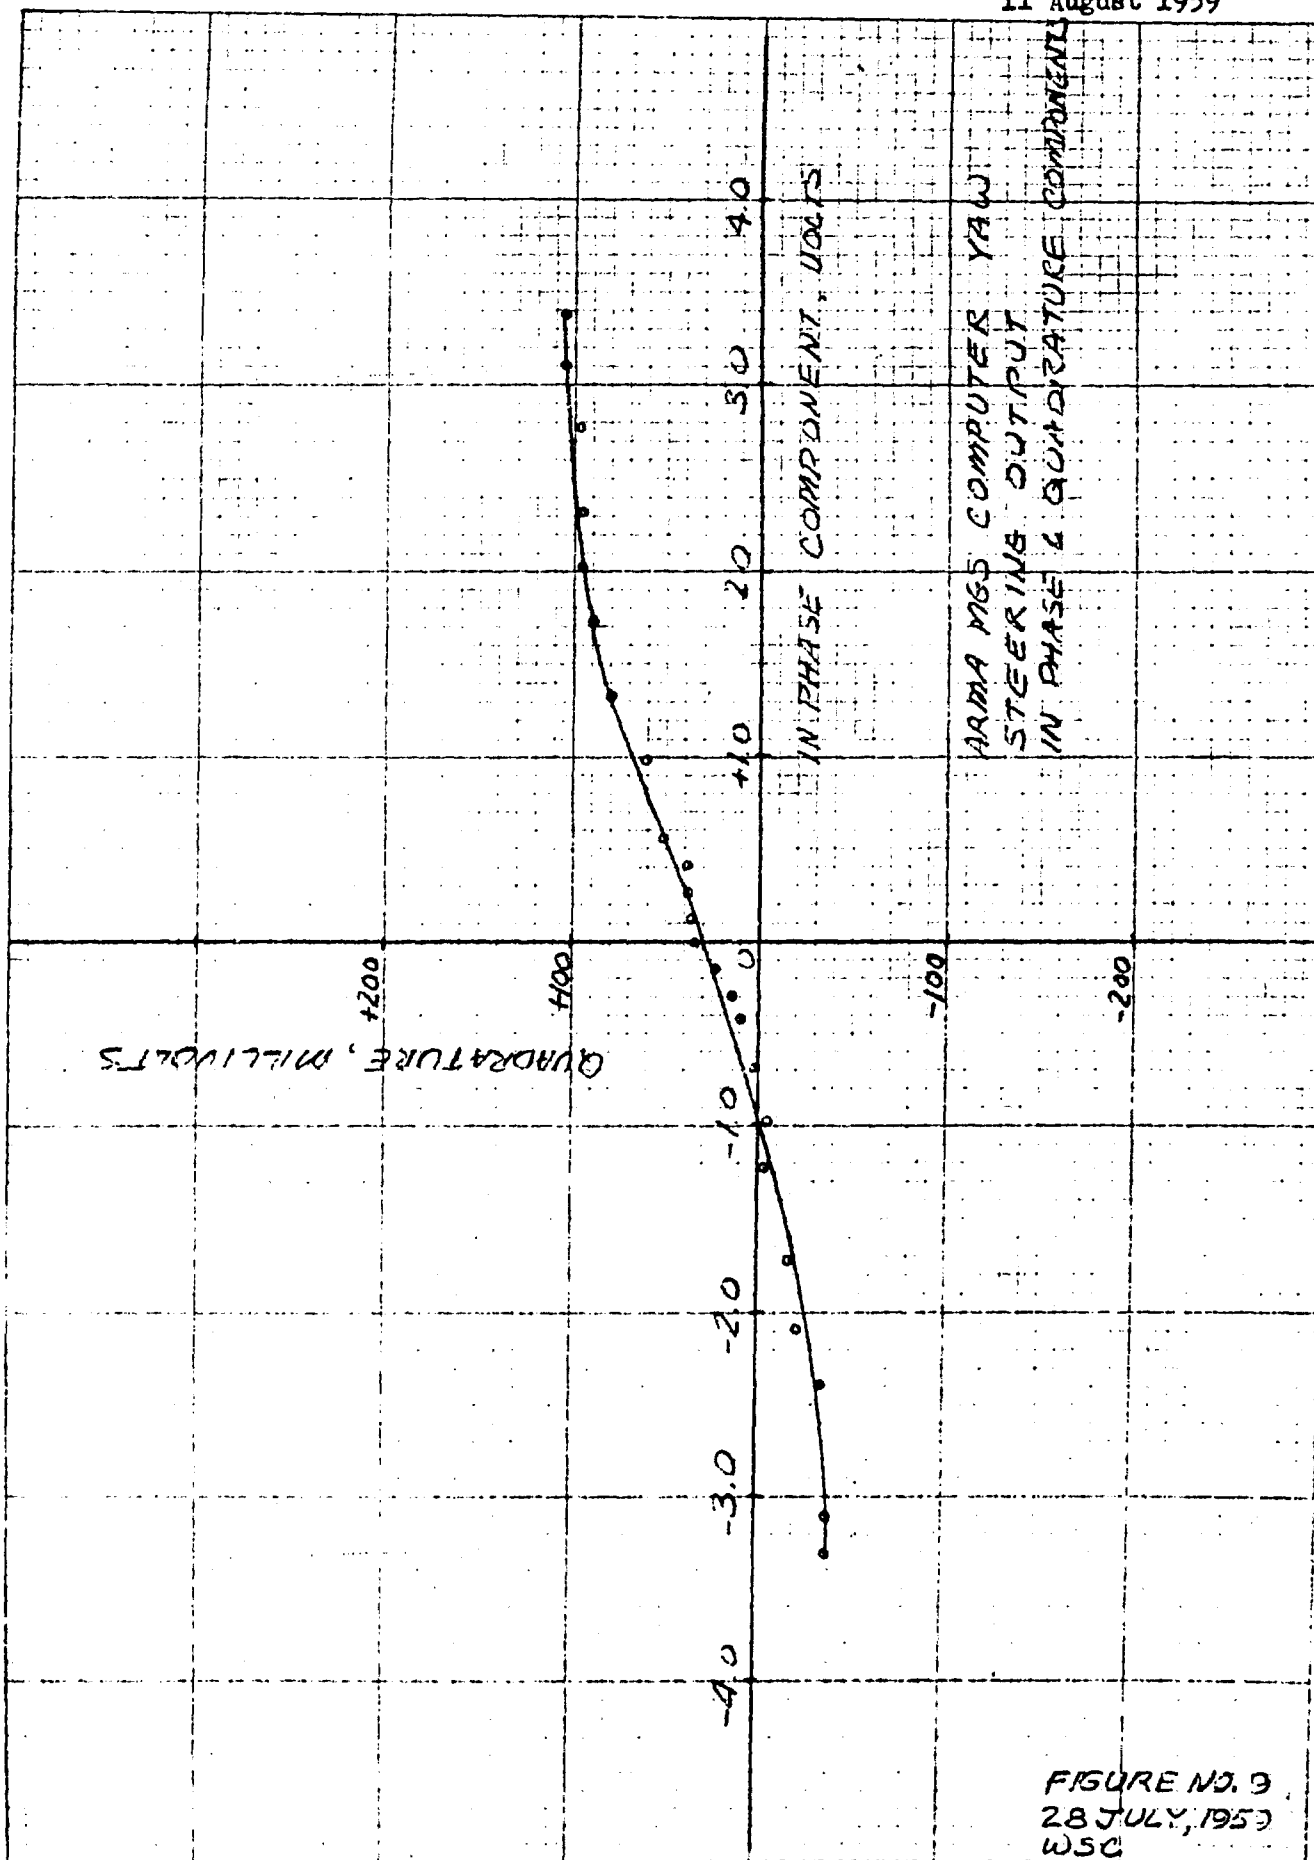


FIGURE NO. 9
 28 JULY, 1959
 WSC

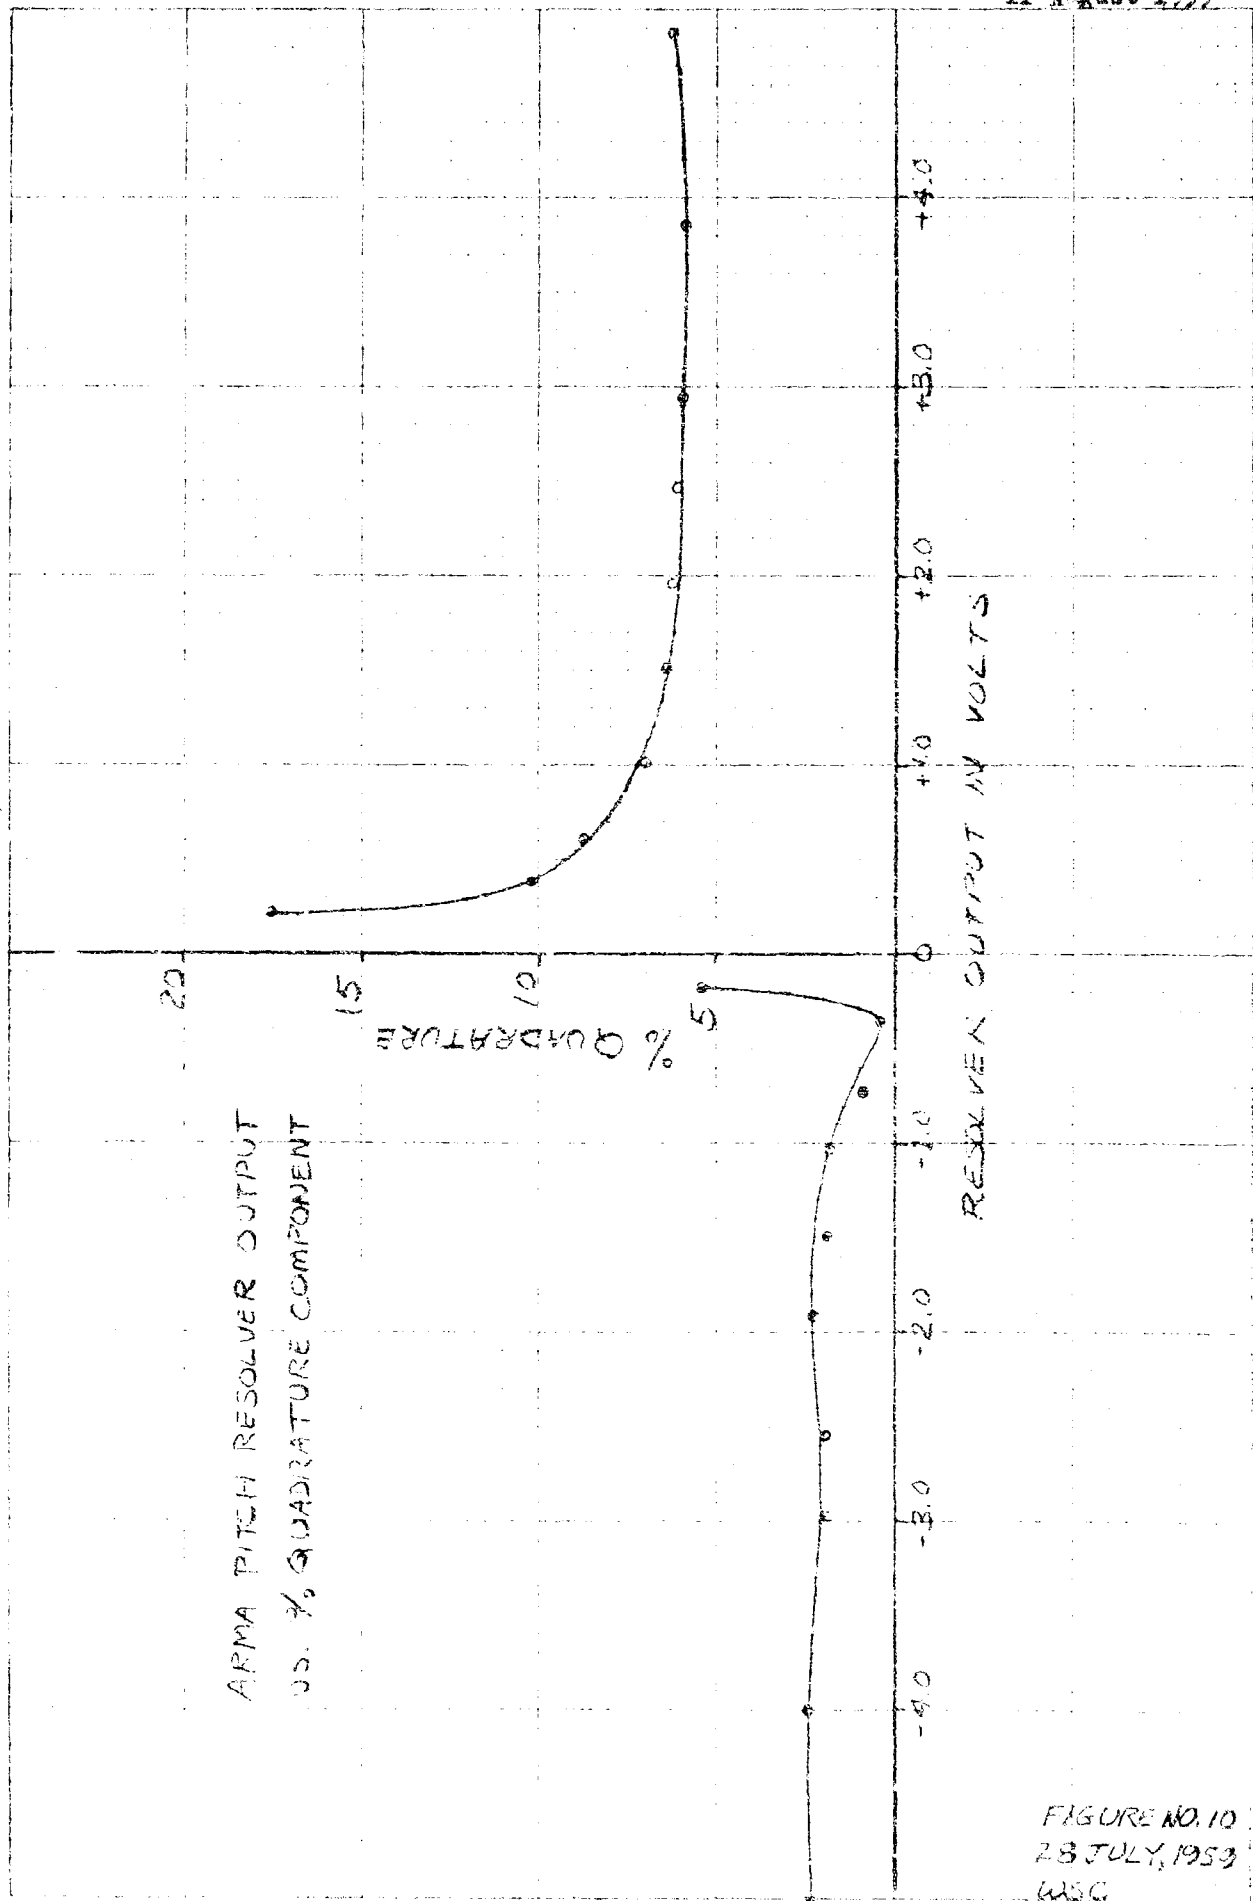


FIGURE NO. 10
28 JULY, 1953
WSC

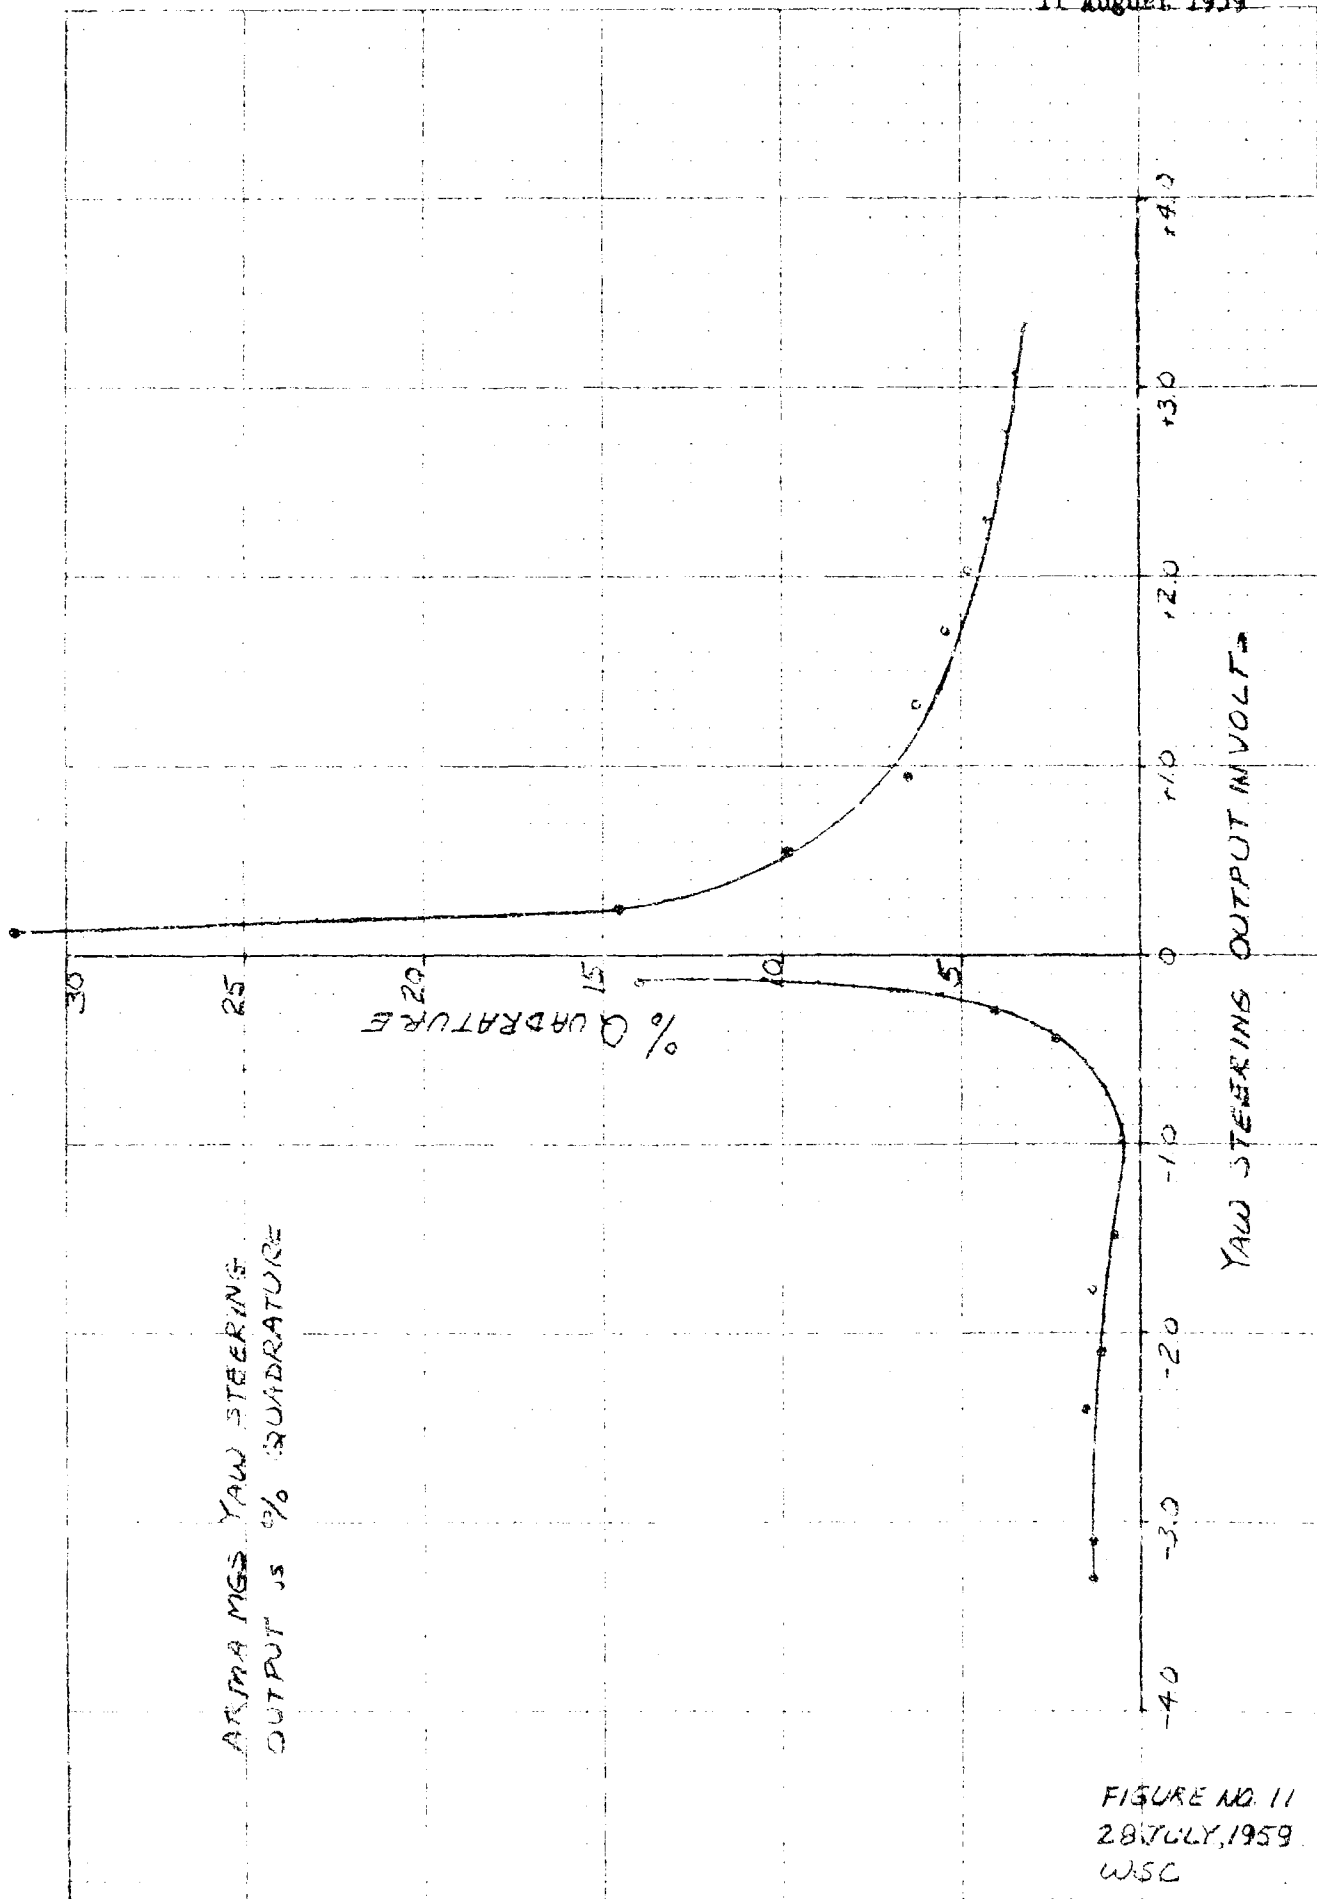


FIGURE NO. 11
 28 JULY, 1959
 WSC

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

PAGE 34

11 August 1959

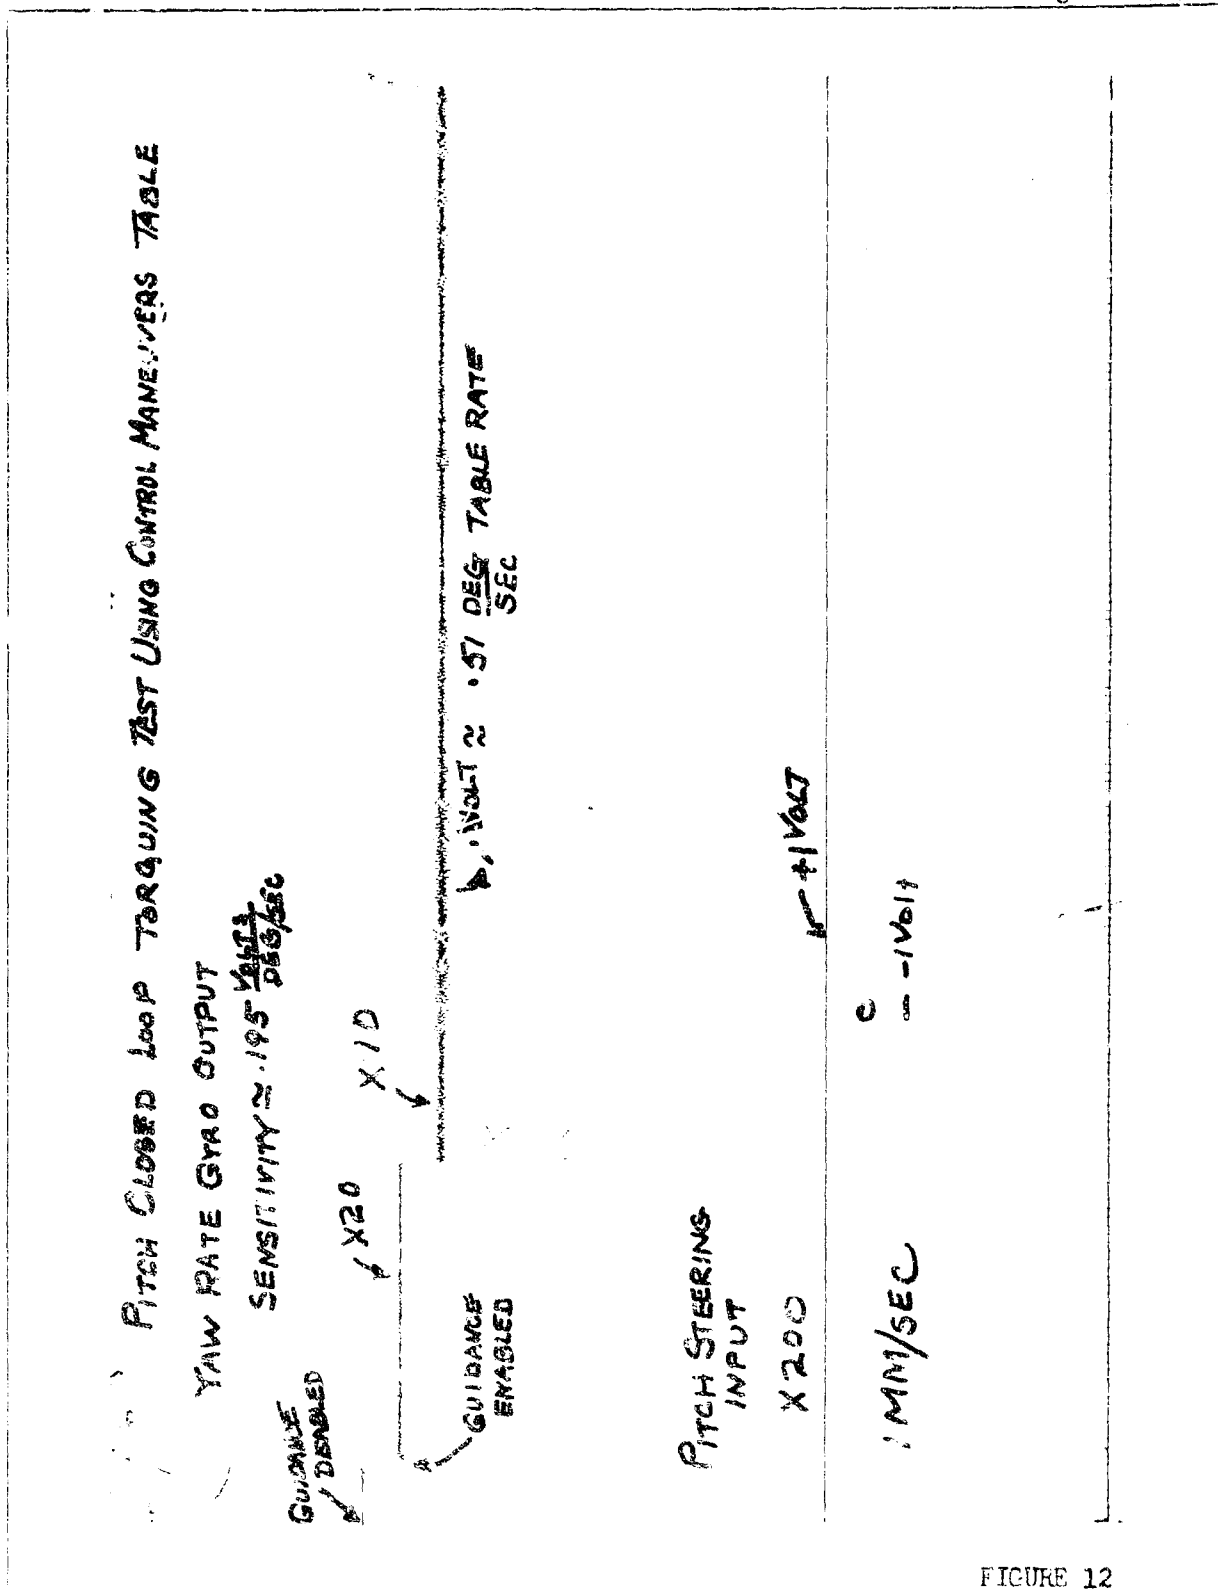


FIGURE 12

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR | ASTRONAUTICS

REPORT 7B 2124-1

PAGE 35

11 August 1959

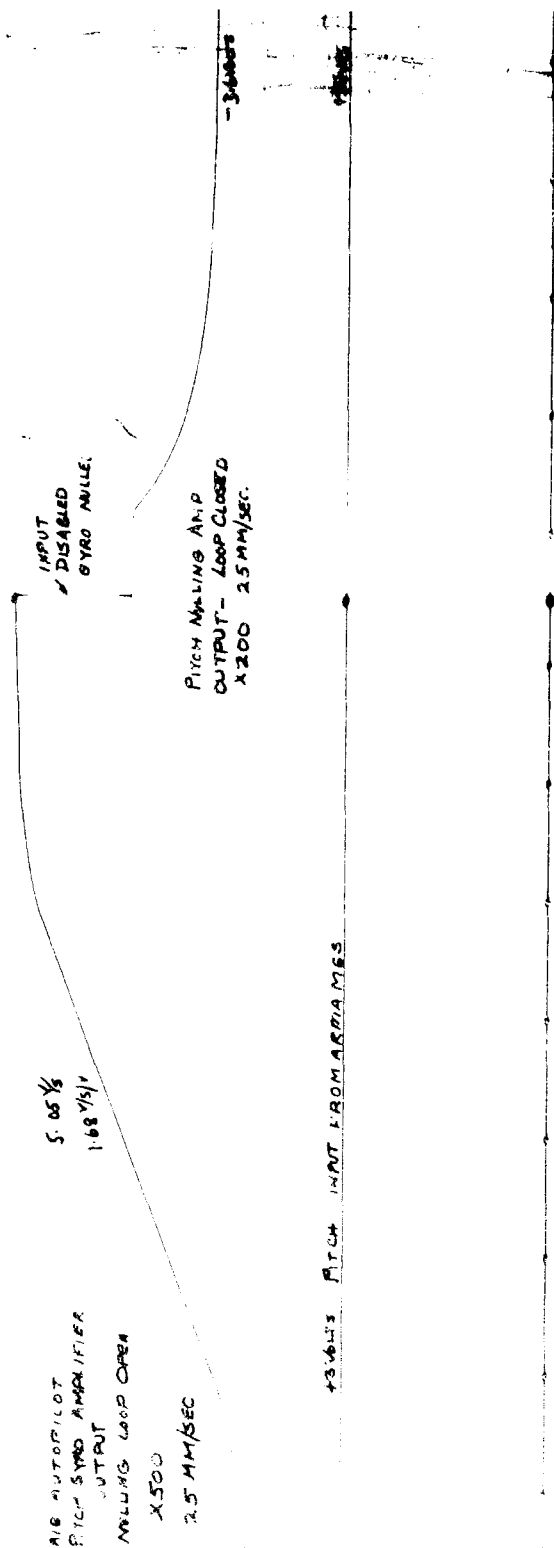


FIGURE 13

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

PAGE 37

11 August 1959

YAW CLOSED LOOP TRACKING TEST USING CONTROL MANEUVERS TABLE
TABLE OSCILLATING 2 CPS
GUIDANCE DISABLED
GUIDANCE ENABLED
YAW RATE GYRO OUTPUT X20
SENSITIVITY -- 195 VOLTS DEG/SEC
ARMA YAW STEERING INPUT X200
2.5 MM/SEC
24 VOLTS / 195 VOLTS = 1.24 DEG TABLE RATE / SEC
20 VOLTS AVERAGE 6.04 VOLTS P.P.S. 2.04 DEG/SEC
2 CPS
195 VOLTS AVERAGE
2.5 VOLTS AVERAGE

FIGURE 15

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

BLOCK DIAGRAM OF FLOATED RATE INTEGRATIVE GYRO

GYRO

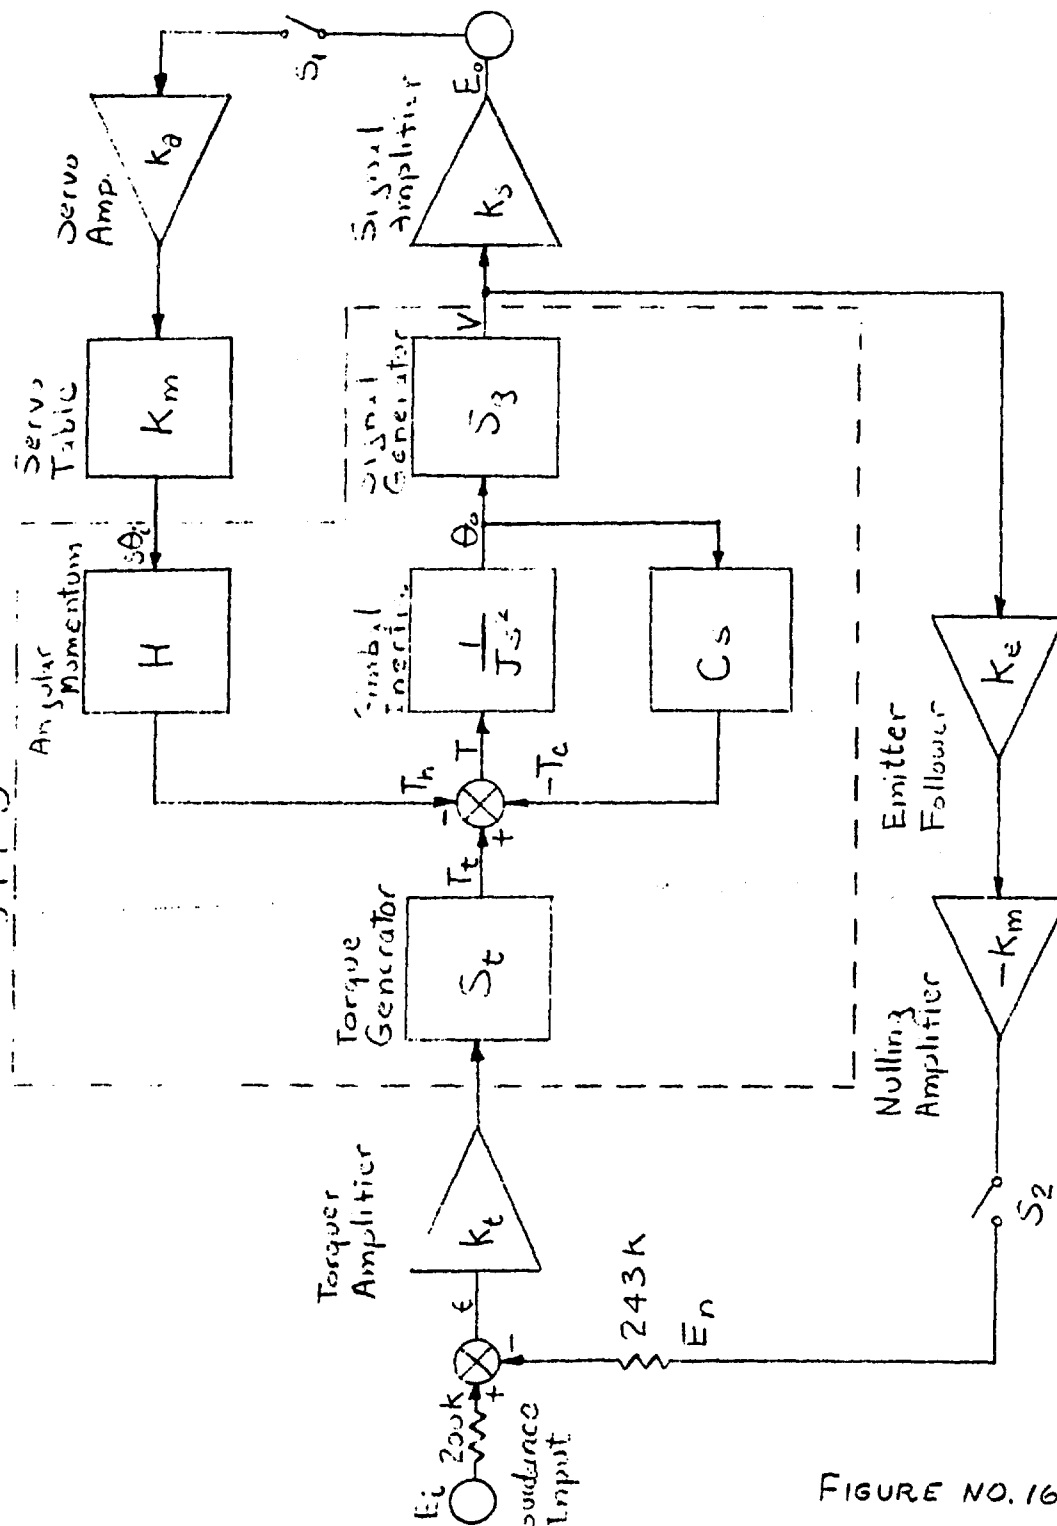


FIGURE NO. 16

PREPARED BY

J. S. Curry

DATE

7/28/59

CHECKED BY

DATE

REVISED BY

DATE

~~CONFIDENTIAL~~

CONVAIR. ASTRONAUTICS

REPORT 7B 2124-1

PAGE 39

11 August 1959

PITCH

Torquer Rate Calibration			Steering Input Tests			% Change Between Closed Servo Loop Torquing and Open Loop Torquing	
Input Voltage	Table Rate Deg/Sec	Steering Input Volts	Table Rate Deg/Sec	Closed Gyro Loop			Open Gyro Loop
				Mulling Amp Output Volts	Sig.Amp. Out Volts/Sec Rate		
+4.0	1.842	+4.0	1.870	-3.6	3.0	1.440	0.43%
+3.0	1.384	+3.0	1.434	-2.4	2.0	0.965	3.0%
+2.0	0.921	+2.0	0.937	-1.2	1.0	0.477	4.15%
+1.0	0.463	+1.0	0.458	+1.2	1.0	0.470	1.27%
-1.0	0.451	-1.0	0.476	+2.4	2.0	0.957	3.24%
-2.0	0.916	-2.0	0.927	+3.6	3.0	1.430	3.32%
-3.0	1.362	-3.0	1.384	+4.85	4.05	1.910	4.82%
-4.0	1.80	-4.0	1.822				

YAW

+3.0	1.285	+3.0	1.12	3.8	3.15	4.0	1.145	2.16%
+2.0	0.854	+2.0	0.820	2.3	1.92	3.0	0.86	4.88%
+1.0	0.428	+1.0	0.410	1.2	1.0	1.44	0.412	0.5%
+0.5	0.216	+0.5	0.205	0.6	0.5	0.72	0.205	0%
-0.5	0.215	-0.5	0.210	0.63	0.525	0.73	0.208	0.96%
-1.0	0.430	-1.0	0.411	1.2	1.0	1.5	0.428	4.14%
-2.0	0.865	-2.0	0.832	2.3	1.92	2.95	0.842	1.32%
-3.0	1.310	-3.0	1.19	3.5	2.92	4.25	1.210	1.68%

FIGURE 17

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR  ASTRONAUTICS

REPORT 7B 2124-1

PAGE 40

11 August 1959

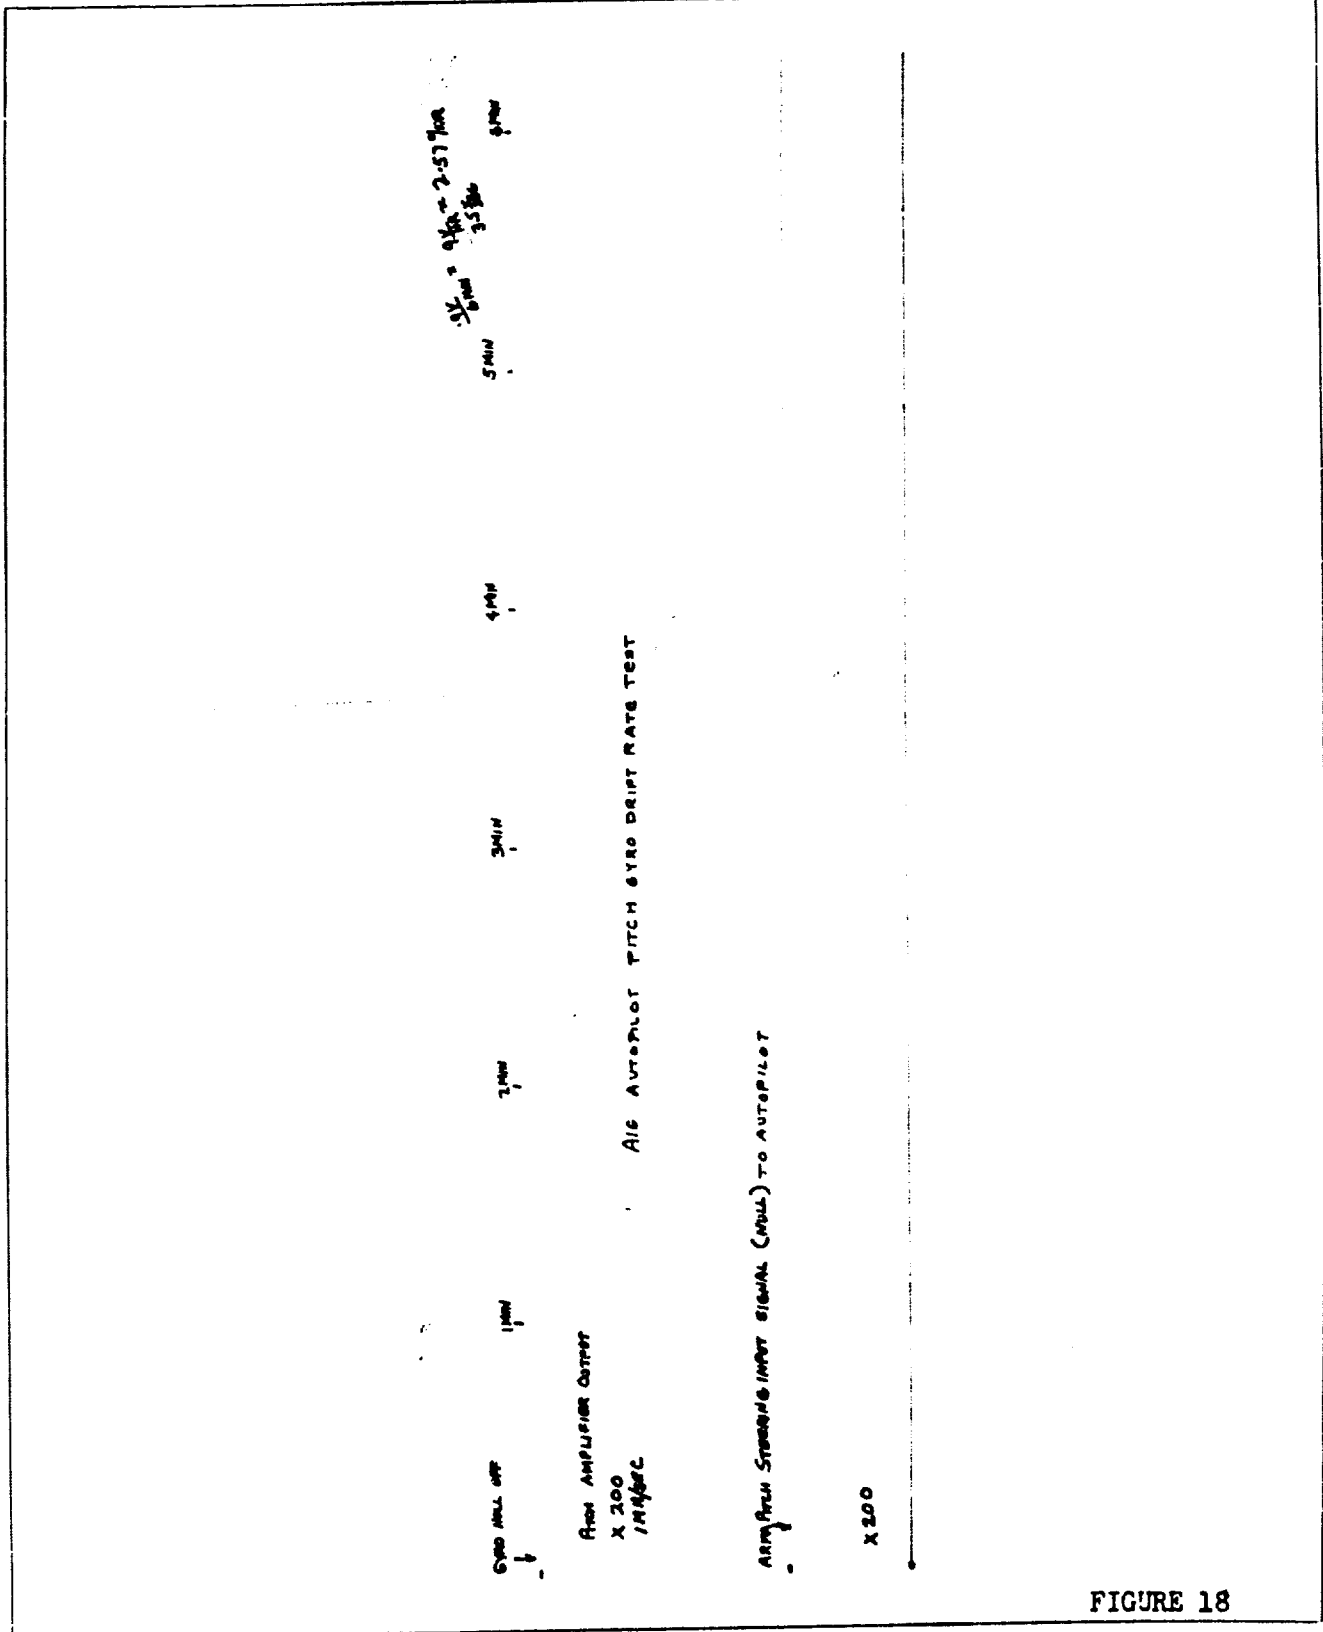


FIGURE 18

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

**THIS
PAGE
IS
MISSING
IN
ORIGINAL
DOCUMENT**

~~CONFIDENTIAL~~

CONVAIR  ASTRONAUTICS

REPORT 7B 2124-1

PAGE 42

11 August 1959

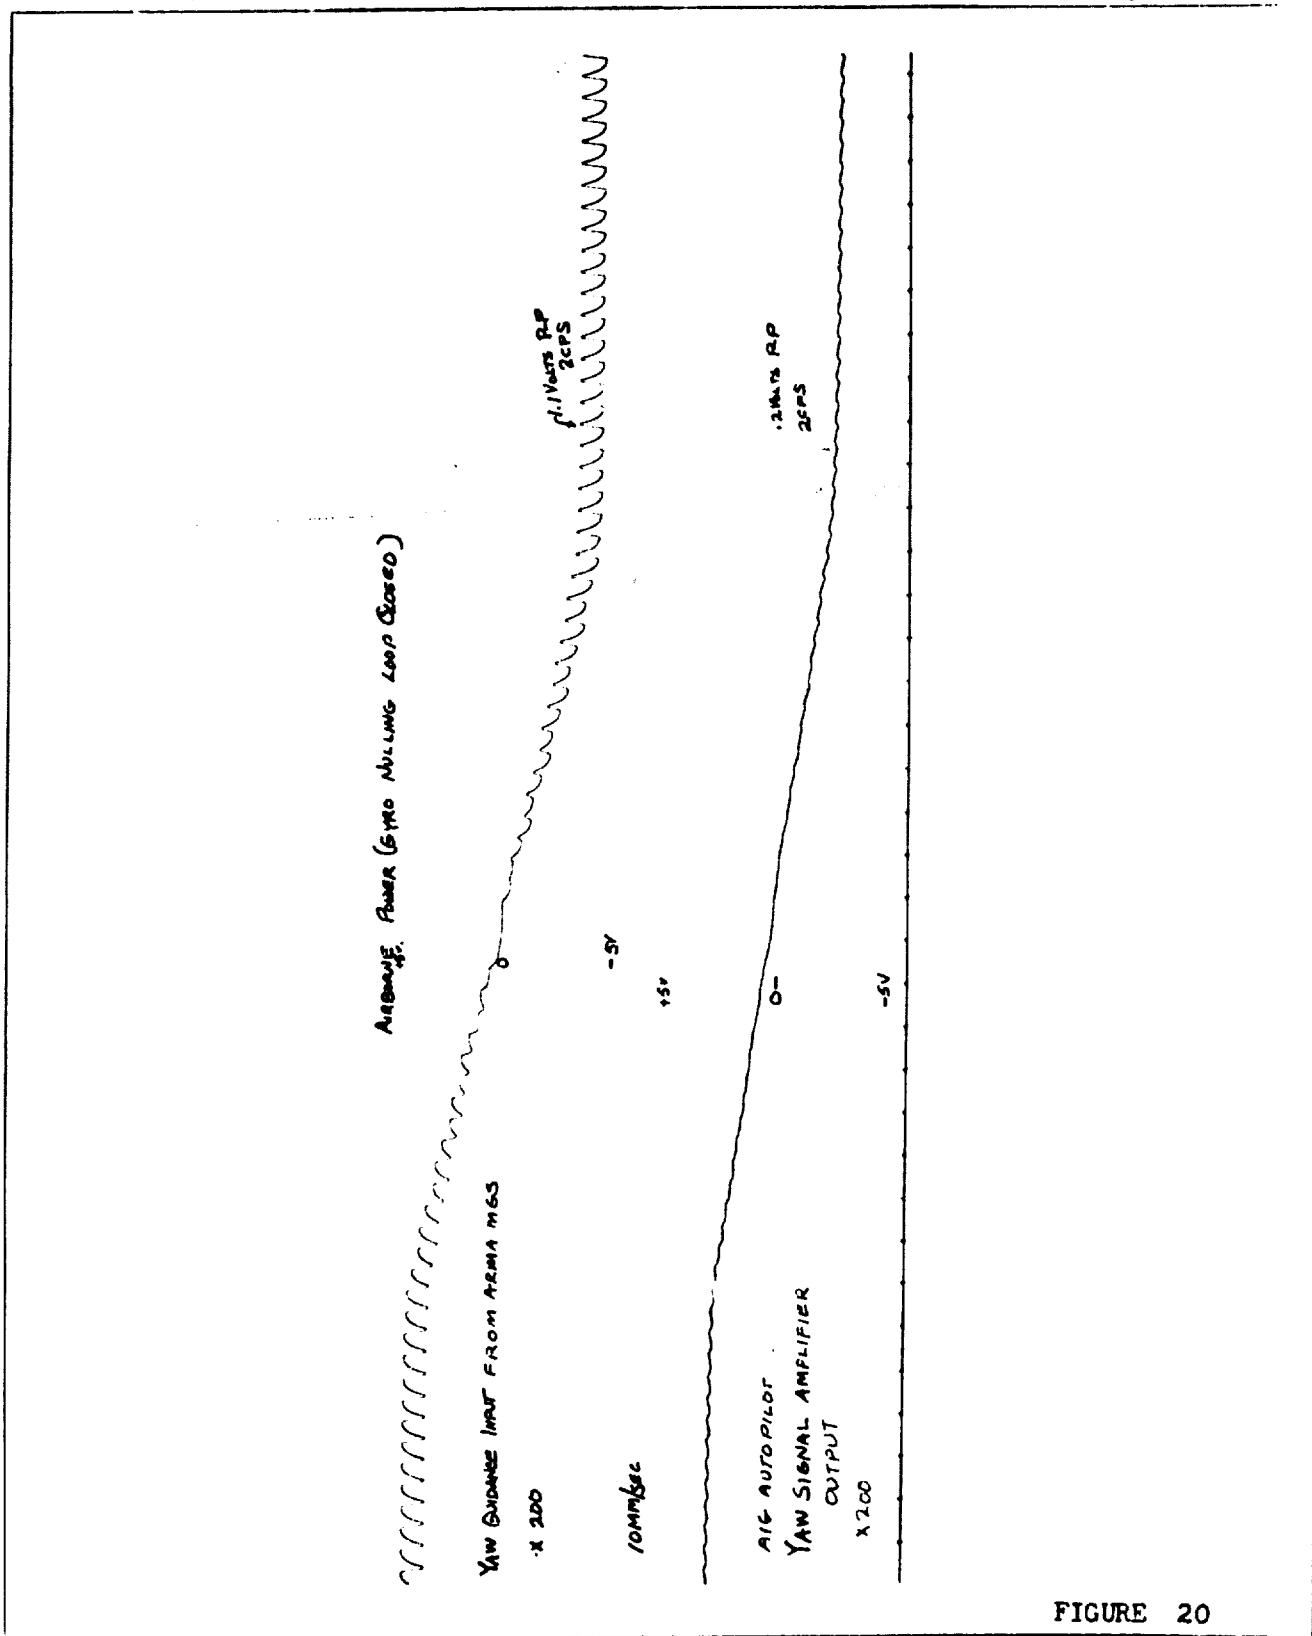


FIGURE 20

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

PAGE 43

11 August 1959

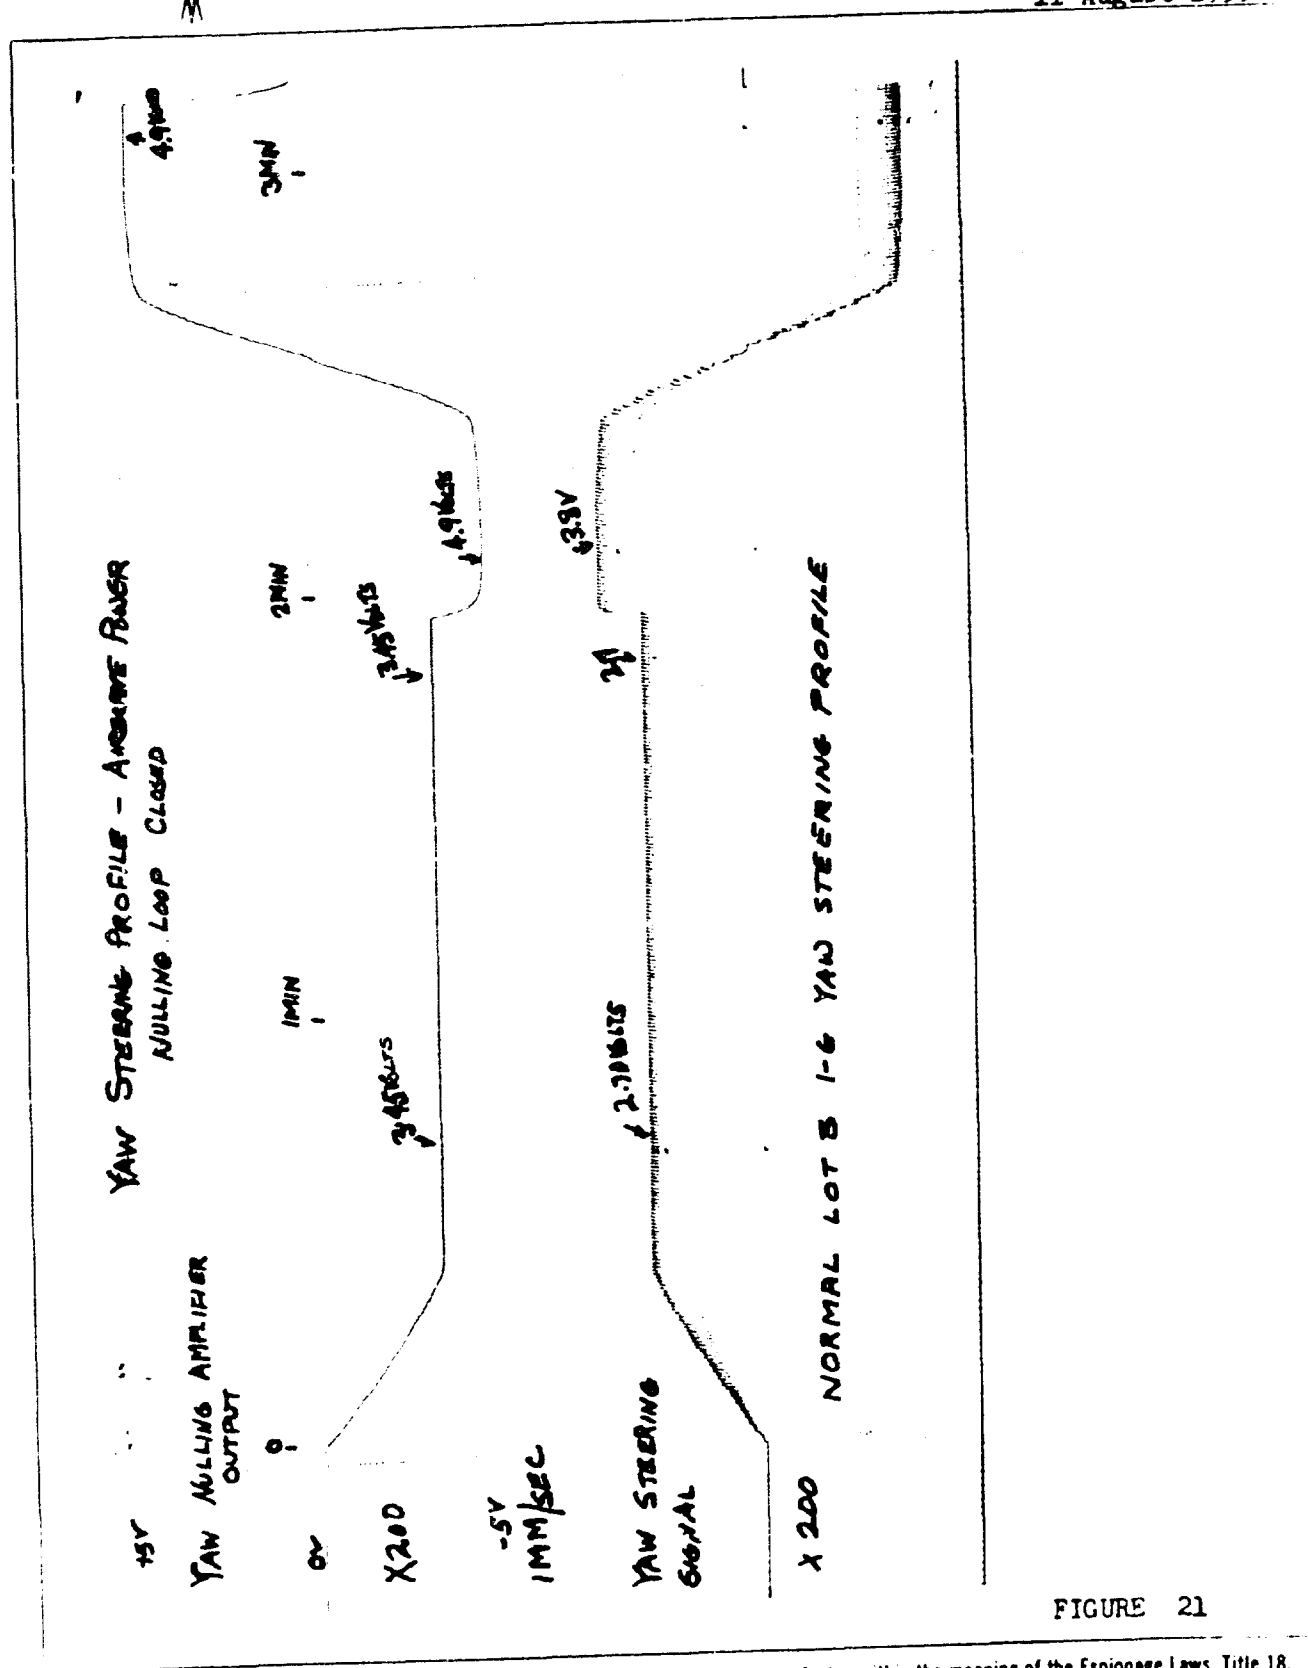


FIGURE 21

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR  ASTRONAUTICS

REPORT 7B 2124-1

PAGE 44

11 August 1959

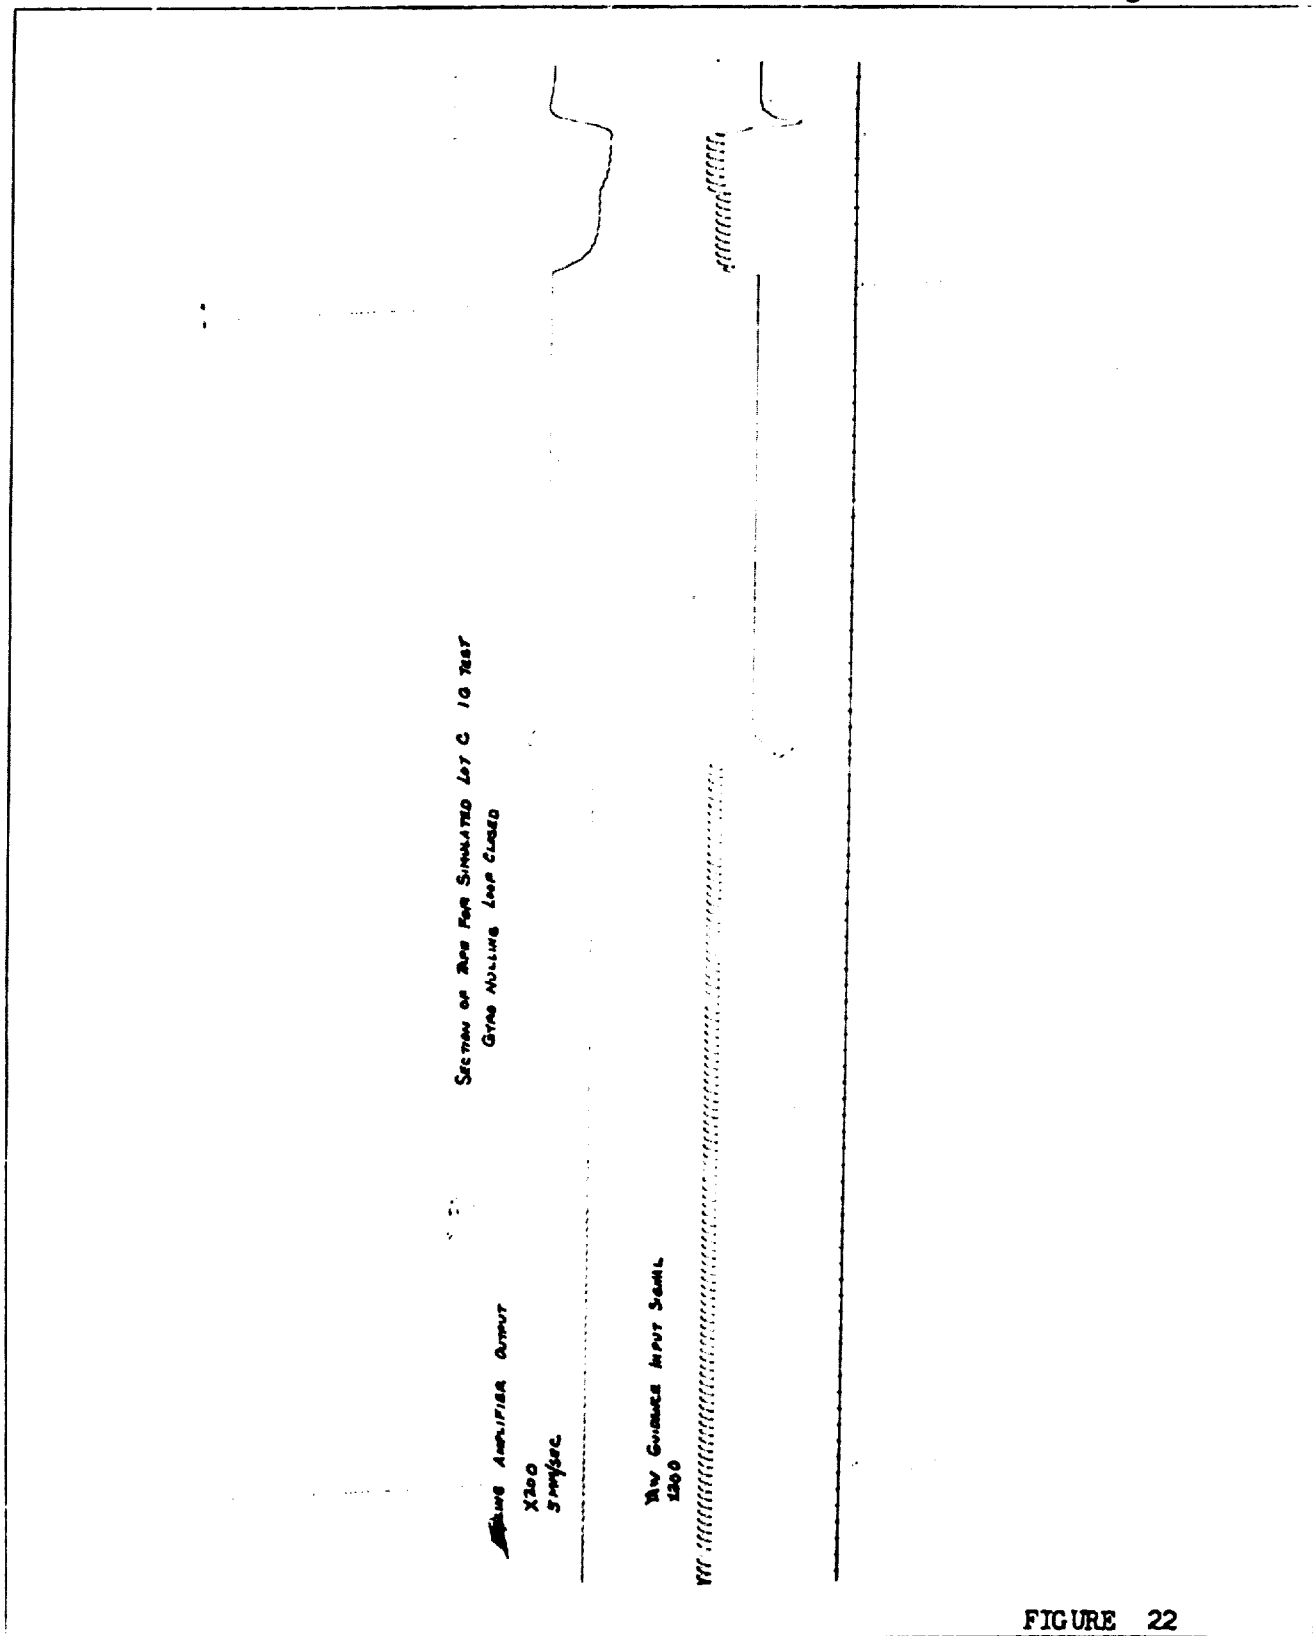


FIGURE 22

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

PAGE 45

11 August 1959

POWER CHANGE-OVER FROM GROUND TO AIRBORNE POWER
GYRO NULLING LOOP CLOSED (NO E-IONANCE SIGNAL)

AIRBORNE POWER

POWER CHANGE-OVER

CHANGE-OVER

TIMING REFERENCE
X2

GROUND POWER

25MM/SEC
SIG AUTOPILOT
YAW SIGNAL AMPLIFIER
OUTPUT
X20

FIGURE 23

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

PAGE 46

11 August 1959

POWER CHANGE-OVER FROM GROUND TO AIRBORNE POWER
(CARD NULLING LOOP OPEN; GUIDANCE DISABLED)

TIMING REFERENCE
X 2

GROUND POWER
CHANGE-OVER
AIRBORNE POWER

25 MM/SEC

RAW SIGNAL AMPLIFIER
OUTPUT

CHANGE-OVER

X 20

FIGURE 24

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

PAGE 47

11 August 1959

POWER CHANGE-OVER FROM GROUND TO AIRBORNE POWER
TIMING REFERENCE NULLING LOOP OPERATING GUIDANCE ENABLED

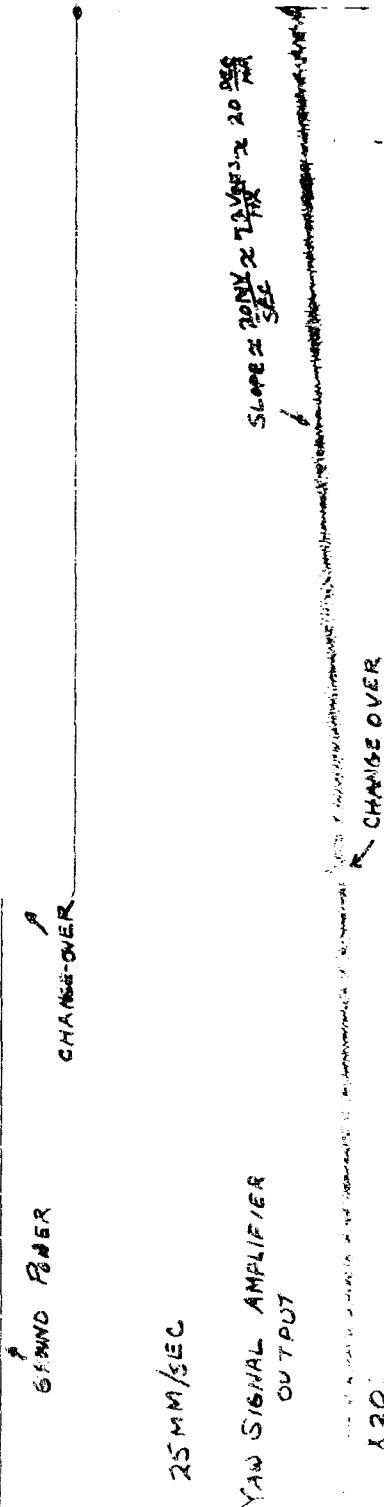


FIGURE 25

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ~~ASTRONAUTICS~~

REPORT 7B 2124-1

PAGE 48


11 August 1959

ARMA INERTIAL PLATFORM

Roll Resolver

Pitch Resolver

Azimuth Resolver

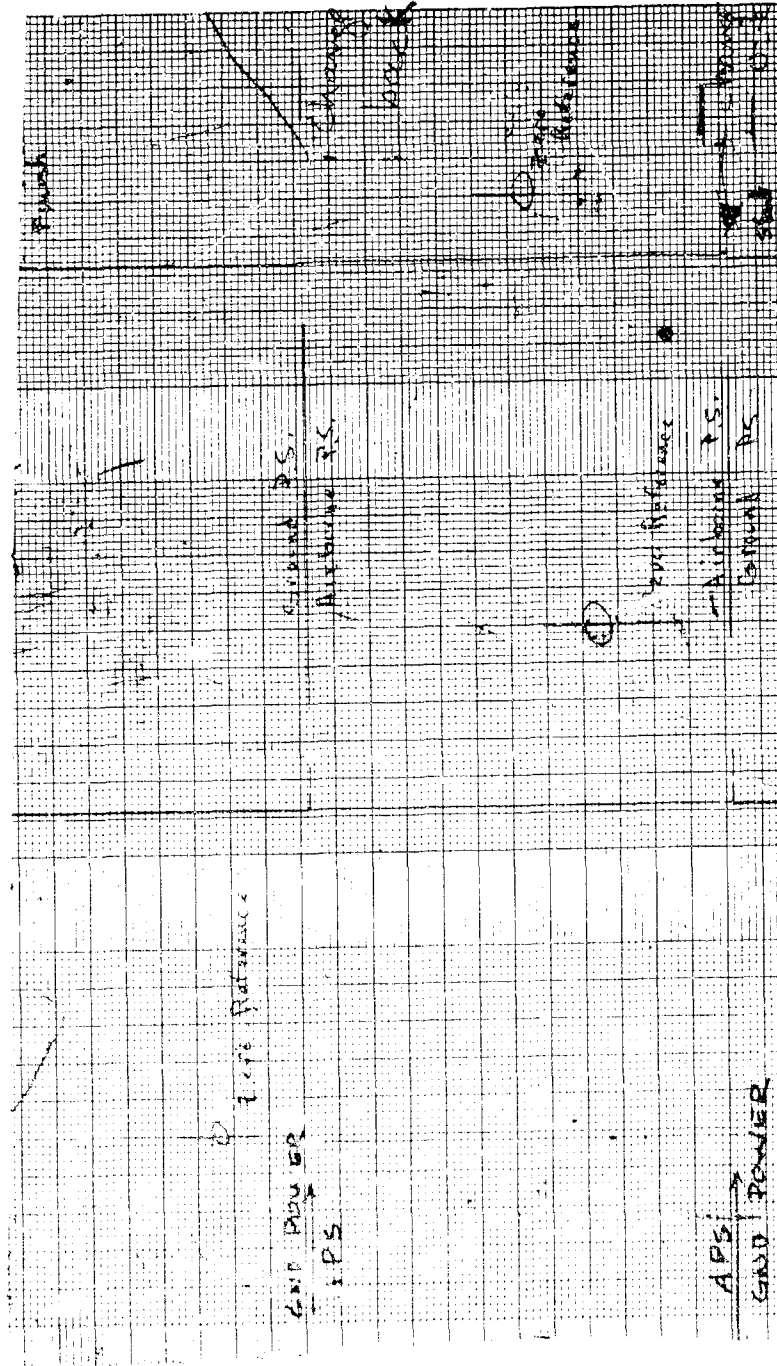

Sensitivity

Azimuth

Pitch

Roll

4 mv/mm

0.5 v/mm

5 mv/mm

Paper Speed 1 mm/sec.

Reference Phase T, to N

Dated 7 May 1959

FIGURE 26

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1


PAGE 49

11 August 1959

ARMA INERTIAL PLATFORM

Pitch Pendulum

Roll Pendulum

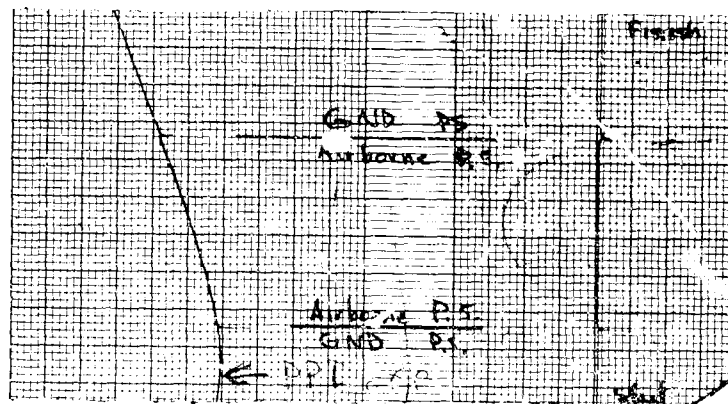

Pendulum Gradient	20 sec/mv
Sensitivity	1 mv/mm
Paper Speed	1 mm/sec.
Reference Phase	A to B
Earth Rotation Component about Y axis	8 degrees/hour
PPI Torquing Amplifier Off	

FIGURE 27

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, title 18, USC Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1


PAGE 50

11 August 1959

ARMA INERTIAL PLATFORM

Pitch Pendulum

Roll Pendulum

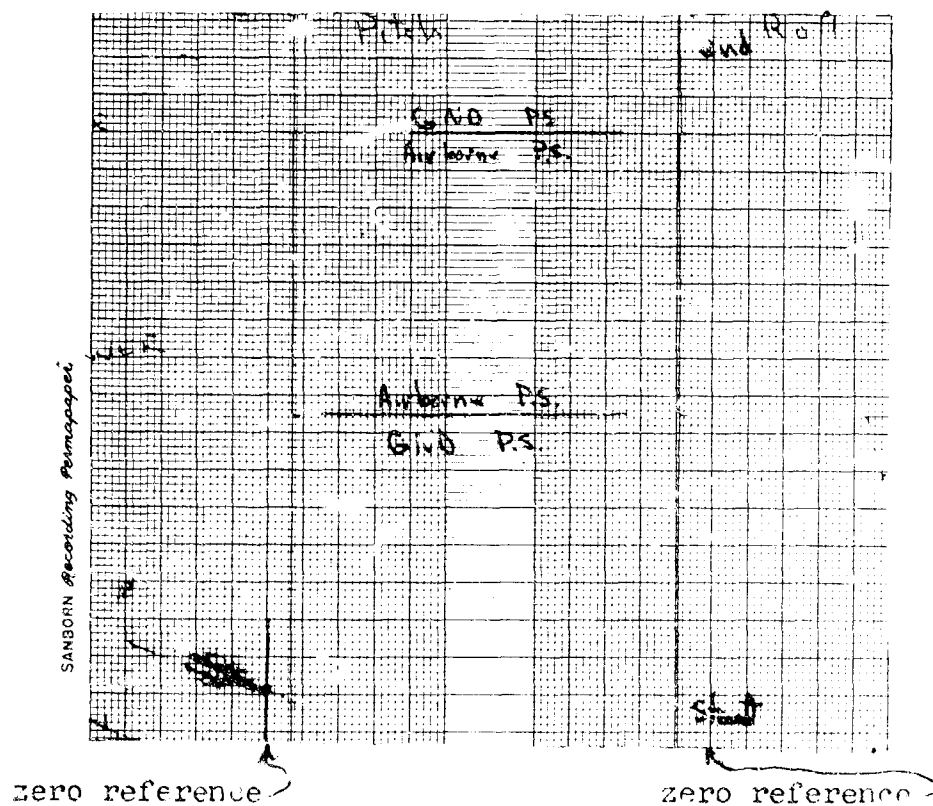

Pendulum Gradient	20 sec/mv
Sensitivity	1 mv/mm
Paper Speed	1 mm/sec
Reference Phase	A to B

FIGURE 28

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

PAGE 51

11 August 1959

ARMA MCS SERVO AMPLIFIER OUTPUTS

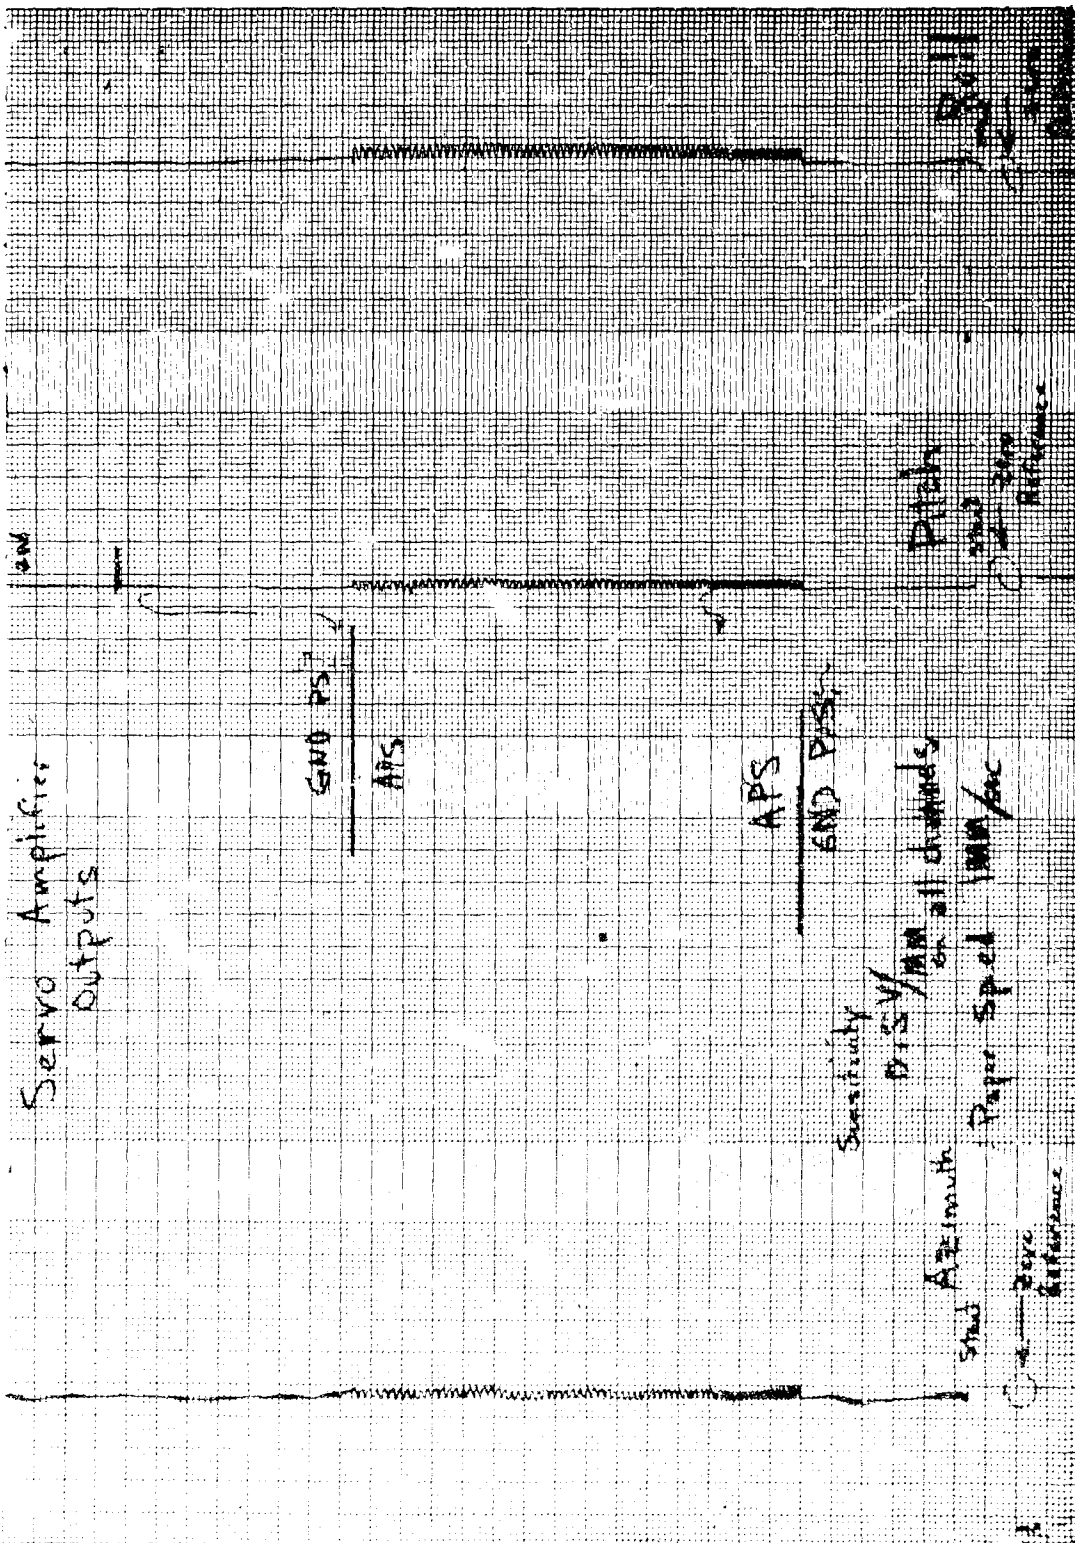


FIGURE 29

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18 USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

CONVAIR ASTRONAUTICS

REPORT 7B 2124-1

PAGE 52

11 August 1959

COMPUTER POWER SUPPLY VOLTAGES

NOMINAL VOLTAGE	OUTPUT - DC VOLTAGE	GROUND P.S. AC VOLTAGE	OUTPUT - DC VOLTAGE	AIRBORNE P.S. AC VOLTAGE
-50	-49.0	0.3	-49.0	0.7
-16.5	-15.8	0.2	-15.8	0.19
-10	-10.1	0.16	-10.4	0.28
+3.3	+ 3.1	0.12	+ 3.1	1.5
+4	+ 3.9	0.19	+ 3.8	0.3
+38	+39.5	0.3	+39	0.36
+28	+28	0.27	+28	0.3

LINE VOLTAGE

GROUND POWER SUPPLY

AIRBORNE POWER SUPPLY

Phase T ₁ - N	115	114.8
Phase T ₂ - N	117	116.3
Phase T ₃ - N	116.6	116.2

CONTROL DC VOLTAGES

NOMINAL	OUTPUT - GND PS		OUTPUT APS	
	DC VOLTS	AC VOLTS	DC VOLTS	AC VOLTS
Gyro Magnet Supply 4.5VDC 8VAC	4.0	8.7	4.2	8.8
Gyro Torquer Voltage 3.5VDC, 3.5VDC	3.8	0.16	3.7	0.16
Preamplifier Voltage -22.5VDC	-22	0.16	-22	0.16
Accelerometer Supply -22.5V	-22	5MV	-22	5MV
Amplifier Output Supply 35V Unfiltered	23	11.4	23	11.2

LINE VOLTAGE

GROUND POWER SUPPLY

AIRBORNE POWER SUPPLY

Phase T ₁ - N	116.3	114.9
Phase T ₂ - N	117.4	116.2
Phase T ₃ - N	117.4	116.1

FIGURE 30

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

11 August 1958



65-6-9

ENCLOSURE 31

CONVAIR-ARMA BENCH COMPATIBILITY

REF NO. 1		PHASE A				PHASE B			
		V	I	W	P.F.	V	I	W	P.F.
INVERTER	BEFORE	115.6	5.8	600	0.896	116.3	4.84	500	0.889
	AFTER	113.9	5.75	590	0.90	115.5	4.7	500	0.92
ARMA		114.5	3.8	420	0.966	115.6	3.6	400	0.96
AUTO PILOT		115.0	1.115	90	0.703	115.9	0.813	37.5	0.399
SIMULATED		114.5	0.84	82.5	0.86	115.4	0.735	72.5	0.855
TOTAL:		115	5.51	592.5	0.92	115	4.75	510.0	0.894
REF NO. 2									
INVERTER	BEFORE	114.0	5.92	615	0.911	115.1	4.55	470	0.897
	AFTER	113.4	5.90	610	0.910	114.6	4.50	465	0.903
ARMA		113.1	3.72	404	0.96	114.4	3.55	374	0.92
AUTO PILOT		113.4	1.33	123.5	0.818	115.0	0.195	15.5	0.692
SIMULATED		115.4	0.83	81	0.845	114.4	0.735	71.5	0.851
TOTAL:		115	5.74	608.5	0.924	115	4.44	461.0	0.904
SYSTEM LOAD WITH SIMULATED LOAD DUMPED									
INVERTER		114.5	4.8	511	0.93	115.0	3.86	420	0.945

COMPATIBILITY LOAD ANALYSIS

PHASE C						TOTAL 3 PHASE WATTS					
P.F.	V	I	W	P.F.	WATTS	VT ₁ -T ₂	VT ₃ -T ₃	VT ₃ -T ₁	V _{de}	I _{de}	
0.889	115.9	5.72	555	0.837	1655	200.4	200.7	200.4	27.9	116	
0.92	114.6	5.65	540	0.836	1630						
0.96	115.1	3.8	390	0.892	1210						
0.399	115.0	1.375	47.5	0.302	175						
0.855	114.9	1.175	106	0.785	261						
0.894	115	6.05	543.5	0.784	1646						
0.897	114.6	5.82	550	0.825	1635	200.8	201.4	200.9	27.8	126	
0.903	114.0	5.8	545	0.825	1620	195.8	196.4	196	27.8	114	
0.92	113.8	3.85	380	0.870	1158						
0.692	114.2	0.632	40	0.554	179						
0.851	113.8	1.163	104.5	0.790	257						
0.904	115	5.5	524.5	0.825	1594						
0.945	115	4.4	440	0.87	1371	198	199	198.9	27.9	100	
NOTES:											
1. Measured Voltages are $\pm 1\%$											
2. Measured Currents are $\pm 2\%$											
3. Measured Watts are $\pm 2\%$											

FIGURE 12

B

~~CONFIDENTIAL~~

CONVAIR  ASTRONAUTICS

REPORT 7B 2124-1

PAGE 55

11 August 1959

WAVE FORMS

ϕA

ϕB

ϕC

TOTAL SYSTEM
LOAD

SIMULATED
LOAD OFF

FIGURE 33

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, USC, Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

~~CONFIDENTIAL~~

PHASE											HARMONIC	
	1	2	3	4	5	6	7	8	9	10	11	
	400	800	1200	1600	2000	2400	2800	3200	3600	4000	4400	
RUN NO. 1 INVERTER VOLTAGE - R.M.S. VALUES												
A	110	0.34	0.38	0.20	0.50	0.16	2.50	0.27	0.48	0.35	2.50	
B	107	0.30	0.60	0.23	0.63	0.06	2.0	0.24	0.54	0.30	2.0	
C	109	0.26	0.22	0.20	0.60	0.0	1.9	0.35	0.04	0.36	3.0	
RUN NO. 2 INVERTER VOLTAGE												
A	104	0.28	0.37		0.58		2.15		0.30		2.7	
B	105	0.25	0.50		0.67		1.85		0.33		2.39	
C	104	0.24	0.22		0.72		1.75		0.10		2.80	
RUN NO. 1 INVERTER CURRENT - R.M.S. VALUES												
A	5.70	0.14	0.33	0.072	0.054	0.024	0.16	0.01	0.044	0.038	0.088	
B	4.34	0.12	0.26	0.072	0.04	0.004	0.136	0.012	0.03	0.008	0.18	
C	4.72	0.114	0.21	0.046	0.08	0.024	0.096	0.008	0.028	0.024	0.23	
RUN NO. 2 INVERTER CURRENT												
A	5.40	0.136	0.30		0.072		0.068		0.036		0.116	
B	4.00	0.12	0.48		0.03		0.124		0.016		0.208	
C	5.20	0.108	0.20		0.078		0.116		0.024		0.23	
RUN NO. 1 INVERTER VOLTAGE - % of FUNDAMENTAL (R.M.S.)												
A	100	0.31	0.346	0.182	0.455	0.145	2.27	0.246	0.437	0.318	2.27	C
B	100	0.28	0.56	0.215	0.589	0.056	1.87	0.224	0.505	0.28	1.87	C
C	100	0.238	0.202	0.184	0.55	0	1.745	0.321	0.037	0.33	2.75	C
RUN NO. 2 INVERTER VOLTAGE												
A	100	0.269	0.356		0.558		2.065		0.288		2.6	
B	100	0.248	0.276		0.638		1.905		0.314		2.28	
C	100	0.230	0.212		0.692		1.68		0.096		2.69	
RUN NO. 1 INVERTER CURRENT - % of FUNDAMENTAL (R.M.S.)												
A	100	2.46	5.8	1.26	0.948	0.421	2.81	0.175	0.773	0.676	1.54	0
B	100	2.76	6.0	1.66	0.92	0.092	3.13	0.276	0.69	0.184	4.14	0
C	100	2.42	4.45	1.03	1.69	0.508	2.93	0.169	0.593	0.508	4.87	1
RUN NO. 2 INVERTER CURRENT												
A	100	2.52	5.56		1.33		1.26	0.666		2.15		
B	100	3.00	12.0		0.75		3.1	0.4		5.2		
C	100	2.57	5.76		1.86		2.76	0.571		5.68		
HARMONIC CONTENT - VOLTAGE R.M.S.												
RUN NO. 1 $\left[\sum_{2}^{10} V^2 \right]^{\frac{1}{2}}$ $\left[\sum_{11}^{20} V^2 \right]^{\frac{1}{2}}$ $\left[\sum_{2}^{20} V^2 \right]^{\frac{1}{2}}$												
A	0.024 V fundamental			0.025 V Fund.			0.035V Fund.					
B	0.022 V Fund.			0.023 V Fund.			0.031V Fund.					
C	0.021 V Fund.			0.030 V Fund.			0.035V Fund.					

11 August 1959

COMP. UTILITY HARMONIC ANALYSIS

HARMONIC

METERED

11 4400	12 4800	13 5200	14 5600	15 6000	16 6400	17 6800	18 7200	19 7600	20 8000	R.M.S. SUM	TOTAL VALUES
2.50	0.09	1.68	0.20	0.22	0.13	0.50	0.20	0.48	0.23	110.07	before/ 115.6/ 112.9
2.0	0.2	0.53	0.28	0.18	0.11	0.50	0.28	0.78	0.24	107.05	116.9/ 117.2
3.0	0.14	1.00	0.04	0.12	0.09	0.60	0.07	0.40	0.05	109.07	116.2/ 113.4
2.7										104.06	113.4/ 112.5
2.39										105.05	117.6/ 113.8
2.80										104.06	117.4/ 113.2
0.088	0.02	0.088	0.01	0.01	0.006	0.006	0.004	0.028	0.002	5.70	6.12/ 5.9
0.18	0.02	0.092	0.016	0.016	0.006	0.044	0.006	0.040	0.004	4.37	4.55/ 4.5
0.23	0	0.064	0.004	0.008	0.004	0.024	0.004	0.018	0.002	4.74	6.0/ 5.8
0.116										5.41	5.9/-
0.208										4.04	4.5/-
0.23										5.21	5.3/-
2.27	0.082	0.619	0.182	0.20	0.118	0.455	0.182	0.436	0.209		105/ 102.5
1.87	0.187	0.495	0.261	0.168	0.103	0.467	0.262	0.73	0.224		109/ 106.7
2.75	0.128	0.92	0.037	0.110	0.083	0.55	0.064	0.367	0.046		106.6/ 104
2.6											109/108
2.28											109/ 103.2
2.69											109.5/ 108.9
1.54	0.351	1.54	0.175	0.175	0.105	0.105	0.07	0.492	0.0351		107.2/ 103.5
4.14	0.46	2.12	0.368	0.368	0.138	1.01	0.138	0.92	0.092		200/ 103.5
4.87	0	1.36	0.085	0.169	0.085	0.508	0.085	0.381	0.042		127/123
											109/-
											112/-
											138/-

NOTES:

1. Harmonic readings are $\pm 5\%$

FIGURE 24

B

EXTERNAL

ϕA VOLTS

115.5 V

ϕB VOLTS

ϕC VOLTS

ϕA AMPS

5.6 A

ϕB AMPS

ϕC AMPS

INVERTER ϕA VOLTS

116.2 V

100 MILLISECONDS

$V_{T_1-T_2}$

$V_{T_2-T_3}$

$V_{T_3-T_1}$

ARMA-AUTOPILOT DC VOLTS

INVERTER DC VOLTS

INVERTER AMPS

FIG

EXTERNAL


INTERNAL


115.4V

115.4V

B

FIGURE 35

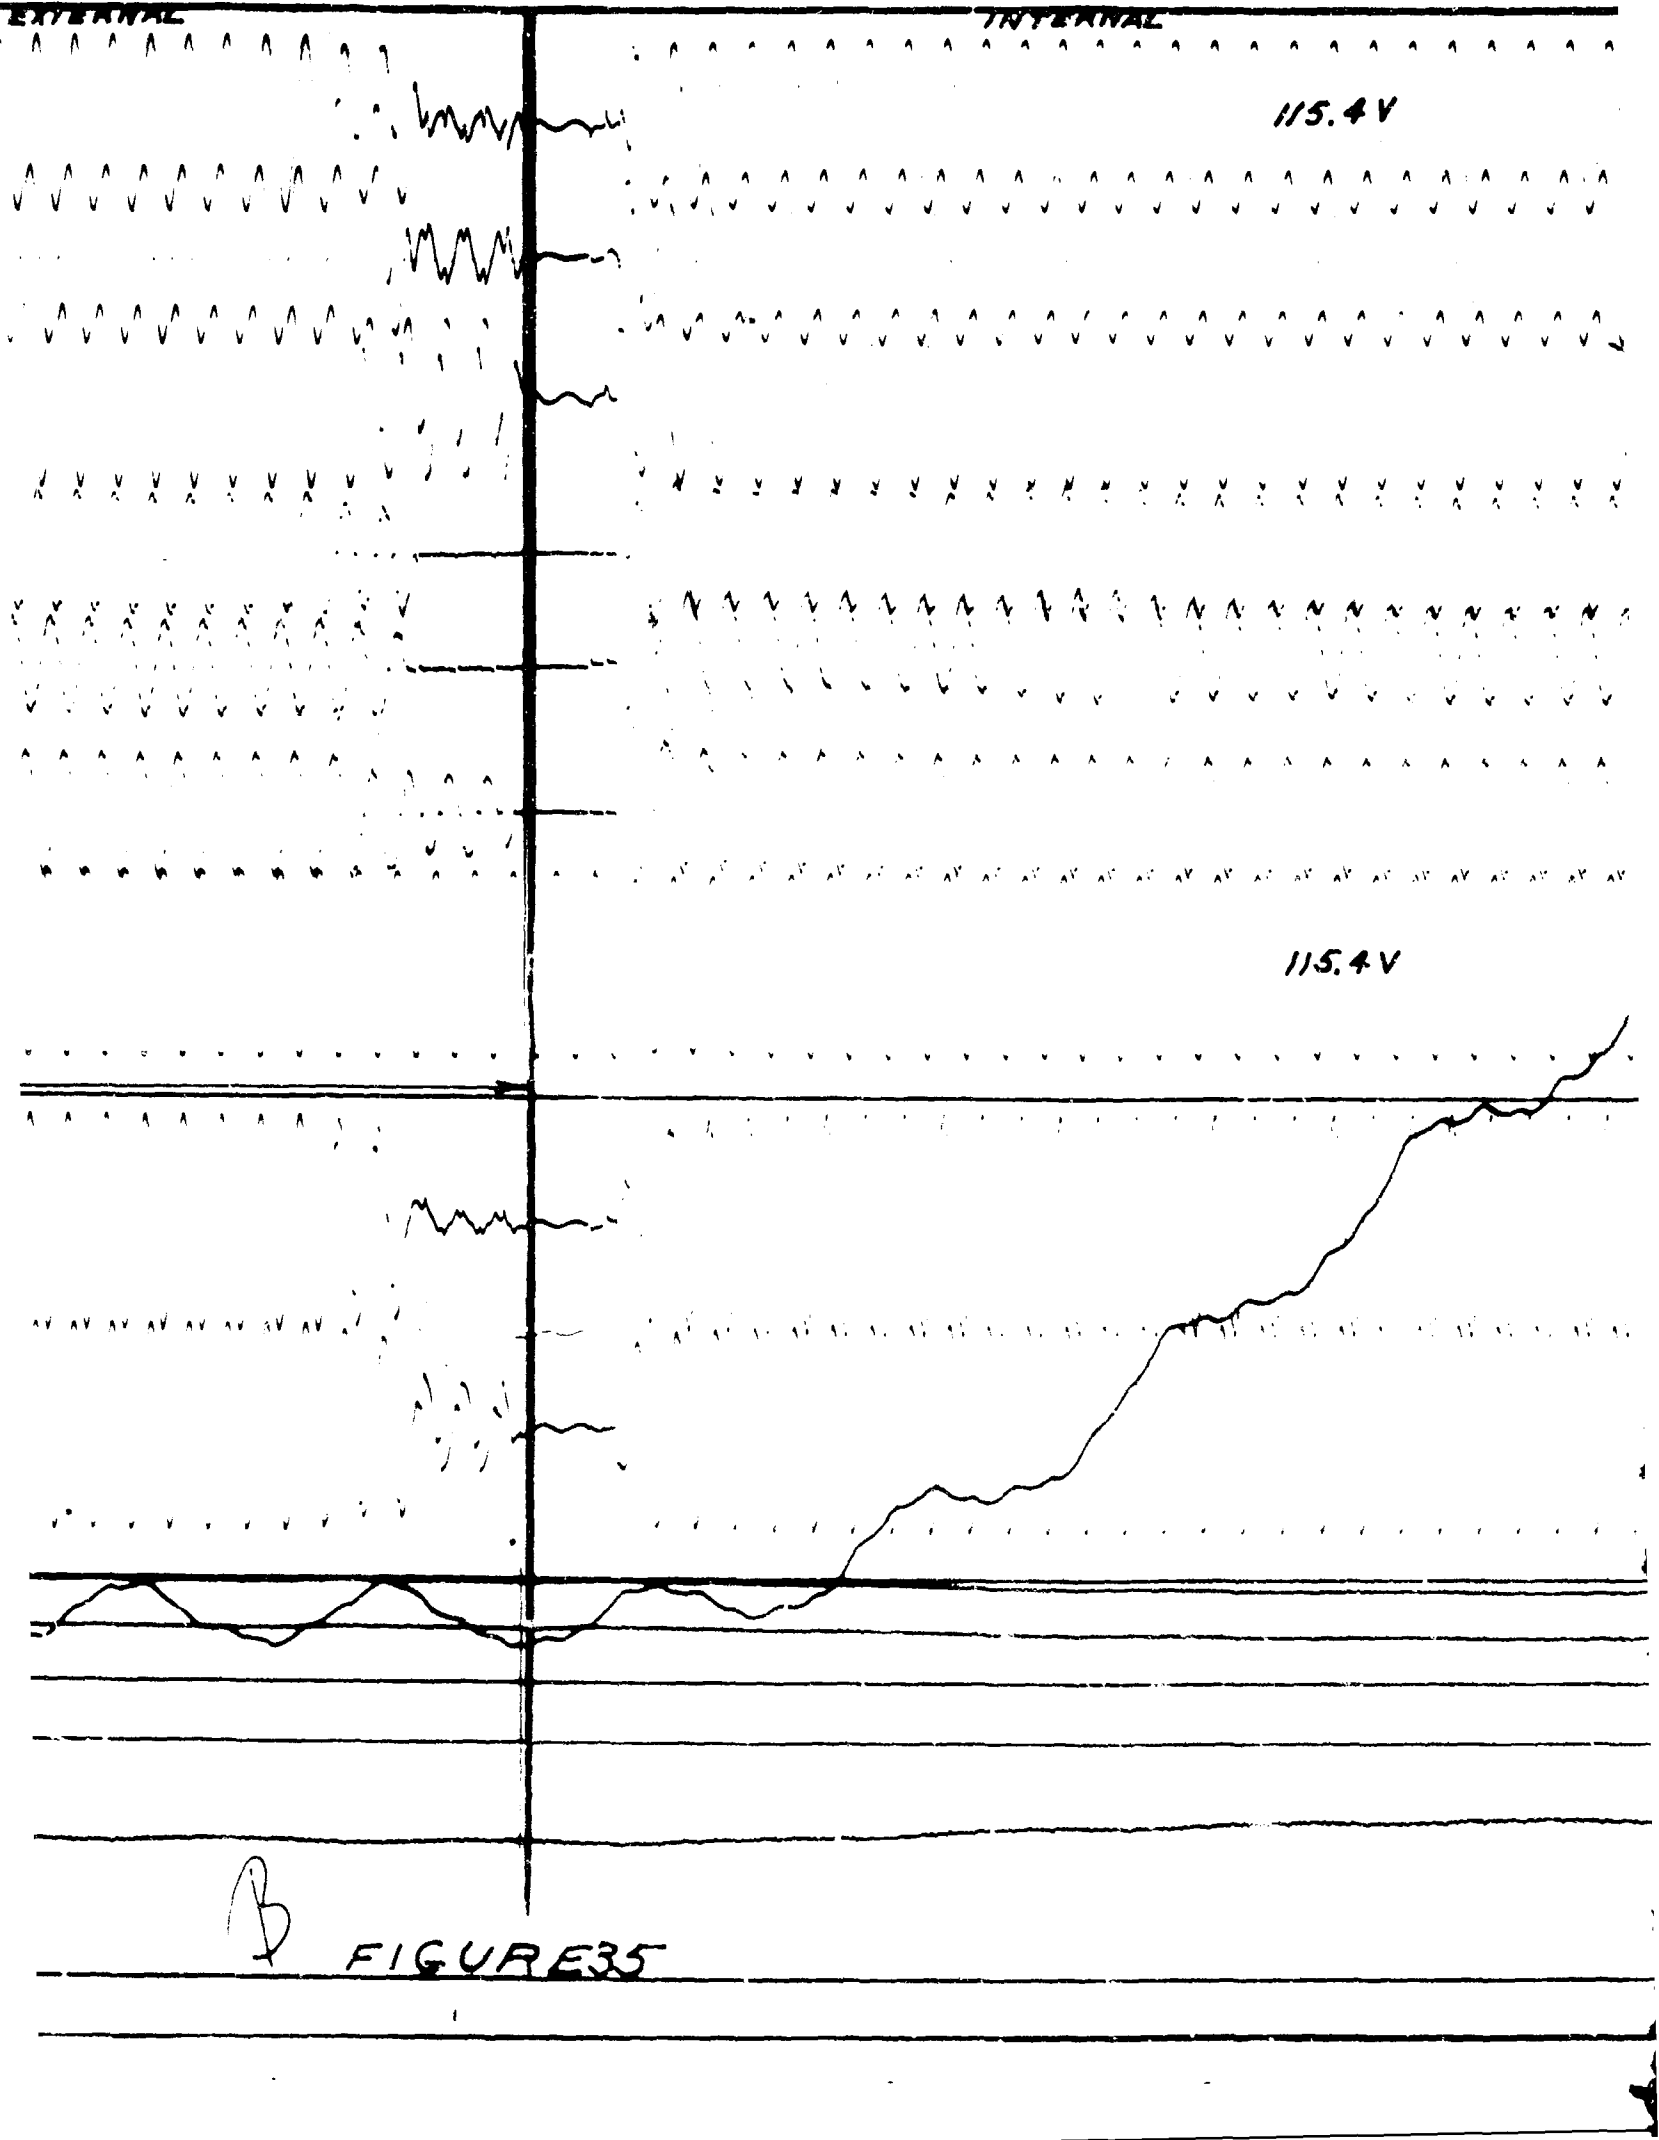

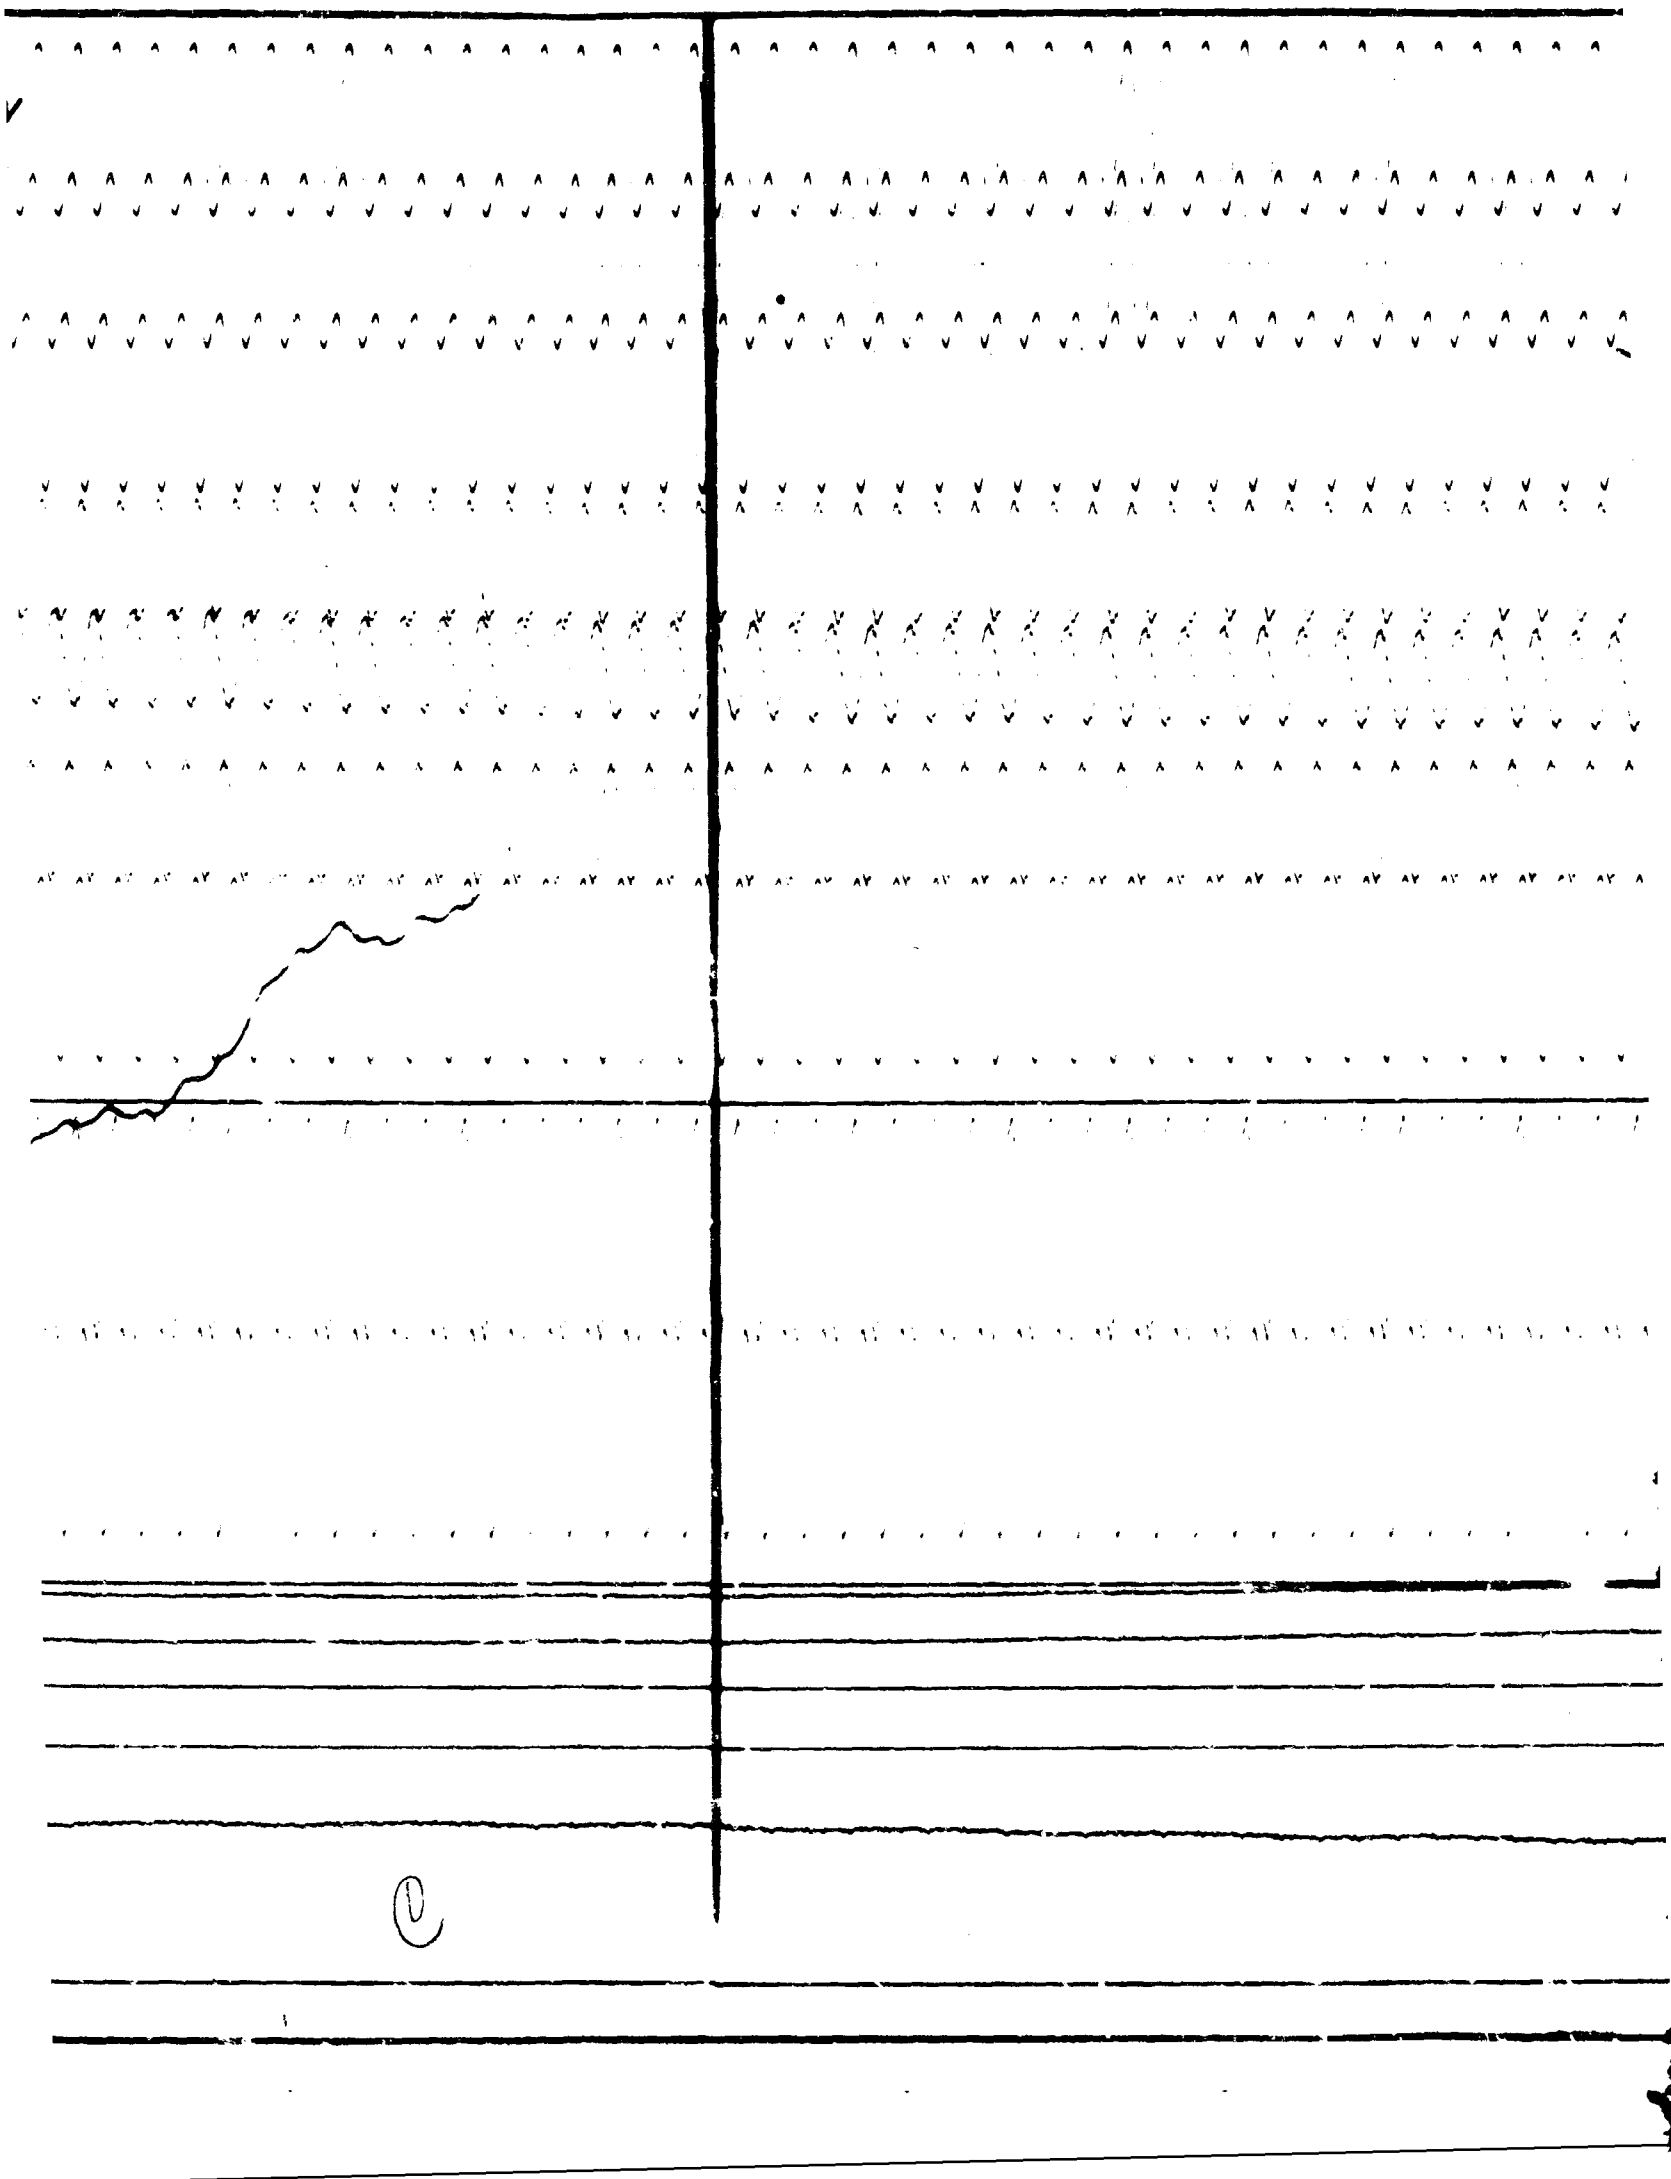

Report 78-2117-1
Page 97
12 August 1959

D

7-2-59 A.P. Brown

← 100 MILLISECONDS →

TRANSFER SIGNAL (EXTERNAL)

TRANSFER SIGNAL (INTERNAL)

INVERTER

A

EXTERNAL

ϕA VOLTS 115.5V

ϕB VOLTS

ϕC VOLTS

ϕA AMPS 5.75A

ϕB AMPS 4.1A

ϕC AMPS 5.5A

INVERTER ϕA VOLTS 113.6V

$V_{T_1-T_2}$

$V_{T_2-T_3}$

$V_{T_3-T_1}$

VAL (INTERNAL)

ARMA-AUTOPILOT D.C. VOLTS

INVERTER D.C. VOLTS

INVERTER AMPS

FIGURE 3


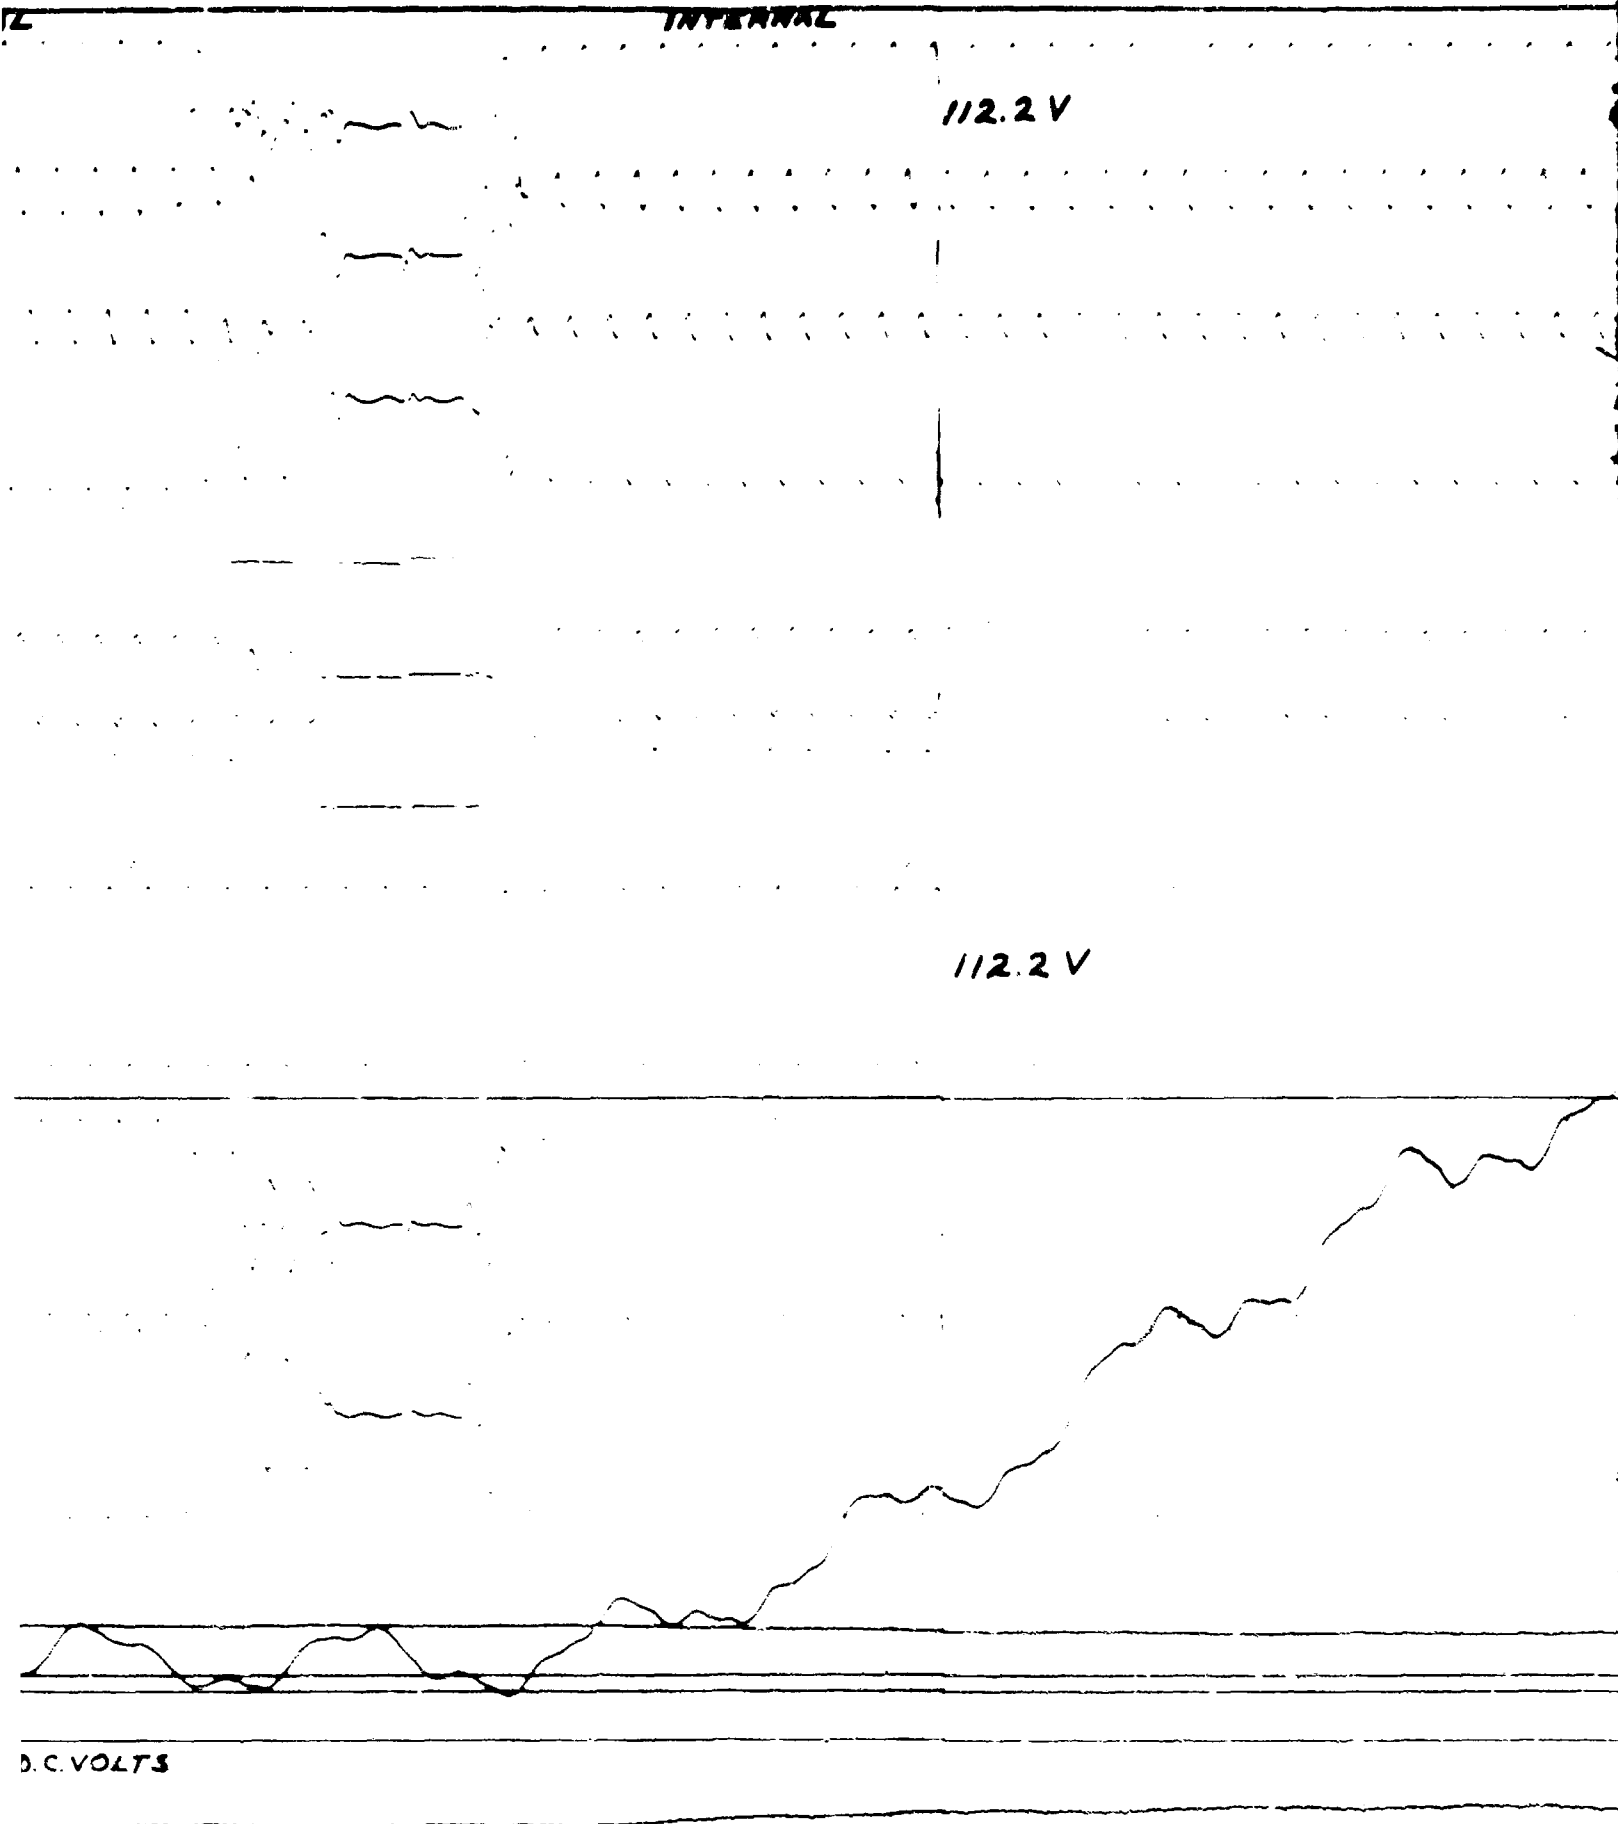




FIGURE 36

112.2 V

112.2 V

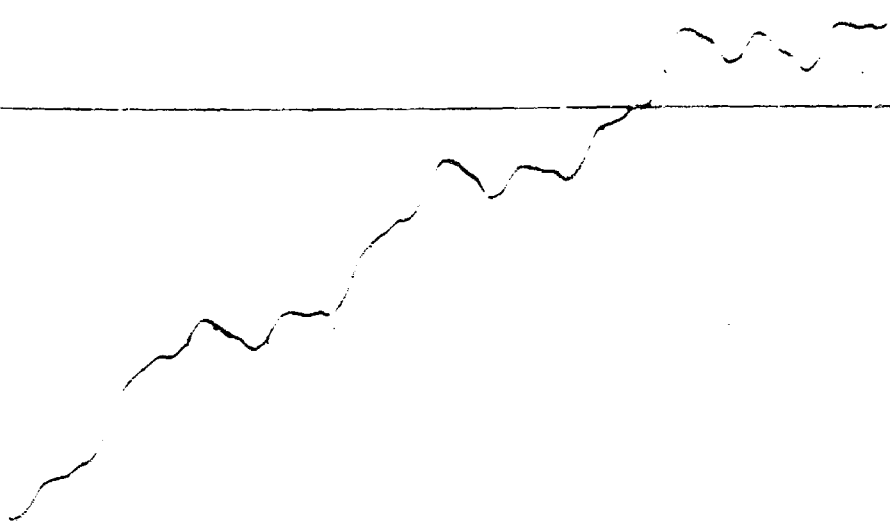

7-2-59 A.C. Carson

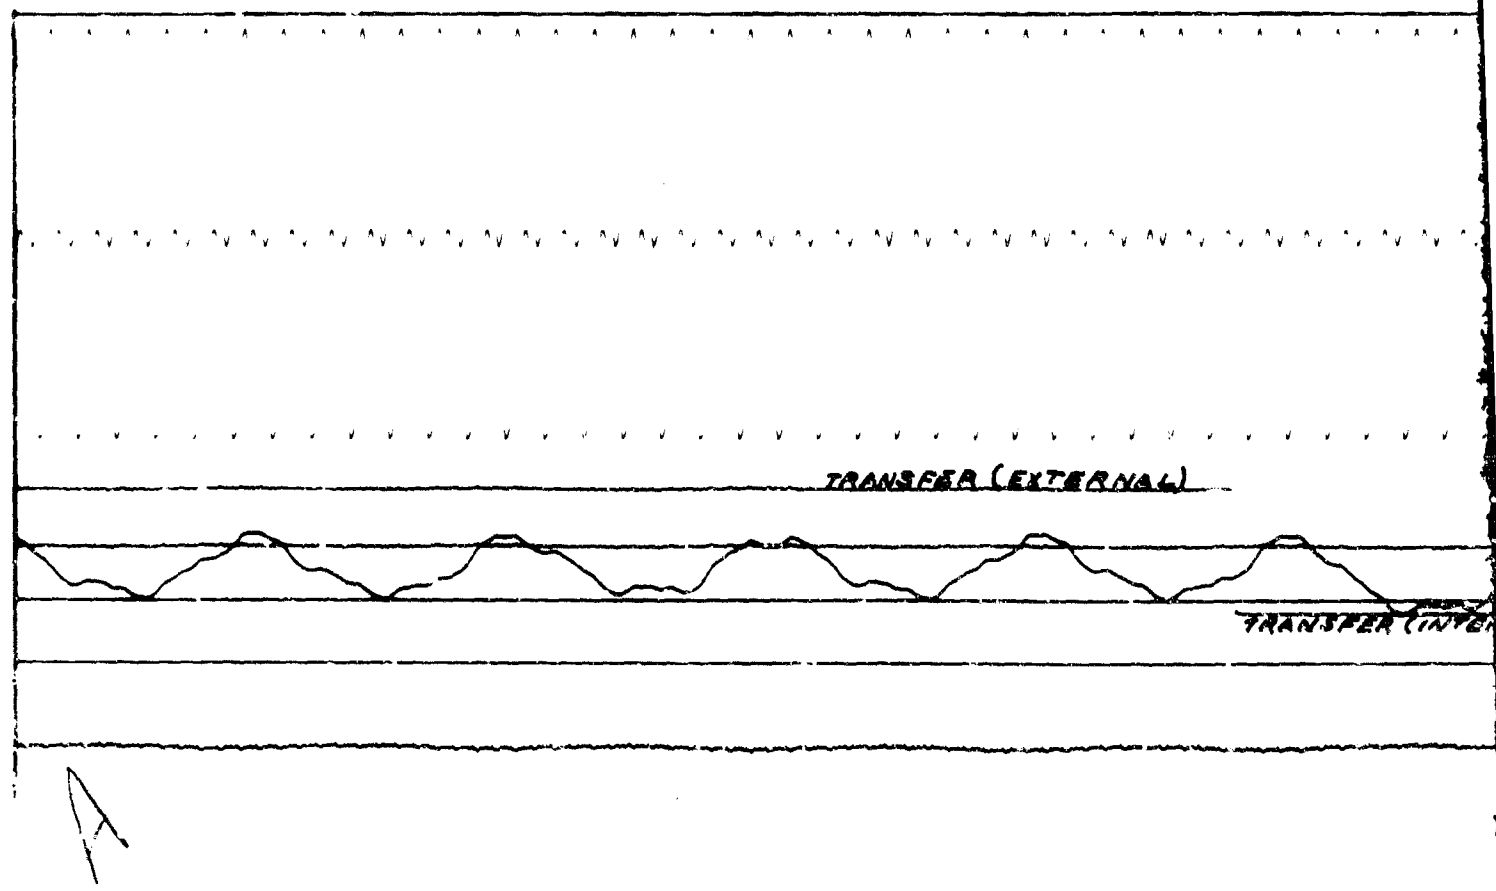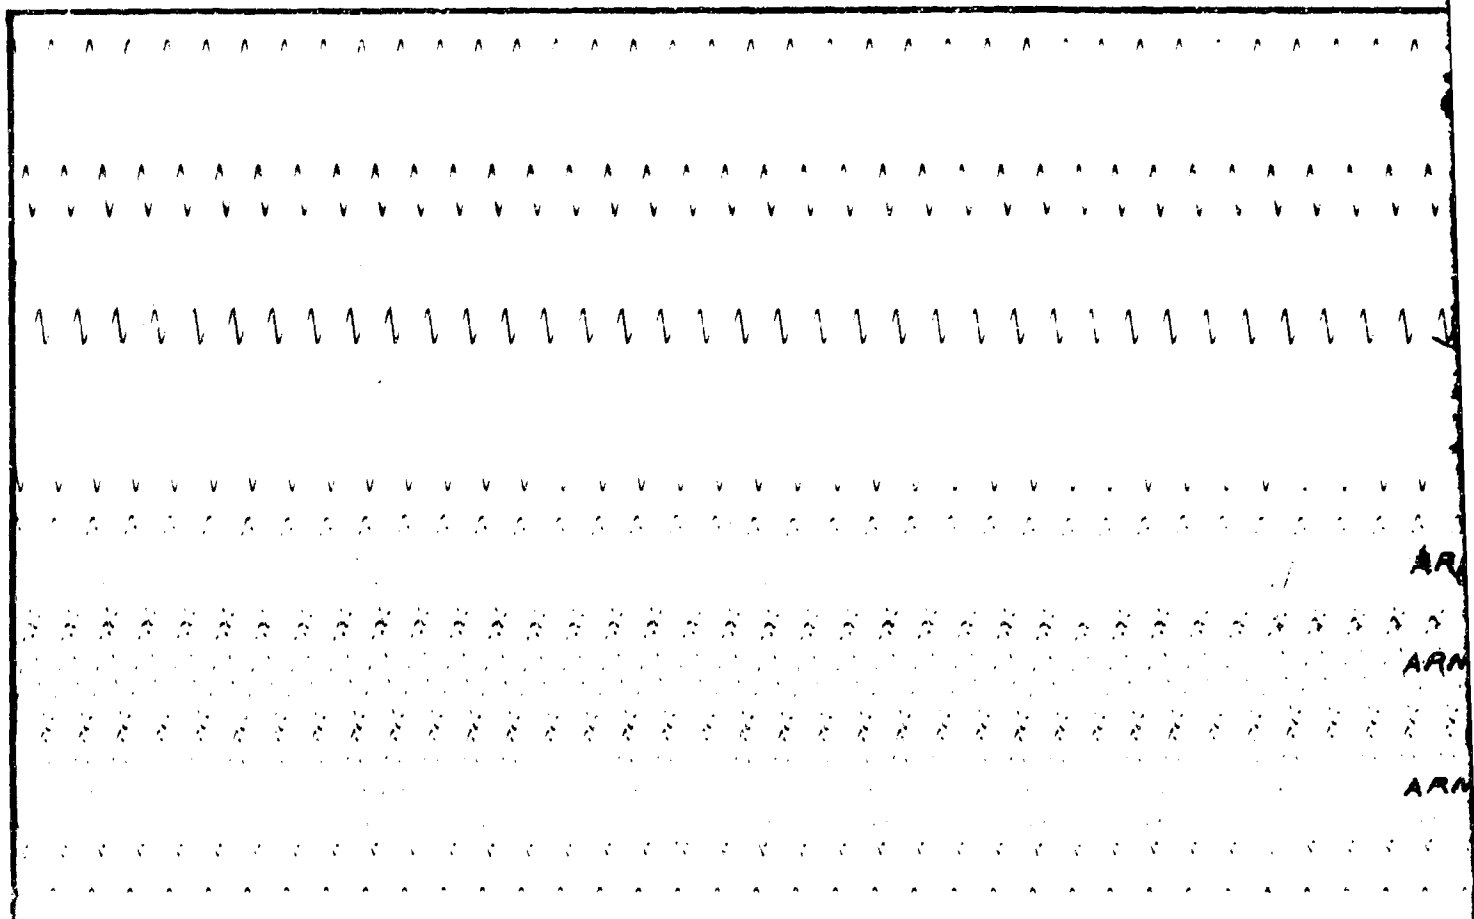

EXTERNAL

ϕA VOLTS

115.3V

ϕB VOLTS

ϕC VOLTS

ARMA

ϕA AMPS

ARMAI

ϕB AMPS

ARMA

ϕC AMPS

INVERTER ϕA VOLTS

113.4V

100 MILLISECONDS

$V_{T_1-T_2}$

$V_{T_3-T_4}$

$V_{T_5-T_6}$

TRANSFER (INTERNAL)


ARMA D.C. VOLTS

INVERTER D.C. VOLTS

INVERTER D.C. AMPS

B

FL

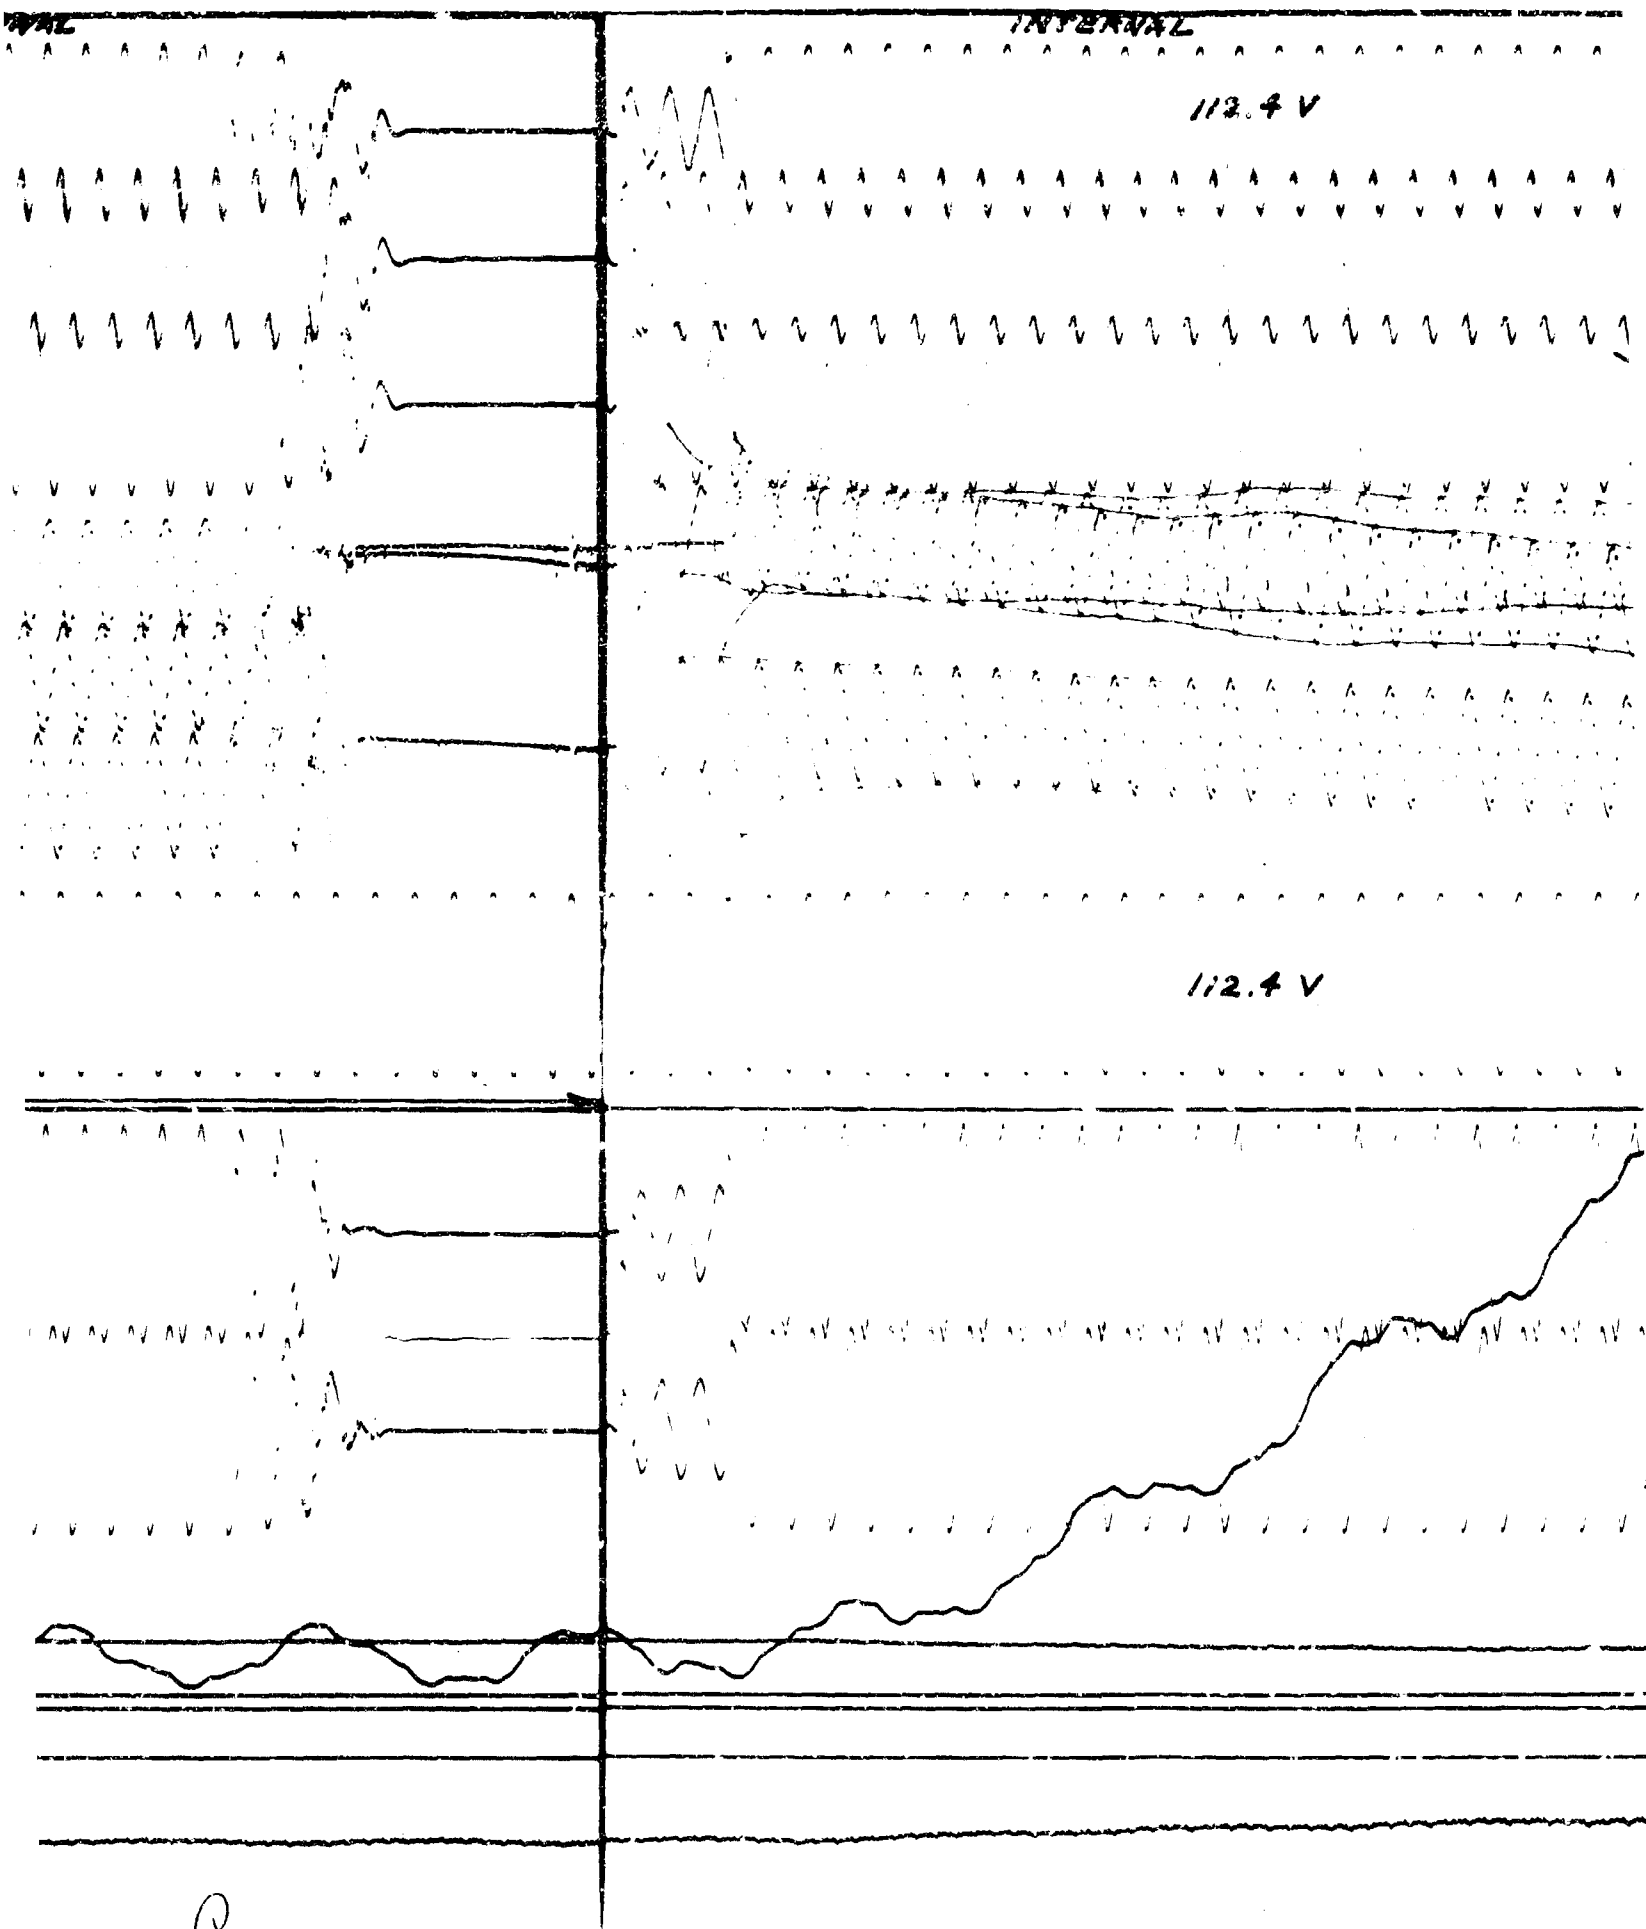

C

FIGURE 37

D

2-6-59 A.E. Cunn

Handwritten notes on lined paper. The page contains several lines of text, mostly illegible due to the quality of the scan. The text is organized into sections separated by horizontal lines. The bottom section contains the following text:

TRANSFER (EXTERNAL)

TRANSFER (INTERNAL)

ARMED

A



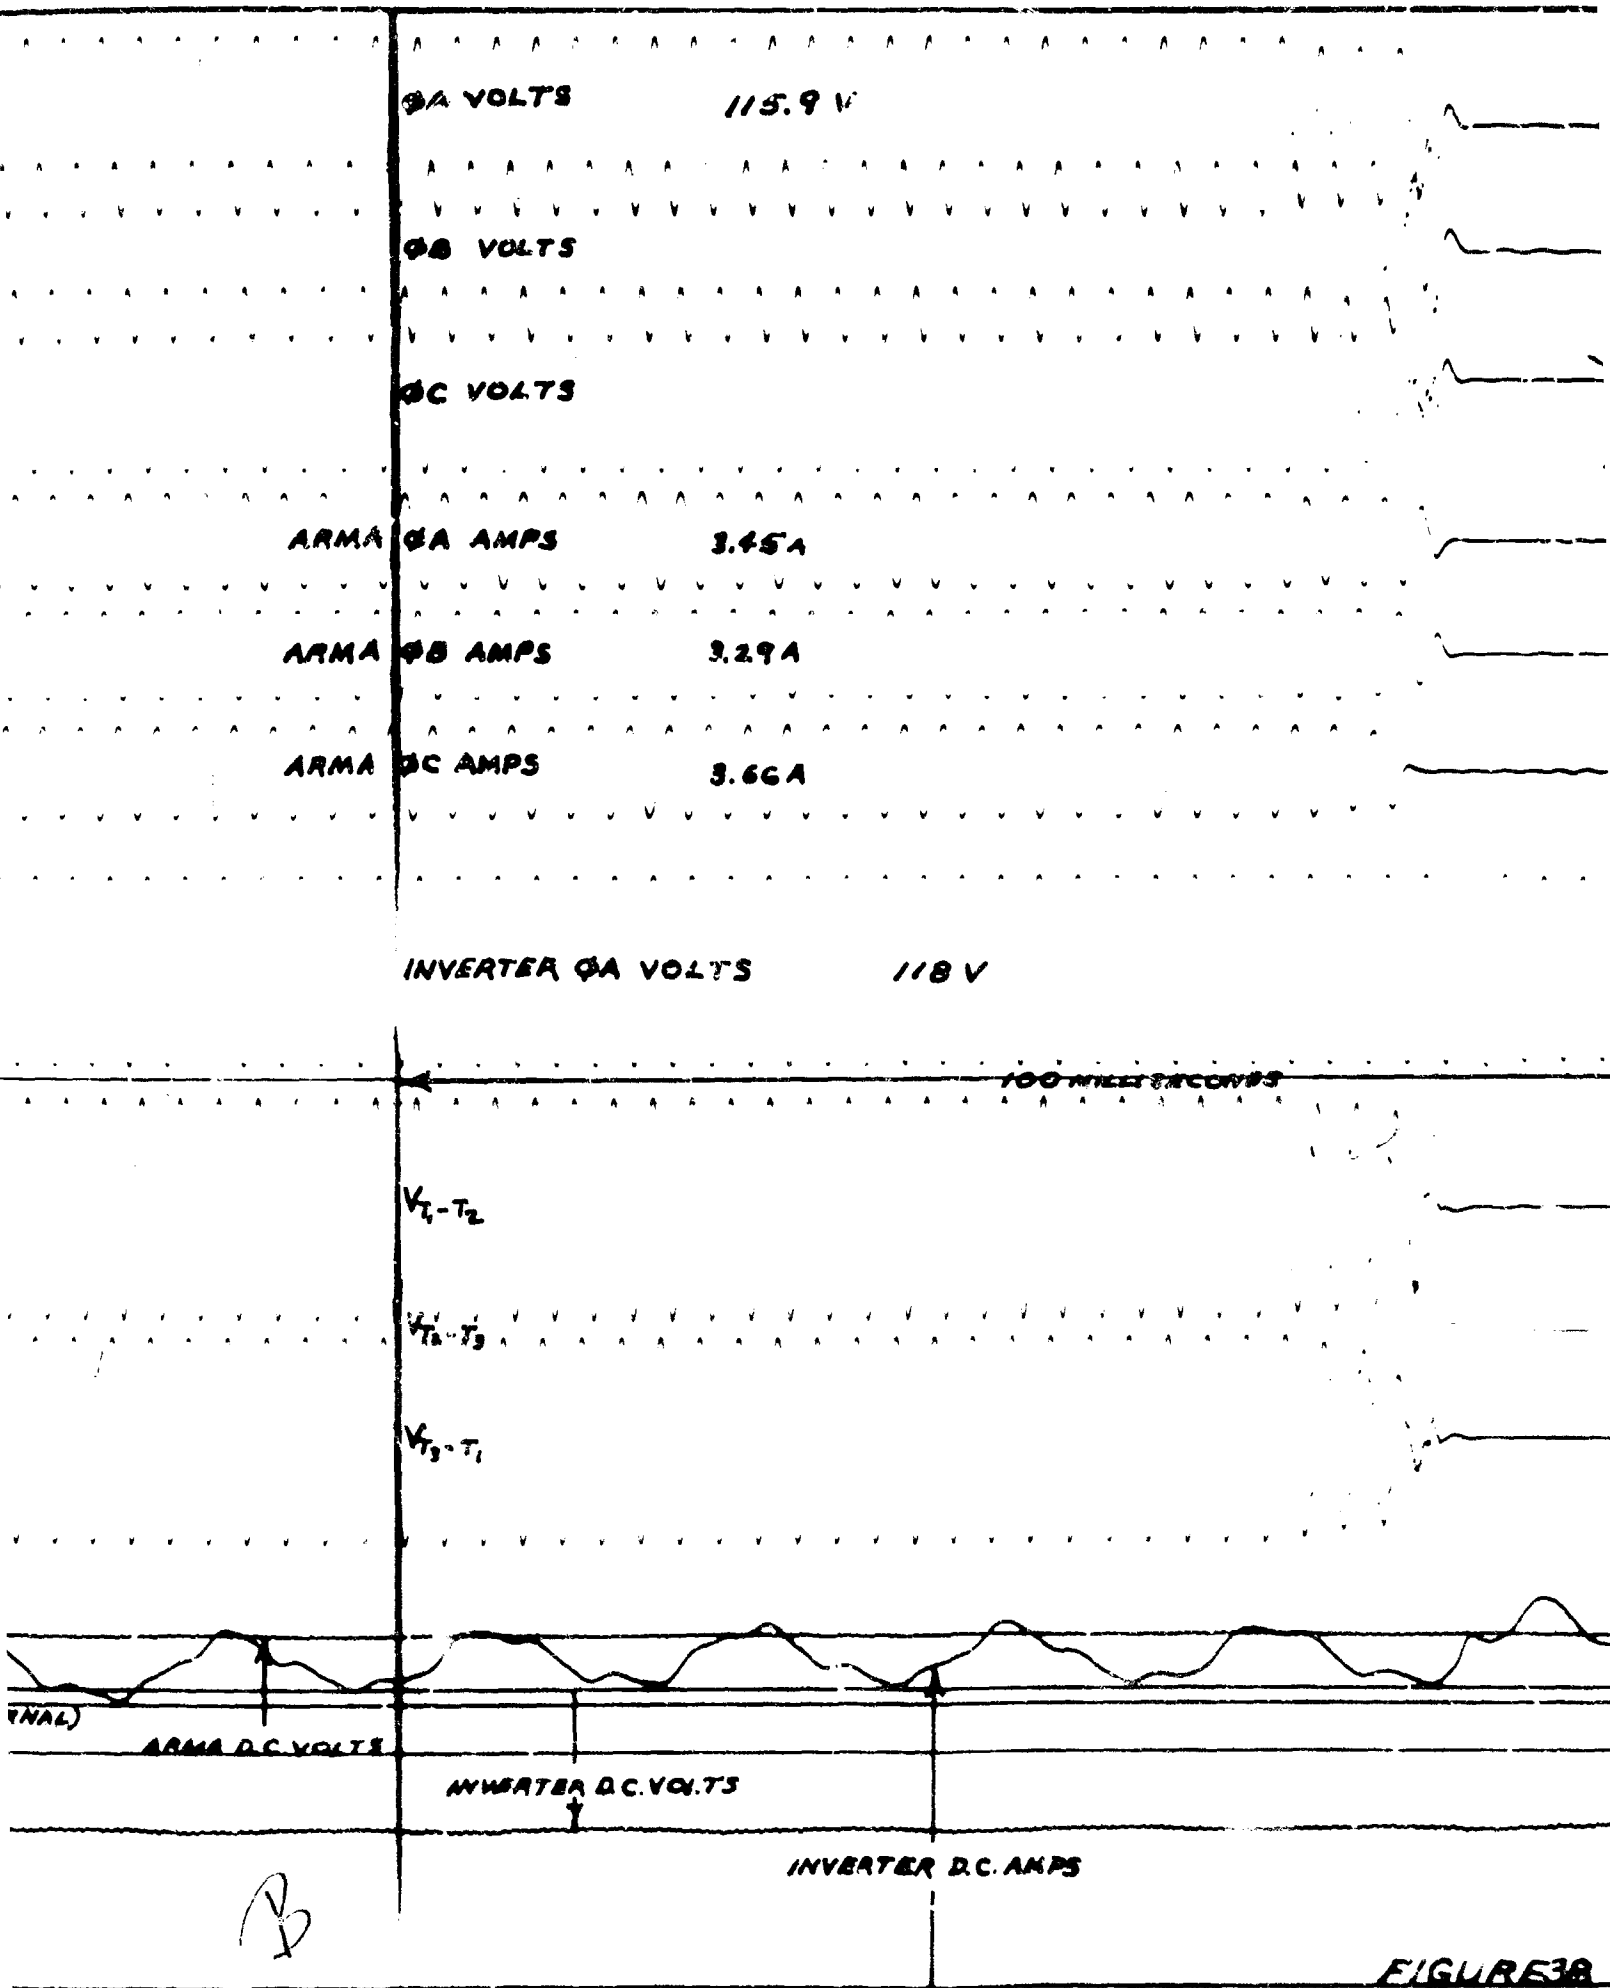


FIGURE 38

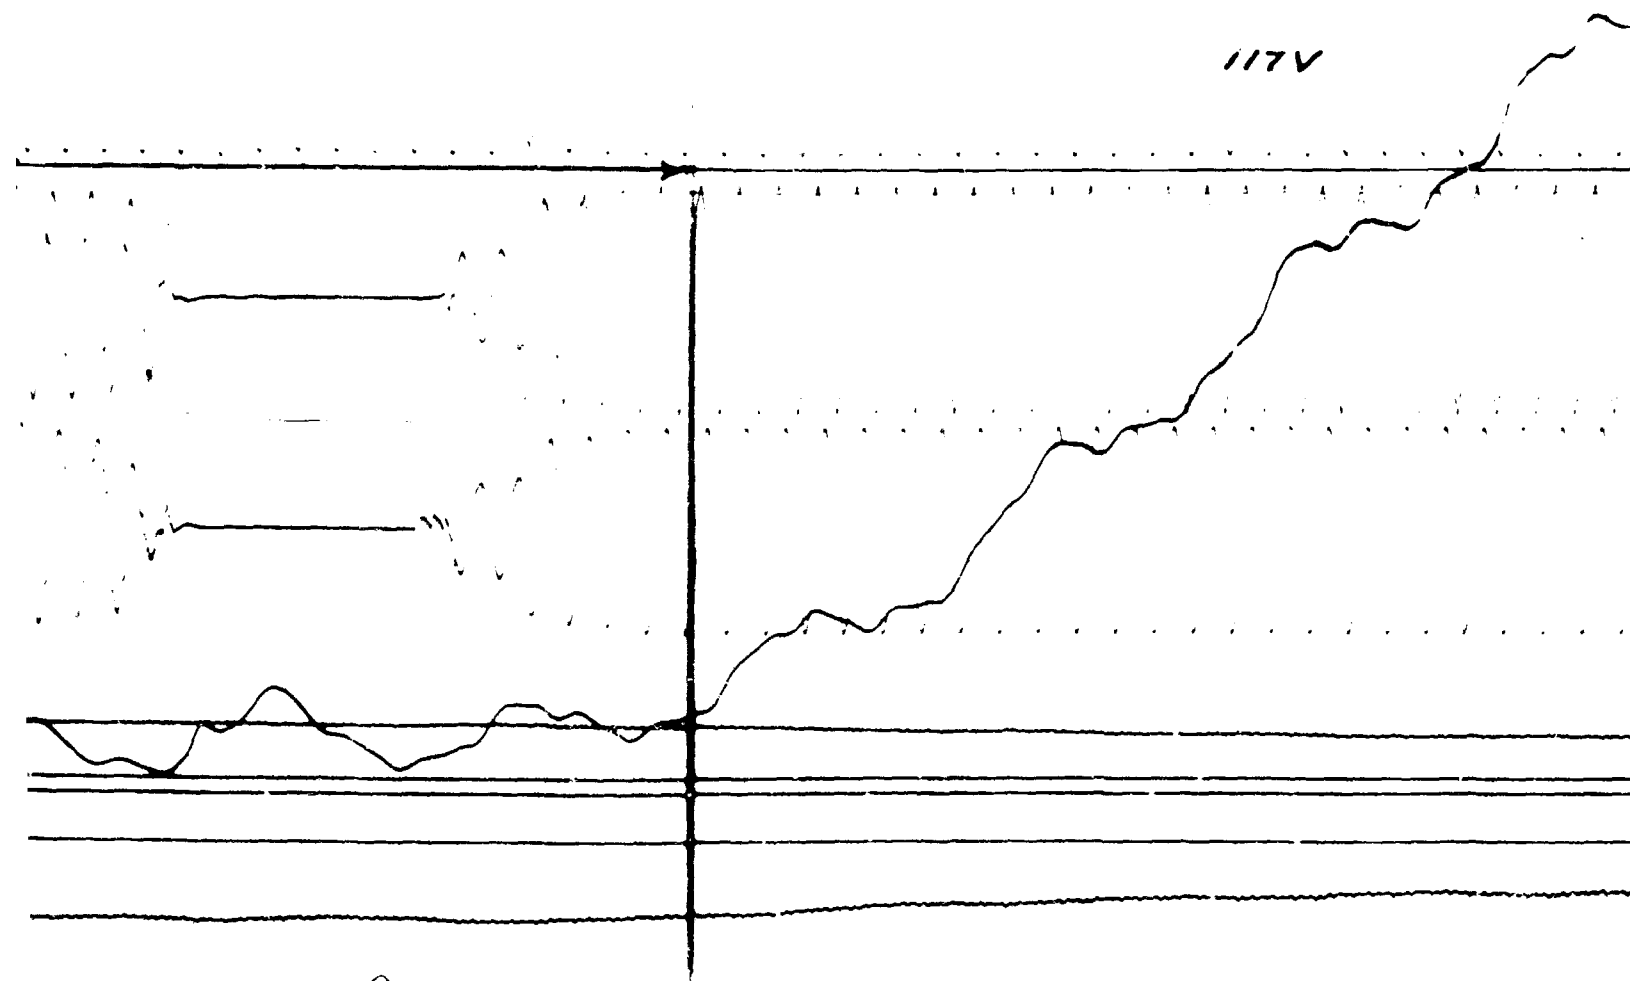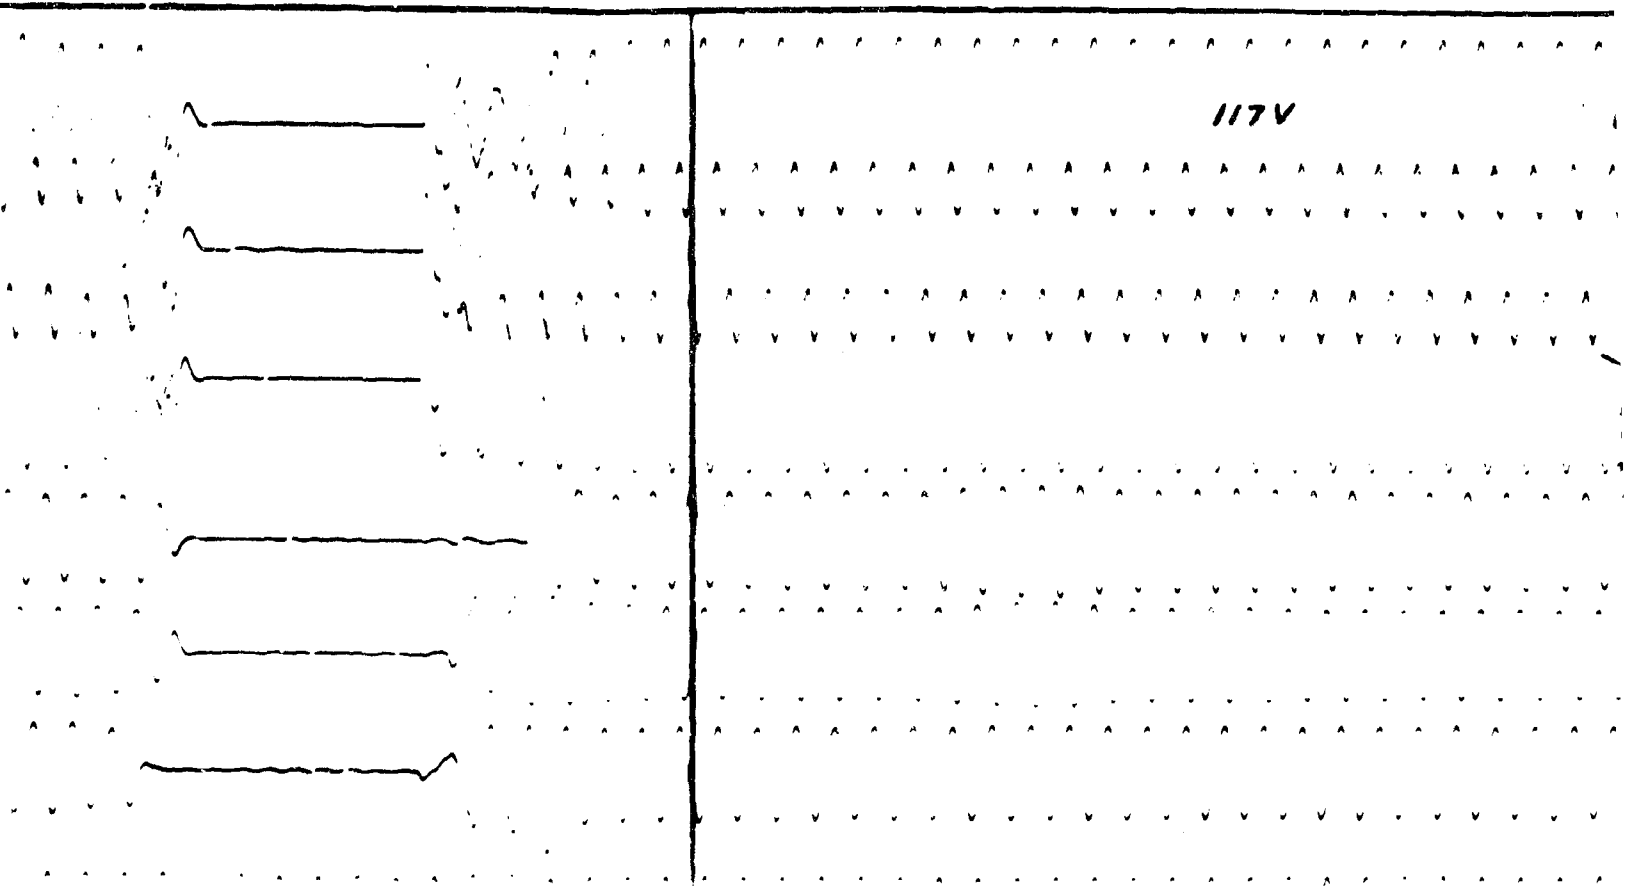


c

FIGURE 3



117V

117V

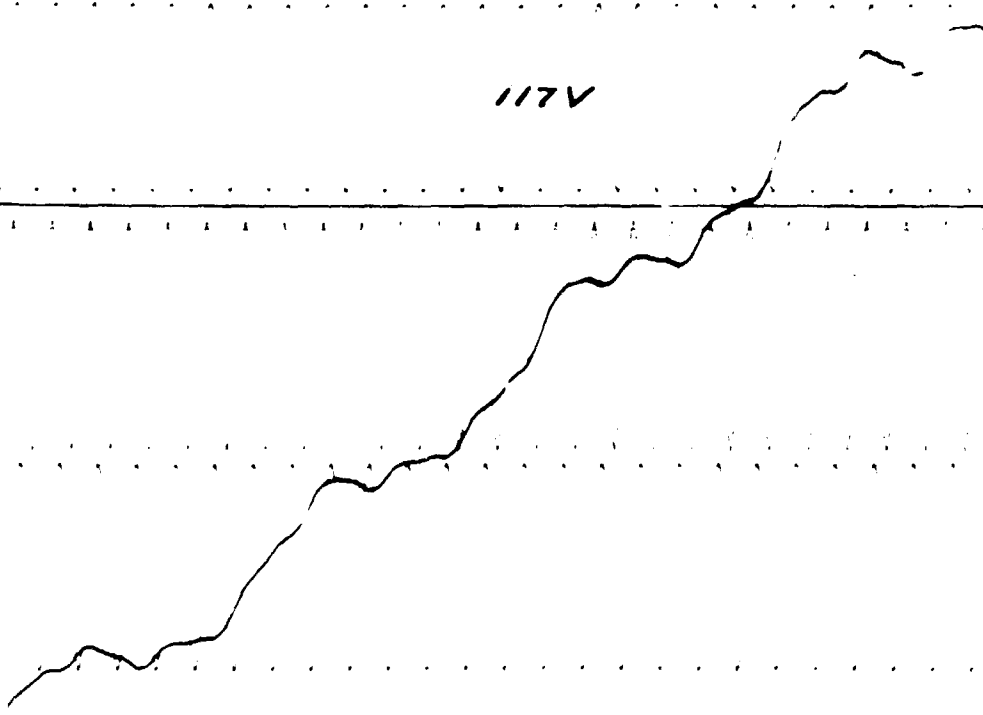

25-07 A.C. Brown

D

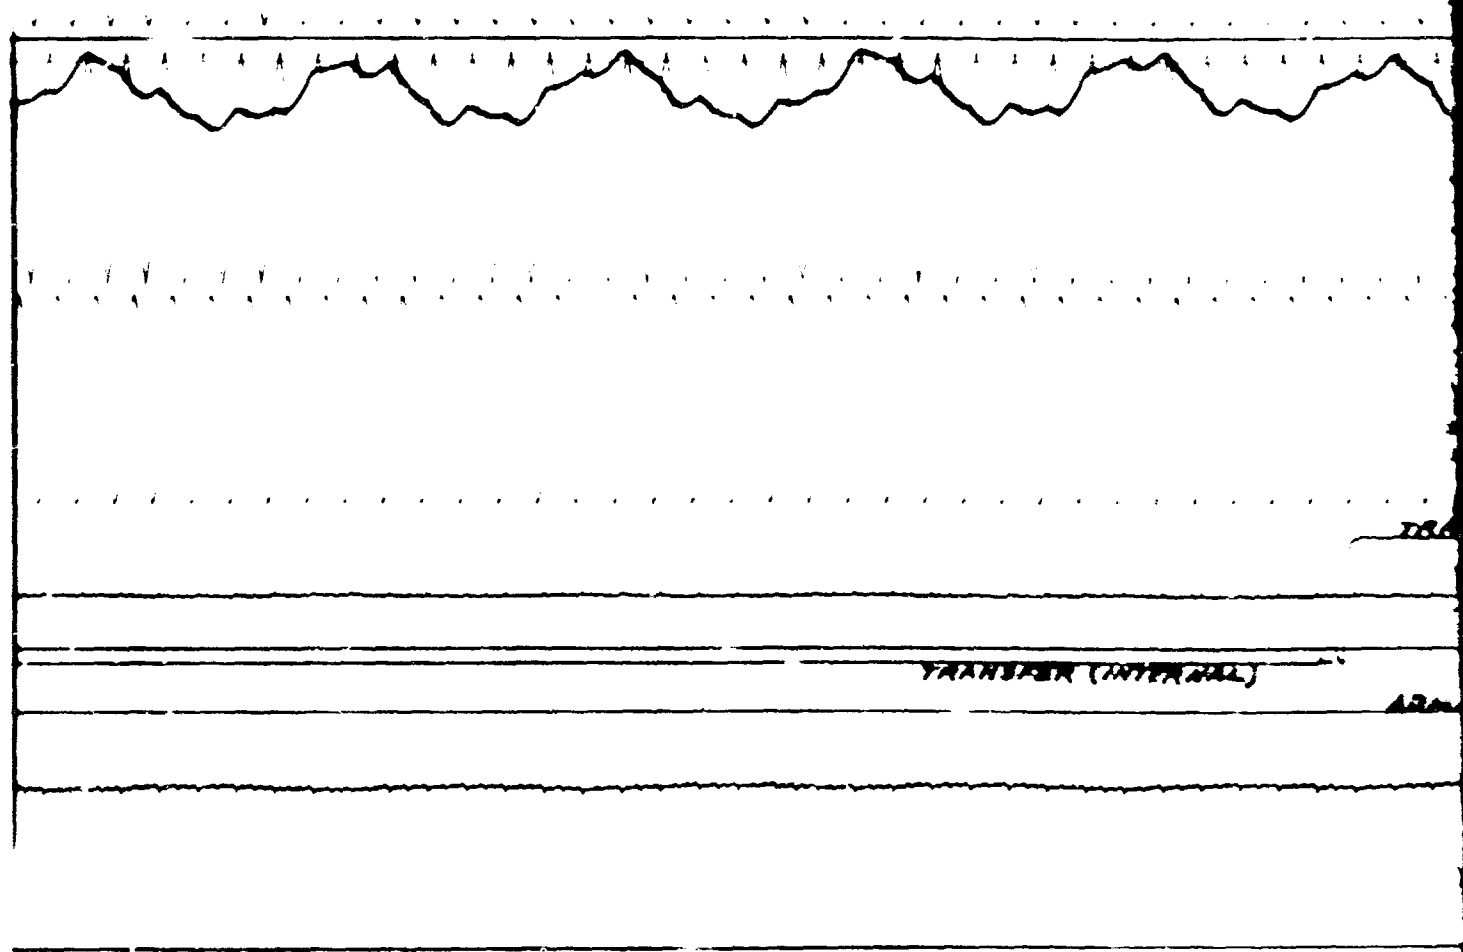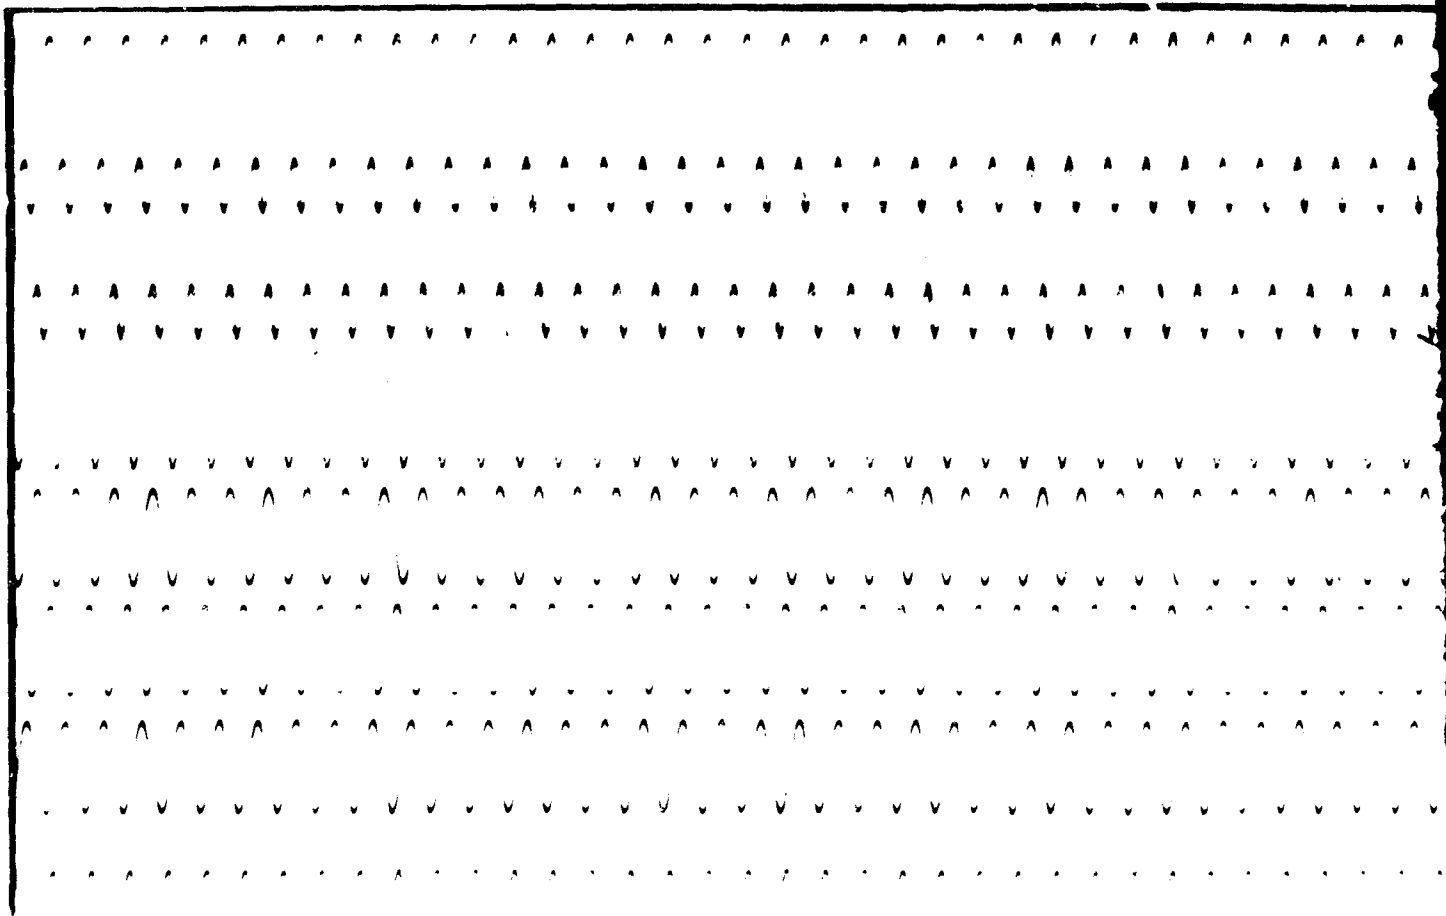

INTERNAL

ΦA VOLTS

117V

ΦB VOLTS

ΦC VOLTS

ARMA ΦA AMPS

254A

ARMA ΦB AMPS

329A

ARMA ΦC AMPS

368A

INVERTER ΦA VOLTS

117 V

$V_{\phi} - T_2$

$V_{T_2} - T_5$

$V_{T_5} - T_1$

TRANSFORMER (EXTERNAL)

ARMA D.C. VOLTS

INVERTER D.C. VOLTS

INVERTER D.C. AMPS

B

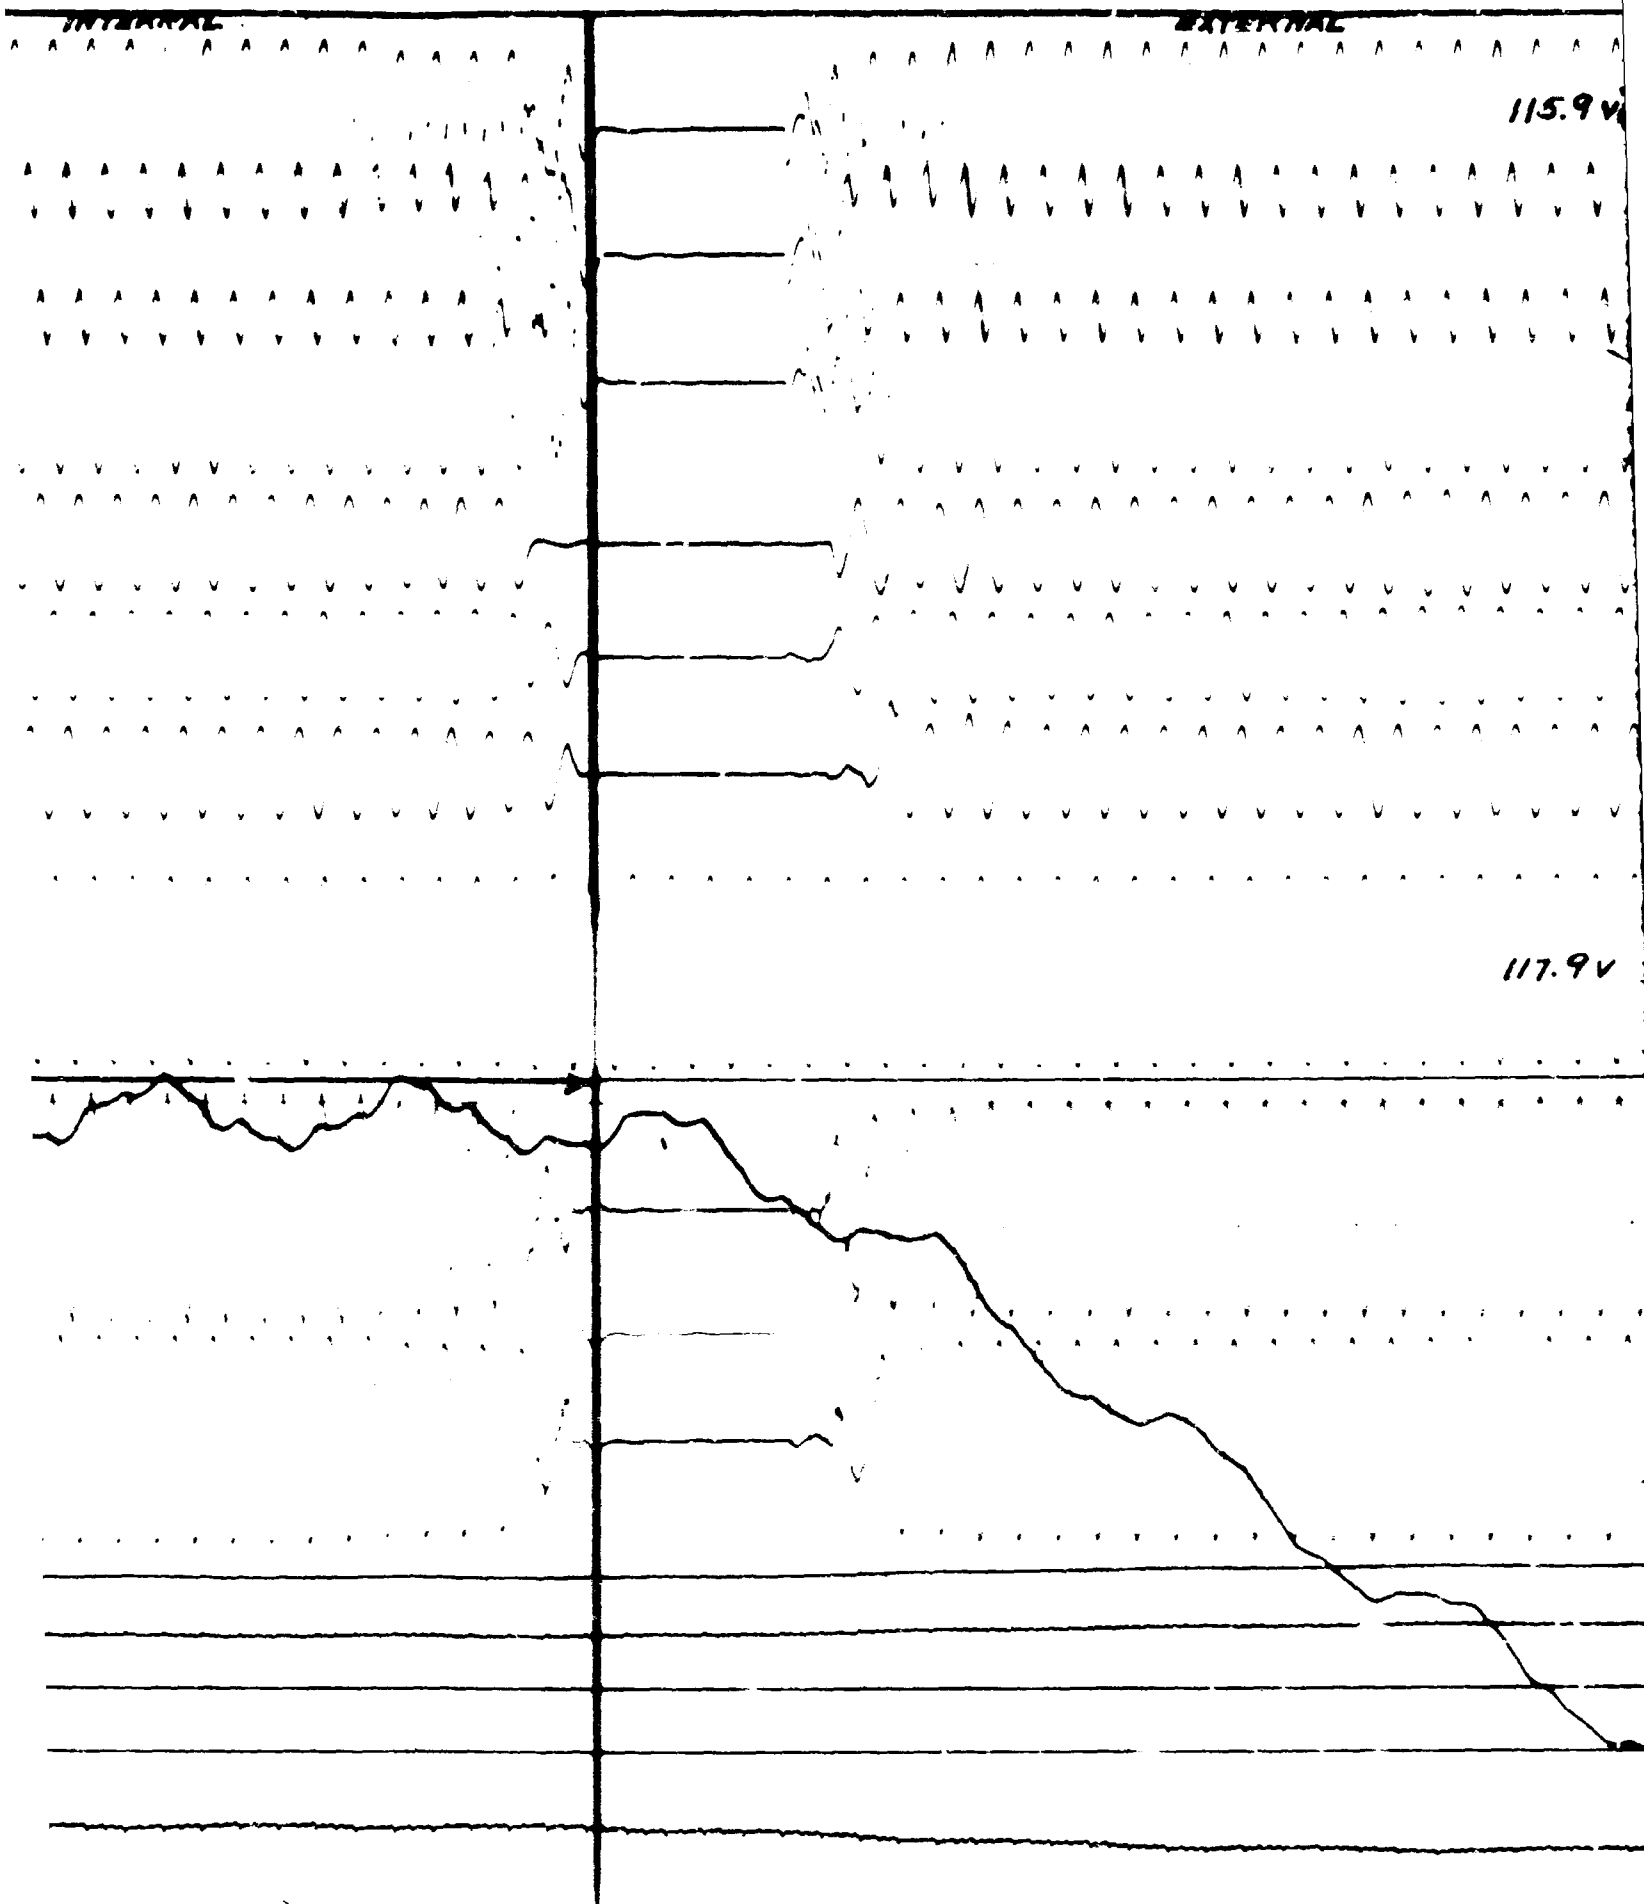


FIGURE 39

EXTERNAL

Report 78-2124-2

Page 61

11 Aug. 99


115.9v

117.9v

D

FIGURE 39

7-6-67 A.C. Brown

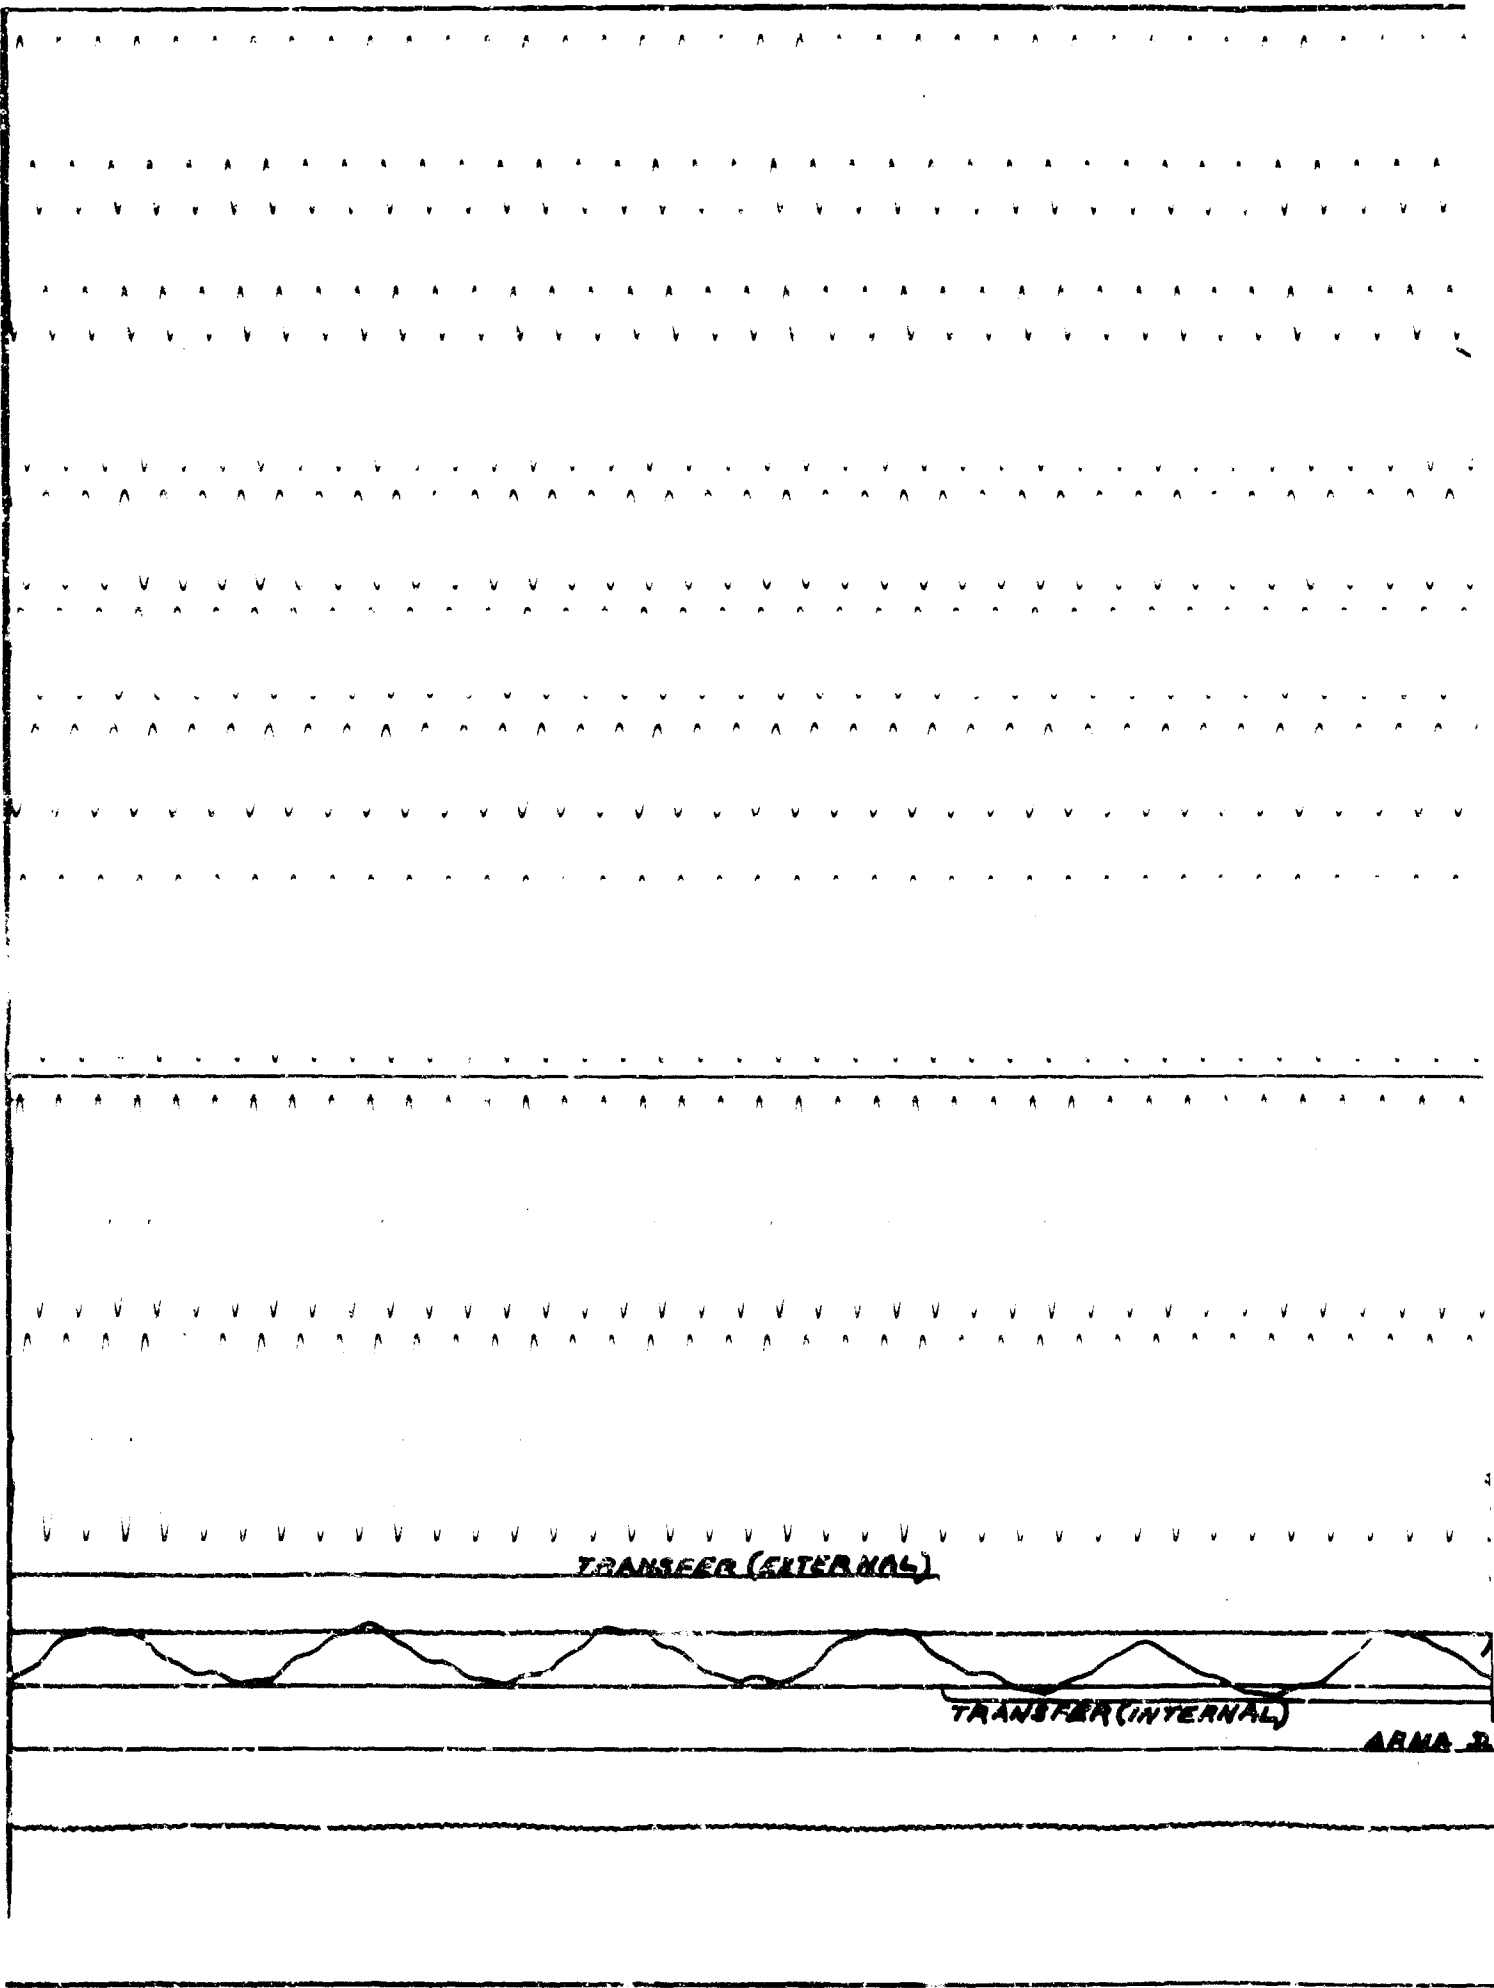

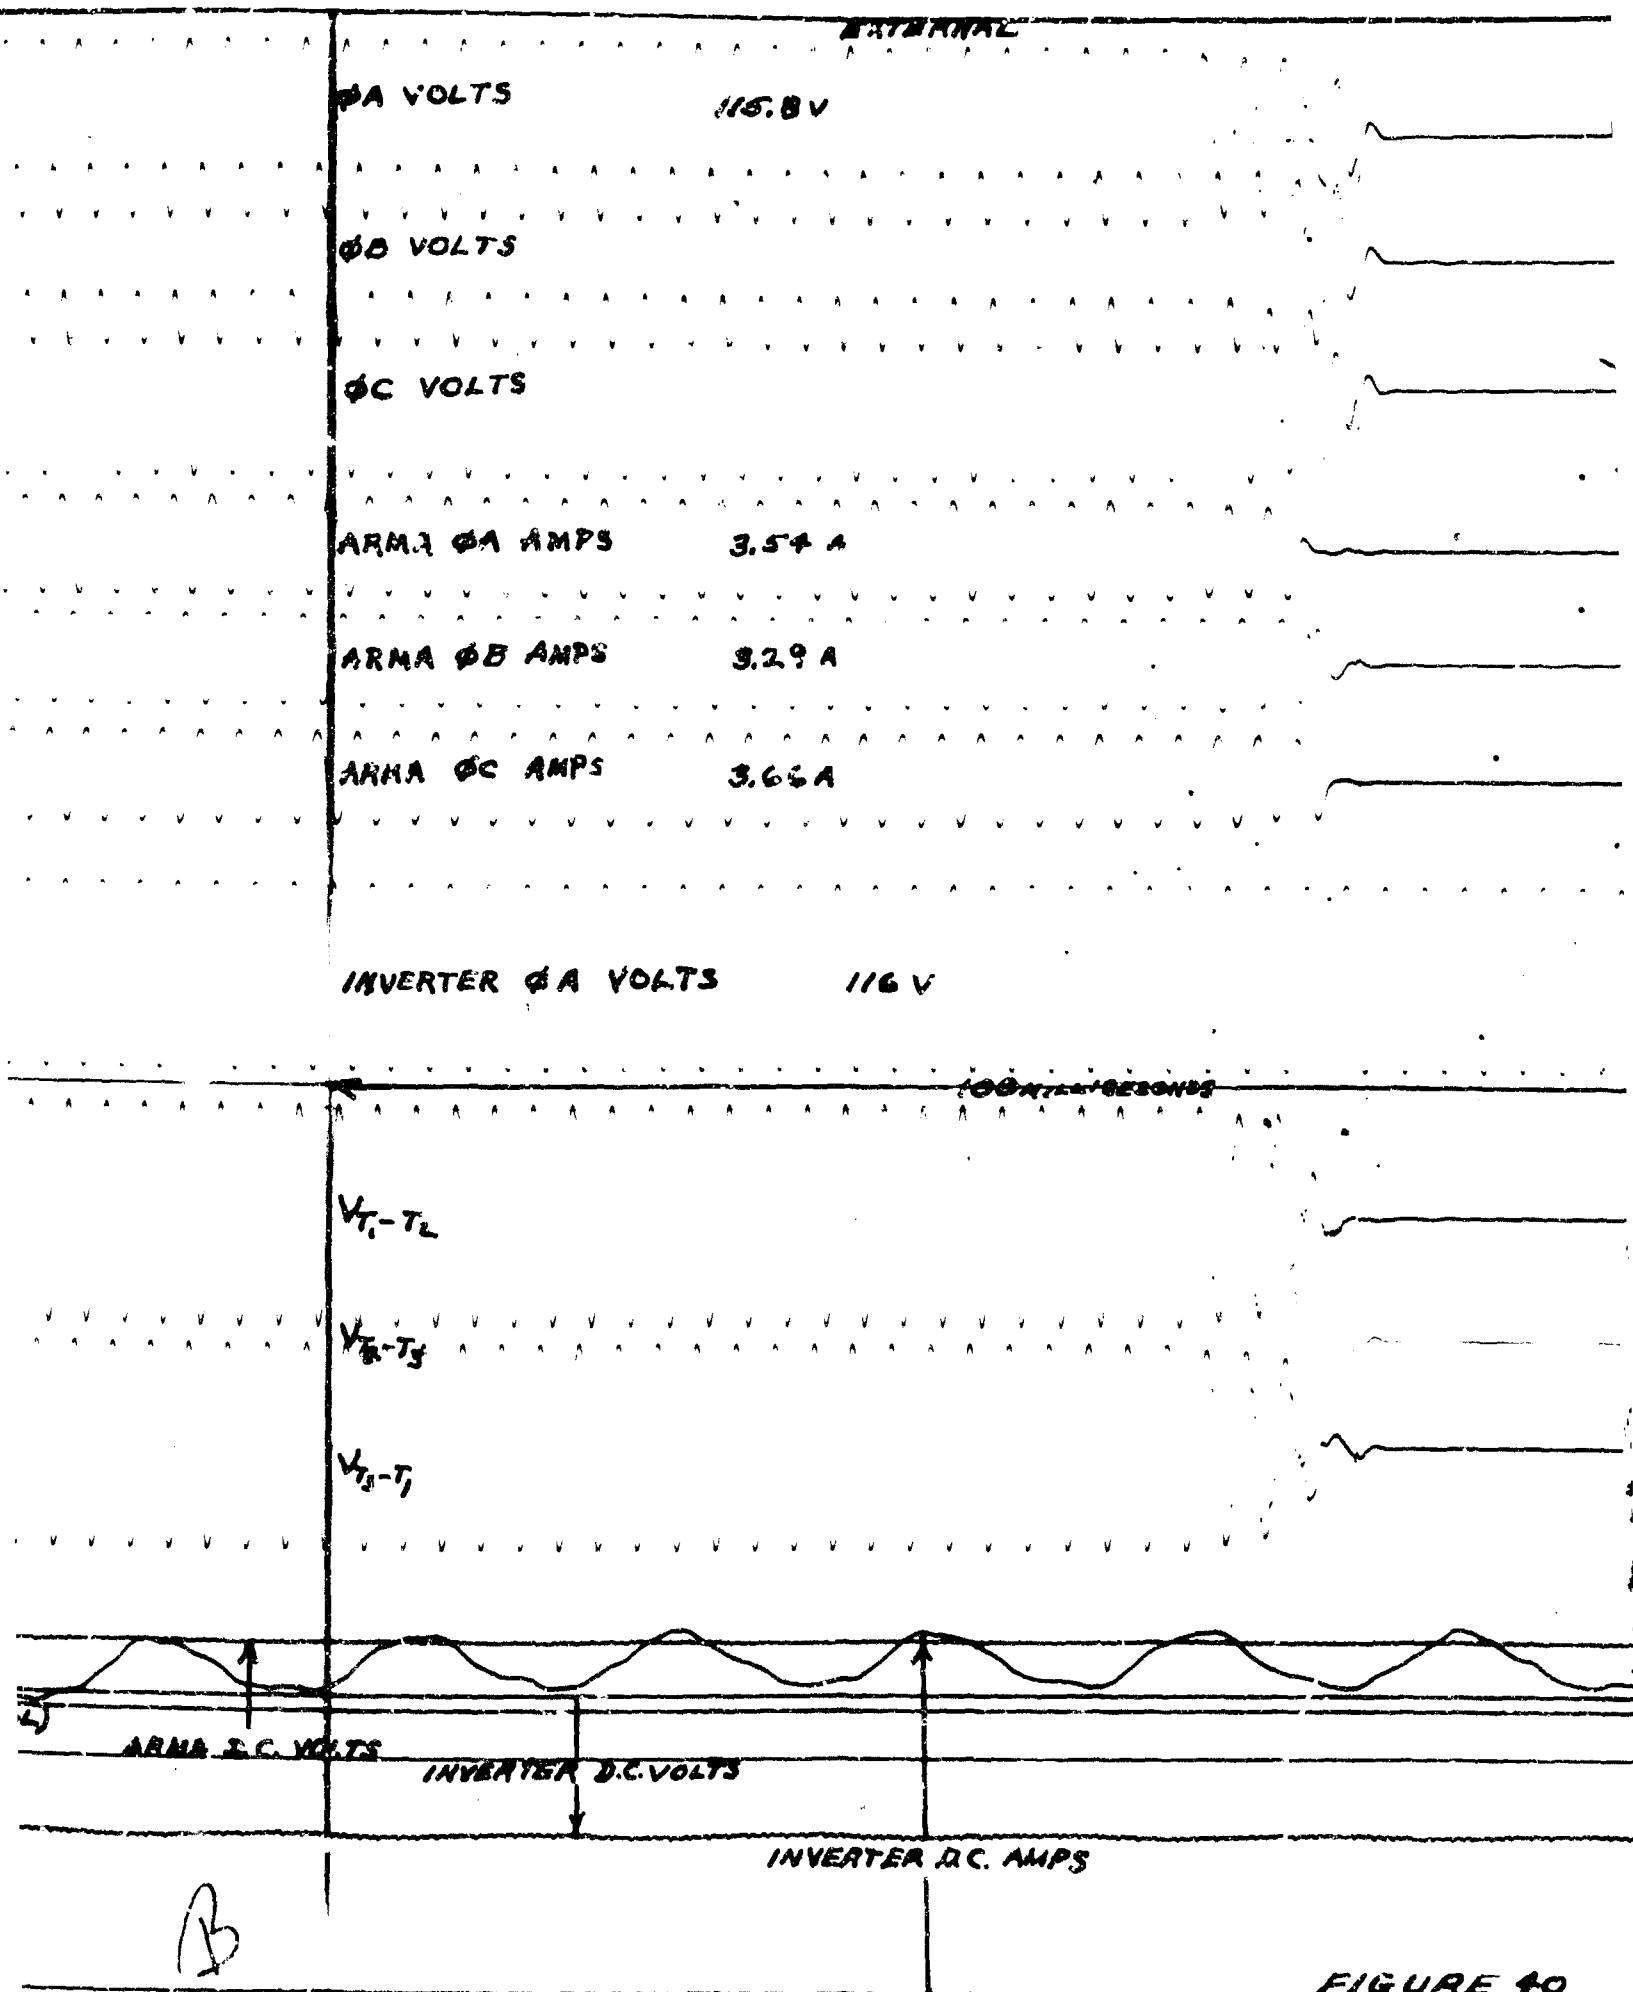


FIGURE 40

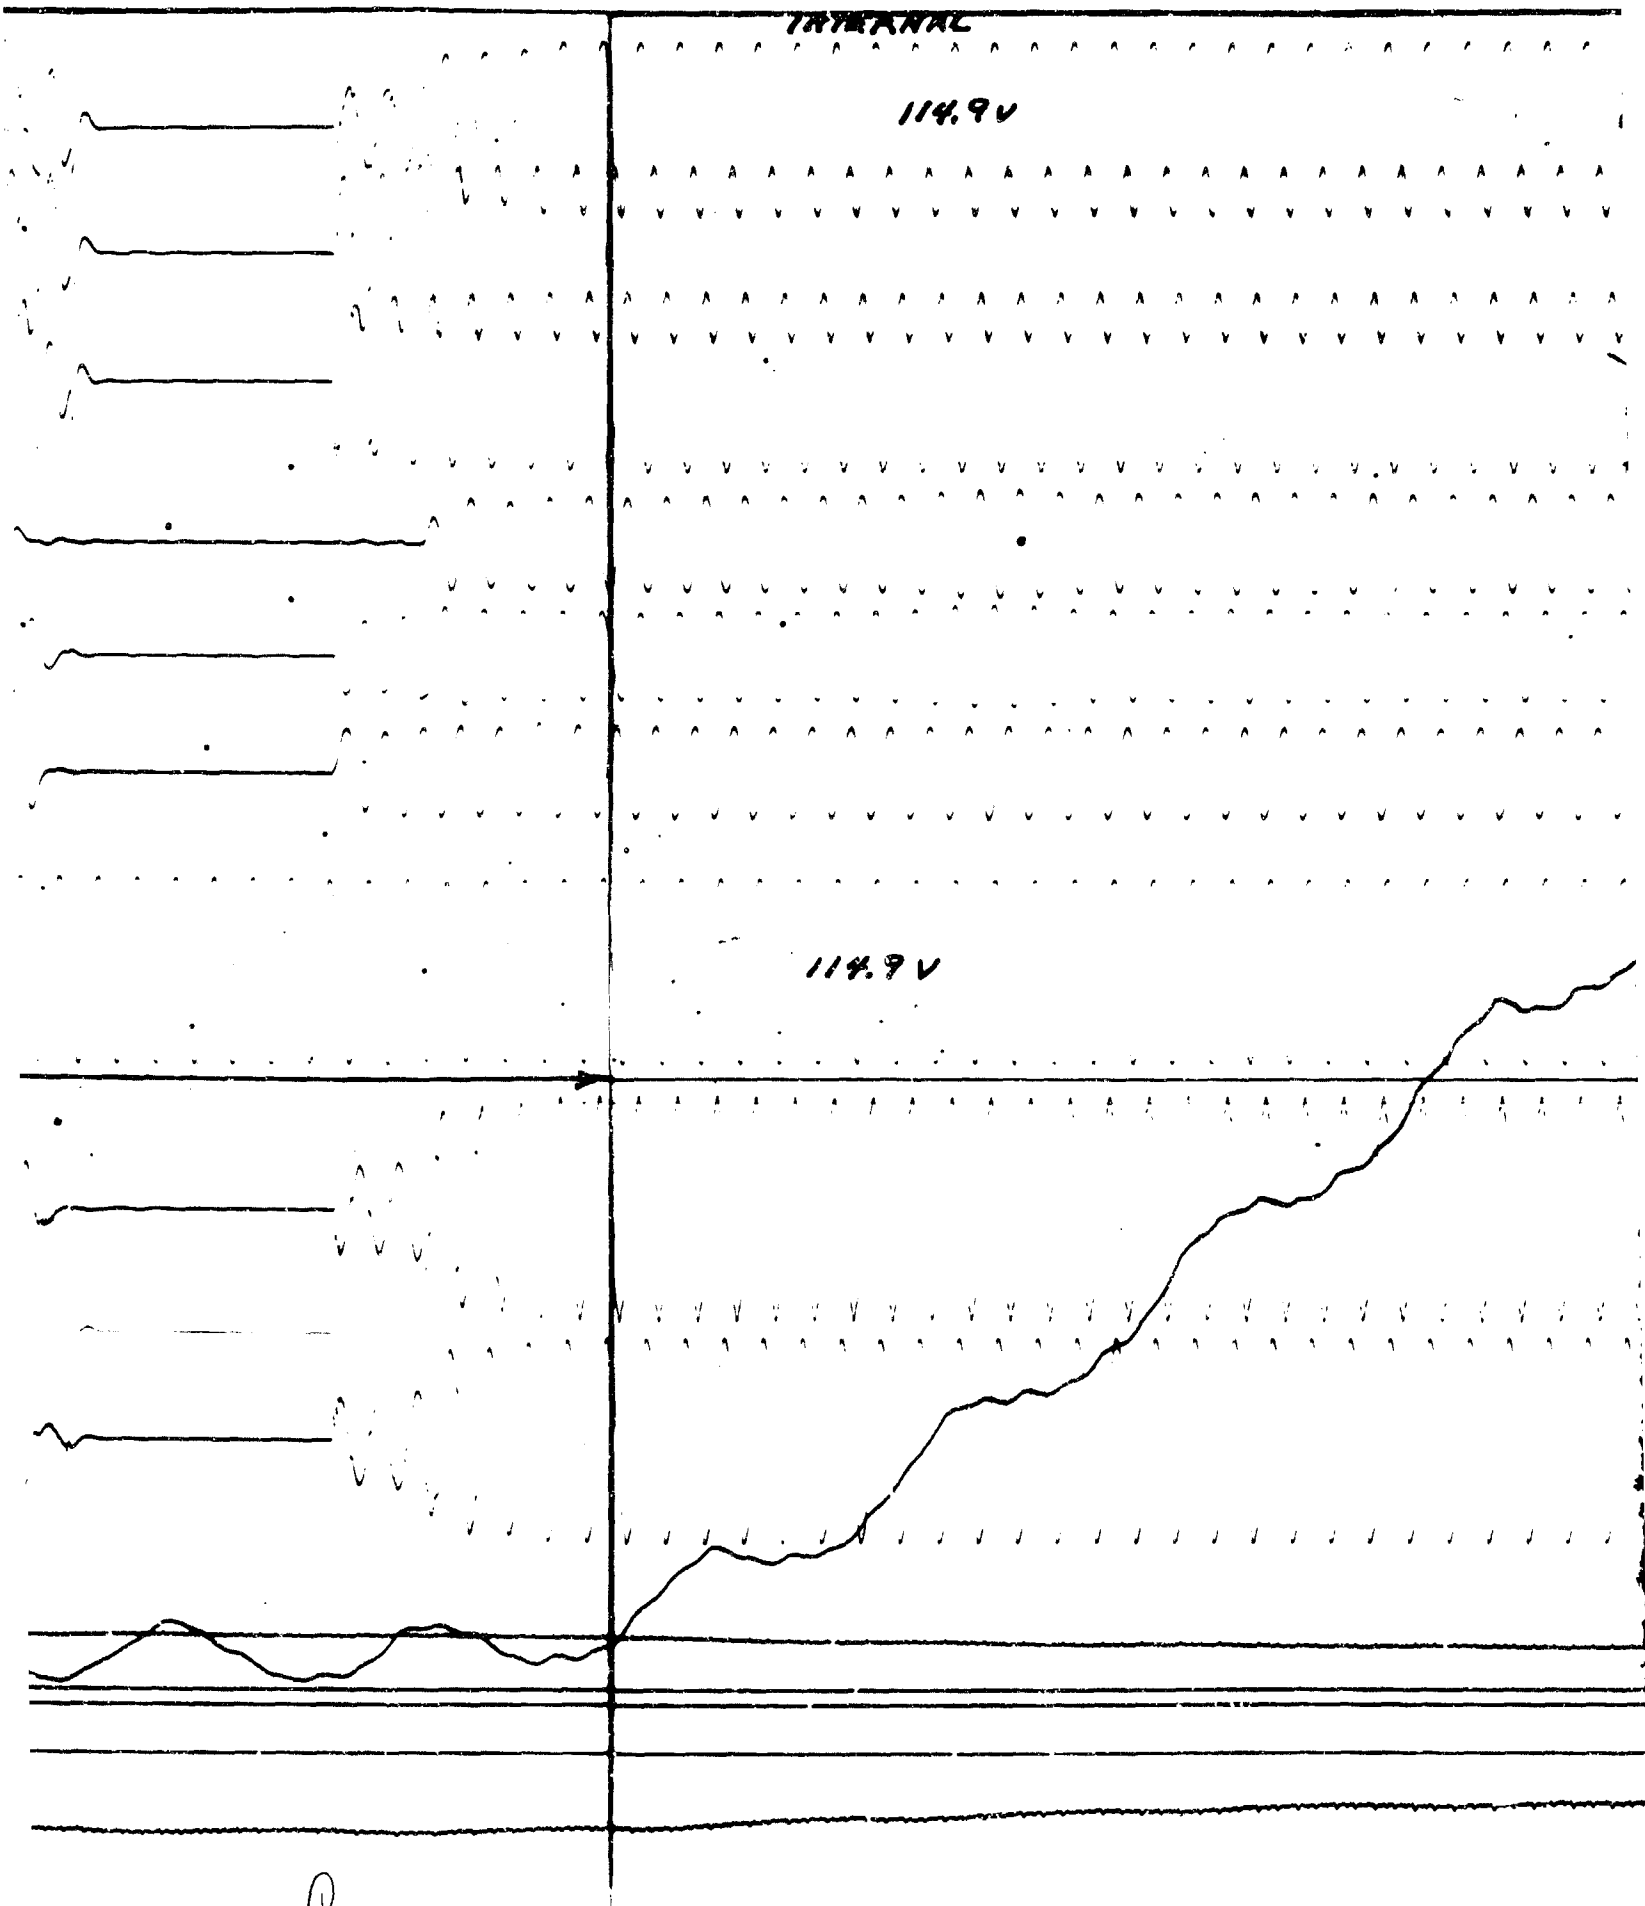



FIGURE 10

INTERNAL

Report 7B 2124-1
Page 42
Date 11 August 1959


114.9V

114.9V

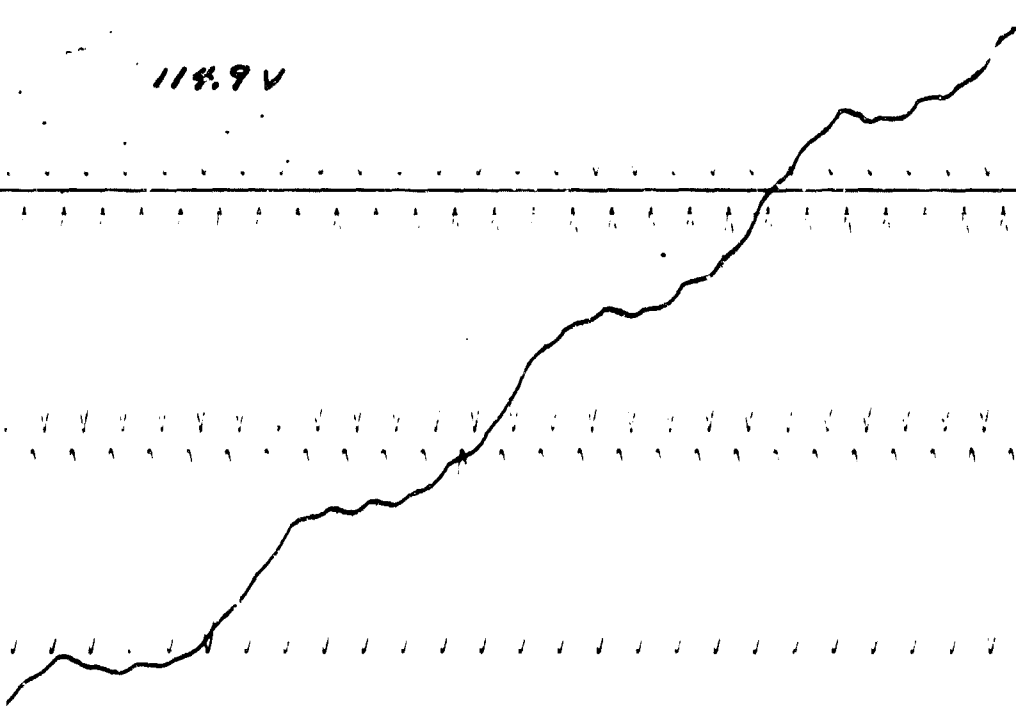

7-6-59 A.C. Brown

D

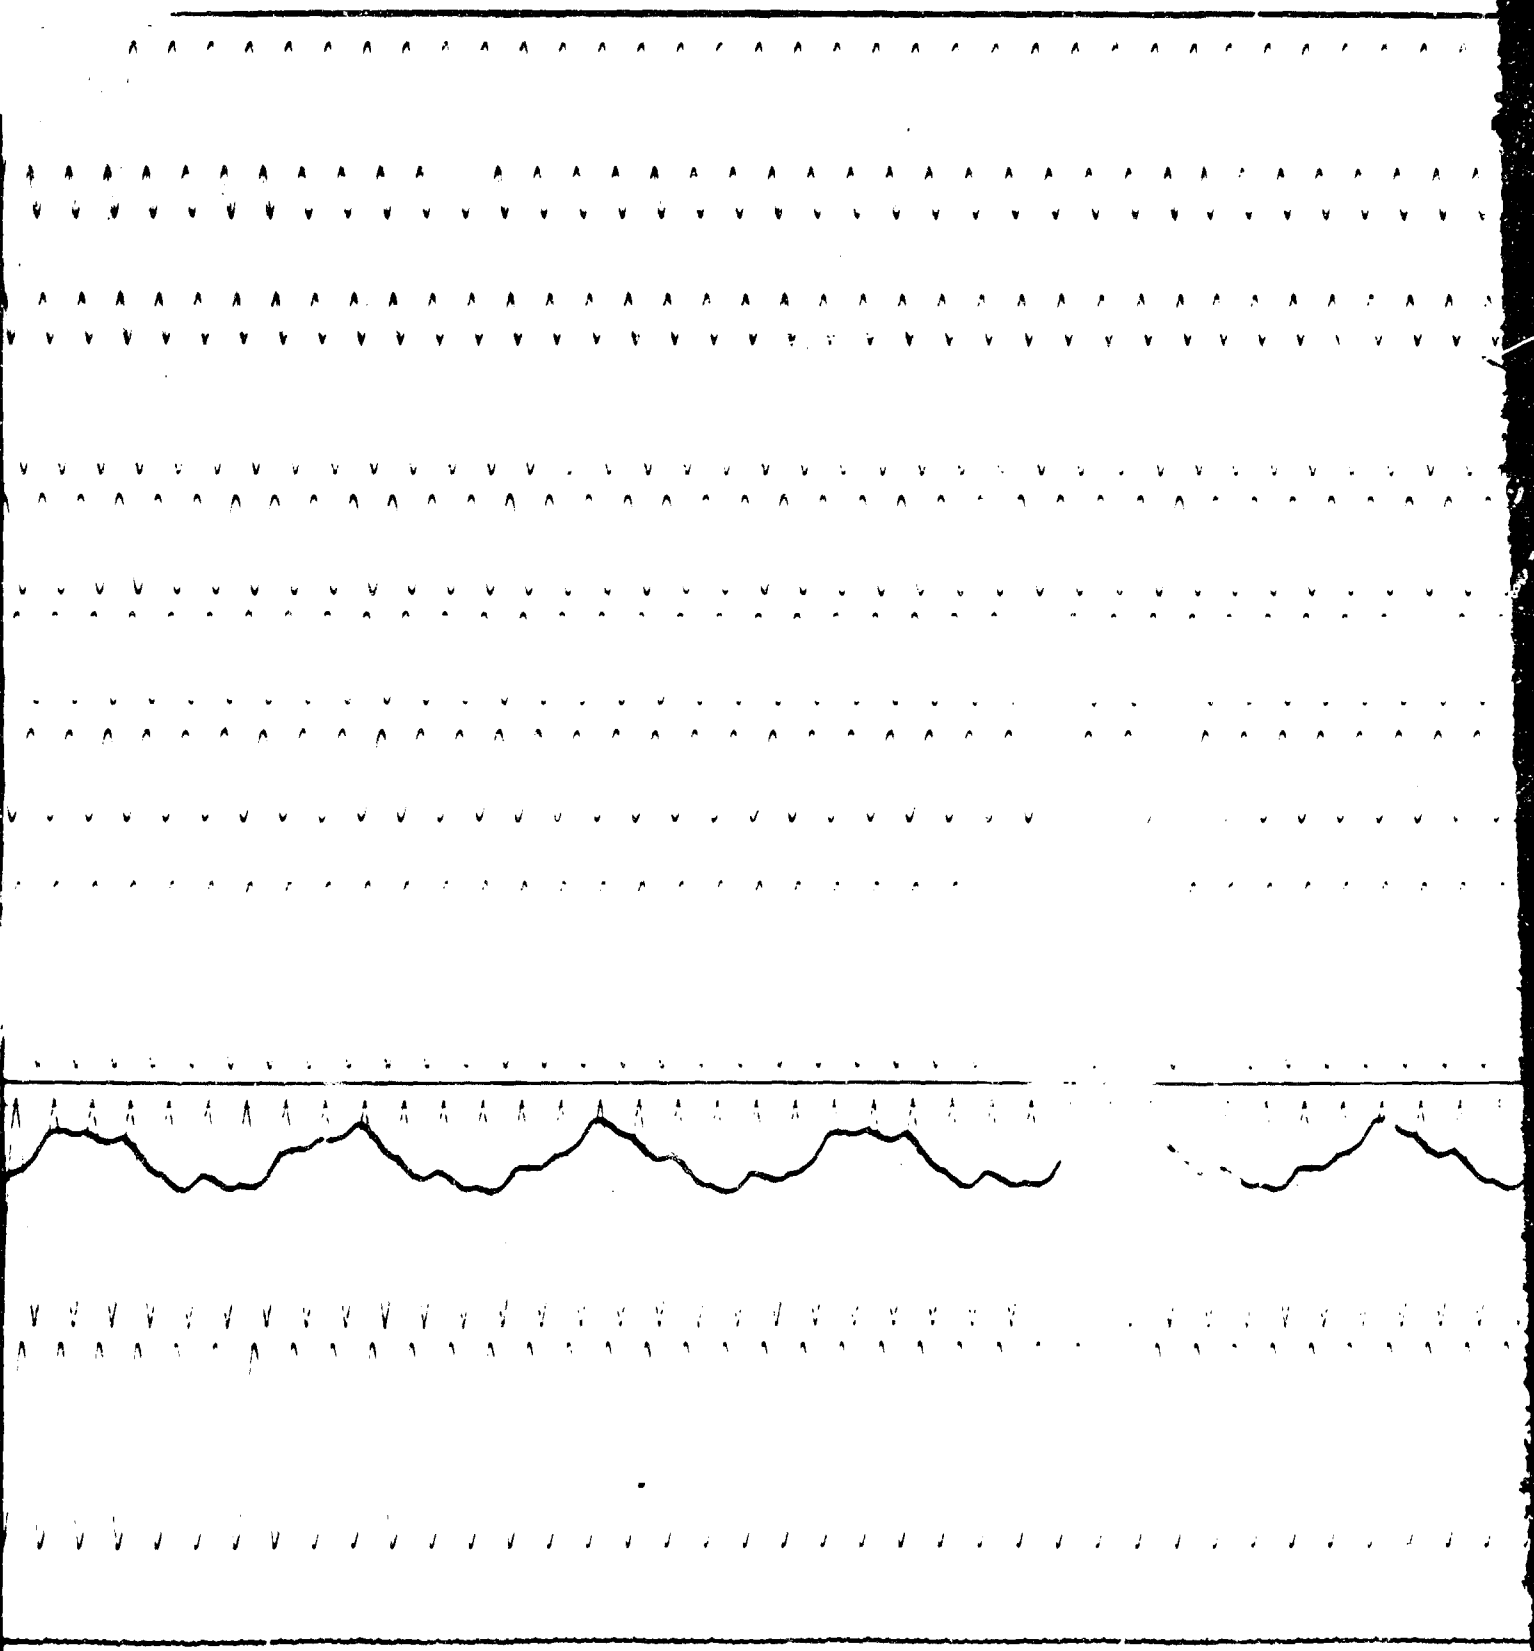

TRANSFE

A

ΦA VOLTS

114.9V

ΦB VOLTS

ΦC VOLTS

ARMA ΦA AMPS

3.54A

ARMA ΦB AMPS

3.29A

ARMA ΦC AMPS

3.66A

INVERTER ΦA AMPS

114.9V

100 HZ 5000 MS

TRANSFER (EXTERNAL)

TRANSFER (INTERNAL)


ARMA D.C. VOLTS

INVERTER D.C. VOLTS

INVERTER D.C. AMPS

B

INTERNAL

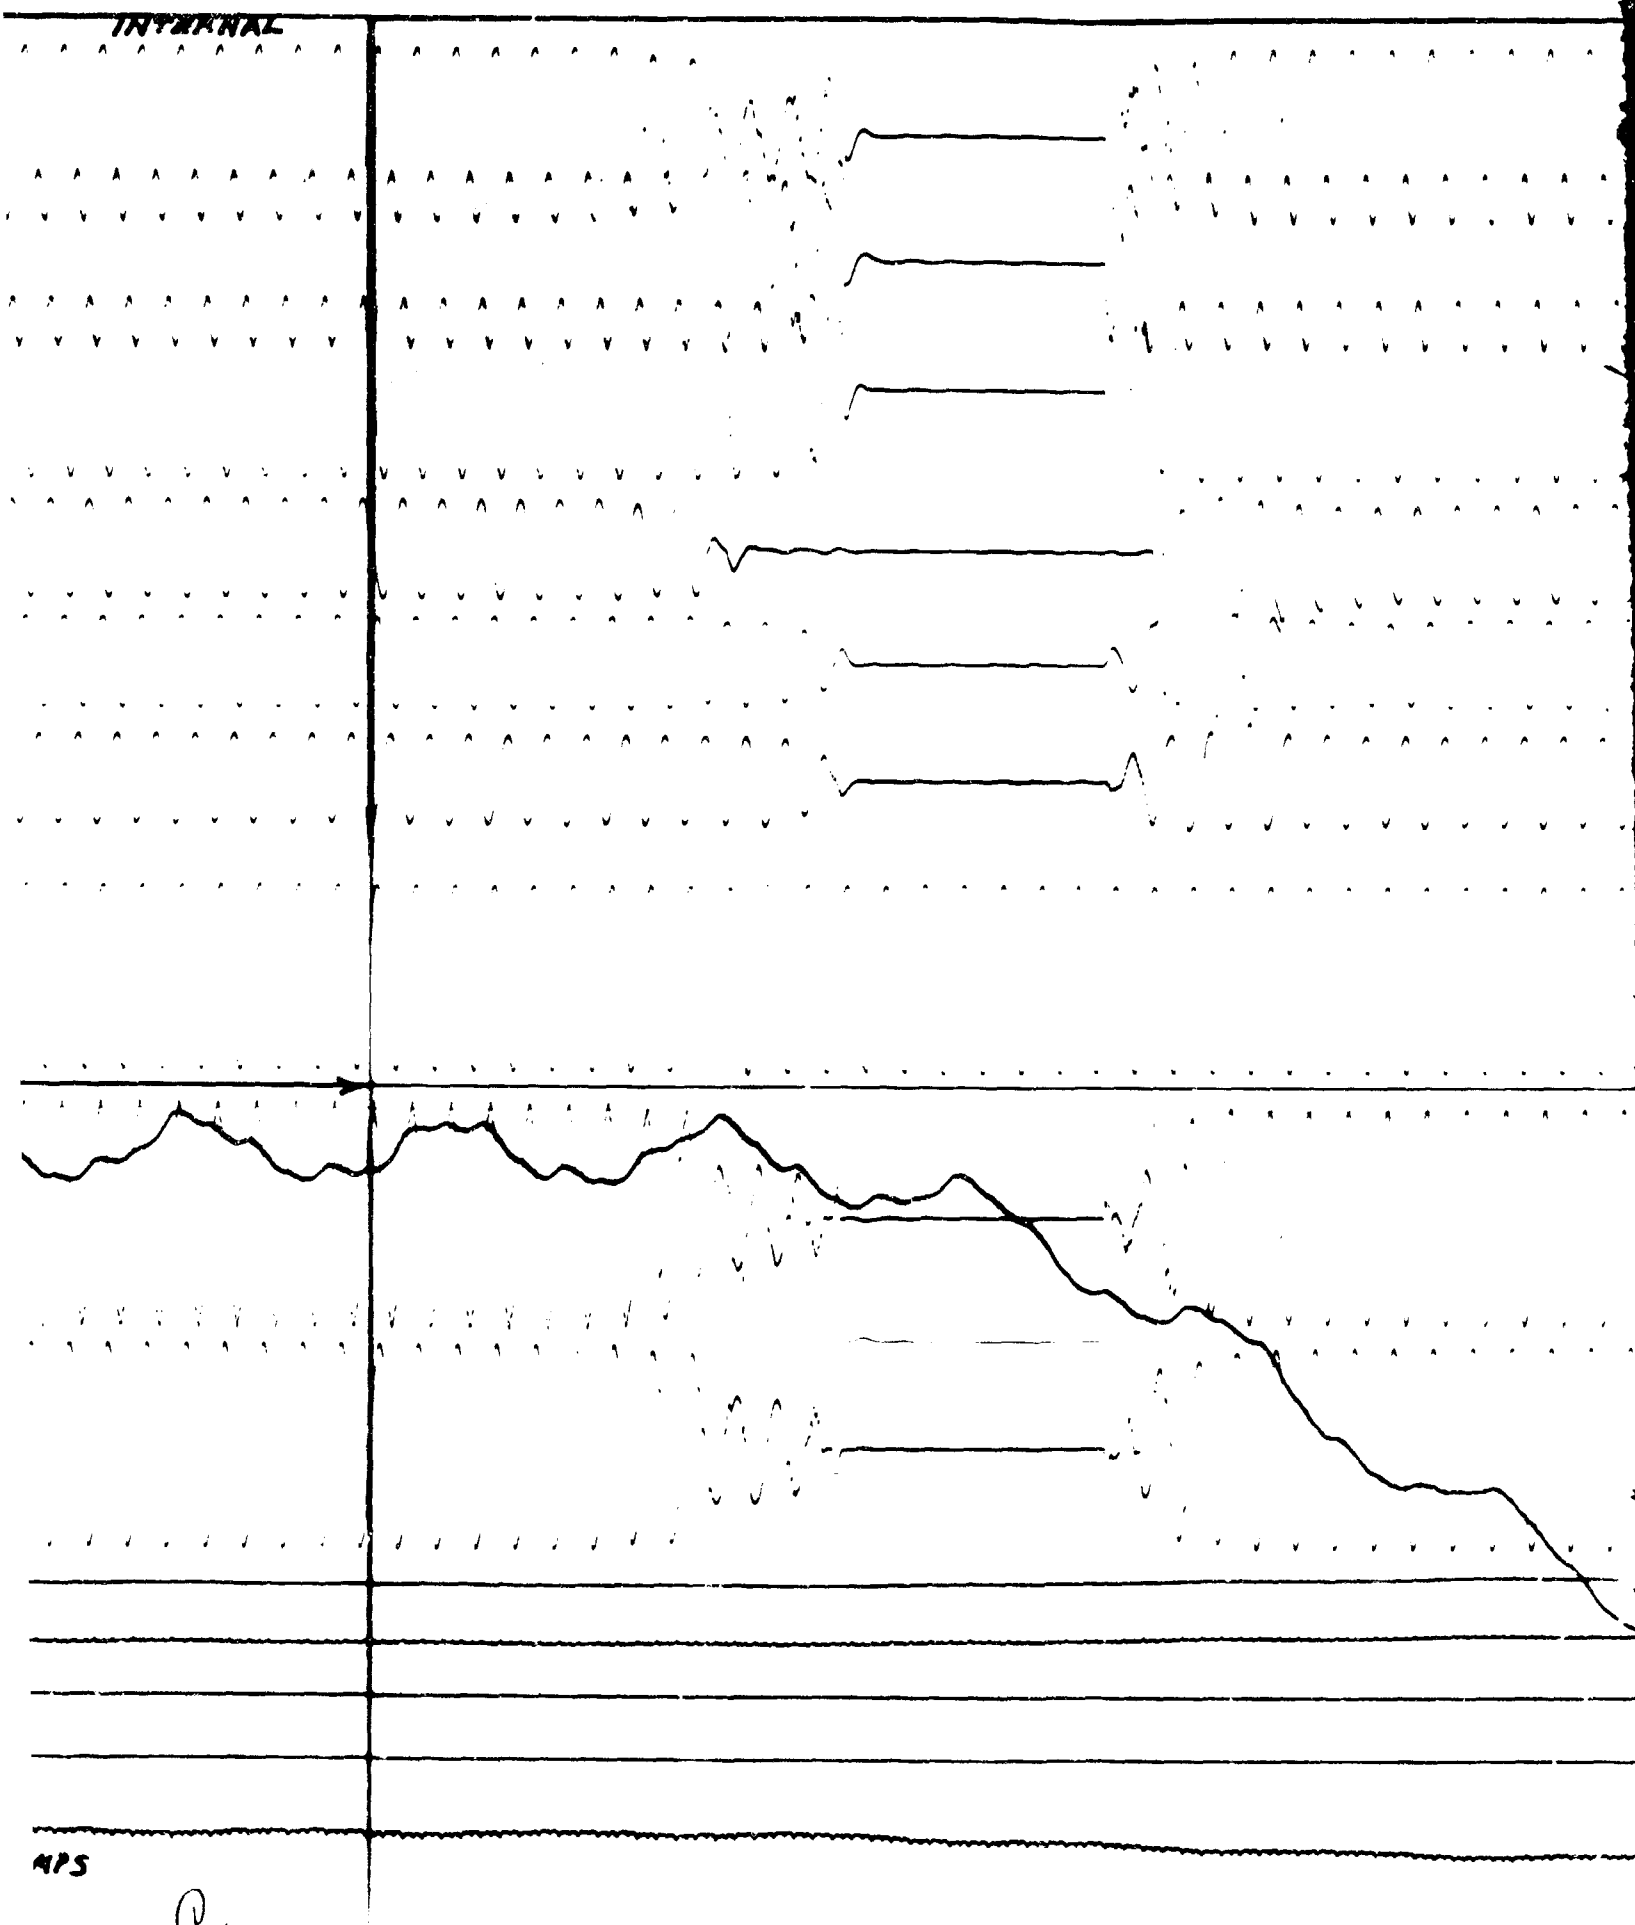

MPS


C

FIGURE 41

EXTERNAL

115.8V


115.8V

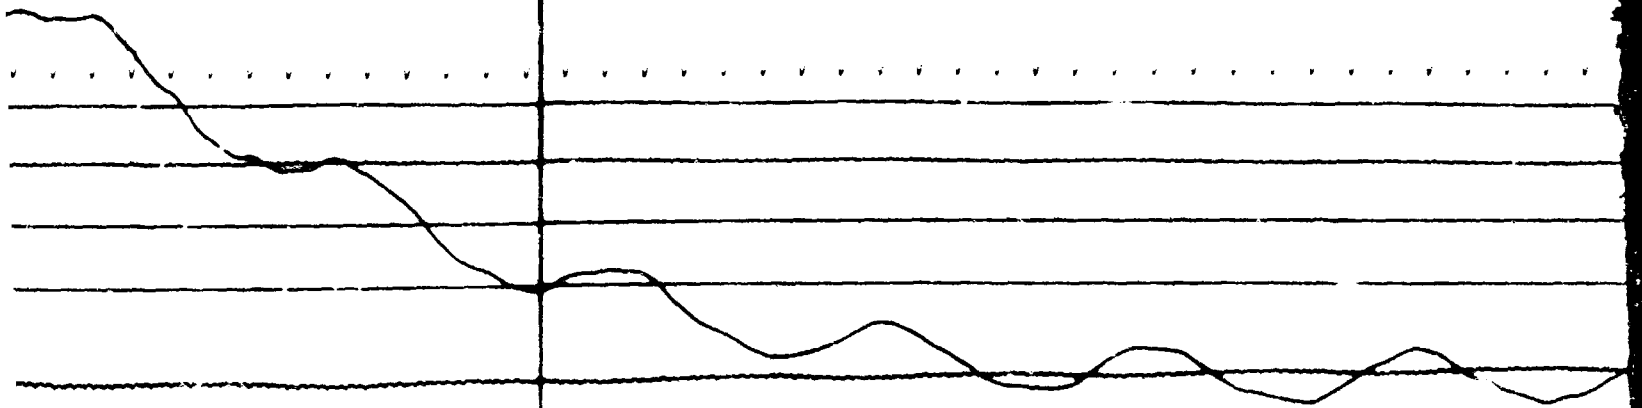

D

Report 2124-1
Page 63
Date 11 August
1959

7-6-69 A.C. Pearson

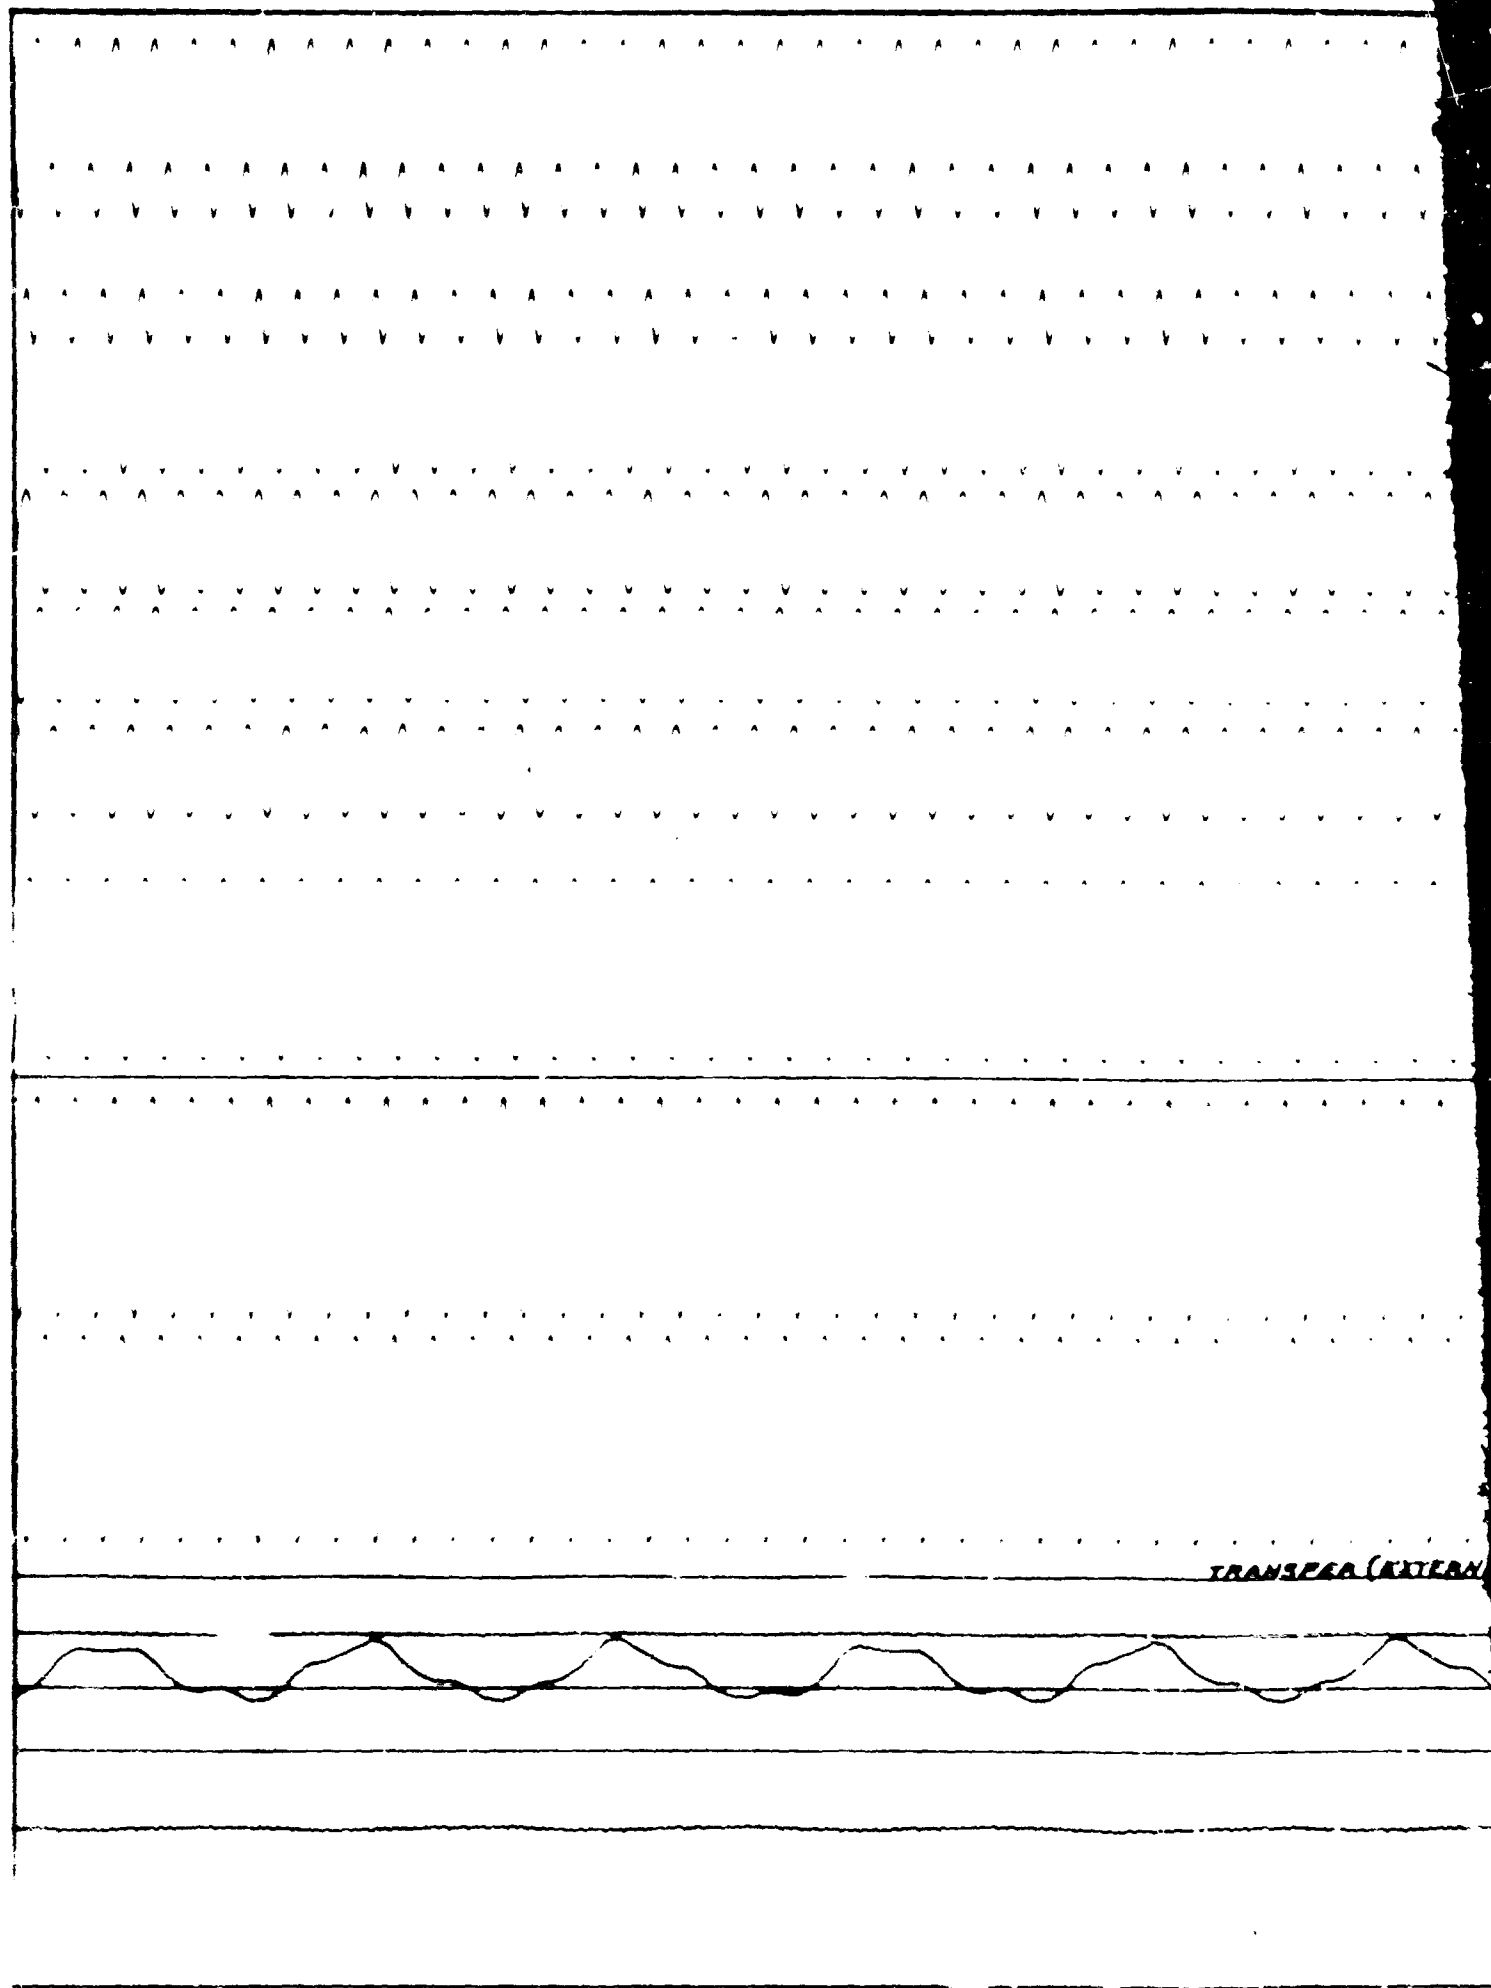

TRANSFER (EXTEND)

A

GA VOLTS

115.7 V

GB VOLTS

GC VOLTS

ARMA GA AMPS

3.52 A

ARMA GB AMPS

3.29 A

ARMA GC AMPS

3.66 A

INVERTER GA VOLTS

118.8 V

100 AMPS

$V_{T_1-T_2}$

$V_{T_2-T_3}$

$V_{T_3-T_1}$


WAVE (INTERNAL)

TRANSFORMER (INTERNAL)

ARMA DC VOLT

INVERTER DC VOLTS


INVERTER DC AM

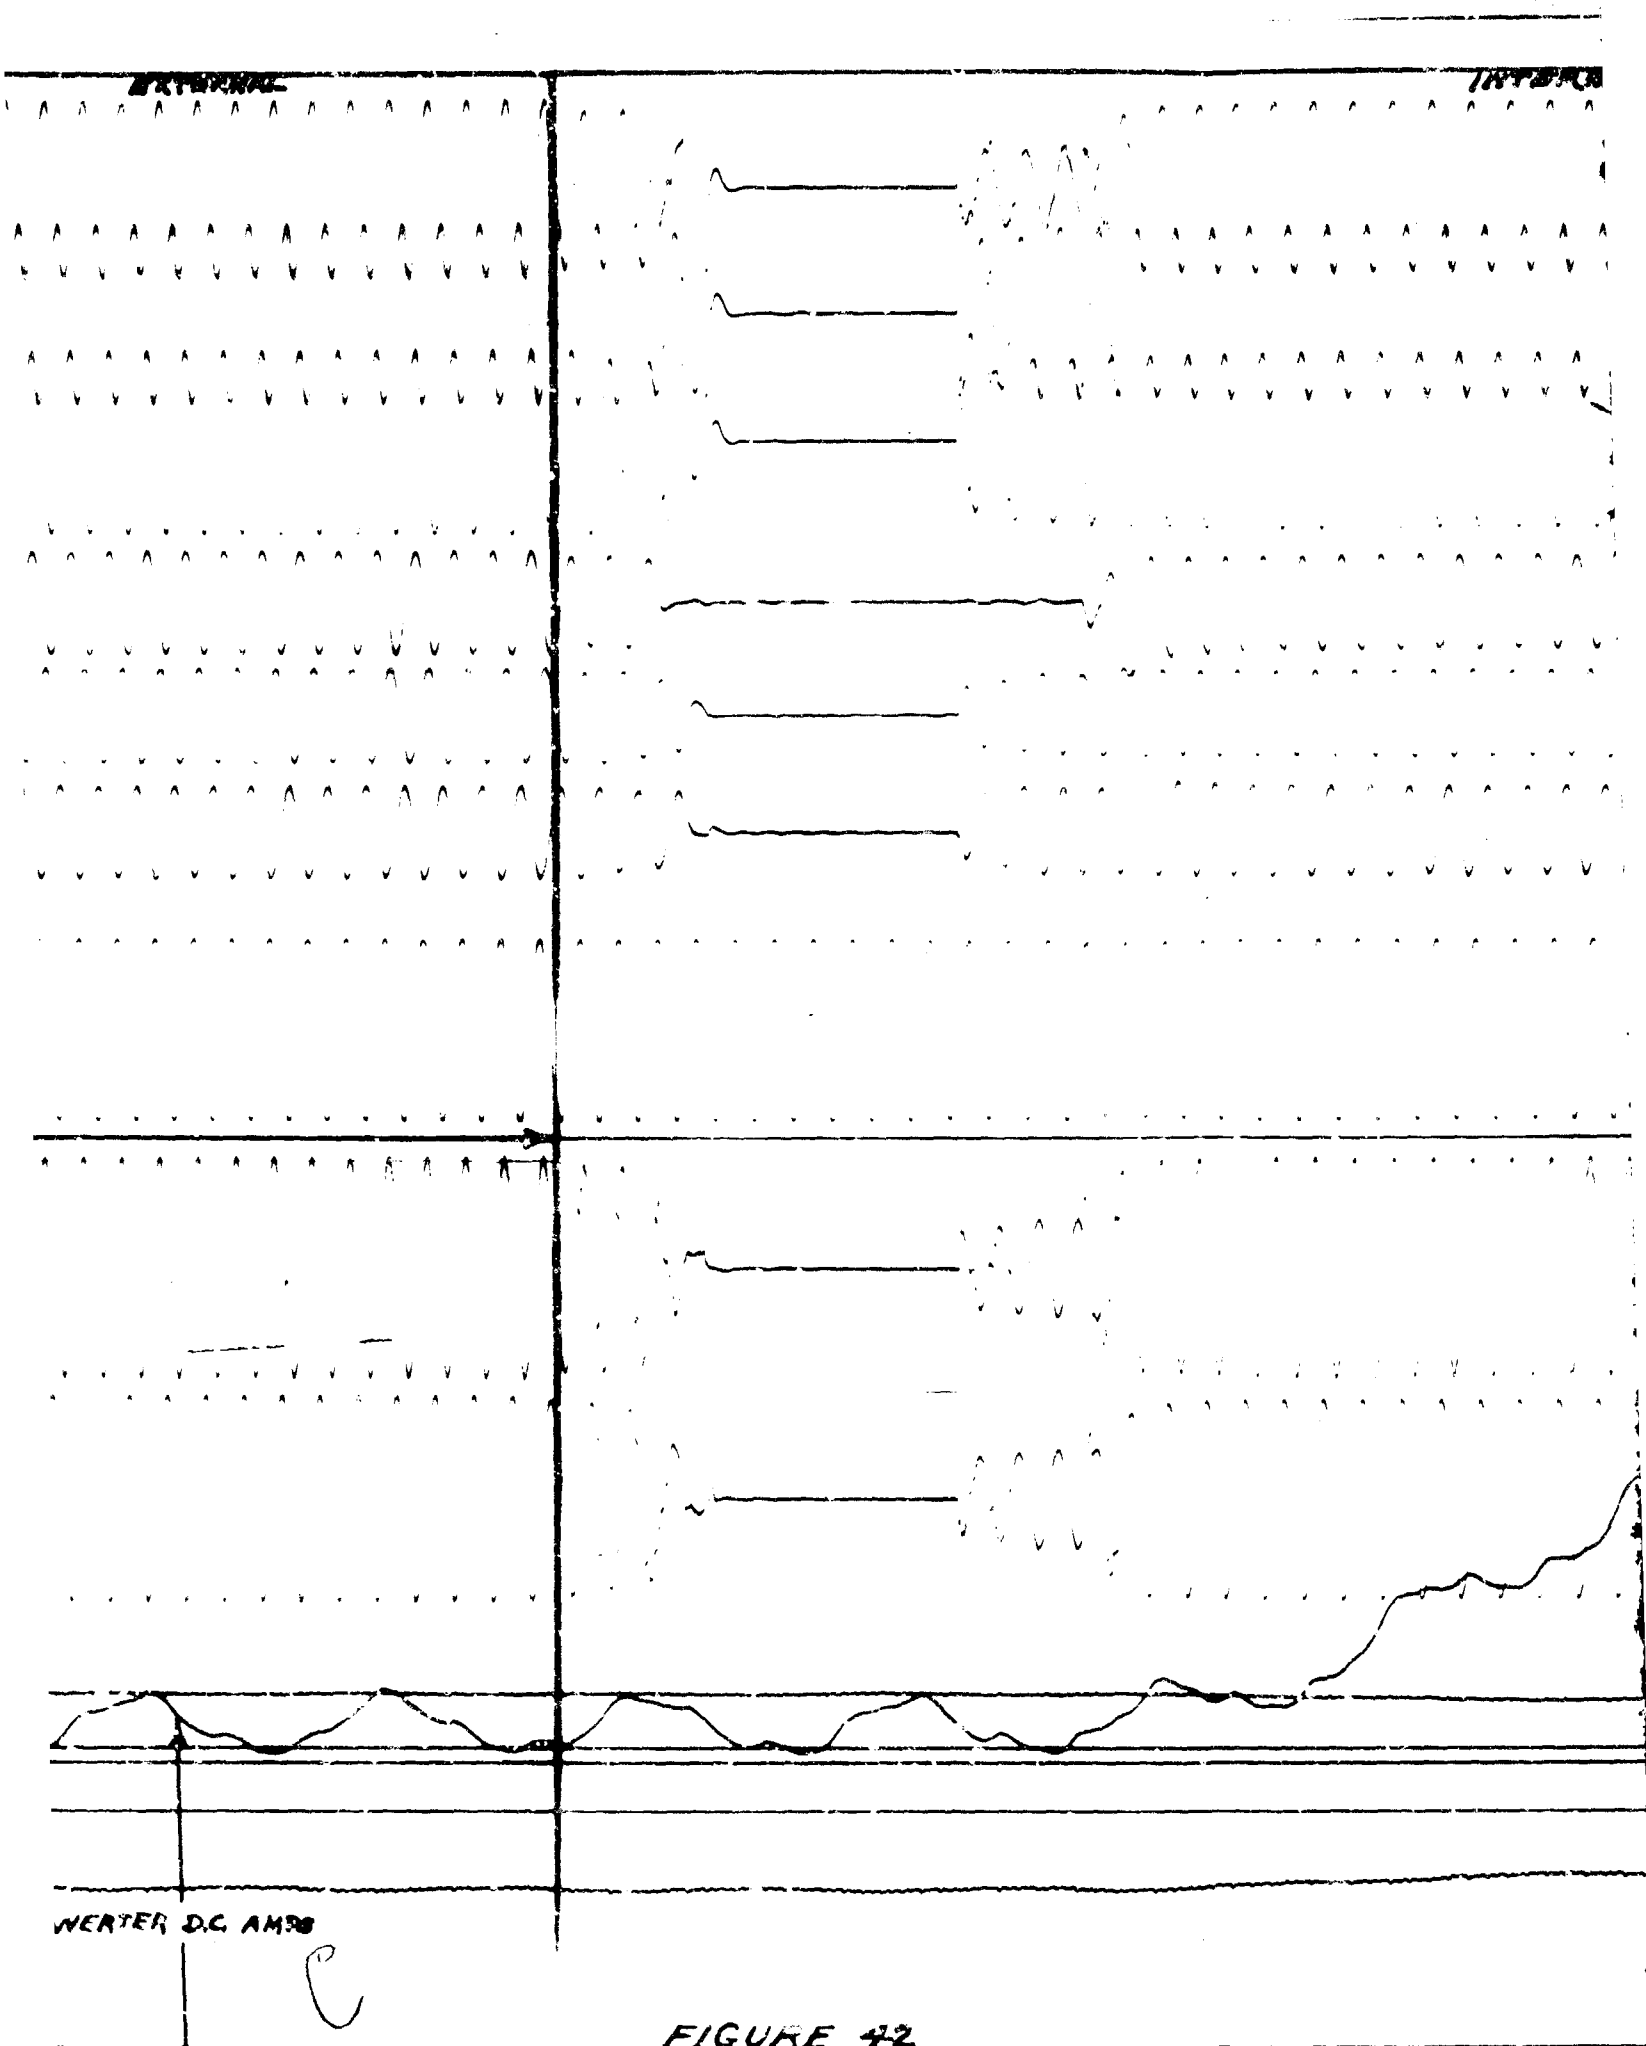

INTERNAL

112.4V

112.4V

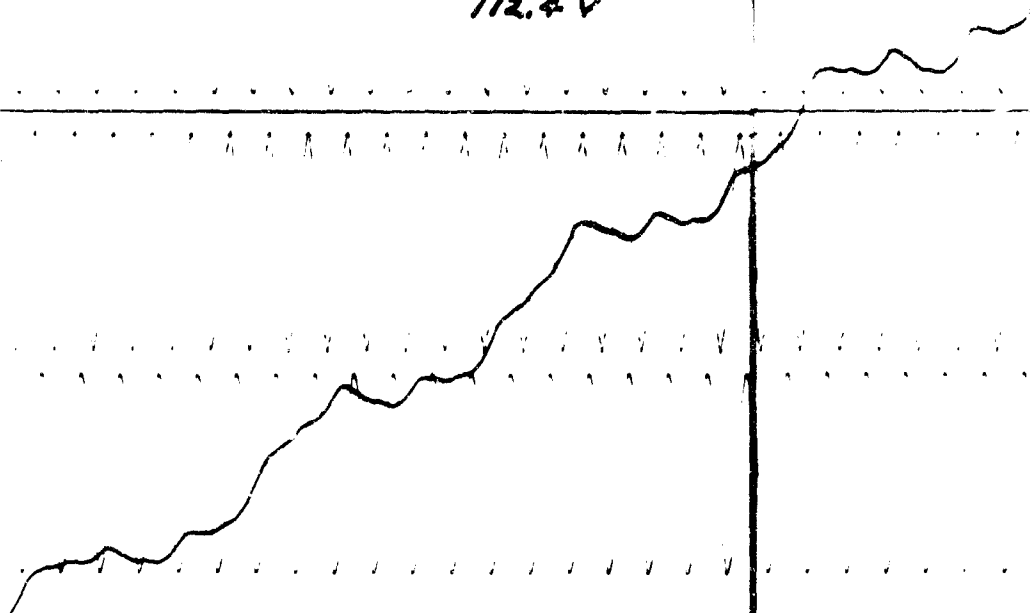


0

7-6-51 AC Cation

Report ZB 2124-1
Page 64
Date 11 August 1959

E

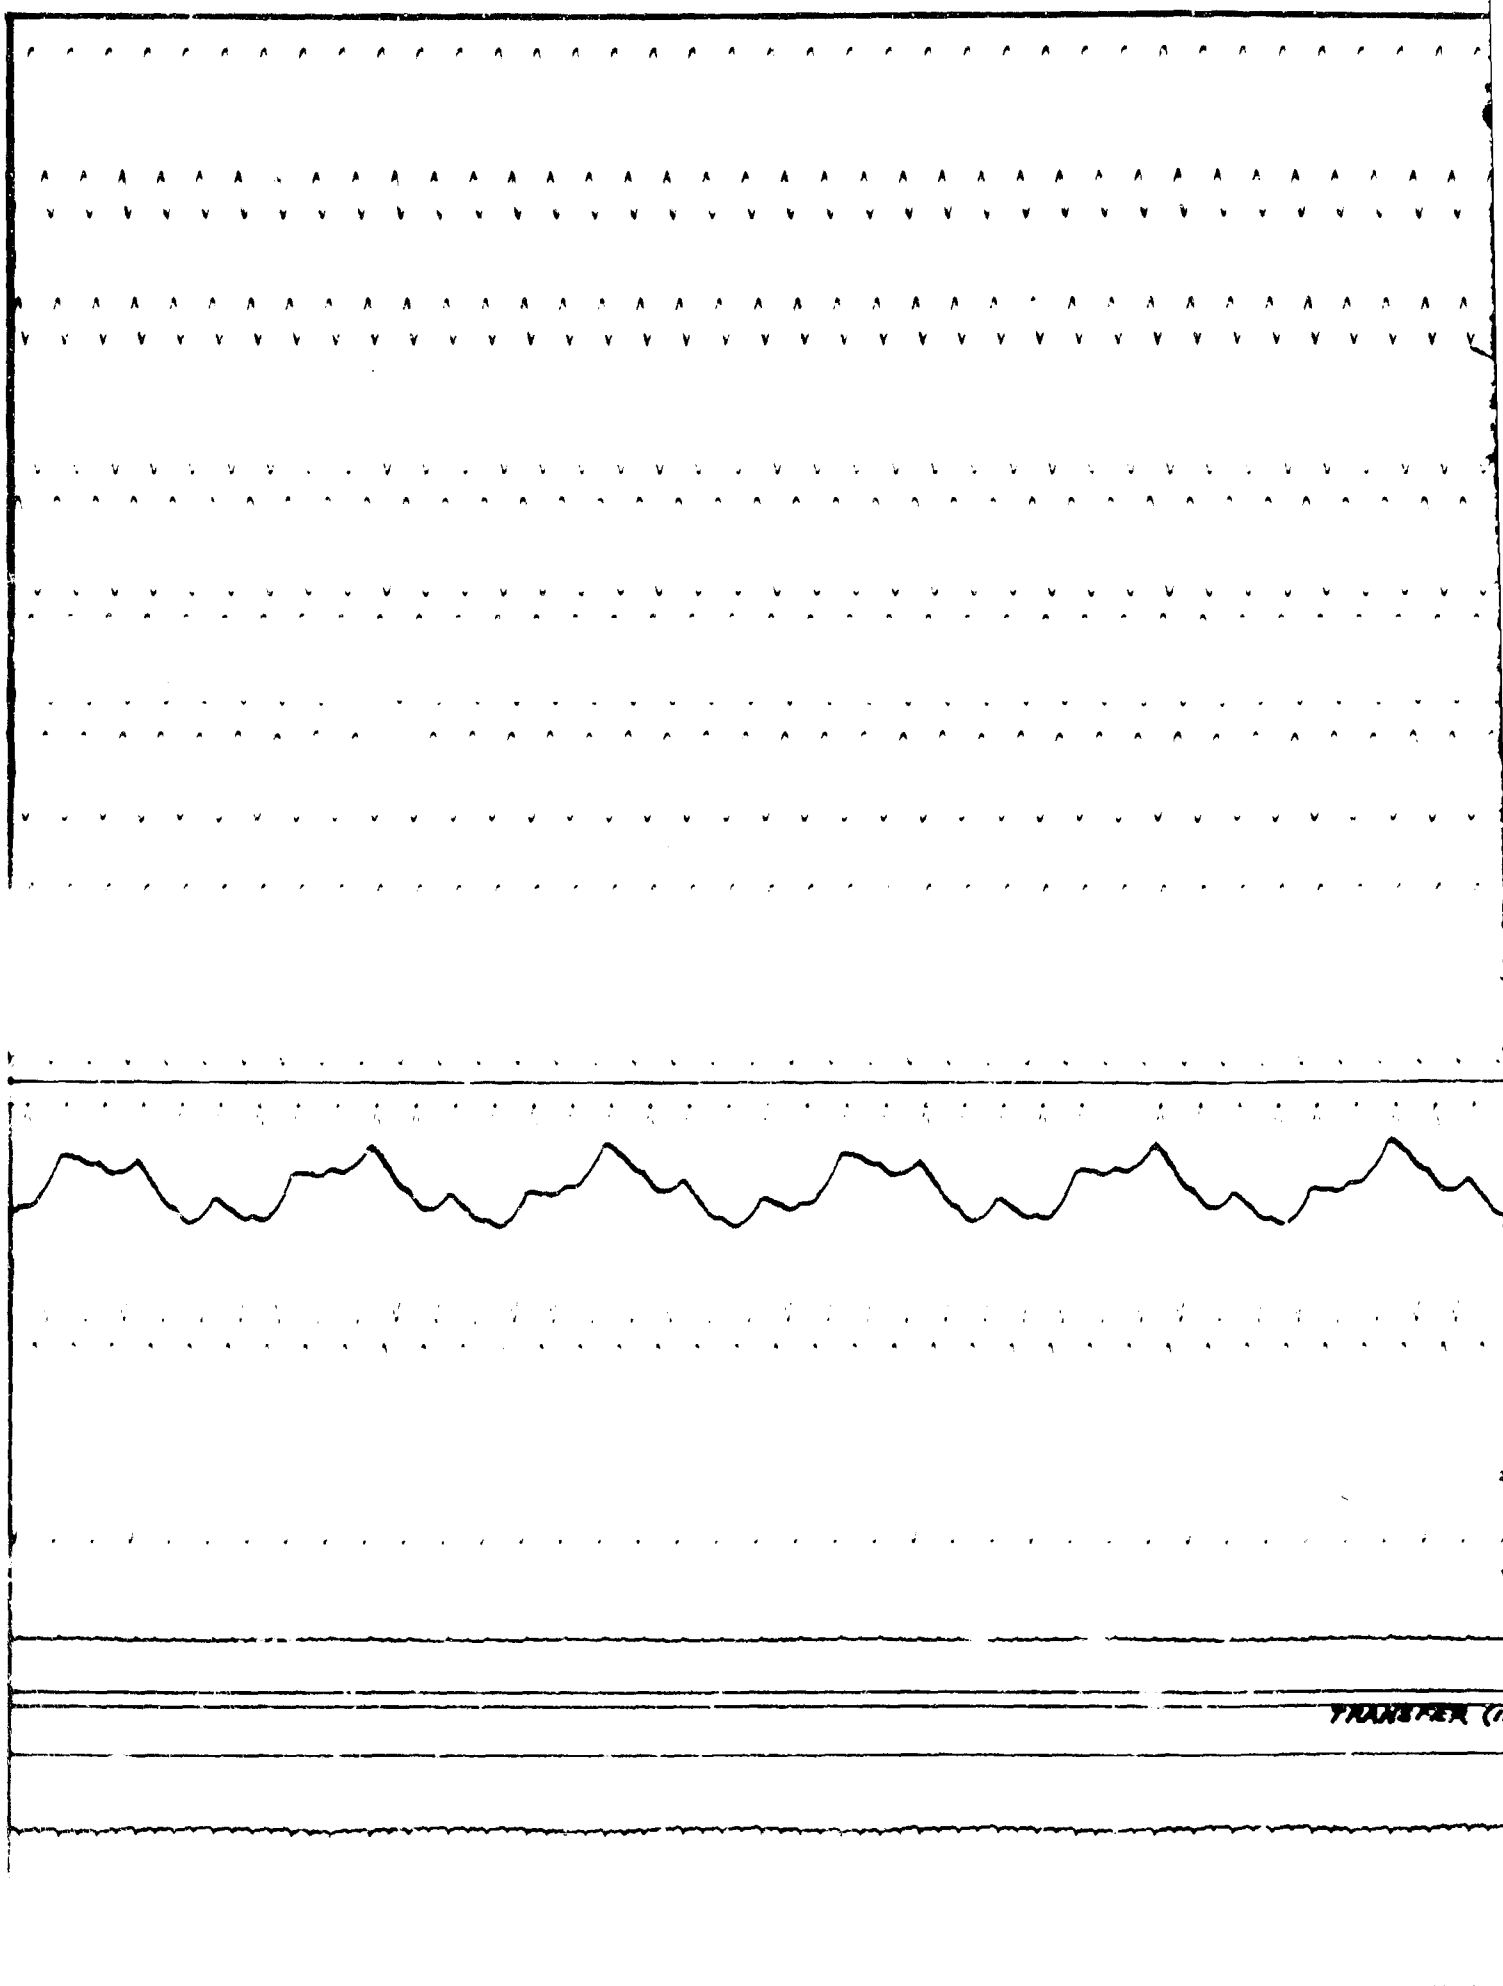

ΦA VOLTS

112.4 V

ΦB VOLTS

ΦC VOLTS

ARMA ΦA AMPS

3.54 A

ARMA ΦB AMPS

3.29 A

ARMA ΦC AMPS

3.66 A

INVERTER ΦA VOLTS

112.4 V

100 MICROSECONDS

$V_{T_1-T_2}$

$V_{T_2-T_3}$

$V_{T_3-T_1}$

TRANSFER (EXTERNAL)

TRANSFER (INTERNAL)


ARMA D.C. VOLTS

INVERTER D.C. VOLTS

INVERTER D.C. CURRENT

B

INTERNAL

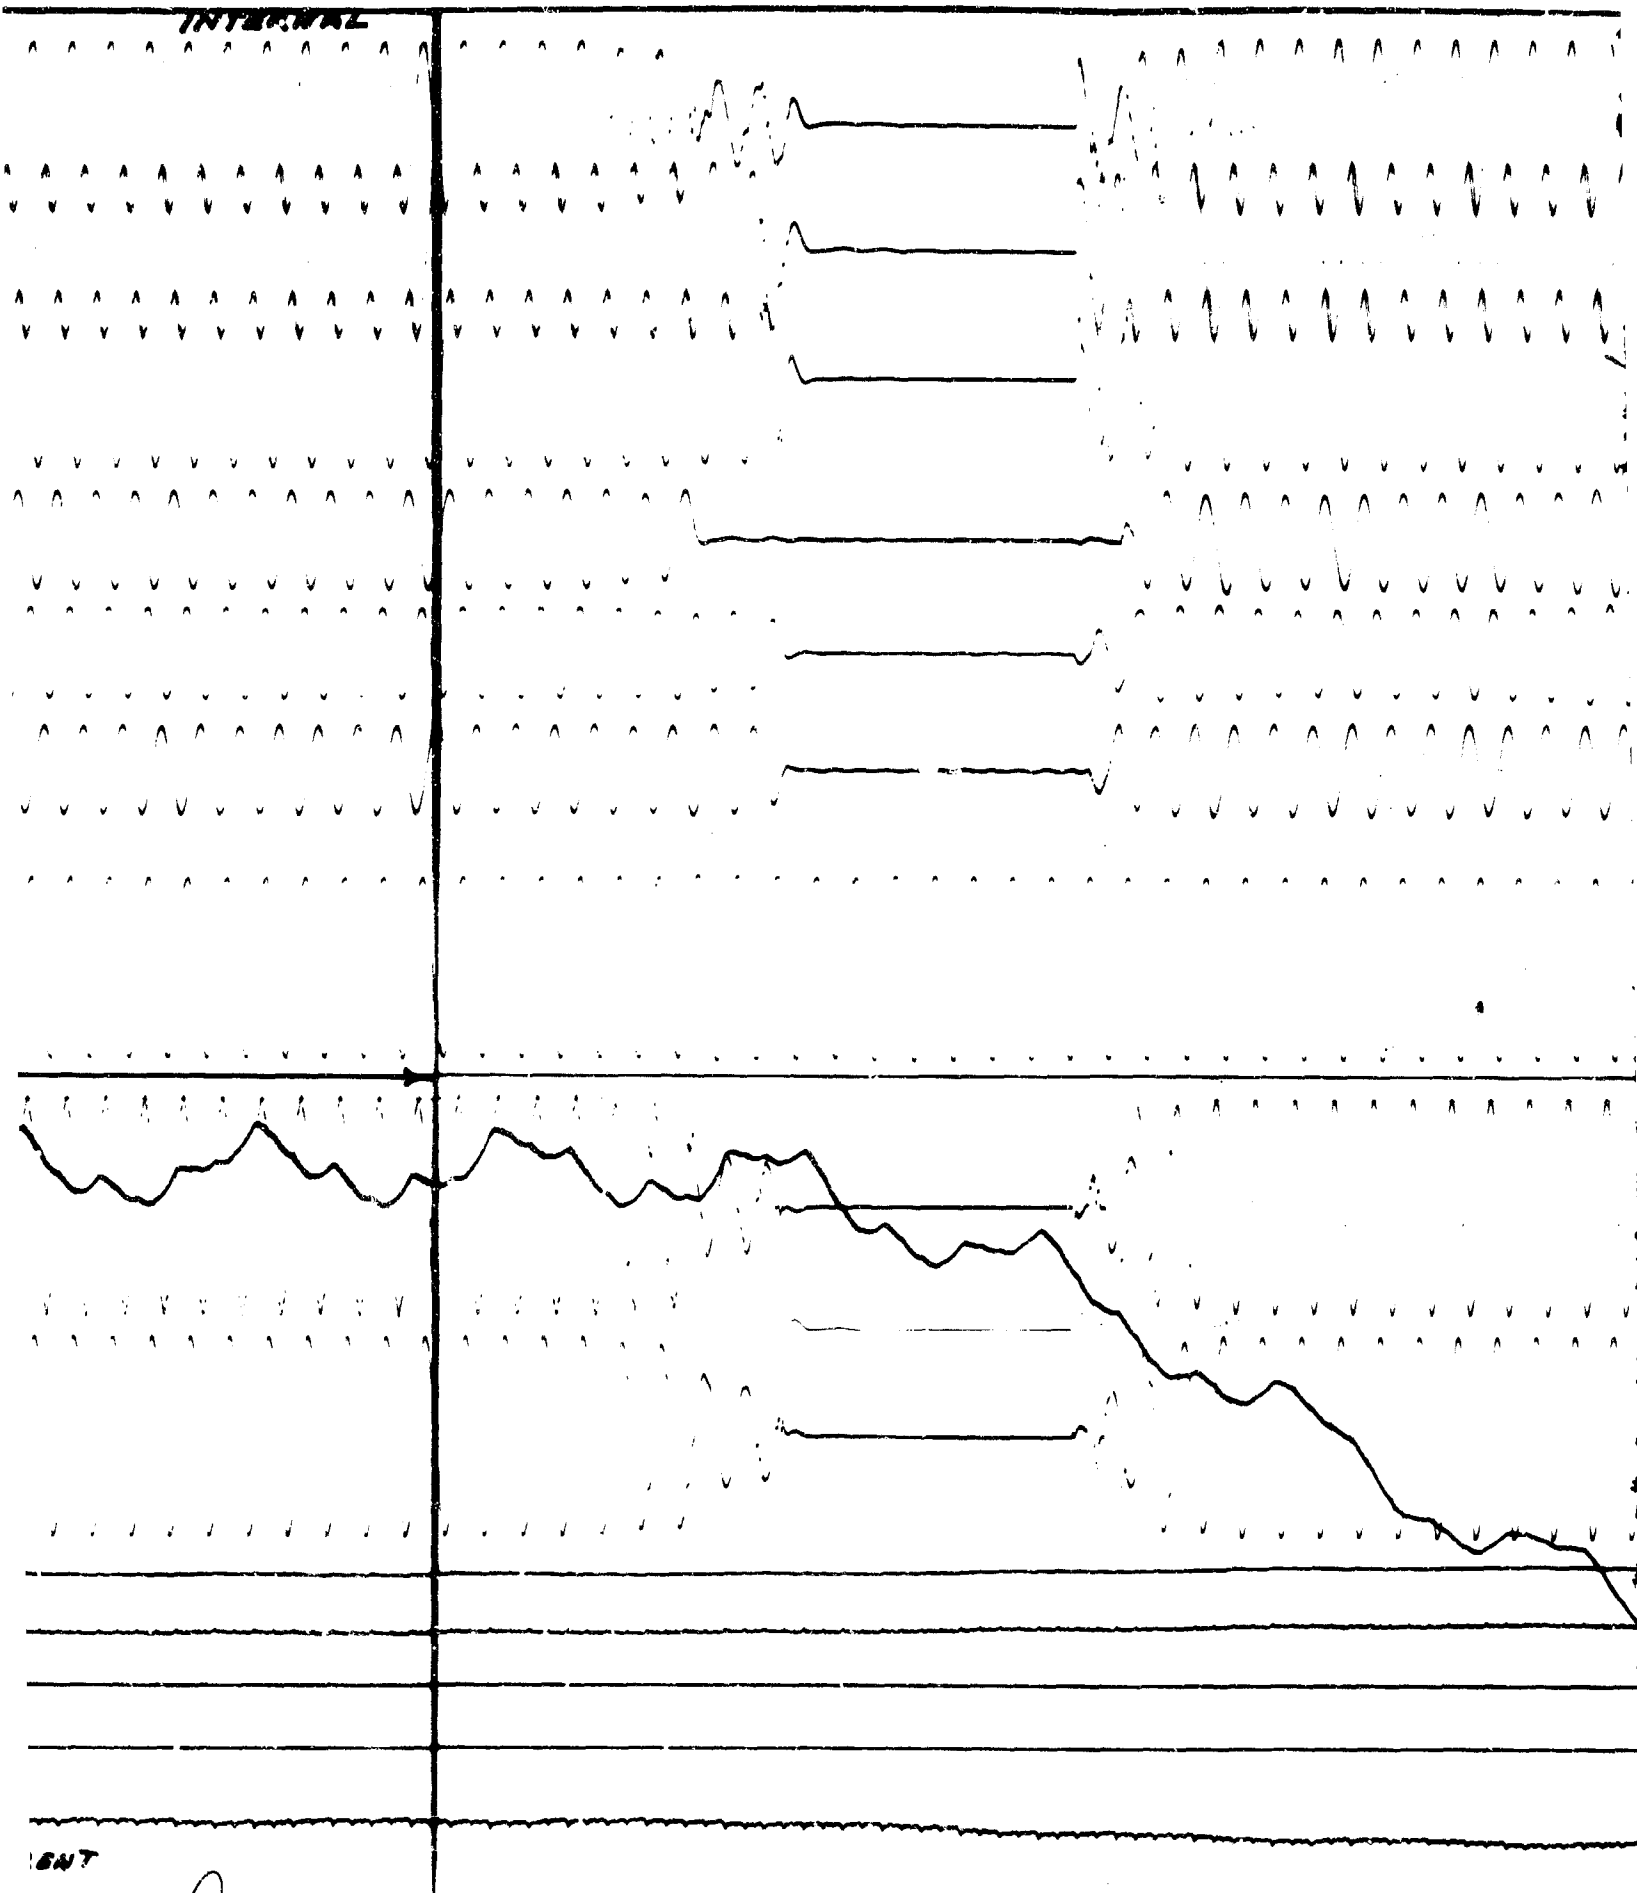

C

FIGURE 12


EXTERNAL

115.7 V


118.2 V

0

5.7 V

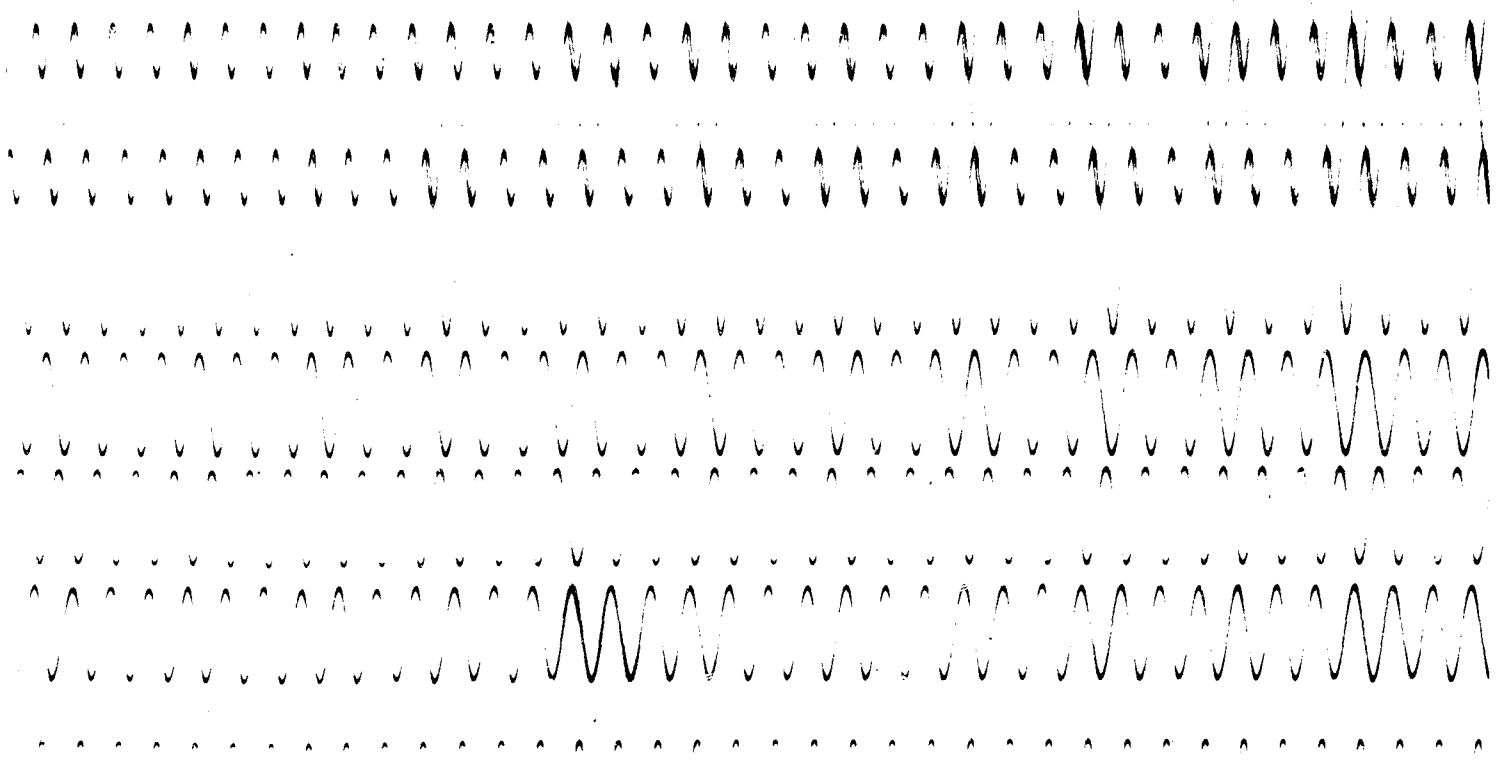

1.2 V

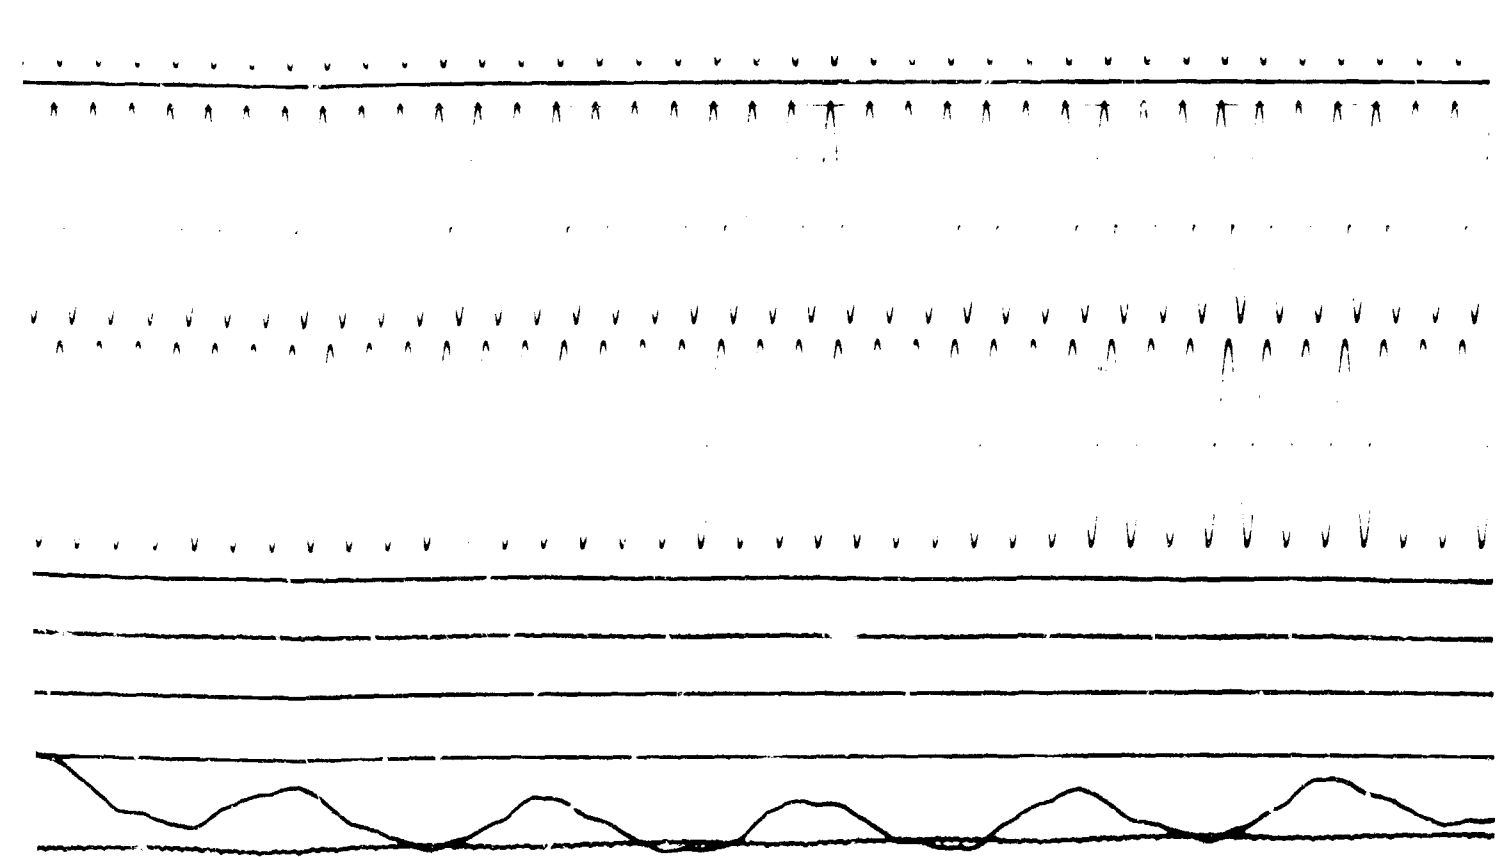

20-51 A.R. Cannon

E