UNCLASSIFIED

AD NUMBER

AD052997

NEW LIMITATION CHANGE

TO

Approved for public release, distribution unlimited

FROM

Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; 01 AUG 1954. Other requests shall be referred to Department of the Air Force, ATTN: Public Affairs Office, Washington, DC 20330.

AUTHORITY

USAF 88 CS/SCOKIF [FOIA] ltr dtd 2 Sep 2009

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED

AD NUMBER

AD052997

CLASSIFICATION CHANGES

TO

unclassified

FROM

confidential

AUTHORITY

31 Aug 1966, DoDD 5200.10

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED

AD NUMBER

AD052997

CLASSIFICATION CHANGES

TO

confidential

FROM

secret

AUTHORITY

31 Aug 1957, DoDD 5200.10

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED

AD 52997

*Reproduced*
*by the*

ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA



DECLASSIFIED
DOD DIR 5200.9

UNCLASSIFIED

UNCLASSIFIED

AD 52997

Armed Services Technical Information Agency

Reproduced by

DOCUMENT SERVICE CENTER

KNOTT BUILDING, DAYTON, 2, OHIO

Because of our limited supply, you are requested to
RETURN THIS COPY WHEN IT HAS SERVED YOUR PURPOSE
so that it may be made available to other requesters.
Your cooperation will be appreciated.

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

UNCLASSIFIED




Convair


PD
52 997

THIS DOCUMENT CONSISTS OF 109 PAGES
COPY NO. 3 OF 35 SERIES A

CONSOLIDATED VULTEE AIRCRAFT CORPORATION
FORT WORTH DIVISION FORT WORTH, TEXAS

FEB 1955

SECRET

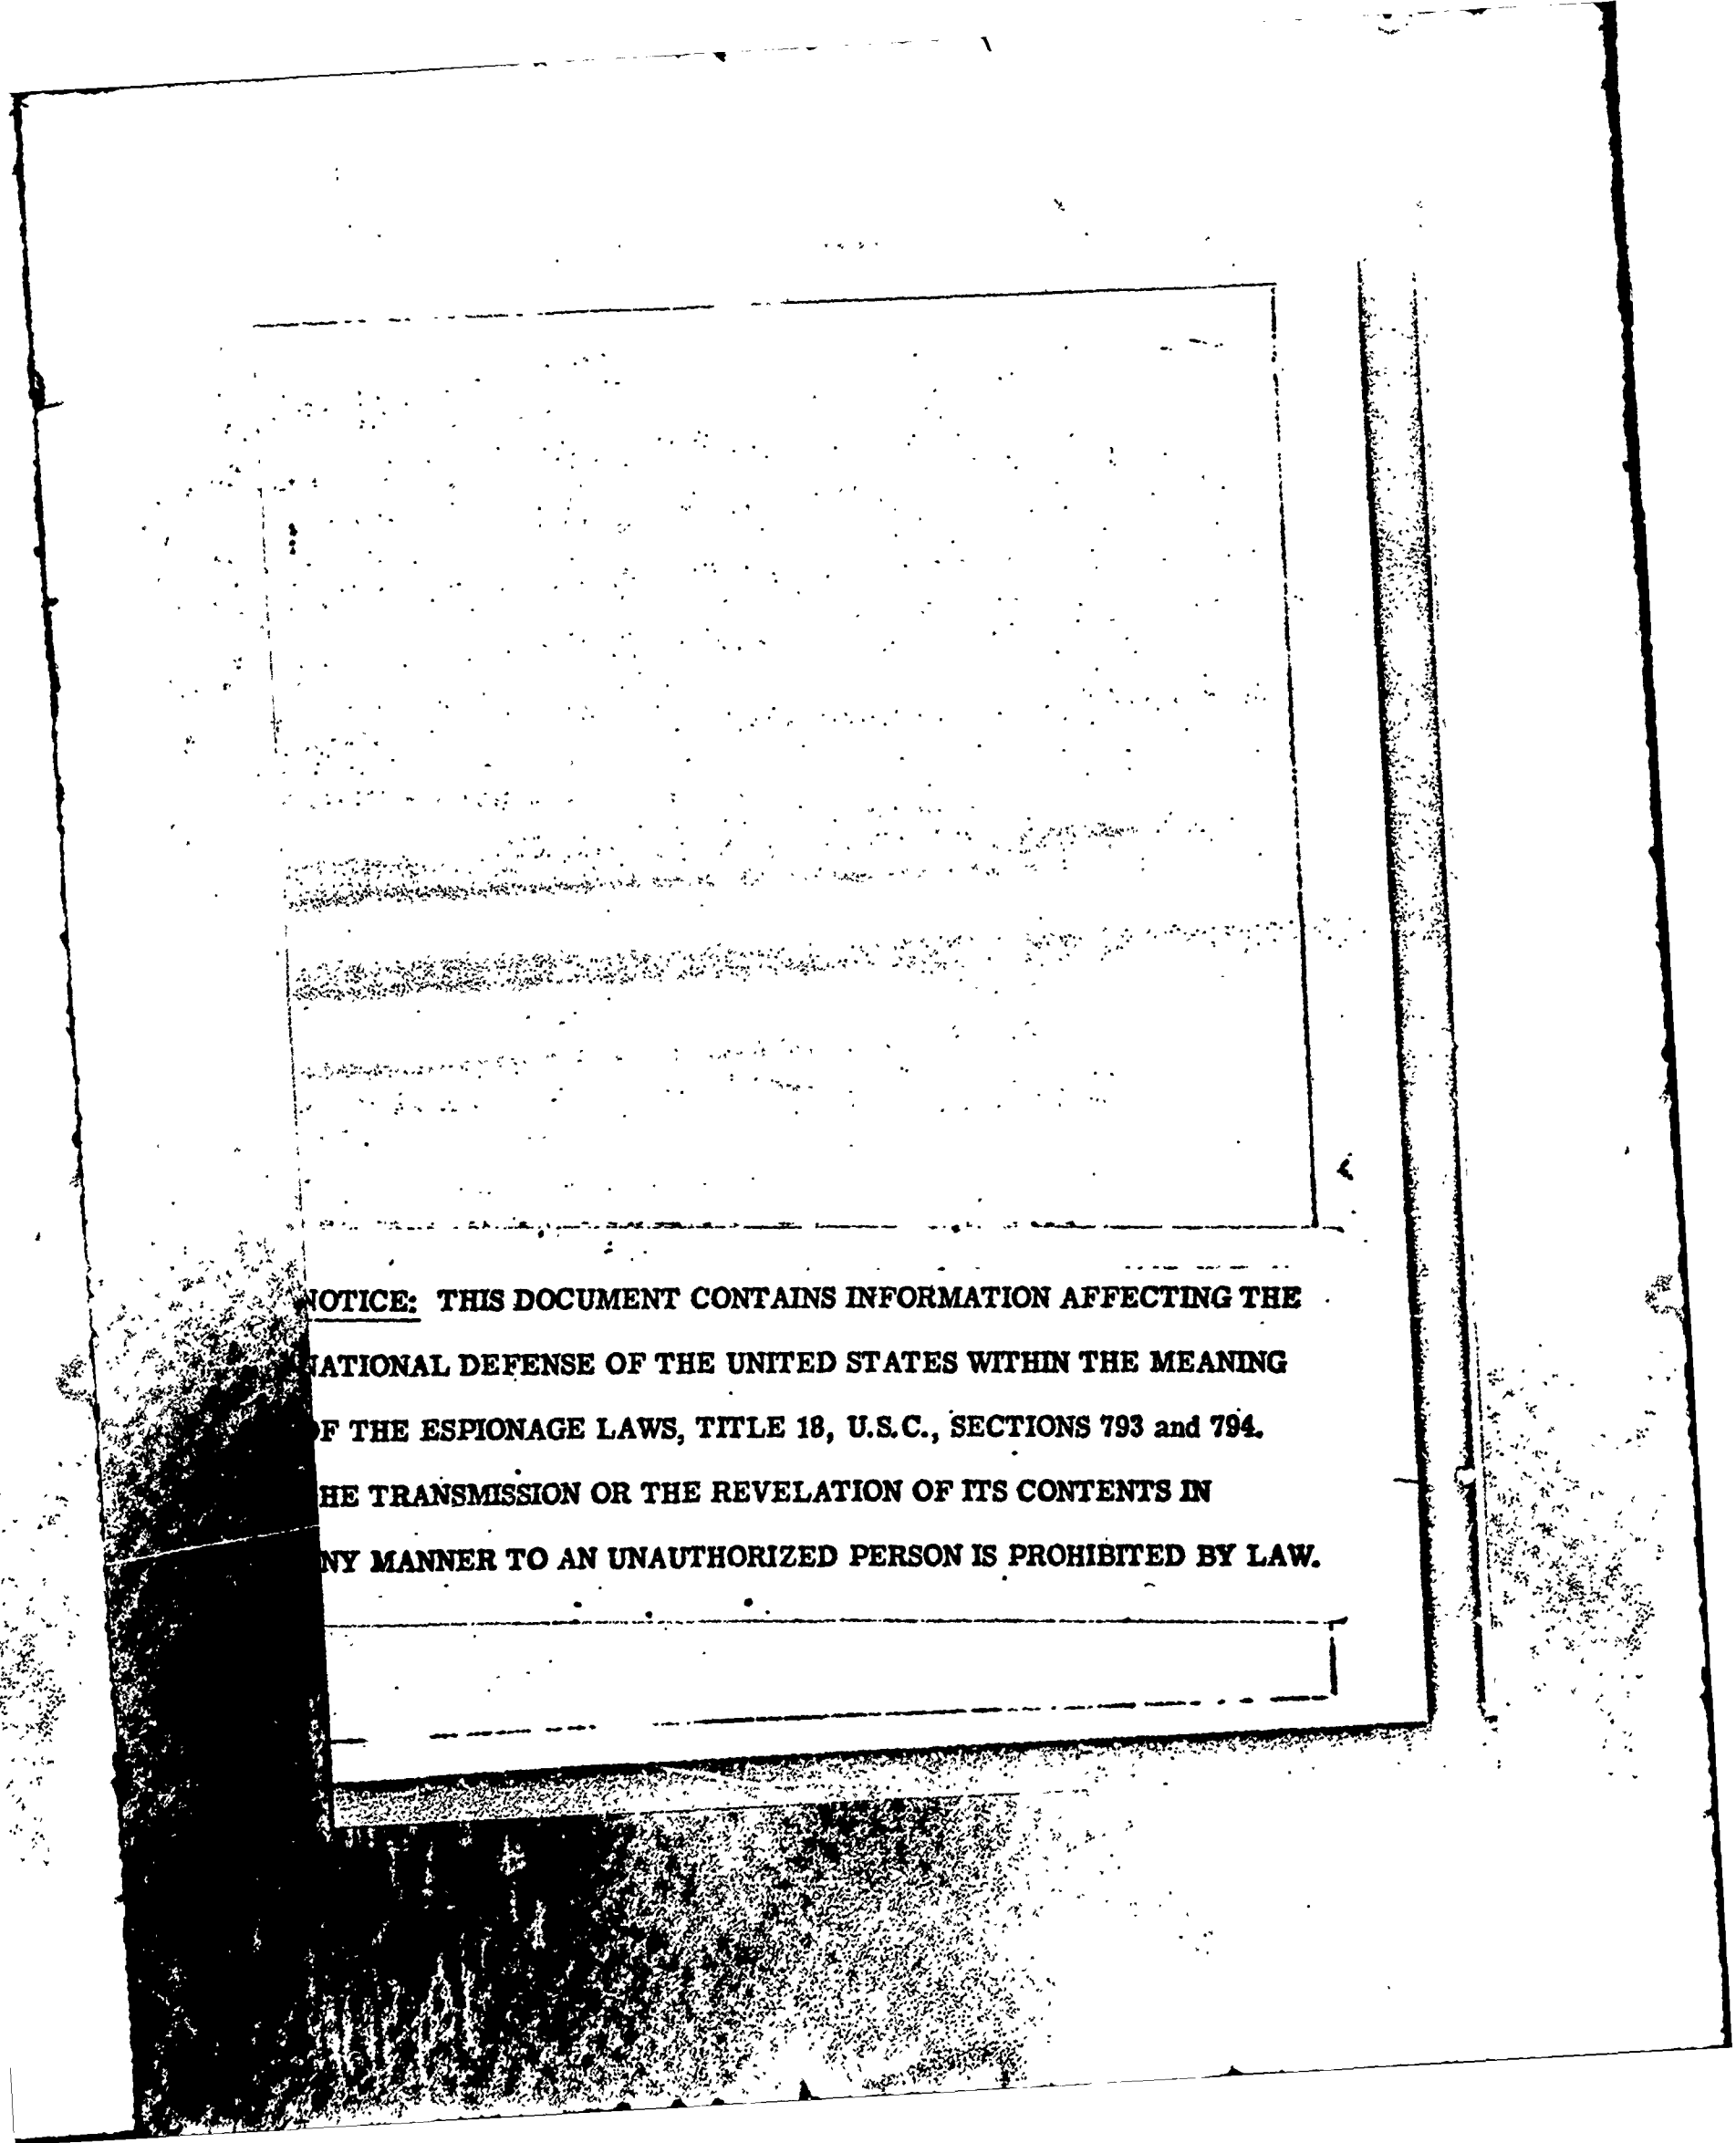

NOTICE: THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE
ATIONAL DEFENSE OF THE UNITED STATES WITHIN THE MEANING
F THE ESPIONAGE LAWS, TITLE 18, U.S.C., SECTIONS 793 and 794.
HE TRANSMISSION OR THE REVELATION OF ITS CONTENTS IN
NY MANNER TO AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW.

CONVAIR
FORT WORTH DIVISION

REPORT FZA-36-325

MODEL

DATE 1 August 1954

TITLE

FZA-36-325

# DESCRIPTION OF PARASITE SYSTEM UTILIZING CONVAIR B-36 CARRIER

SUBMITTED UNDER

CONTRACT AF 33(038) - 19948
CCN NO. R124-13

This Document contains information affecting the National Defense of the United States within the meaning of the Espionage Laws, Title 18 U.S.C., Sections 793 and 794. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

PREPARED BY: H. W. Rosenberg
W. C. Klegka

GROUP: PRELIMINARY DESIGN and PERFORMANCE

REFERENCE:

CHECKED BY: H. J. Nicholson
for R. J. Patton

APPROVED BY: R. E. Adams
C. F. Mueller

NO. OF PAGES

NO. OF DIAGRAMS

THIS DOCUMENT CONSISTS OF _____ PAGES

COPY NO. _____ OF _____ SERIES _____

REVISIONS

| NO. | DATE | BY | CHANGE | PAGES AFFECTED |
|---|---|---|---|---|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

CONFIDENTIAL

TABLE OF CONTENTS


| Subject | Page |
|---|---|
| Table of Contents | 1 |
| Introduction | 3 |
| SECTION I - DESCRIPTION OF PARASITE SYSTEM | |
| General Description | 4 |
| Launching and Retrieving the Parasite | 5 |
| Description of the B-36 Carrier | 7 |
| Parasite Clearance Problems Relative to Carrier | 12 |
| Parasite Clearance Problems Relative to Trapeze | 14 |
| Parasite Latches and Release Systems | 15 |
| Loading | 18 |
| Appendix to Section I | 86 |
| SECTION II - PERFORMANCE DATA | |
| Performance Data | 20 |
| Typical Missions | 21 |
| Take-off Distance | 26 |
| Performance Summaries | 29 |
| Climb Performance | 38 |
| Long Range Cruise | 42 |
| Landing Weight | 51 |
| Landing Distance | 54 |
| Lift and Drag | 56 |


CONFIDENTIAL

CONFIDENTIAL

TABLE OF CONTENTS (continued)

| Subject | Page |
|---|---|
| Equivalent Weight Data for Stripped Airplanes | 62 |
| Sample Mission Calculations | 64 |
| SECTION III - WEIGHT AND BALANCE DATA | |
| B-36D Carrier | 75 |
| RB-36D Carrier | 77 |
| B-36H Carrier | 79 |
| RB-36H Carrier | 81 |
| Fuel | 83 |
| Oil | 83 |
| Fluid Injection | 84 |
| Trapeze Mechanism | 84 |
| RF-84F Parasite | 84 |
| REFERENCES | 85 |

CONFIDENTIAL

CONFIDENTIAL

## INTRODUCTION

This document presents a complete description of a basic parasite system utilizing the Convair B-36 type aircraft as the carrier.

The information contained herein is sufficient for a preliminary evaluation of the basic stowage problem, basic aerial operation, and estimated performance for any proposed parasite aircraft. However, depending upon the proposed parasite mission, the following items should be considered also in any evaluation:

1. Servicing of parasite from the carrier in flight.
   a. Refueling
   b. Replacing camera magazines, etc.
2. High Altitude operation and equipment.
3. Communications equipment.
4. Rendezvous equipment.
5. Night lighting.
6 Special Monitoring Circuits.

CONFIDENTIAL

CONFIDENTIAL

## SECTION I

### DESCRIPTION OF B-36 CARRIER, TRAPEZE MECHANISM AND PARASITE LATCHES

### GENERAL DESCRIPTION

The composite aircraft (See Plate 1, p.A-1) consists of a B-36 type aircraft equipped as a carrier, with a parasite airplane suspended by a trapeze installed in the B-36 bomb bay.

The trapeze is designed to support, launch, and retrieve the parasite during flight, and provides parasite support during carrier take-off and landing. It consists primarily of a trapeze actuating cylinder, drag brace, boom snubber and suspension boom. The suspension boom supports the parasite at three points-- at the nose and on each side of the fuselage (See Plate 2, p.A-2). The nose attachment is an open fork receiver lying in a horizontal plane which is engaged by the parasite vertical nose latching fork. The aft boom latches are engaged from below by the pins on the parasite fuselage.

CONFIDENTIAL

CONFIDENTIAL

## LAUNCHING AND RETRIEVING THE PARASITE

With the parasite pilot in the cockpit, and the bomb-bay doors around the parasite open (See Plate 6, p.A-20) the trapeze is extended from CRUISE POSITION to EXTENDED POSITION. At the EXTENDED POSITION the parasite engine is started, and when all checks are made, the parasite pilot signals the trapeze operator to lower the parasite to LAUNCH POSITION. This is done by pivoting the boom about the main jack yoke by means of the positioning jack, and simultaneously releasing the boom aft latches (See Plate 2, p.A-2). Thus, the parasite is suspended and is being towed by the forward latch only at the LAUNCH POSITION. When ready, the parasite pilot actuates the probe release switch (See Plate 5, p.A-14), thereby releasing the parasite from the carrier.

When the parasite is to be retrieved, the trapeze operator extends the trapeze to the RETRIEVING POSITION (same as LAUNCH POSITION), while the parasite approaches the carrier from below and behind. When the parasite nose probe fork is lined up with the boom probe receiver, the parasite is accelerated gradually to obtain a differential closing speed of one to two mph IAS, and engages. The force resulting from the engagement is sufficient to operate the parasite nose probe latch automatically. Once the parasite is securely latched on and stabilized, the

CONFIDENTIAL

Consolidated Vultee Aircraft Corporation
FORT WORTH DIVISION
FORT WORTH, TEXAS



CONFIDENTIAL

LAUNCHING AND RETRIEVING THE PARASITE (Continued)

trapeze operator retracts the boom to the EXTENDED POSITION. In this position, the trapeze operator directs the parasite pilot to use right or left rudder to align the parasite aft latch pins with the boom latches. When the latches are aligned, the parasite wing flaps are lowered until the parasite raises enough to engage the two aft latches on the boom. The trapeze and attached parasite are then retracted into the bomb bay to the CRUISE POSITION to permit the pilot to leave the parasite.

For emergency jettisoning of the unmanned parasite, the carrier pilot or trapeze operator actuates a switch which discharges an air bottle in the boom aft latches (See Plate 3 p.A-13), and simultaneously explodes a squib which frees the probe receiver from the boom.

For parasite normal and emergency release system, see paragraph on Parasite Latches and Release System.

NOTE

A problem to be investigated is the dynamic stability of the proposed parasite while being towed in the LAUNCH and RETRIEVE POSITIONS. Experience with the present parasite system indicates that dynamic instability does exist, but can be manually controlled by the parasite pilot.

CONFIDENTIAL

## DESCRIPTION OF B-36 CARRIER

The B-36 and RB-36 are structurally identical for purposes of this report. The major difference in the two models is that the B-36 Bomb Bay No. 1 (Bhds. 5.0 to 6.0) and Bomb Bay No. 4 (Bhds. 8.0 to 9.0) were converted to a Camera Compartment and Radar Equipment Bay, respectively, for the RB-36 configuration. Further modification of the RB-36 to a parasite carrier added a trapeze operator's station in the Camera Compartment, and relocated the Radar Equipment Bay to an area aft of Bhd. 10.0.

The basic major structural modifications and additions to a standard B-36 or RB-36 aircraft required for installation of a launching and retrieving mechanism consist of the following:

1. Removal of the lower portion of bulkhead 7.0 to permit parasite stowage in bomb bay. (See FWAP #825, p.A-4 and FWAP #1094, p.A-5).
2. Revise lower portion of bulkhead 8.0 to make provisions for trapeze drag brace attachment.
3. On RB-36, the ECM antennas are relocated to lower fuselage surface aft of bulkhead 10.0.
4. Installation of fixed fairing between bulkheads 8.0 and 9.0 containing a slot to receive the vertical tail of a parasite (See Plate 6, p.A-20).

DESCRIPTION OF B-36 CARRIER (Continued)

5. Bomb bay doors in the parasite area are replaced with doors and fairings which fair around the parasite in the CRUISE POSITION and close up the opening left by the parasite when away from the carrier (See Plate 6, p.A20).

6. On B-36, a trapeze operator's station must be installed in Bay No. 1 and means for parasite pilot to enter B-36 crew area must be provided.

## POWER PLANT

B-36 Carrier:

| | |
|---|---|
| No. and Model: | (6) R4360-41 or (6) R4360-53* |
| Manufacturer: | Pratt and Whitney |
| Engine Spec. No.: | A-7063-E |
| Supercharger: | Gear Driven Single Stage, Single Speed |
| Turbo-Supercharger (No. and Type): | (2) BH-1 Turbos |
| Turbo Manufacturer: | General Electric |
| Red. Gear Ratio: | 0.375 |
| Prop. Manufacturer: | Curtiss Wright |
| Blade Design No.: | 1129-1706-24 |
| Prop. Type: | Constant Speed, Full Feathering, Reversible |
| No. Blades/Prop. Dia.: | 3/19' |
| Augmentation: | Water/alcohol |
| plus | |
| No. and Model: | (4) J47-GE-19 |

* - 41 Engine is used on the B-36D and RB-36D
- 53 Engine is used on the B-36H and RB-36H

## POWER PLANT (CONT'D)

B-36 Carrier: (Cont'd)

| | |
|---|---|
| Manufacturer: | General Electric |
| Engine Spec. No.: | E-589 |
| Type: | Axial Flow Turbojet |
| Length: | 144" |
| Diameter: | 39" |
| Tail Pipe: | Fixed Area. |
| Weight (dry) | 2475 lb. |

### FUEL

| | |
|---|---|
| Spec. | MIL-F-5572 |
| Grade | 115/145 |

### FLUID INJECTION

| Type | Location | No. of Tanks | Gallons |
|---|---|---|---|
| Water/alcohol | Engine Nacelles | 6 | 54 |

### OIL

| | Recip. | Jet |
|---|---|---|
| Capacity (Gal.) | 1200 | 52 |
| Spec. | MIL-O-6082 | MIL-O-6081 |
| Grade | S-1120:W-1100 | 1010 |

### ENGINE RATINGS

(Manufacturer's Guaranteed Ratings)

R4360-41 Engine

| | BHP | RPM | ALT. | Time(Min.) |
|---|---|---|---|---|
| Take-off: | *3500 | 2700 | S.L. | 5 |
| | 3250 | 2700 | S.L. | 5 |

R4360-41 Engine Rating Cont'd

| | BHP | RPM | ALT. | Time(Min.) |
|---|---|---|---|---|
| Military: | *3500 | 2700 | Up to 34,100'** | 30 |
| | 3250 | 2700 | Up to 34,100'** | 30 |
| Normal: | 2650 | 2550 | Up to 39,400'** | Continuous |

* Wet
** Turbosupercharger limitation

R4360-53 Engine

| | BHP | RPM | ALT. | Time(Min.) |
|---|---|---|---|---|
| Take-off | *3800 | 2800 | S.L. | 5 |
| | 3500 | 2800 | S.L. | 5 |
| Military | *3800 | 2800 | Up to 35,000'** | 30 |
| | 3500 | 2800 | Up to 35,000'** | 30 |
| Normal | 2800 | 2600 | Up to 39,000'** | Continuous |

* Wet
** Turbosupercharger Limitations

J47-GE-19

| | S.L. Static Thrust-lb. | RPM | Time. Min. |
|---|---|---|---|
| Maximum & Military | 5200 | 7950 | 30 |
| | | | Continuous |
| Normal: | 4730 | 7630 | Continuous |

Dimensions

| | |
|---|---|
| Wing: | |
| Area: | 4772 sq. ft. |
| Span: | 230.0 ft. |
| A.R. | 11.08 |
| Incidence (root): | 3° |
| (tip): | 1° |

CONVAIR
FORT WORTH DIVISION
FORT WORTH, TEXAS



Dimensions (Cont'd)

| | |
|---|---|
| Dihedral: | 2° |
| Sweepback (L.E.): | 15°5'39" |
| Length: | 162.1 ft. |
| Height: | 46.8 ft. |
| Tread: | 46.0 ft. |
| Prop. Ground Clearance: | 53.5 in. |
| Surface Areas: | |
| Wing | 7927 sq. ft. |
| Nacelles | 2003 sq. ft. |
| Fuselage | 5103 sq. ft. |
| Empennage | 3590 sq. ft. |
| Jet Nacelles with strut per nacelle (2) | 800 sq. ft. |
| | 19,423 |

CONFIDENTIAL

PARASITE CLEARANCE PROBLEMS RELATIVE TO CARRIER

Major clearance points to the B-36 which should be investigated for stowage of a proposed parasite are shown on Dwg. FW5410001, p.A-6, and Dwg. FW5410002, p.A-7. These points are:

1. Wing Box Section

   The parasite canopy must clear the lower contour of the wing box sufficiently for the canopy to be opened to allow the parasite pilot entry to the parasite in the CRUISE POSITION. Further, the closed canopy must clear the wing box lower contour when the parasite is in the TAKE-OFF and LANDING POSITION.

2. Main Landing Gear Retracting Arc

   The parasite must be lowered to the EXTENDED POSITION to allow the carrier main landing gear to be retracted or extended. In the EXTENDED POSITION, the wings of the parasite must clear the landing gear arc.

3. Propeller Arc

   For some proposed parasites of a delta or extreme swept wing configuration, the propeller arc might interfere with the wing in the STOWED POSITION.

4. Inboard Flap Travel

   For a proposed parasite with twin vertical tail surfaces, an interference could exist between the vertical tails and the flap.

PREPARED BY
CHECKED BY
REVISED BY



CONFIDENTIAL

PARASITE CLEARANCE PROBLEMS RELATIVE TO CARRIER (Continued)

5. Ground Clearance

The most extreme landing attitude of the B-36 is shown on FW5410001, p.A-6, and all portions of the parasite should clear this ground line when the boom and parasite are in the TAKE-OFF and LANDING POSITION.

6. Longeron Clearance

Drawing FW5410001, p.A-6, shows a section of the longeron. The longeron location and dimensions are essentially constant along the entire length of the bomb-bay on both the B-36 and RB-36 airplanes. The bomb-bay length available for parasite stowage is from Bhd. 5.0 to 9.0 for B-36, and from Bhd. 6.0 to 9.0 for RB-36.

CONFIDENTIAL

CONFIDENTIAL

## PARASITE CLEARANCE PROBLEMS RELATIVE TO TRAPEZE

It is realized that the existing trapeze mechanism would be unsatisfactory for some proposed parasites. However, other proposed parasites may be of such size and shape that changes to the existing mechanism would be negligible. Therefore, a complete description of the present trapeze mechanism is contained herein so changes may be held to a minimum.

The major clearance points to the trapeze mechanism which should be investigated for a proposed parasite are shown in this report on the following drawings:

36L25200 Sht. 2 & 3, p. A-8 A-9 - Trapeze Mechanism Installation

FW5410003, p. A-10 - Layout - Clearance Dimensions for Trapeze and Parasite

36R14102, p. A-11 - Geometry - RF84F Trapeze Mechanism

FW5410005, p. A-12 - Layout - Enlarged portion of 36R14102, Trapeze Geometry.

From these drawings, a preliminary estimate may be made relative to changes required in the trapeze mechanism, the proposed parasite, or to both, to make them compatible.

CONFIDENTIAL

CONFIDENTIAL

## PARASITE LATCHES AND RELEASE SYSTEMS

Drawings 43F43501, p.A-14, 43F43506, p.A-16, and 43F43522, p.A-15 completely describe the probe fork latch on the nose of the parasite. Drawing 43F43518, p.A-17 shows the parasite rear support pins and mechanism. Plate No. 4, p.A-18, presents the parasite hydraulic system in schematic form. Plate No. 5, p.A-19 illustrates the release controls in the parasite cockpit.

The normal release control in the parasite cockpit is the probe release switch mounted on the parasite throttle control lever (See 4, Plate 5, p.A-14). When the switch is depressed, a solenoid valve is actuated to release hydraulic pressure for probe latch retraction. When the switch is released the latch adjusts for re-engagement.

For normal and emergency retraction of the aft latch pins and the parasite probe, the probe and pin control lever is used. A complete description of the probe and pin control lever (see Plate 5, p.A-19) and details of its operation follows: -

This lever (2, Plate 5, p.A-19) is located at the left side of the parasite pilot's pedestal just below the instrument panel. The lever has five detent positions identified from top to bottom as follows: EMER EXTEND, EXTEND, PIN RETRACT, LATCH REL, [illegible] and RETRACT. The lever is cable-connected to a directional

CONFIDENTIAL

PARASITE LATCHES AND RELEASE SYSTEMS (Continued)

valve which directs hydraulic pressure from the parasite's utility system for the selected operation in all positions except EMER EXTEND. When the lever is placed in EMER EXTEND a separate cable is pulled to open a valve for pneumatic extension of the probe and pins. Pneumatic pressure for this operation is obtained from the parasite's landing gear emergency air bottle. A locking mechanism which is actuated by a button (1, Plate 5, p.A-19) is located adjacent to the lever and prevents inadvertent lever movement downward from EXTEND. In addition, a guard (3, Plate 5, p.A-19) must be held down to permit lever movement to EMER EXTEND. The EXTEND position extends the probe and pins which are then mechanically locked. The lever should be in this position when the parasite is fully engaged. After a normal release of the parasite, the lock button is depressed and the lever is moved directly to RETRACT for probe and pin retraction.

NOTE

When the probe is retracted, a limit switch on the probe mechanism prevents inadvertent latch operation precluding damage to the latch and the surrounding structure.



FW 111 8-48 UTILITY REPORT SHEET

CONFIDENTIAL

PARASITE LATCHES AND RELEASE SYSTEMS (Continued)

Just prior to retrieving, the lever must be returned to EXTEND. If the probe and pins fail to extend, the lever guard can be held down and the lever moved into ENER EXTEND.

NOTE

When the lever is placed in ENER EXTEND, a mechanical lock prevents any subsequent lever operation for the remainder of the flight. Before the next flight, the lever must be unlocked and returned to EXTEND by maintenance personnel.

If the aft latches fail to release when the trapeze operator's aft latch release switch is actuated, the probe and pin control lever can be moved to PIN RETRACT to retract the aft latch pins. If the probe latch does not retract in response to the probe release switch, the lever can be moved to LATCH RELEASE to retract the latch.



AUTHORITY RECORD NUMBER

## LOADING

The loading procedure will vary with the individual parasite, but a general description of the most recent loading procedure is presented for information only.

The carrier is towed onto ramps which are 55" high. Further elevation is obtained by pressurizing the main gear oleo to fully extended position. This procedure elevates the carrier to the position shown on Plate 7, p. A-21.

The parasite, resting on its normal landing gears, is towed into position under the B-36. A small dolly containing a hydraulic jack is attached to the parasite nose gear, and the parasite nose is lifted to a position where the probe lines up with the boom probe.

The fighter is towed forward until the nose probe is engaged. The dolly is then removed from the parasite nose gear, and the boom is lowered by actuating the trapeze main jack until the aft latches are engaged.

When all latches are securely engaged, the parasite landing gear is retracted and the parasite itself is retracted to the TAKE-OFF POSITION.

LOADING (Continued)

For proposed parasites which are not adaptable to the above loading procedure, loading pits may be considered as an alternate method.

It is to be noted that a pit is required for the trapeze hydraulic system bleeding procedure. This pit is 30 ft. long, 8 ft. wide, and 10 ft. deep to allow complete extension of the trapeze (minus parasite) for ground testing.

## SECTION II

### Performance Data

The performance data presented herein are of sufficient detail that an evaluation of performance for B-36 carrier-parasite configuration can be made. Data are presented for the standard B-36D, RB-36D, B-36H and RB-36H carrier airplanes.

In addition to carrier alone, $\Delta C_D = 0$, performance data are presented for drag increases of $\Delta C_D = .0030$ and $\Delta C_D = .0060$ to cover any inherent drag rise due to a composite configuration. All data presented are for launching and retrieving the parasite at 25,000 feet attitude. Data are also included for the consideration of stripped carriers.

Sample calculations are presented for three missions and they are in conformance with the descriptions of typical missions and Mil-C-5011A rules.

Weights data for all airplanes are presented in section III.

# SECRET

## TYPICAL MISSIONS

### BASIC RADIUS

#### Carrier

Warm-up, take-off and climb on course at normal rated power to 5,000 feet. Cruise at long range speeds and altitudes to a point where a climb is made to 25,000 feet. Following one minute for warm-up of parasite turbojet engine, launch parasite; Loiter at 25,000 feet in area of launch, cruising at long range speeds during parasite mission plus 15 minutes for rendezvous and retrieve of parasite. Descent to optimum altitude long range flight path and cruise back to base. Range free allowances include 10 minutes of normal power fuel consumption for reciprocating engines plus 5 minutes of normal power jet engine fuel consumption for warm-up and take-off plus loiter time at powers for long range cruise at 25,000 feet for reciprocating engine only plus 5% of initial fuel and fuel for 30 minutes cruise at sea level for landing and reserve.

#### Parasite Bomber

One minute maximum power warm-up and immediate launch at 25,000 feet, climb on course to optimum altitude for cruise at long range speed. Cruise to within 50 nautical miles of target and descend to sea level. Cruise at normal power 50 nautical miles to target, drop bomb, conduct 2 minutes of evasive action over target and 50 nautical miles run out at normal power. Climb at maximum power to optimum altitude long range flight path and

SECRET

cruise at long range speeds to rendezvous point and descend to 25,000 feet to be retrieved. Range free allowances include one minute maximum power warm-up immediately prior to launch plus 5% of initial fuel plus fuel for 20 minutes cruise at sea level for rendezvous, retrieve and reserve.

Parasite High Altitude Reconnaissance

One minute maximum power warm-up and immediate launch at 25,000 feet, cruise at long range speeds and altitudes to a point 50 nautical miles from target. Cruise at this altitude (combat altitude) 50 nautical miles to target, conduct 2 minutes evasive action and cruise out 50 nautical miles at normal power. Climb at maximum power to optimum altitude long range flight path and cruise at long range speeds to rendezvous point and descend to 25,000 feet to be retrieved. Range free allowances include one minute maximum power warm-up immediately prior to launch plus 5% of initial fuel plus fuel for 30 minutes cruise at sea level for rendezvous, retrieve and reserve.

Parasite Low Altitude Reconnaissance

One minute maximum power warm-up and immediate launch at 25,000 feet, cruise at long range speeds and altitudes to a point 50 nautical miles from target. Descend to sea level, conduct 50 nautical mile run-in to target, 2 minutes of evasive action over target and 50 nautical miles run-out at normal power. Climb at maximum power to optimum altitude long range flight path and cruise at long range speeds to rendezvous point and descend to 25,000 feet to be retrieved. Range free allowances include one

SECRET

minute maximum power warm-up immediately prior to launch, plus 5% of initial fuel, plus fuel for 30 minutes cruise at sea level for rendezvous, retrieve and reserve.

FERRY RANGE MISSION

The ferry range mission is conducted with a composite airplane and consists of warm-up, take-off and climb to 5,000 feet at normal rated power, cruise to landing base at optimum altitude for long range. Range free allowances include 10 minutes of reciprocating engine normal power fuel consumption, plus 5 minutes of jet engine normal power fuel consumption for warm-up and take-off, plus 5% of initial fuel, plus fuel for 30 minutes cruise at sea level for landing and reserve.

ADVANCED BASE PICK-UP MISSION

Any of the above outlined missions may be operated as an advanced base pick-up mission. The carrier takes off separately at some gross weight so that after retrieve of the parasite the combined gross weight does not exceed 370,000 pounds. An additional allowance of 15 minutes is made for hook-up. The parasite takes off separately and climbs at maximum power to 5,000 feet. It is refueled after retrieve to full launch weight.

POST STRIKE

Carrier

Same as basic radius mission except that carrier does not loiter and begins cruise back to base immediately after launch of

SECRET

SECRET

parasite and descent to optimum altitude flight path.

Parasite Bomber

One minute maximum power warm-up and immediate launch at 25,000 feet, cruise at long range speeds and altitudes to a point 50 nautical miles from target. Descend to sea level, conduct 50 nautical mile run-in to target, drop bomb, conduct 2 minutes of evasive action over target and 50 nautical miles run-out at normal power. Climb at maximum power to optimum altitude long range flight path and cruise at long range speeds to post-strike base and land. Range free allowance includes one minute maximum power warm-up immediately prior to launch plus 5% of initial fuel load, plus fuel for 20 minutes cruise at sea level for reserve.

Parasite High Altitude Reconnaissance

One minute maximum power warm-up and immediate launch at 25,000 feet, cruise at long range speeds and altitudes to a point 50 nautical miles from target. Cruise at this altitude (combat altitude) 50 nautical miles to target, conduct 2 minutes evasive action and cruise out 50 nautical miles at normal power. Climb at maximum power to optimum altitude long range flight path and cruise at long range speeds to post-strike base and land. Range free allowances include one minute maximum power warm-up immediately prior to launch plus 5% of initial fuel plus fuel for 30 minutes cruise at sea level for reserve.

Parasite Low Altitude Reconnaissance

One minute maximum power warm-up and immediate launch at

SECRET

SECRET

25,000 feet, cruise at long range speeds and altitudes to a point 50 nautical miles from target. Descend to sea level, conduct 50 nautical mile run-in to target, conduct 2 minutes of evasive action over target and 50 nautical mile run-out at normal power. Climb at maximum power to optimum altitude long range flight path and cruise at long range speeds to post-strike base and land, Range free allowances include one minute maximum power warm-up immediately prior to launch, plus 5% of initial fuel load plus fuel for 20 minutes cruise at sea level for reserve.

BASIC RANGE

Carrier

Same as basic radius mission except that carrier does not loiter and begins cruise back to base immediately after launch of parasite and descent to optimum flight path.

Parasite Bomber

One minute maximum power warm-up and immediate launch at 25,000 feet, climb on course to optimum altitude for cruise at long range speed. Cruise to target, drop bomb and land. Range free allowances include one minute maximum power warm-up immediately prior to launch plus 5% of initial fuel plus fuel for 20 minutes cruise at sea level.

SECRET

SECRET

Take-off Distance


Take-off distance curves, Figures 27 and 28 , are presented for the B-36D and B-36H parasite carrier airplanes. These same curves may be used for the RB-36D and RB-36H airplanes, respectively, since the take-off distance increase due to the slightly greater drag of the RB-36 airplanes is negligible. An added drag increment of $\Delta C_D = .0060$ to the standard airplanes increases the take-off distances by only 3%.


Take-off distances determined from these curves for stripped parasite carrier versions will be conservative.

Fuel used for warm-up, taxi, and take-off for the B and RB-36D Carriers is 3550 pounds. For the B and RB-36H Carriers it is 4200 pounds.

SECRET

PAGE

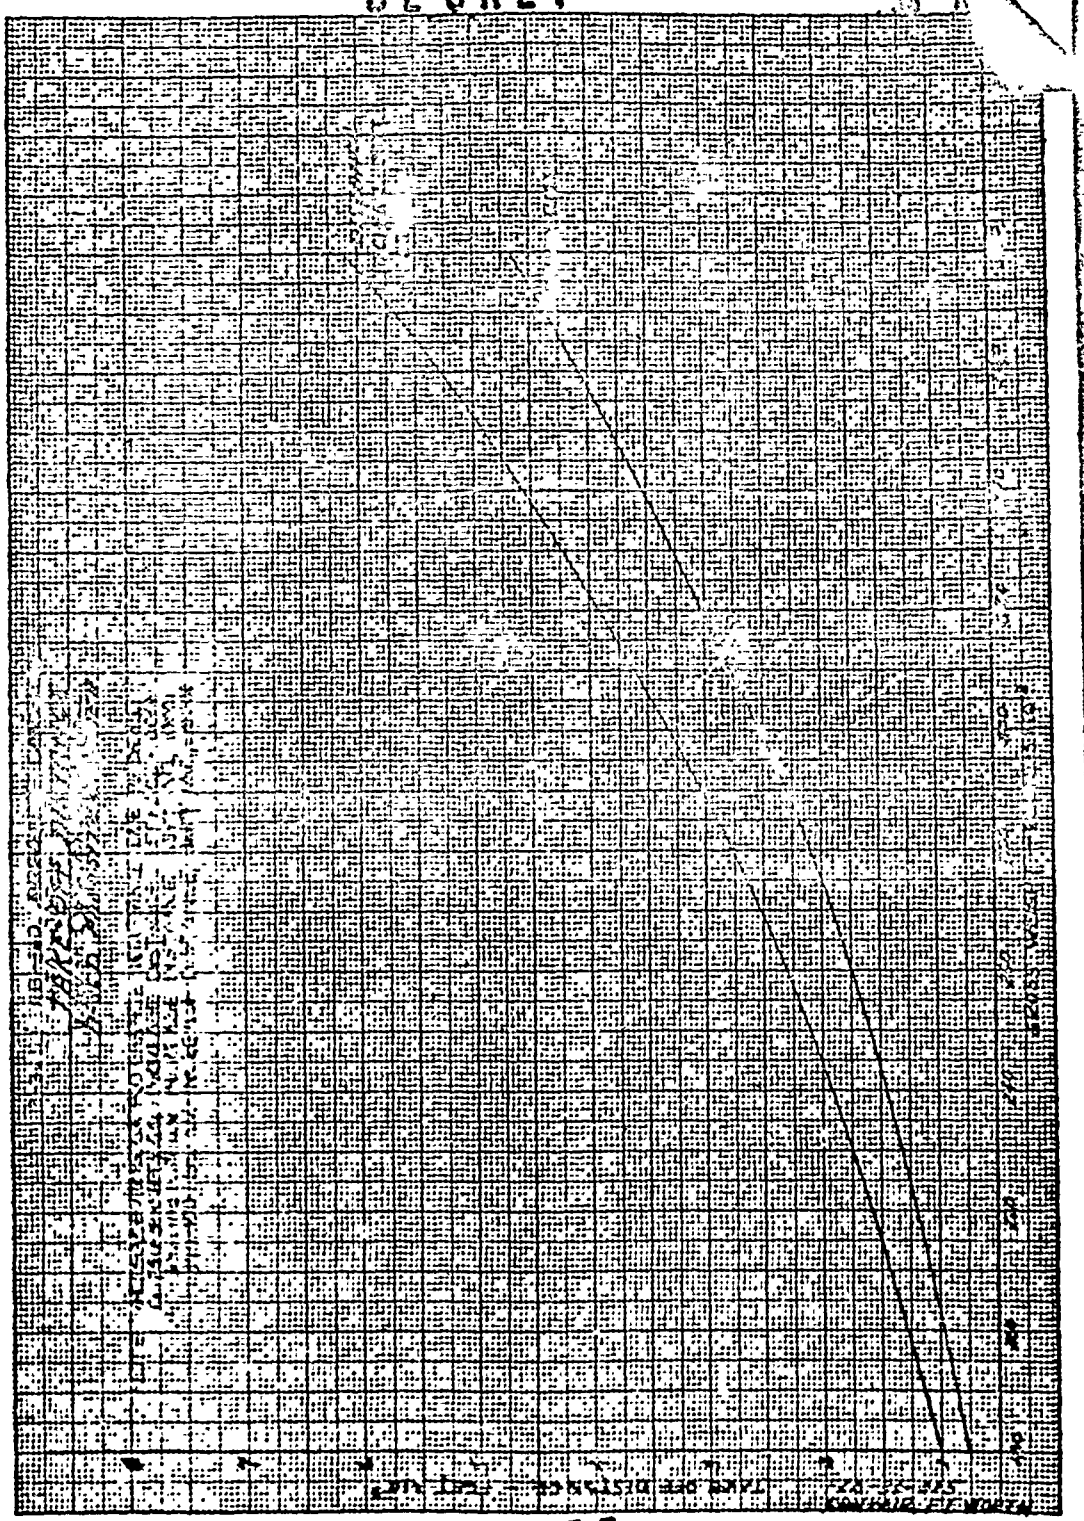


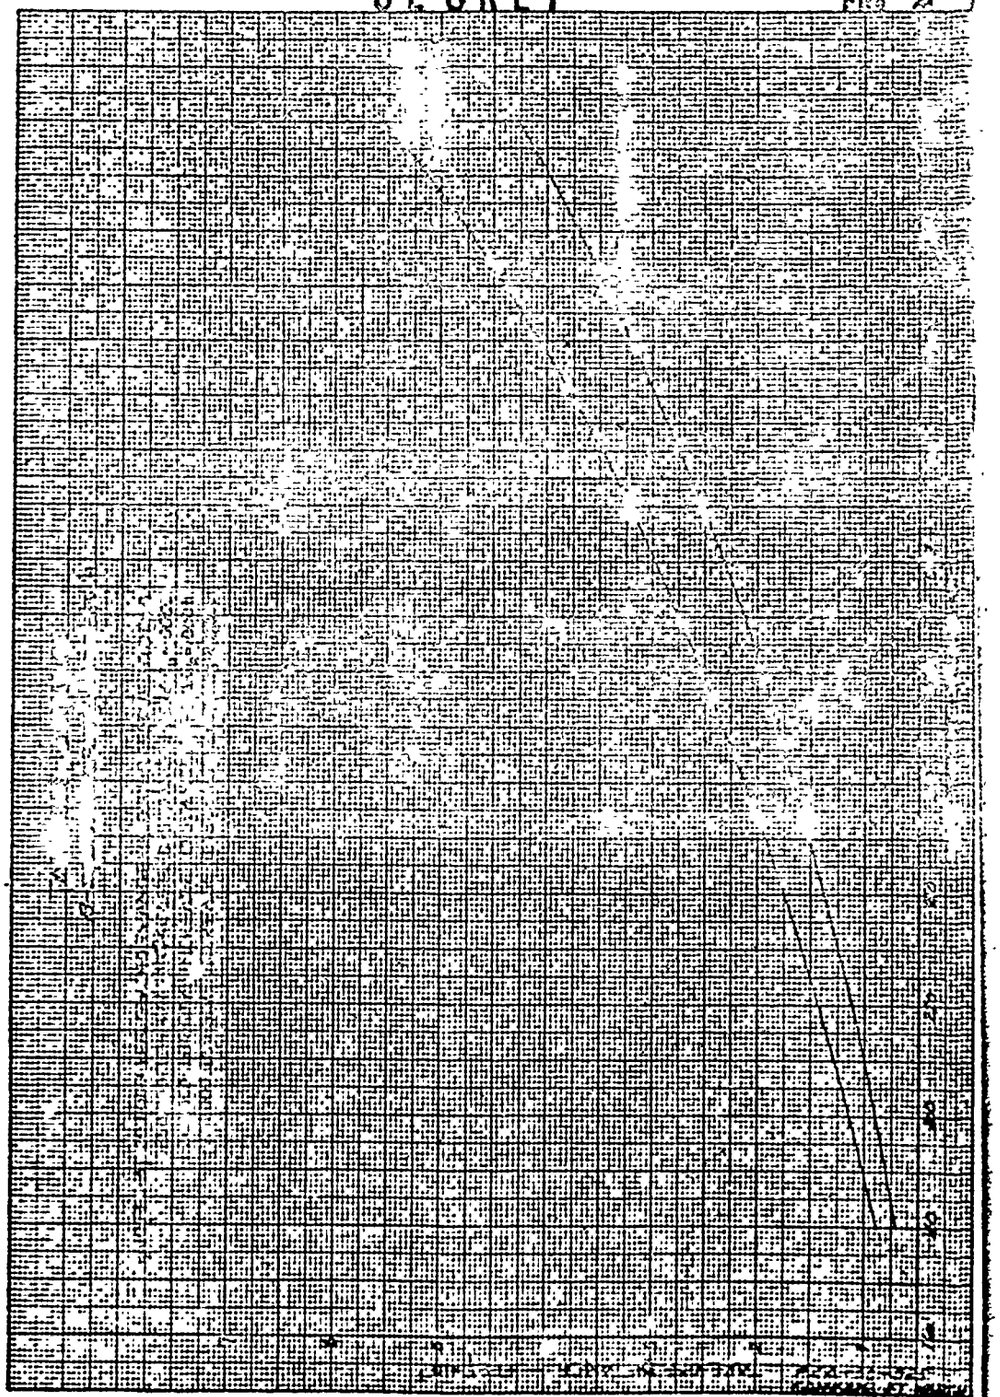

## Performance Summaries


Altitude performance summaries are presented from Figure 3 through Figure 10. Airspeed and climb corrections due to drag are tabulated on each chart. For a stripped carrier increase airspeed equivalent to a $\Delta C_D$ decrease of .0013.

SECRET

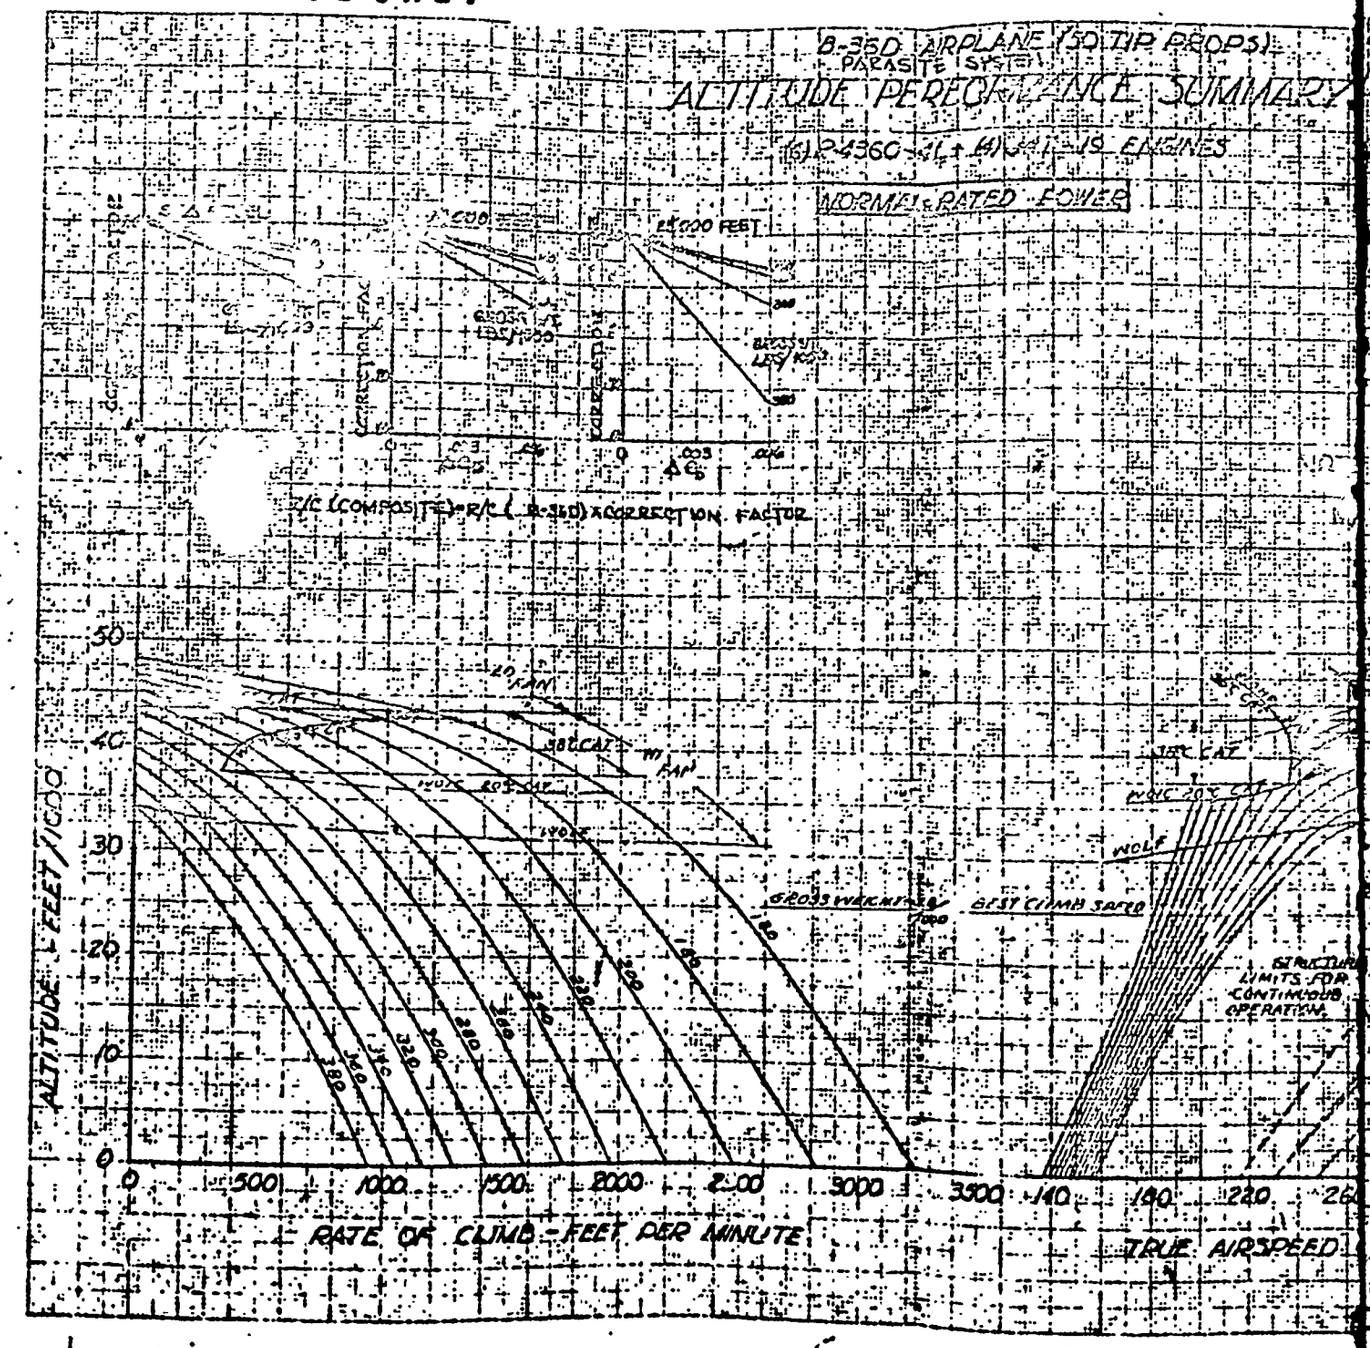


SECRET

B-36D AIRPLANE (SIX TIP PROPS)
PARASITE SYSTEM
DE PERFORMANCE SUMMARY
R4360-41 + 41WA1 - 18 ENGINES
NORMAL RATED POWER

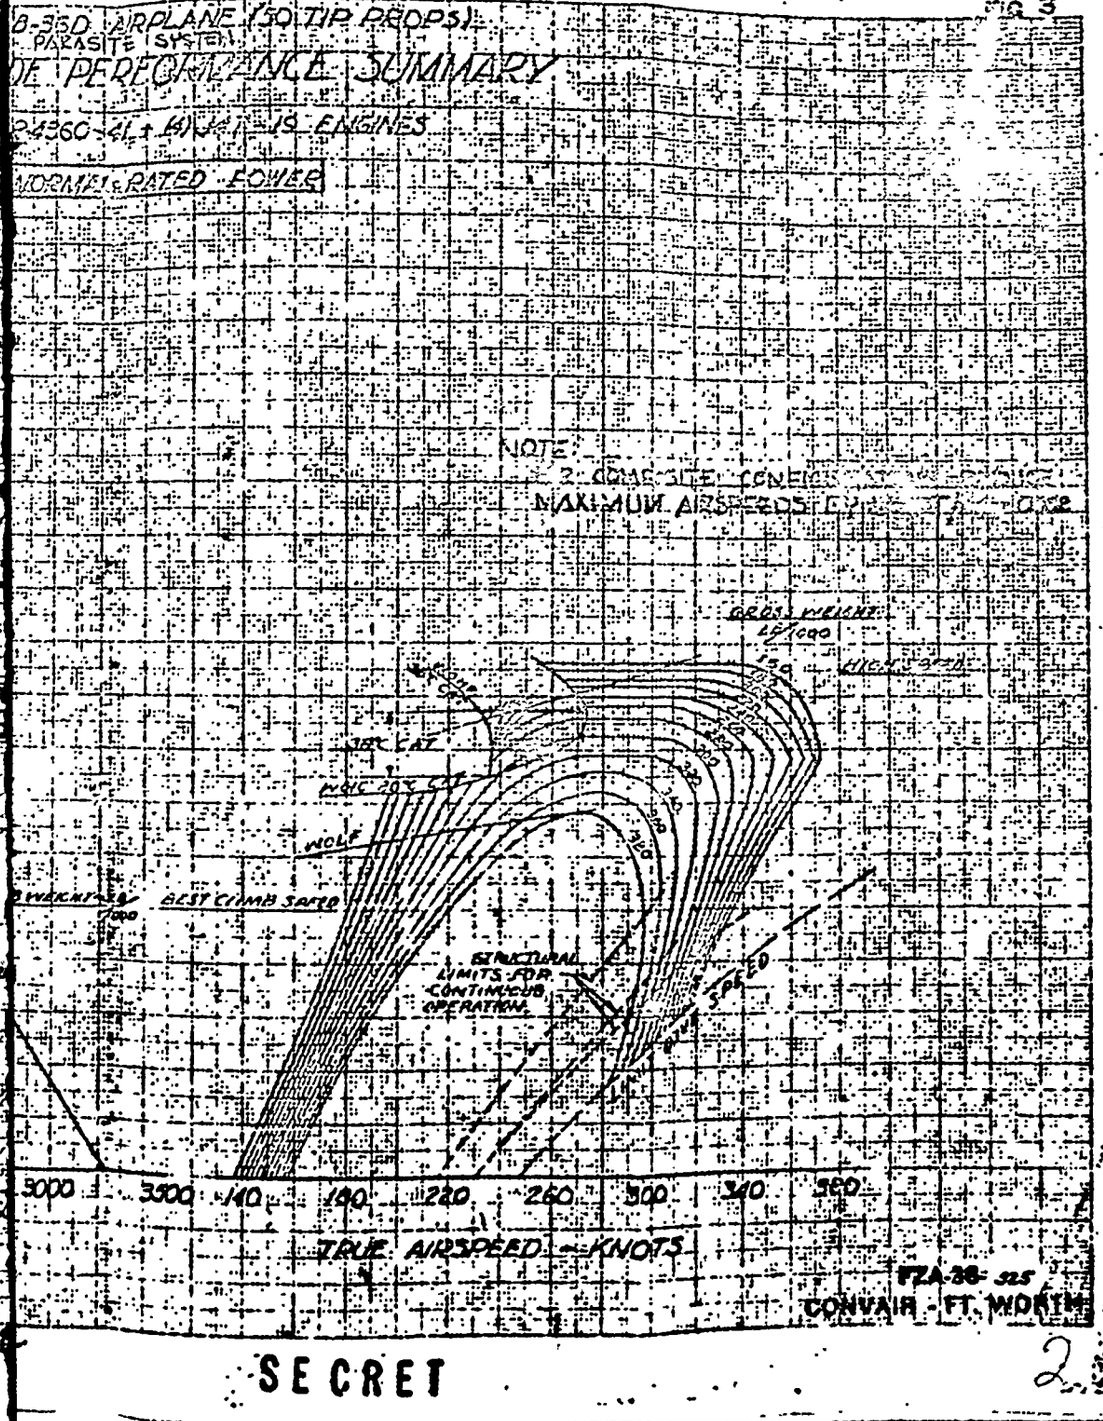



FZA-36-325
CONVAIR - FT. WORTH


SECRET

2-1

SECRET

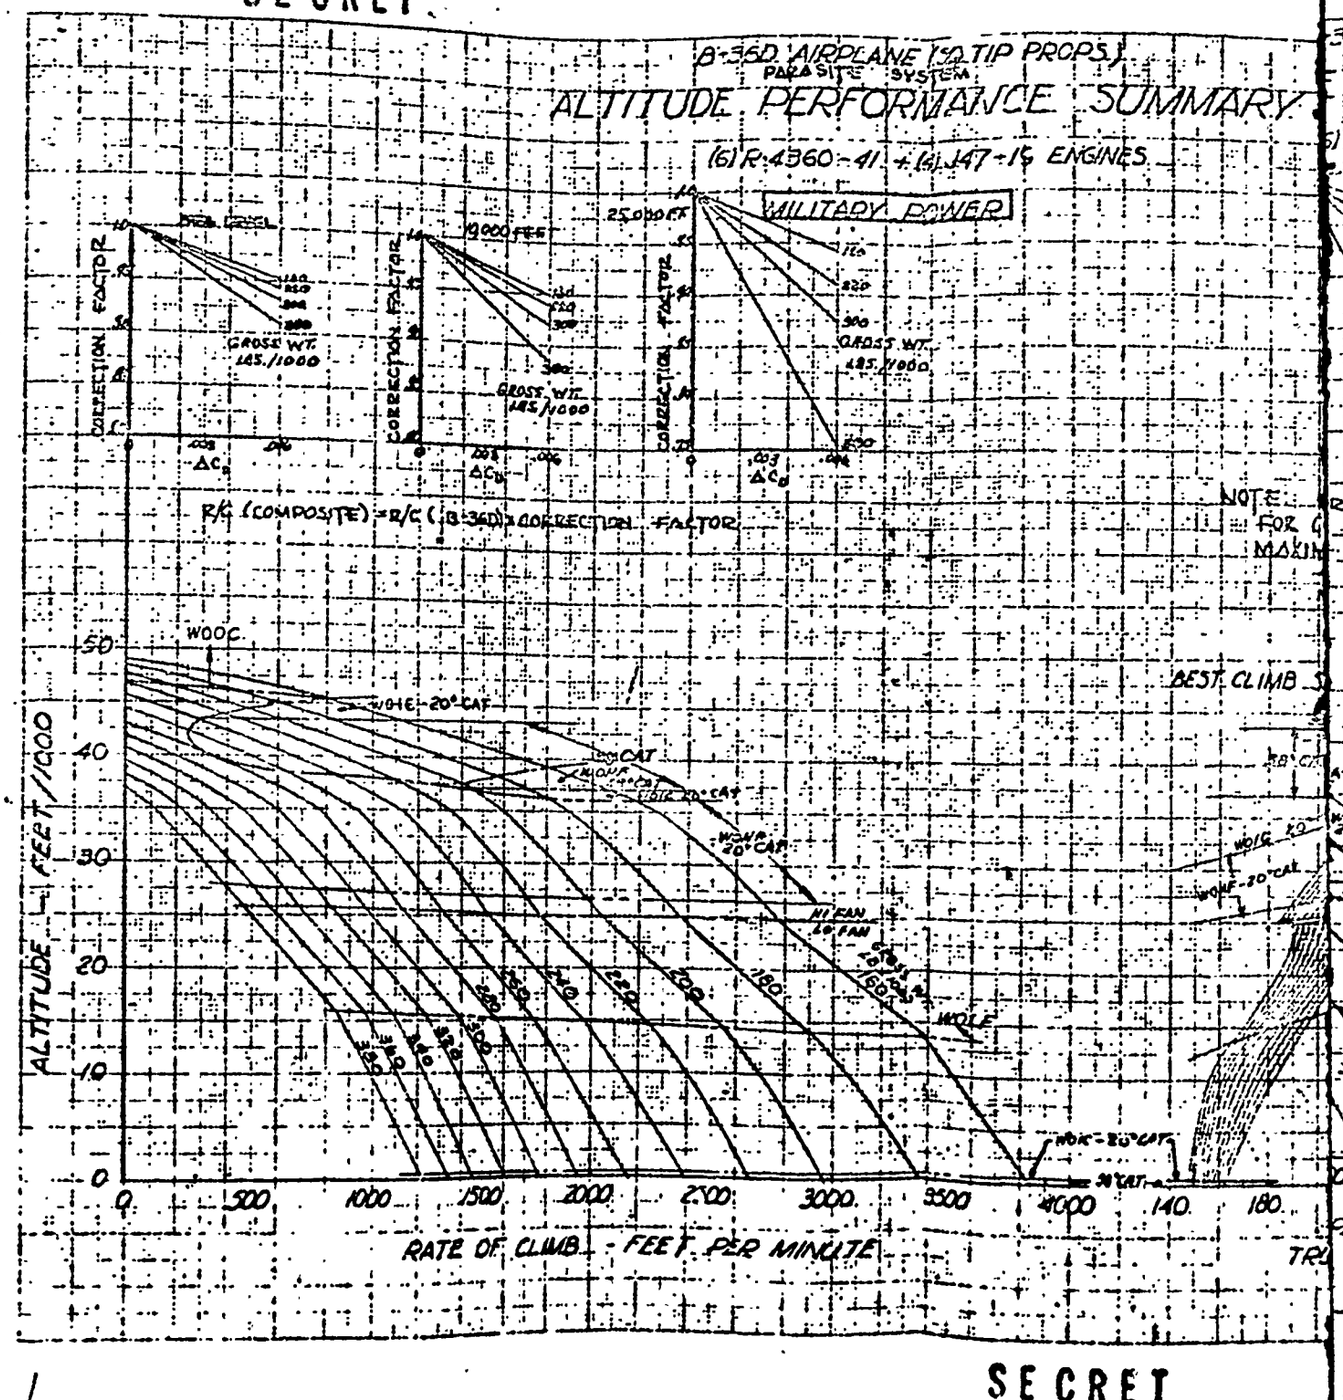



SECRET

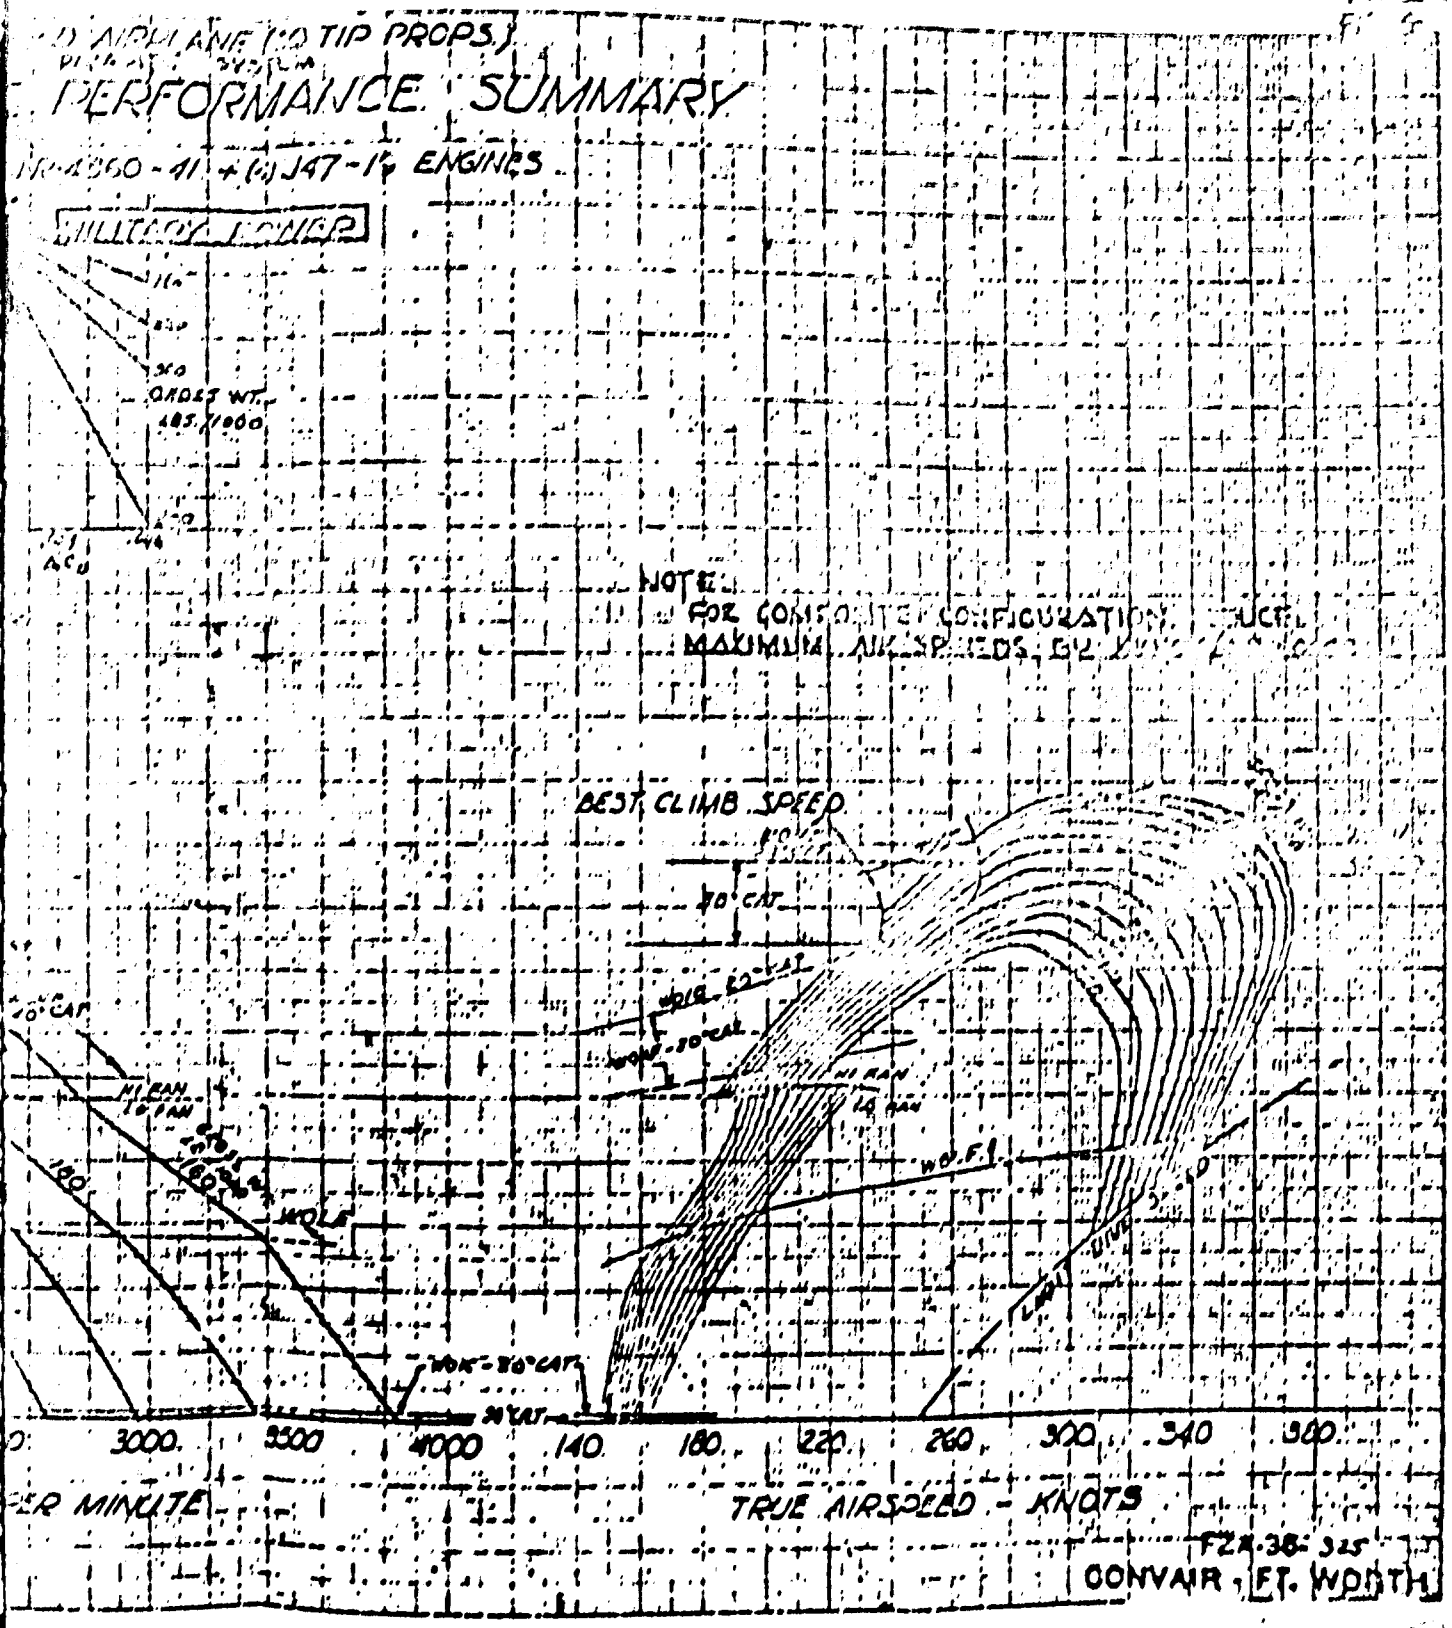
PERFORMANCE SUMMARY
MILITARY POWER
GROSS WT. LBS. 1000
NOTE:
FOR COMPOSITE CONFIGURATION
BEST CLIMB SPEED
20° CAT
WOF - 20° CAT
WOF
W.O.F.
NO CAT
3000
3500
4000
140
180
220
260
300
340
380
TRUE AIRSPEED - KNOTS
CONVAIR, FT. WORTH

SECRET

SECRET

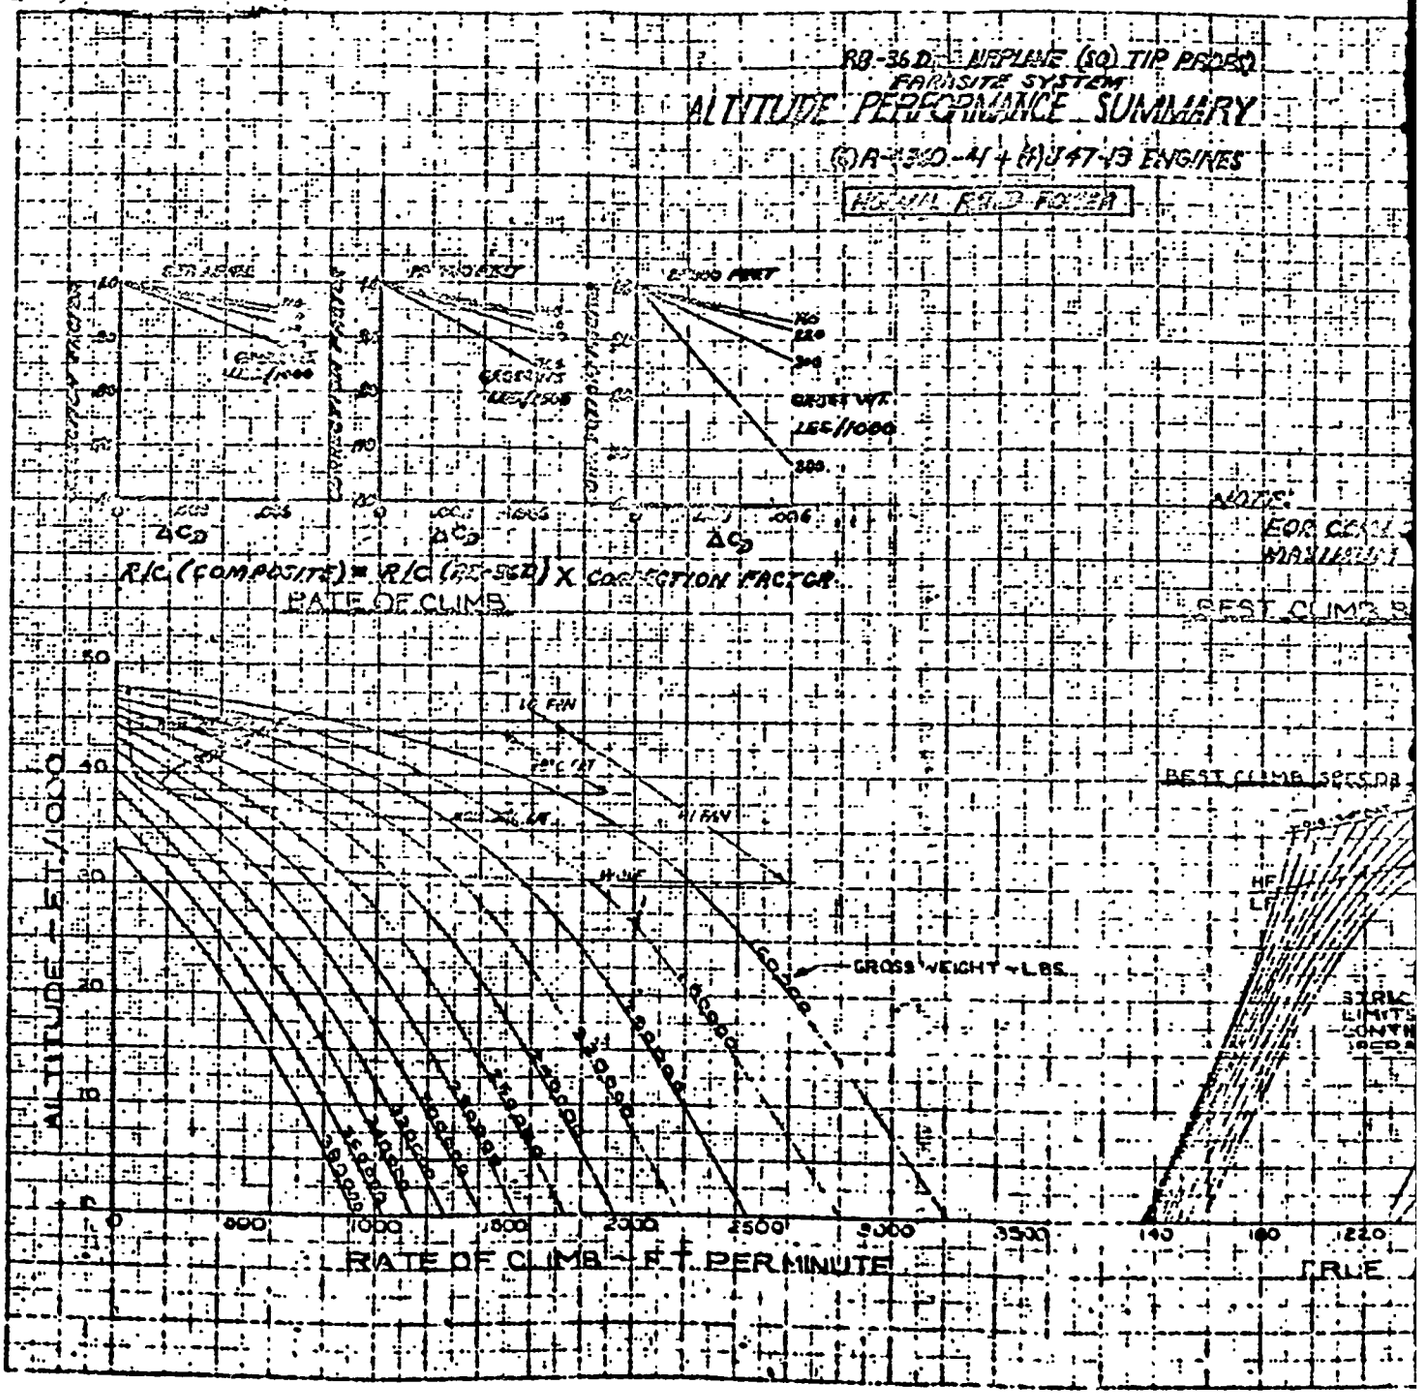

RB-36D AIRPLANE (SQ) TIP PROBE
FAIRSITE SYSTEM
ALTITUDE PERFORMANCE SUMMARY
(6) R-4360-41 + (4) J47-19 ENGINES
NORMAL RATED POWER
ΔCD
R/C (COMPOSITE) = R/C (REC-SEC) X CORRECTION FACTOR
RATE OF CLIMB
ALTITUDE - FT/1000
RATE OF CLIMB - FT PER MINUTE
GROSS WEIGHT - LBS
BEST CLIMB SPEED
TRUE

SE

AIRPLANE (50) TIP PROP
JSITE SYSTEM
ORMANCE SUMMARY
0-41 + (A)J47-19 ENGINES
FIXED POWER

NOTE:
FOR CONDITIONS
MAXIMUM RECOMMENDED


BEST CLIMB SPEEDS

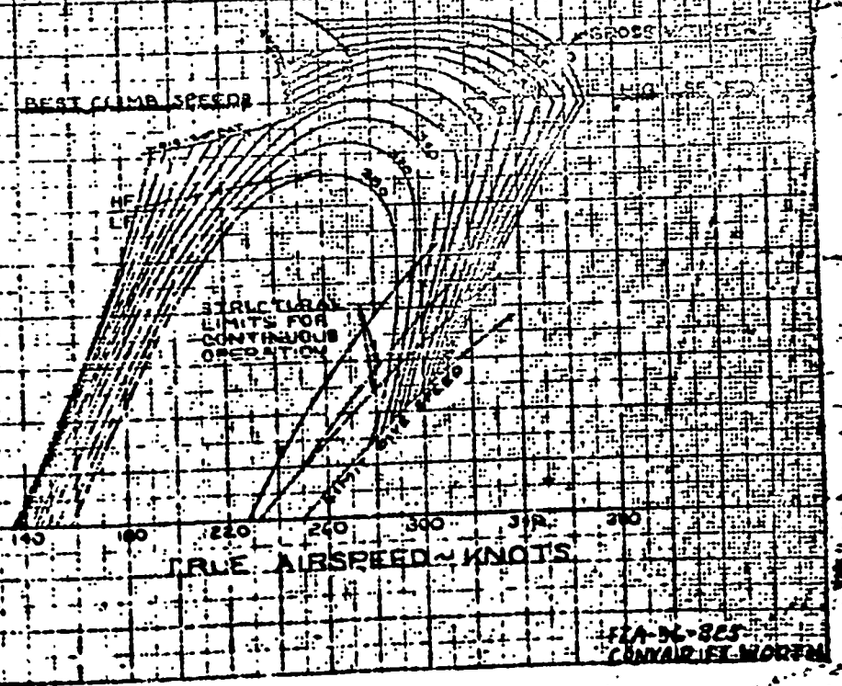



FZA-56-865
CONVAIR/FT. WORTH

SECRET


SECRET

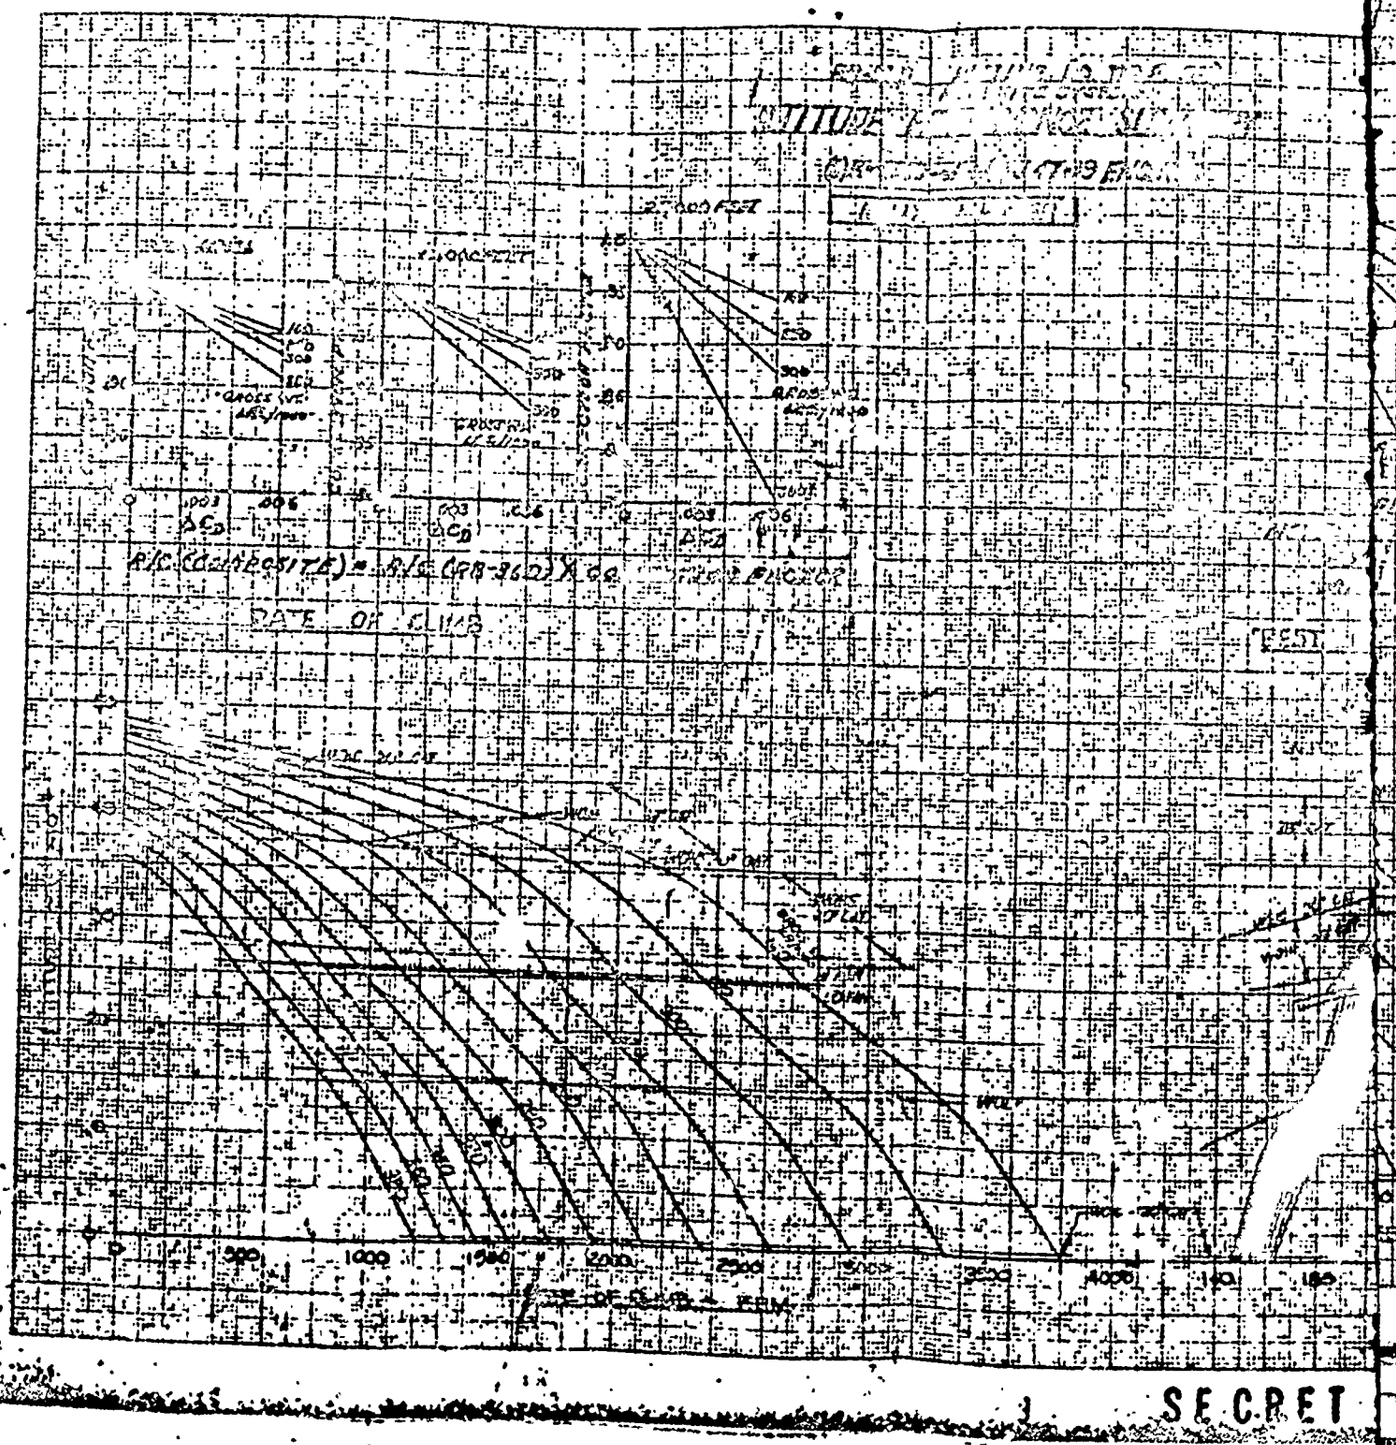



SECRET

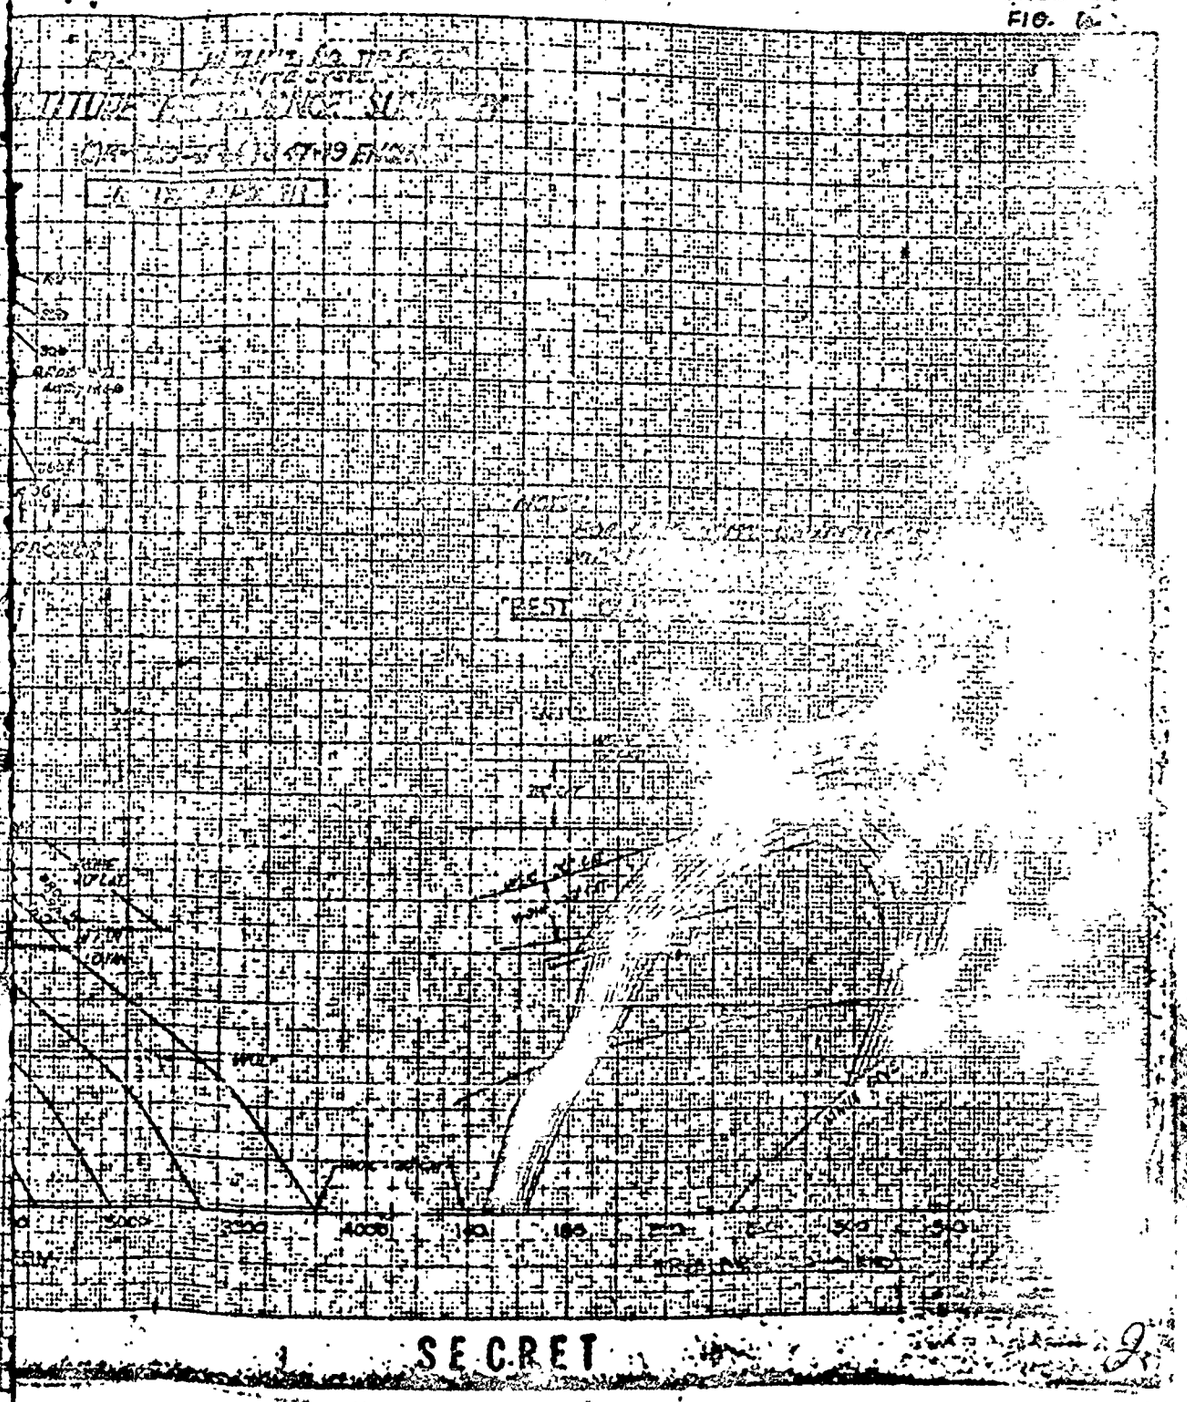

SECRET

SECRET

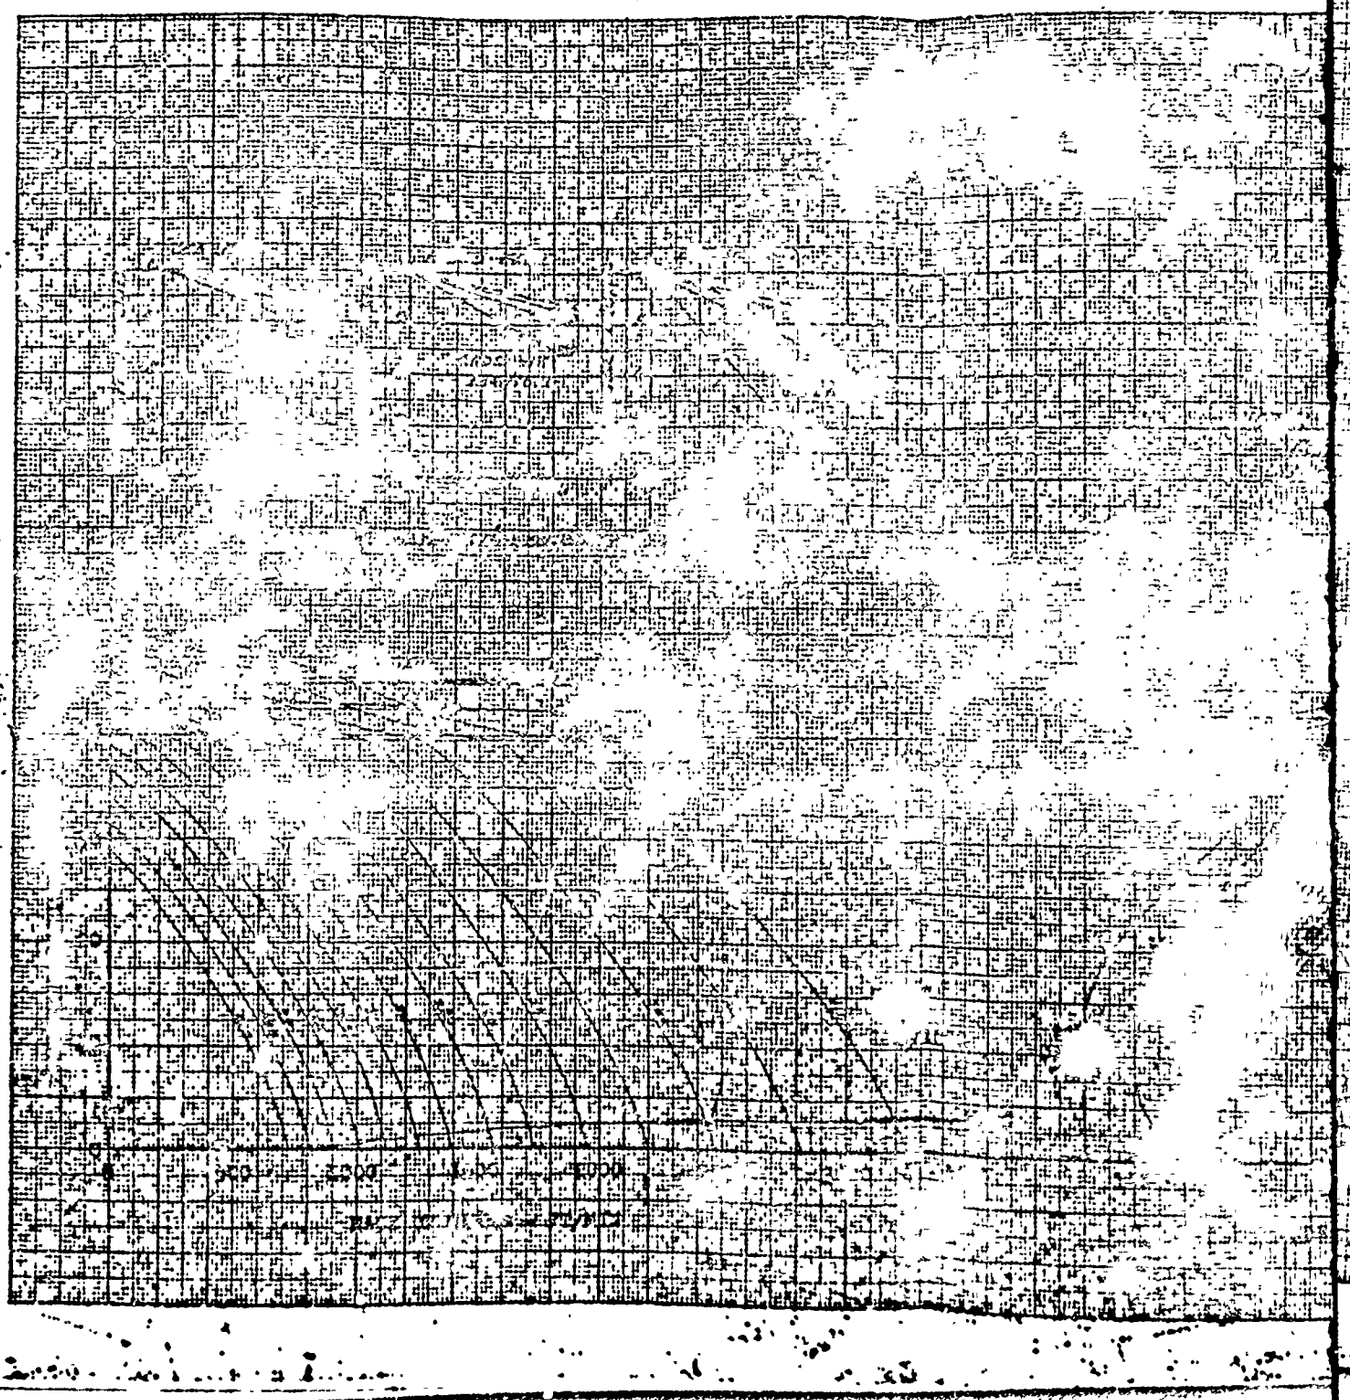

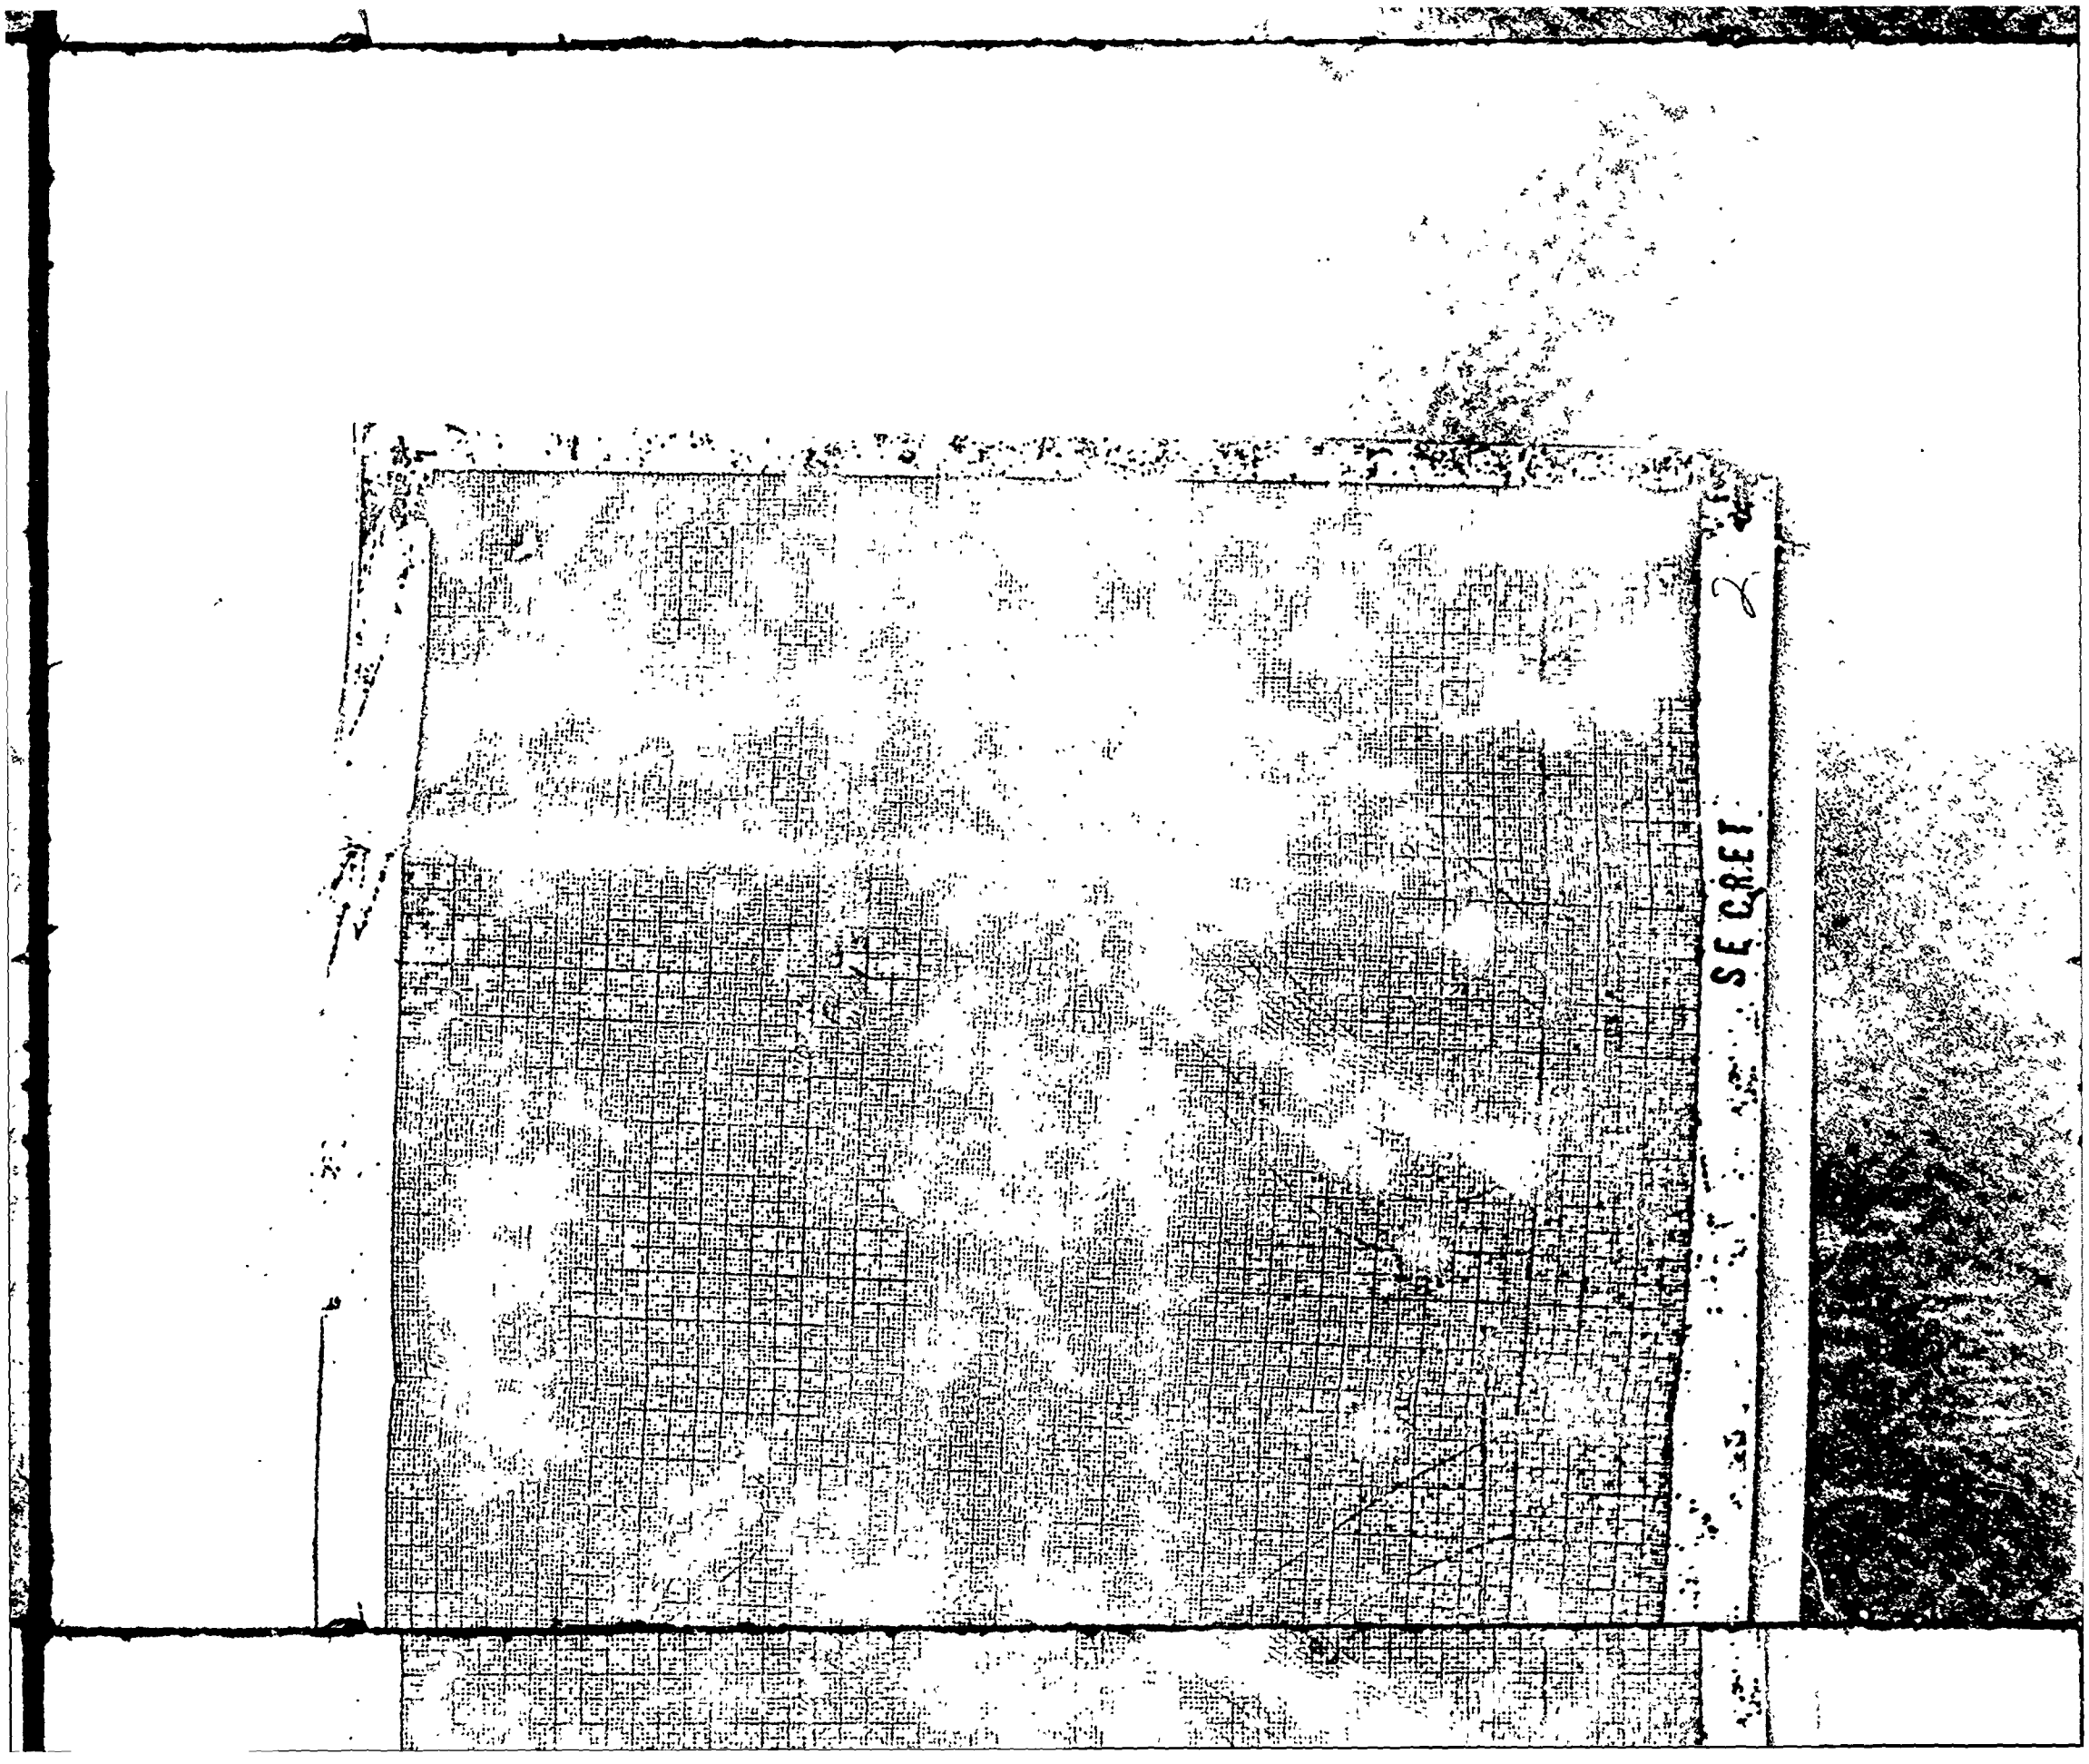
SECRET

SECRET

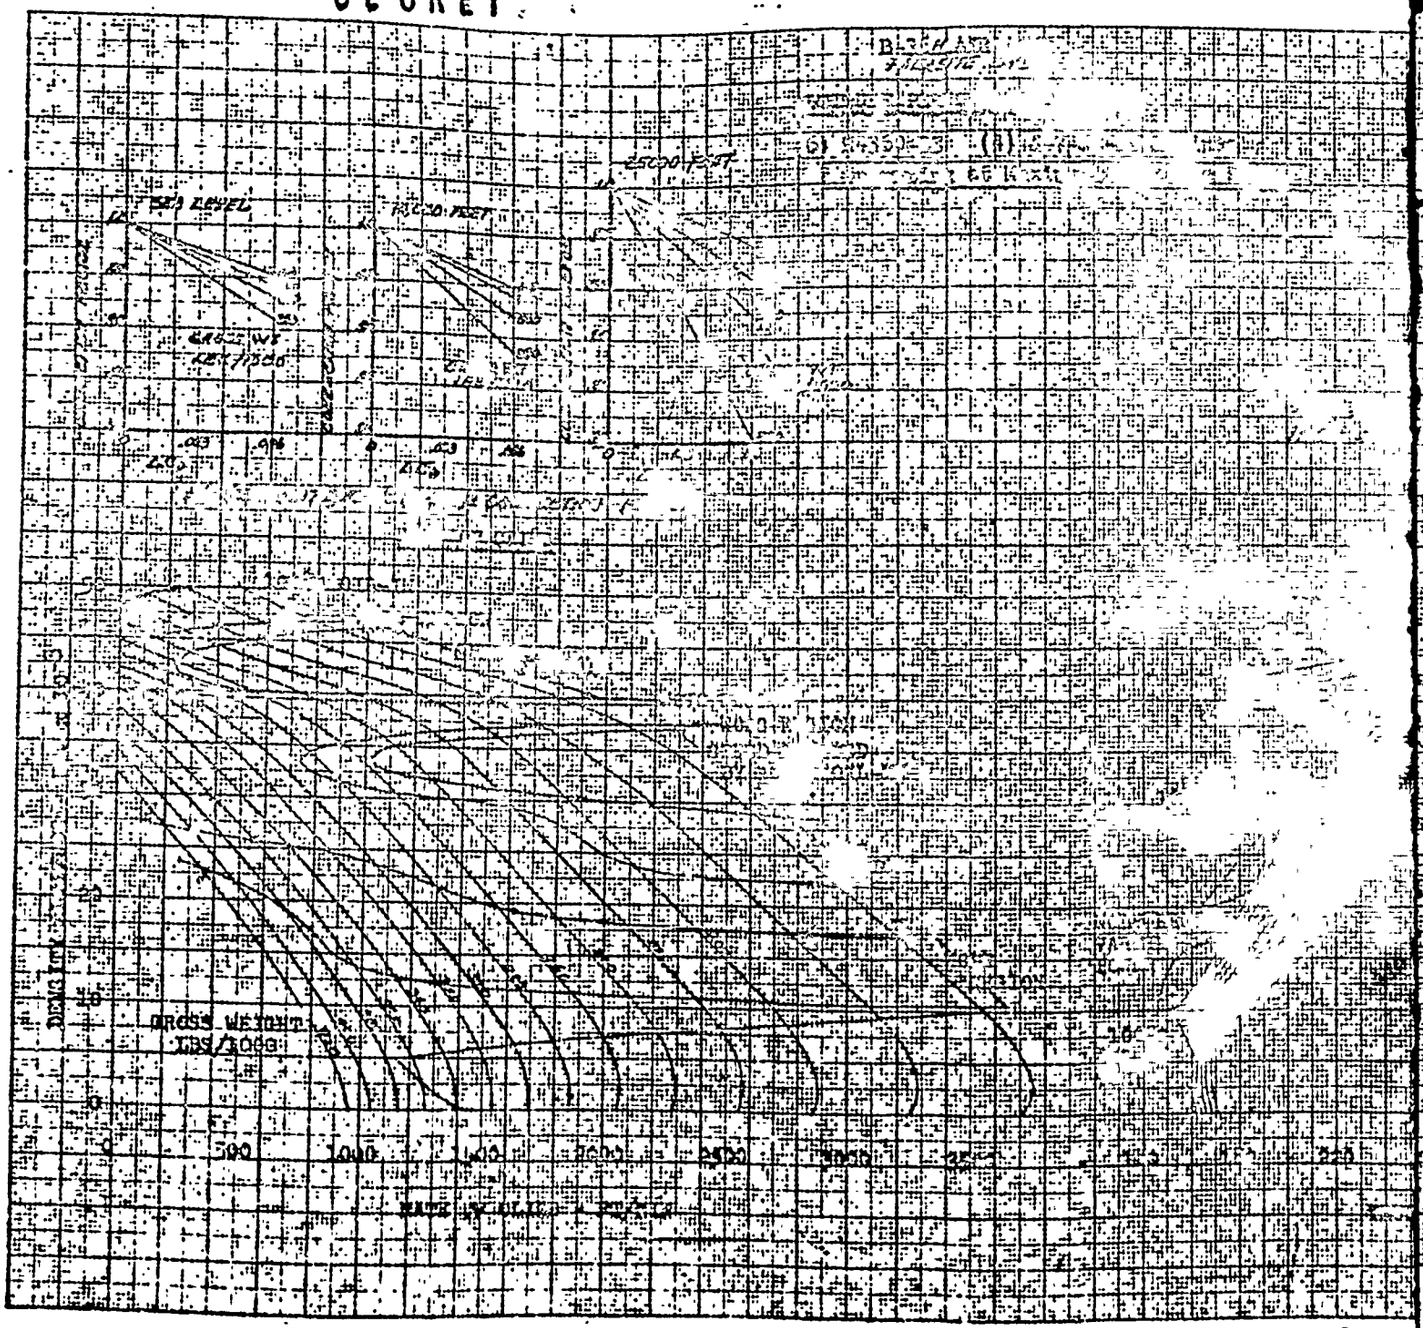


SECR


PAGE 35
Fig. 1




SECRET

2


SECRET

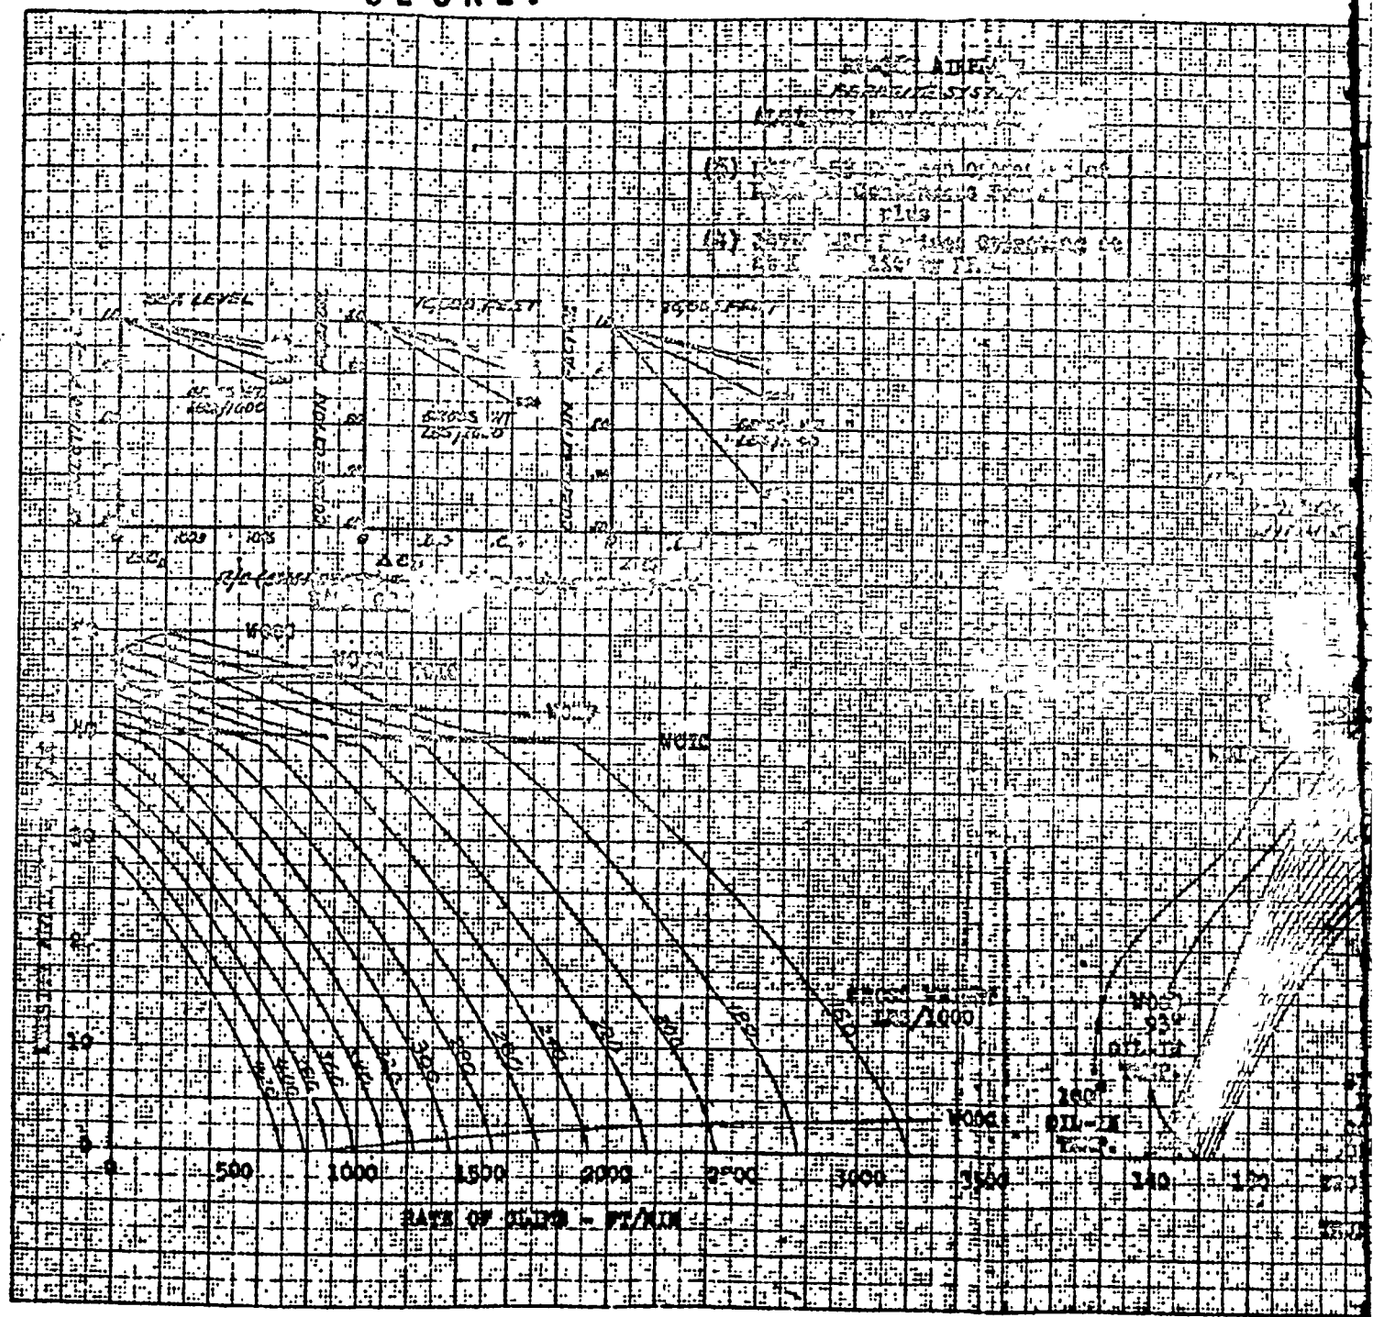

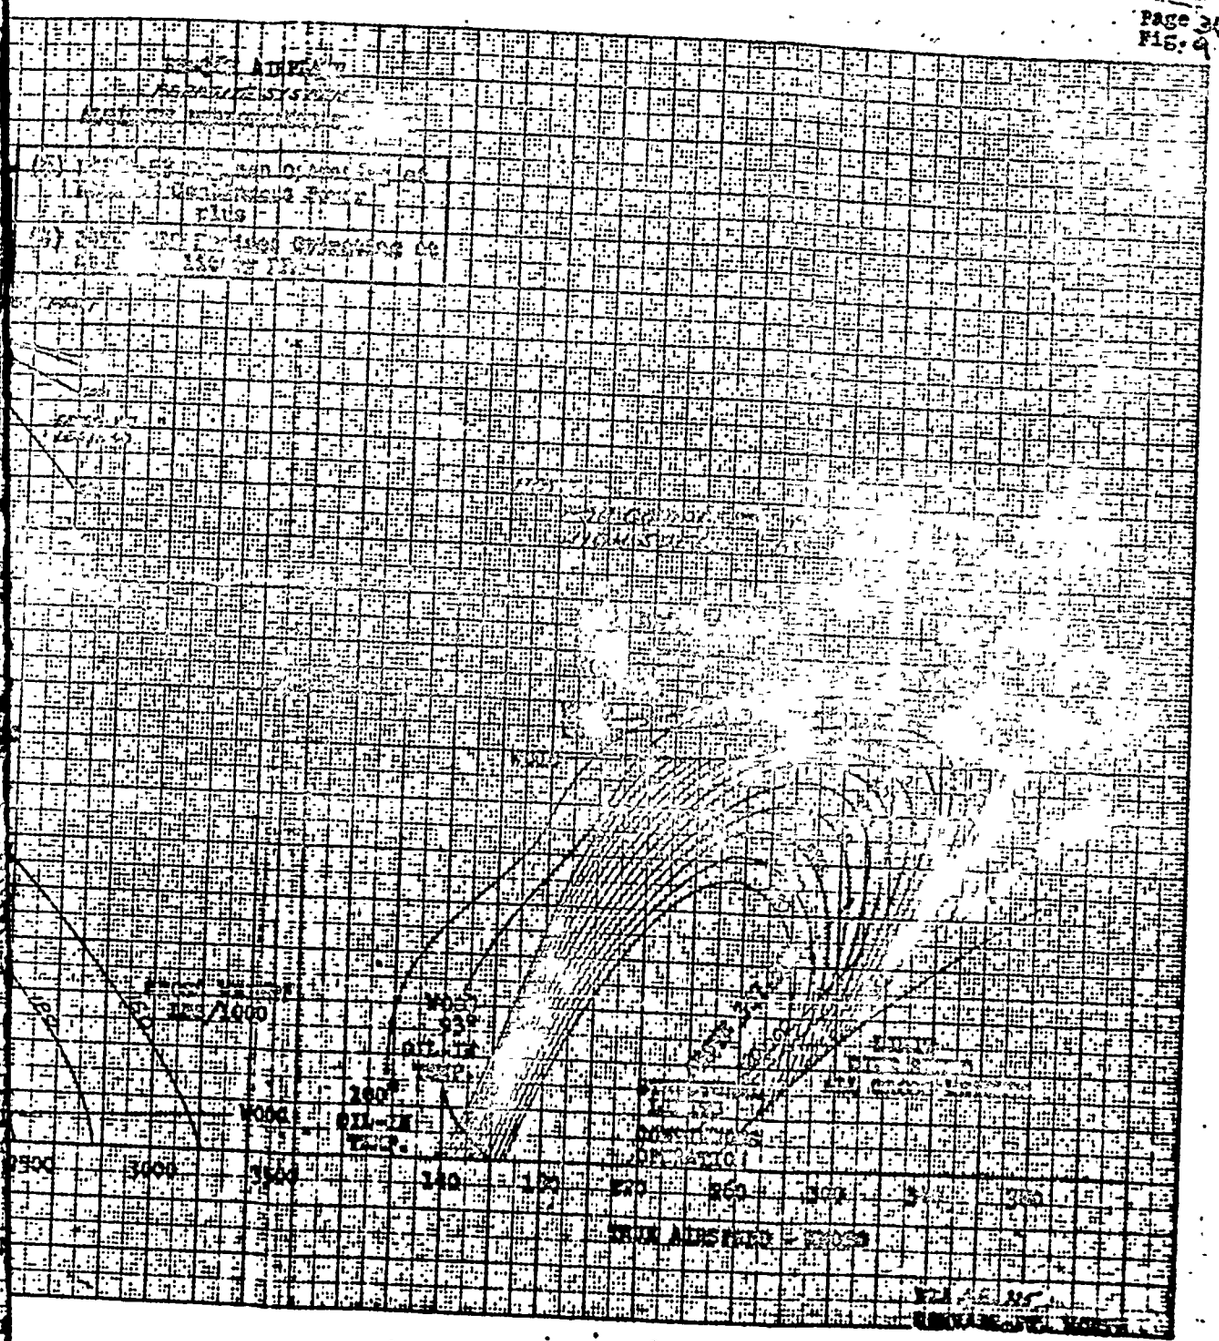


SECRET

SECRET

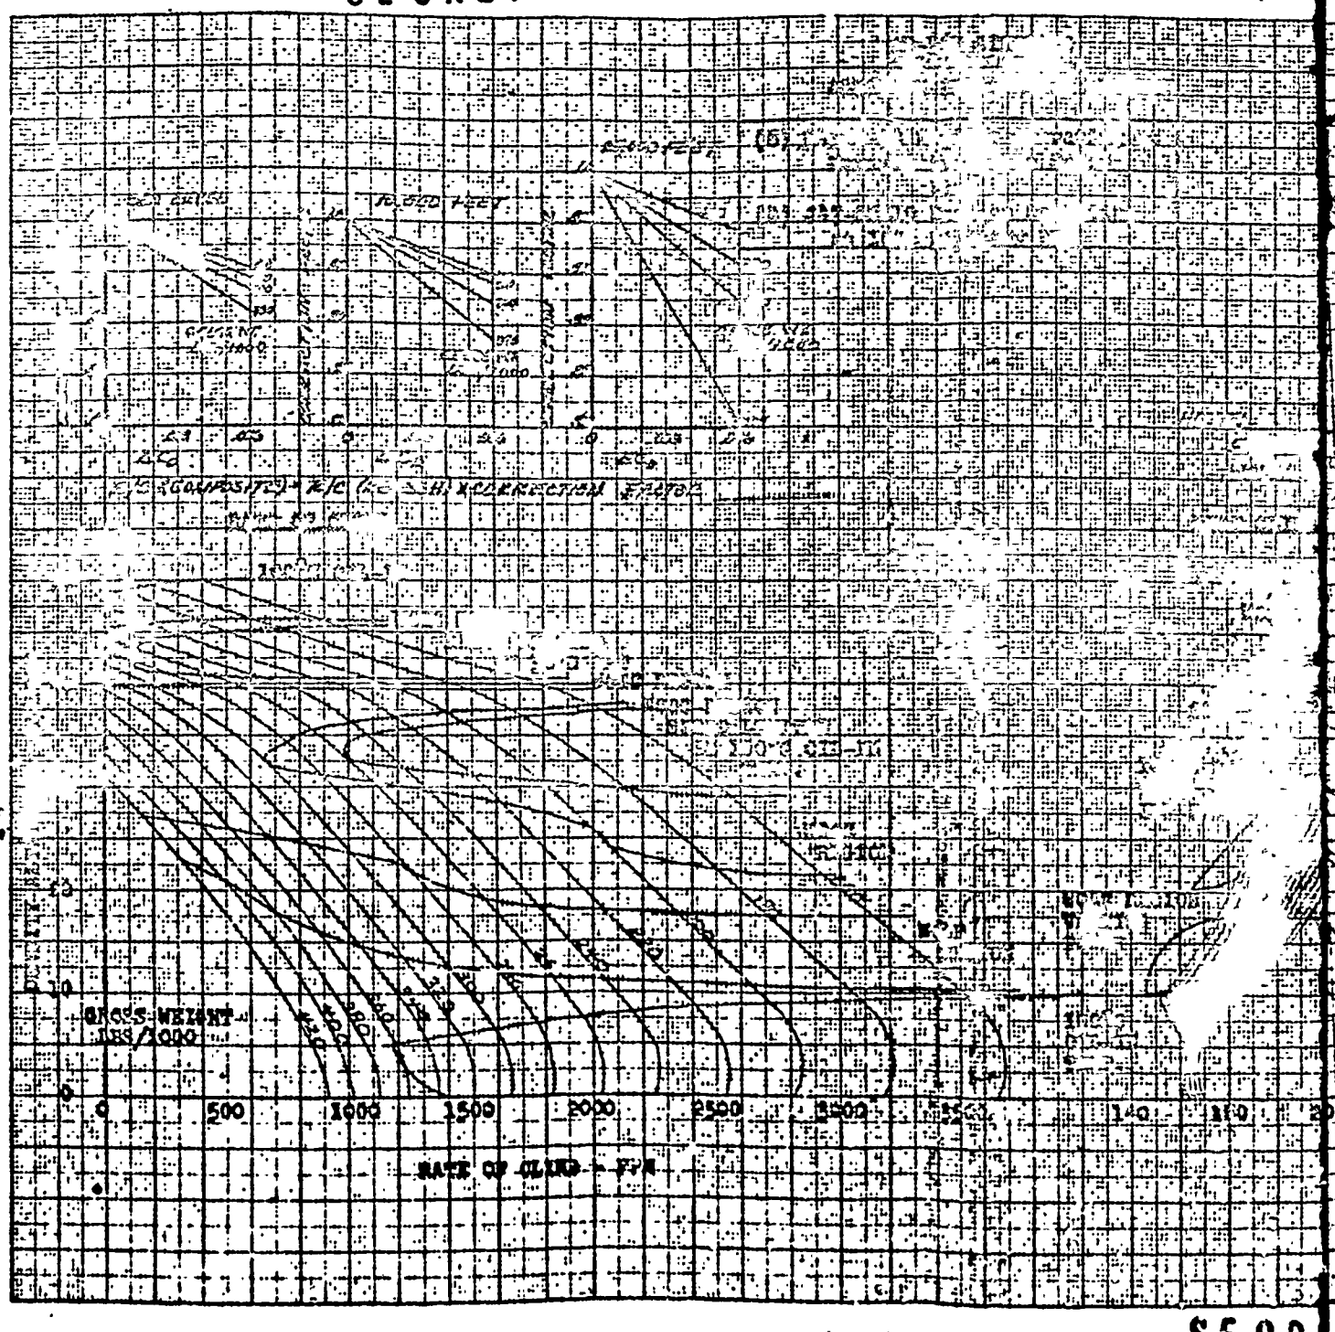
GROSS WEIGHT
LBS/1000
0
500
1000
1500
2000
2500
3000
RATE OF CLIMB - FPM

SECR

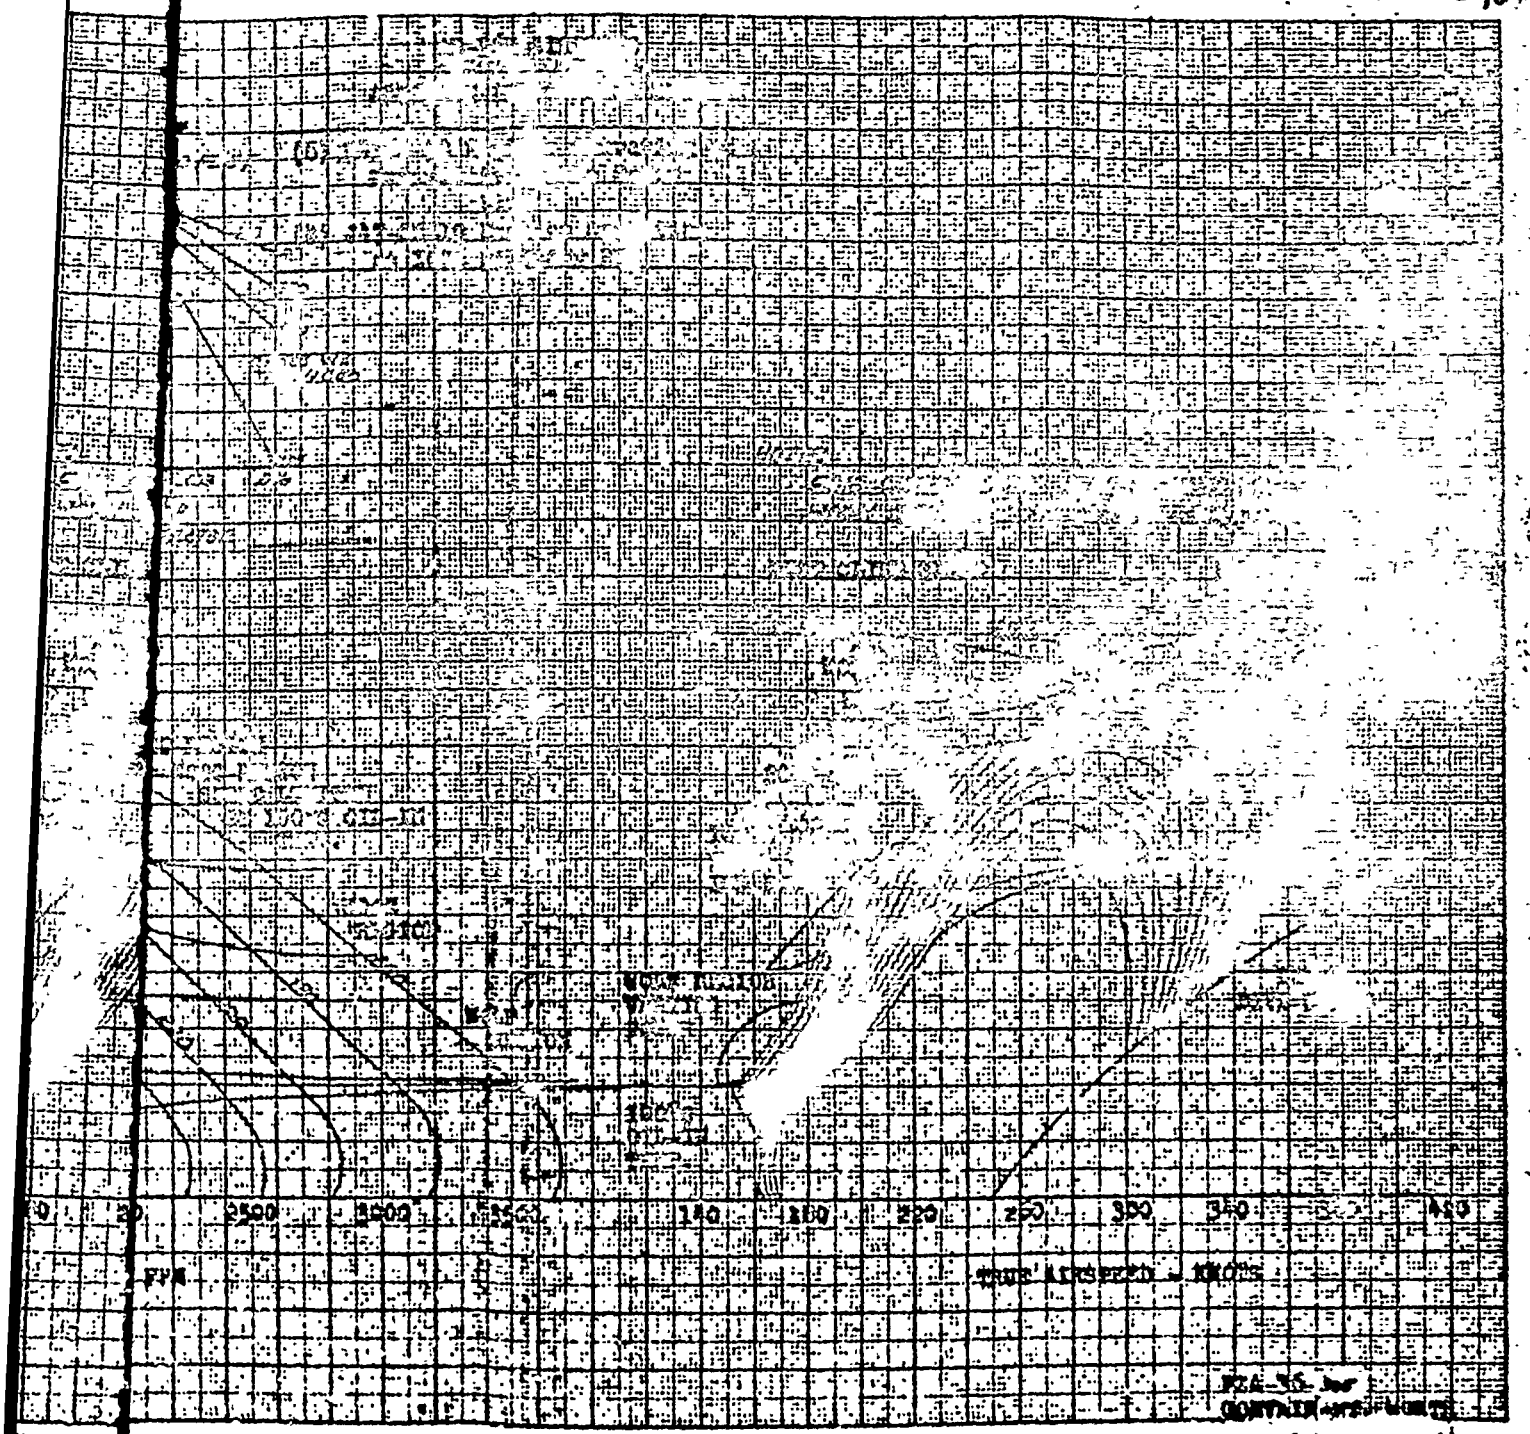
TRUE AIRSPEED - KNOTS

## Climb Control Data

Climb control data are presented in Figures 39, 40, and 41. Climb from sea level to 5000 feet on each chart is at maximum-continuous power. Climb from 5000 feet to altitude is at long range climb. The kinetic energy correction has been incorporated in the development of the charts. Rate of climb corrections due to drag increases are presented on each chart as an equivalent weight correction. For drag changes other than those presented, the correction can be obtained by interpolation.

Using the standard climb charts for stripped airplane climb performance, reduce stripped airplane gross weight by 4000 pounds.



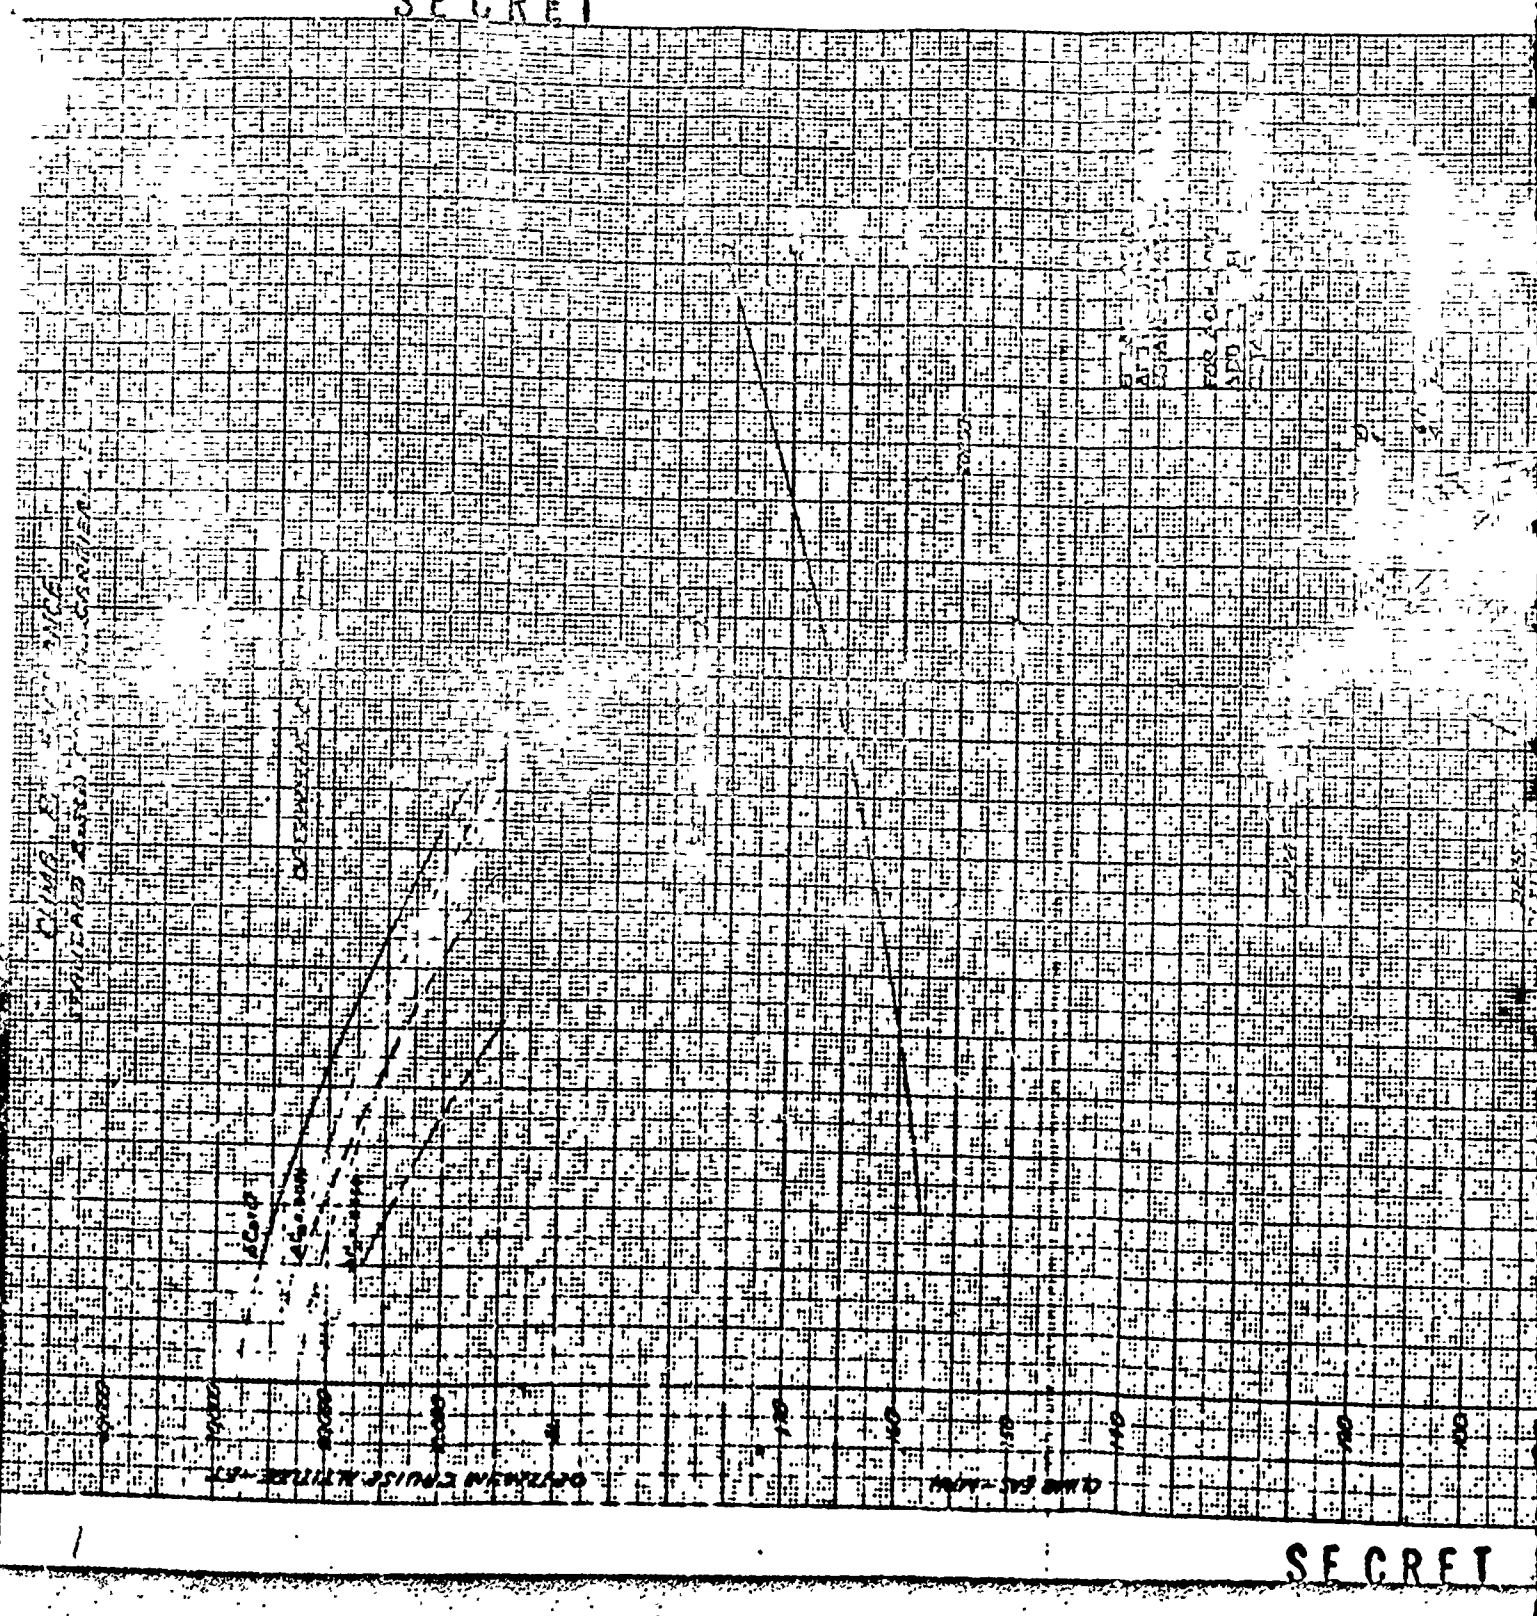


FIG. 11

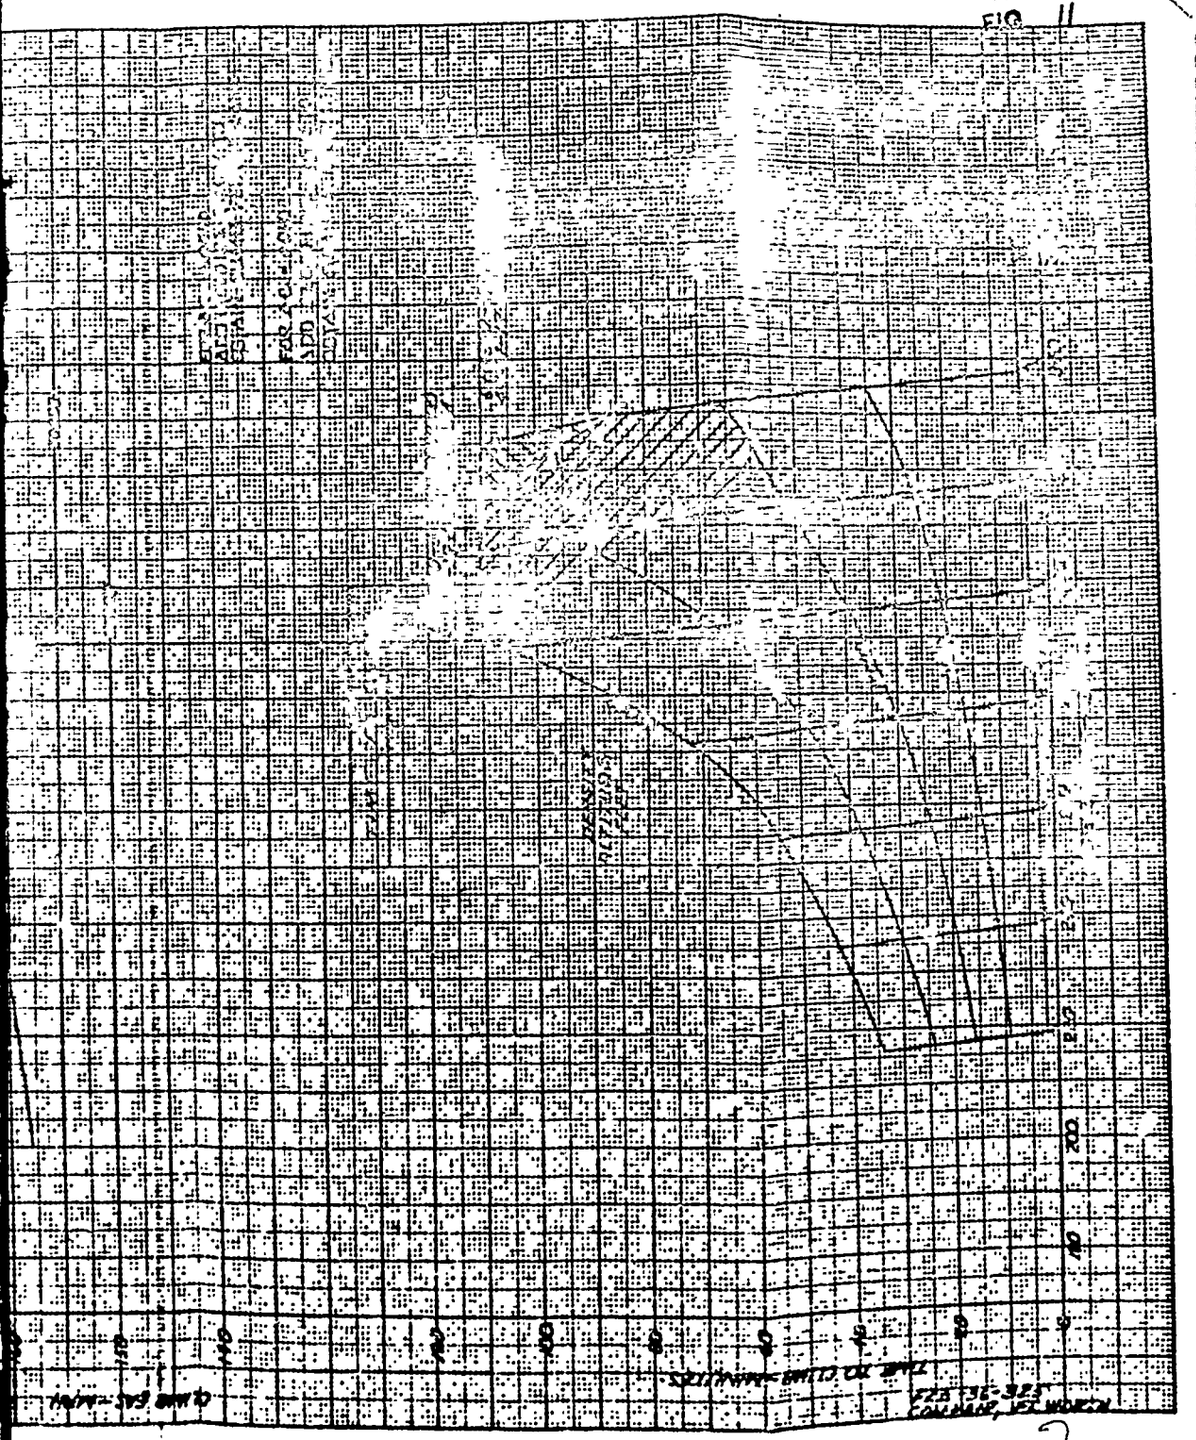


SECRET

SECRET

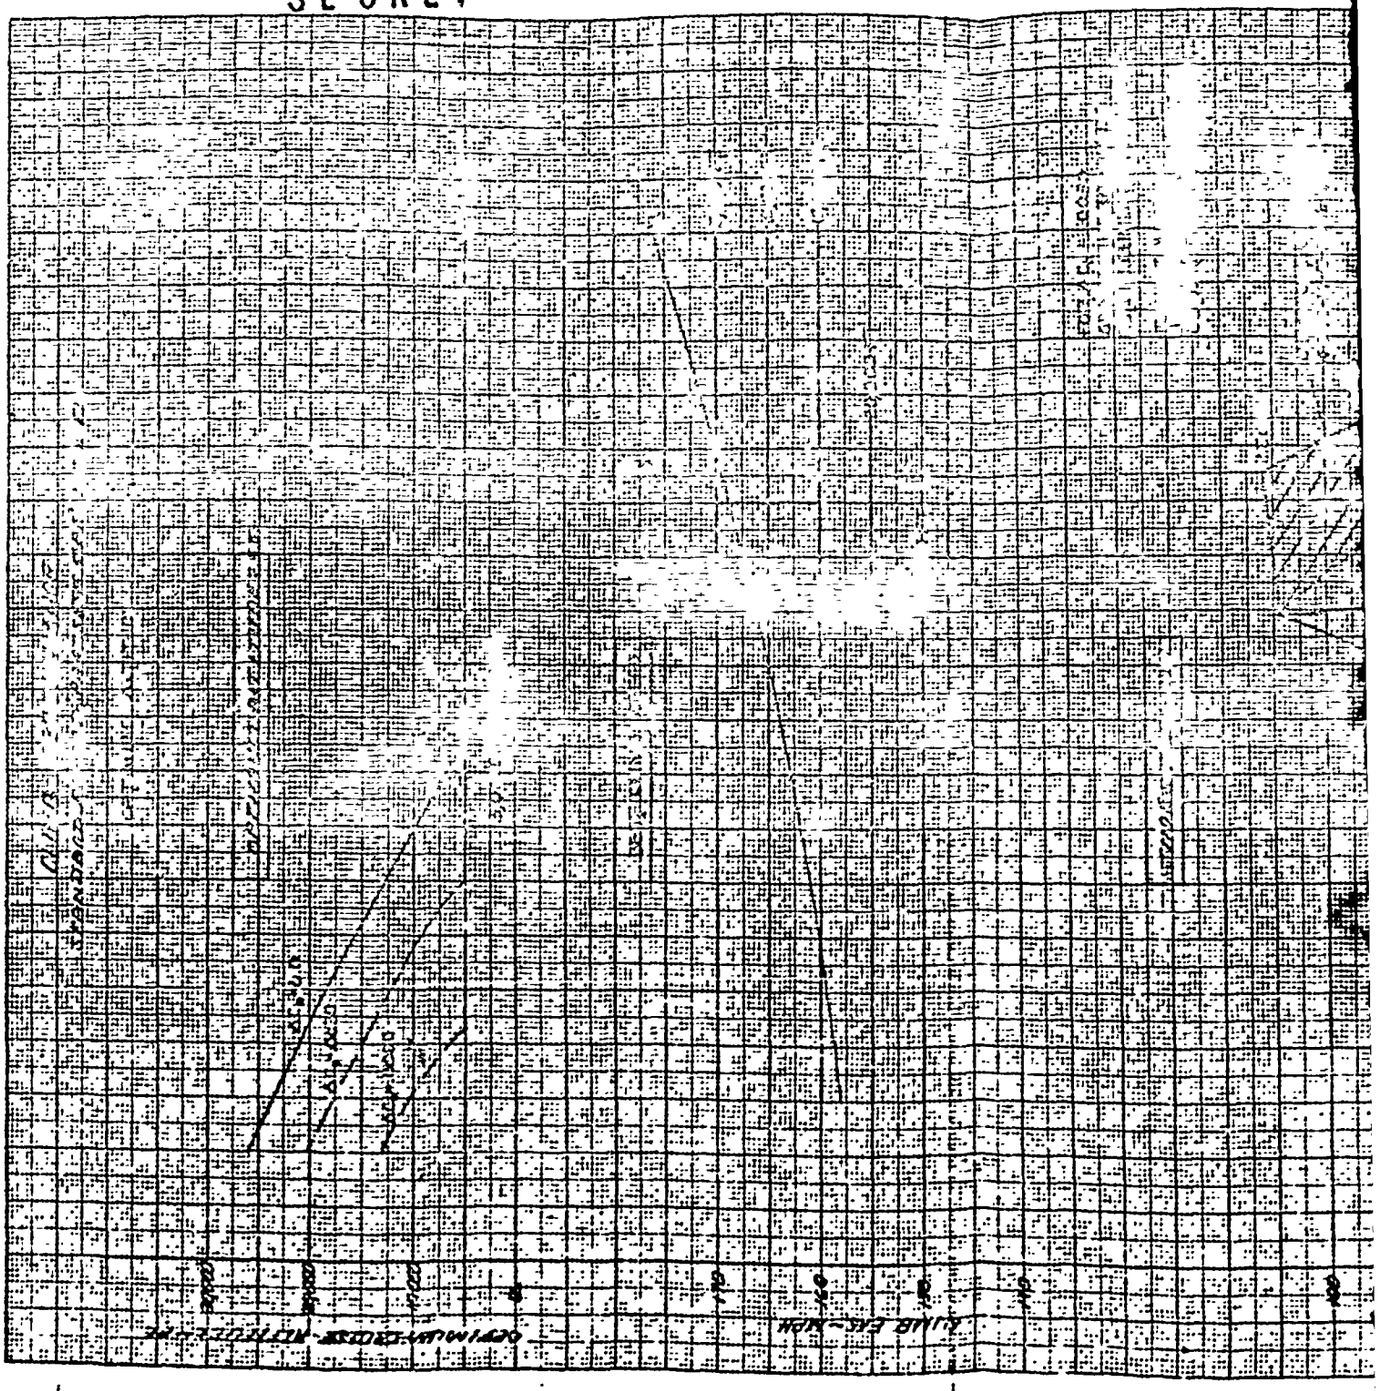


SECRET

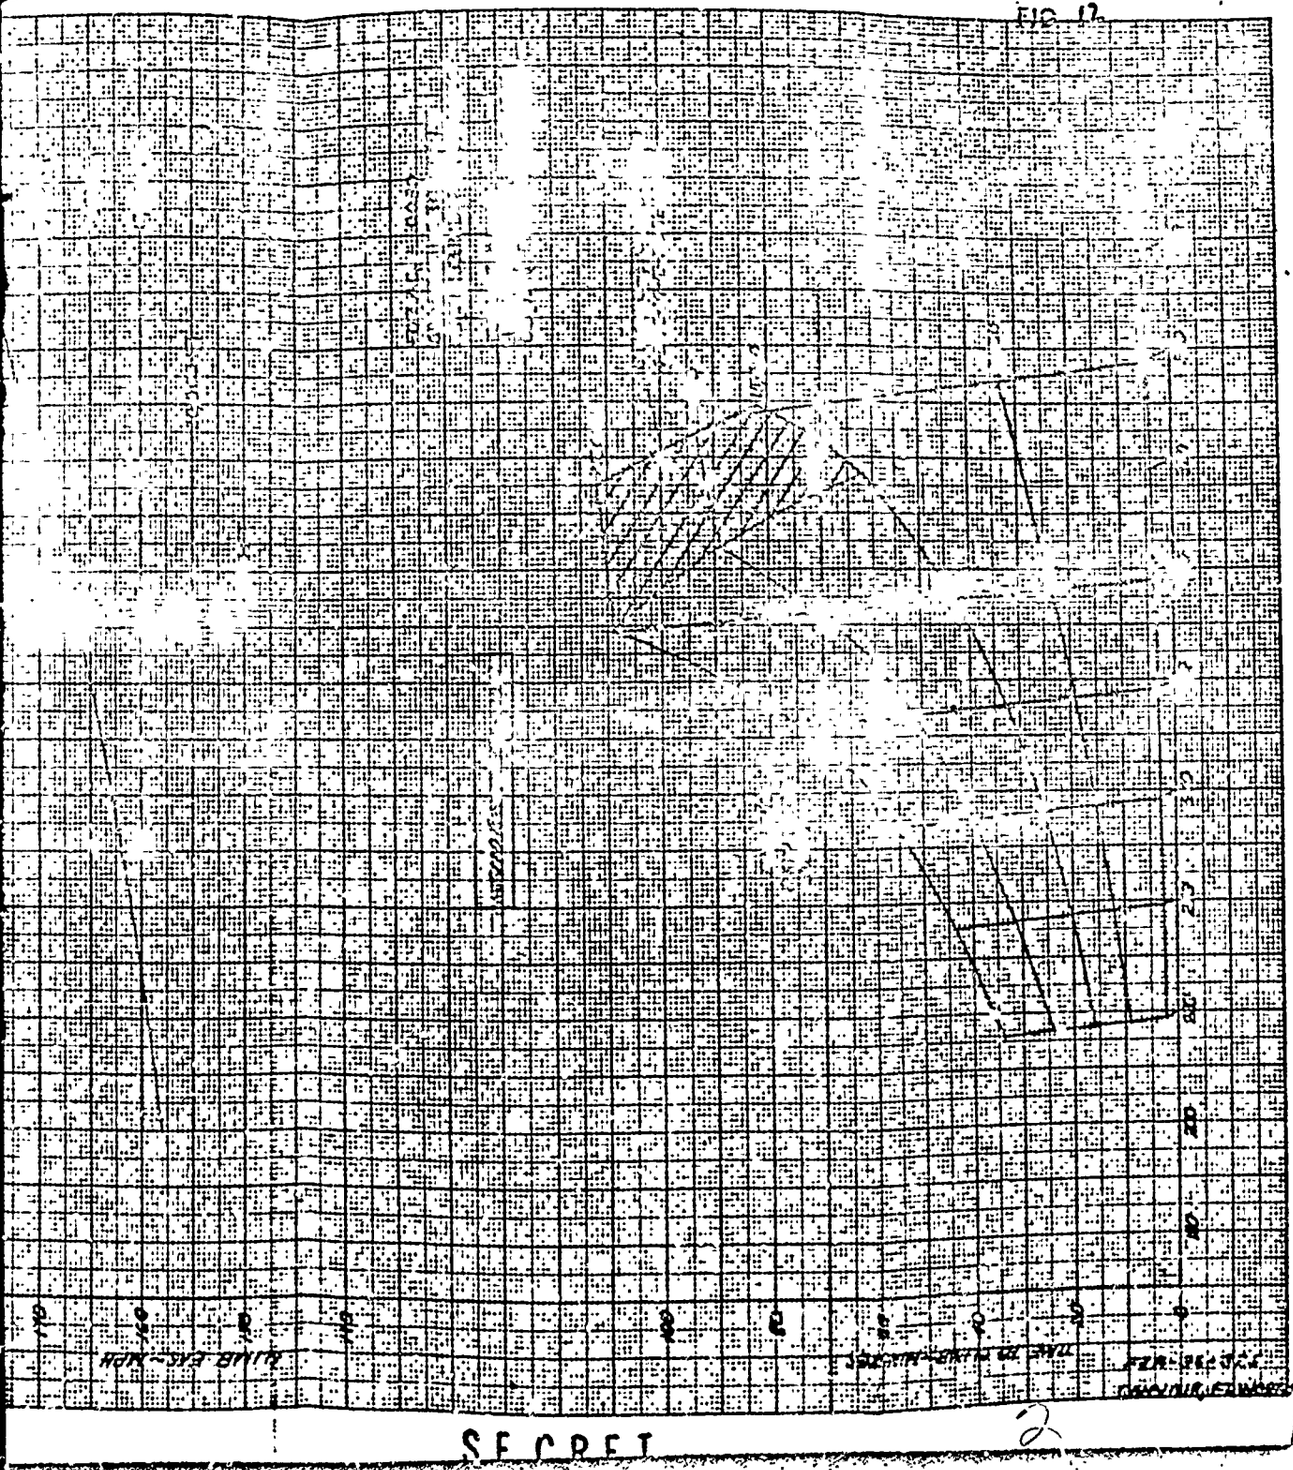

SECRET



SECRET

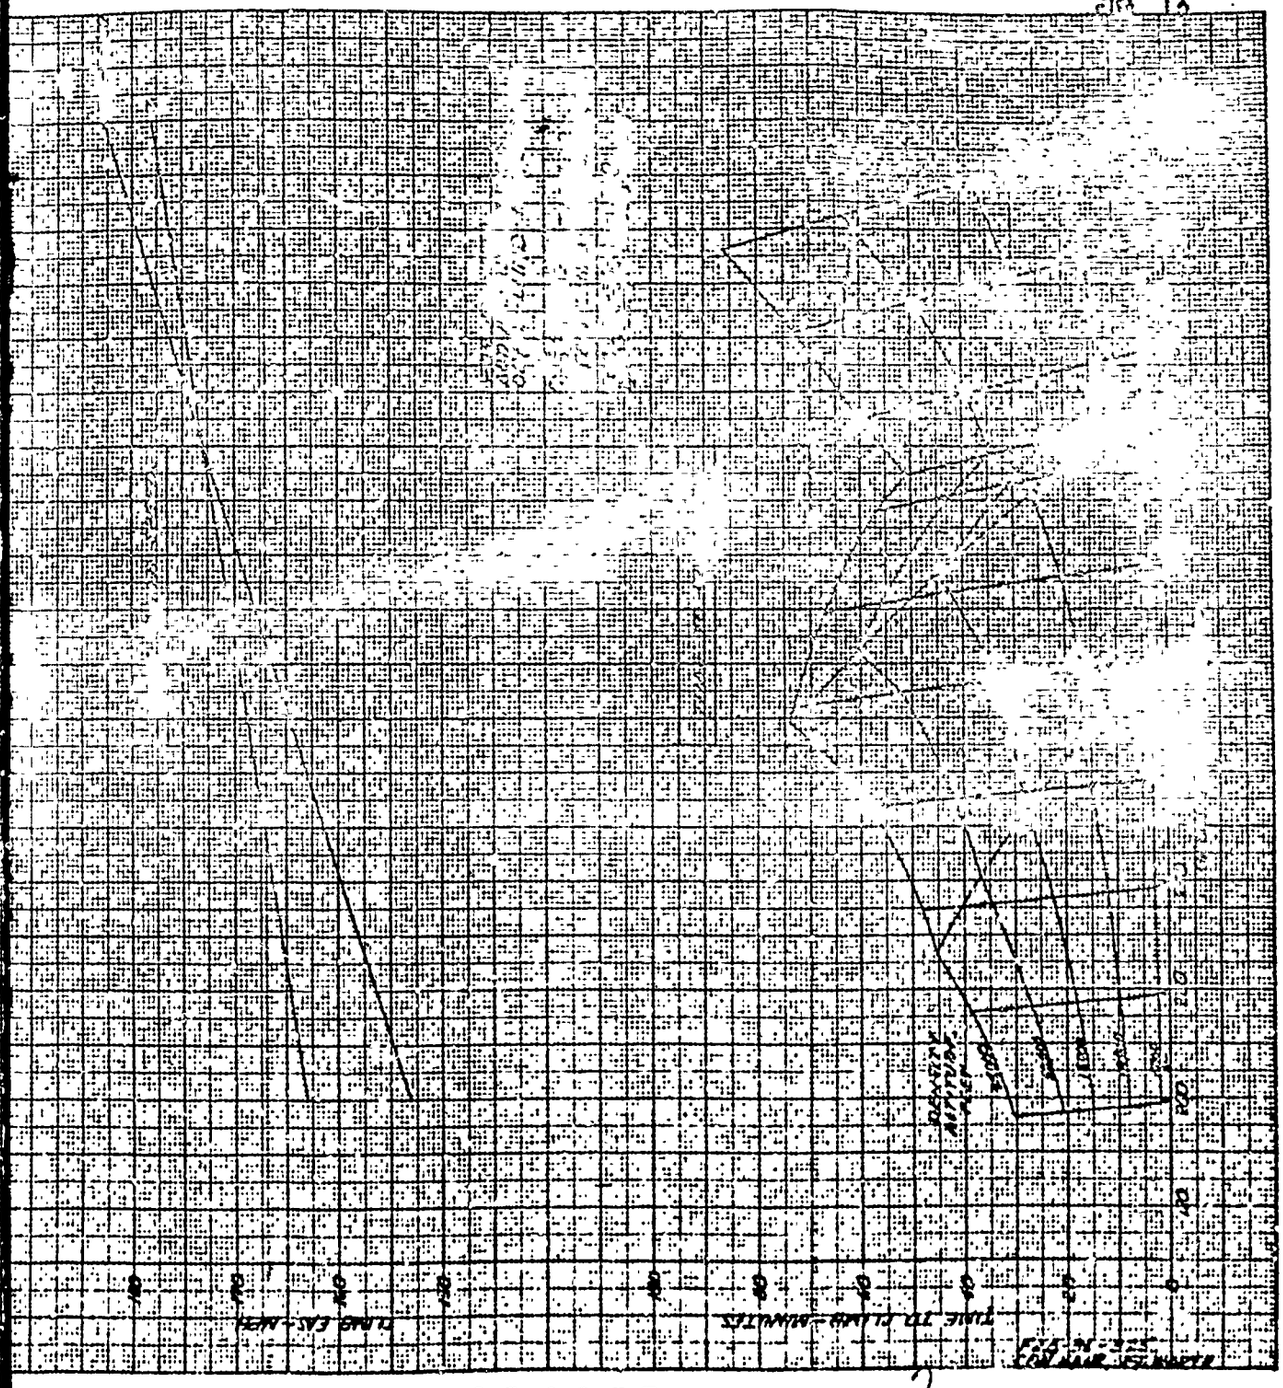

SECRET

Long Range Cruise


Basic long range operating data at optimum altitude and 35,000 feet are presented from Figure 14 through Figure 21 .

Corrections of range performance for stripped carriers can be obtained by the equivalent weight relationships shown on page 62 .

SECRET





SECRET

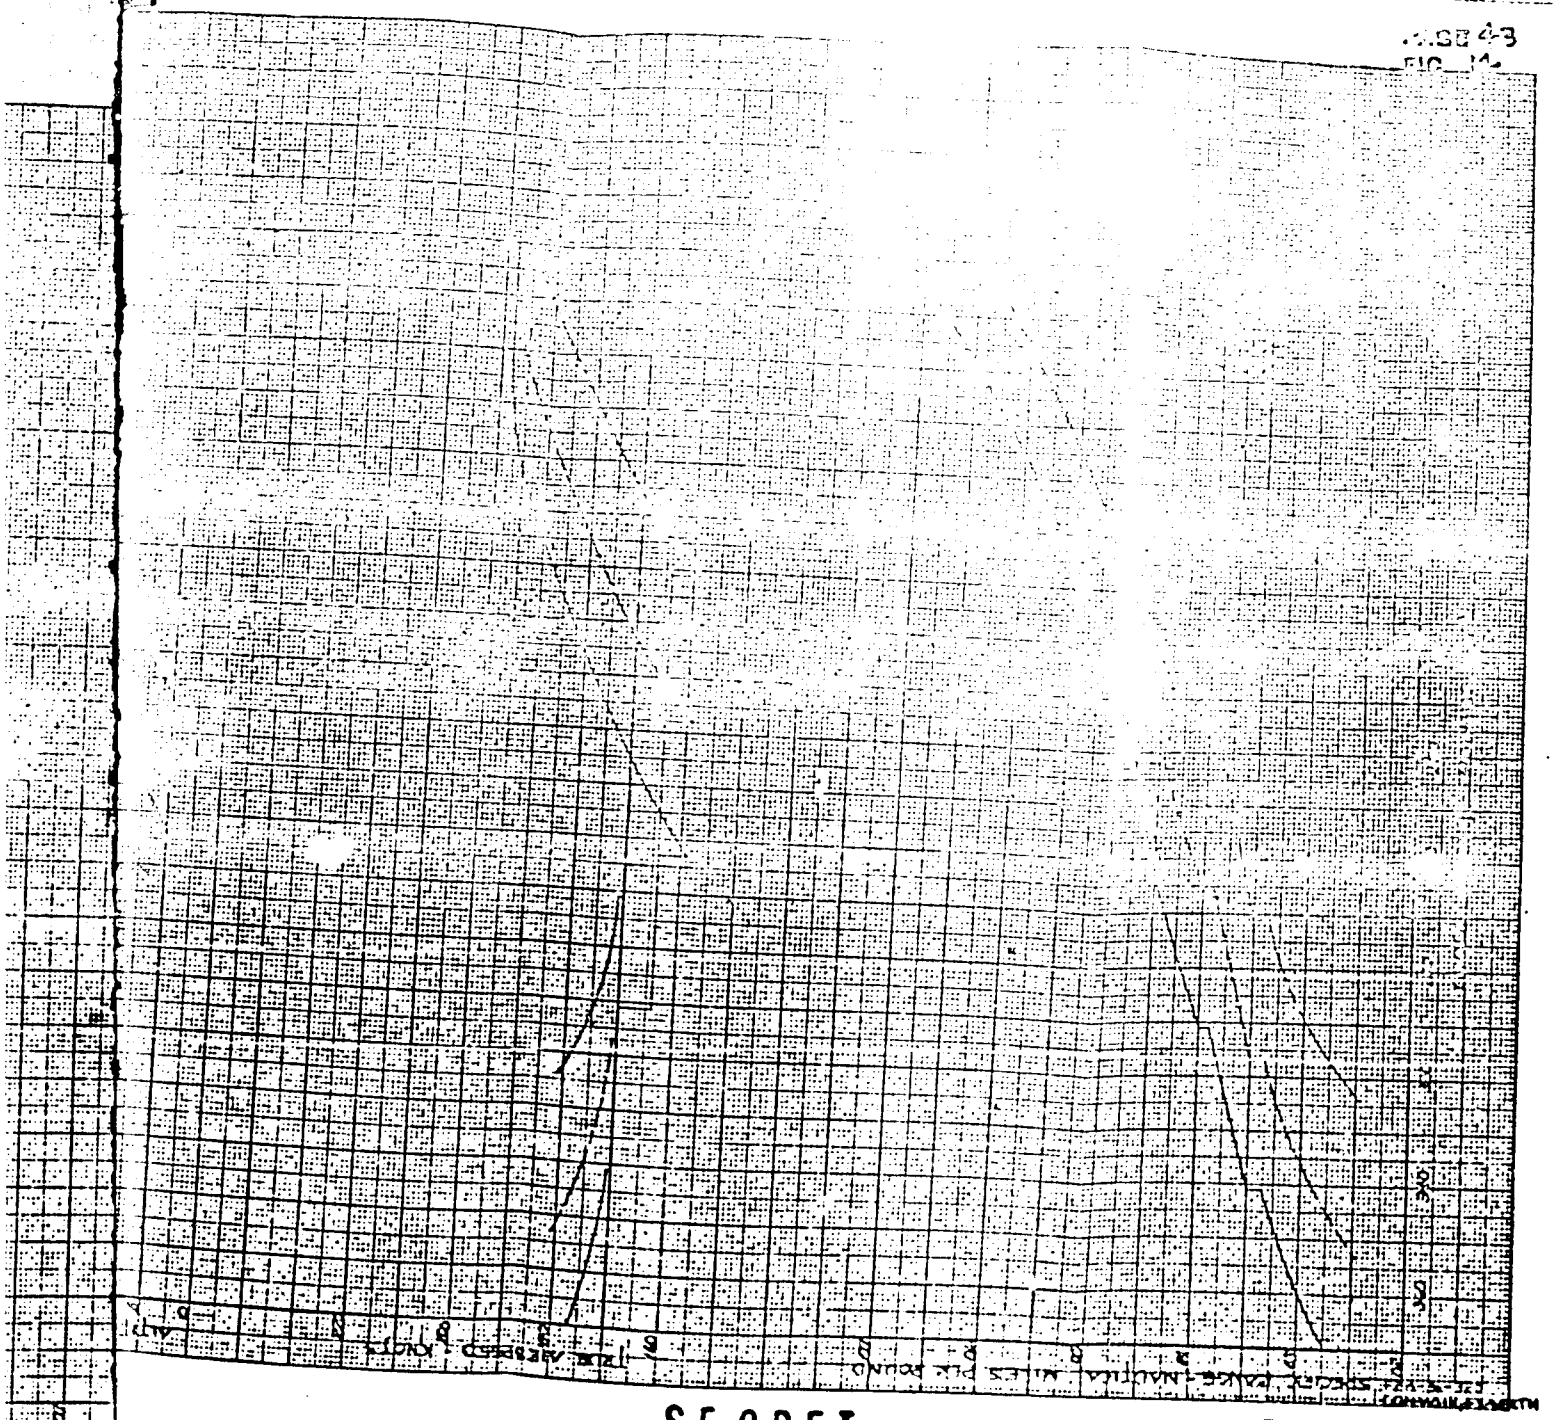


SECRET

SECRET

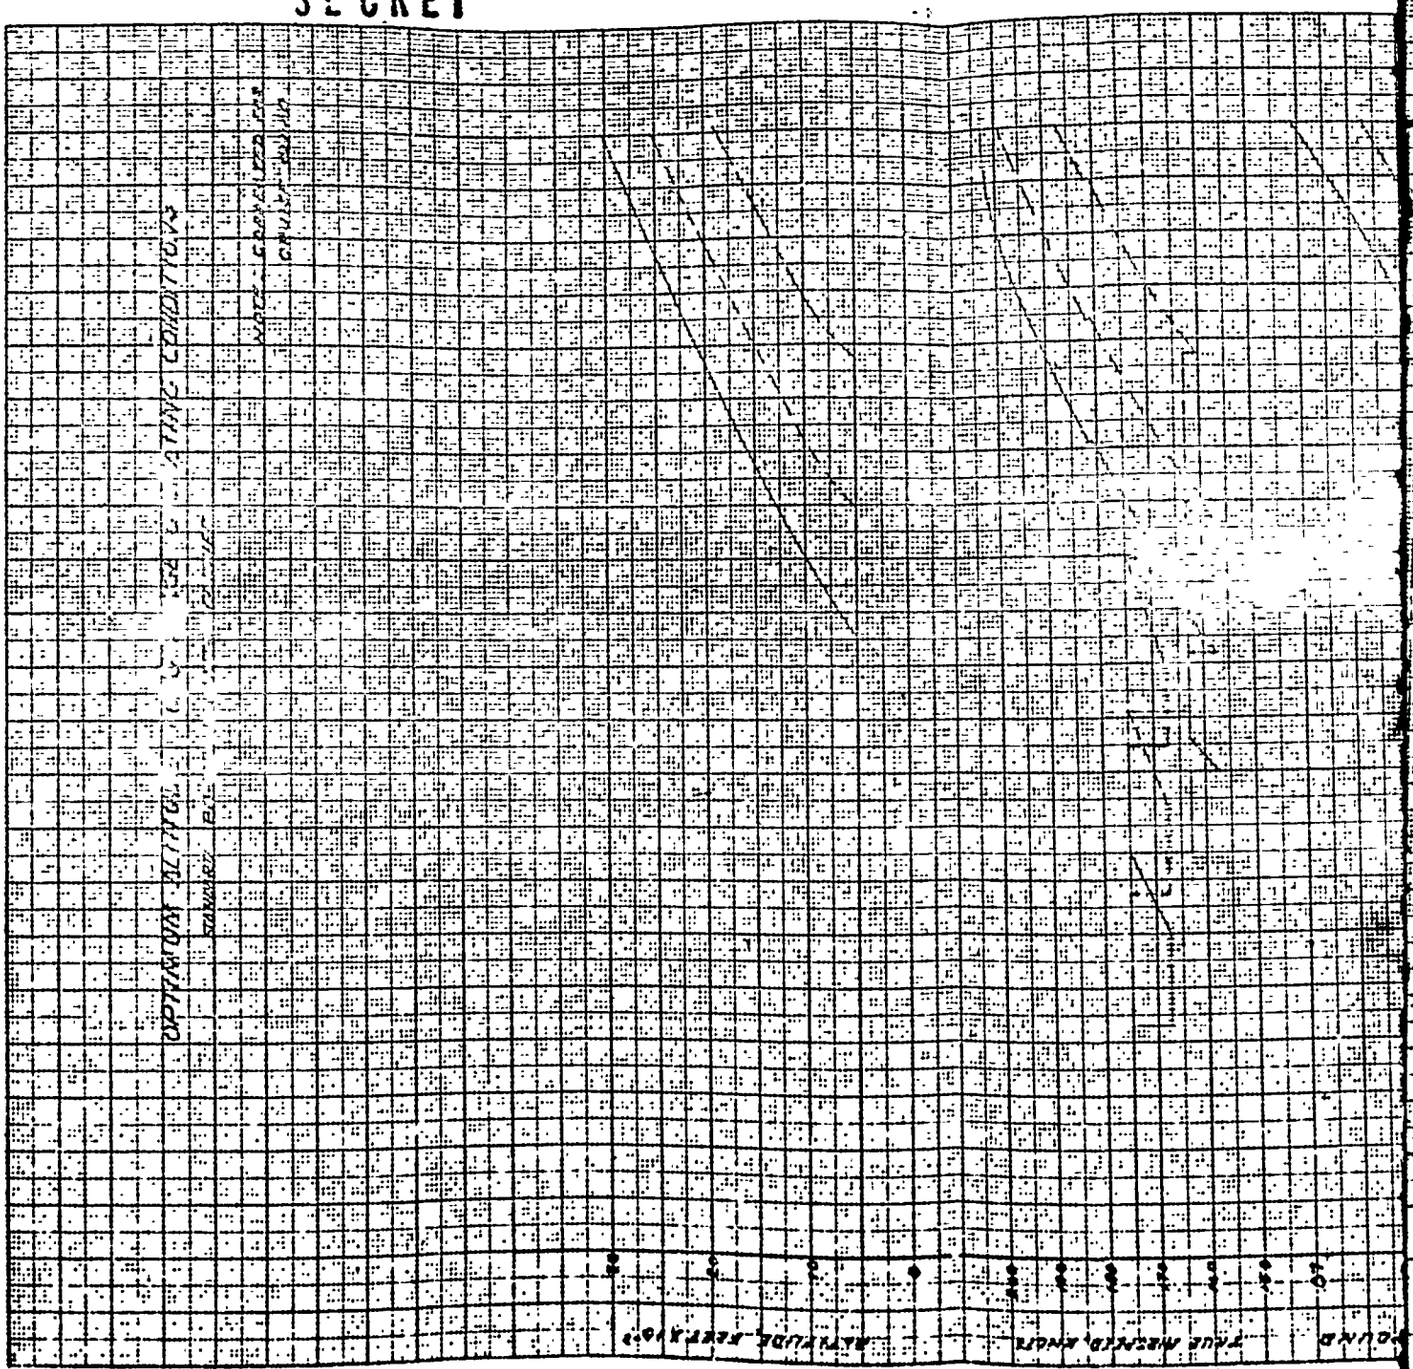


SECRET

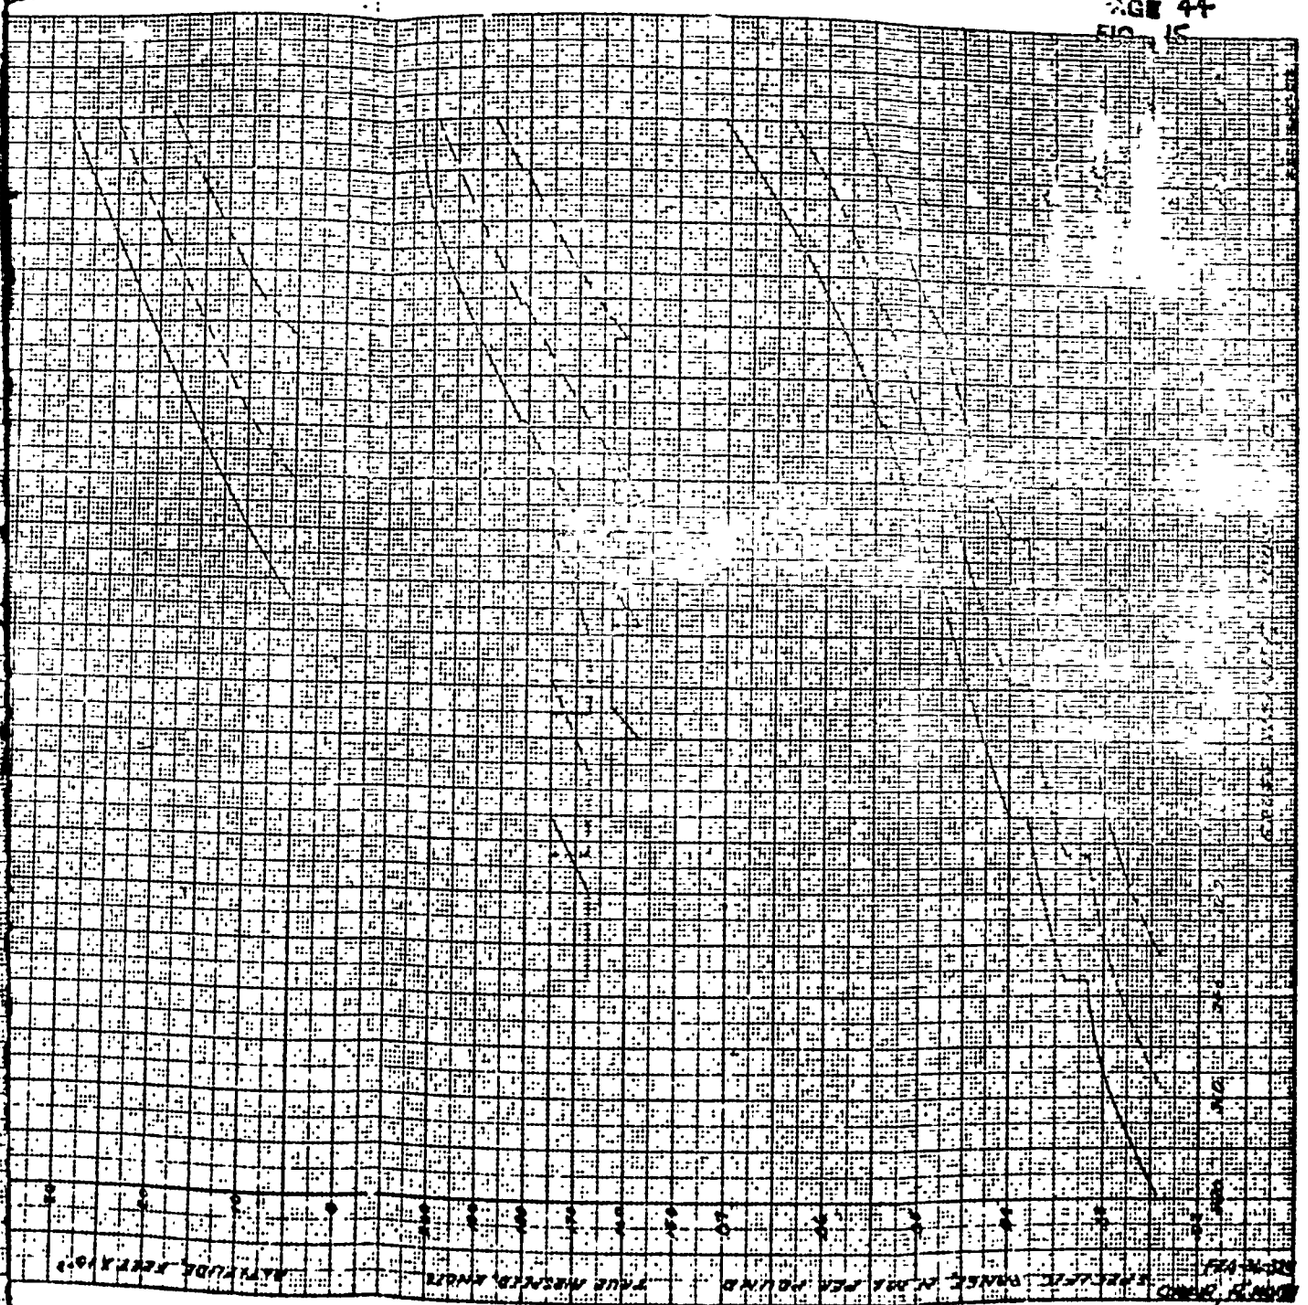


SECRET

SECRET

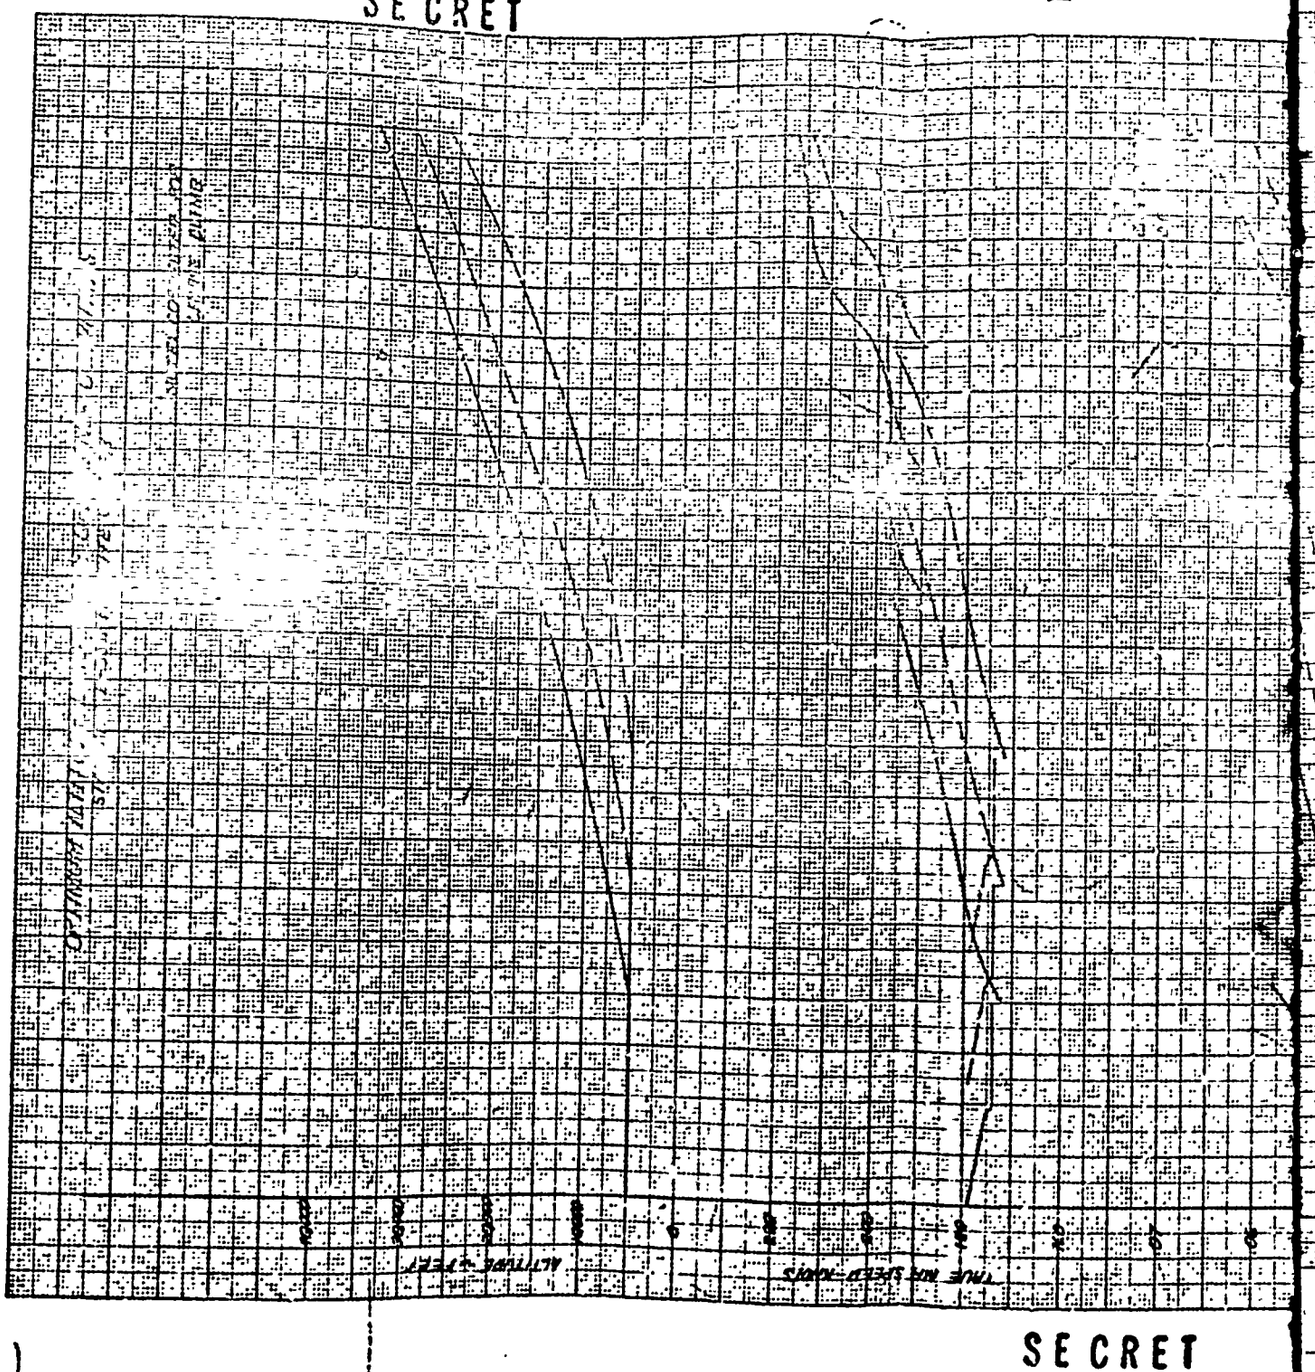



SECRET

FIG. 11

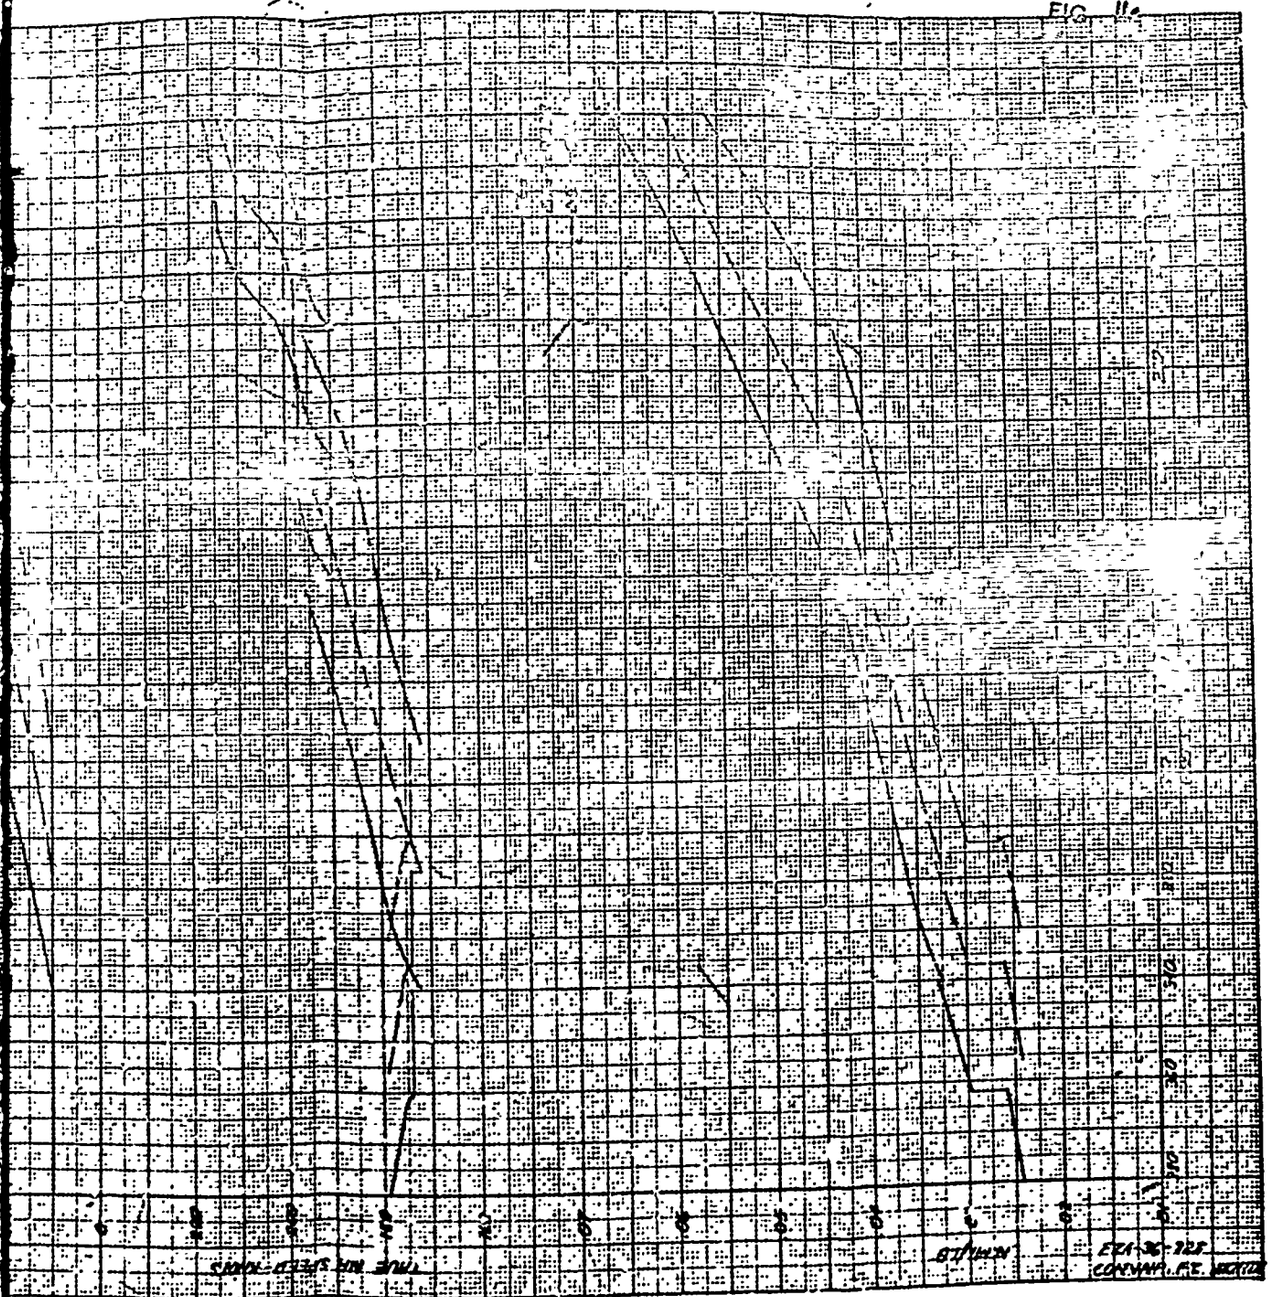


SECRET

SECRET

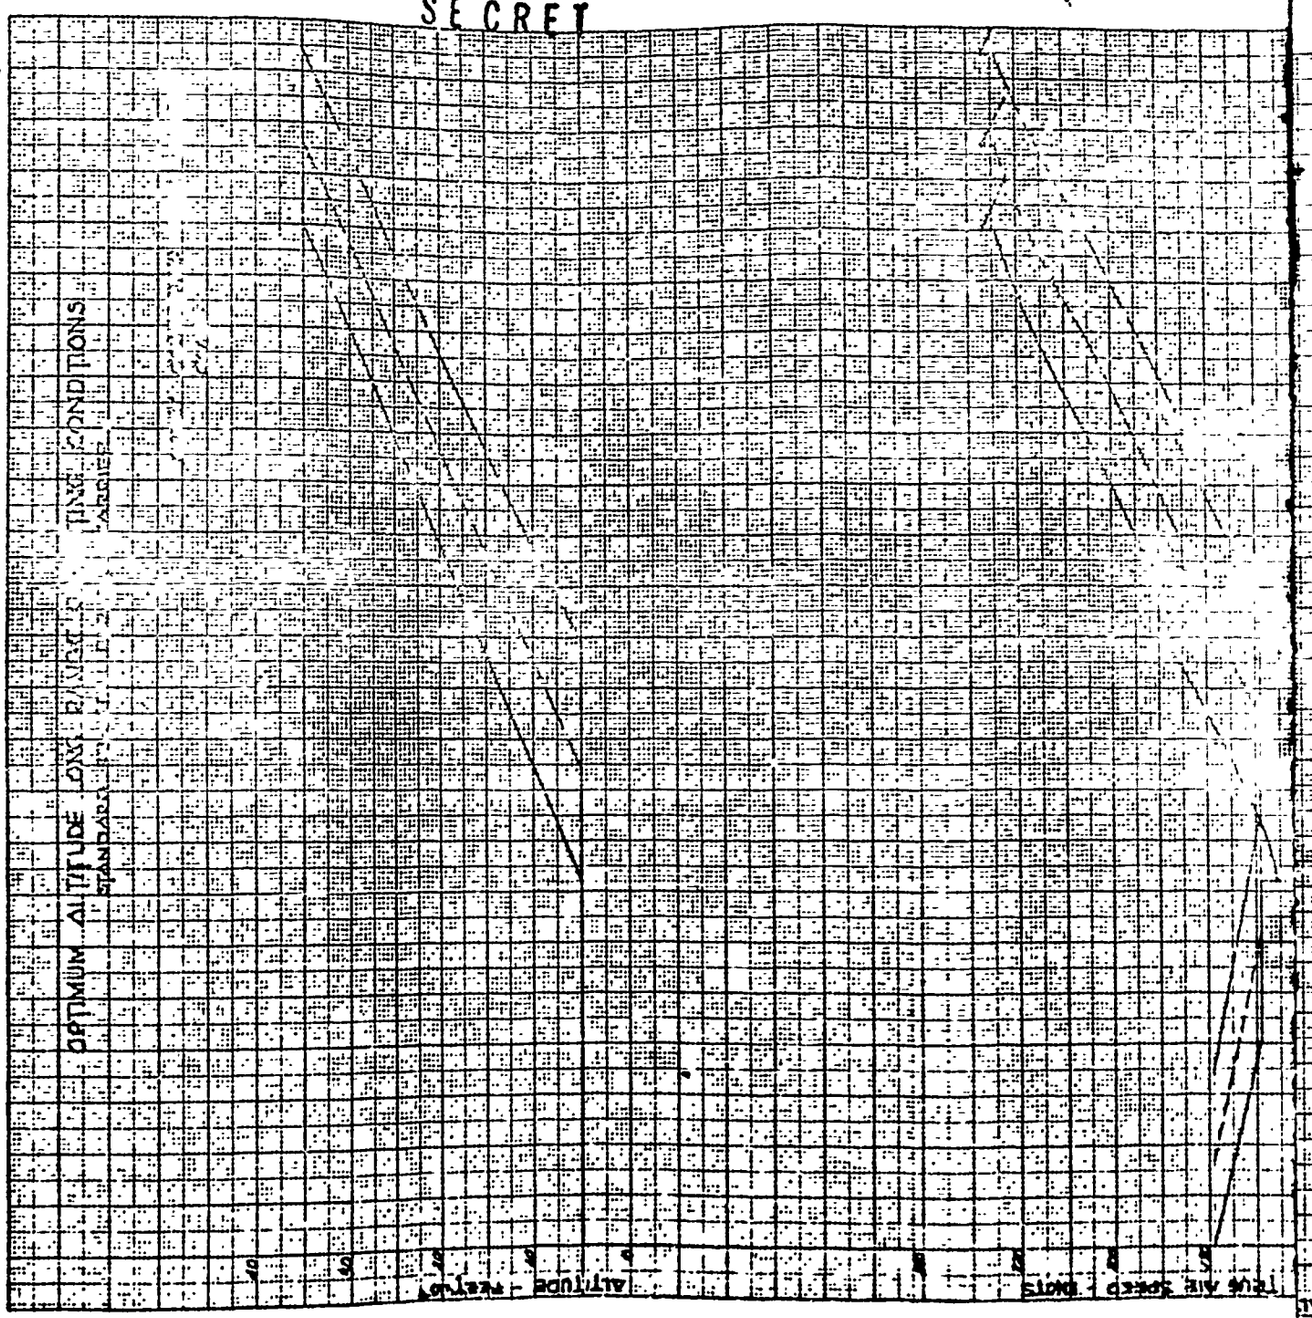


SECRET

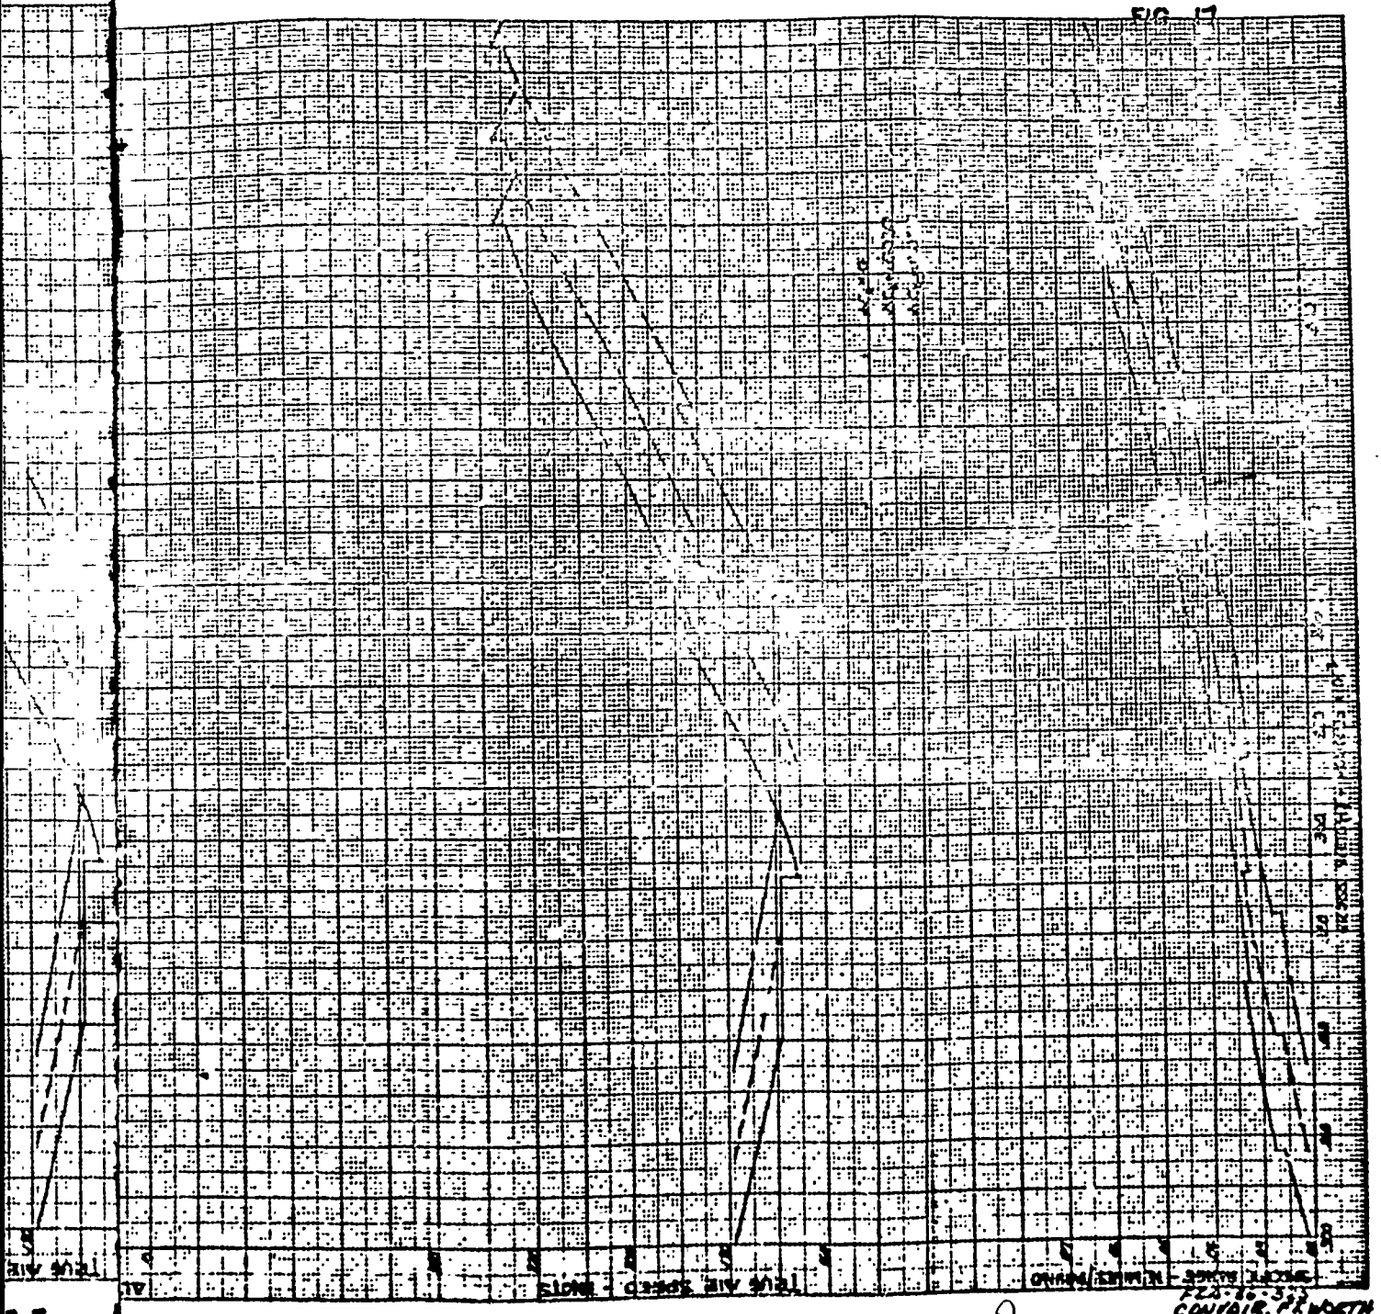


FZS-6-313
CONVAIR, FT WORTH

SECRET




SECRET


PAGE 47
FIG 18

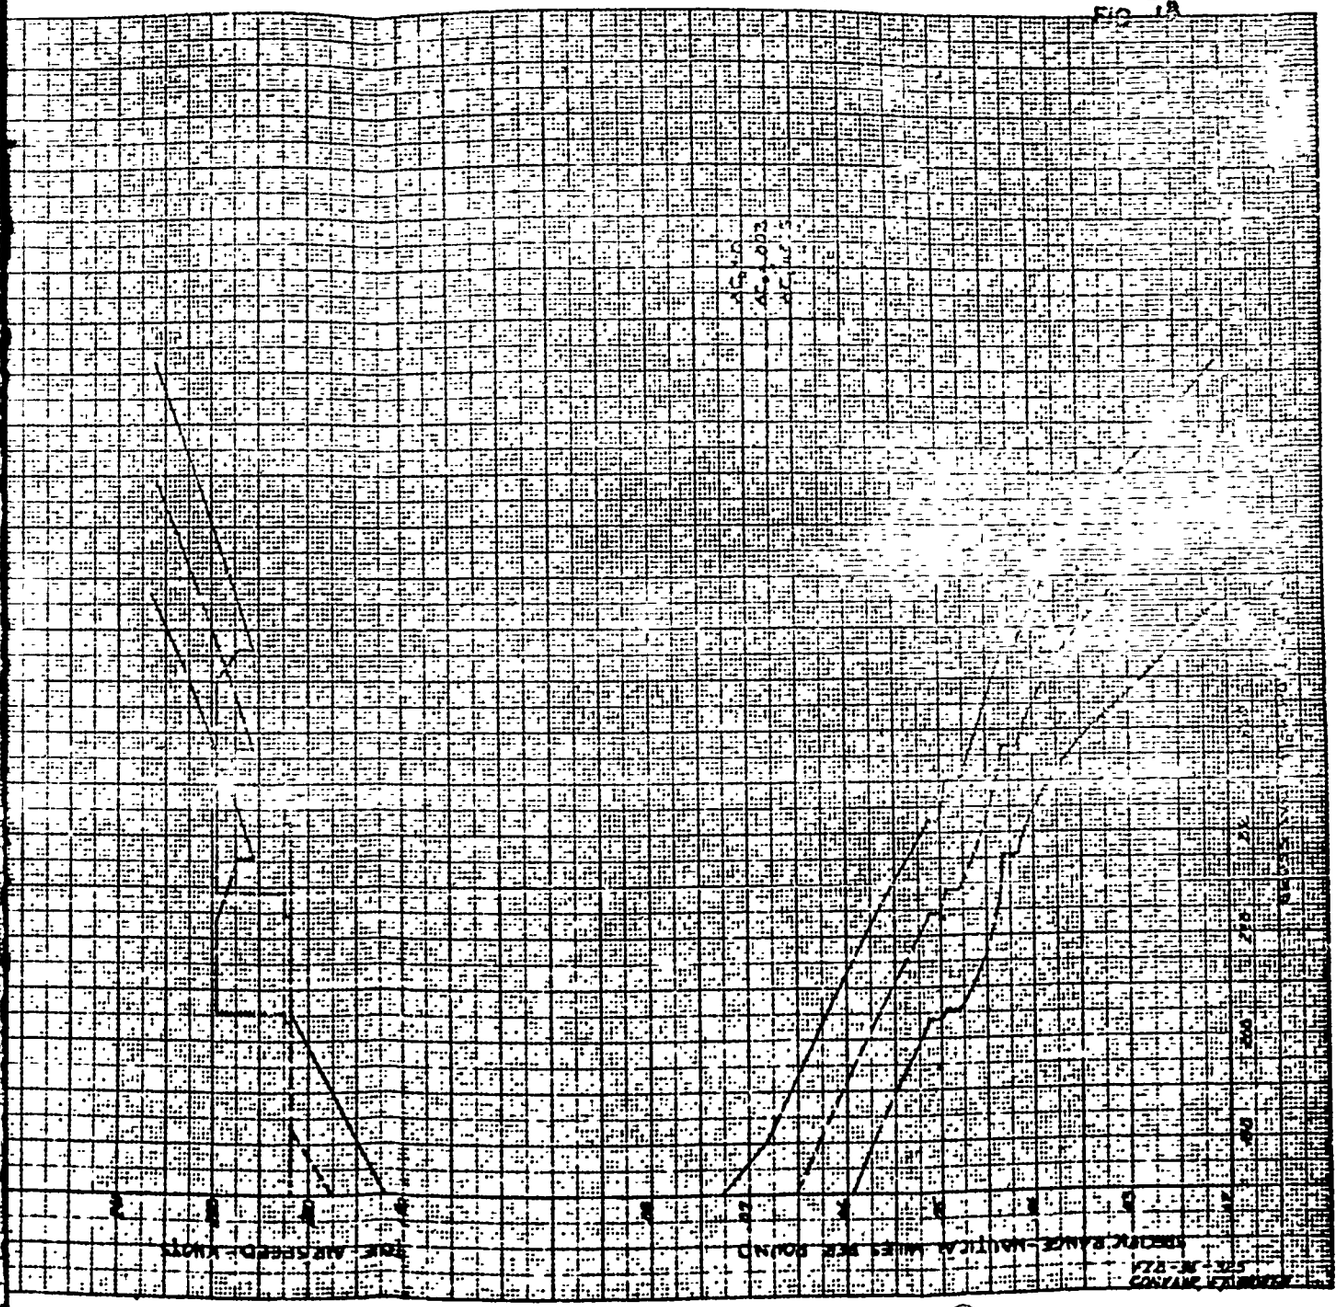


SECRET

2


FIG. 19

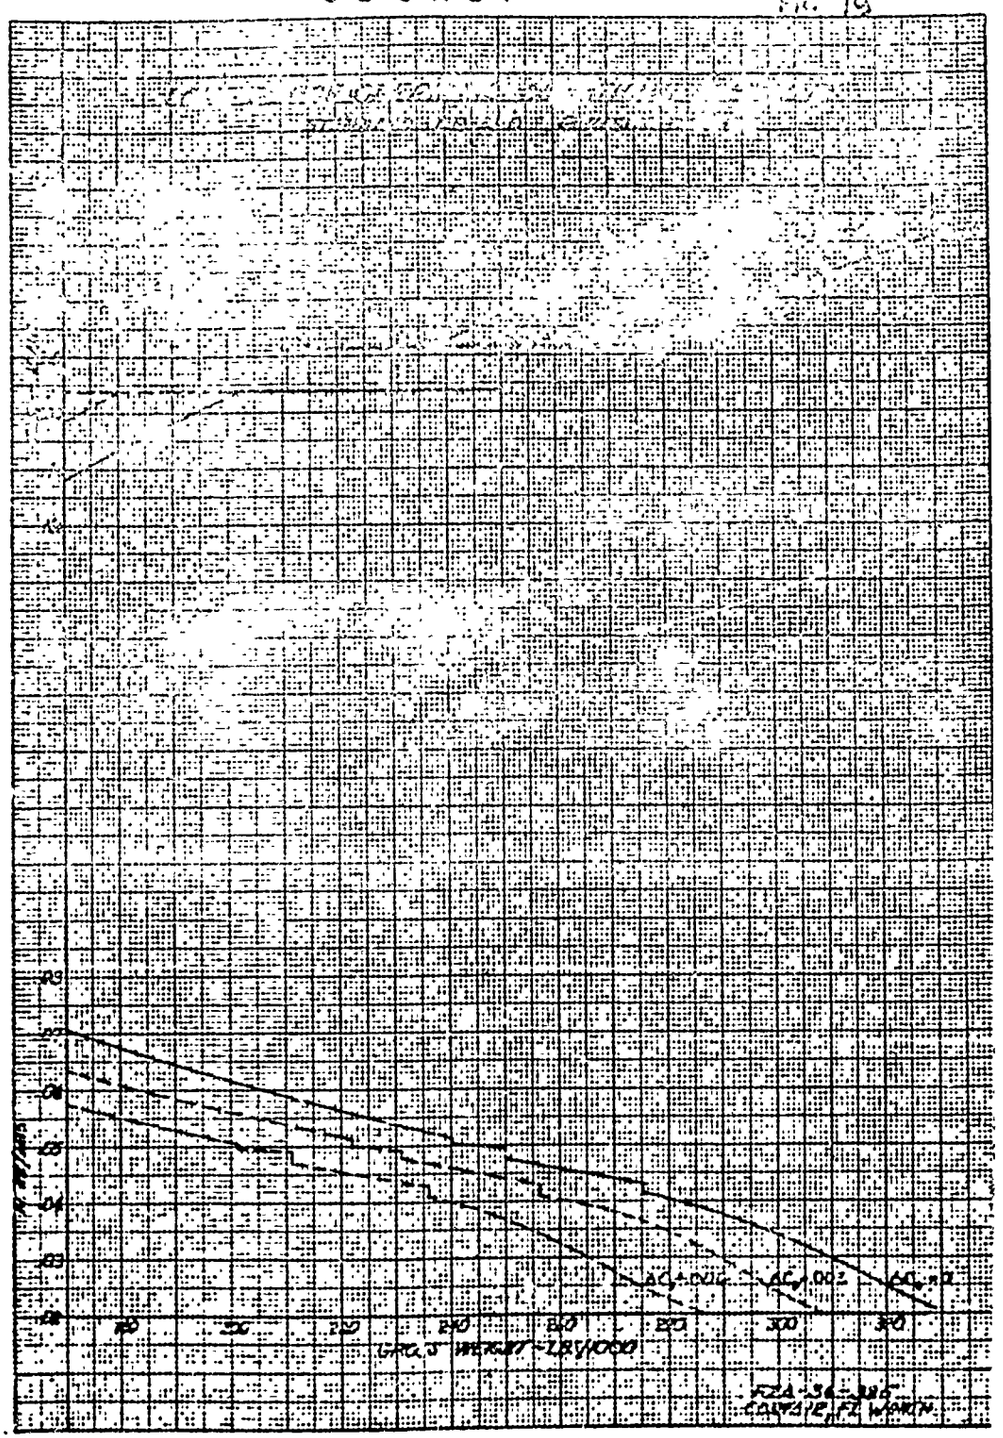

SECRET

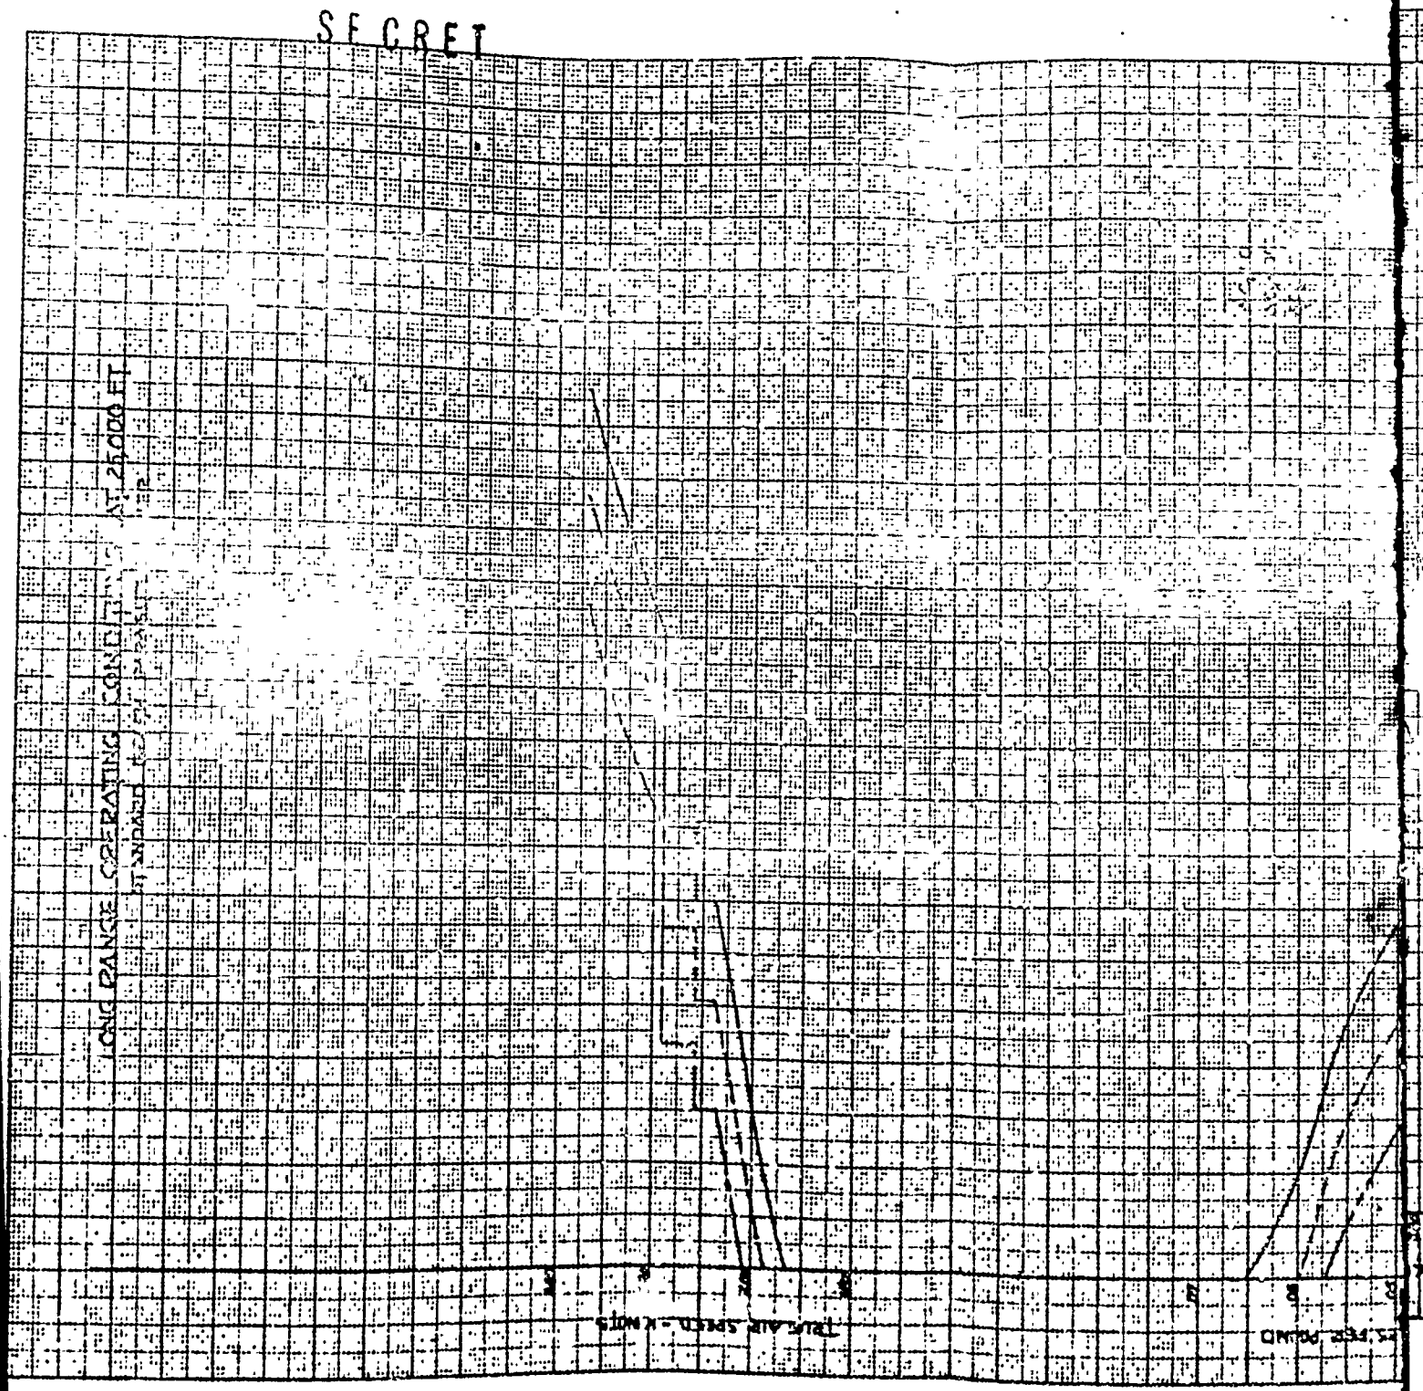



SECRET

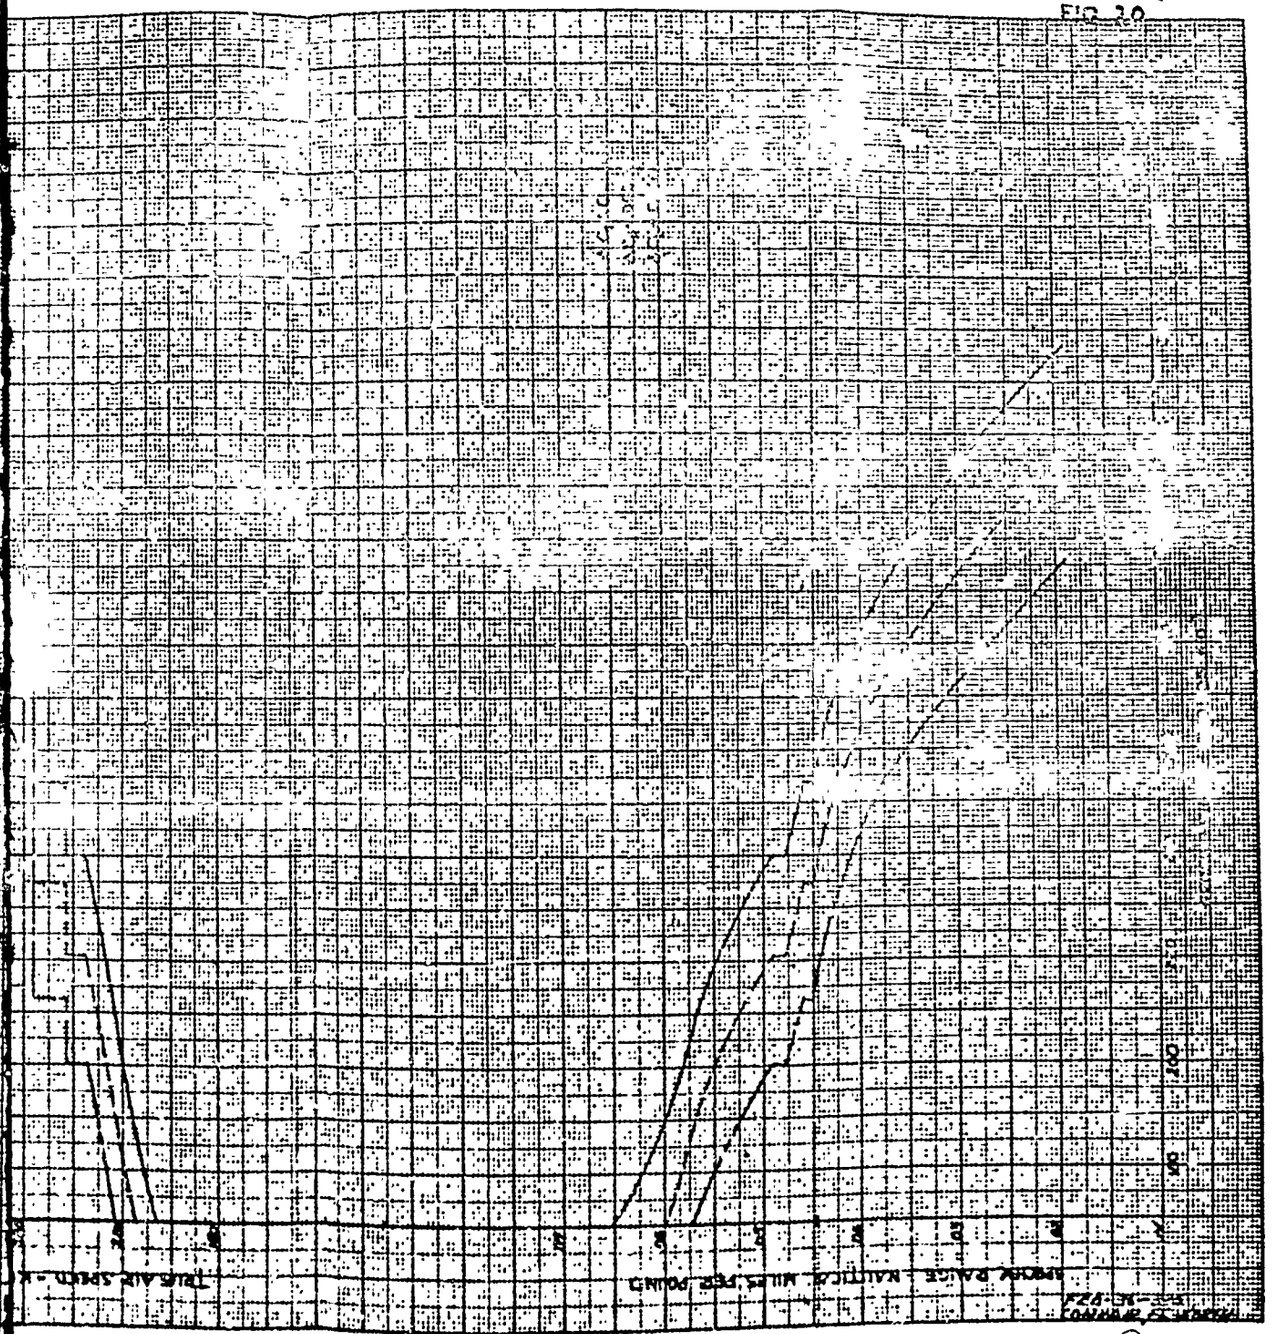



SECRET

SECRET

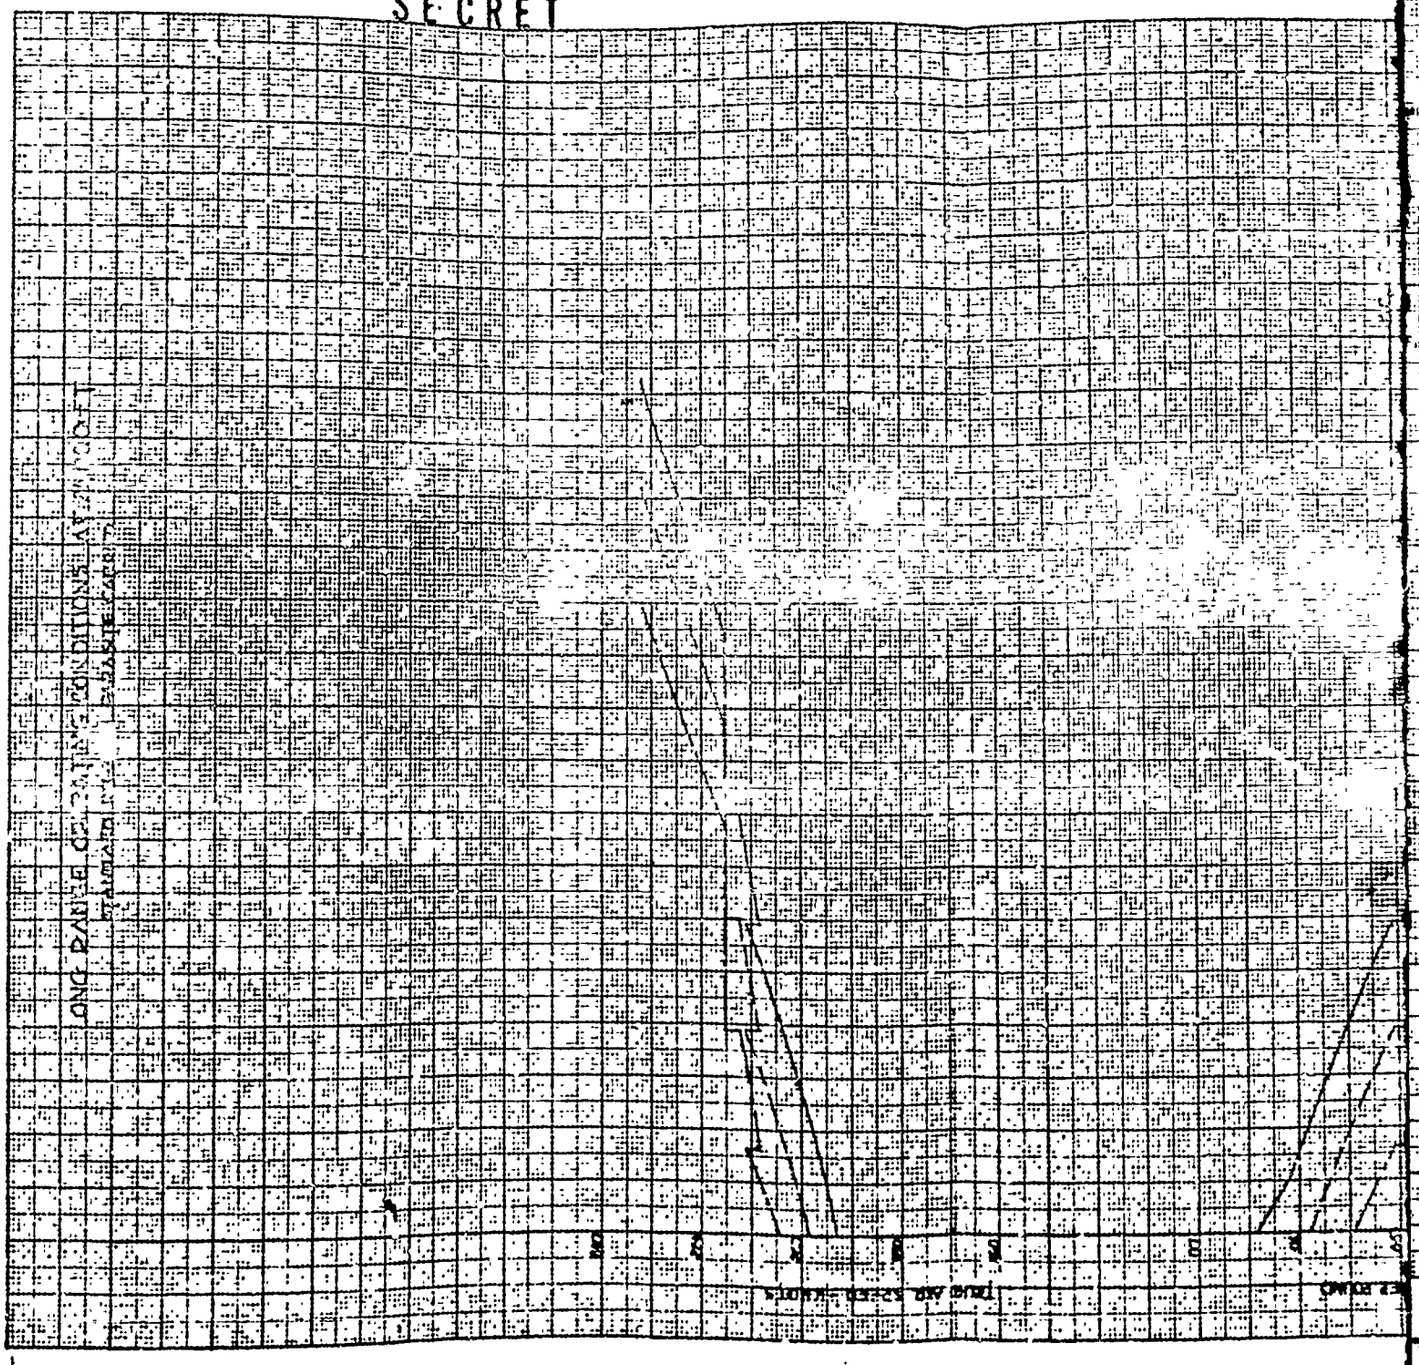

SECRET

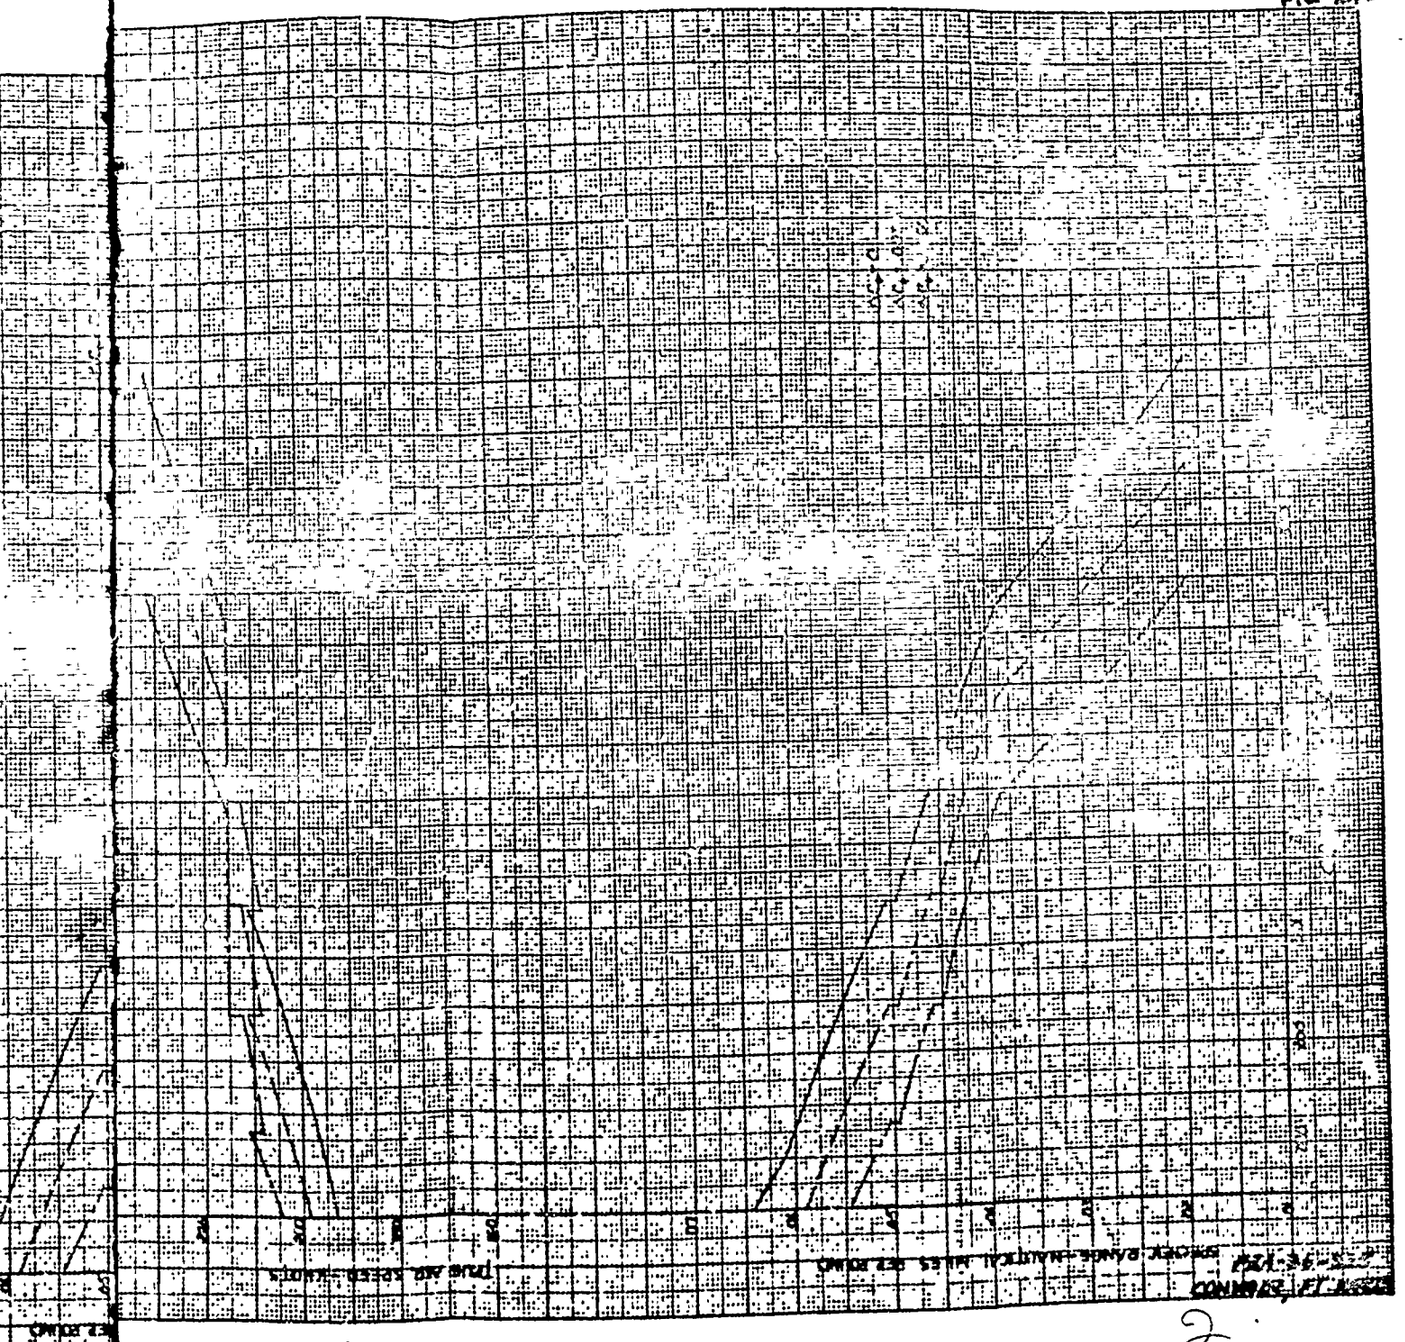
SECRET

Landing Weight

Landing weight of the parasite carrier airplane is the sum of the dry take-off weight (without parasite), + parasite retrieve weight (if the carrier lands with the parasite), + reserve fuel, - ADI fluid consumed weight.


Reserve fuel (for missions where take-off is made with parasite) = .05 [Initial take-off weight - dry take-off weight - parasite launch weight] + fuel allowance for ½ hour cruise at sea level.


Reserve fuel (for missions where parasite is picked up after take-off) =

.05 [Initial take-off weight - dry take-off weight - fuel weight transferred to parasite] + fuel allowance for ½ hour cruise at sea level.

Figures 22 and 23 are to be used to obtain the fuel consumed weight for a ½ hour cruise at sea level. These charts are presented for the B-36D and B-36H airplanes, but may also be used for the RB-36D and RB-36H airplanes, respectively.

To enter the charts, calculate the landing weight of the airplane without considering the fuel consumed in a ½ hour cruise at sea level. Read the fuel consumed value for the calculated landing weight and add it to this weight to obtain the true landing weight.

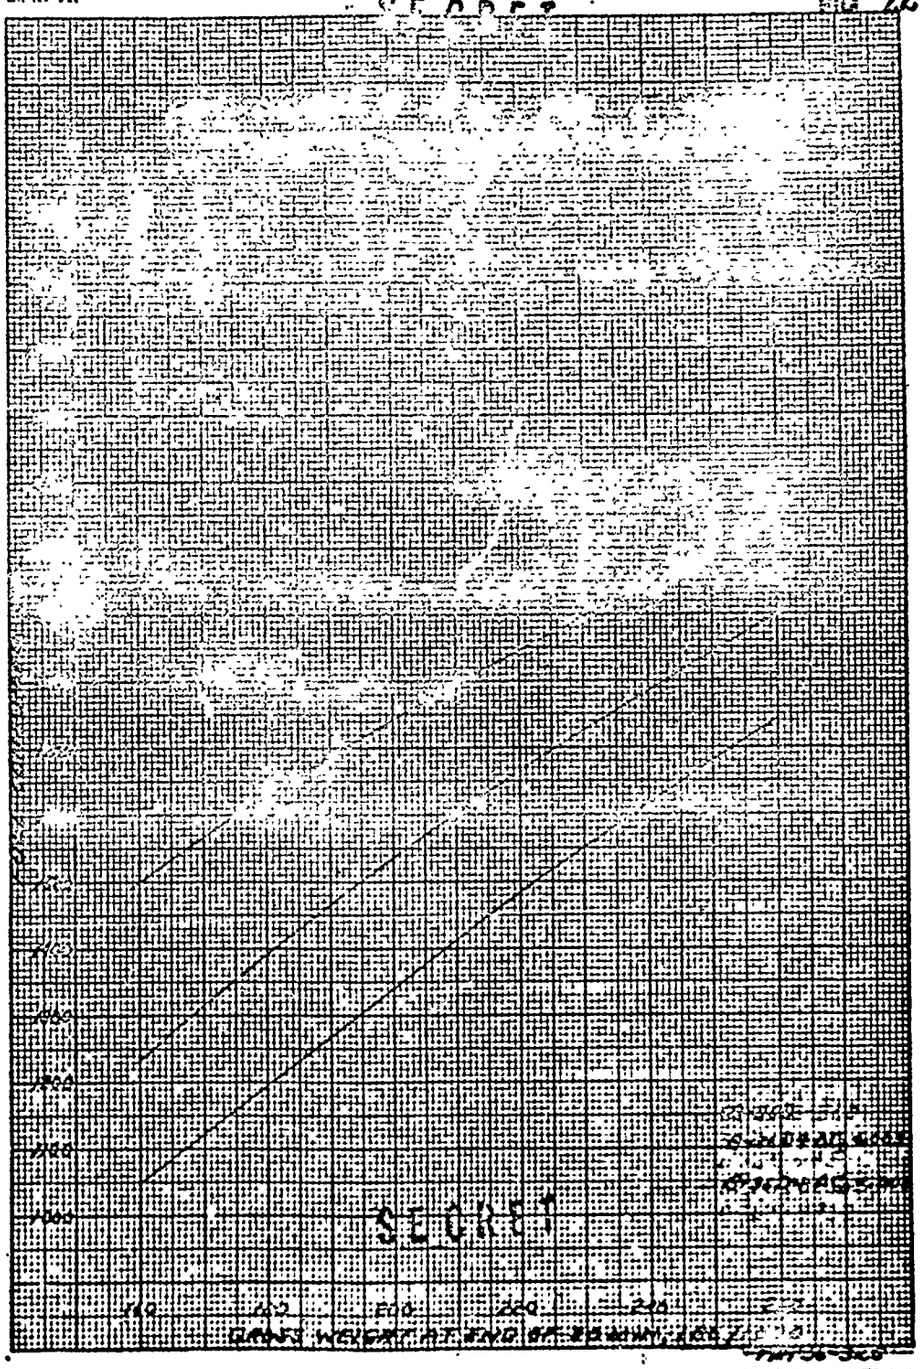

SECRET

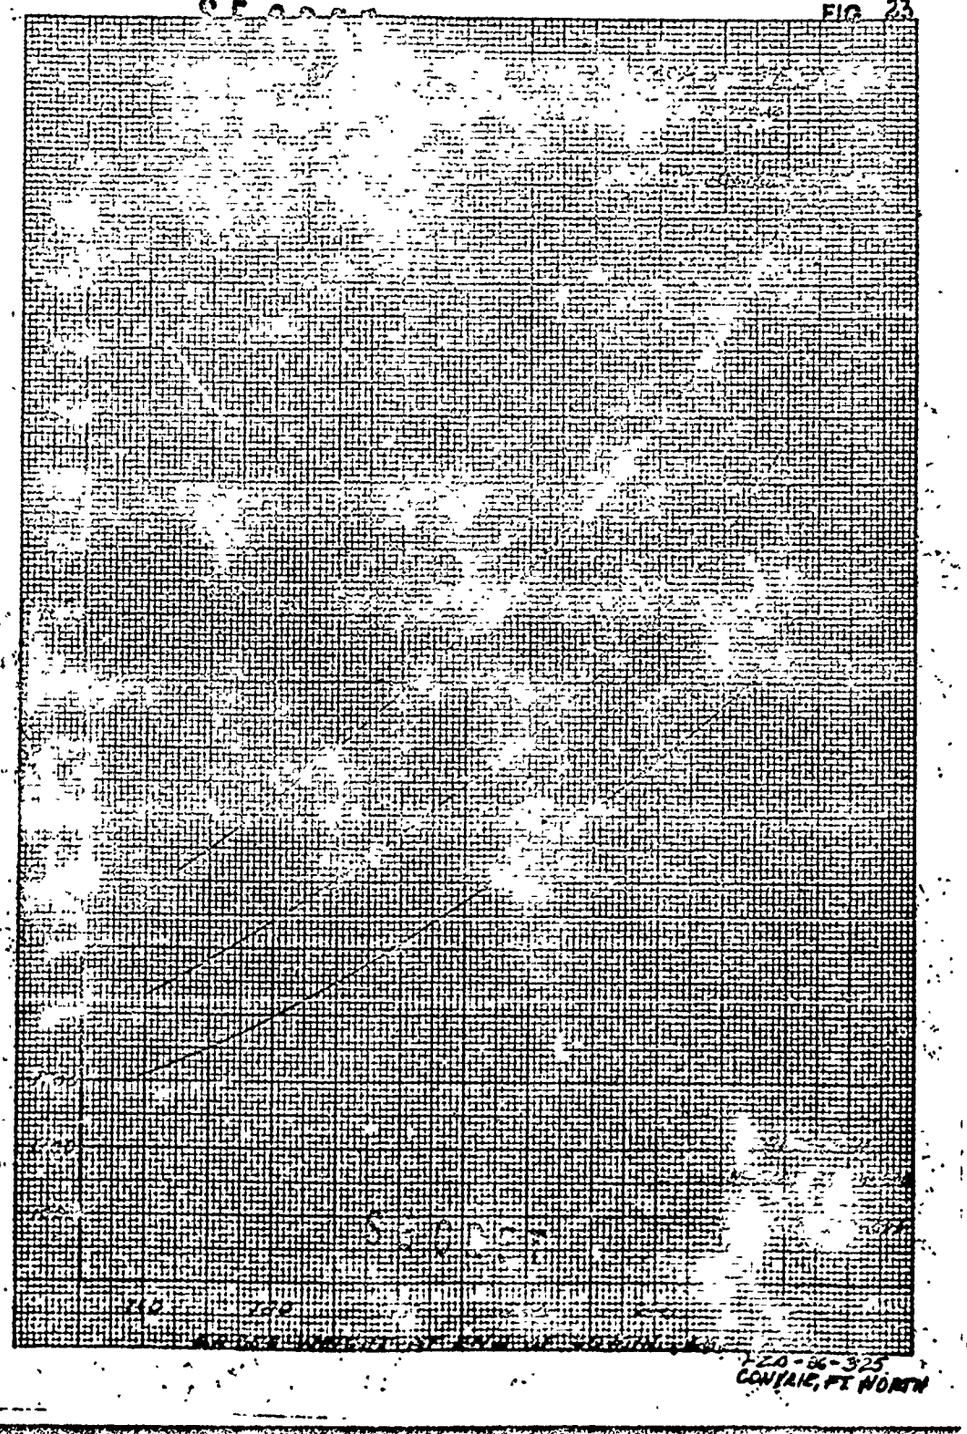

120-66-325
CONTACT, FT NORTH

## Landing Distance

The landing distance curve presented can be used for all B-36 carrier models. The data will be conservative for any drag increase due to a composite configuration.

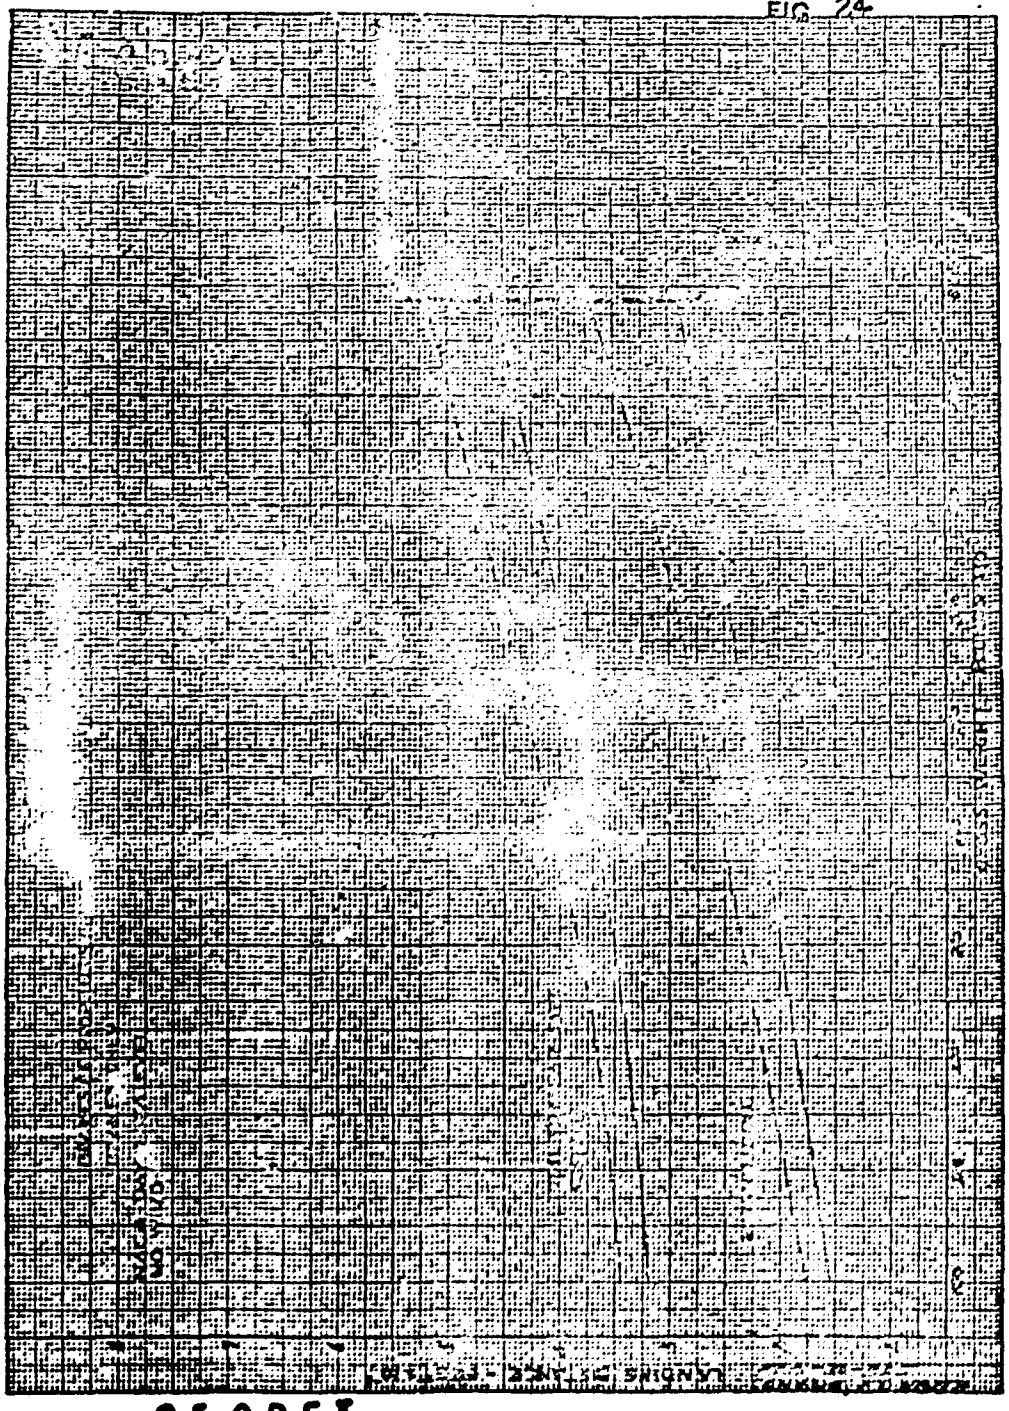

SECRET


## Lift and Drag

The drag polars and $C_L$ vs. $\alpha$ curves are based on Phase IV Flight Tests conducted by the USAF and the Consolidated Vultee Aircraft Corporation on Standard B-36F and B-36D airplanes.

Wetted areas included in the list of airplane physical characteristics may be used to estimate drag increments due to parasite installation.

Use of plug-type bomb bay sealing doors results in a zero $\Delta C_D$ during loiter or cruise without parasite.


SECRET

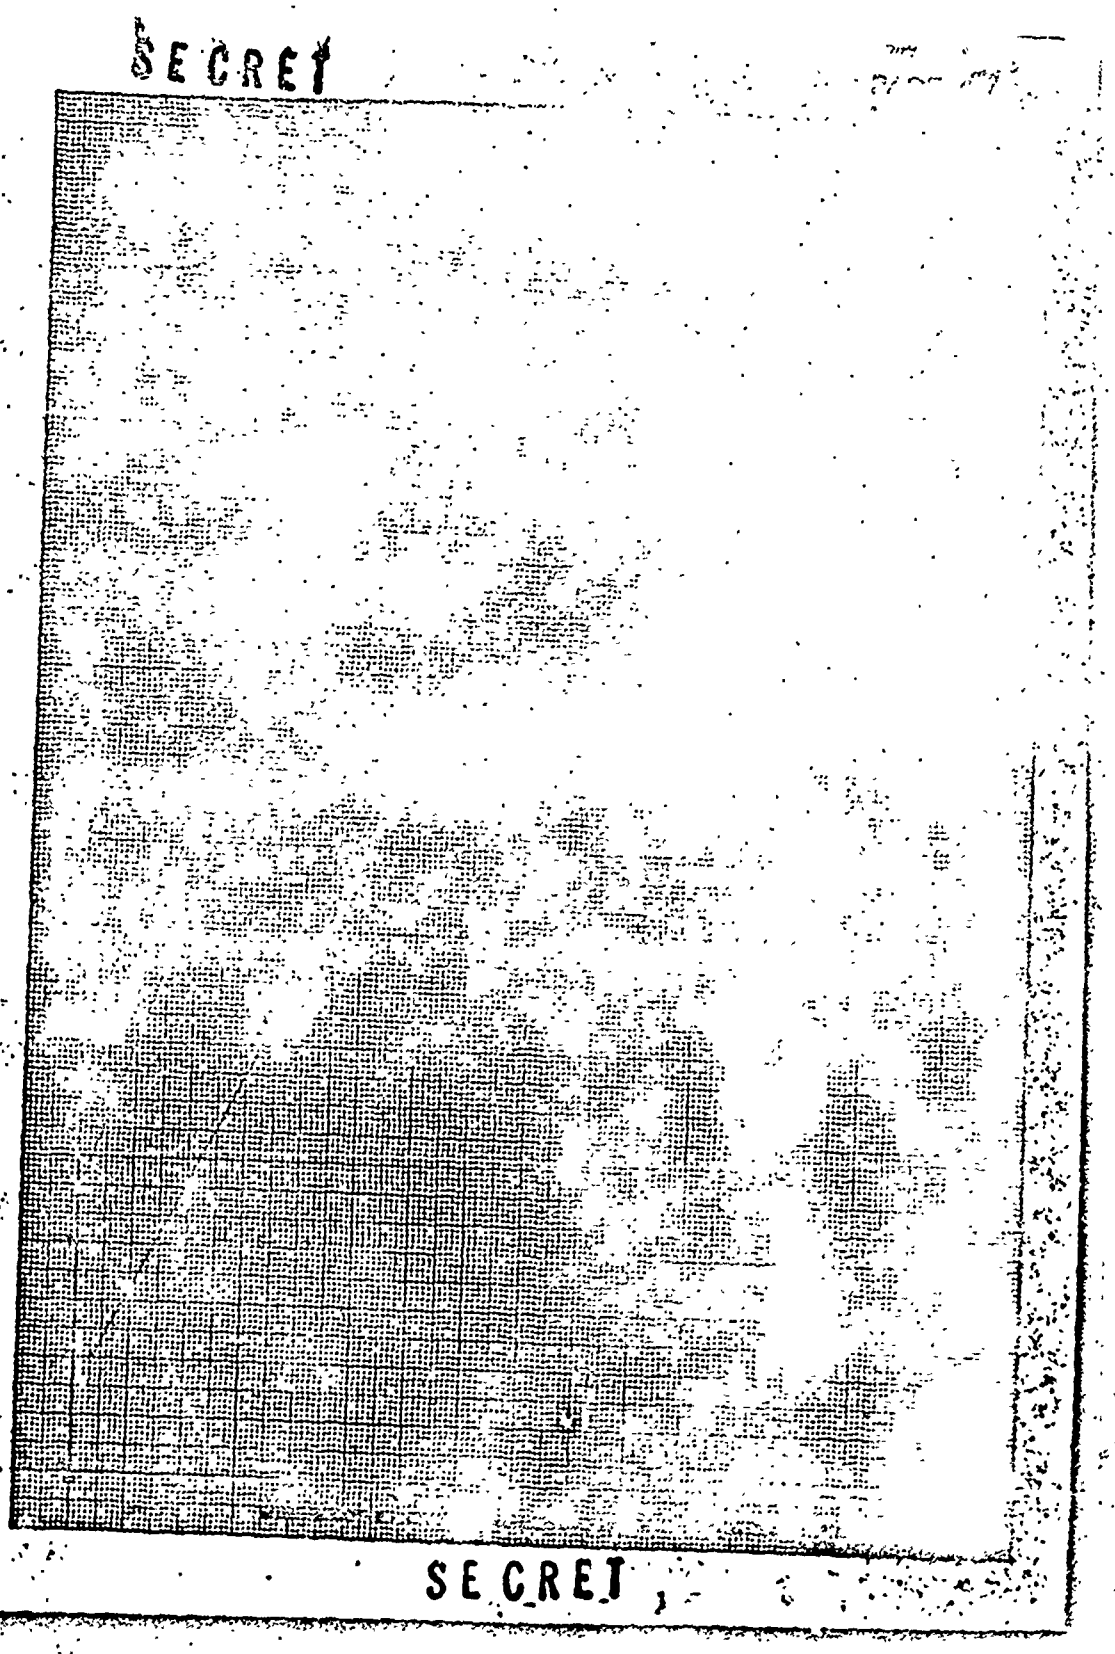

SECRET

SEE [illegible] FACE [illegible]

PAGE 60

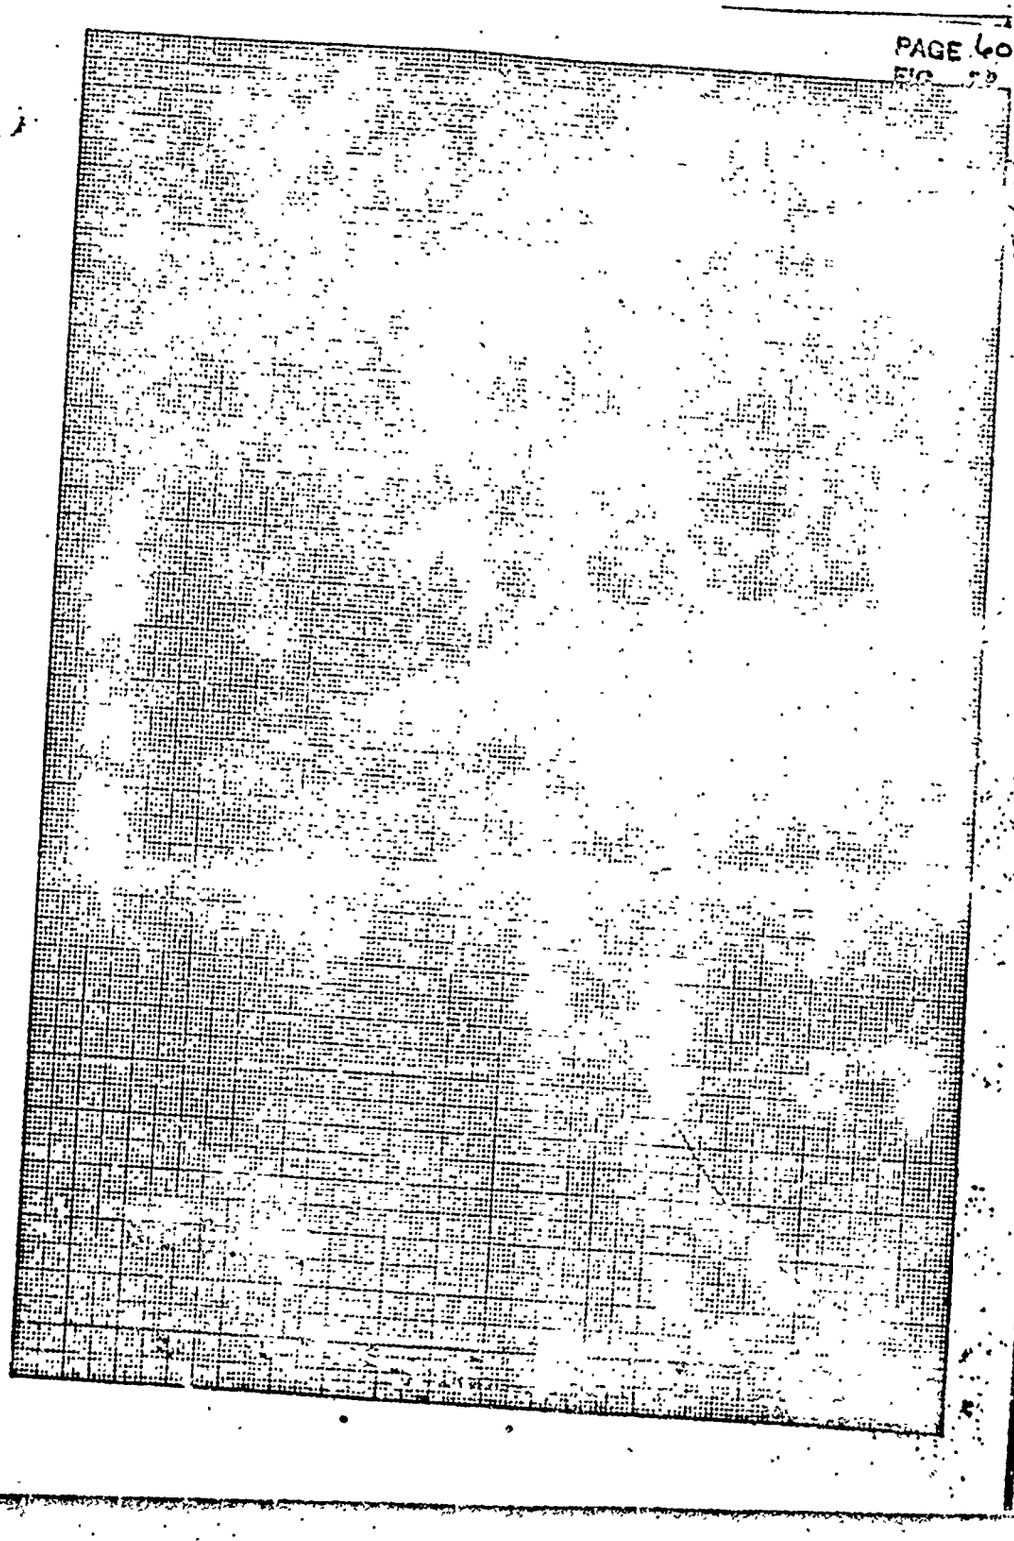

FACSIMILE

## Equivalent Weight Corrections

The following drag corrections can be applied to the Standard B-36 airplane drag polars to obtain the stripped airplane drag polars.

B-36D and RB-36D

$$\Delta C_D = - .00047 - .000865\ C_L^2$$

B-36H and RB-36H

$$\Delta C_D = - .0006 - .0011\ C_L^2$$

The equations for the stripped airplane drag polars are:

B-36D $\quad C_D = .02133 + .0310\ C_L^2$

RB-36D $\quad C_D = .0221 + .0310\ C_L^2$

B-36H $\quad C_D = .0214 + .0330\ C_L^2$

RB-36H $\quad C_D = .0222 + .0330\ C_L^2$

Equivalent weight correction curves can be used to convert the basic performance data of the Standard B-36 Carriers to performance data for stripped B-36 Carriers. These equivalent weight corrections can be obtained from the following relationships:

$$C_D = C_{D_o} + K C_L^2; \quad D = C_D \frac{\rho}{2} SV^2$$

$$THP = \frac{DV}{X}; \quad G.W. = C_L \frac{\rho}{2} SV^2$$

For standard airplane

$$(Y)\ THP_1 = (C_{D_o} + K_1 C_{L_1}^2) \frac{\rho}{2} SV_1^3$$

For a drag change

$$\Delta C_D = \Delta C_{D_o} + \Delta K C_L^2$$

Then

$$(Y)\ THP_2 = \left[C_{D_o} + K_1 C_{L_1}^2 + \left(\Delta C_{D_o} + \Delta K C_{L_2}^2\right)\right] \frac{\rho}{2} S V_2^3$$

Let $K_1 + \Delta K = K_2$

For stripped airplane

$$(Y)\ THP_2 = \left[C_{D_o} + K_2 C_{L_2}^2 + \Delta C_{D_o}\right] \frac{\rho}{2} S V_2^3$$

Let $THP_1 = THP_2$ and $V_1 = V_2$

Then $\left[C_{D_o} + K_1 C_{L_1}^2\right] \frac{\rho}{2} S V_1^3 = \left[C_{D_o} + K_2 C_{L_2}^2 + \Delta C_{D_o}\right] \frac{\rho}{2} S V_2^3$

$$C_{D_o} + K_1 C_{L_1}^2 = C_{D_o} + K_2 C_{L_2} + \Delta C_{D_o}$$

$$K_1 C_{L_1}^2 - K_2 C_{L_2}^2 = \Delta C_{D_o}$$

But

$$GW = C_L \frac{\rho}{2} S V^2 \quad \text{or} \quad GW^2 = C_L^2 \left(\frac{\rho}{2} S V^2\right)^2$$

$$K_1 GW_1^2 - K_2 GW_2^2 = \pm \Delta C_{D_o} \left(\frac{\rho}{2} S V^2\right)^2$$

$$GW_1 = \sqrt{\frac{K_2}{K_1} GW_2^2 + \frac{\Delta C_{D_o}}{K_1} \left(\frac{\rho}{2} S V^2\right)^2}$$

SAMPLE MISSIONS

Basic Radius Mission

Standard RB-36D carrier airplane

370,000 pounds take-off gross weight (composite)

40,000 pounds parasite launch weight

20,000 pounds parasite retrieve weight

$\Delta C_D$ = .0030 added drag to RB-36D in composite configuration

Parasite mission time = 1 hour

All fuel consumptions are calculated 5% conservative

A standard RB-36D carrier is to take-off from its home base carrying a fighter weighing 40,000 pounds. The composite take-off weight is to be 370,000 pounds. The RB-36D composite configuration cruises at optimum altitude to a point, such that maximum radius may be obtained, where a climb is made to 25,000 feet. The parasite is launched immediately after the climb to 25,000 feet is completed and the carrier loiters at long range cruise at the launch altitude until the fighter mission is completed. After retrieving the parasite fighter the composite configuration descends to the optimum altitude flight path and cruises back to the home base.

Following the mission graphically (see Figure 30) the composite take-off gross weight is 370,000 pounds. The 3550 pounds allowance for warm-up, taxi, and take-off reduces the gross weight to 366,450 (A). From figure 12 the normal rated power climb to optimum altitude is completed at 363,000 pounds gross weight, a time to climb of .10 hour and a range of 15 nautical miles (B). A range and time integration of Figure 15 established B-F for the composite configuration.

Long range climbs are made from optimum altitude to 25,000 feet at points C, D, and E along B-F. Line G-I is then the locus of points for the end of long range climb from optimum altitude to 25,000 feet for the composite configuration.

Since the parasite is launched immediately upon arrival at 25,000 feet, K-M can be established as the locus of carrier weights after launch by reducing the weights at G, H, and I by 40,000 pounds with no range gain and obtaining the points K, L and M. At the gross weights at points K, L, and M, the fuel consumed in one hour loiter plus 15 minutes for fighter retrieve is subtracted and the new gross weights plotted at points O, P, and Q, respectively. O-Q is then the locus of points for the end of loiter. A locus of points after retrieve, S-U, is then found by adding 20,000 pounds for the fighter retriever weight to the points O, P and Q to obtain the points S, T, and U.

Before the total mission radius can be established it is necessary to determine the landing gross weight and integrate from this weight along the flight path to intersect S-U.

Landing gross weight is calculated as follows:

| | | |
|---|---|---|
| Dry take-off | 189,721 | pounds |
| ADI fluid used | - 7,300 | " |
| Reserve fuel | 8,664 | " |
| Parasite retrieve weight | 20,000 | " |
| Landing weight | 218,085 | " |

Reserve fuel is calculated as 5% of the total fuel consumed which is the difference between the take-off gross weight (370,000 pounds) and the sum of the dry take-off gross weight and the parasite launch weight, (189,721 + 40,000 = 229,721 pounds). Then .05 (370,000 - 229,721) = 7,014 pounds.

From the landing gross weight of 218,085 pounds (x), a range and time integration for the composite configuration ($\Delta C_D$ = .0030) of figure 15 establishes X - W.

The intersection of X-W with S-U establishes the total mission radius at point V as 2100 nautical miles, and since no range is gained from the time of parasite launch to parasite retrieve, the points J, K, and R are determined respectively on the end of climb line G-I, the launch line K-M, and the loiter line O-Q. Using the gross weight at the end of climb to 25,000 feet (J), the beginning of climb from the optimum flight path may be determined from Figure 12. Subsequently the corresponding points on the time integration line may be determined.

Post Strike Mission

The calculations for the post strike mission (shown in dashed lines on the graph) will be very nearly the same as the above; the only difference being in the landing line and the exclusion of loiter time.


For the post strike mission the composite configuration has the same take-off weight of 370,000 pounds and flies along the same optimum altitude flight path to a point where a climb is again begun

to 25,000 feet. The parasite is launched immediately upon arrival at 25,000 feet and the RB-36D returns to its home base alone with no time lost in loiter. The difference in landing weight of these two missions is the 20,000 pounds retrieve weight of the fighter. For the post strike mission the landing weight is 198,085 pounds.

Following the mission graphically, the climb to 5,000 feet and cruise at optimum altitude is again made along A-B-F in Figure 30. Line G-I is again the end of climb line and K-M is again the launch line. Starting at the landing weight of 198,085 pounds an integration is again made along the flight path to intersect K-M. This integration must be for the RB-36D alone.

The intersection of X'-W' with K-M establishes the total mission radius at point M' as 2336 nautical miles. Other points on the mission may be determined in the same manner as previously.


SECRET

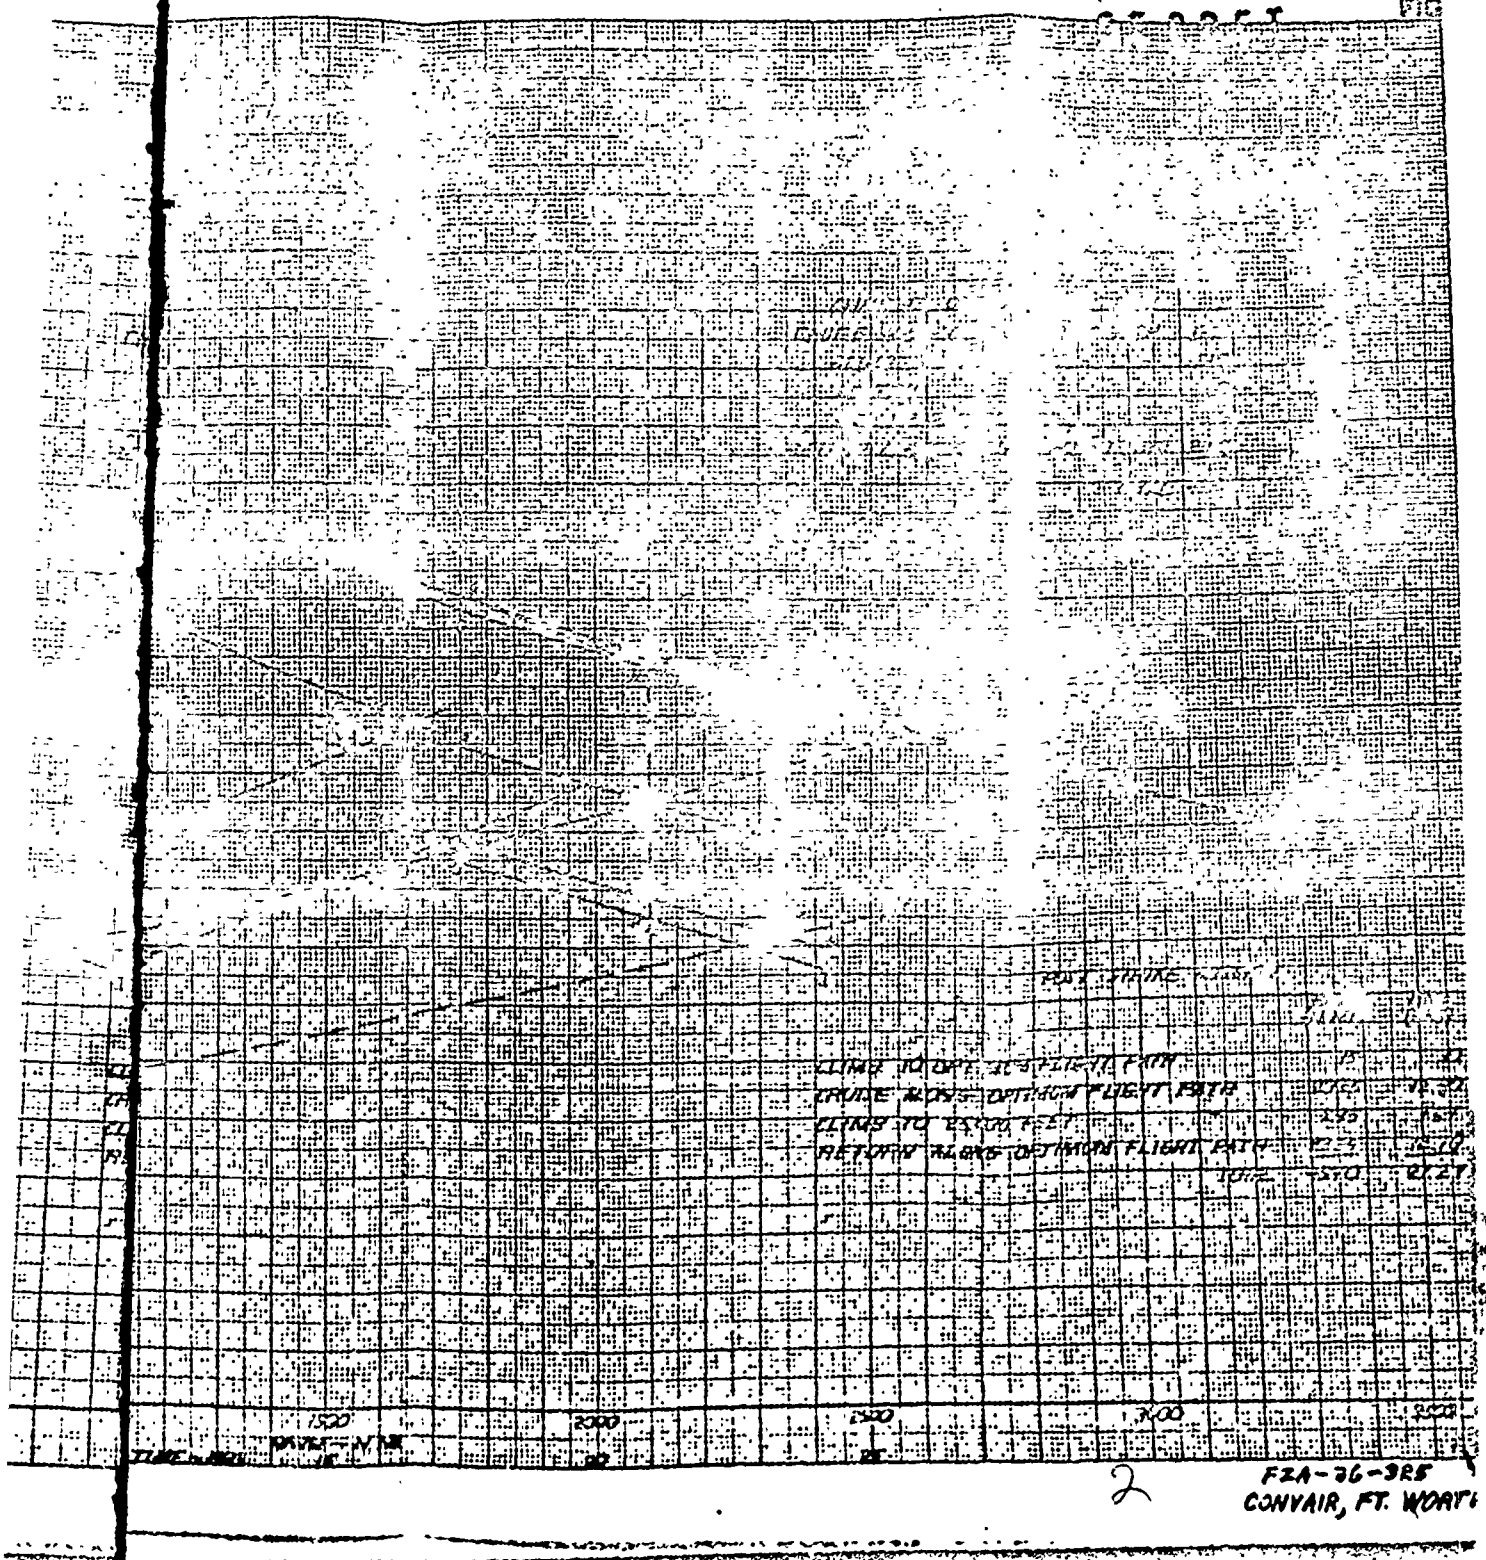




FZA-36-385
CONVAIR, FT. WORTH

FZA-36-985
CONVAIR, FT. WORTH

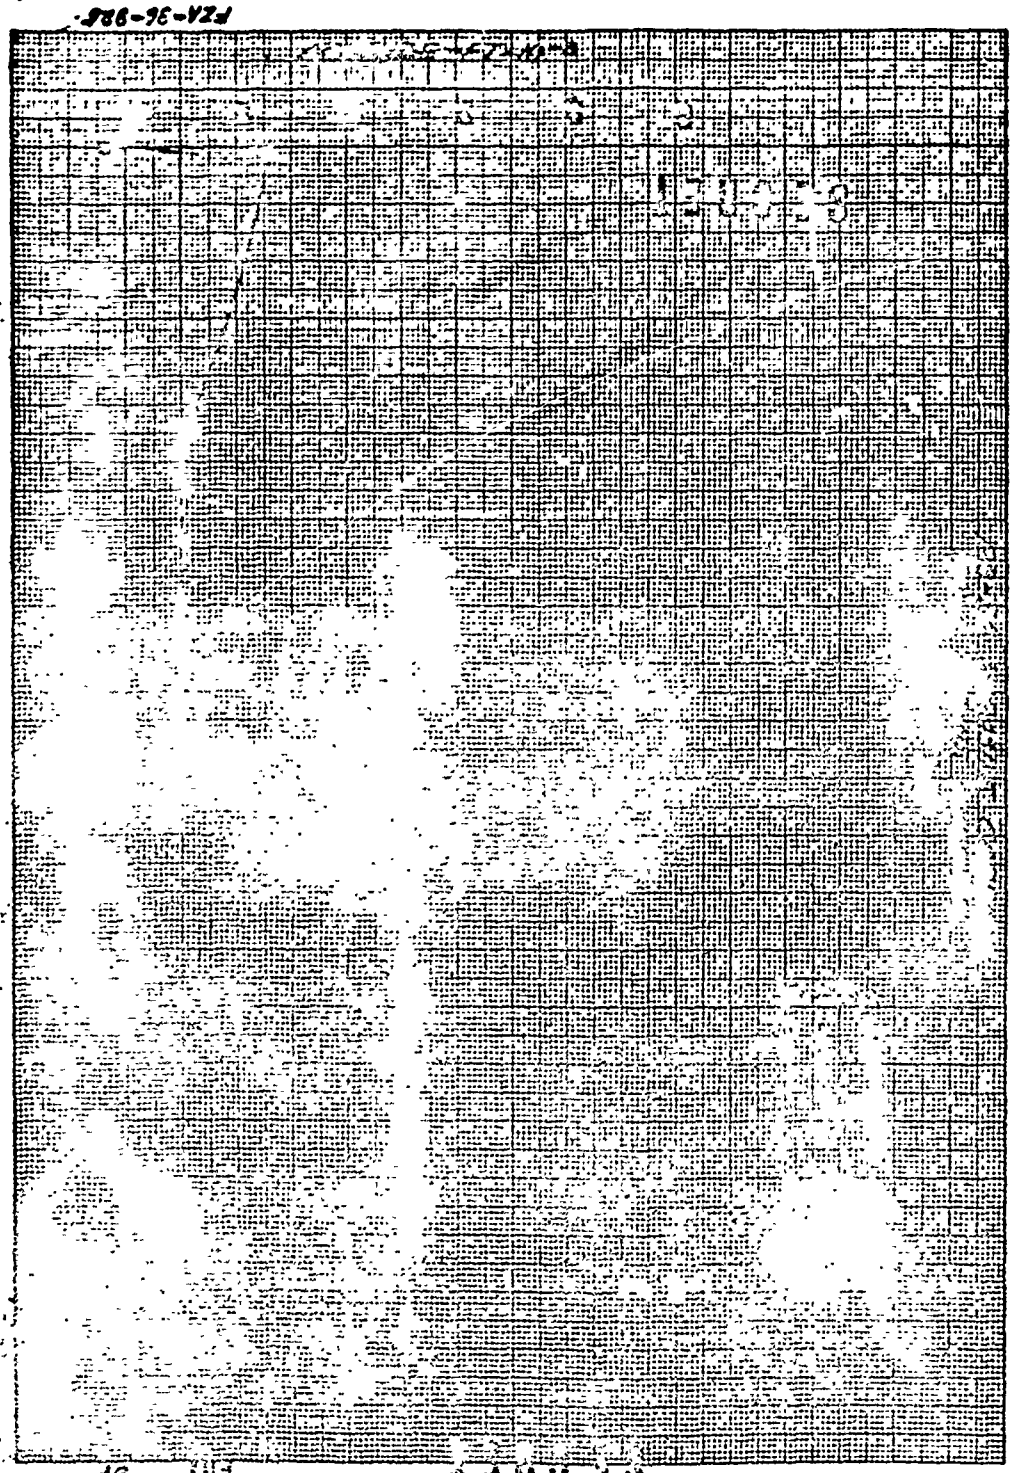

D

D

K&E KEUFFEL & ESSER CO. MADE IN U.S.A.
46-1320

PAGE 69
ETC 31

Advance Base Pick-Up Mission

Standard RB-36D airplane,
370,000 pounds take-off gross weight,
35,000 pounds parasite pick-up weight,
40,000 pounds parasite launch weight,
20,000 pounds parasite retrieve weight,
$\Delta C_p$ = .0030 (added drag to a standard RB-36D for a composite configuration),
1 hour parasite fighter mission time,
All fuel consumption calculated 5% conservative

A standard carrier RB-36D is to take off from its home base at a gross weight of 370,000 pounds. After the initial climb to optimum altitude the carrier cruises to the advance base to pick up the parasite fighter. After parasite pick-up the composite configuration flies at optimum altitude and starts a long range climb so as to reach 25,000 feet at the parasite launch site. Before launching the parasite fighter it is refueled to its original take-off gross weight. The parasite is launched immediately after the climb to 25,000 feet is completed, and the carrier loiters at long range cruise at the launch altitude until the fighter mission is completed. After retrieving the parasite fighter the composite configuration descends to the optimum altitude flight path and cruises back to the fighter pick-up base. The fighter is released above the advance base at its retrieve weight, and the carrier returns to its home base.

Following the mission graphically (figure 32 ) the carrier total take-off gross weight is 370,000 pounds (A). The 3800 pound allowance for warm-up, taxi, and take-off reduces the gross weight to 366,200 pounds (B). From figure 17 the normal rated power climb to optimum altitude (5,000 feet) is completed at 363,000 pounds gross weight, a time to climb of .10 hr. and a range of 18 nautical miles (C). A range and time integration from figure 16 establishes the range line C-D for the carrier. Line E-F is a loiter of 15 minutes at optimum altitude long range operating conditions above the advance base. Since the composite gross weight cannot exceed 370,000 pounds, the 35,000 pound addition of the parasite has to be made at G on line E-F to establish H at 370,000 pounds. This establishes the pick-up base distance of 810 nautical miles away from the carrier initial take-off point. The carrier mission time for this distance is 5 hours. Long range cruise is continued from H to I in a composite configuration. The distance H-I is obtained from an integration of the nautical miles-per-pound versus gross weight curve, labeled $\Delta C_D$ = .0030, figure 15 . Line K-L is a locus of long range climbs to 25,000 feet (calculated from figure 19 ) from the optimum altitude flight path (H-I) for the composite configuration.

Since the parasite is launched immediately upon arrival at 25,000 feet, the locus of carrie gross weights versus range may be established as line N-O (a 40,000 pound loss in gross weight with no range gain). A 1 hour loiter plus 15 minutes for fighter retrieve time at long range operating conditions at 25,000 feet establishes the locus of carrier gross weights versus range represented by line Q-R. A fighter retrieve weight of 20,000 pounds added to line Q-R establishes the composite configuration weights after retrieve as line T-U.

Before the total mission radius can be established it is necessary to determine the landing gross weight and work backwards along the flight path to intersect the line T-U.

The landing gross weight is comprised of the following weights:

| | | |
|---|---|---|
| Dry take-off | = | 189,721 pounds |
| ADI fluid used | = | -300 pounds |
| Reserve fuel | = | 10,299 pounds |
| Total Carrier Landing Weight | = | 199,720 pounds |

From the landing gross weight of 199,720 pounds (Z) a range and time integration for the carrier airplane ( $\Delta C_p = 0$ ) of figure 14 establishes the lines Z-Y. Since the retrieved parasite has to be released above its home base the point X can be determined as a 20,000 pound increment above line Z-Y at the same range as determined by G-H. The lines X-W are a time and range integration of the composite configuration (from figure 15 ).

The intersection of X-W with T-U establishes the total mission radius at point V as 2571 nautical miles; and since no range is gained from the time of parasite launch to parasite retrieve the points M, P, and S are determined on the end of climb line K-L, the launch line N-O, and the loiter line Q-R, respectively.

Using the gross weight at end of climb to 25,000 feet (M), the beginning of climb from the optimum altitude flight path may be determined at (J) from figure 12 . Subsequently, the corresponding points on the time integration line may be determined.

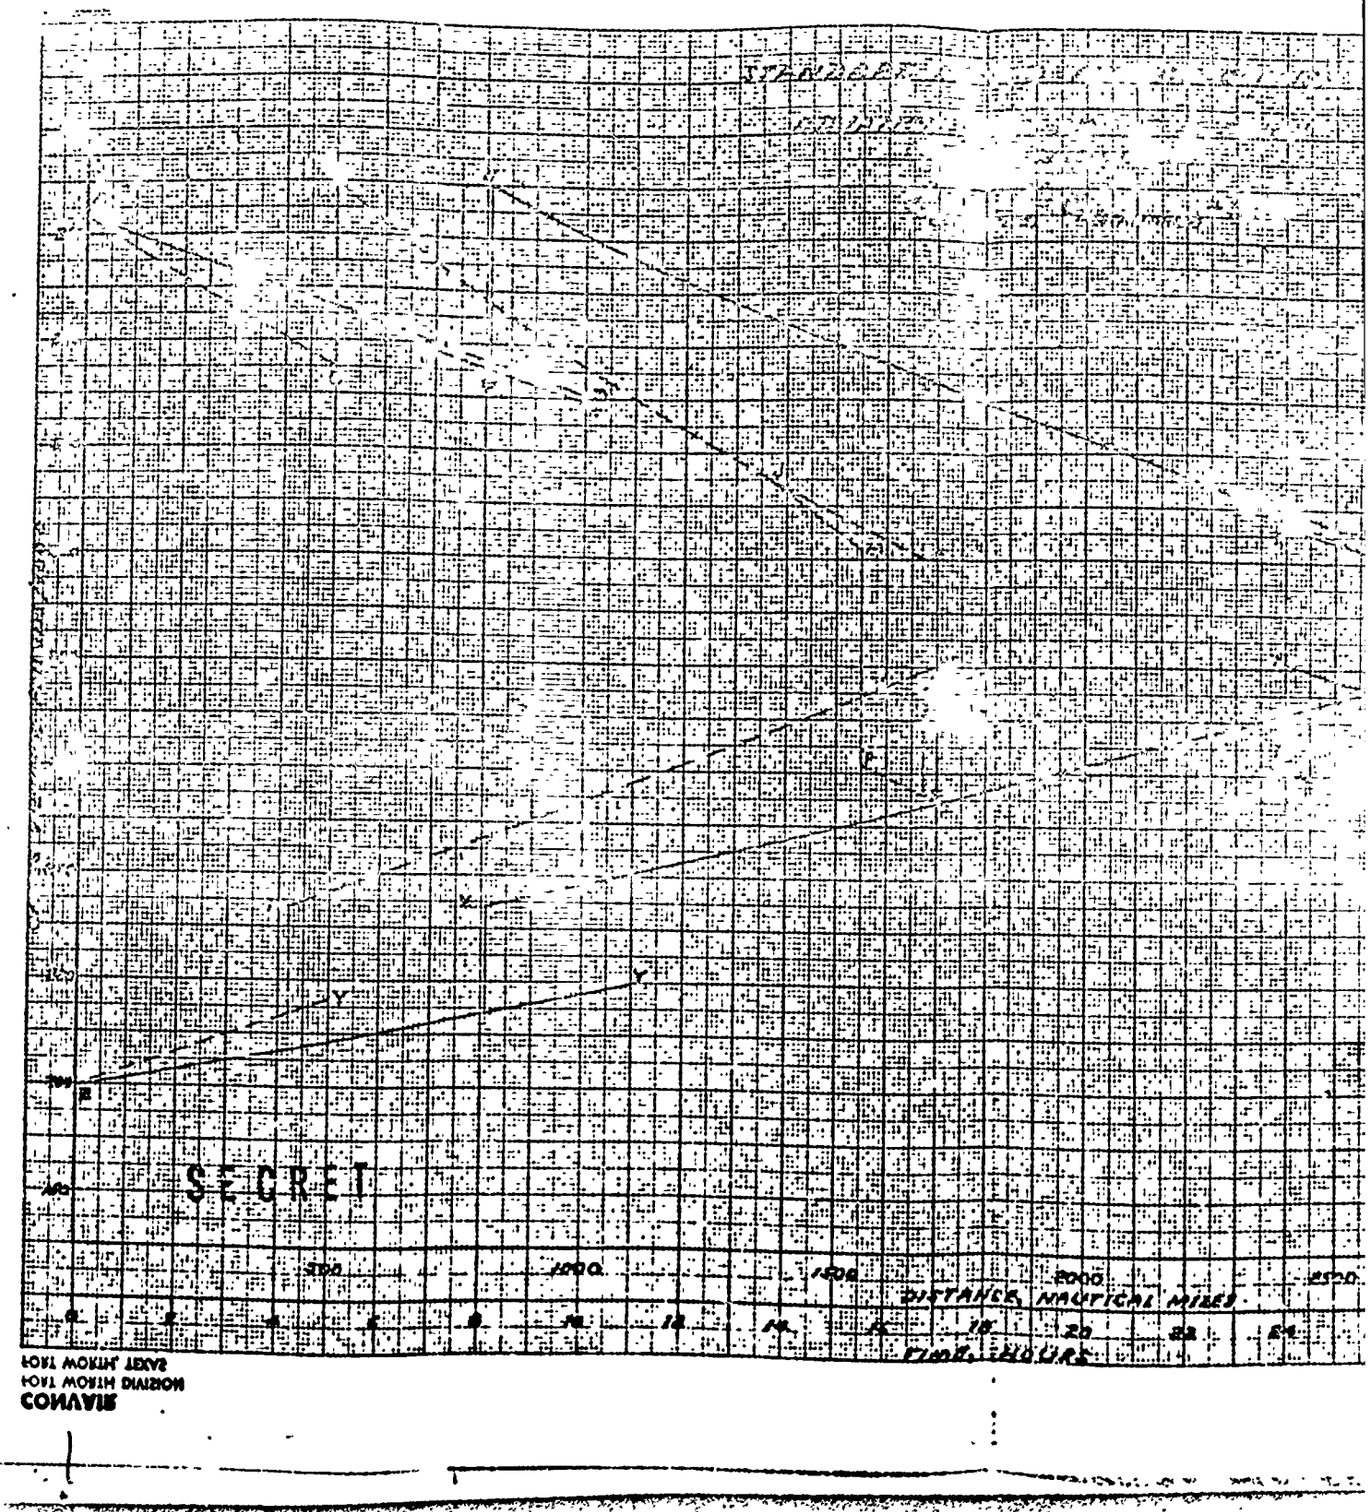
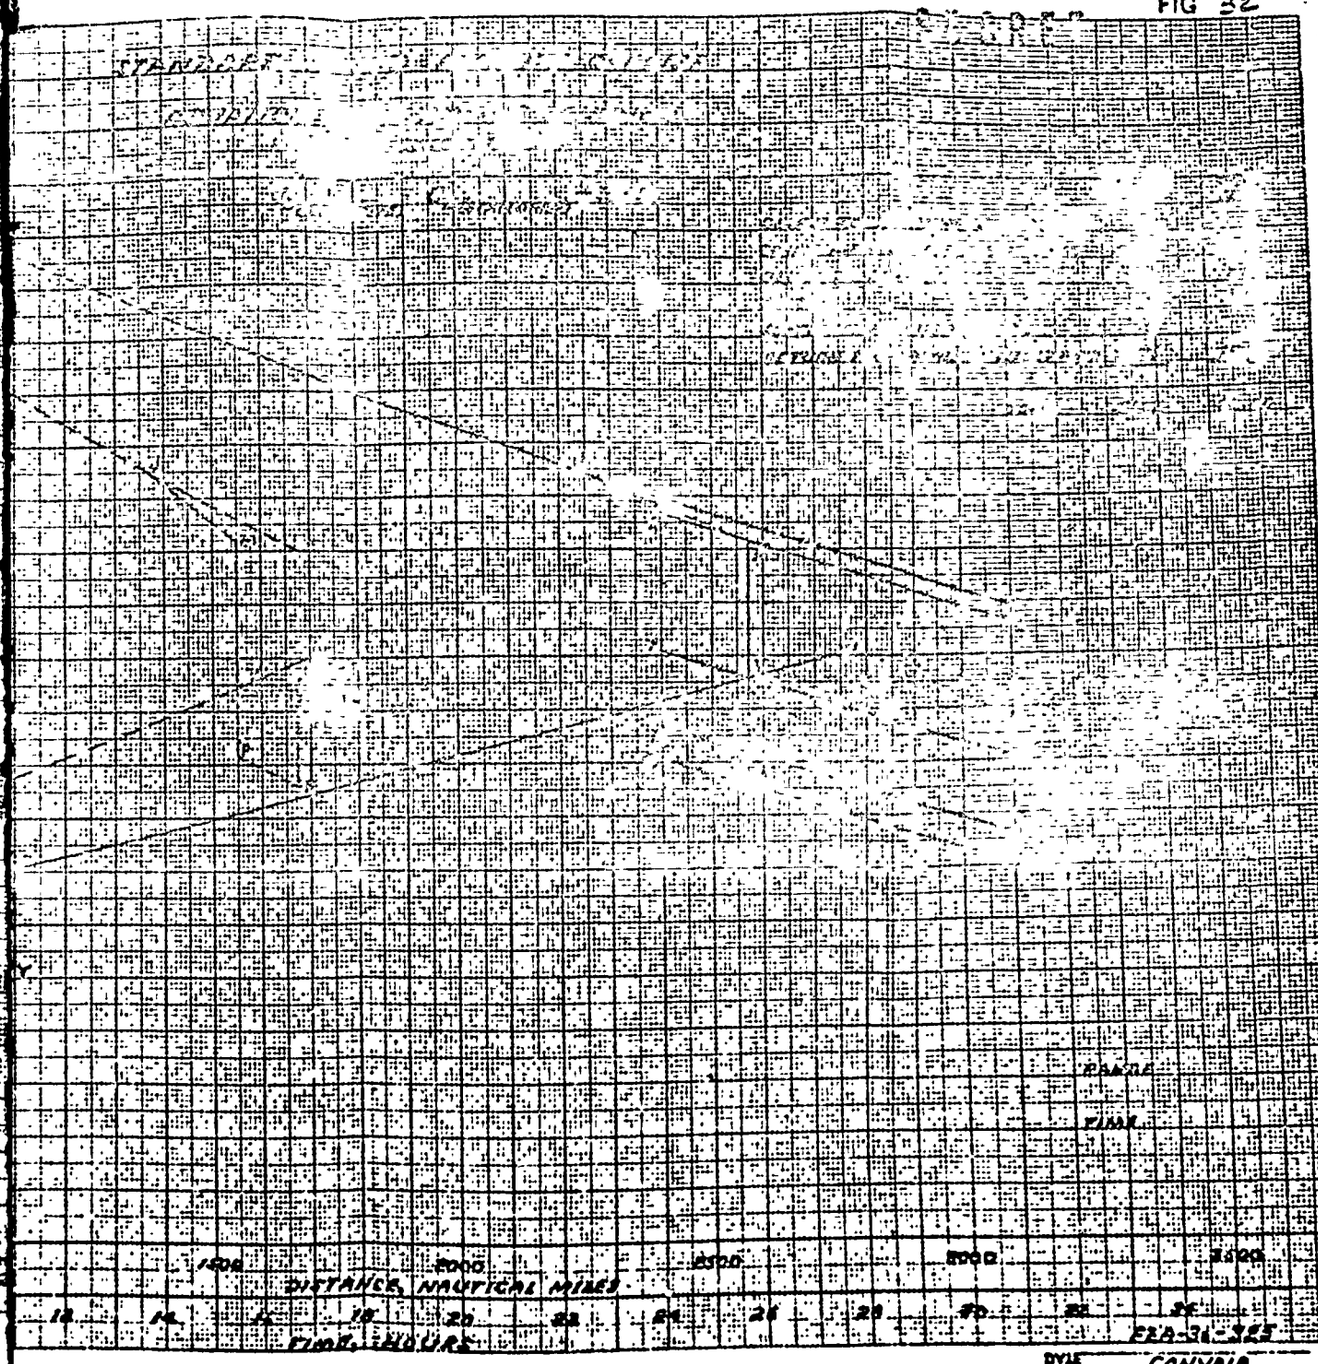

SECRET
DISTANCE, NAUTICAL MILES
FLIGHT HOURS

FIG 32


DISTANCE, NAUTICAL MILES
FLIGHT HOURS
DYLE
STROKE NO
AVGS
CONVAIR
FT WORTH, TEXAS
FZA-31-325
2

CONFIDENTIAL

## SECTION III

## WEIGHT & BALANCE DATA

This section contains weights and C. G. Stations (relative to Carrier) for the four models of the B-36 which are considered in this report for carrier performance. All models have identical fuel and oil capacities and tanks, and this information is listed separately.

The BASIC WEIGHT of the airplane as used in this report is defined as the weight of the carrier ready for flight, but not including fuel, injection water, oil, crew, or parasite airplane. Trapped fuel and oil is carried in addition to fuel tank capacities listed.

The weights of the trapeze mechanism and provisions, existing parasite, and bomb bay tank for parasite refueling are also included in this Section.

CONFIDENTIAL

ANALYSIS.
PREPARED BY.
CHECKED BY.
REVISED BY.

CONVAIR
FORT WORTH DIVISION
FORT WORTH, TEXAS

PAGE 75
REPORT NO. FZA-36-325
MODEL
DATE 4 August 195

CONFIDENTIAL

B-36D Carrier

| | Standard | Sta. of C. G. | Stripped | Sta. of C. G. |
|---|---|---|---|---|
| Weight Empty | 161,371 lbs | | 151,771 | |
| Parasite Provisions | 4107 | 68.9 ft. | 4107 | 68.9 ft. |
| Landing Gear Modifications for 370,000 Lb. Take-off | 231 | | 231 | |
| Material Substitution | 275 | | 275 | |
| Weight Empty Items not part of Basic | -12 | | -12 | |
| Weight Empty (Carrier | 165,972 | 78.03 ft. | 156,372 | 78.57 ft. |
| Trapped Fuel and Oil | 1492 | | 1492 | |
| Propelier Hub Oil | 102 | | 102 | |
| ADI fluid | 405 | | 405 | |
| Guns | 1803 | 81.82 ft. | 214 | 162.1 ft. |
| Ammunition | 5796 | 84.79 ft. | 756 | 157.3 ft. |
| Dry Ice | 135 | | | |
| Food and Water | 358 | | 155 | |
| Miscellaneous | 208 | | 208 | |
| Bomb Bay Tank* | 405 | 89.66 ft. | 405 | 89.66 ft. |
| BASIC WEIGHT (Carrier | 176,676 | 78.29 ft. | 160,109 | 79.10 ft. |
| Oil | 4650 | | 4650 | |

CONFIDENTIAL

*Bomb bay tank carried only on ferry and separate take-off mission

DEPT. 6 FW 444 12-52 UTILITY REPORT SHEET

CONFIDENTIAL

B-36D Airplane (Cont'd)

| | Standard | Sta. of C. G. | Stripped | Sta. of C. G. |
|---|---|---|---|---|
| Crew | 2700 | 71.28 | 2025 | 71.28 |
| Fuel Load | 185,974 | | 203,216 | |
| MAXIMUM TAKE-OFF WEIGHT | **370,000 | 72.71to79.03ft. | **370,000 | 72.71to 79.03ft. |
| MAXIMUM LANDING WEIGHT | ***357,500 | 72.71to79.03ft. | ***357,500 | 72.71to 79.03ft. |

** Limited by Strength (Wing and Landing Gear), Load factor = 2.0

*** Limited by Strength (Landing Gear)

CONFIDENTIAL

CONFIDENTIAL

RB-36D Carrier

| | Standard | Sta. of C. G. | Stripped | Sta. of C. G. |
|---|---|---|---|---|
| Weight Empty | 164,798 | | 155,106 | |
| Parasite Provisions | 4107 | 68.9 ft. | 4107 | 68.9 ft. |
| Landing Gear Modification for 370,000 lb. Take-off | 231 | | 231 | |
| Material Substitution | 253 | | 253 | |
| Weight Empty Items not part of Basic Weight | -48 | | -48 | |
| WEIGHT EMPTY (Carrier) | 169,341 | 77.72 ft. | 159,649 | 78.26 ft. |
| Trapped Fuel and Oil | 1492 | | 1492 | |
| Propeller Hub Oil | 102 | | 102 | |
| ADI Fluid | 405 | | 405 | |
| Guns | 1903 | 81.82 ft. | 214 | 162.1 ft. |
| Ammunition | 5796 | 84.79 ft. | 756 | 157.3 ft. |
| Dry Ice | 135 | | | |
| Feed and Water | 358 | | 155 | |
| Miscellaneous | 126 | | 126 | |
| Bomb Bay Tank* | 405 | 89.66 ft. | 405 | 89.66 ft. |

*Bomb Bay Tank carried only on ferry and apparate take-off missions.

CONFIDENTIAL

CONFIDENTIAL

RB-36D Carrier (Cont'd)

| | Standard | Sta. of C. G. | Stripped | Sta. of C. G. |
|---|---|---|---|---|
| BASIC WEIGHT (Carrier) | 179,963 | 78.02 ft. | 163,304 | 78.82 ft. |
| Cameras | 1389 | 40.24 ft. | 1389 | |
| Crew (12-9) | 2700 | 57.32 ft. | 2025 | 57.32 ft. |
| Oil | 4650 | | 4650 | |
| Fuel Load | 181,298 | | 198,632 | |
| MAXIMUM TAKE-OFF WEIGHT | **370,000 | 72.71 to 79.03 ft. | **370,000 | 72.71 to 79.03 ft. |
| MAXIMUM LANDING WEIGHT | ***357,500 | 72.71 to 79.03 ft. | ***357,500 | 72.71 to 79.03 ft. |

** Limited by Strength (Wing and Landing Gear), Load factor = 2.0

*** Limited by Strength (Landing Gear)

CONFIDENTIAL

ANALYSIS
PREPARED BY
CHECKED BY
REVISED BY

CONVAIR
FORT WORTH DIVISION
FORT WORTH, TEXAS

PAGE 79
REPORT NO. FZS-36-325
MODEL
DATE 4 August 1954

CONFIDENTIAL

B-36 H Carrier

| | Standard | Sta. of C. G. | Stripped | Sta. of C. G. |
|---|---|---|---|---|
| Weight Empty | 168,487 | | 160,094 | |
| Parasite Provisions | 4107 | 68.9ft. | 4107 | 68.9 ft. |
| Landing Gear Modifications for 370,000 lb. Take-off | 231 | | 231 | |
| Material Substitution | 345 | | 345 | |
| Weight Empty Items not part of Basic Weight | -14 | | -14 | |
| WEIGHT EMPTY (Carrier) | 173,156 | 78.35 ft. | 164,763 | 78.[illegible] ft. |
| Trapped Fuel and Oil | 1492 | | 1492 | |
| Propeller Hub Oil | 102 | | 102 | |
| ADIFluid | 405 | | 405 | |
| Guns | 1803 | 81.82ft. | 214 | 162.1 ft. |
| Ammunition | 5796 | 84.79 ft. | 756 | 157.3 ft. |
| Dry Ice | 135 | | | |
| Crew Comfort | 565 | | 135 | |
| Food & Water | 358 | | 155 | |
| Miscellaneous | 162 | | 162 | |
| Chaff Dispenser | 278 | 137.5 ft. | 263 | 137.5 |
| Bomb Bay Tank* | 405 | | 405 | |

* Bomb Bay Tank carried only on ferry and separate take-off missions

SEPT. 4 [illegible] UTILITY REPORT SHEET

CONFIDENTIAL

ANALYSIS
PREPARED BY
CHECKED BY
REVISED BY

CONVAIR
FORT WORTH DIVISION
FORT WORTH, TEXAS

PAGE
REPORT NO 25-325
MODEL
DATE 1 January 1951

CONFIDENTIAL

B-36H (Cont'd)

| | Standard | Sta. of C. G. | Strimmed | Sta. of C. G. |
|---|---|---|---|---|
| BASIC WEIGHT (Carrier) | 164,6[illegible] | 78.61Ft. | 168,[illegible] | 79.42 ft. |
| Crew (12-9) | 2700 | 71.28 ft. | 2025 | 71.28 ft. |
| Oil | 4650 | | 4650 | |
| Chaff | 1408 | 137.5 ft. | 1408 | 137.5 ft. |
| Fuel Load | 176,9[illegible] | | 193,[illegible] | |
| MAXIMUM TAKE-OFF WEIGHT | **370,000 | 72.71to79.03ft. | **370,000 | 72.71to79.03ft. |
| MAXIMUM LANDING WEIGHT | ***350,500 | 72.71to79.03ft. | ***370,000 | 72.71to79.03ft. |

** Limited by Strength (Wing and Landing Gear)

*** Limited by Strength (Landing Gear)

CONFIDENTIAL

DEPT. 6 FW 444 12-52 UTILITY REPORT SHEET

ANALYSIS
PREPARED BY
CHECKED BY
REVISED BY

CONVAIR
FORT WORTH DIVISION
FORT WORTH, TEXAS

DATE
ECONS
DATE

CONFIDENTIAL

## XB-36 H

| | Standard | Sta. of C. G. | Stripped | Sta. of C. G. |
|---|---|---|---|---|
| WEIGHT EMPTY | 171,942 | | 152,619 | |
| Parasite Provisions | 4107 | 68.9 ft. | 4107 | 68.9 ft. |
| Landing Gear Modifications for 370,000 lb. Take-off | 231 | | 231 | |
| Material Substitution | 418 | | 418 | |
| Weight Empty Items not part of Basic Weight | -17 | | -17 | |
| WEIGHT EMPTY | 176,681 | 78.08 ft. | 167,358 | 78.84 ft. |
| Trapped Fuel and Oil | 1492 | | 1492 | |
| Propeller Hub Oil | 102 | | 102 | |
| ADI Fluid | 405 | | 405 | |
| Guns | 1803 | 81.82 ft. | 214 | 162.1 ft. |
| Ammunition | 5796 | 84.79 | 756 | 157.3 ft. |
| Dry Ice | 135 | | | |
| Food & Water | 358 | | 155 | |
| Crew Comfort | 528 | | 140 | |
| Miscellaneous | 1476 | | 1476 | |
| Chaff Dispenser | 278 | 137.5 ft. | 269 | 137.5 ft. |
| Bomb Bay Tank* | 405 | | 405 | |

* Bomb Bay Tank carried only on ferry and separate take-off mission

DEPT. 6 FW AND 72-52 UTILITY REPORT SHEET

CONFIDENTIAL

CONFIDENTIAL

FB-36H (Cont'd)

| | Standard | Sta. of C. G. | Stripped | Sta. of C. G. |
|---|---|---|---|---|
| BASIC WEIGHT (Carrier) | 189,509 | 78.38 ft. | 172,768 | 79.18 ft. |
| Cameras | 1390 | 40.24 ft. | 1390 | 40.24 ft. |
| Crew (12-9) | 2700 | 57.32 ft. | 2025 | 57.32 ft. |
| Oil | 4650 | | 4650 | |
| Chaff | 3408 | 137.5 ft. | 1408 | 137.5 |
| Fuel Load | 170,343 | | 167,761 | |
| MAXIMUM TAKE-OFF WEIGHT | **370,000 | 72.71to79.03ft. | **370,000 | 72.71to79.03ft. |
| MAXIMUM LANDING WEIGHT | ***357,500 | 72.71to79.03ft. | ***357,500 | 72.71to79.03ft. |

** Limited by Strength (Wing and Landing Gear)

*** Limited by Strength (Landing Gear)

CONFIDENTIAL

CONFIDENTIAL

FUEL

B-36D, RB-36D, B-36H, and RB-36H

| | |
|---|---|
| SPEC | MIL-F-5572 |
| GRADE | 115/145 |

| LOCATION | No. of TANKS | GALLONS | STA. OF C. G. |
|---|---|---|---|
| Wing, Outboard | 2 | 4496 | 76.79 ft. |
| Wing, Center | 2 | 8146 | 72.63 ft. |
| Wing, Inboard | 2 | 8411 | 69.20 ft. |
| Center Section, Aux. | 2 | 9577 | 66.72 ft. |
| Bomb Bay (For Parasite) | 1 | 1200 | 89.66 |

Note: In flight, fuel in outboard tanks is used last to provide maximum bending relief to Wing.

OIL

B-36D, RB-36D, B-36H, and RB-36H

| | Recip. | Jet |
|---|---|---|
| Capacity (Gal.) | 1200 | 52 |
| SPEC. | MIL-O-6082 | MIL-O-6081 |
| GRADE | S-1120;W-1100 | 1010 |
| Sta. of C. G. | 71.7 ft. | 85.9 ft. |

CONFIDENTIAL

CONFIDENTIAL

## FLUID INJECTION

B-36D, RB-36D, B-36H, and RB-36H

| | |
|---|---|
| Type: | Water/Alcohol |
| Location: | Engine Nacelles |
| No. of Tanks | 6 |
| Gallons (Total) | 54 |
| Sta. of C. G. | 87.0 ft. |

## TRAPEZE MECHANISM

B-36D, RB-36D, B-36H, and RB-36H

| Item | Weight | Sta. of C. G. |
|---|---|---|
| Trapeze (36L25200) | 2118 lbs. | 68.2 ft. |
| Total Parasite Provisions including: Trapeze, but excluding Bomb Bay Tank | 4107 lbs. | 68.9 ft. |
| Bomb Bay Tank (empty) | 405 lbs. | 89.66 ft. |

RF-84F

| | |
|---|---|
| Launch Weight | 32,550 lbs. |
| Sta. of C. G. (B-36) | 73.3 ft. |

CONFIDENTIAL

## REFERENCES

1. Convair Report No. FZA-36-240, "Actual Performance Estimate for the B-36D Long Range, Heavy Bomber with Six Turbo Supercharged P & W R4360-41 Engines and Four J-47-GE-19 Turbojet Engines," dated 15 July 1952.

2. Convair Report No. FZA-36-242, "Actual Performance Estimate for the RB-36D Long Range, Heavy Reconnaissance Bomber with Six Turbo Supercharged P & W R4360-41 Engines and Four J-47-GE-19 Turbojet Engines," dated 30 September 1952.

3. Convair Report No. FZA-36-079, The Effects of Weight and Drag Changes on the Performance of the B-36B Airplane, dated 26 November 1948.

4. Convair Report No. FZA-36-308, "Performance Estimate for the RB-36D/RF-84F Ficon Parasite System Based on Phase IV Flight Tests of the B-36D Airplane", dated 1 January 1954.

5. Convair Report No. FZA-36-278, "Performance Estimate for B-36F and B-36H Aircraft Based on Phase IV Flight Tests", dated 15 June 1953.

6. Convair Report No. FZA-36-279, "Performance Estimate for RB-36F and RB-36H Aircraft Based on Phase IV Flight Tests", dated 18 September 1953.

7. Convair Report FZA-36-307 - "Standard Aircraft Characteristics for RB-36D/RF-84F Ficon Parasite System", dated 1 January 1954.

8. Convair Report FZA-36-051 - "Statement of Work for Production Ficon Installation in RB-36 Airplanes", dated 13 February 1953.

9. T.O. 1B-36(R)D(G)-1
   1F-84(R)F(G)-1 - Flight Handbook

10. T.O. 1B-36(R)D(G)-2 - Maintenance Handbook


## APPENDIX TO SECTION I


| DRAWING NO. | | PAGE |
|---|---|---|
| Plate 1 | General Arrangement Perspective | A-1 |
| Plate 2 | Trapeze Operation Perspective | A-2 |
| FW5410004 | General Arrangement - B-36 and RB-36 Airplanes. | A-3 |
| FWAP#825 | B-36 Fuselage Structure Diagram | A-4 |
| FWAP#1094 | RB-36 Fuselage Structure Diagram | A-5 |
| FW5410001 | Layout - Clearance Dimensions for B-36 Carrier and Parasite | A-6 |
| FW5410002 | Layout - Wing Ordinates and Lower Surface Clearance | A-7 |
| 36L25200 | Sht. 2 - Mechanism Instl. - Trapeze | A-8 |
| 36L25200 | Sht. 3 - Mechanism Instl. - Trapeze | A-9 |
| FW5410003 | Layout - Clearance Dimensions for Trapeze and Parasite | A-10 |
| 36R14102 | Geometry - RF84 Trapeze Mechanism | A-11 |
| FW5410005 | Layout - Enlarged Portion of 36R14102, Trapeze Geometry. | A-12 |
| Plate 3 | Carrier's Parasite Jettison System | A-13 |
| 43F43501 | V-Probe (RF-84F) | A-14 |

APPENDIX TO SECTION I (Continued)


| DRAWING NO. | | | PAGE |
|---|---|---|---|
| 43F43522 | - | V-Probe Assy. (RF-84F) | A-15 |
| 43F43506 | - | V-Probe Installation (RF-84F) | A-16 |
| 43F43518 | - | Pin Installation - Rear Suprort (RF-84F) | A-17 |
| Plate 4 | - | Parasite Hydraulic Schematic | A-18 |
| Plate 5 | - | Parasite Pilot's Release Controls | A-19 |
| Plate 6 | - | Doors and Fairings (Ficon Bay) | A-20 |
| Plate 7 | - | B-36 Leading Position | A-21 |

# General Arrangement

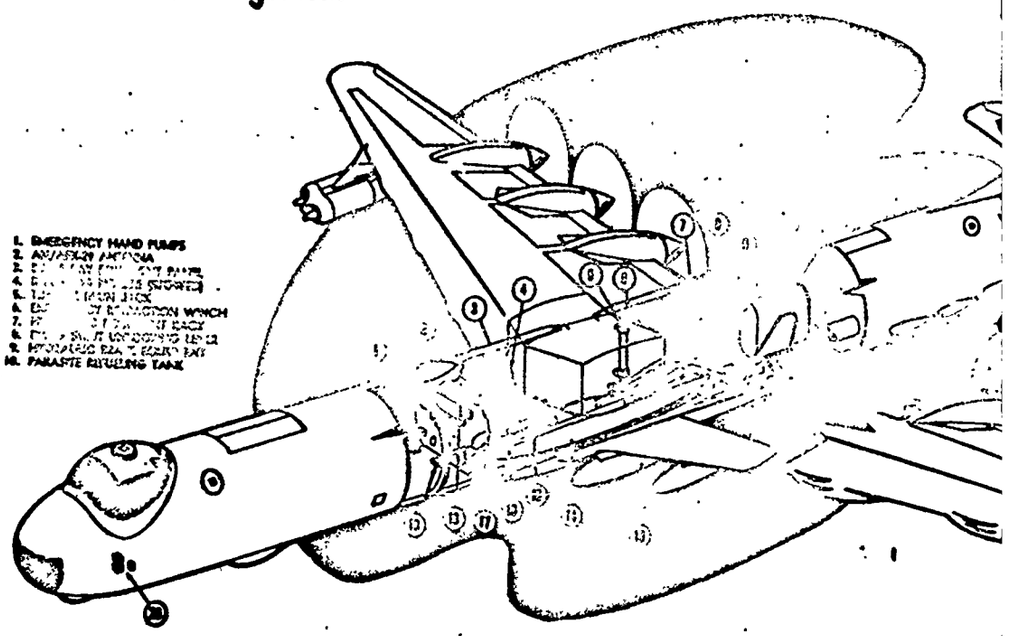

1. EMERGENCY HAND PUMPS
2. AVIONICS ANTENNA
3. [illegible]
4. [illegible]
5. [illegible]
6. [illegible] OF RMS/ORBITER WINCH
7. [illegible]
8. [illegible]
9. HYDRAULIC REACTANT BODY FAIR
10. PAYLOAD REFUELING TANK

SECRET

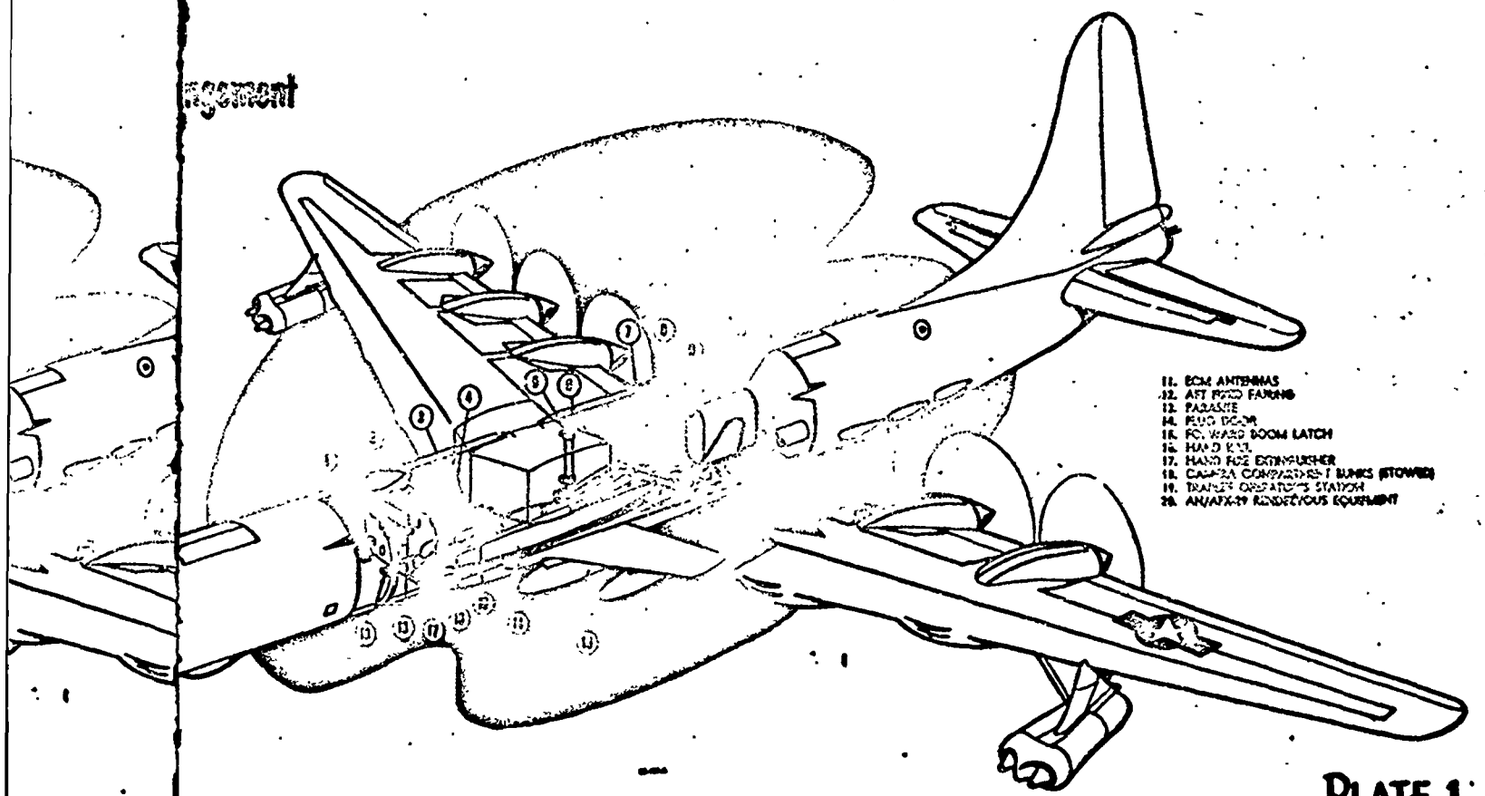
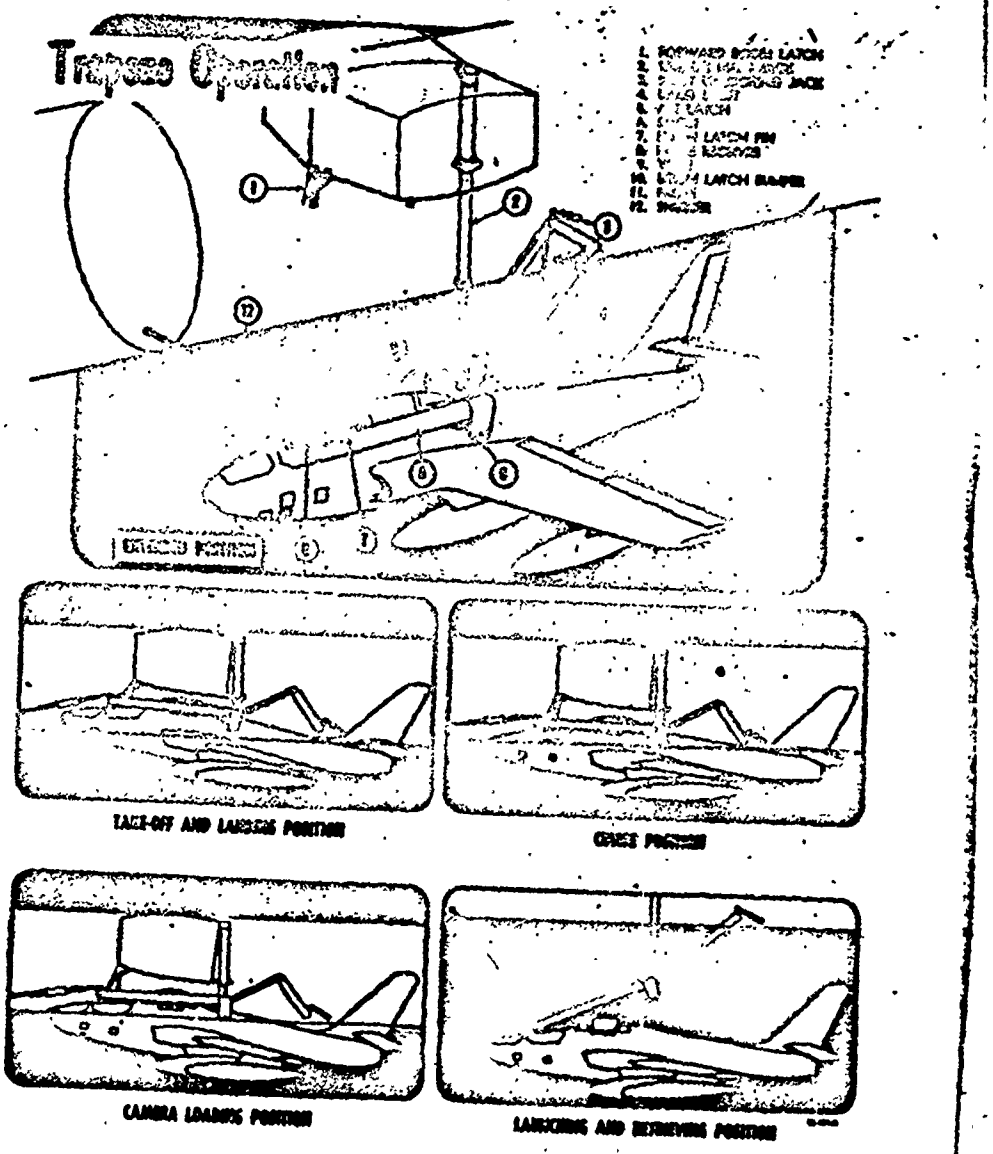




PLATE 1


SECRET

2



Trapeze Operation
TAKE-OFF AND LANDING POSITION
CAMERA LOADING POSITION

SECRET

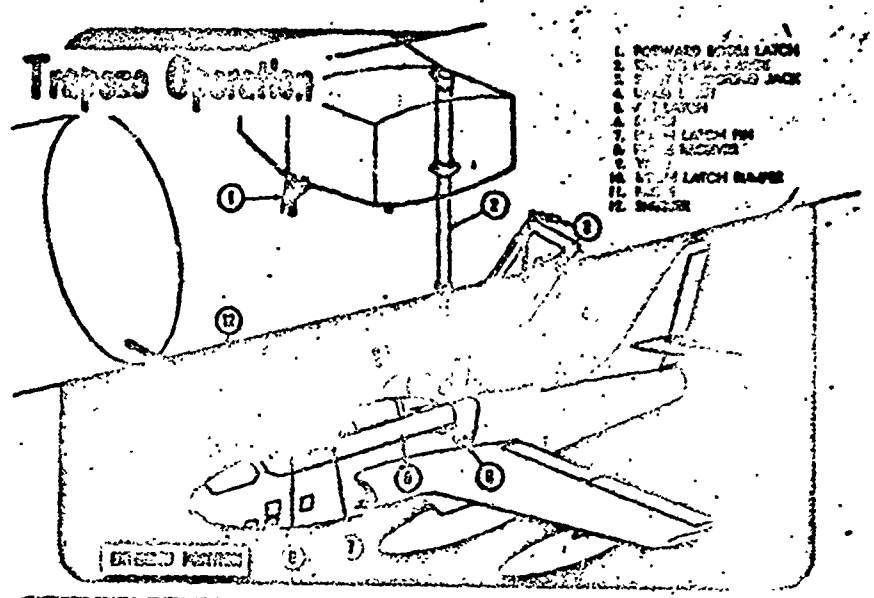


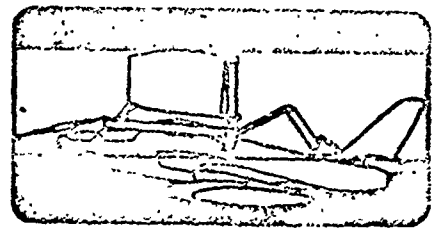
TAKE-OFF AND LANDING POSITION

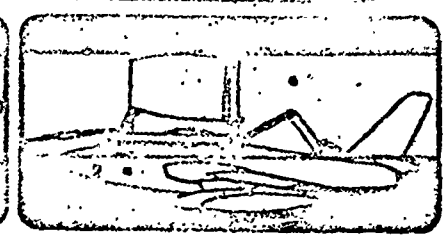

CRUISE POSITION

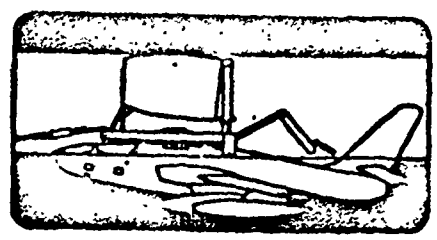


CAMERA LOADING POSITION

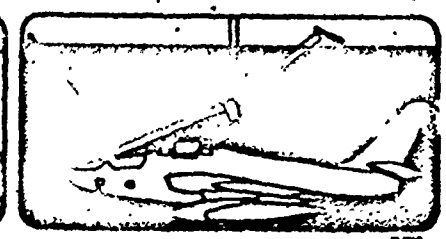


LAUNCHING AND RETRIEVAL POSITION


SECRET


PLATE 2

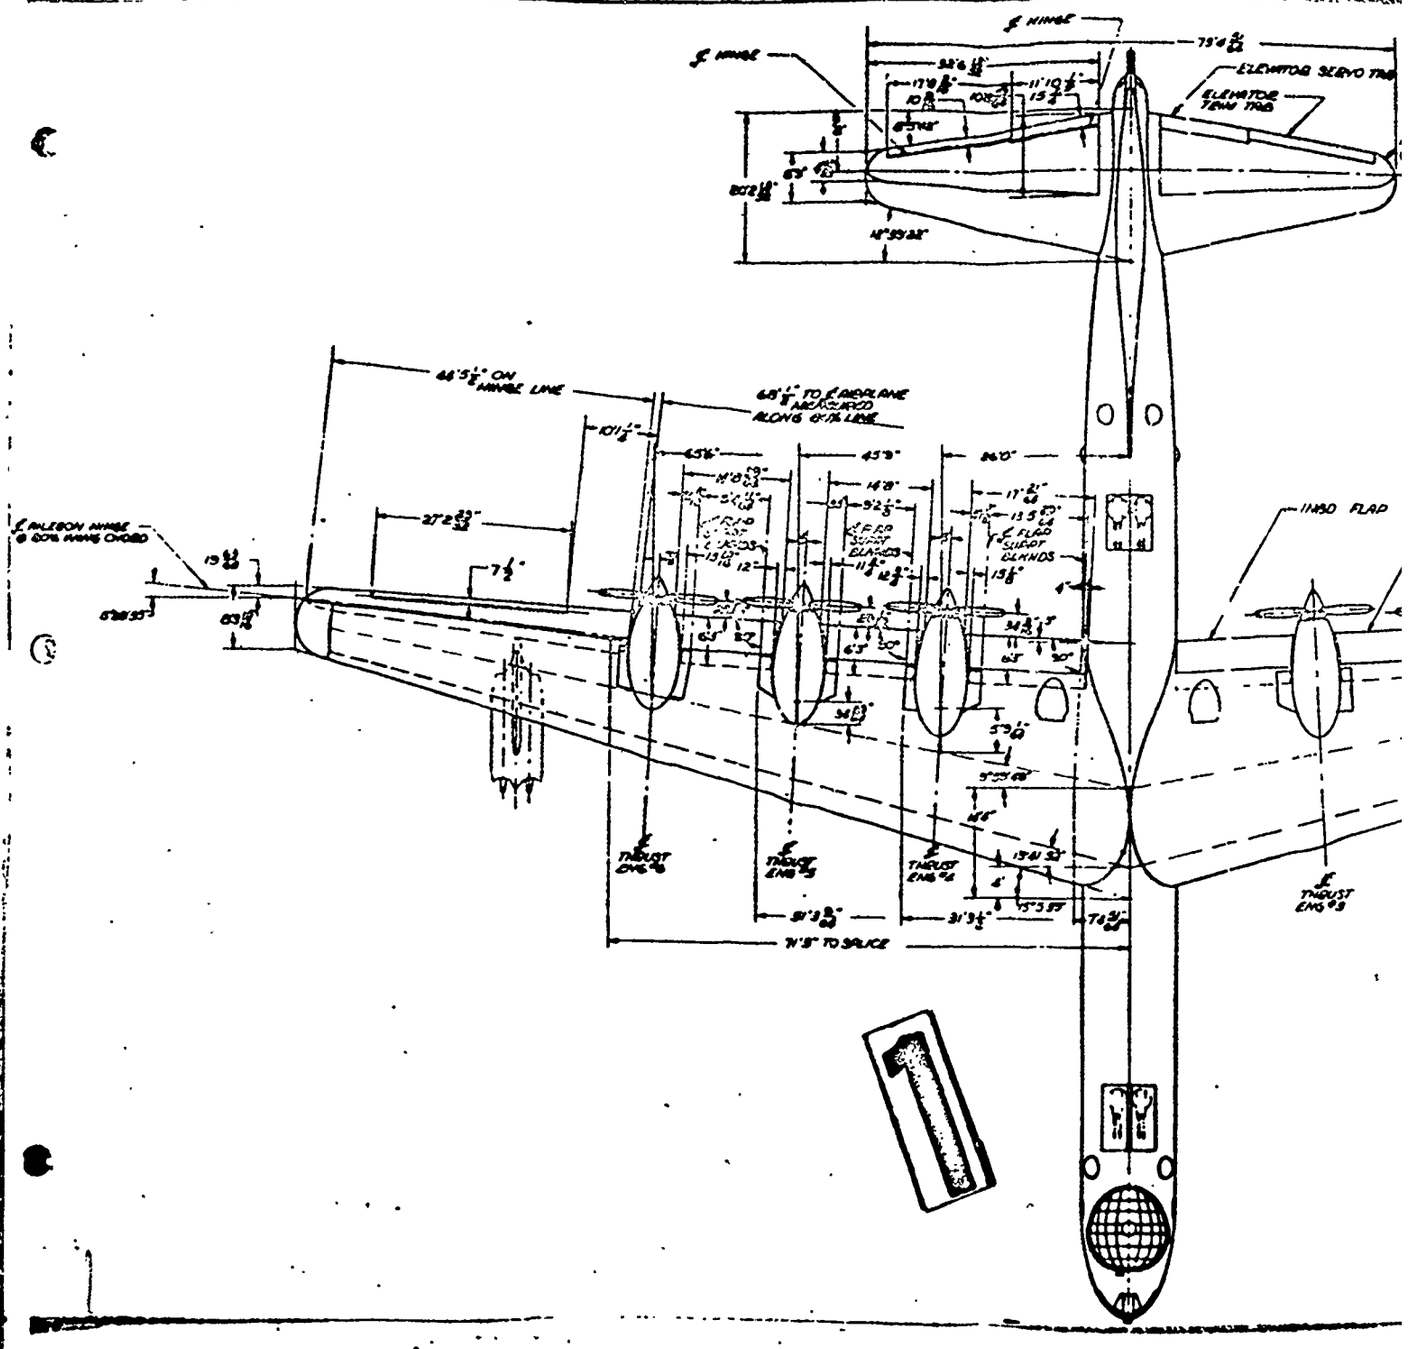
℄ HINGE
ELEVATOR SERVO TAB
ELEVATOR TRIM TAB
44'5½" ON HINGE LINE
44'6" TO ℄ AIRPLANE MEASURED ALONG 6.7% LINE
101½"
45'6"
45'3"
84'0"
℄ AILERON HINGE @ 60% WING CHORD
27'2 53/64"
7½"
INBD FLAP
℄ FLAP SUPPT GEMINDS
℄ THRUST ENG #1
℄ THRUST ENG #2
℄ THRUST ENG #3
℄ THRUST ENG #4
74'8" TO SPLICE


ELEVATOR SERVO TAB
ELEVATOR
ELEVATOR HINGE
2° DIHEDRAL
INBD FLAP
INTERMEDIATE FLAP
OUTBD FLAP
AILERON
REAR SPAR
FRONT SPAR
THRUST EMG #3
THRUST EMG #2
THRUST EMG #1
74'-8" TO SPLICE

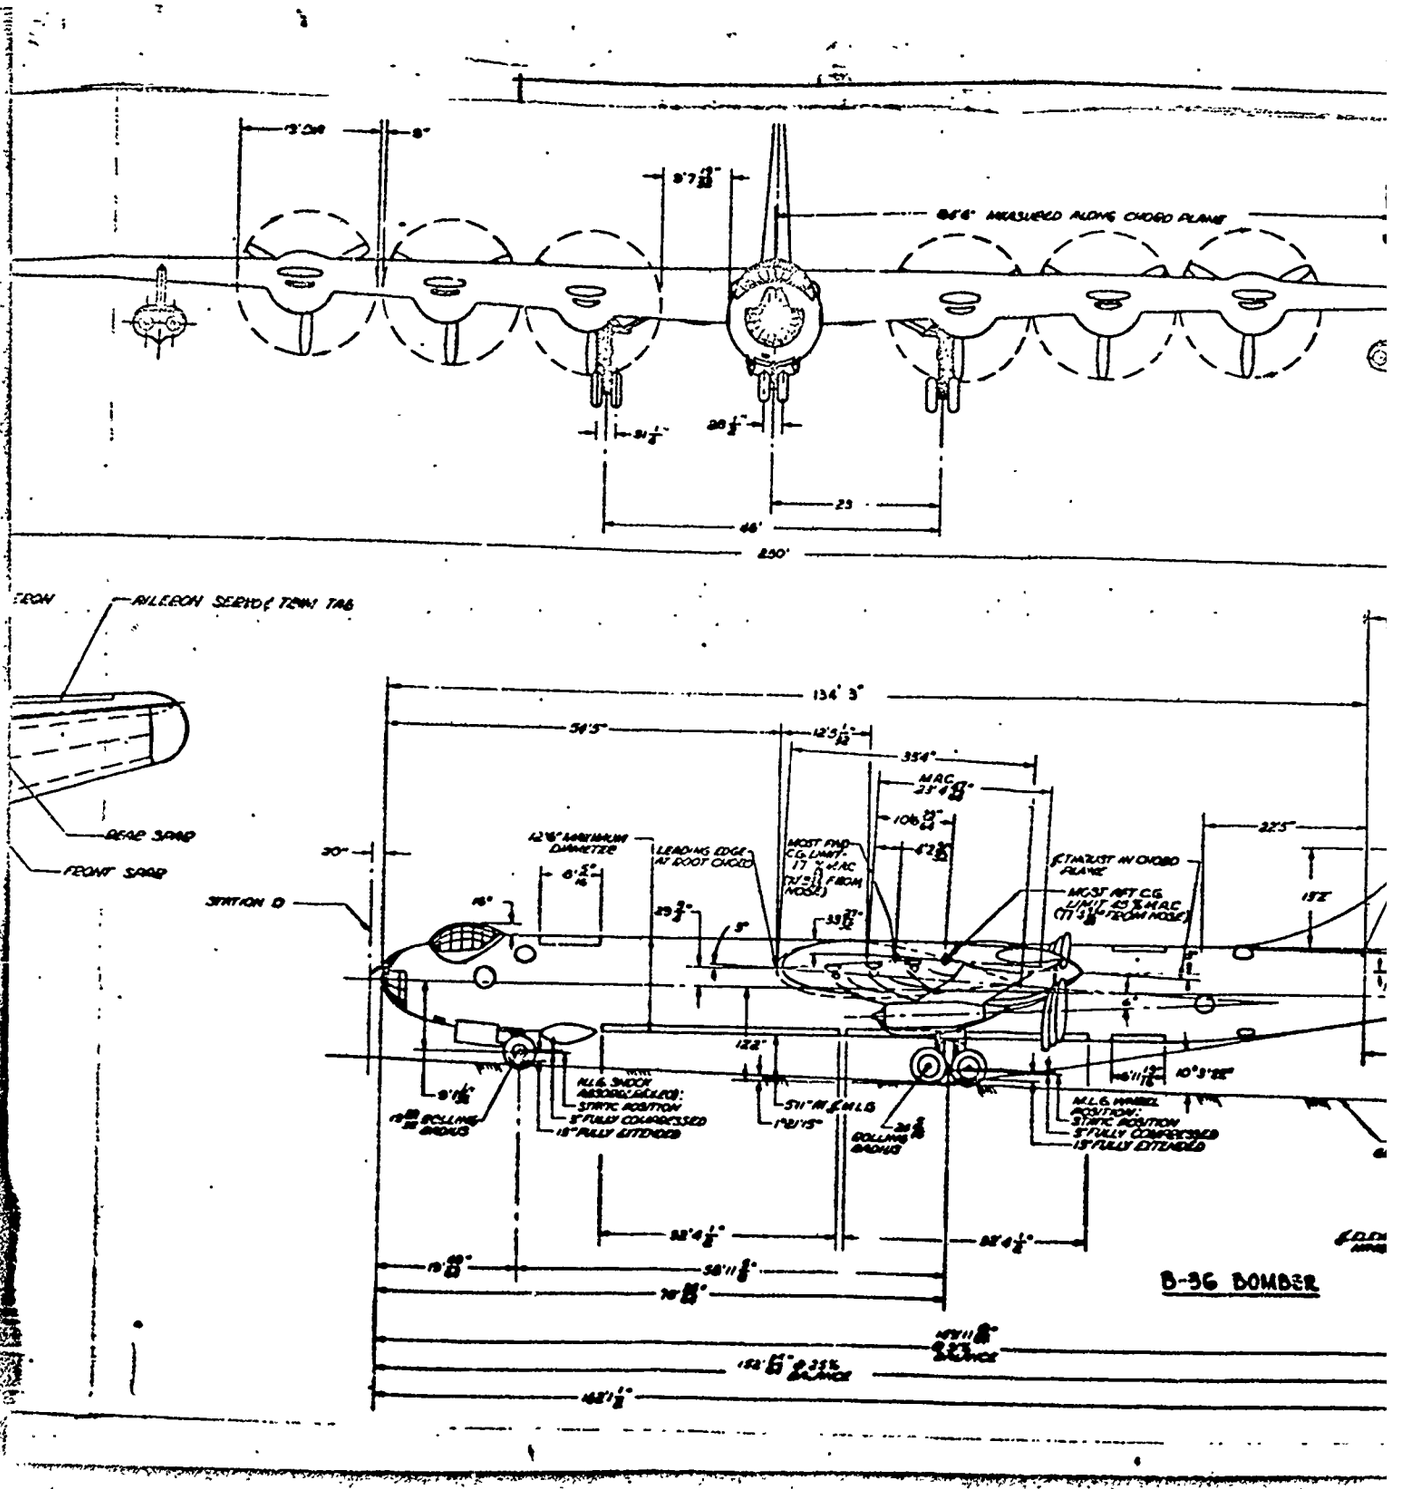
AILERON SERVO TRIM TAB
REAR SPAR
FRONT SPAR
STATION 0
LEADING EDGE AT ROOT CHORD
MAC
134' 3"
B-36 BOMBER

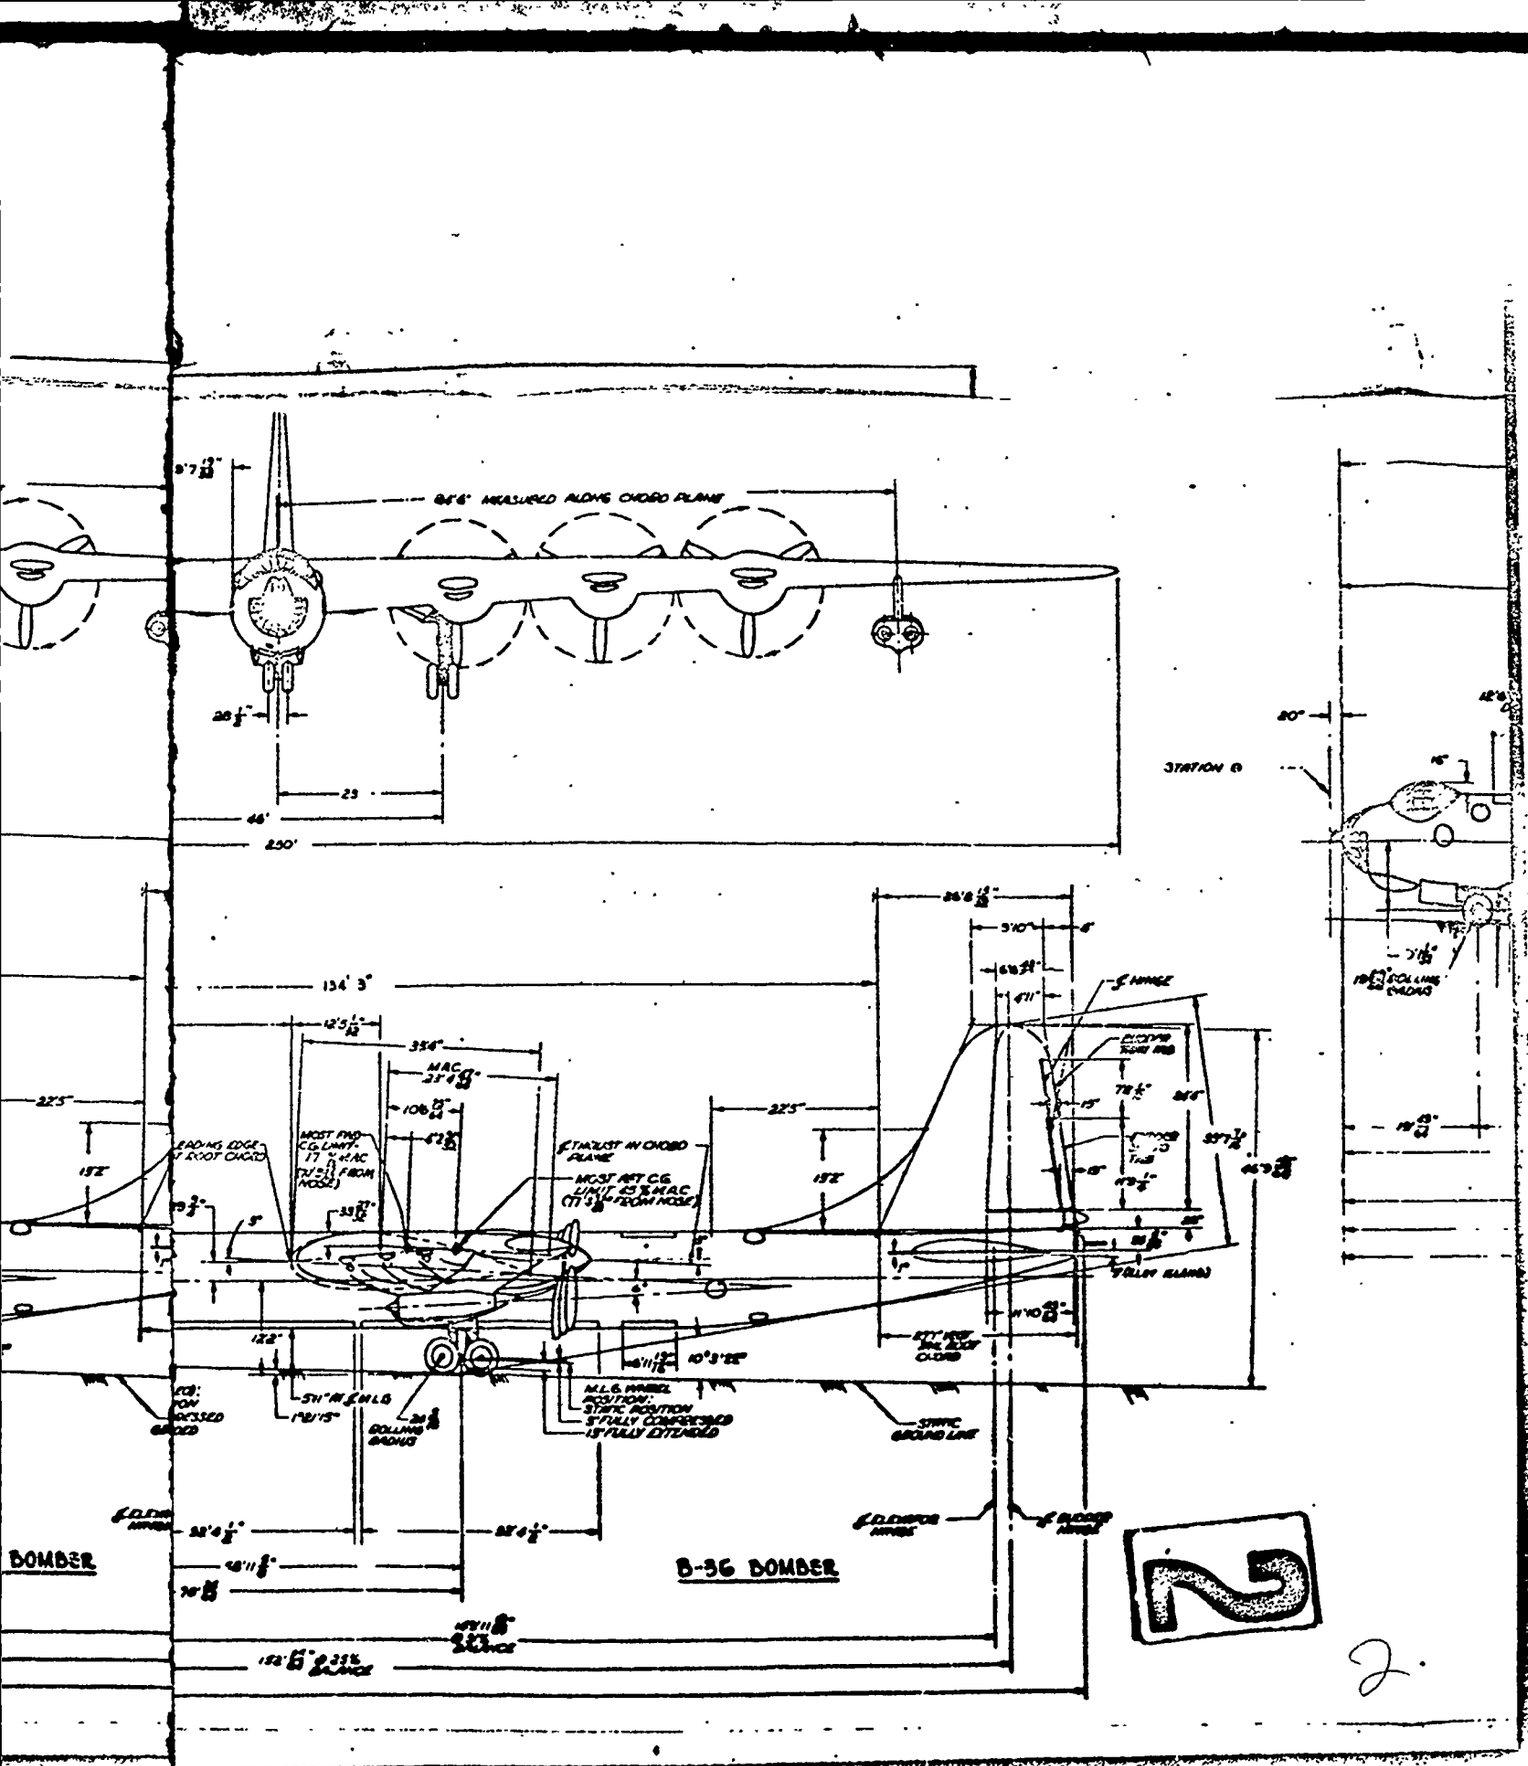
B-36 BOMBER
B-36 BOMBER
STATION 0
MEASURED ALONG CHORD PLANE
134' 3"
250'
46'
23
28 1/2"
MAC
35'6"
22'5"
15'2"
5'
STATIC GROUND LINE
STATIC POSITION:
5" FULLY COMPRESSED
15" FULLY EXTENDED
COLLING RADIUS
20"
42"
16"
5'10"
6'
4'11"
78 1/2"
84"
15"
43 1/2"
46'9 3/4"
5'7 1/2"
11'10 3/4"
10°3'22"
48'11 3/8"
70'
158'6" SPAN
152'6" SPAN
2.

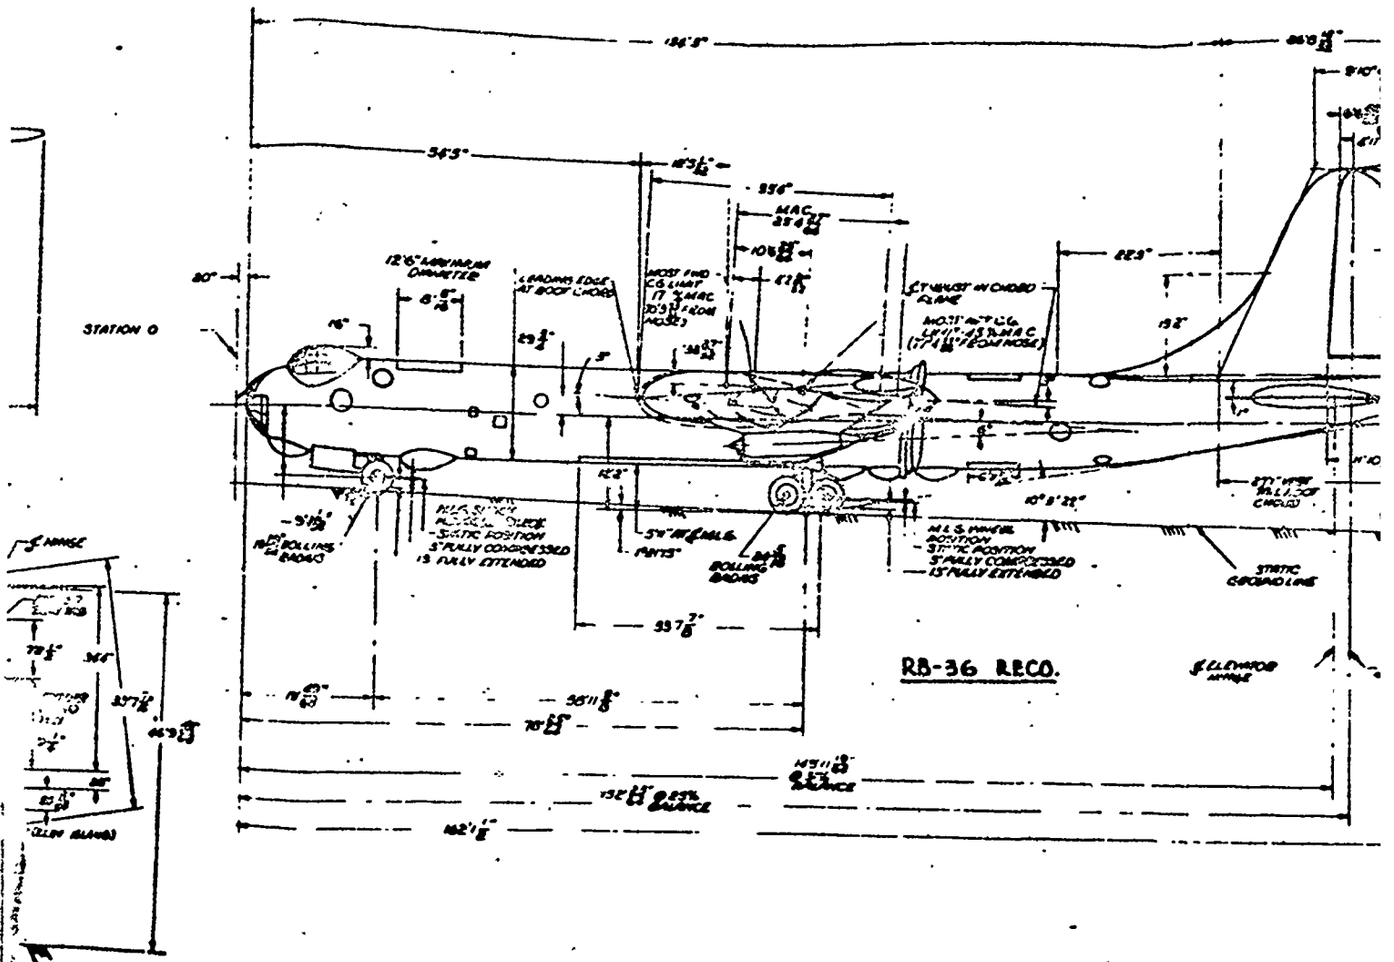


3

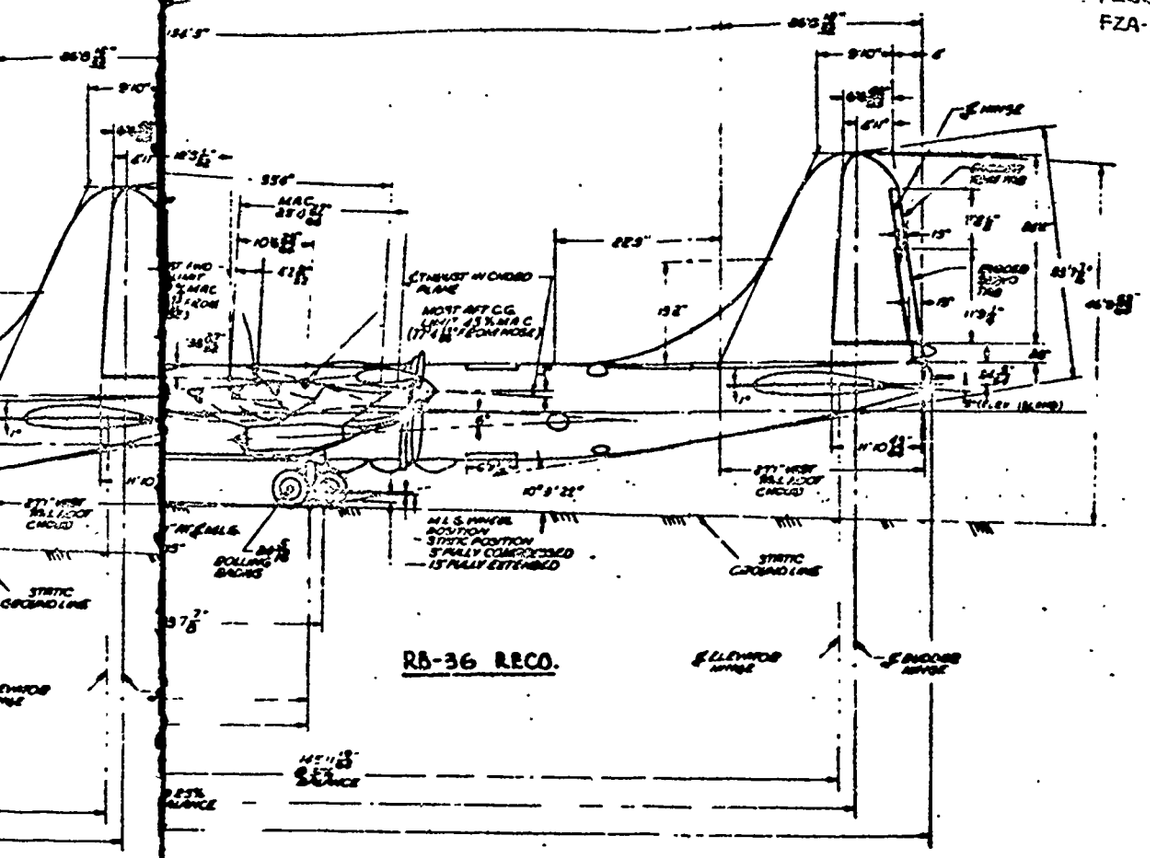



3


Convair
PRELIMINARY DESIGN DRAWING

GENERAL ARRANGEMENT
B-36 & RB-36 AIRPLANES


FW5410004

2

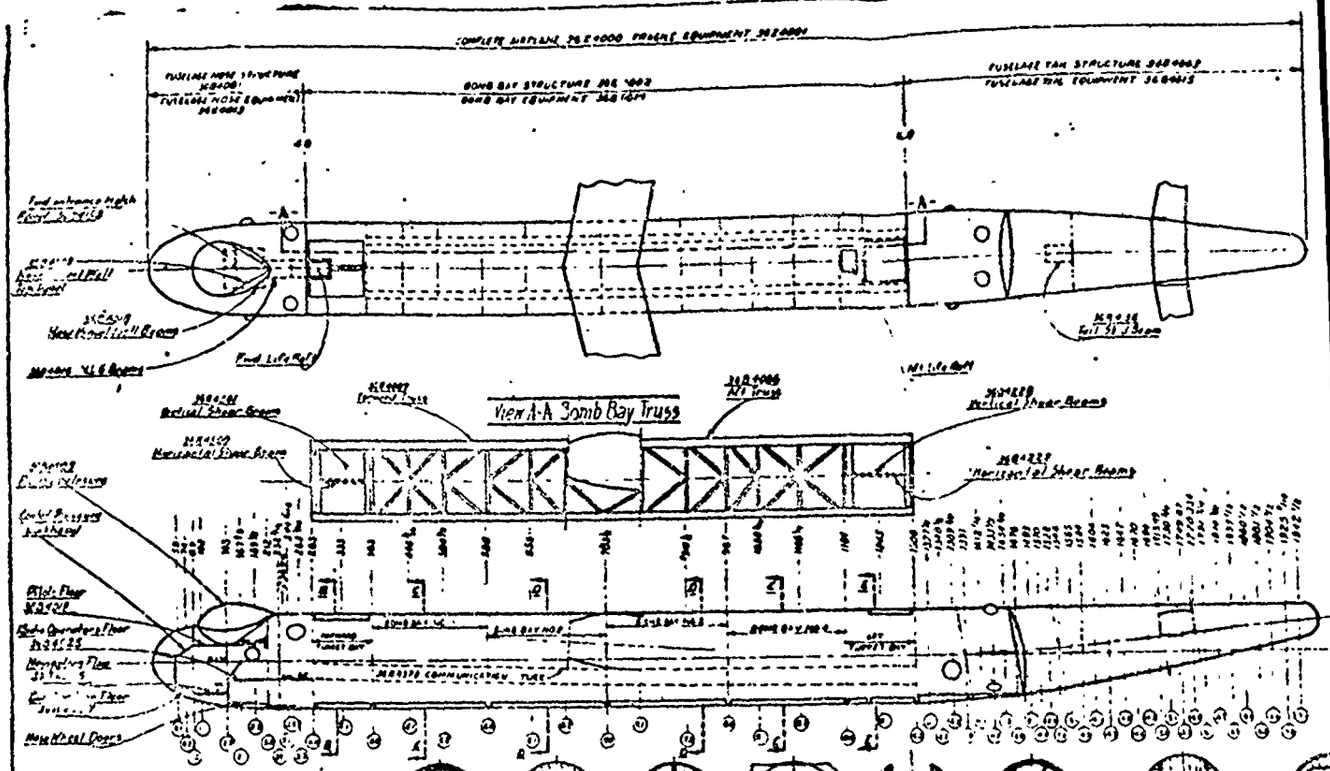

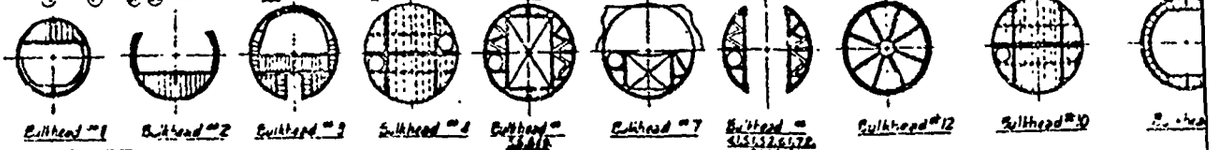
| Station | Bulkhead | Drawing No. |
|---|---|---|
| 402.70 | | 368371 |
| 464.70 | #1 | 368370 |
| 498.70 | | 368372 |
| 504.70 | #2 | 368378 |
| 523.70 | | 368371 |
| 624.70 | | 368374 |
| 628.70 | | 368374 |
| 643.70 | | 368371 |
| 653 | #3 | 368380 |
| 659.70 | | 368378 |
| 701.70 | | 368378 |
| 738.70 | | 368374 |
| 833.70 | | 368378 |
| 867.70 | | 368 (illegible) |
| 918.70 | #4 | 368380 |
| 926.70 | | 368375 |
| 1031.70 | | 368371 |
| 1050.70 | #7 | 368378 |
| 1086.70 | | 368378 |
| 1098.70 | #8 | 368378 |
| 1221.70 | | 368371 |

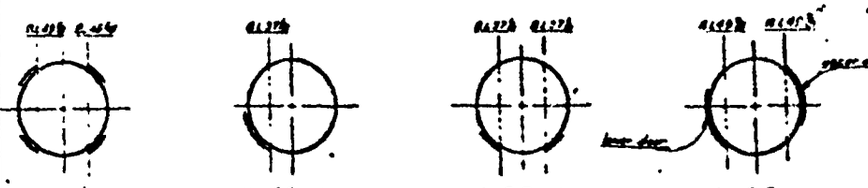




Fuse

Exc


drawn by P.K.


approved by.

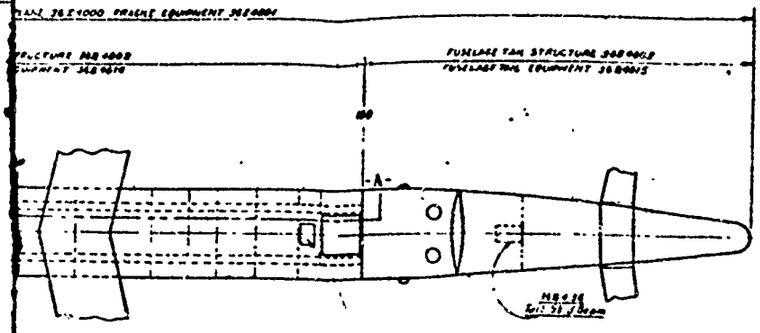

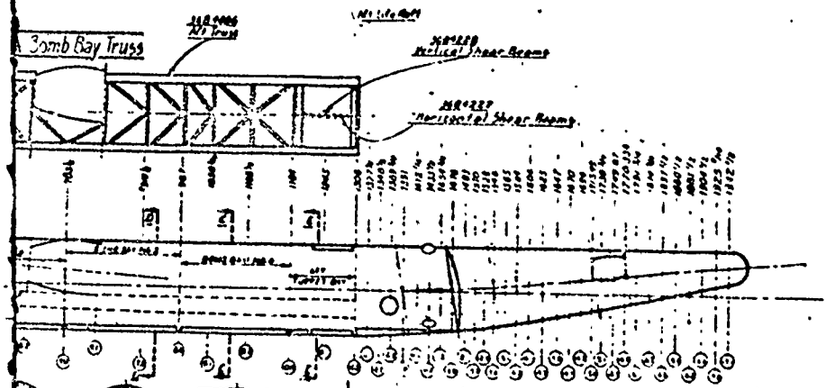
| FUSELAGE BULKHEAD DRAWING REFERENCE | | | |
|---|---|---|---|
| STATION | DRAWING NO | STATION | DRAWING NO |
| 0.1 | 36B4101 | 10.1 | 36B4121 |
| 0.2 | 36B4102 | 10.2 | 36B4122 |
| 1.0 | 36B4110 | 10.3 | 36B4123 |
| 1.1 | 36B4111 | 11.0 | 36B4130 |
| 2.0 | 36B4020 | 11.1 | 36B4131 |
| 2.1 | 36B4021 | 11.2 | 36B4132 |
| 2.2 | 36B4022 | 11.3 | 36B4133 |
| 3.0 | 36B4030 | 12.0 | 36B4140 |
| 3.05 | 36B4035 | 12 | 36B 135 |
| 3.1 | 36B4031 | 12.2 | 36B 142 |
| 3.2 | 36B4032 | 12.3 | 36B 143 |
| 3.3 | 36B4033 | 13.0 | 36B 150 |
| 4.0 | 36B4040 | 13.1 | 36B 151 |
| 4.1 | 36B4041 | 14.0 | 36B 160 |
| 5.0 | 36B4050 | 4.1 | 36B 161 |
| 5.1 | 36B4051 (TWO) | 14.2 | 36B 162 |
| | 36B4151 (TWO) | 14.3 | 36B 163 |
| 5.2 | 36B4052 | 14.4 | 36B 164 |
| 6.0 | 36B4060 | 14.5 | 36B 165 |
| 6.1 | 36B4061 (TWO) | 15.0 | 36B 170 |
| | 36B4161 (TWO) | 15.1 | 36B 171 |
| 6.2 | 36B4062 | 15.2 | 36B 172 |
| 7.0 | 36B4070 | 16.0 | 36B 180 |
| 7.1 | 36B4071 | 16.1 | 36B 181 |
| 7.2 | 36B4072 (TWO) | 16.2 | 36B 182 |
| | 36B4172 (TWO) | 16.3 | 36B 183 |
| 8.0 | 36B4080 | 16.4 | 36B 184 |
| 8.1 | 36B4081 | 16.5 | 36B 185 |
| 8.2 | 36B4082 | 16.6 | 36B 186 |
| 9.0 | 36B4090 | 17.0 | 36B4190 |
| 9.1 | 36B4091 | 17.1 | 36B4191 |
| 10.0 | 36B4100 | | |



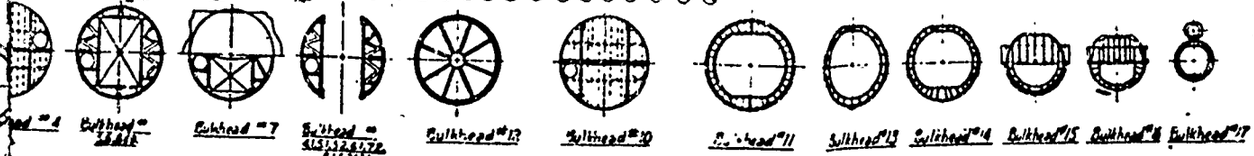


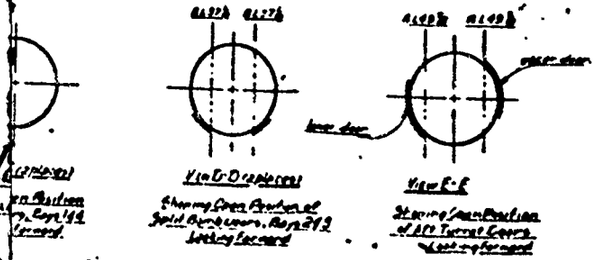
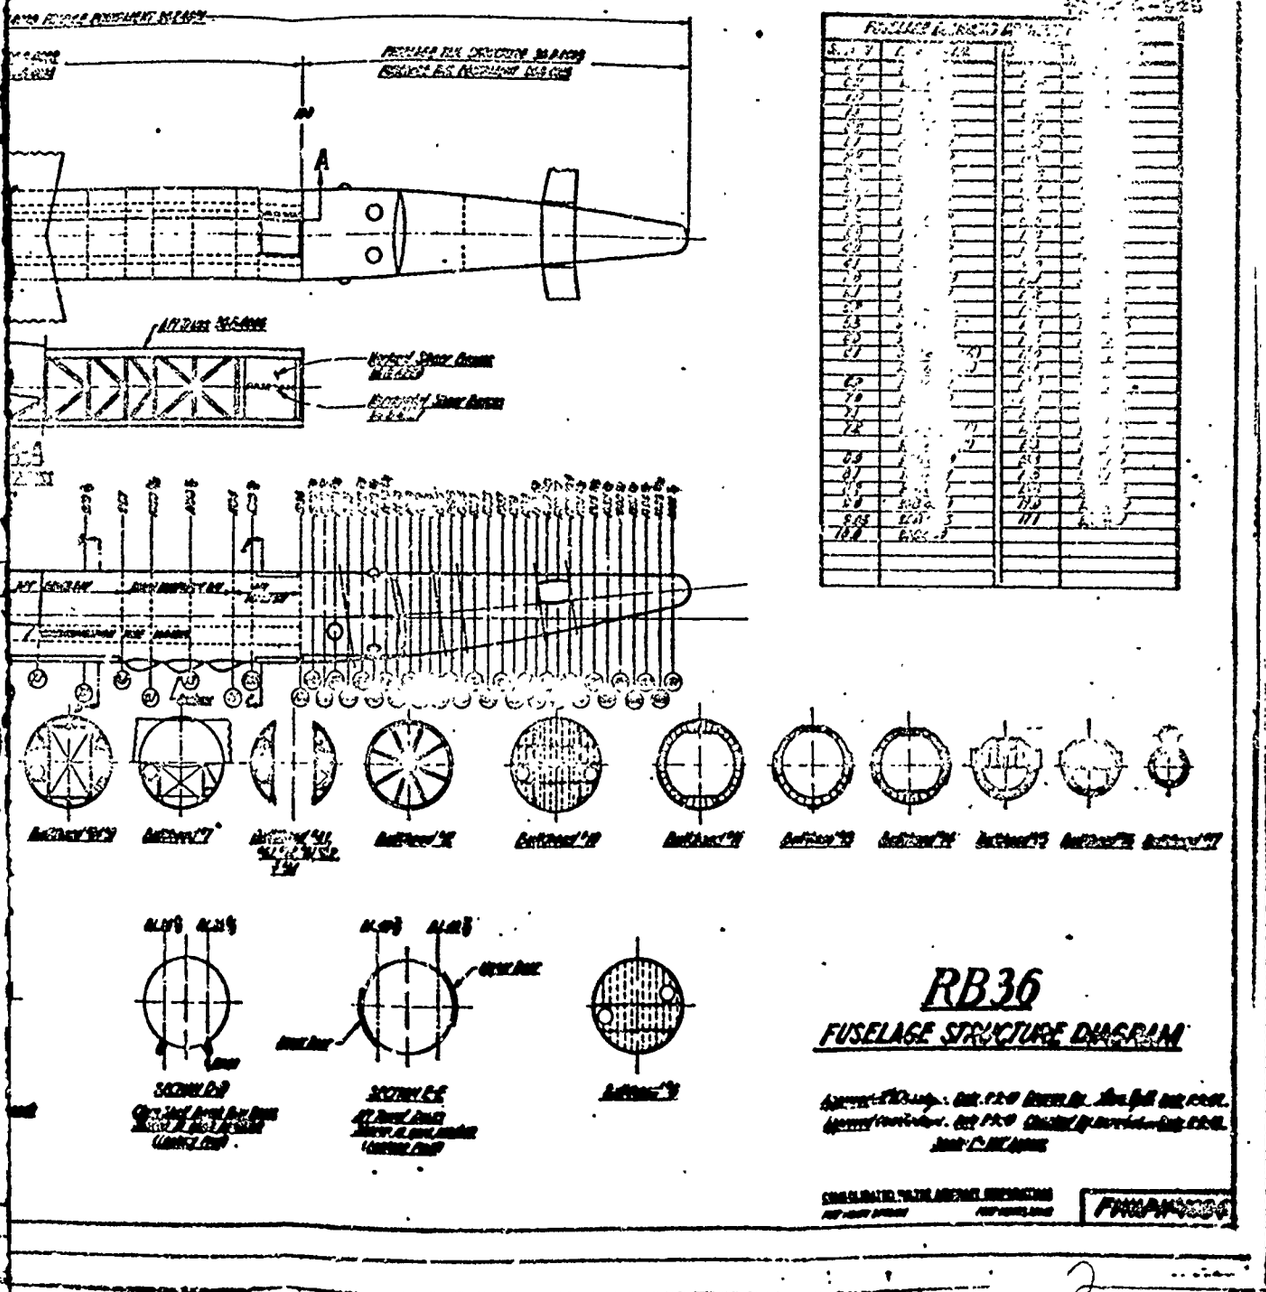

# —B-36—
# Fuselage Structure Diagram

PREPARED BY TOOLING MAJOR PRODUCTION GROUP
(For Planning Reference)

drawn by PJK
approved by
date 7-2-48


CONSOLIDATED VULTEE AIRCRAFT CORPORATION
FWP no. 825

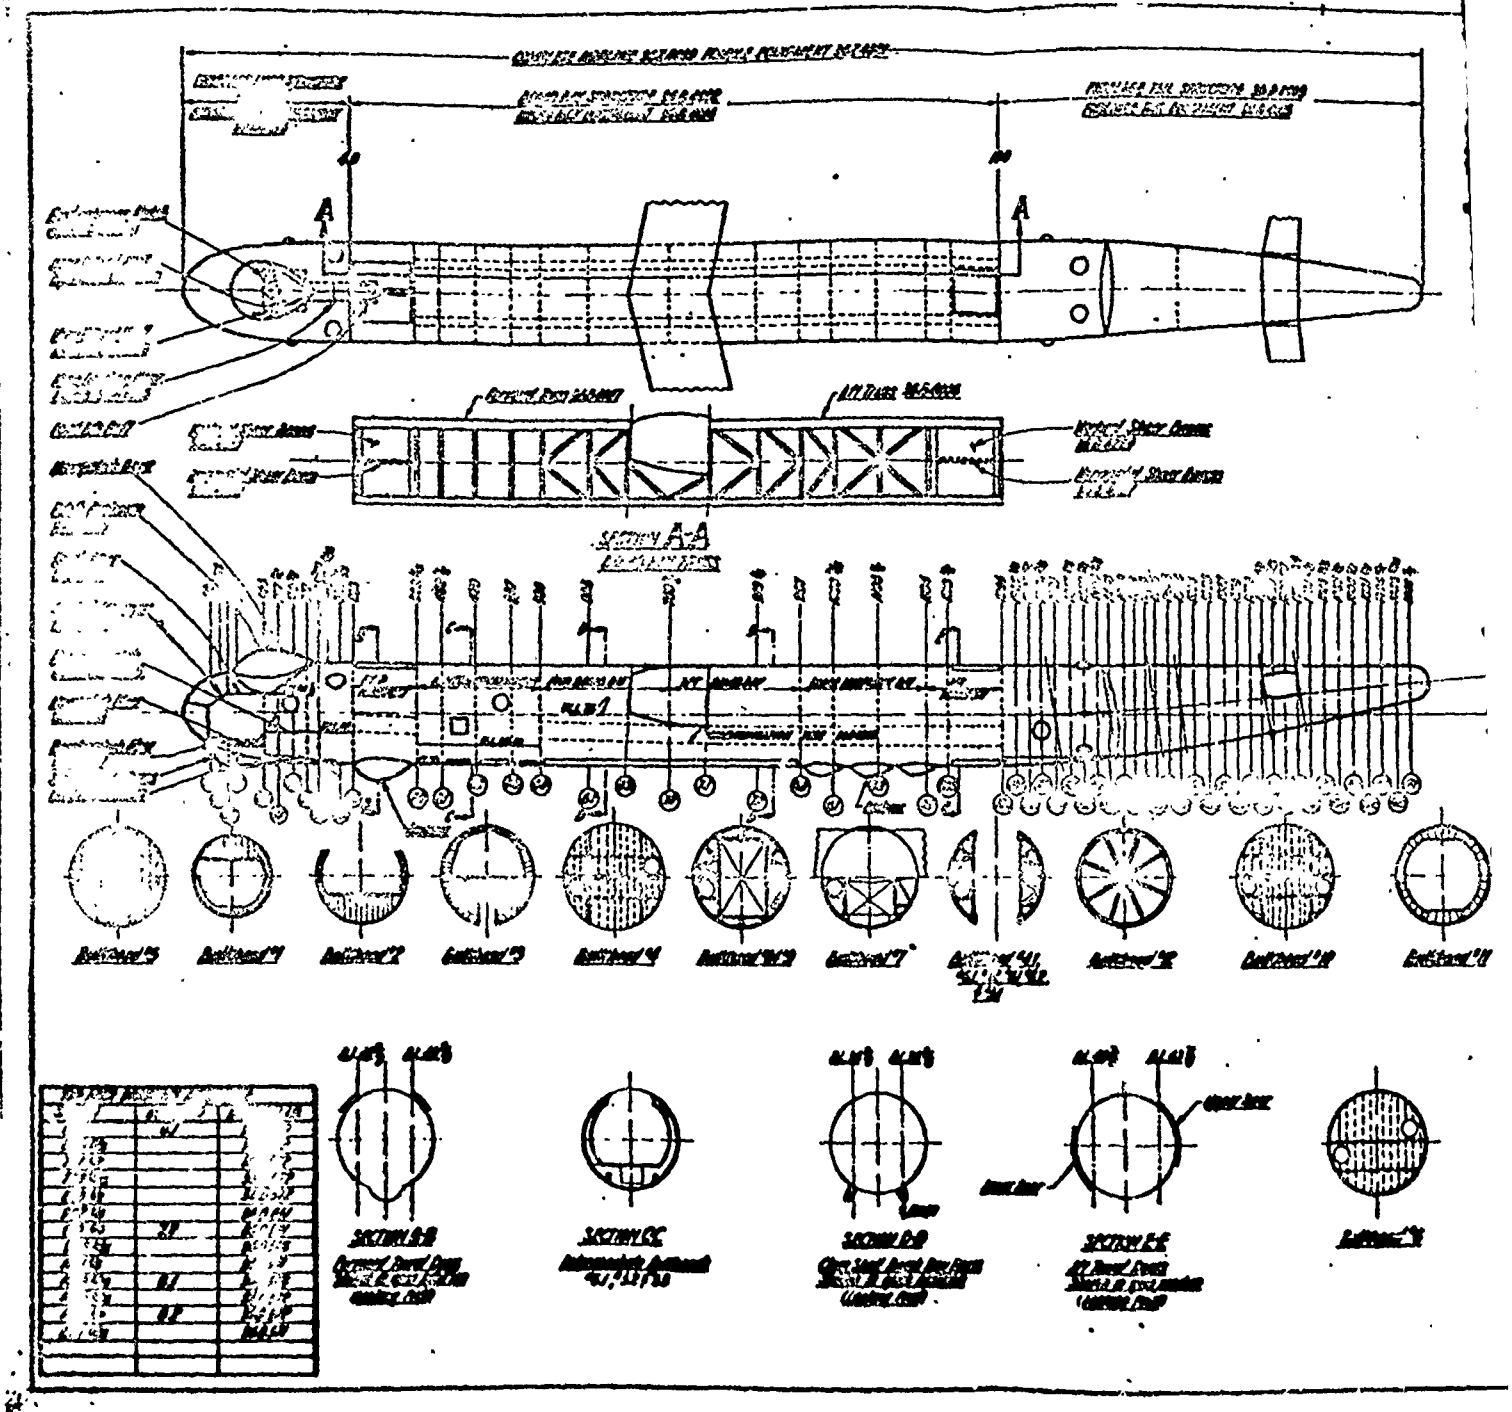






# RB36


## FUSELAGE STRUCTURE DIAGRAM

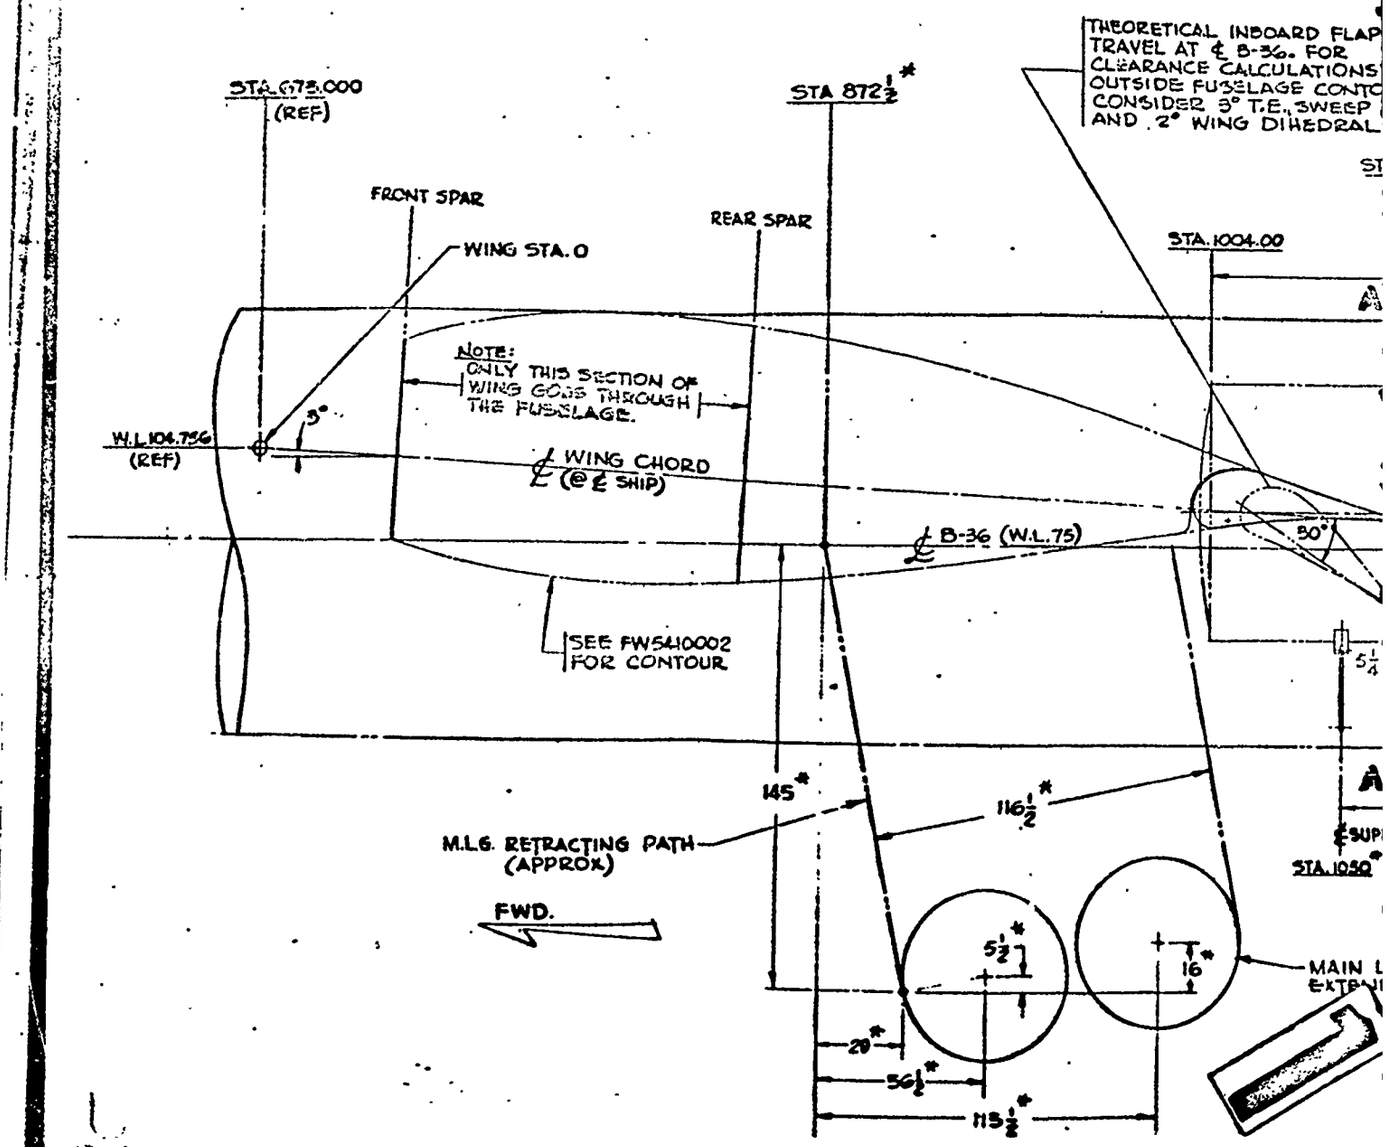

STA. 673.000
(REF)
STA 872½*
FRONT SPAR
REAR SPAR
WING STA. 0
THEORETICAL INBOARD FLAP
TRAVEL AT ℄ B-36. FOR
CLEARANCE CALCULATIONS
OUTSIDE FUSELAGE CONTO
CONSIDER 3° T.E. SWEEP
AND 2° WING DIHEDRAL
STA. 1004.00
NOTE:
ONLY THIS SECTION OF
WING GOES THROUGH
THE FUSELAGE.
W.L. 104.756
(REF)
3°
℄ WING CHORD
(@ ℄ SHIP)
℄ B-36 (W.L. 75)
30°
SEE FW5410002
FOR CONTOUR
5¼
145*
116½*
M.L.G. RETRACTING PATH
(APPROX)
FWD.
STA. 1050*
5½*
16*
MAIN L
EXTE
20*
56½*
115½*

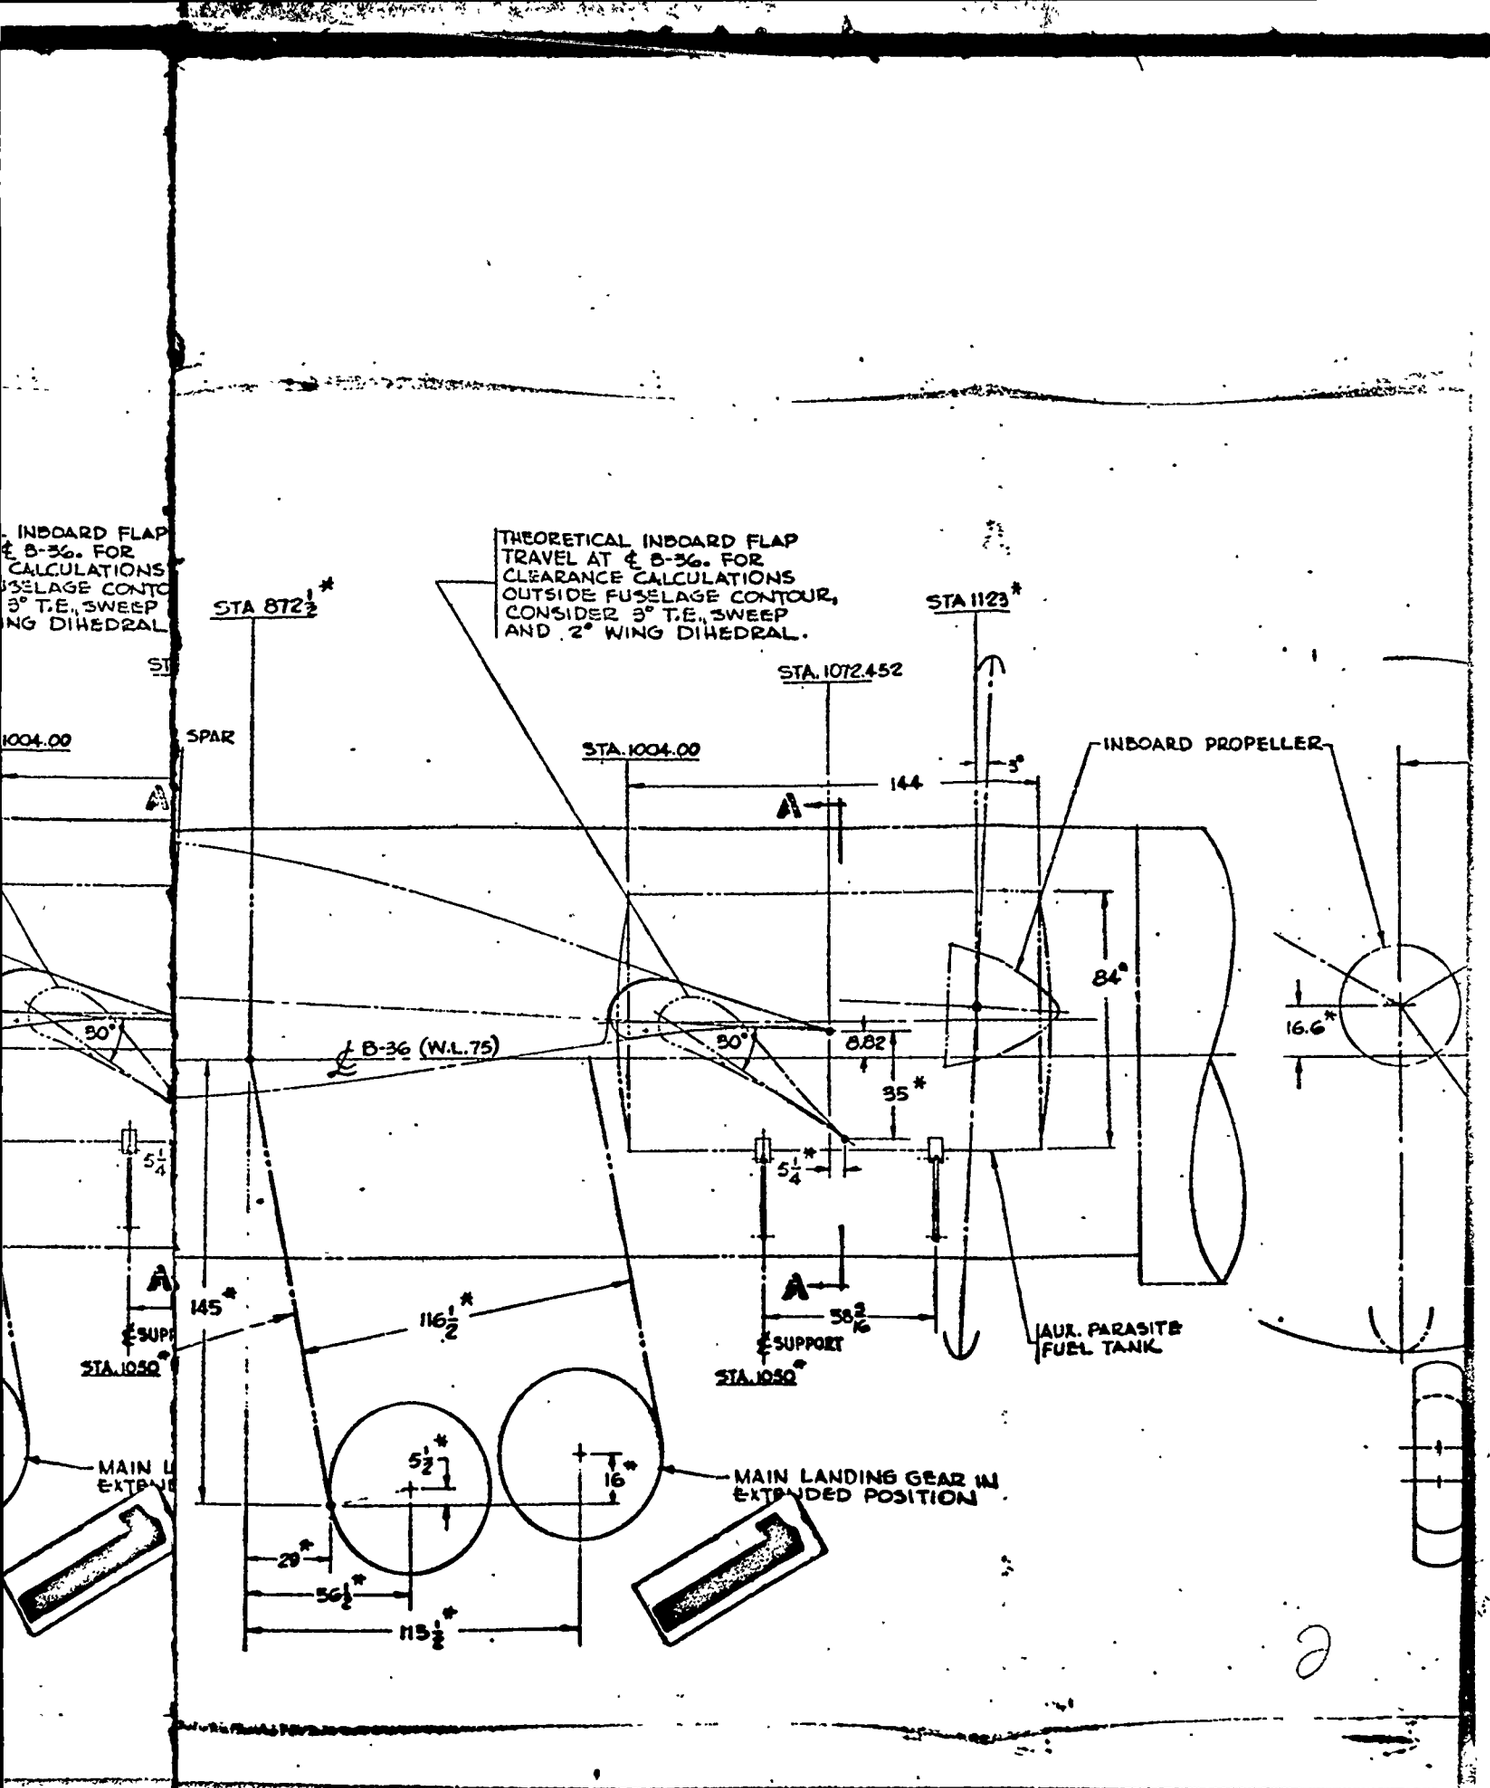
THEORETICAL INBOARD FLAP TRAVEL AT ℄ B-36. FOR CLEARANCE CALCULATIONS OUTSIDE FUSELAGE CONTOUR, CONSIDER 3° T.E. SWEEP AND 2° WING DIHEDRAL.
STA 872½*
STA 1123*
STA. 1072.452
STA. 1004.00
SPAR
INBOARD PROPELLER
144
3°
84*
16.6*
30°
℄ B-36 (W.L. 75)
8.82
35*
5¼*
145*
116½*
℄ SUPPORT
STA. 1050*
58½*
AUX. PARASITE FUEL TANK
5½*
16*
MAIN LANDING GEAR IN EXTENDED POSITION
20*
56½*
115½*

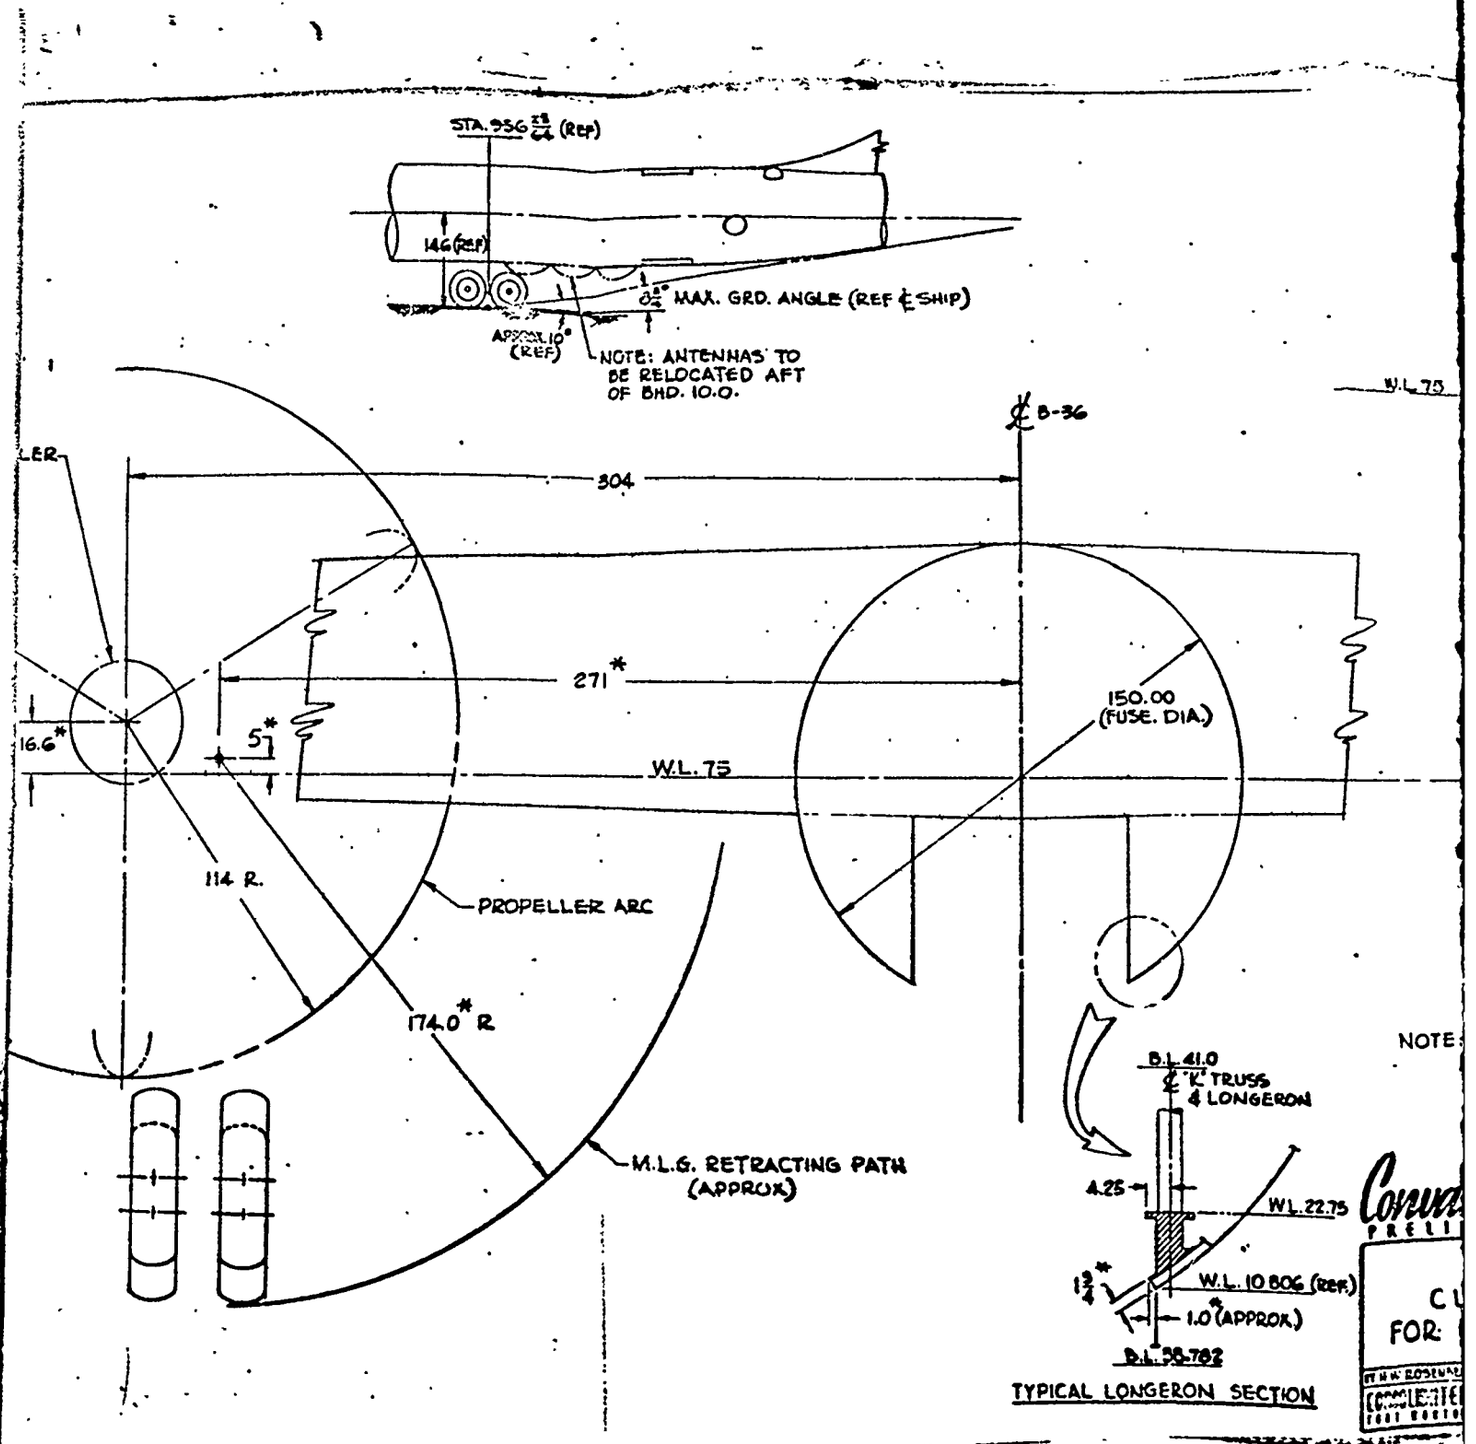

STA. 956 $\frac{FS}{CL}$ (REF)
146 (REF)
$2\frac{1}{2}°$ MAX. GRD. ANGLE (REF ℄ SHIP)
APPROX 10° (REF)
NOTE: ANTENNAS TO BE RELOCATED AFT OF BHD. 10.0.
W.L. 75
℄ B-36
304
271*
150.00 (FUSE. DIA.)
16.6*
5*
W.L. 75
114 R.
PROPELLER ARC
174.0* R
M.L.G. RETRACTING PATH (APPROX)
NOTE
B.L. 41.0
℄ "K" TRUSS & LONGERON
4.25
W.L. 22.75
1 3/4*
W.L. 10.806 (Ref.)
1.0* (APPROX.)
B.L. 56.782
TYPICAL LONGERON SECTION

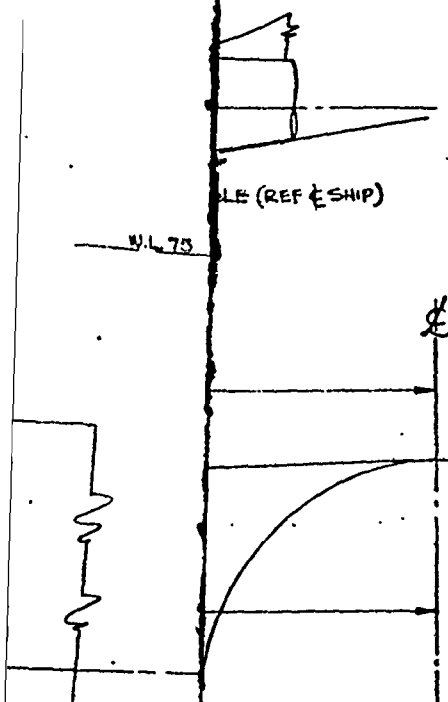

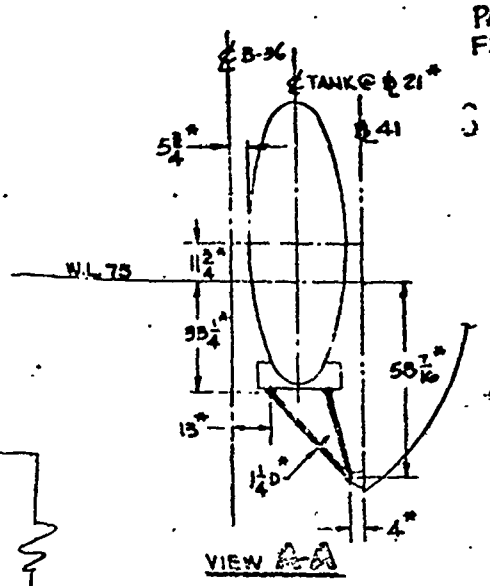
NOTE:

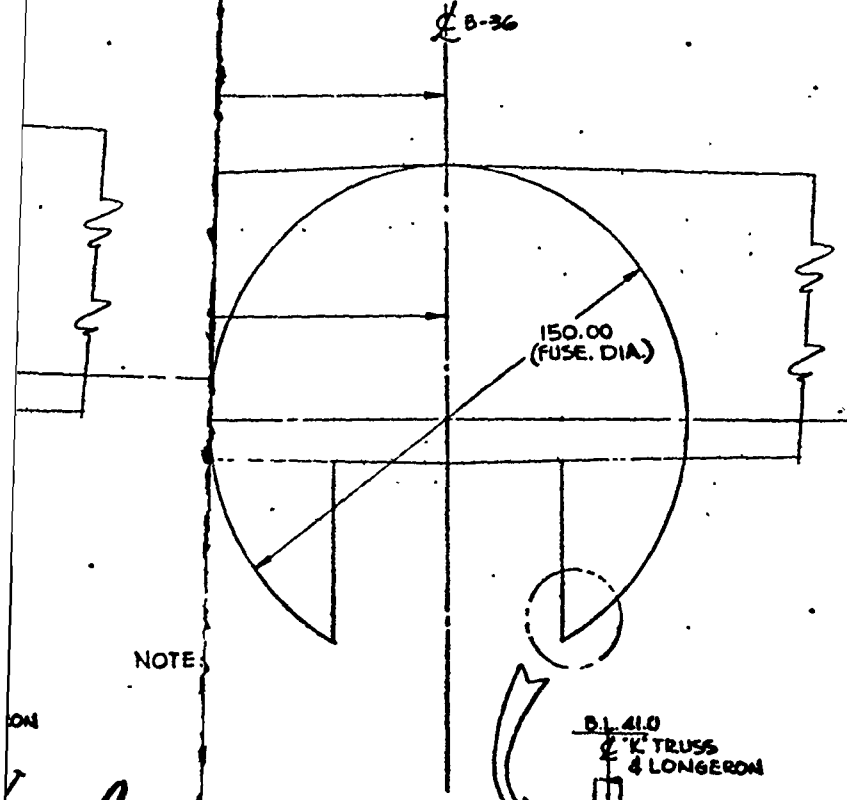


TYPICAL LONGERON SECTION

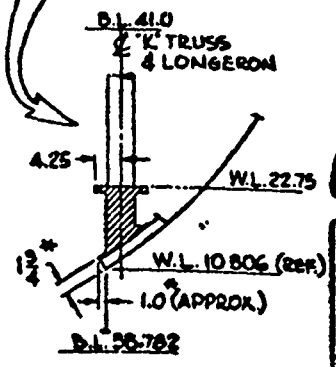NOTE: DIMENSIONS MARKED * ARE SCALED FROM VARIOUS LAYOUTS AND ARE APPROXIMATE.

SECRET


CONFIDENTIAL


Convair
PRELIMINARY DESIGN DRAWING

- LAYOUT -
CLEARANCE DIMENSIONS
FOR B-36 CARRIER & PARASITE

| BY H.W. ROSENKRAD | CHECKED | APPROVED | SCALE | DATE 7-15-5 |
|---|---|---|---|---|
| CONSOLIDATED VULTEE AIRCRAFT CORPORATION, FORT WORTH DIVISION, FORT WORTH, TEXAS | | | | FW 5410001 |

2

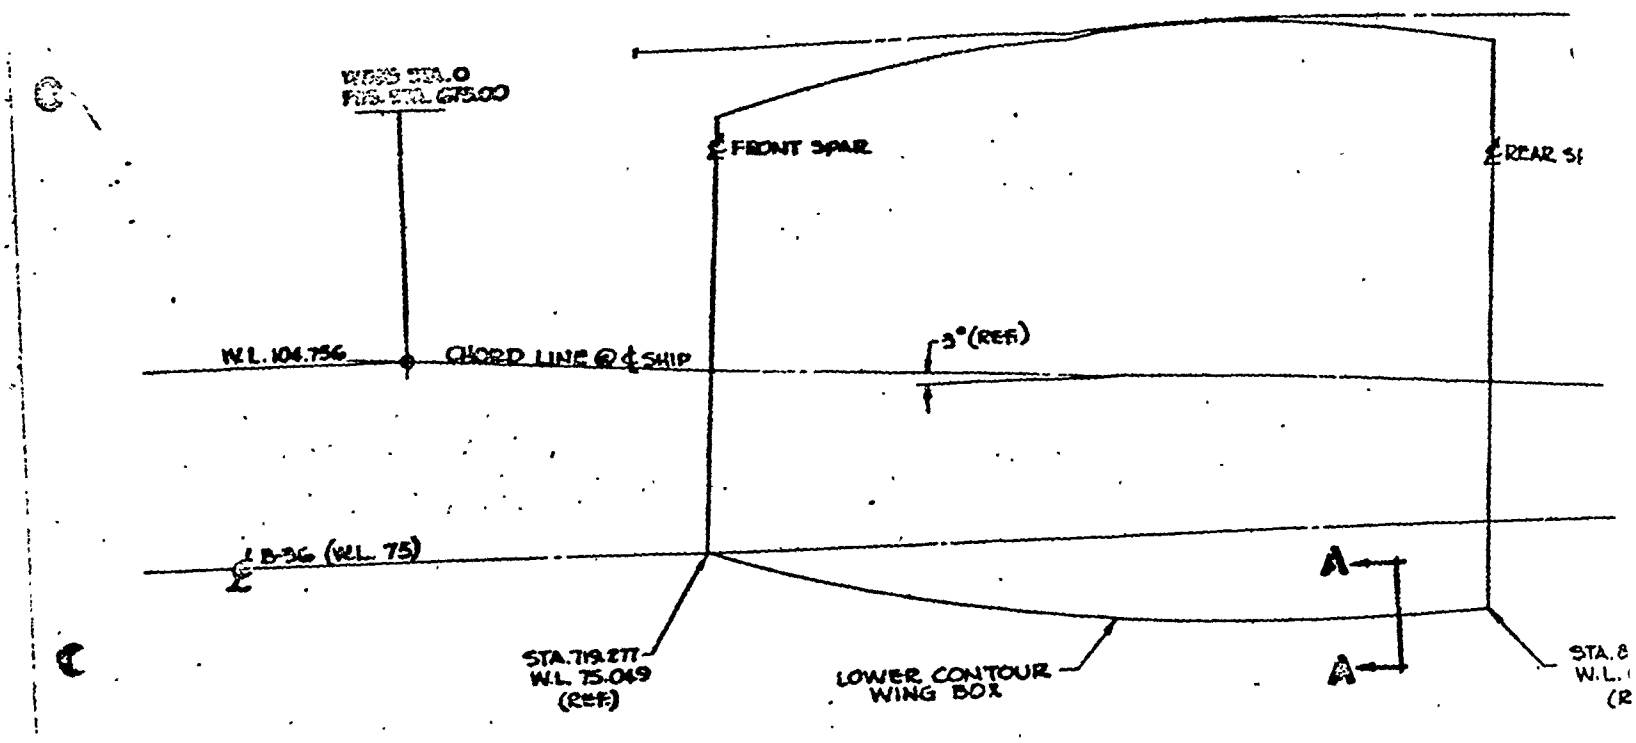

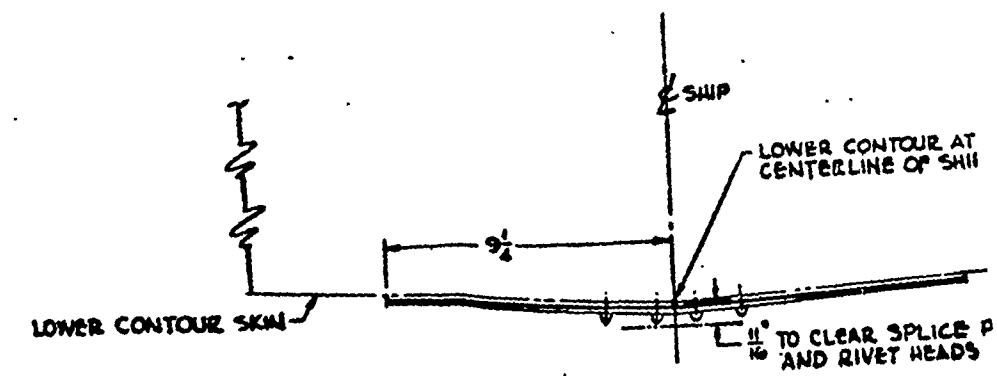
SECT A-A
(ESSENTIALLY CONSTANT ALONG
ENTIRE LOWER SURFACE OF WING BOX)

NT SPAR

℄ REAR SP

℄ REAR SPAR

3°(REF)

A

A

LOWER CONTOUR
WING BOX

STA. 8
W.L. G
(R

STA. 842.815
W.L. 62.425
(REF

ER CONTOUR AT
TERLINE OF SHIP

NTOUR SKIN

LEAR SPLICE PL
RIVET HEADS S

ONG
F WING BOX)

℄ SHIP


LOWER CONTOUR AT
CENTERLINE OF SHIP

9¼


11/16 TO CLEAR SPLICE PLATES
AND RIVET HEADS SAFELY

SECT. A-A
(ESSENTIALLY CONSTANT ALONG
ENTIRE LOWER SURFACE OF WING BOX)

2

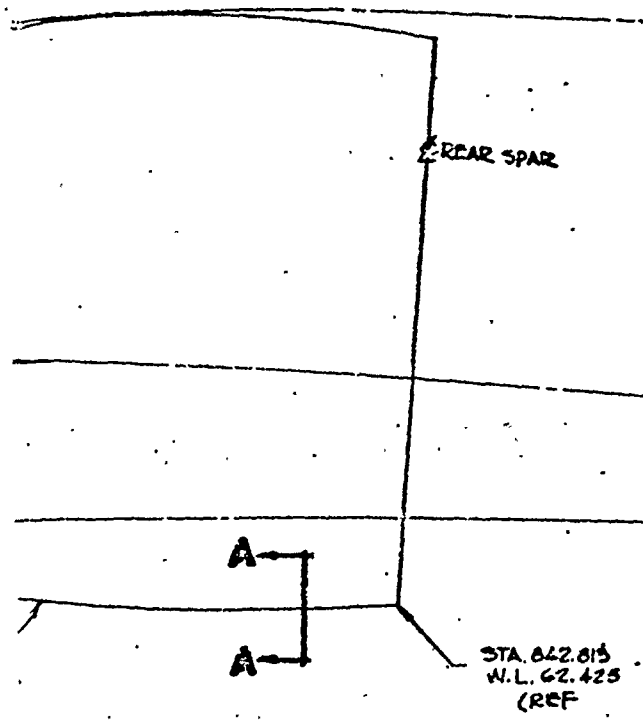


| WING STA<br>SPAN<br>AT CENTE<br>(IN PLANE | |
|---|---|
| STATION (N) UPPER | UPPER ORDINAT |
| .050 | 5.31 |
| 1.334 | 8.95 |
| 2.604 | 11.10 |
| 5.132 | 14.20 |
| 10.175 | 18.79 |
| 15.204 | 22.30 |
| 20.229 | 25.37 |
| 30.270 | 30.34 |
| 40.301 | 34.8 |
| F.SPAR 48.321 | 37. |
| 50.325 | 38.42 |
| 60.343 | 41.44 |
| 80.366 | 46.50 |
| 100.373 | 49.68 |
| 120.368 | 51.61 |
| 140.352 | 52.09 |
| 160.329 | 51.47 |
| R.SPAR 172.312 | 50.64 |
| 200.266 | 47.61 |
| 240.199 | 40.98 |
| 280.131 | 32.10 |
| 320.071 | 21.47 |
| 360.025 | 10.16 |
| 380.011 | 4.86 |
| 400.000 | .0 |

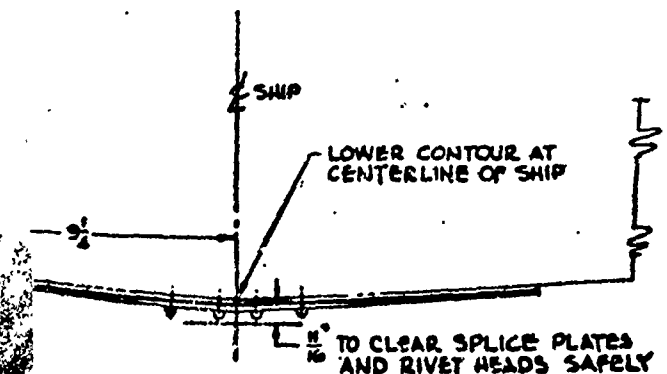


SECT. A-A
(ESSENTIALLY CONSTANT ALONG ENTIRE LOWER SURFACE OF WING BOX)

Convair
PRELI
LAYO
LOWE


## WING STATION ORDINATES
## SPAN STATION *0
## AT CENTERLINE OF SHIP
## (IN PLANE OF SYMMETRY)


| STATION (IN.) UPPER | UPPER ORDINATE (IN) | STATION (IN.) LOWER | LOWER ORDINATE (IN.) |
|---|---|---|---|
| .050 | 5.318 | .0 | -.0 |
| 1.334 | 8.956 | 1.216 | - 5.654 |
| 2.604 | 11.100 | 2.444 | - 6.927 |
| 5.132 | 14.206 | 4.915 | - 9.148 |
| 10.175 | 18.793 | 9.879 | -13.172 |
| 15.204 | 22.369 | 14.854 | -15.993 |
| 20.229 | 25.378 | 19.835 | -18.311 |
| 30.270 | 30.543 | 29.605 | -22.099 |
| 40.501 | 34.814 | 39.782 | -25.167 |
| F.SPAR 48.321 | 37.745 | F.SPAR 47.768 | -27.245 |
| 50.325 | 38.421 | 49.766 | -27.716 |
| 60.343 | 41.448 | 59.753 | -29.835 |
| 80.366 | 46.307 | 79.739 | -33.041 |
| 100.373 | 49.681 | 99.736 | -35.155 |
| 120.368 | 51.615 | 119.743 | -36.037 |
| 140.352 | 52.092 | 139.758 | -35.742 |
| 160.329 | 51.471 | 159.760 | -34.491 |
| R.SPAR 172.312 | 50.647 | R.SPAR 171.795 | -33.385 |
| 200.266 | 47.612 | 199.833 | -30.015 |
| 240.199 | 40.986 | 239.885 | -23.793 |
| 280.131 | 32.106 | 279.933 | -16.287 |
| 320.071 | 21.471 | 319.978 | - 8.460 |
| 360.025 | 10.164 | 359.996 | - 1.721 |
| 380.011 | 4.883 | 380.000 | + .017 |
| 400.000 | .0 | 400.000 | .0 |


Convair
PRELIMINARY DESIGN DRAWING


LAYOUT- WING ORDINATES AND LOWER SURFACE CLEARANCE


FW-5410002

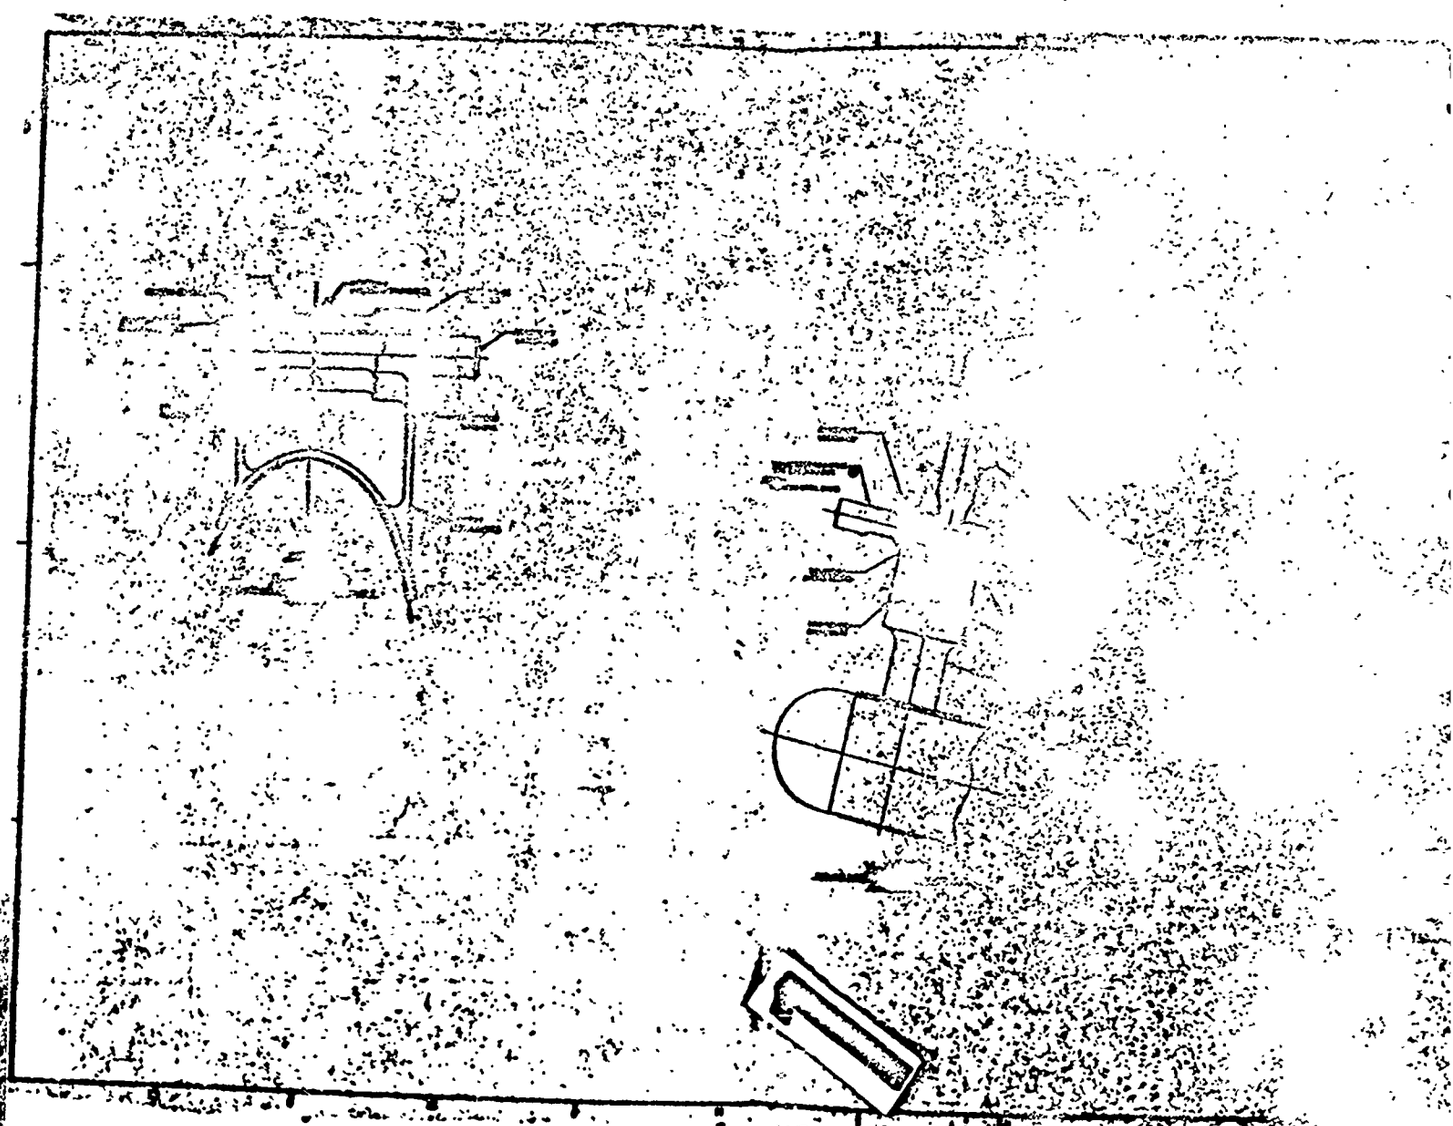


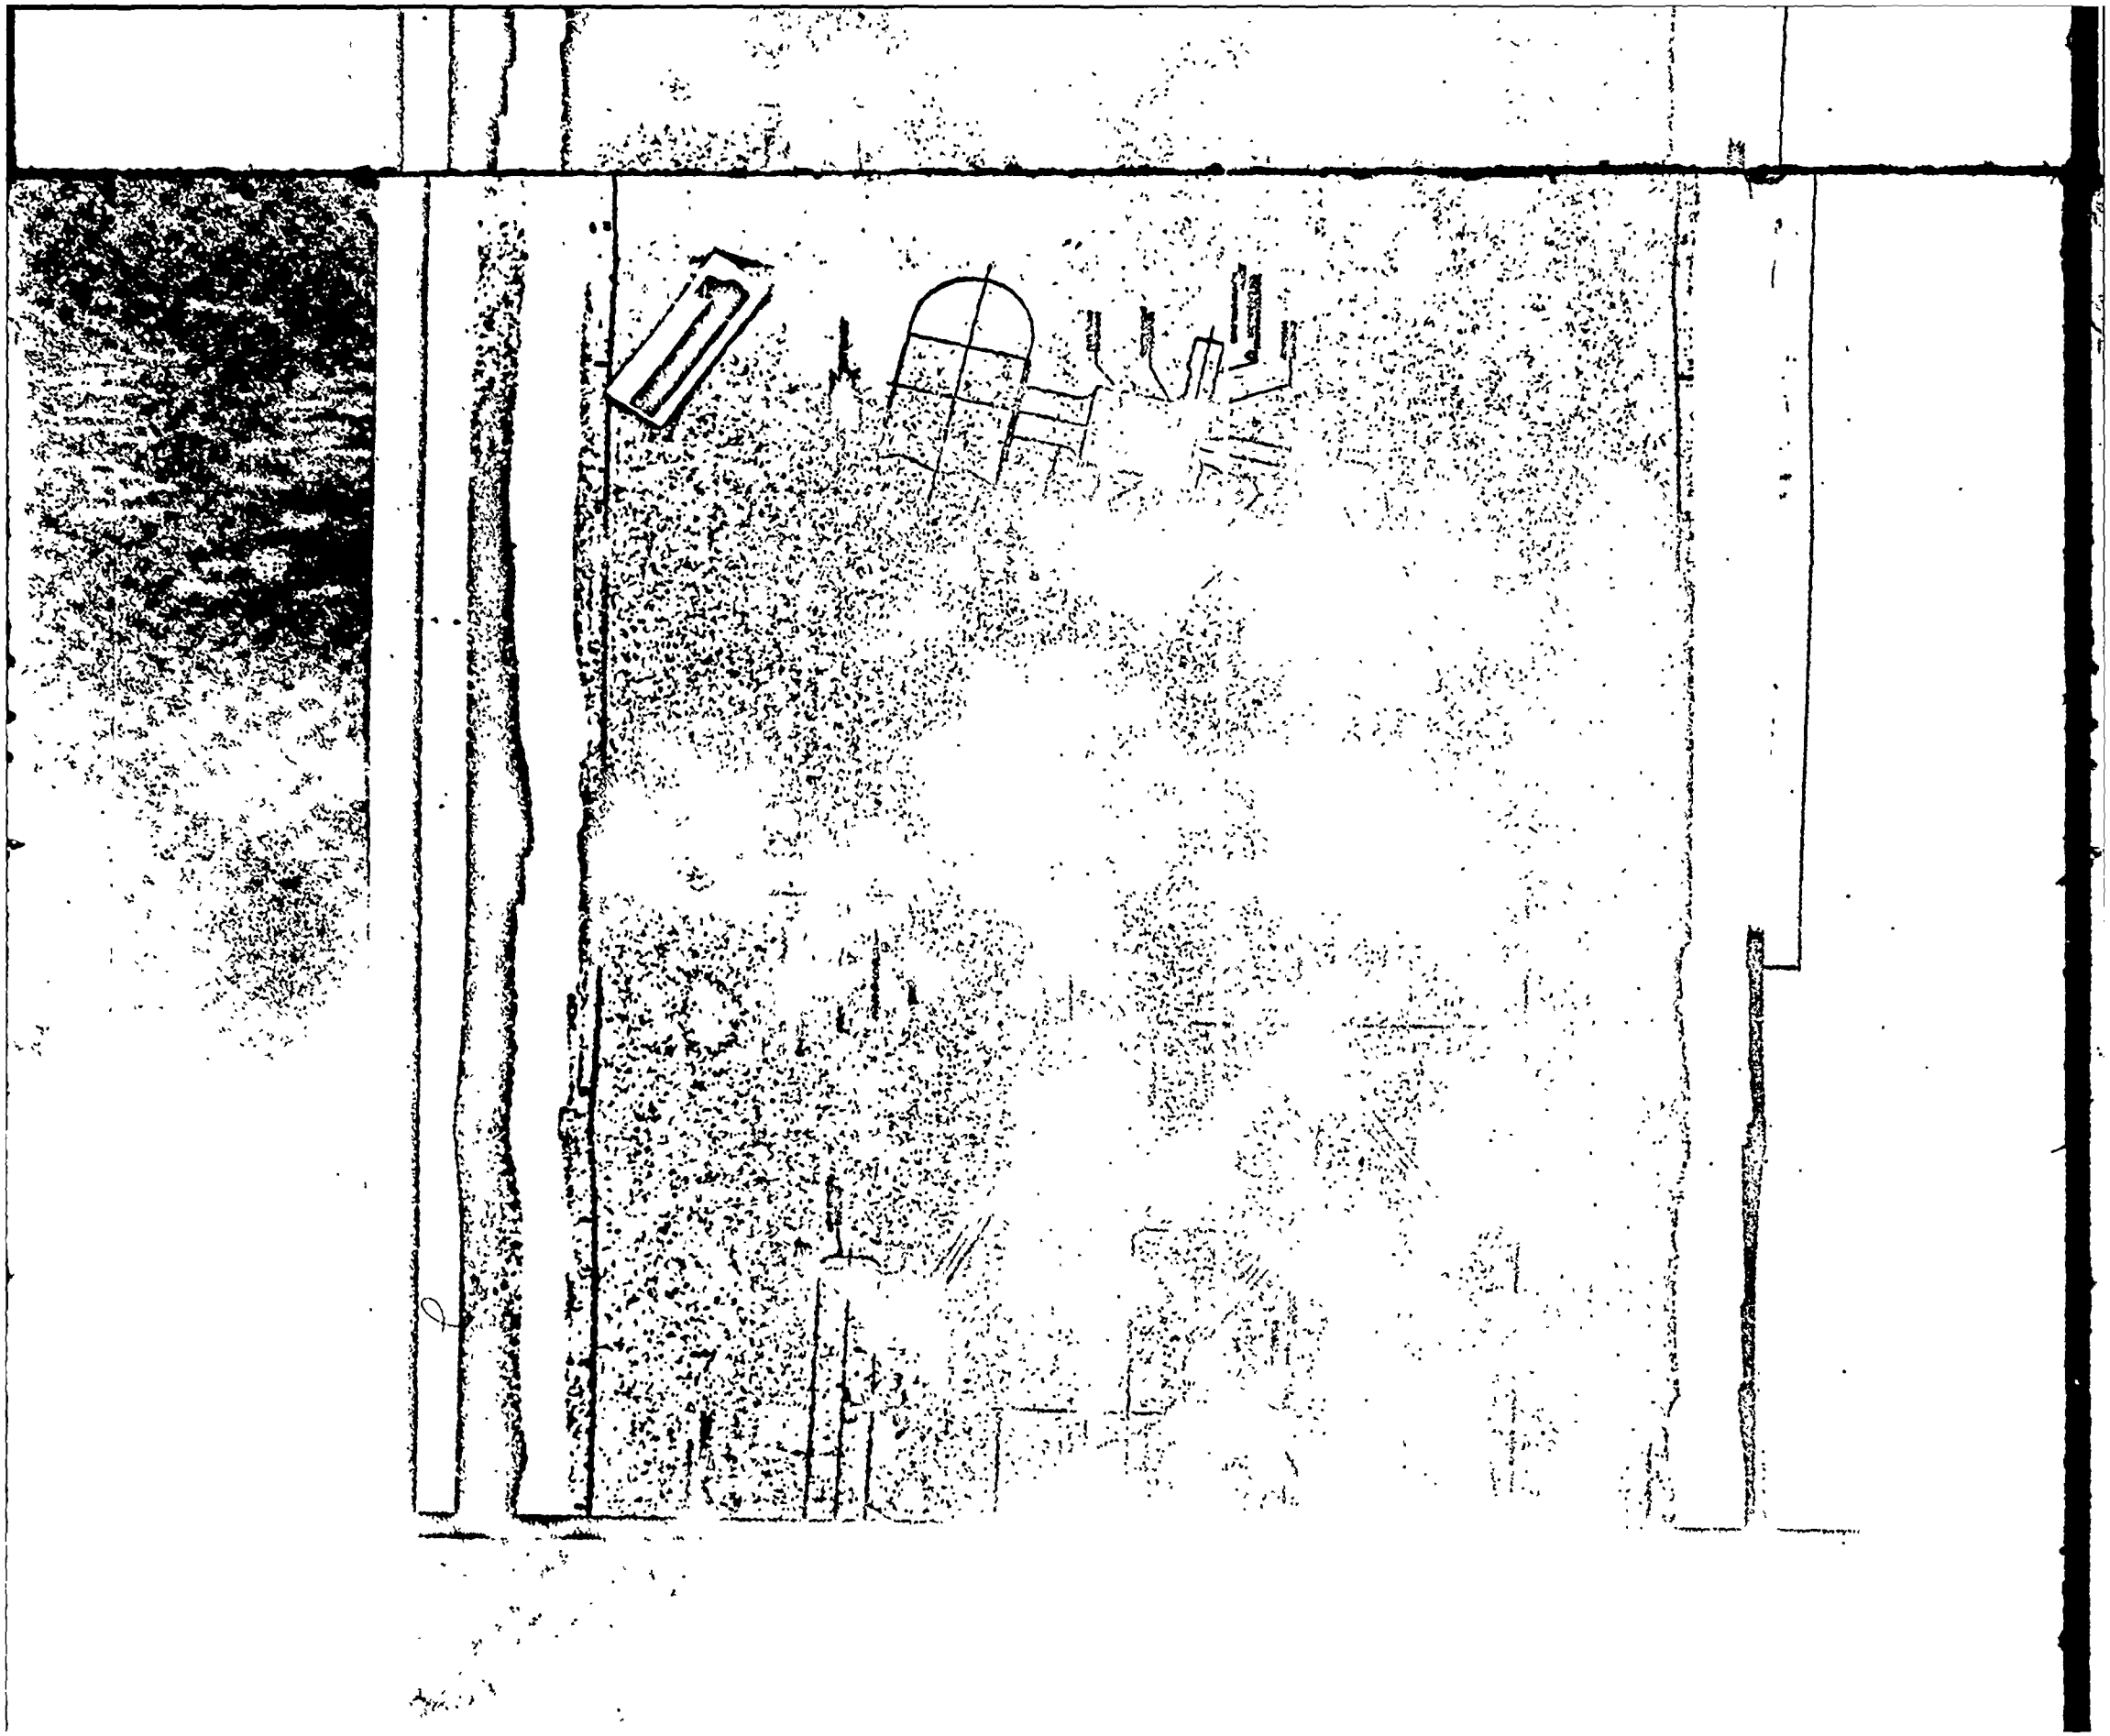


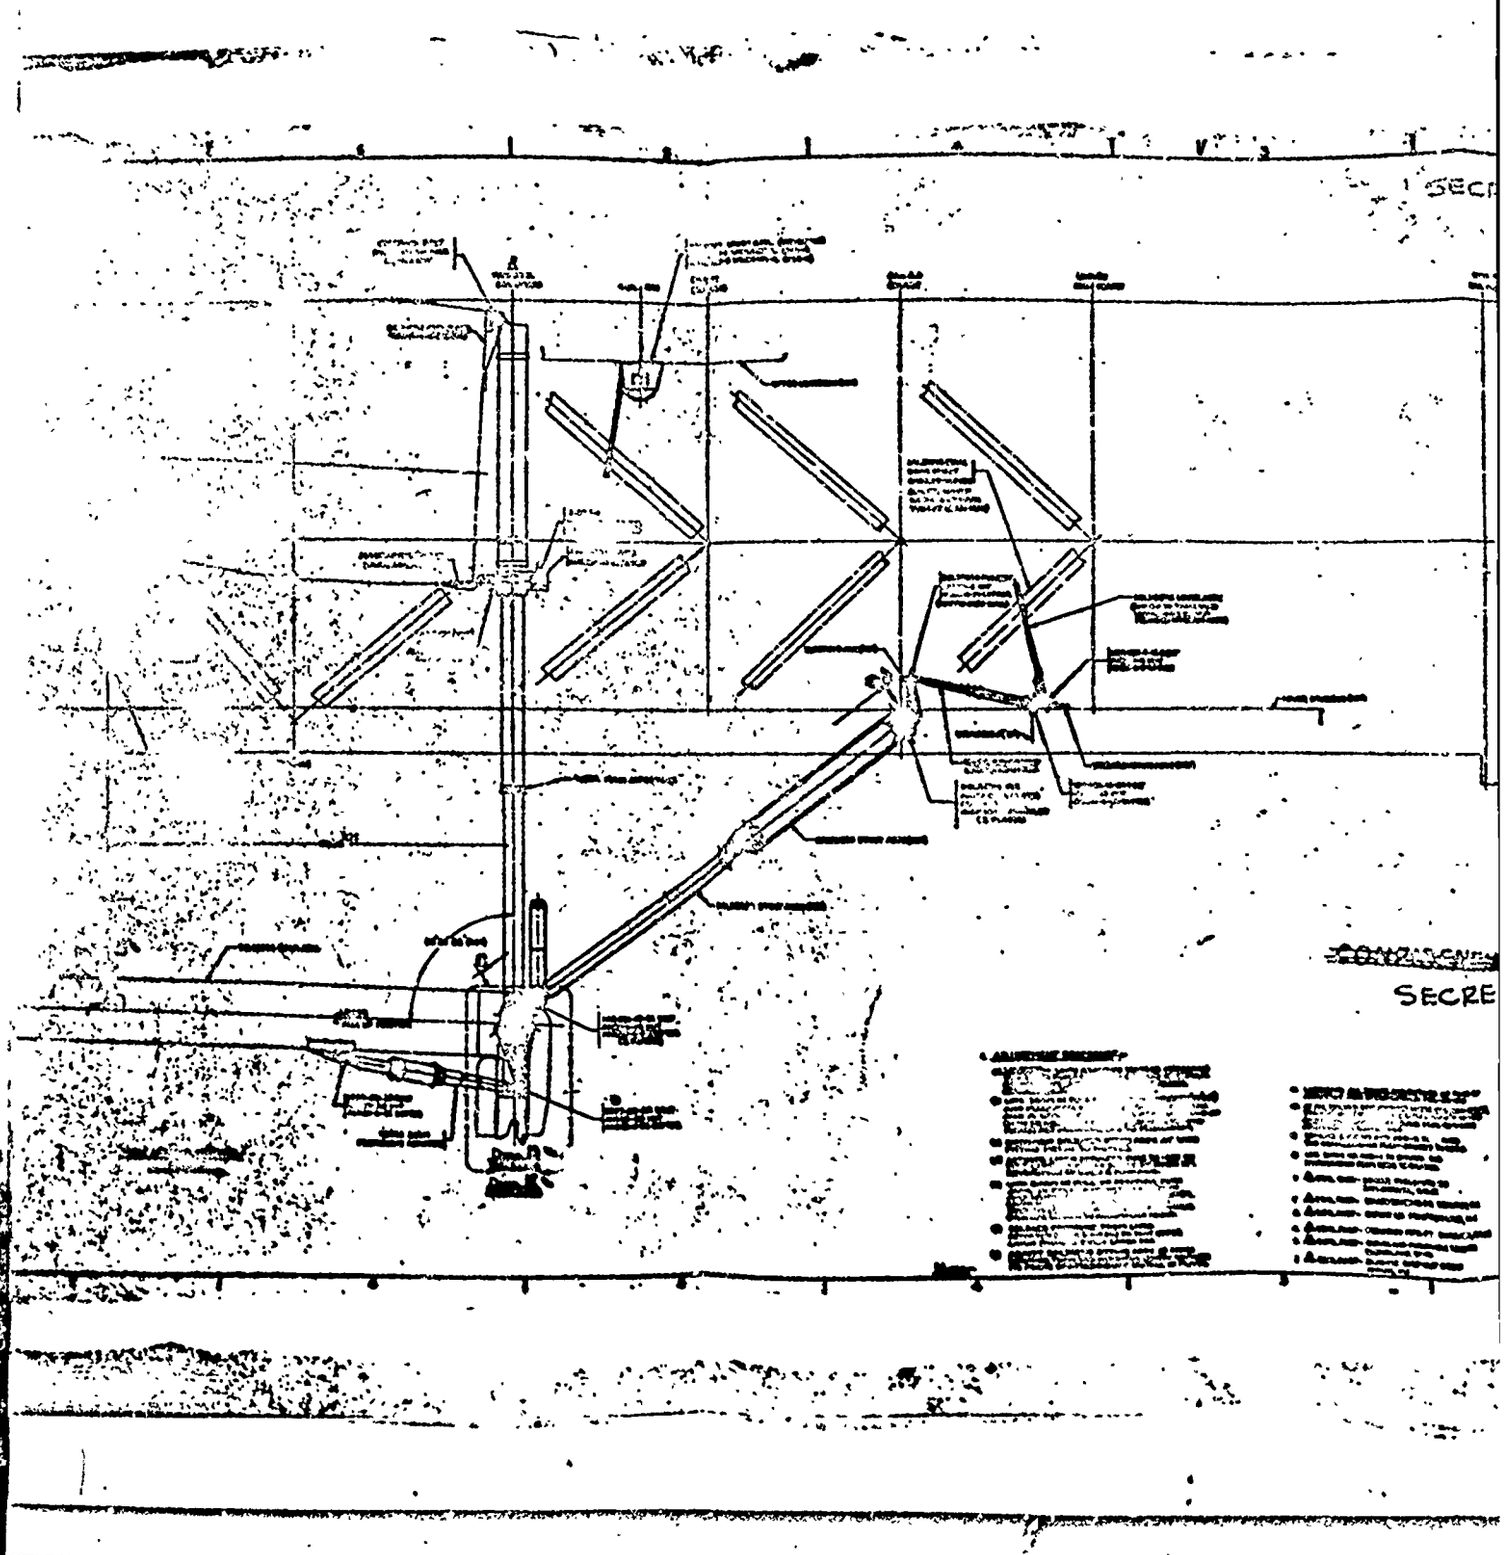
SECRE

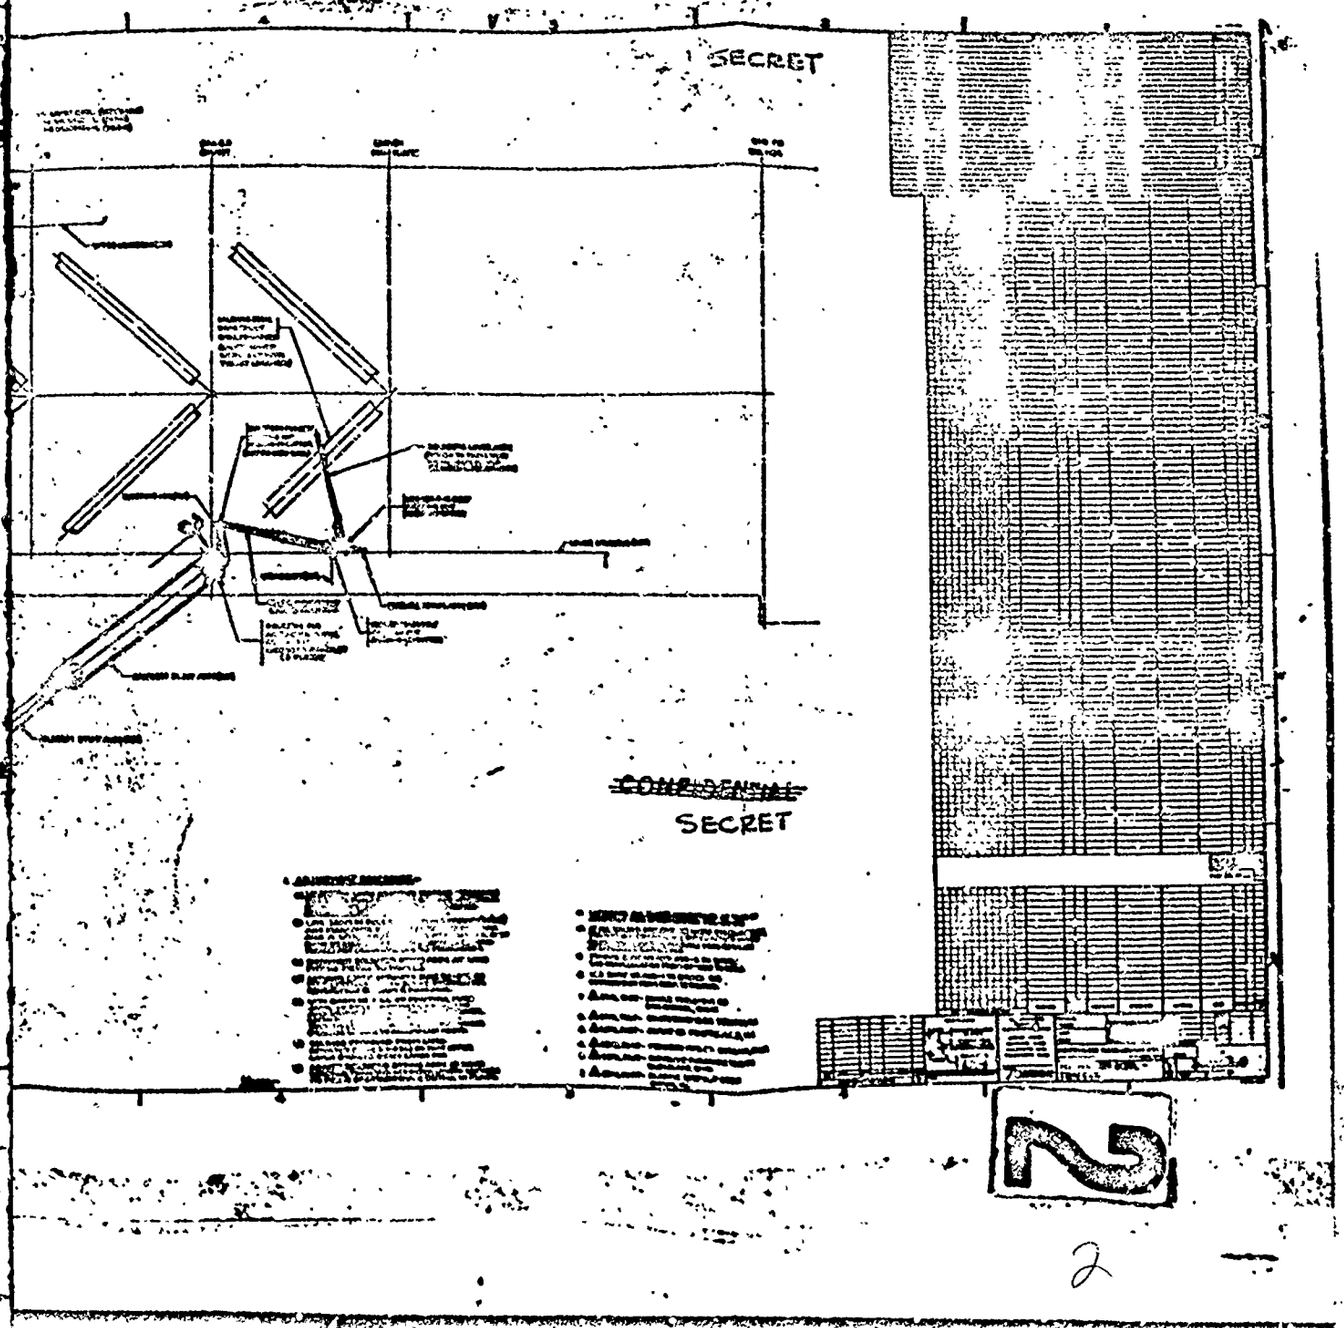

SECRET
SECRET
2

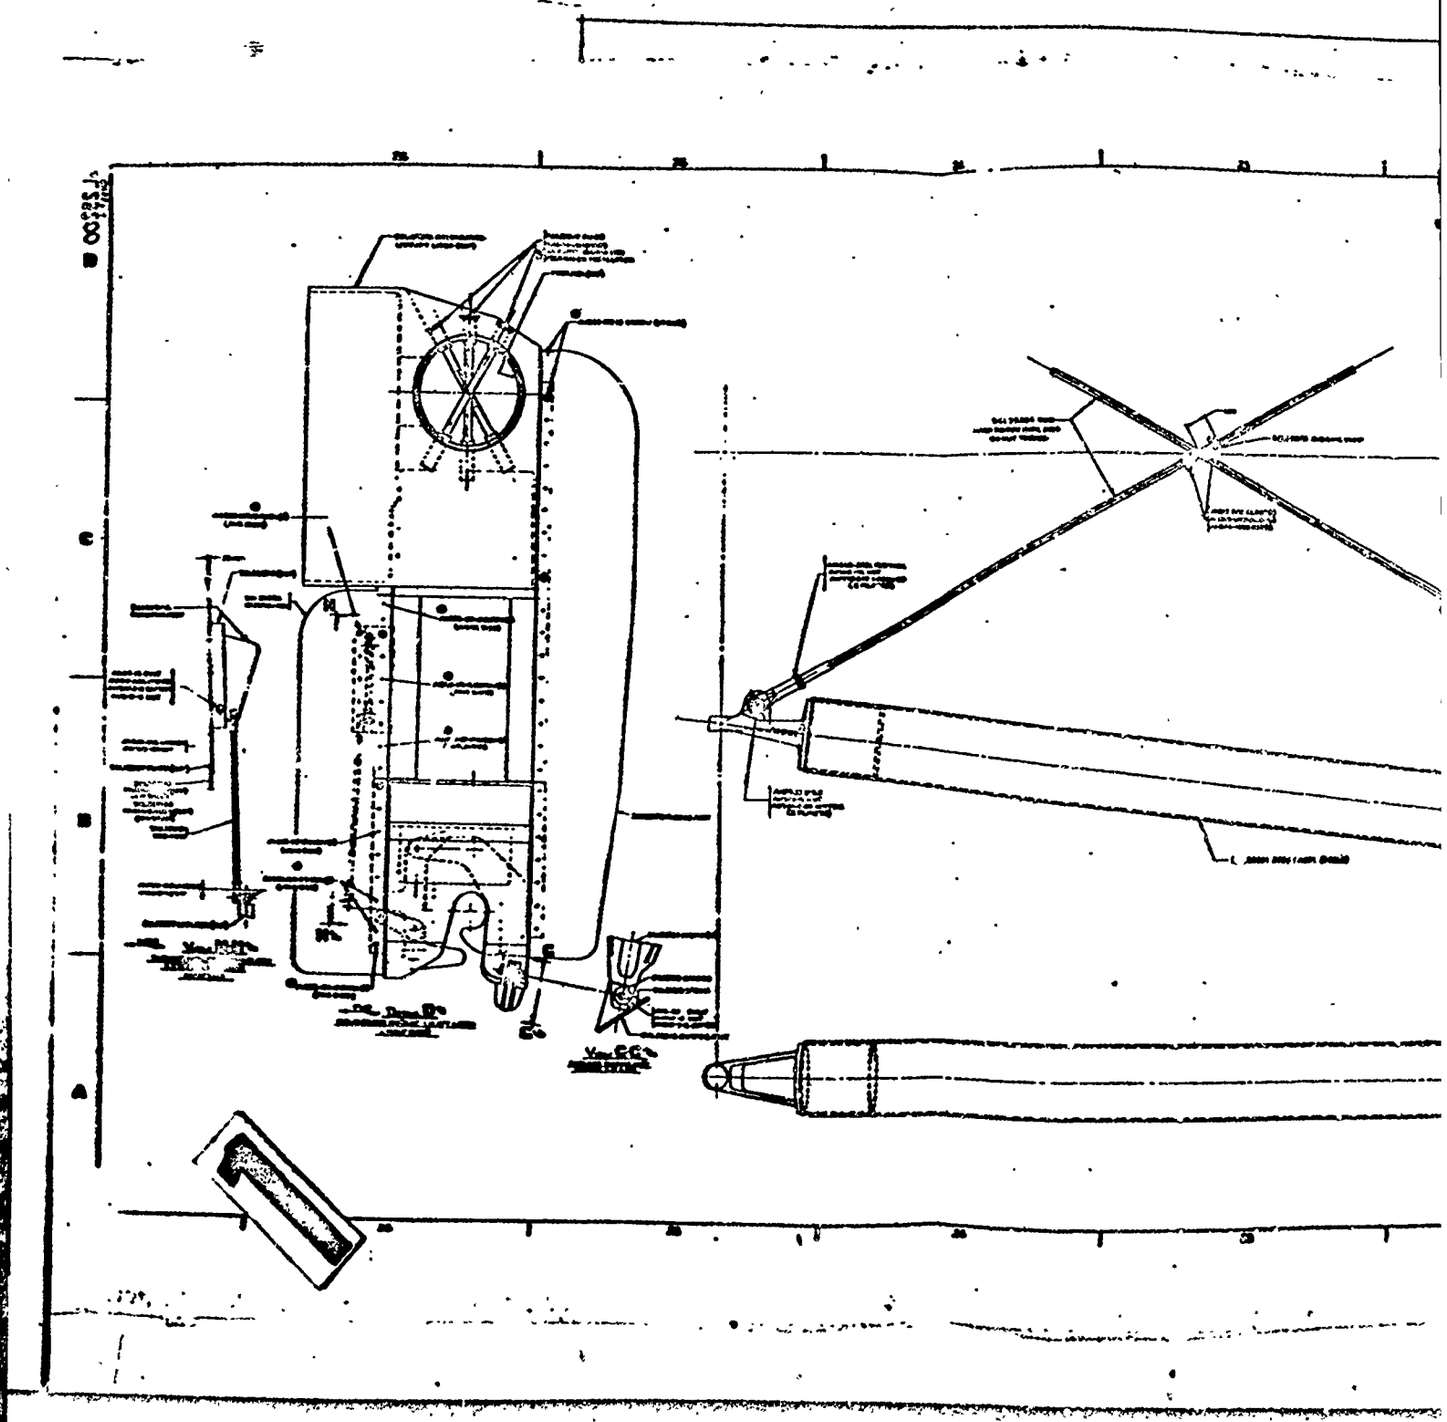

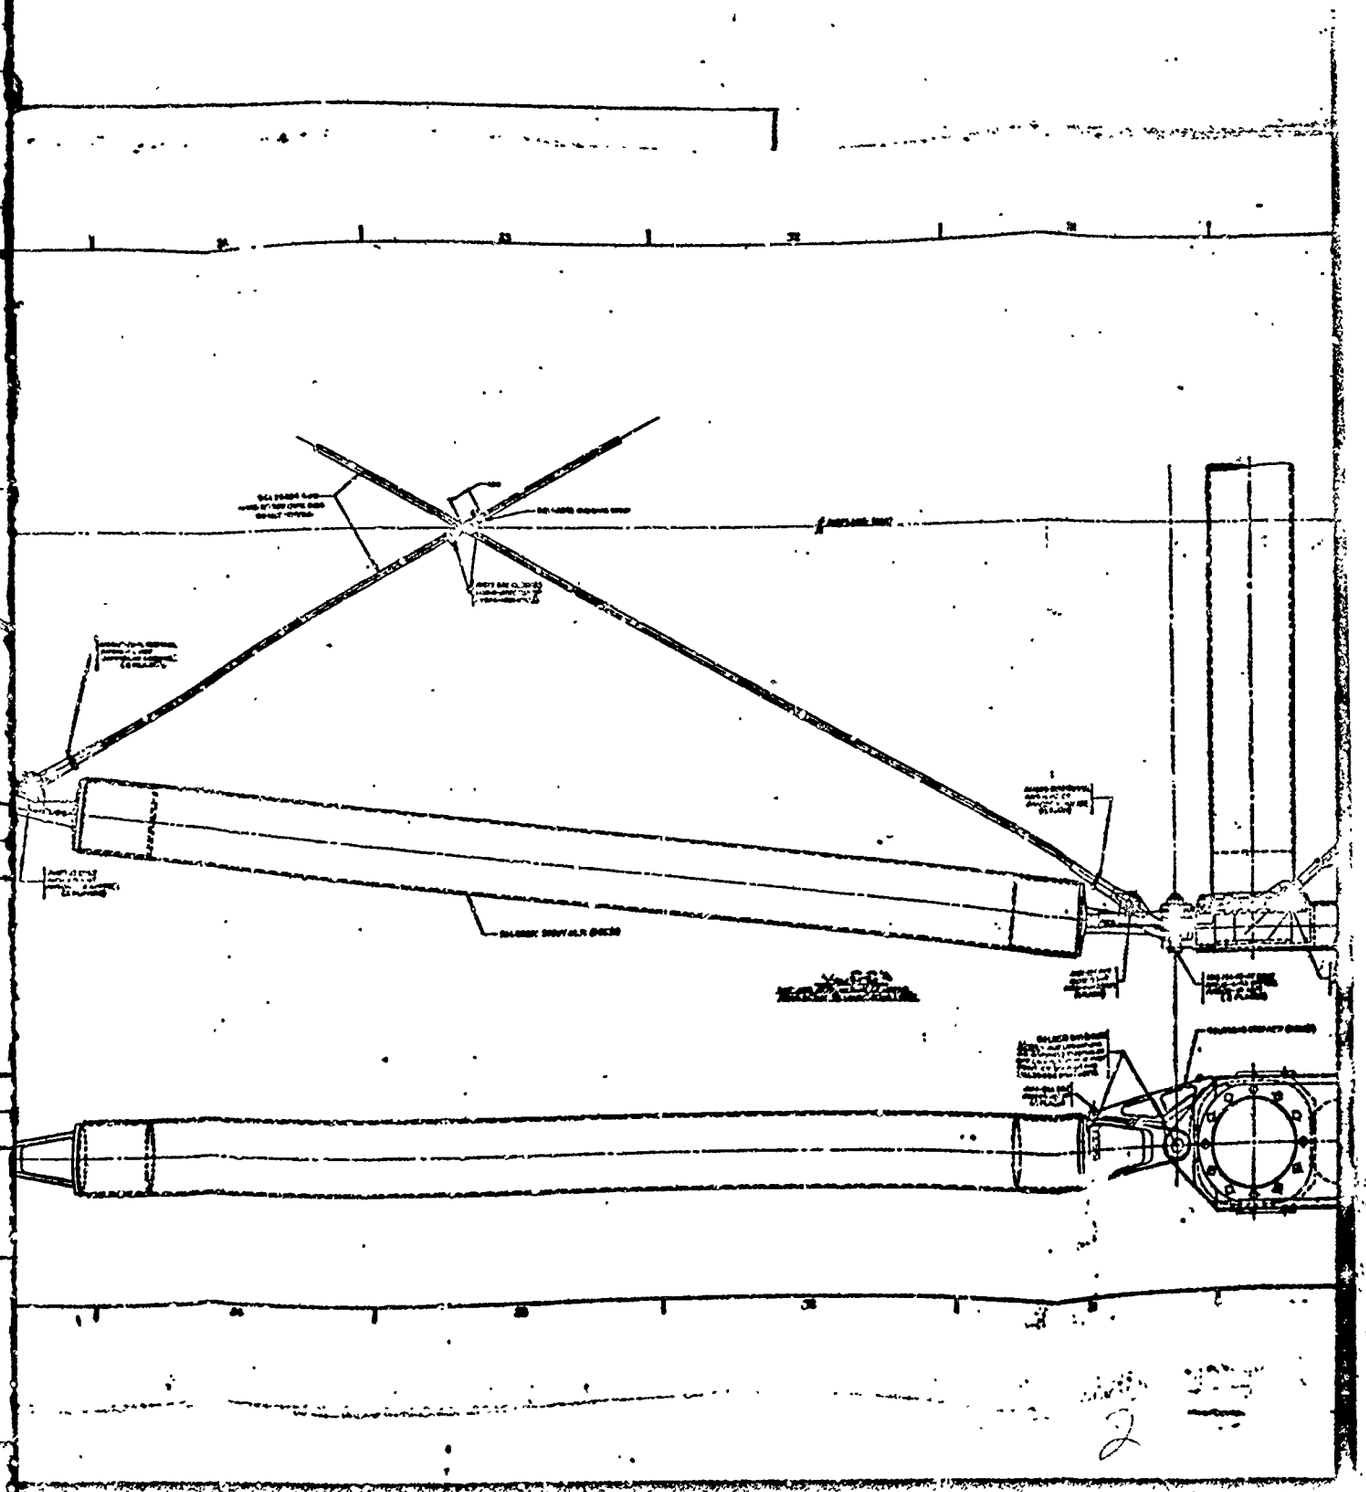


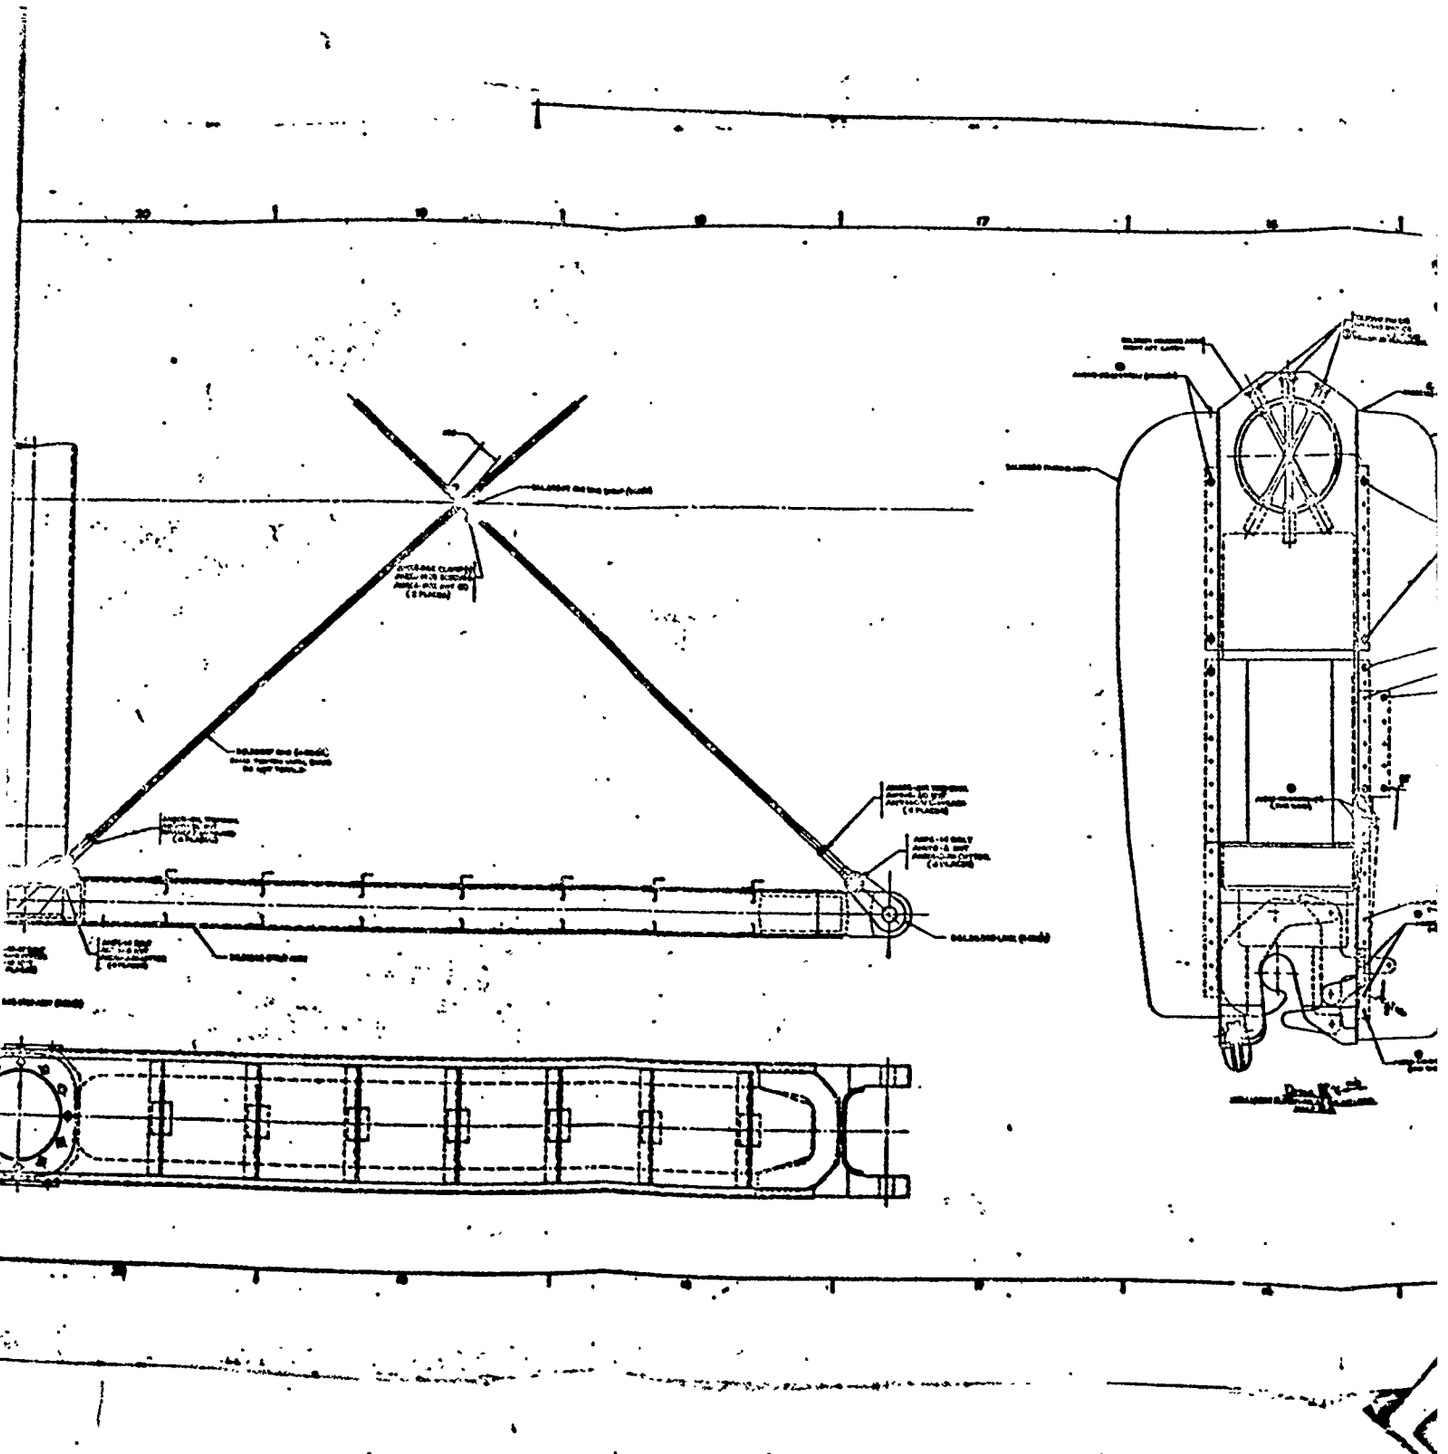



SECRET

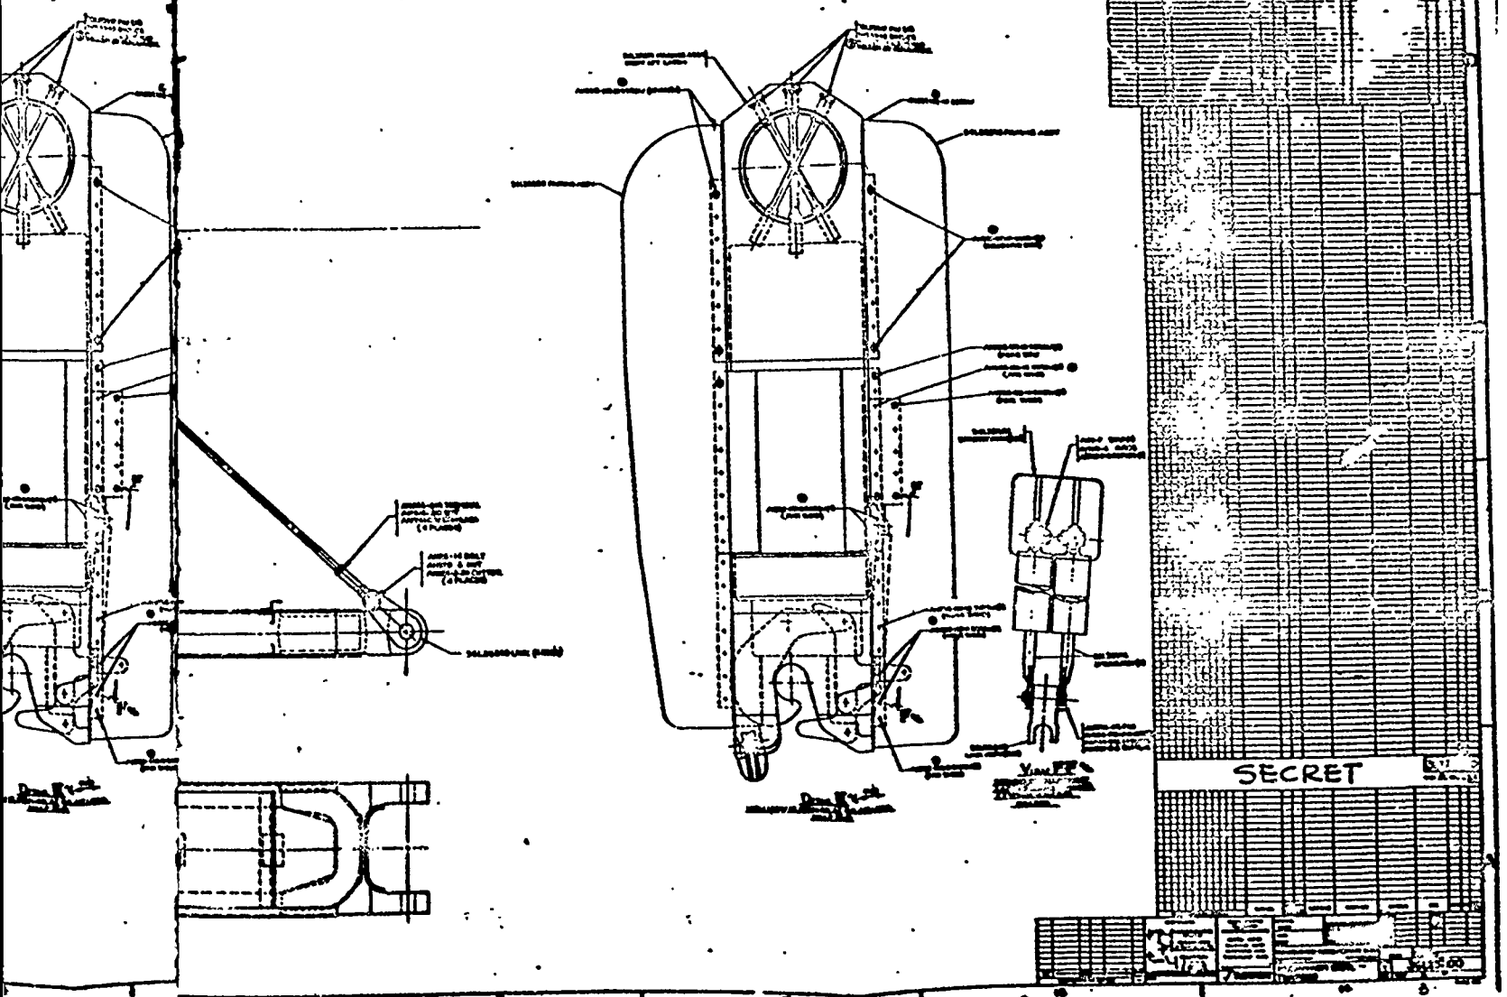


SECRET

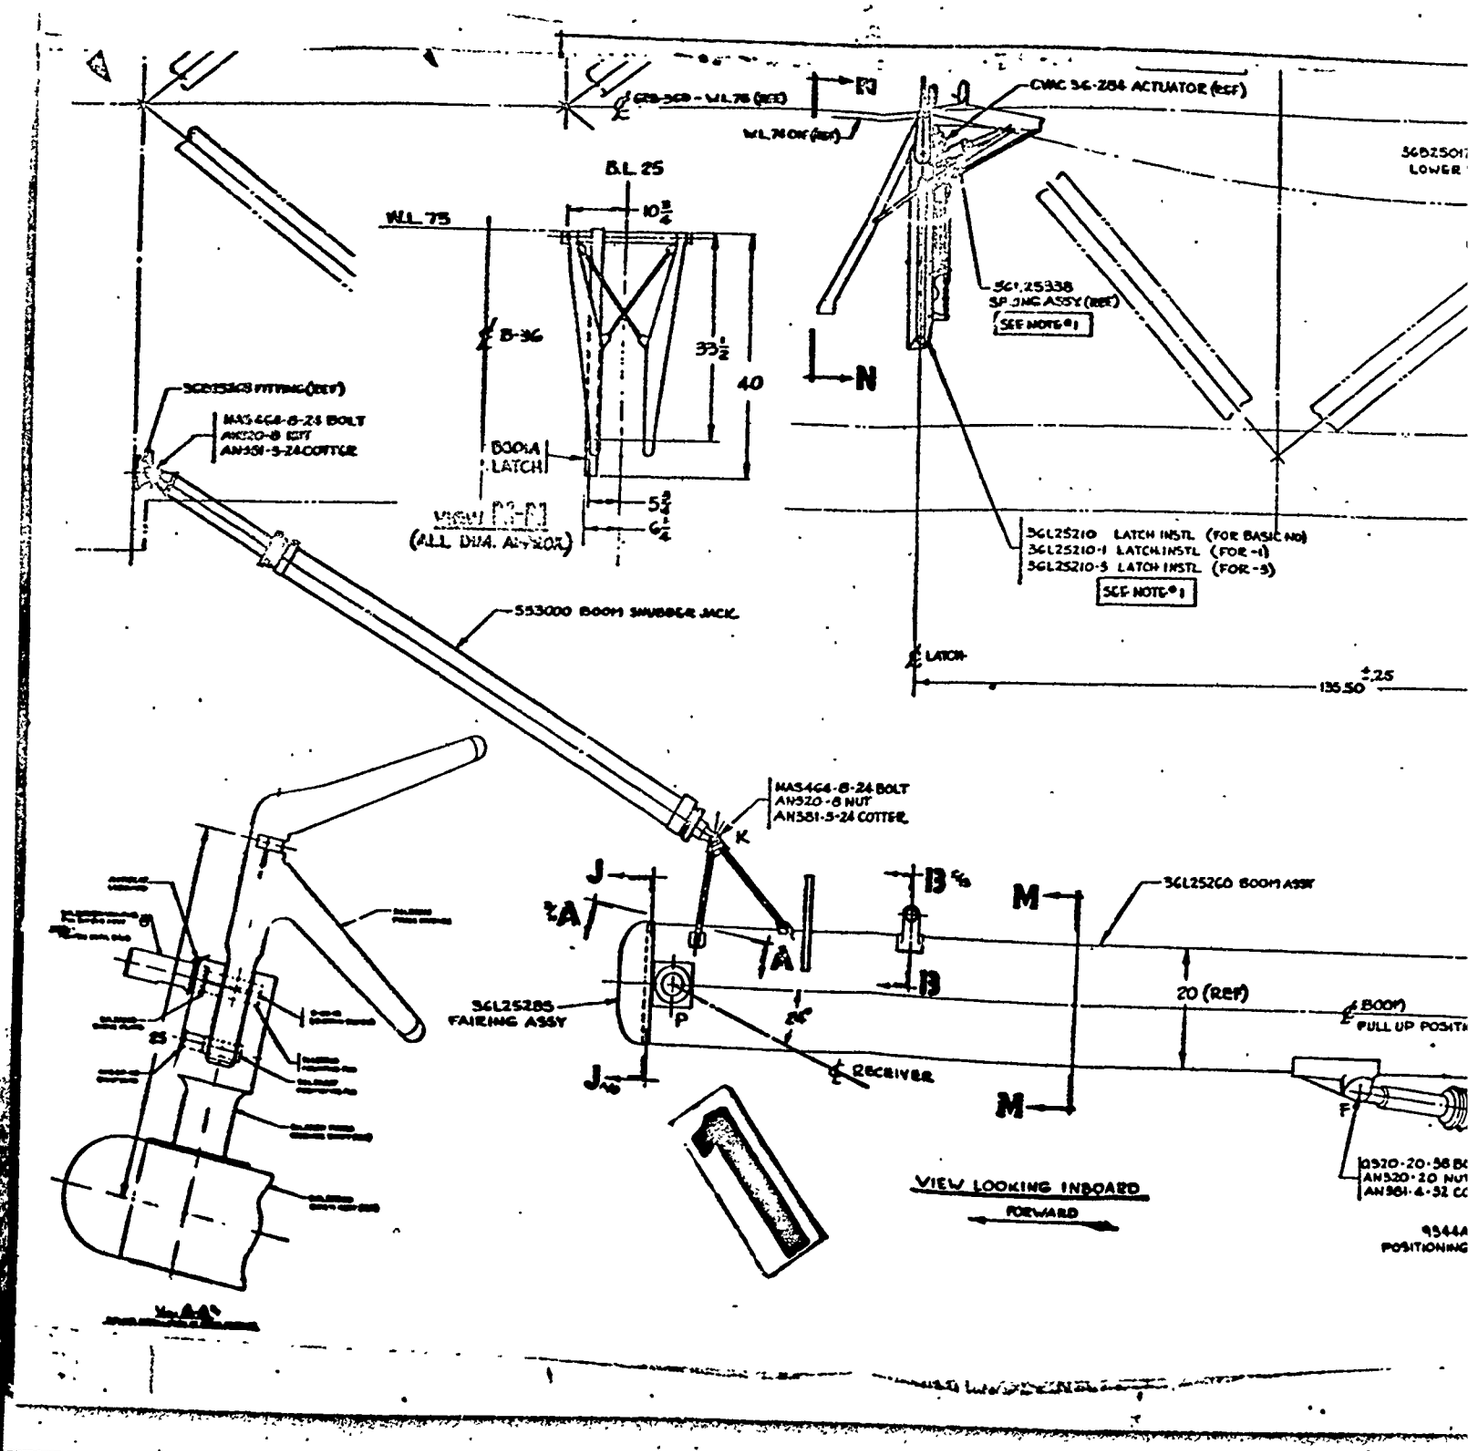

B.L. 25
W.L. 75
B-36
33½
40
10¾
5¾
6¼
BOOM LATCH
SECTION B-B
(ALL DIM. ARE FOR)
MAS464-8-24 BOLT
AN520-8 NUT
AN381-5-24 COTTER
553000 BOOM SNUBBER JACK
CWC 36-284 ACTUATOR (REF)
SEE NOTE #1
3GL25210 LATCH INSTL (FOR BASIC NO)
3GL25210-1 LATCH INSTL (FOR -1)
3GL25210-3 LATCH INSTL (FOR -3)
SEE NOTE #1
LATCH
135.50 ±.25
3GL25285 FAIRING ASSY
3GL25260 BOOM ASSY
20 (REF)
RECEIVER
VIEW LOOKING INBOARD
FORWARD

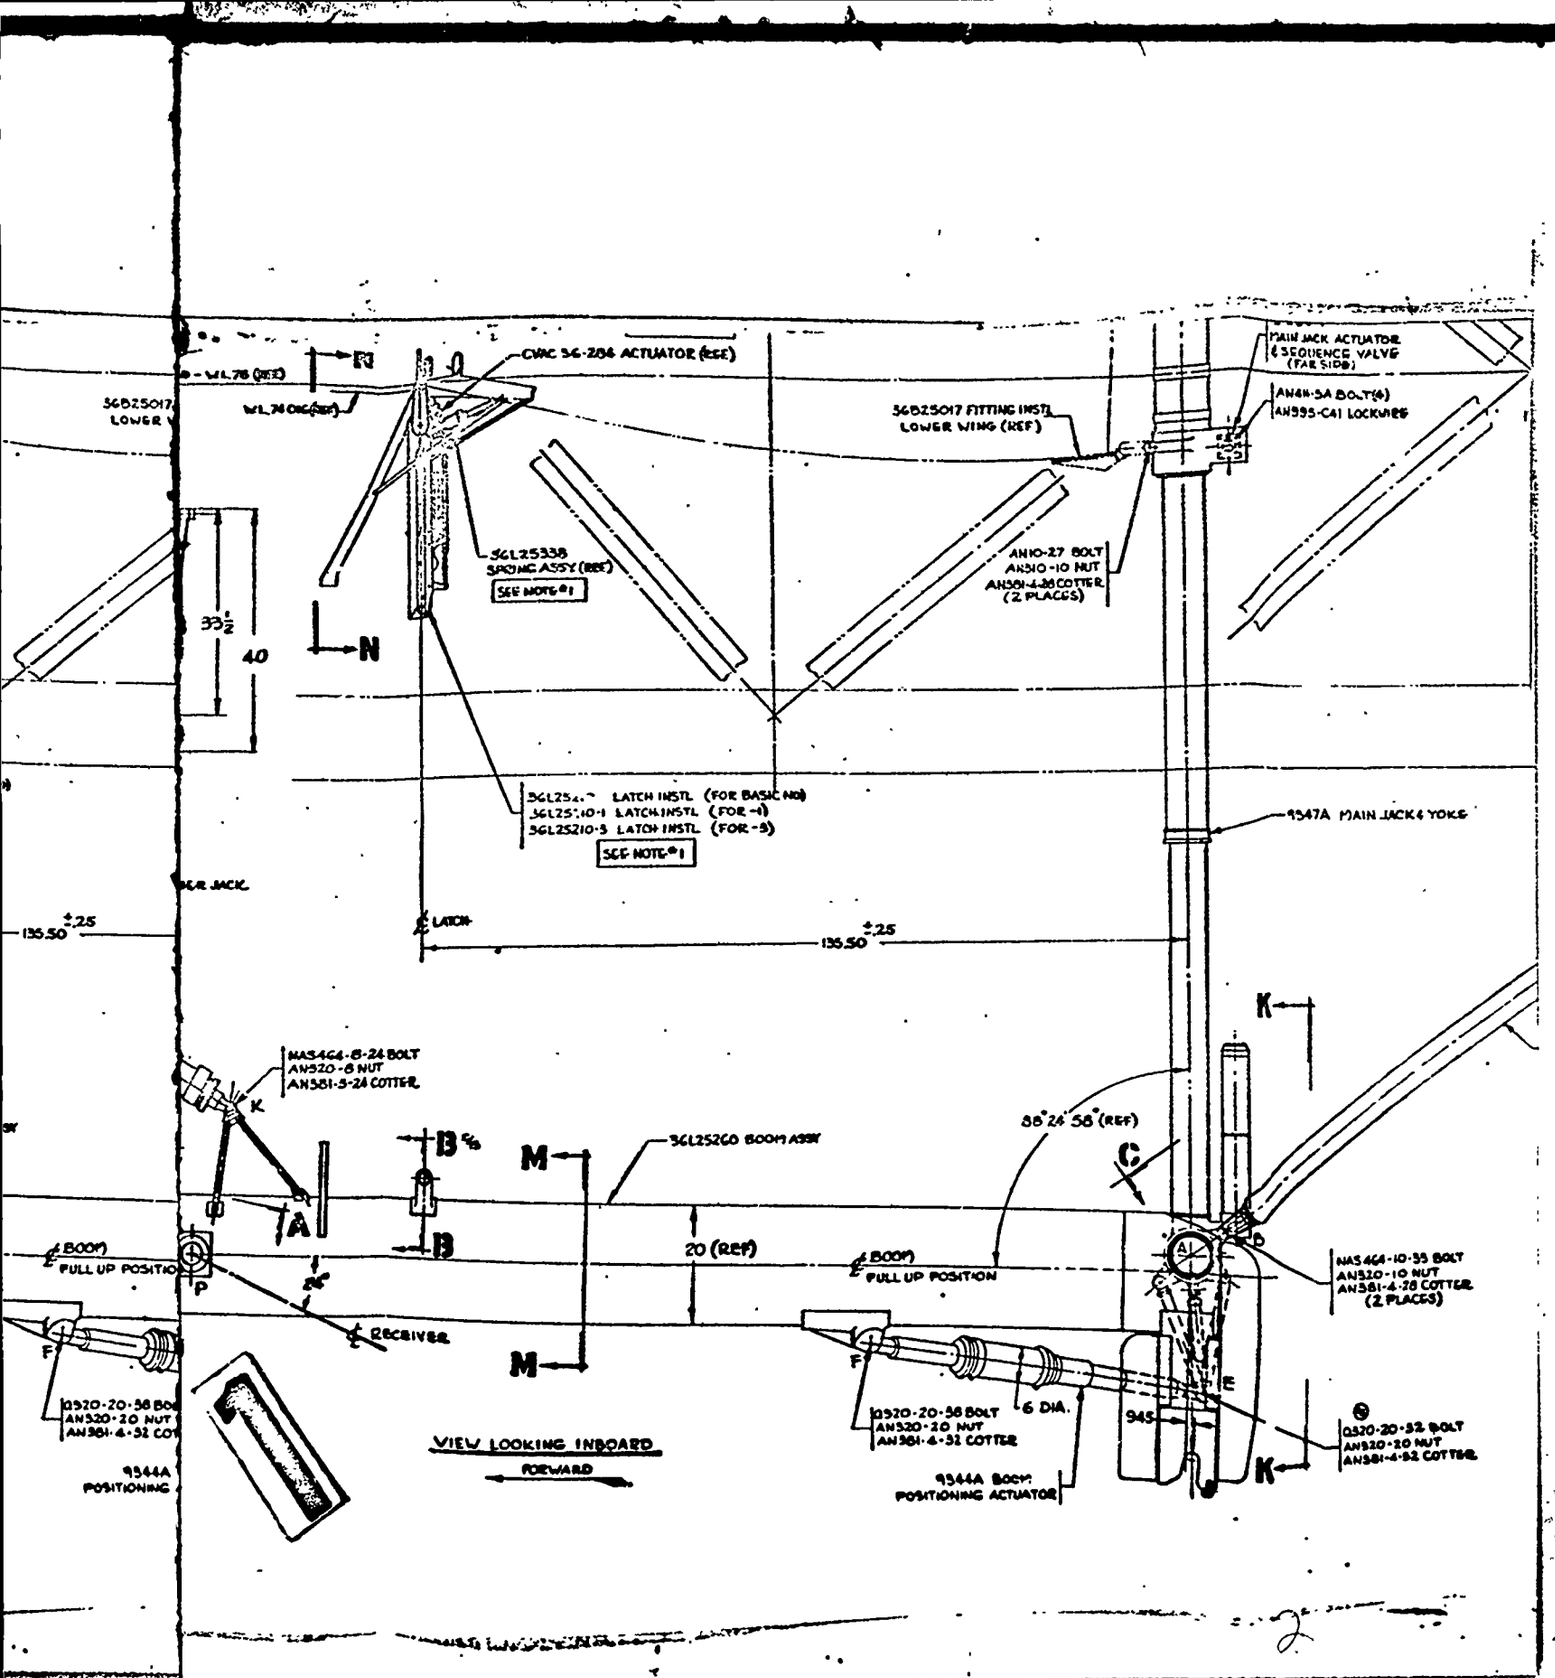
CVAC 56-206 ACTUATOR (REF)
56B25017 FITTING INSTL LOWER WING (REF)
MAIN JACK ACTUATOR & SEQUENCE VALVE (FAR SIDE)
AN4H-5A BOLT(6)
AN995-C41 LOCKWIRE
5GL25338 SPRING ASSY (REF)
SEE NOTE #1
AN10-27 BOLT
AN310-10 NUT
AN381-4-36 COTTER (2 PLACES)
33½
40
5GL25[illegible] LATCH INSTL (FOR BASIC NO)
5GL25[illegible]-1 LATCH INSTL (FOR -1)
5GL252[illegible]-3 LATCH INSTL (FOR -3)
SEE NOTE #1
9547A MAIN JACK & YOKE
135.50 ±.25
℄ LATCH
135.50 ±.25
MAS464-8-24 BOLT
AN320-8 NUT
AN381-3-24 COTTER
5GL25260 BOOM ASSY
88°24'58" (REF)
20 (REF)
℄ BOOM FULL UP POSITION
℄ RECEIVER
MAS464-10-33 BOLT
AN320-10 NUT
AN381-4-28 COTTER (2 PLACES)
AN320-20-38 BOLT
AN320-20 NUT
AN381-4-32 COTTER
6 DIA.
945
AN320-20-32 BOLT
AN320-20 NUT
AN381-4-32 COTTER
9544A BOOM POSITIONING ACTUATOR
VIEW LOOKING INBOARD
FORWARD

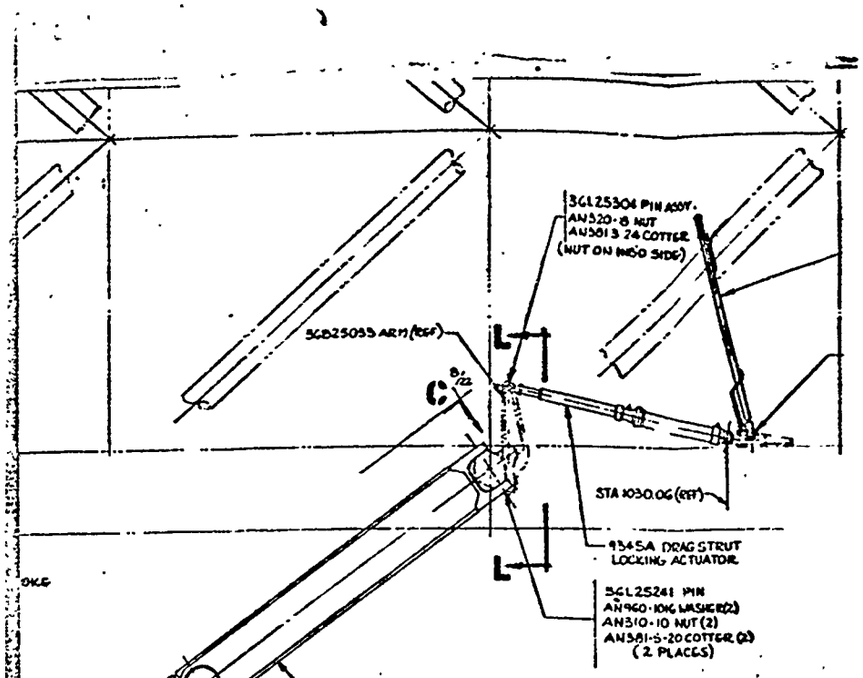


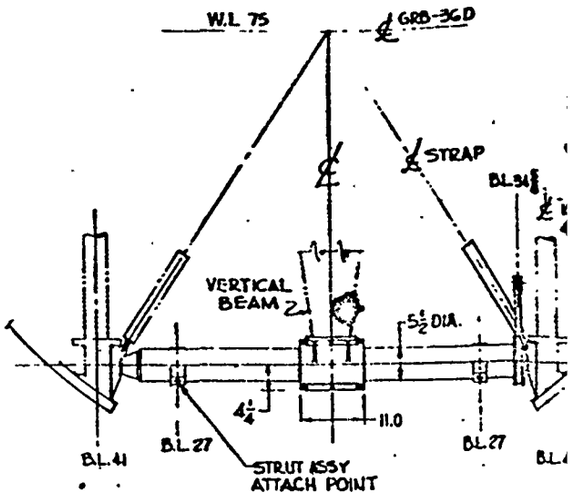

VIEW L-L

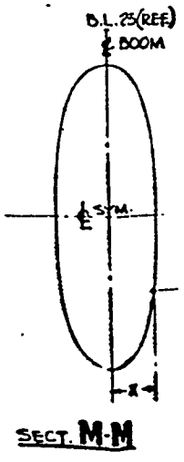


SECT. M-M

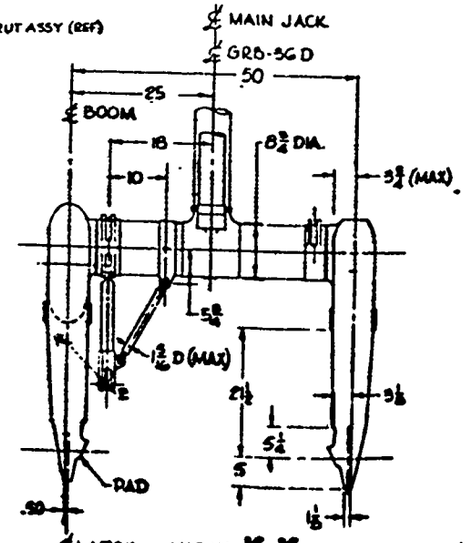



VIEW K-K
SHOWING CLEARANCES AT

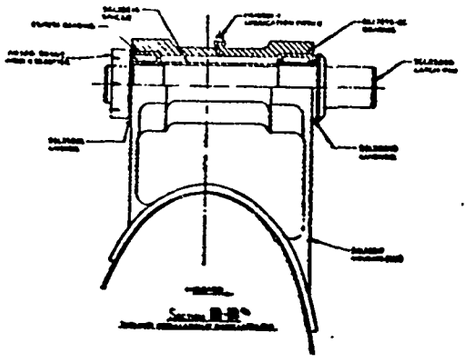


Section B-B


- olt latches

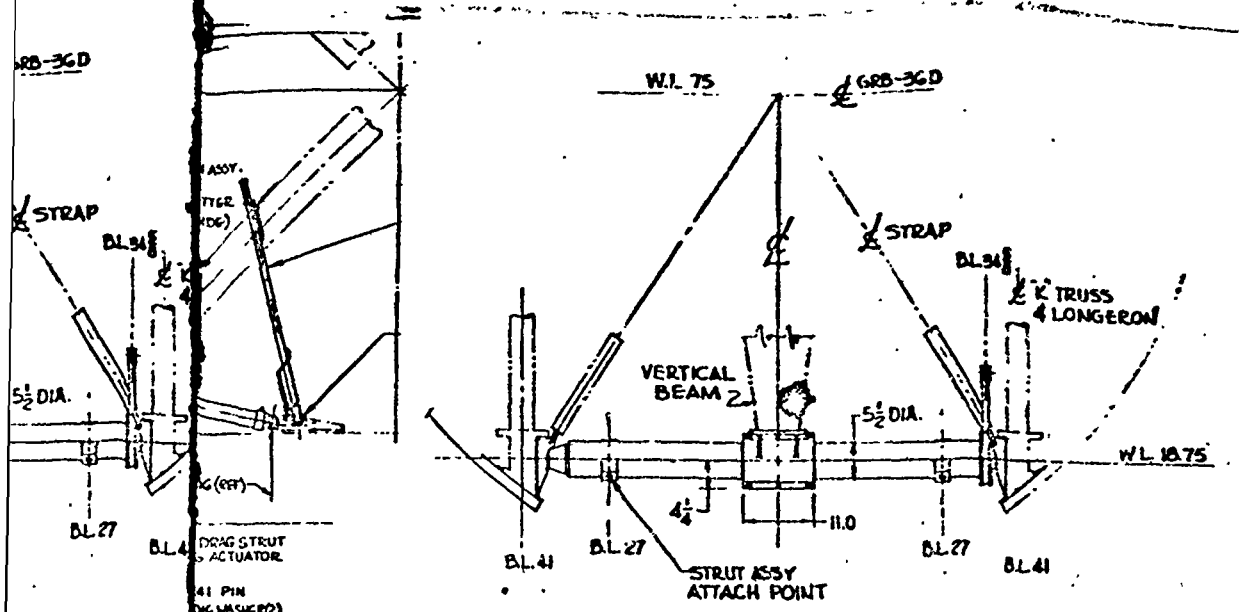



VIEW L-L

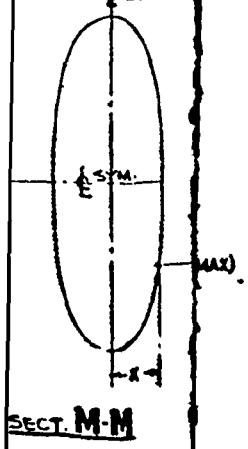


SECT. M-M

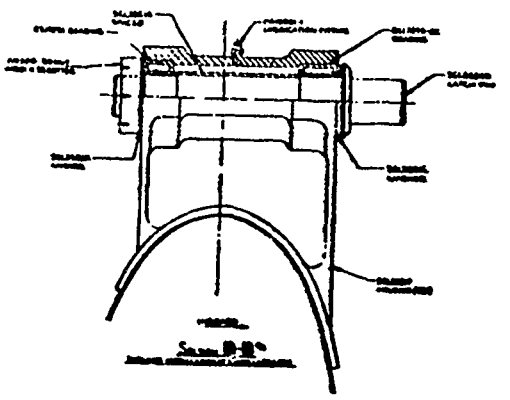

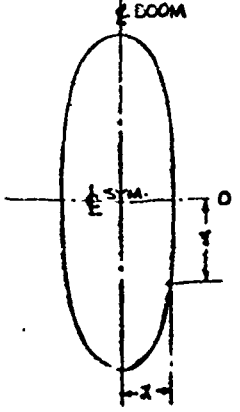


SECT. M-M

| BOOM ORDINATES | |
|---|---|
| "Y" DISTANCE | "X" DISTANCE |
| 0 (℄) | 4.000 |
| 1.0 | 4.000 |
| 2.0 | 3.990 |
| 3.0 | 3.965 |
| 4.0 | 3.900 |
| 5.0 | 3.785 |
| 6.0 | 3.600 |
| 7.0 | 3.305 |
| 8.0 | 2.850 |
| 8.5 | 2.535 |
| 9.0 | 2.110 |
| 9.5 | 1.505 |
| 9.813 | .950 |
| 10.0 | 0 |

2


Convair — CONFIDENTIAL


PRELIMINARY DESIGN DRAWING


LAYOUT-CLEARANCE DIMENSIONS FOR TRAPEZE & PARASITE


FW-5410003


att Latches

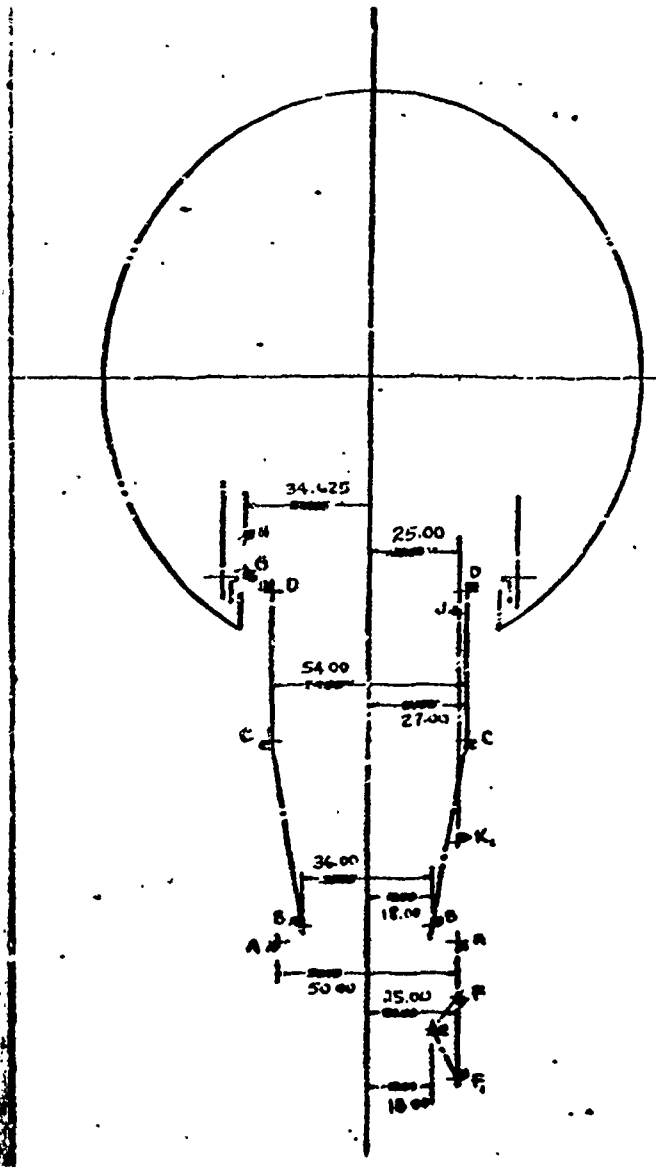

34.625
25.00
54.00
27.00
36.00
18.00
50.00
35.00
18.00

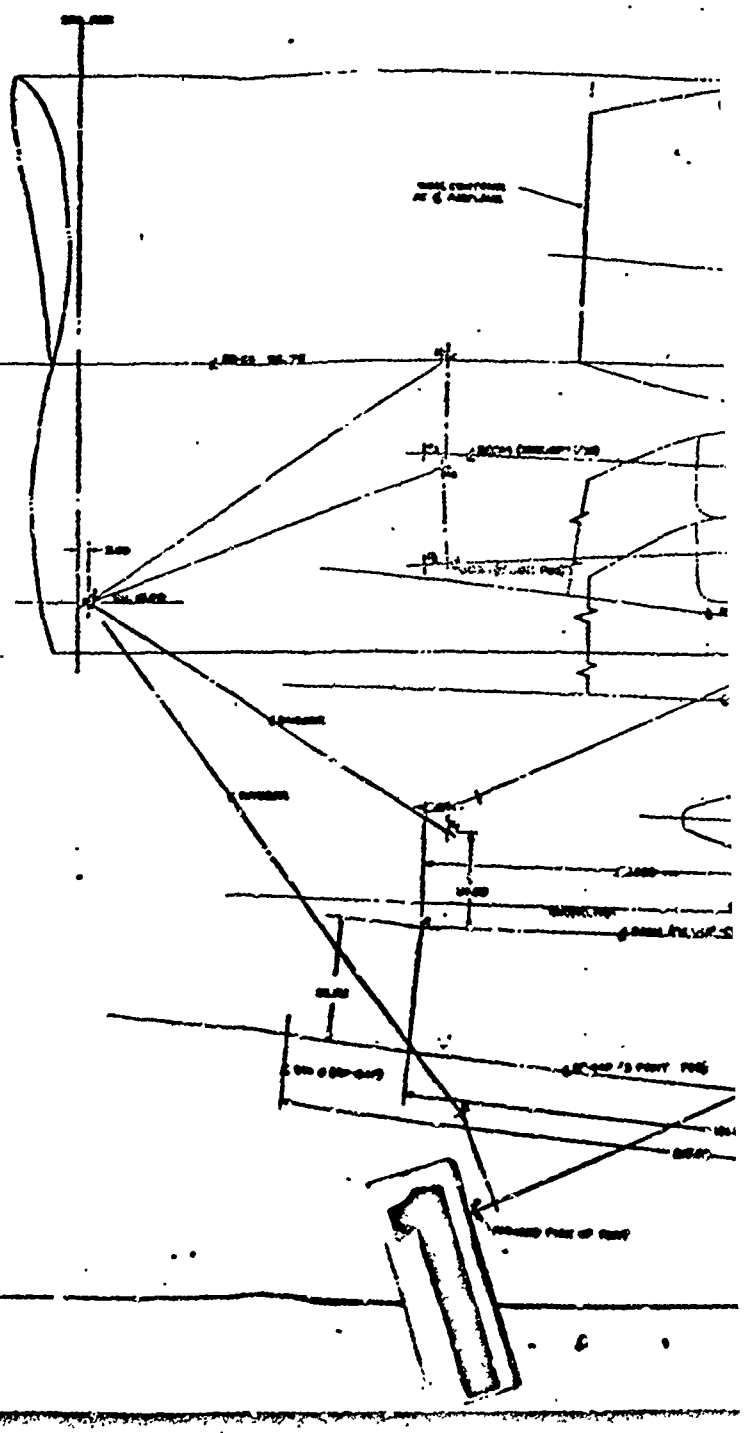


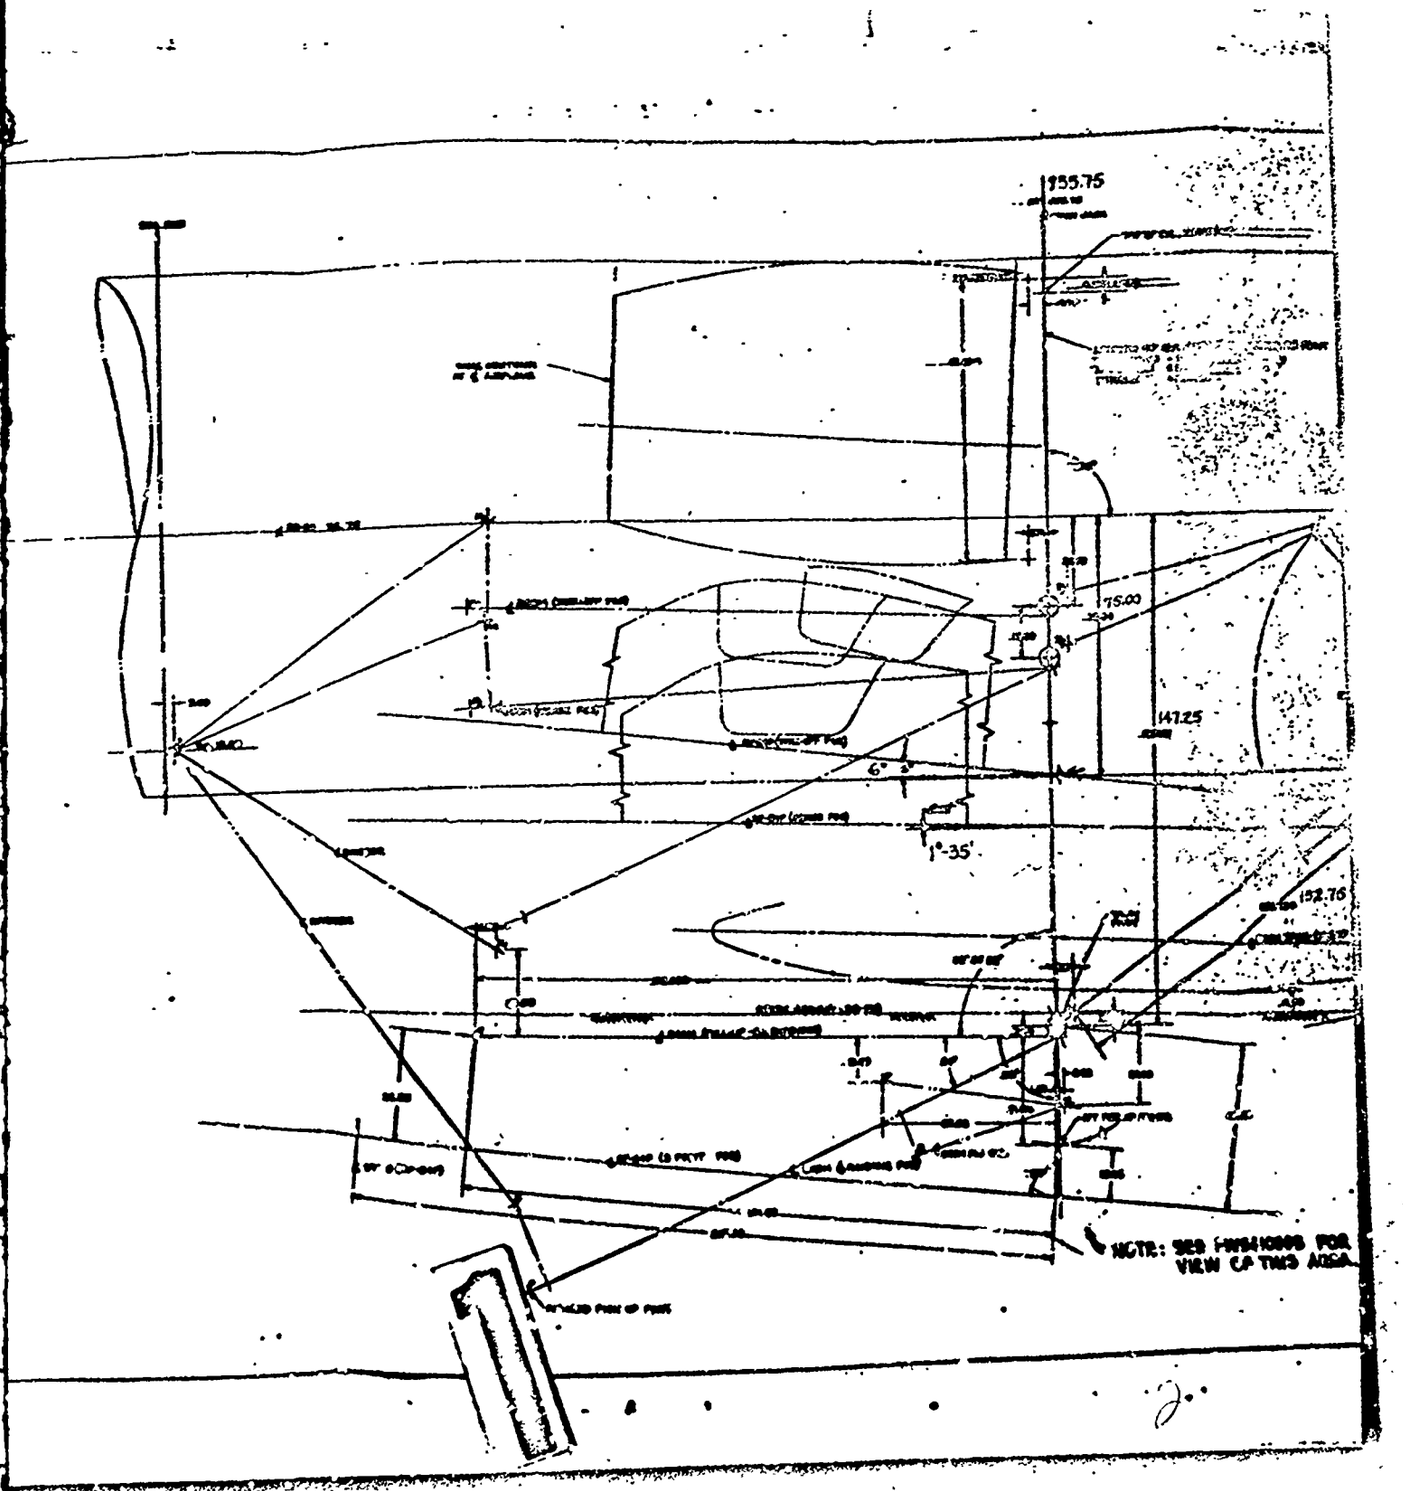

155.75
75.00
147.25
1°-35'
152.76
NOTE: SEE FWS10000 FOR
VIEW OF THIS AREA

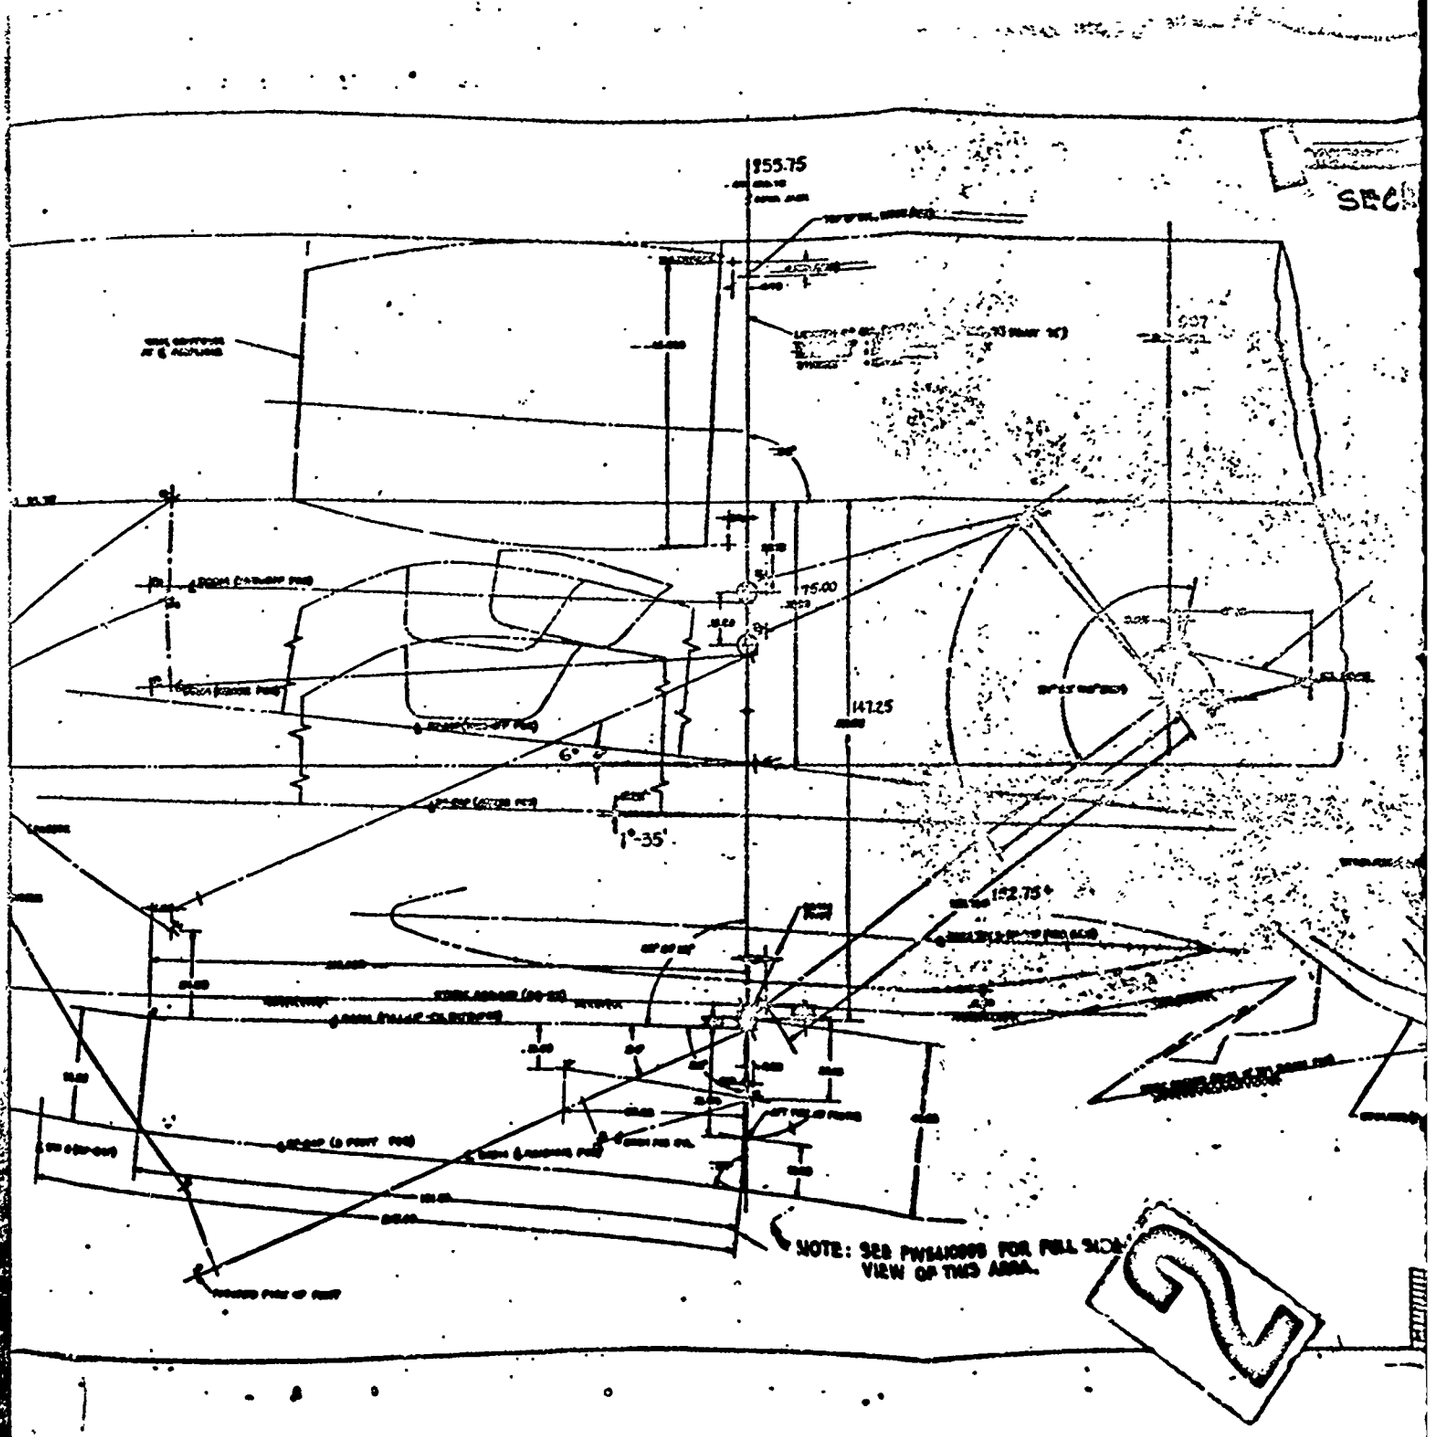

155.75
147.25
152.75
6°
1°-35'
NOTE: SEE PW5A0000 FOR FULL SIDE VIEW OF THIS AREA.

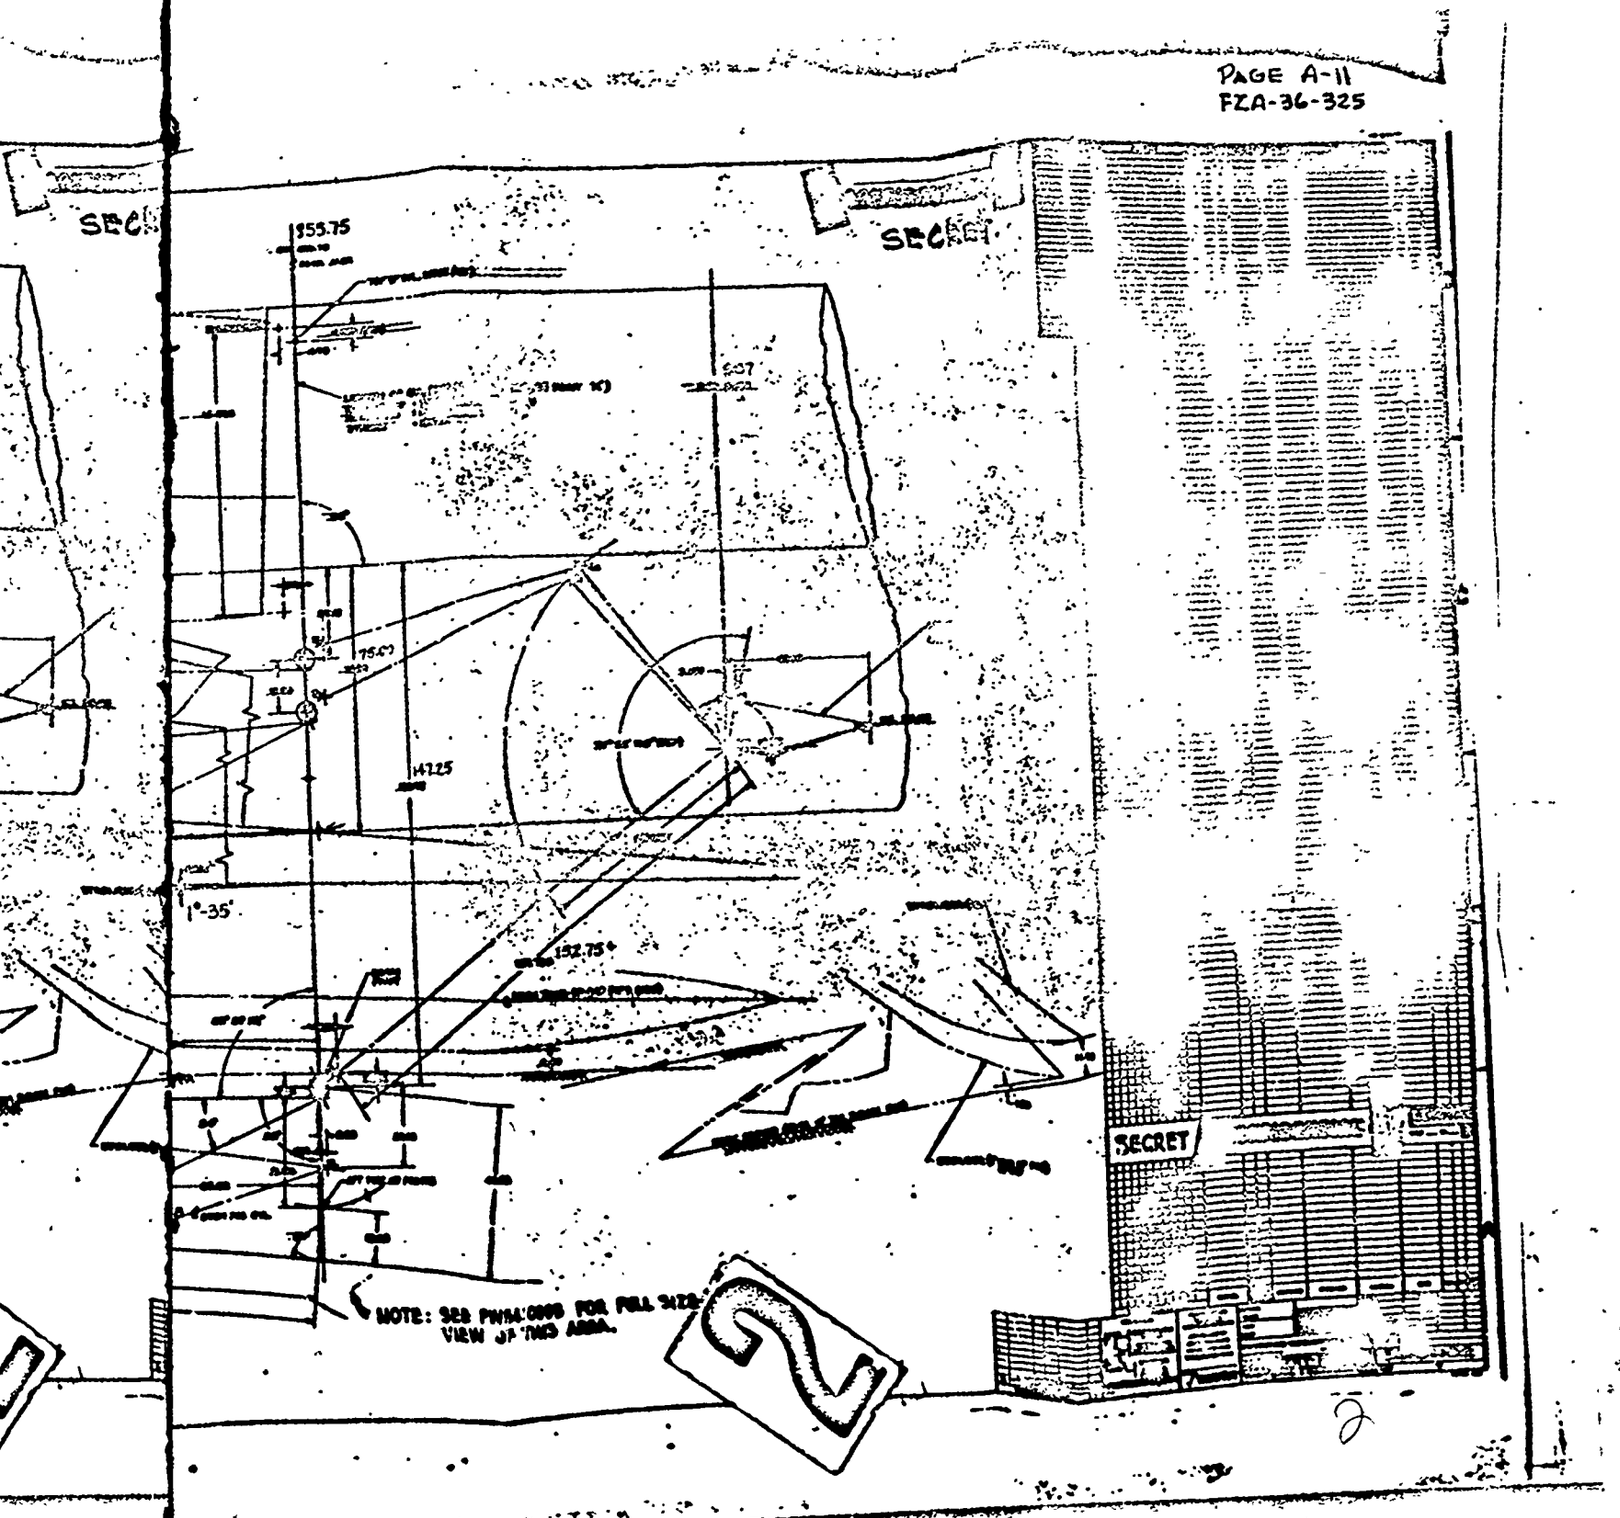
SECRET
SECRET
355.75
14.25
1"-35'
NOTE: SEE PWA 6000 FOR FULL SIZE VIEW OF THIS AREA.

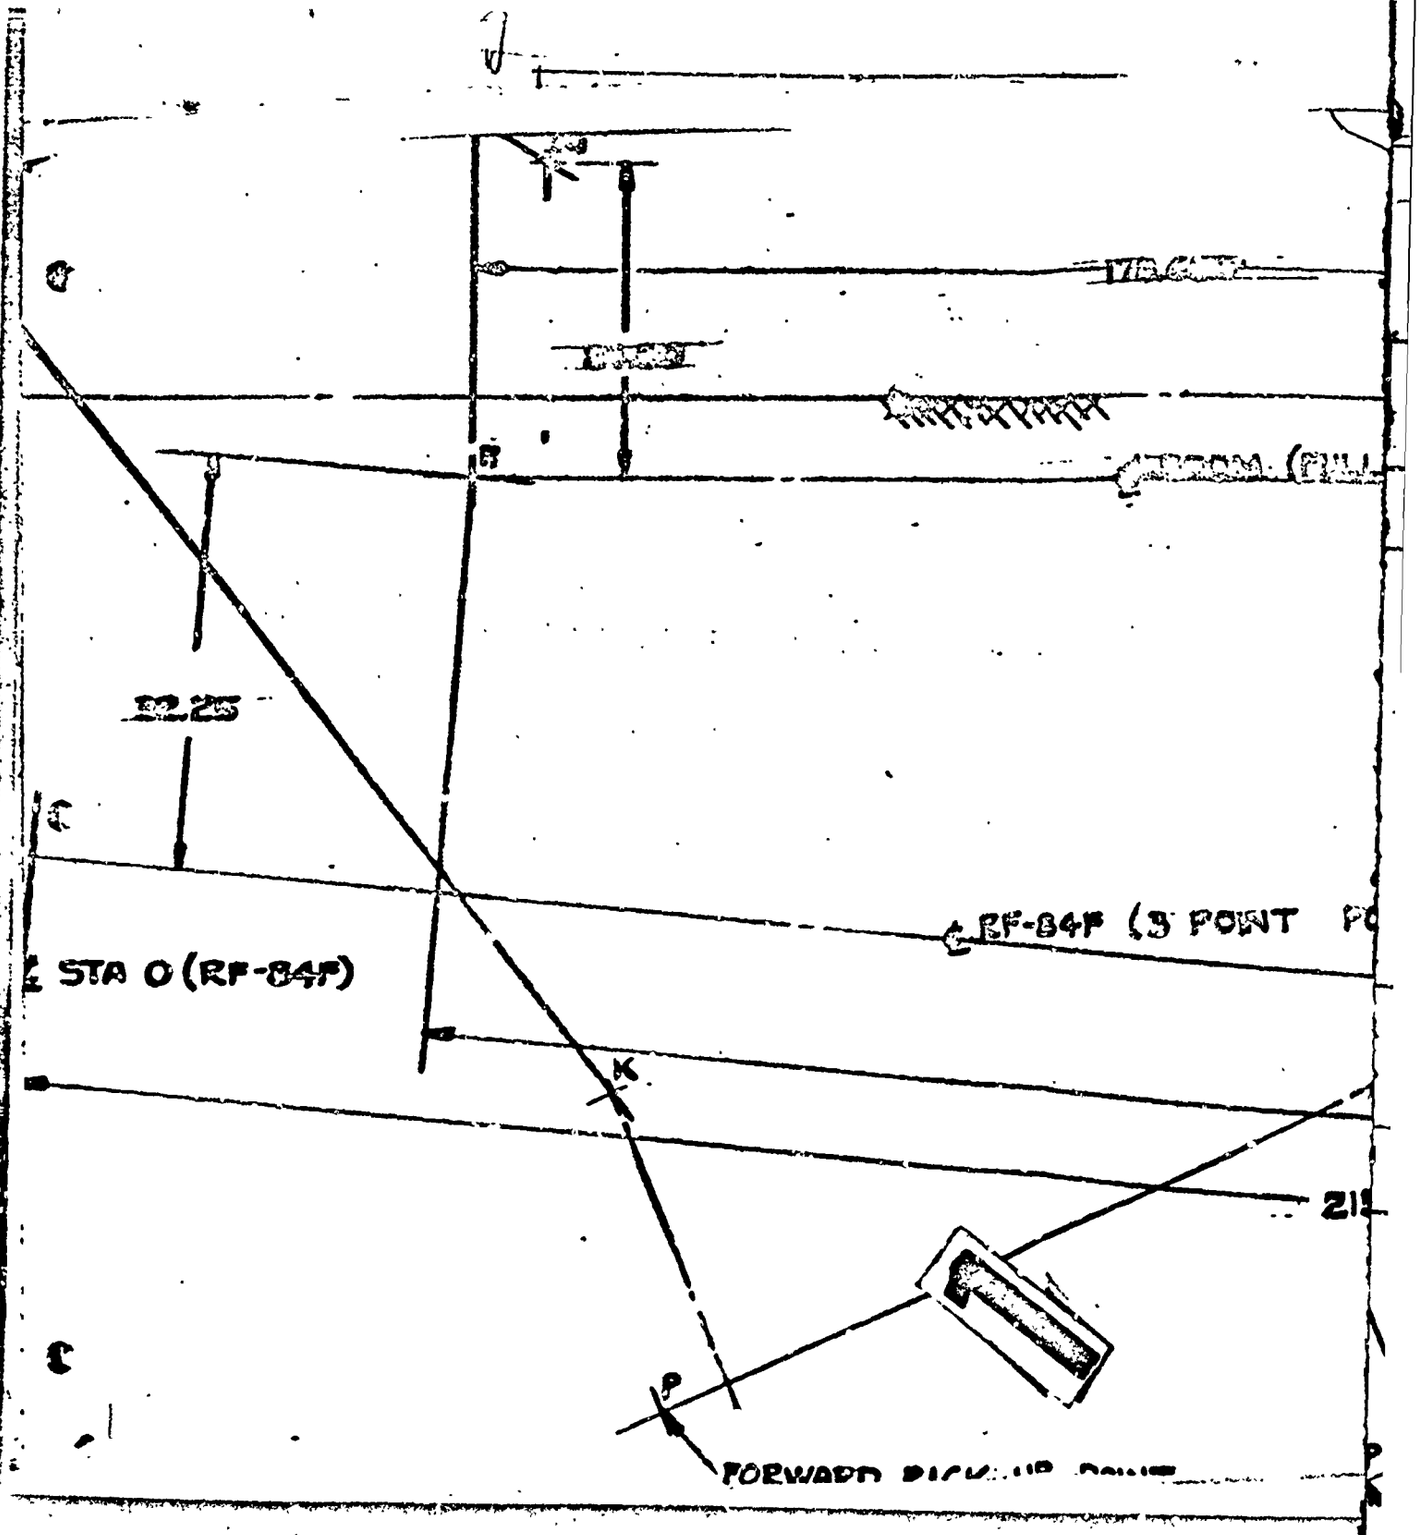
82.25
STA 0 (RF-84F)
K
P

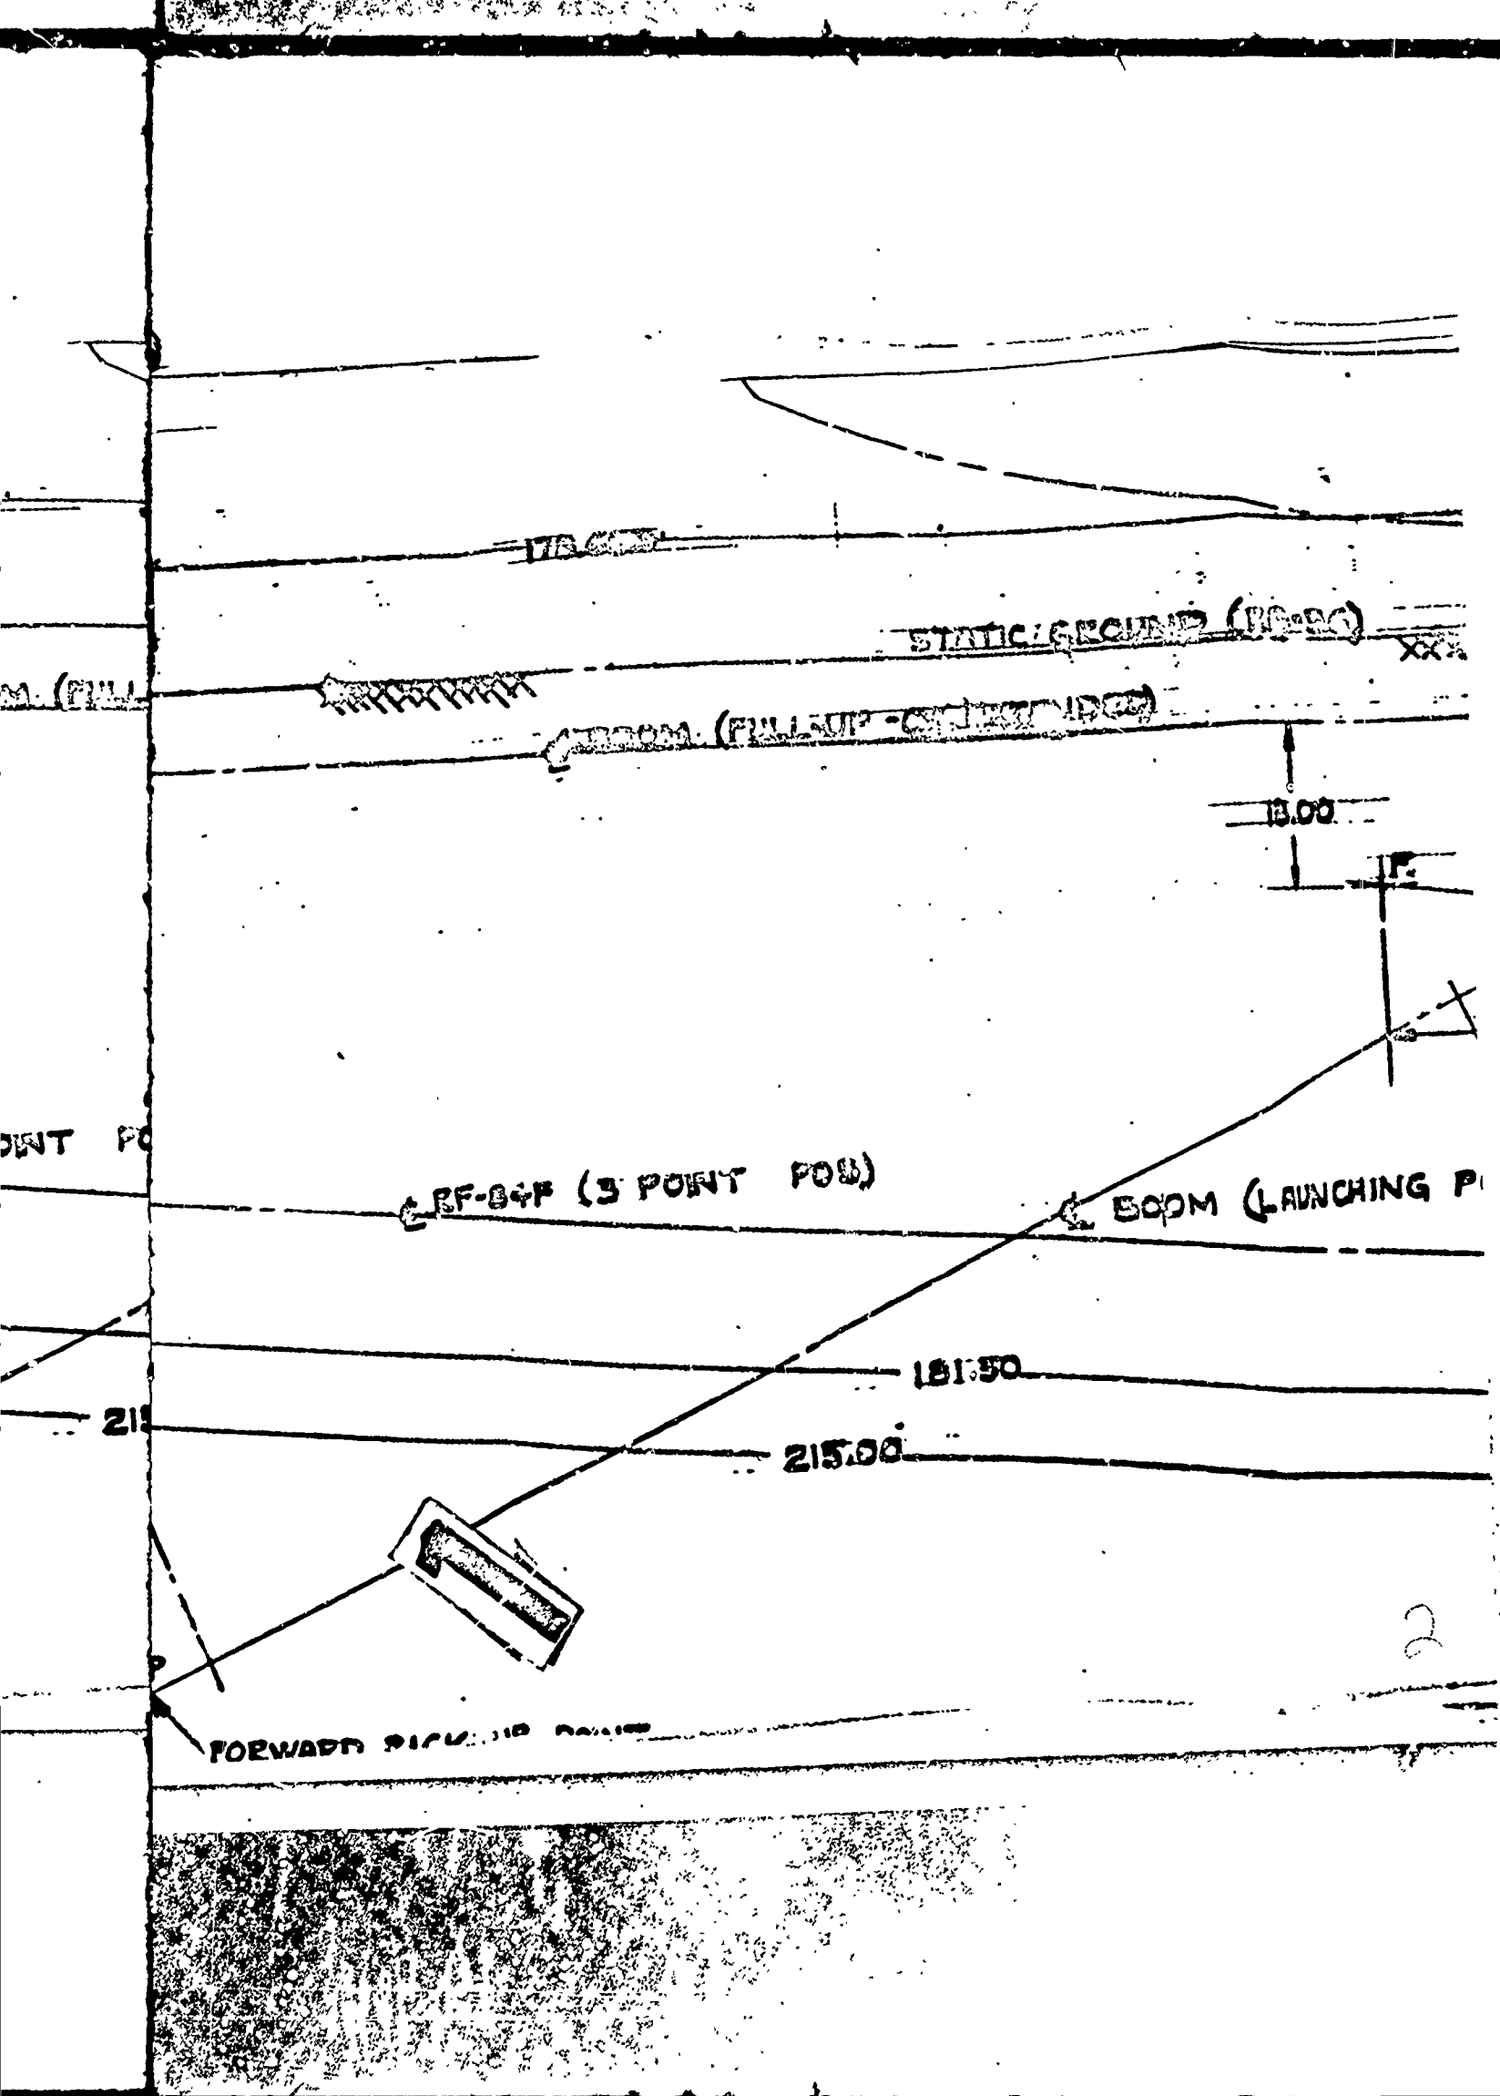
STATIC GROUND (FULL UP)
BOOM (FULL UP - CLEAR)
13.00
BF-84F (3 POINT POD)
BOOM (LAUNCHING P
181.50
215.00
FORWARD PICK-UP POINT

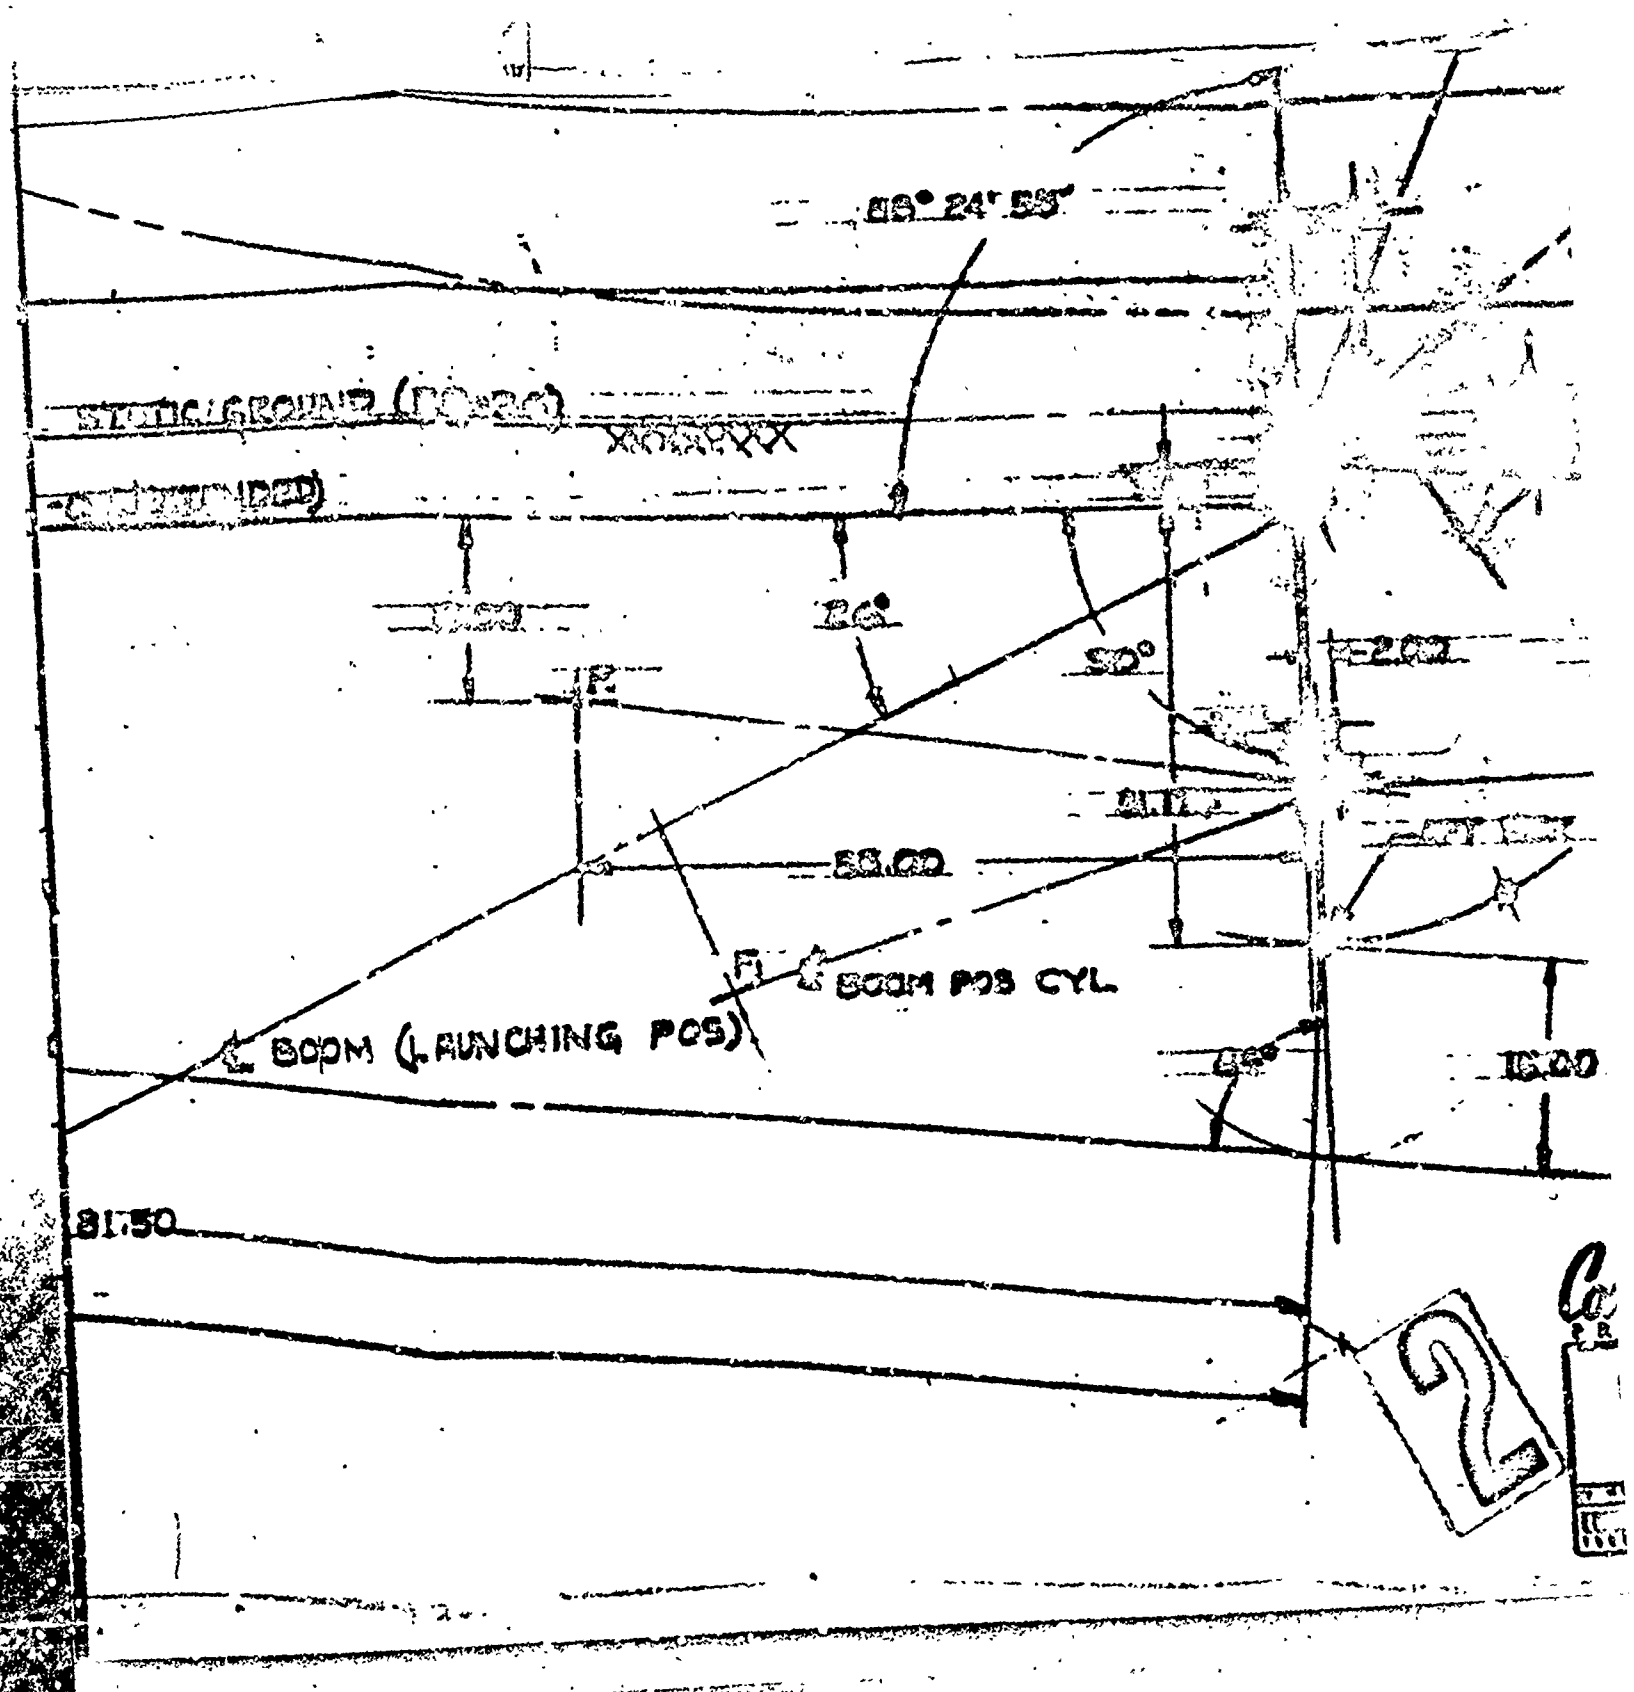

88° 24' 55"
STATIC GROUND (RO=20)
50°
58.00
BOOM POS CYL
BOOM (LAUNCHING POS)
31.50
15.00

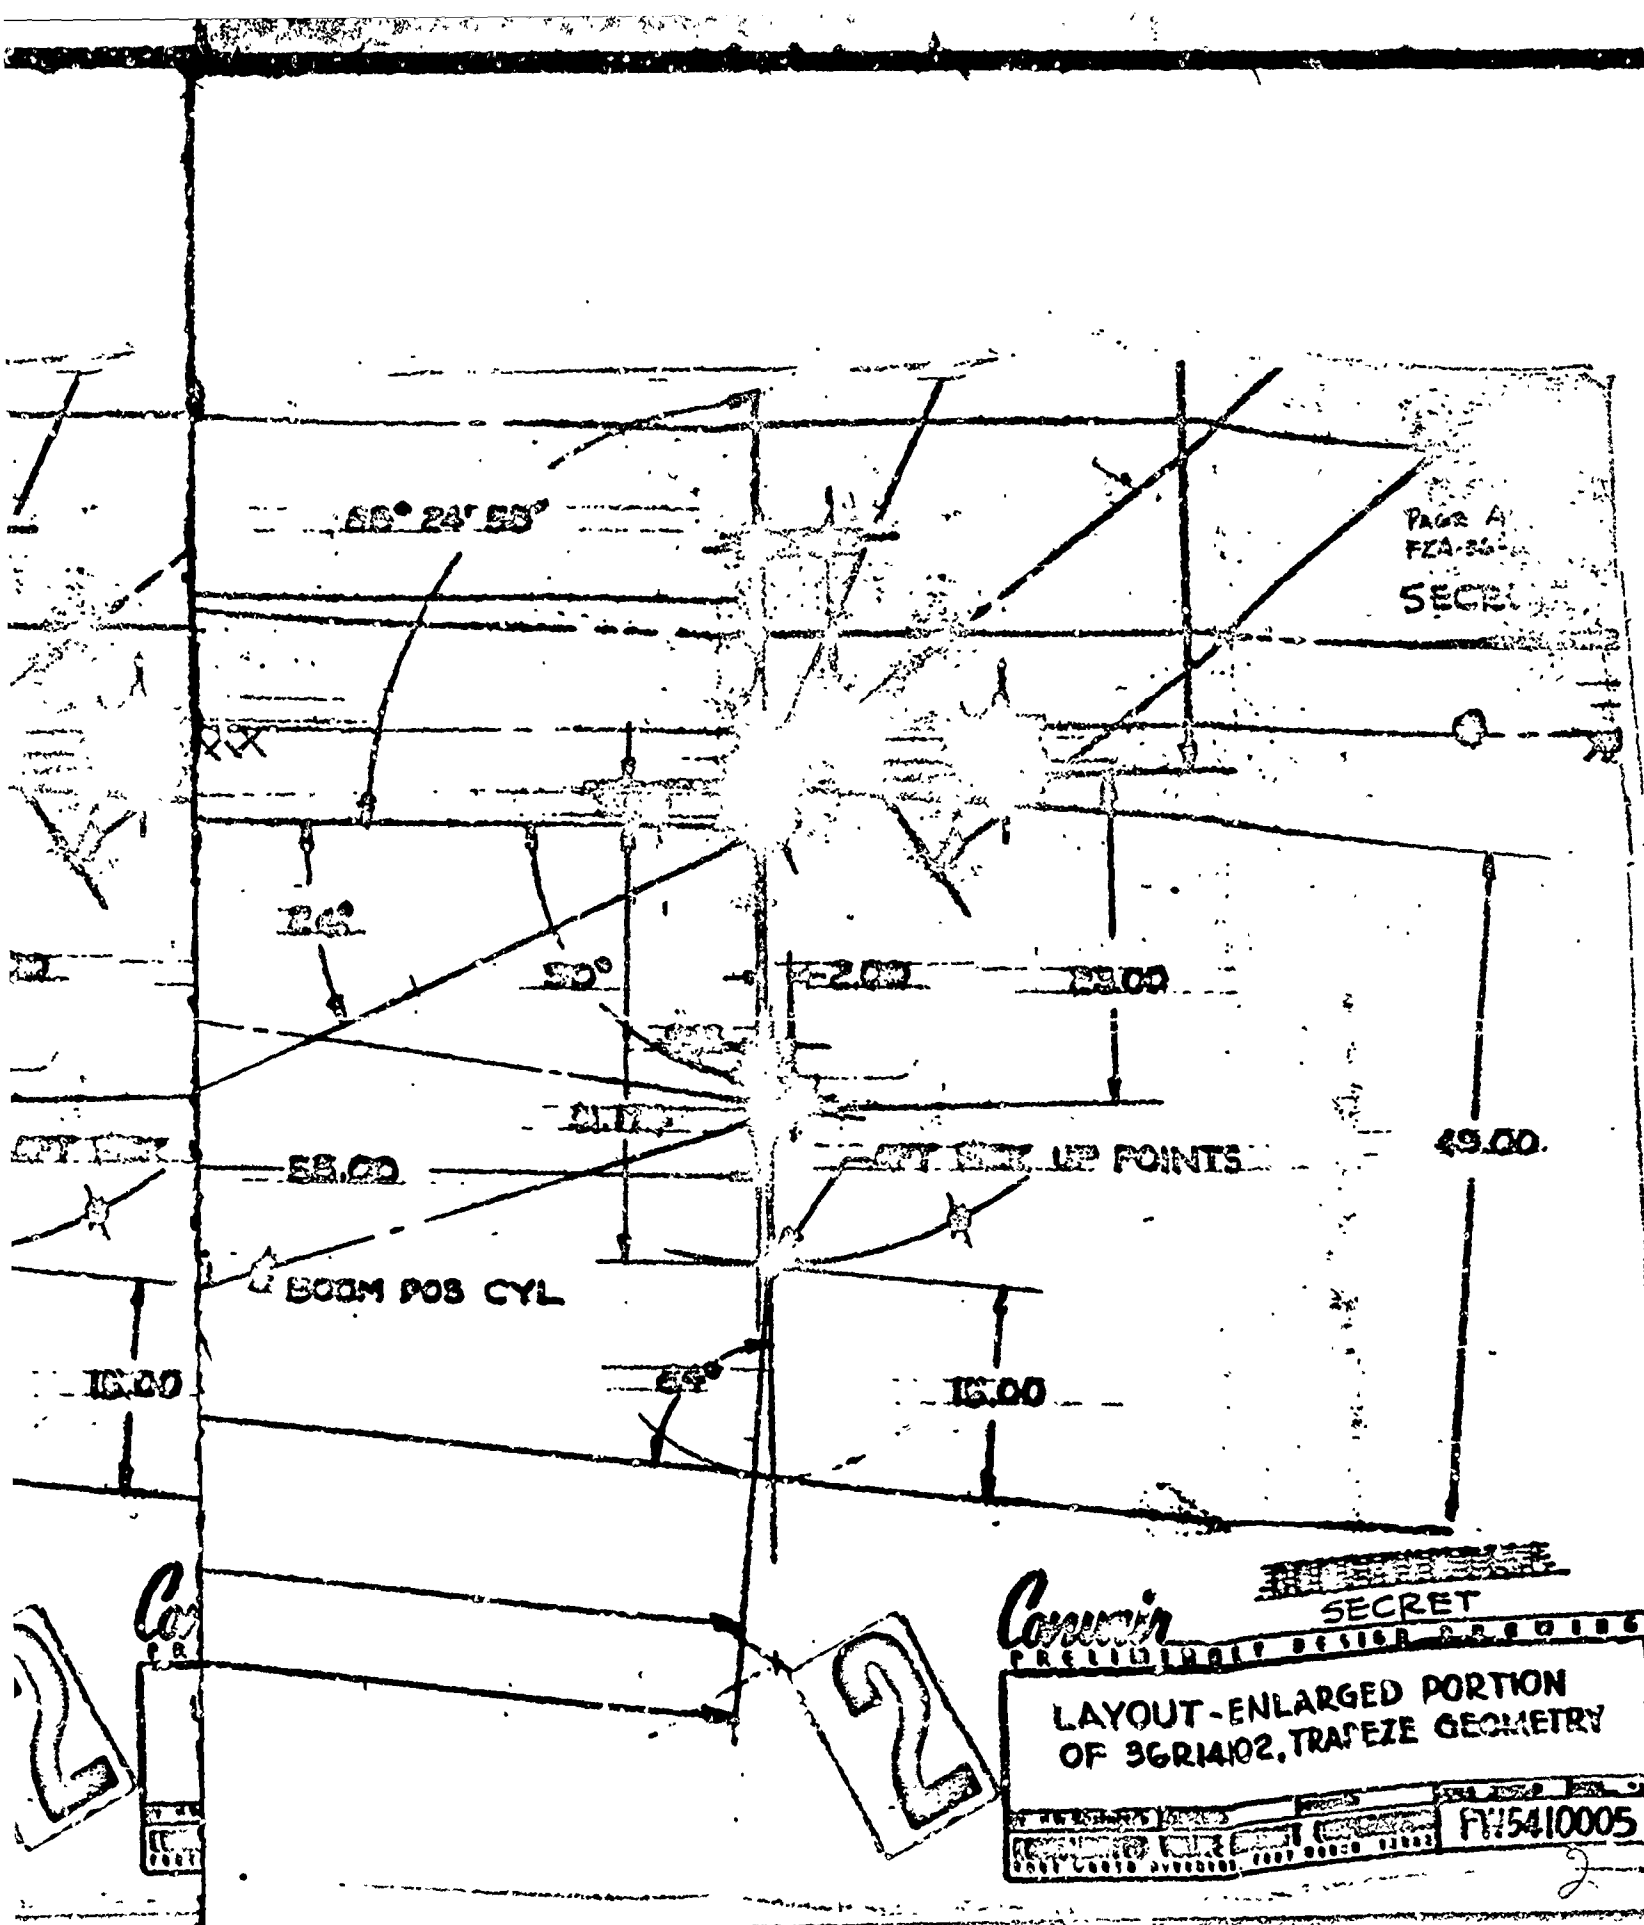
60° 24' 53"
PAGE A
FZA-36
SECRET
50°
2.00
55.00
49.00
BOOM POS CYL
15.00
15.00
UP POINTS
SECRET
LAYOUT-ENLARGED PORTION
OF 3GR14102, TRAPEZE GEOMETRY
FW5410005

Page A-13
FZA-16-325

SECRET


# Centor's Parasite Jettison System

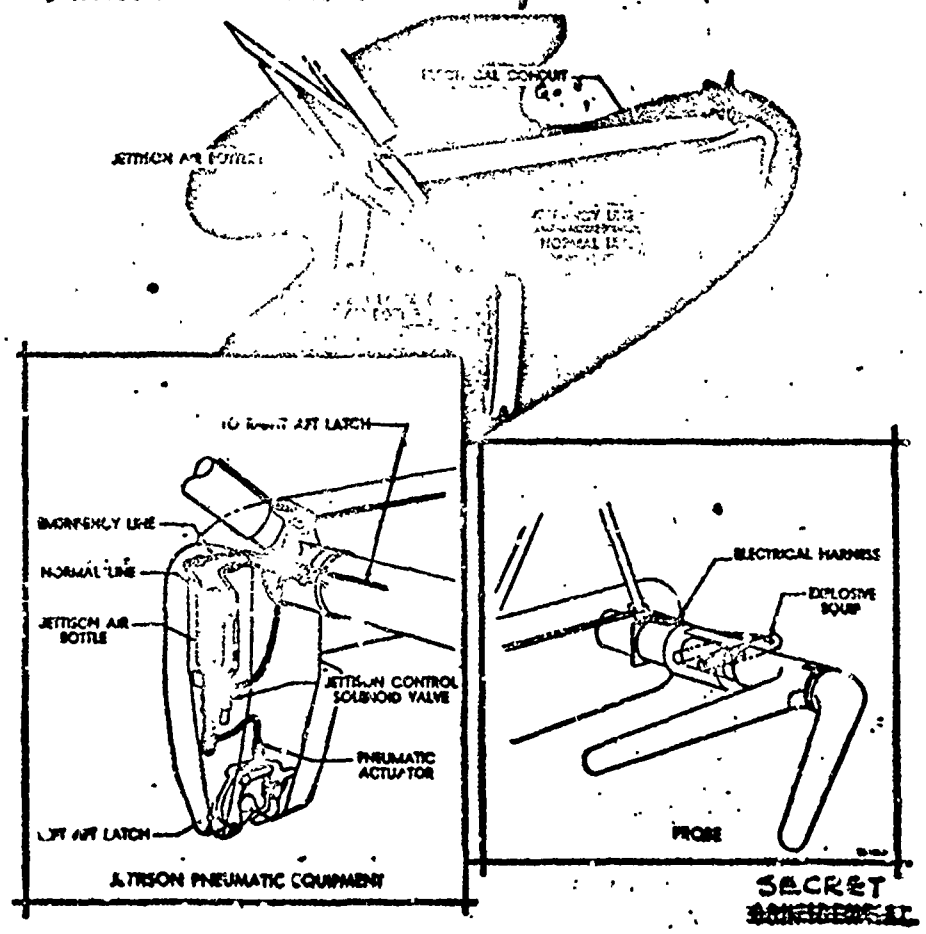




JETTISON PNEUMATIC EQUIPMENT

SECRET


PLATE 3

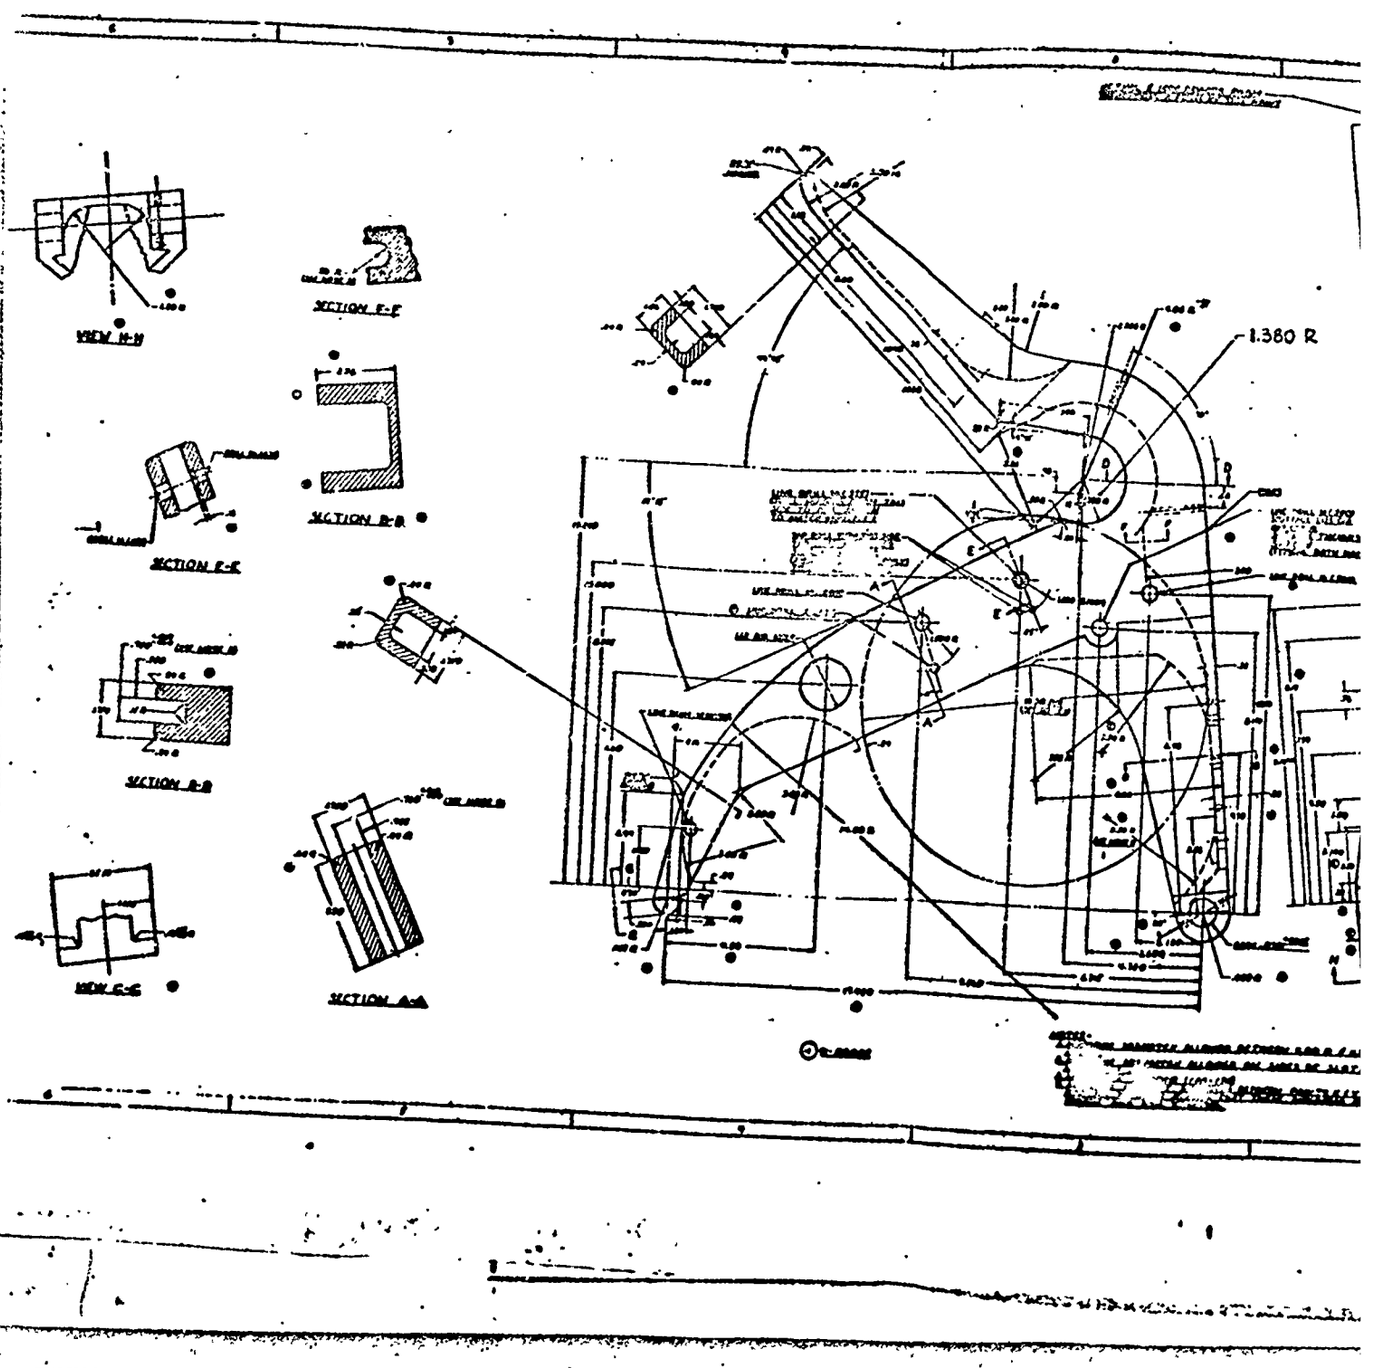

VIEW H-H
SECTION F-F
SECTION B-B
SECTION E-E
SECTION D-D
VIEW G-G
SECTION A-A
1.380 R

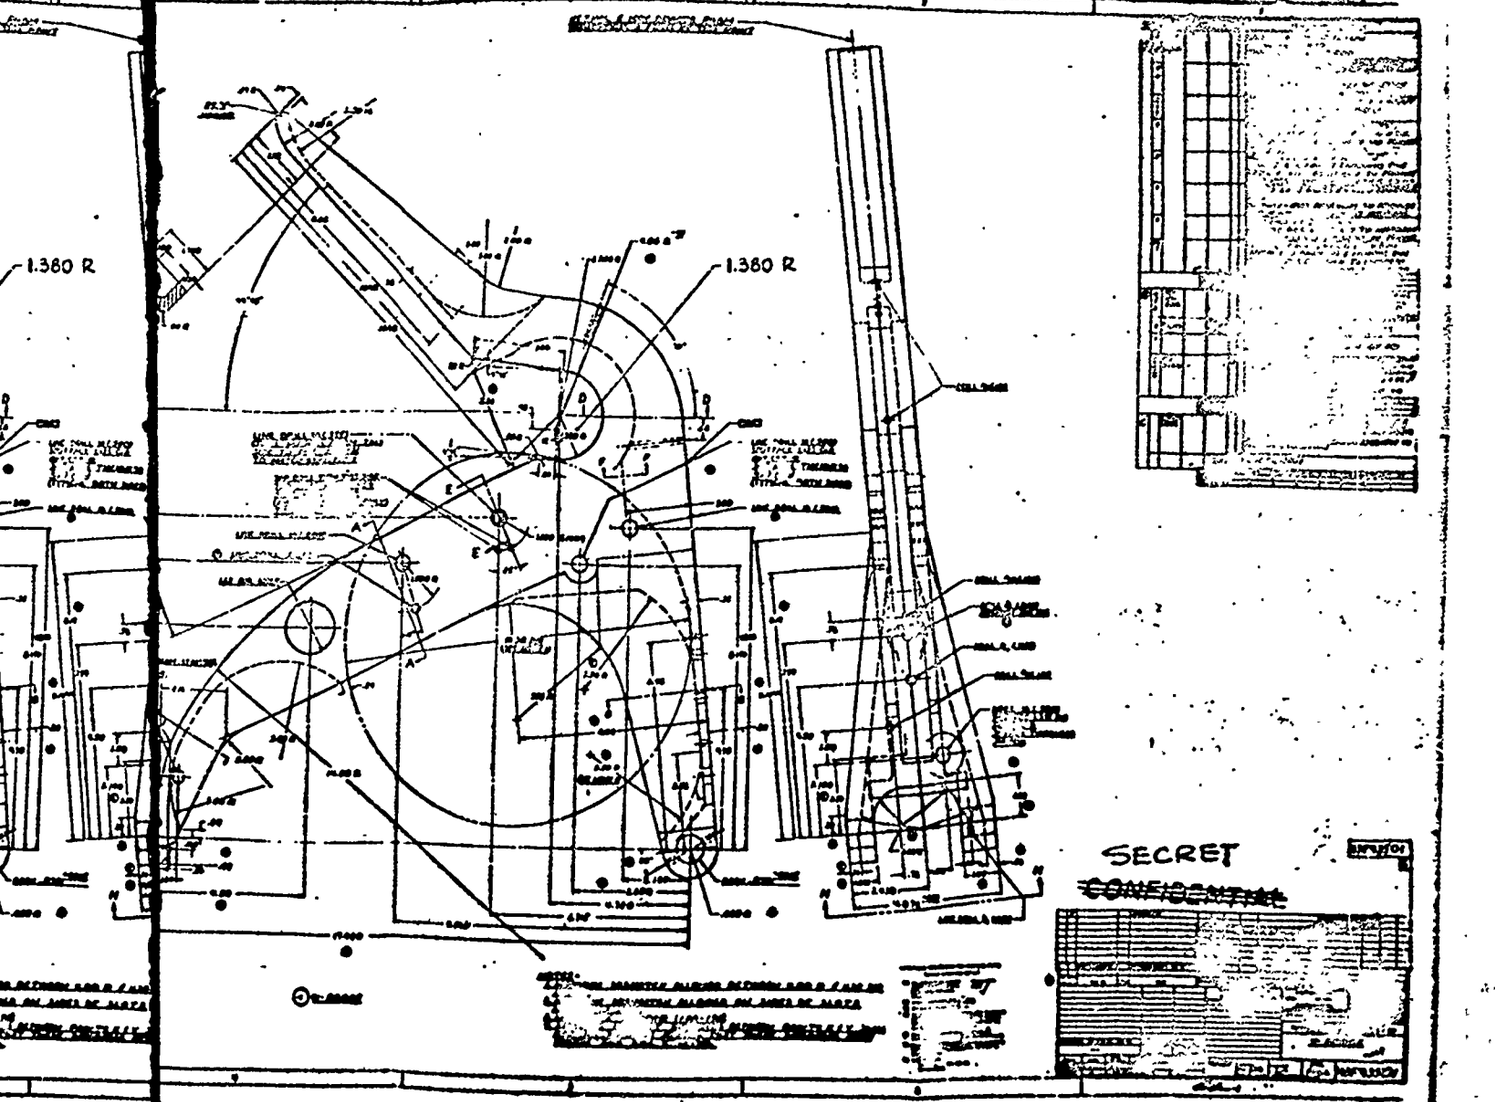
1.380 R
1.380 R
SECRET

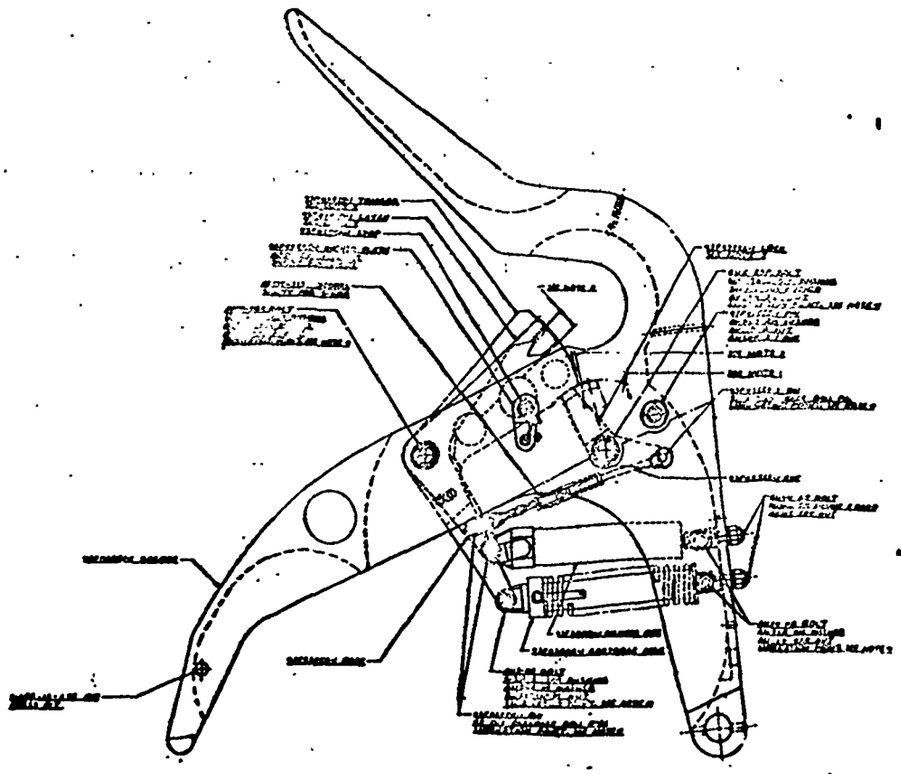



SECRET

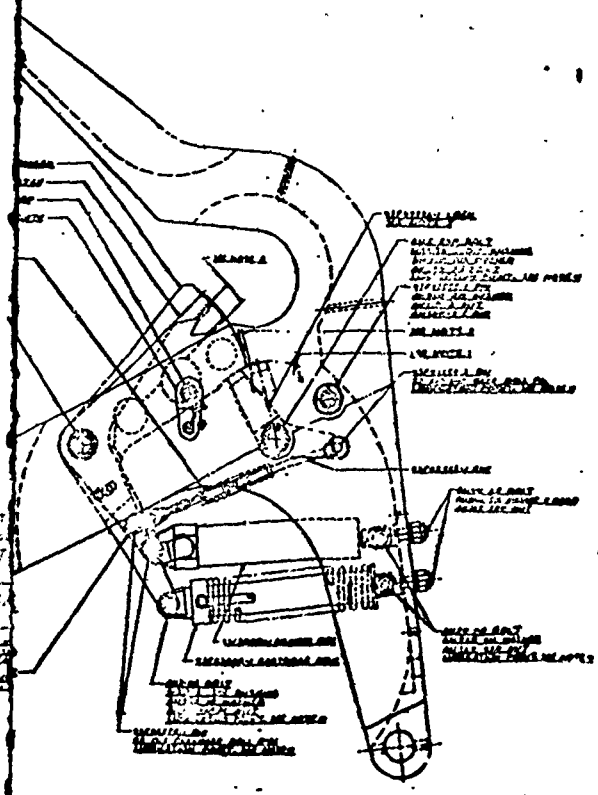

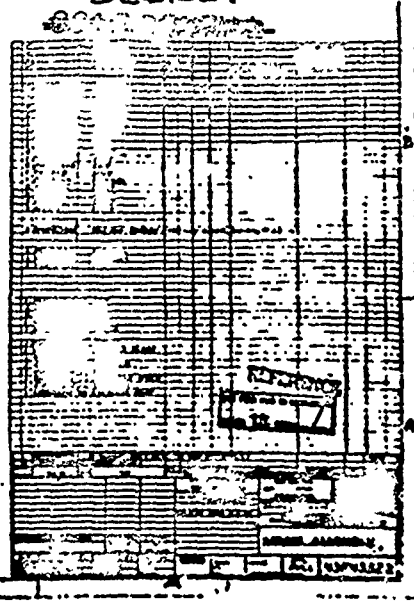


SECRET

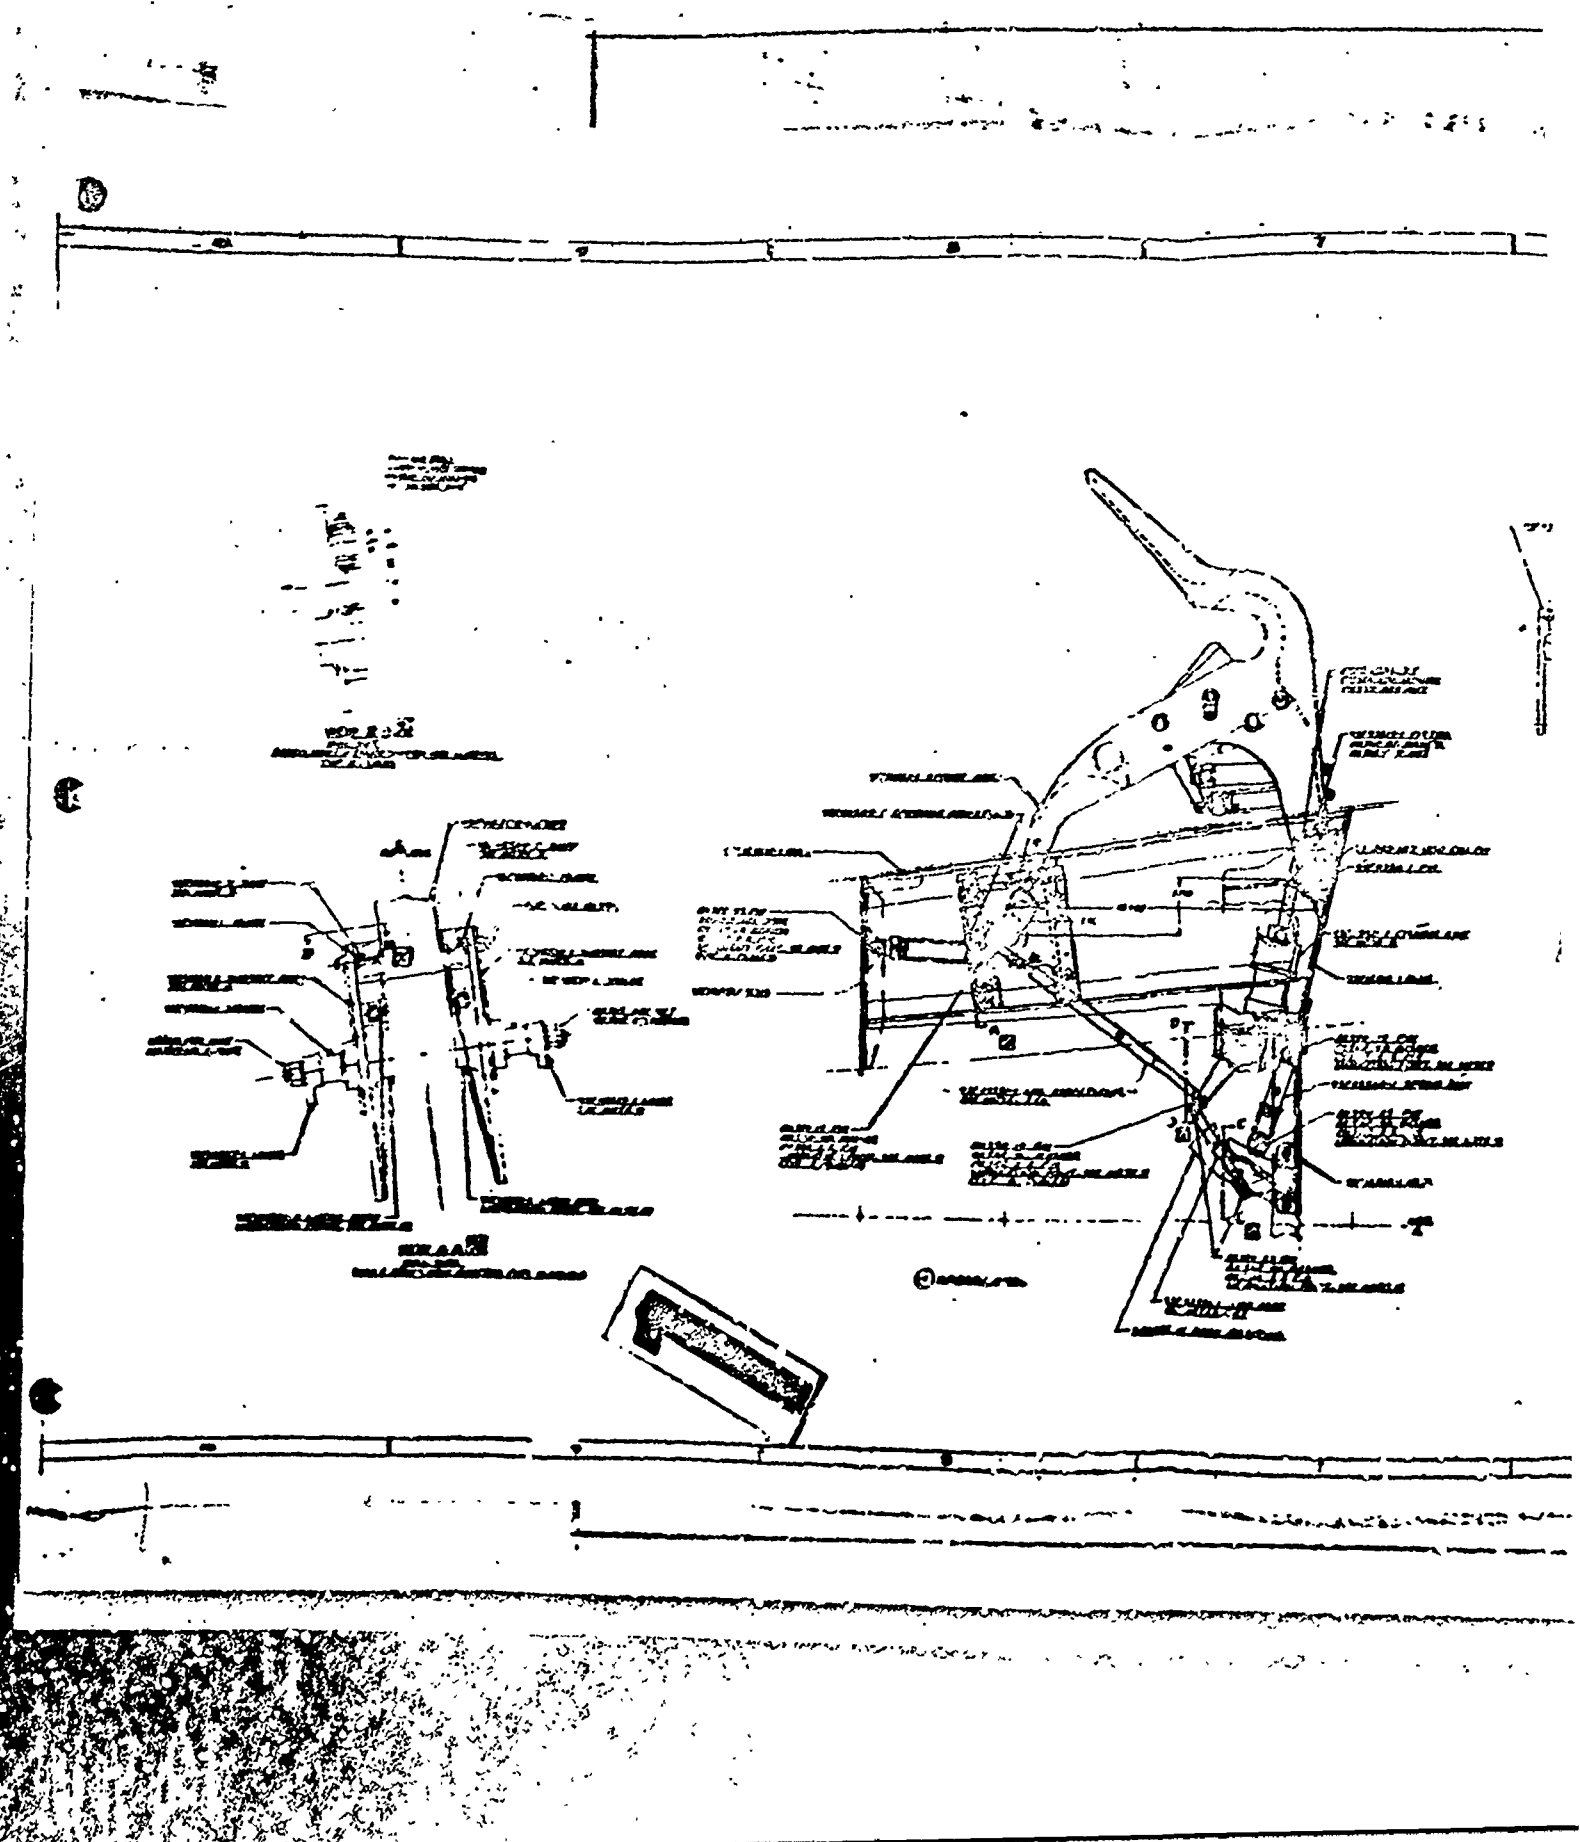


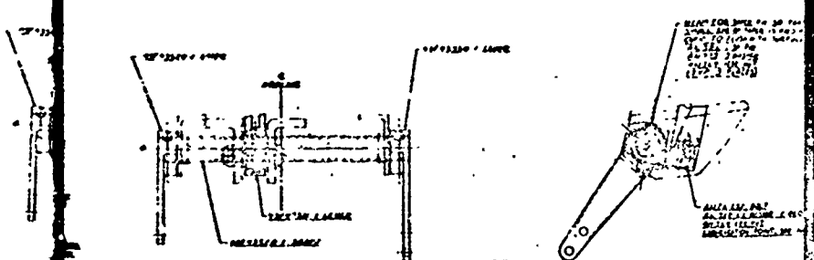


VIEW D-D

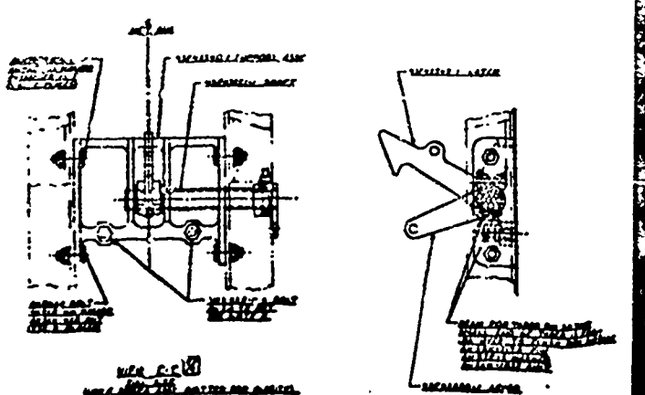

VIEW E-E

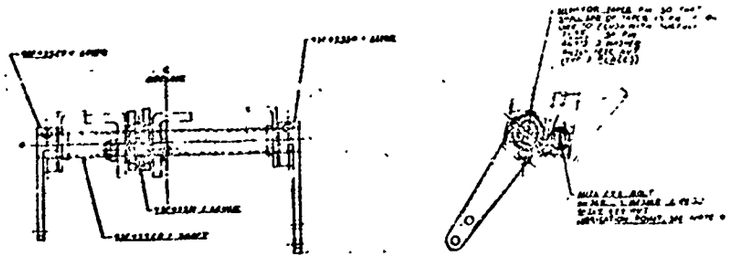


VIEW D-D

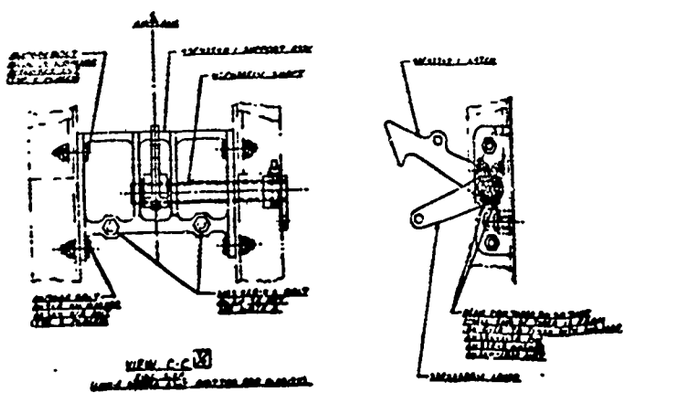


VIEW E-E

SECRET

SECRET
~~CONFIDENTIAL~~

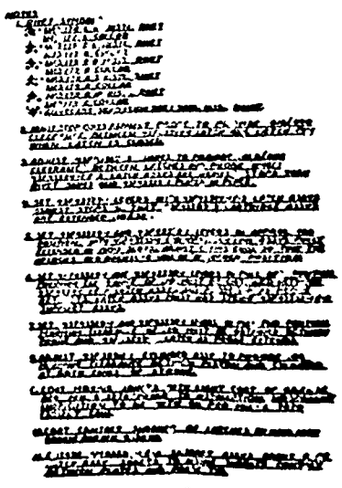



WT = 59.1

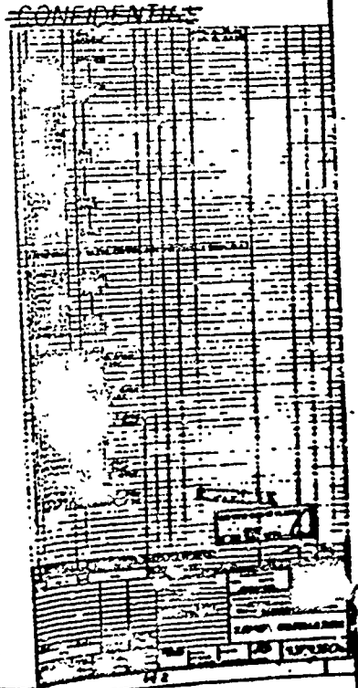





3

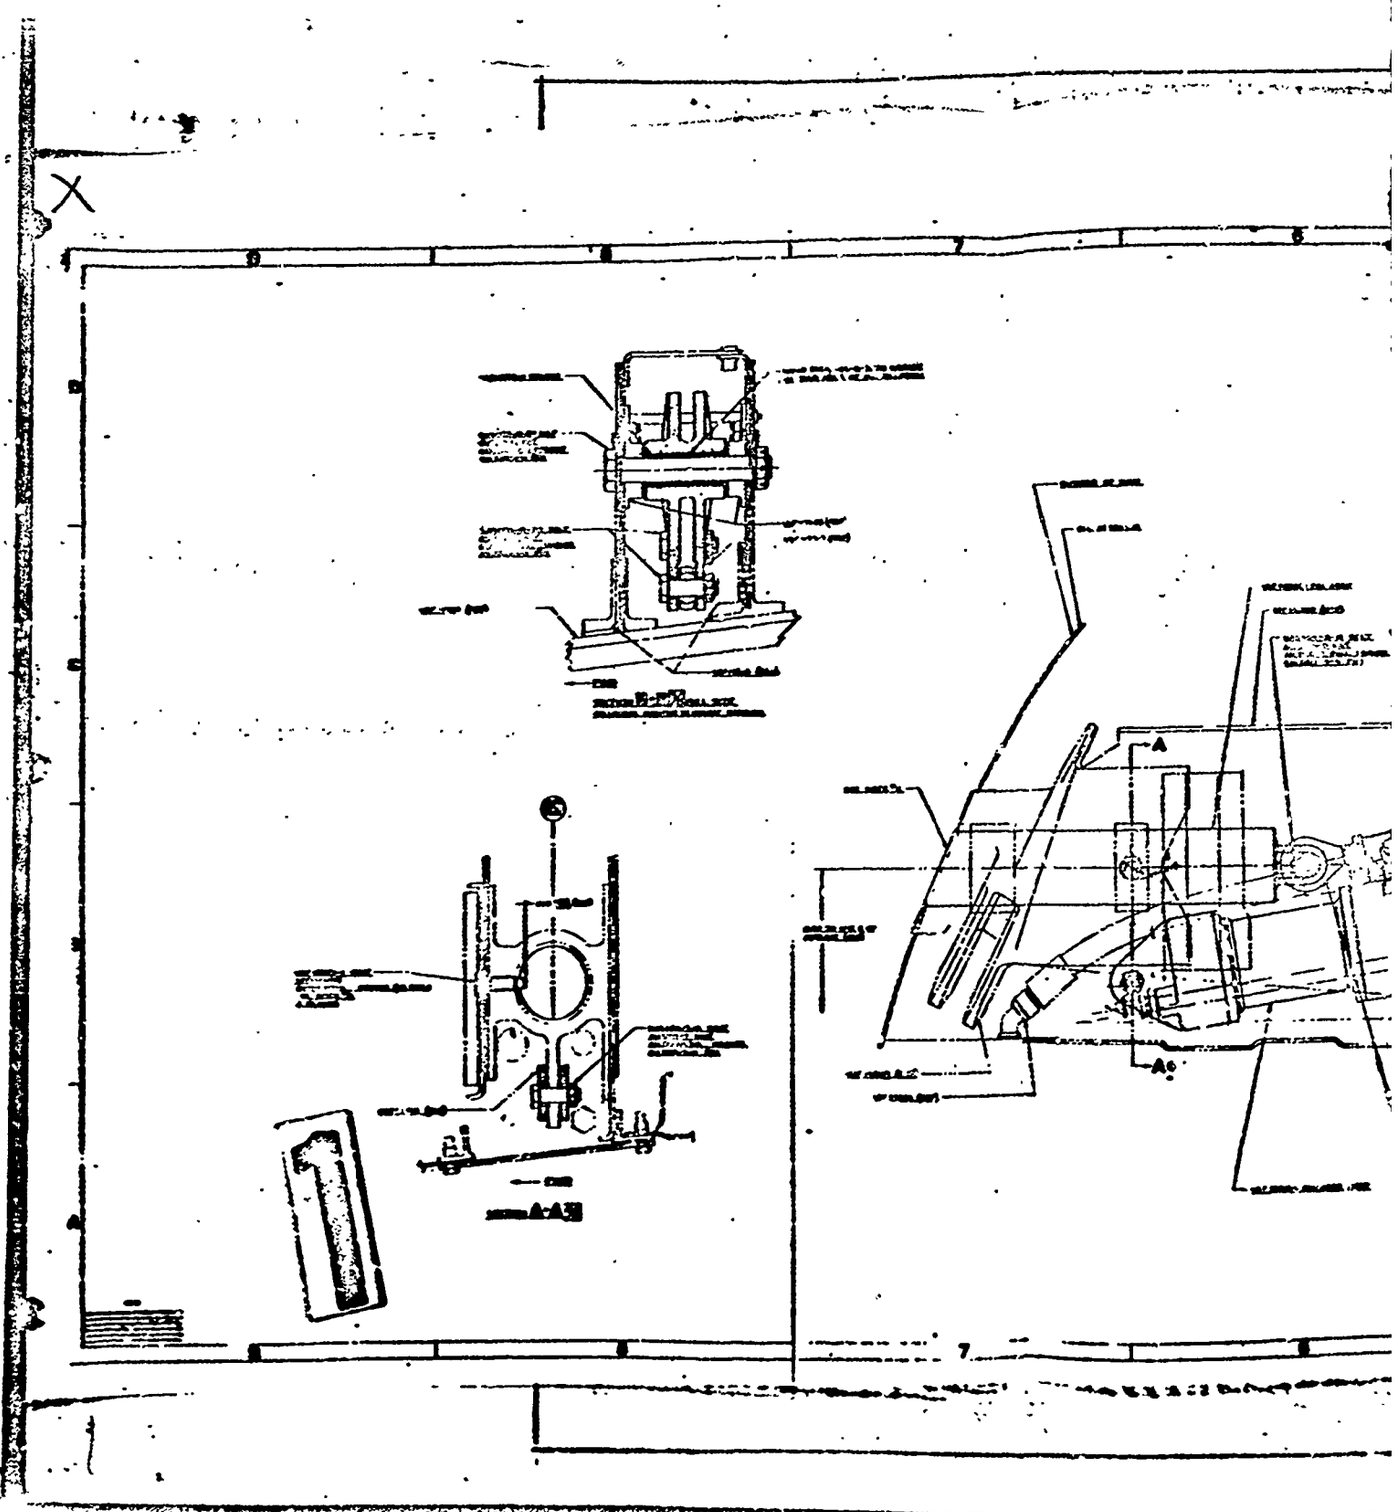

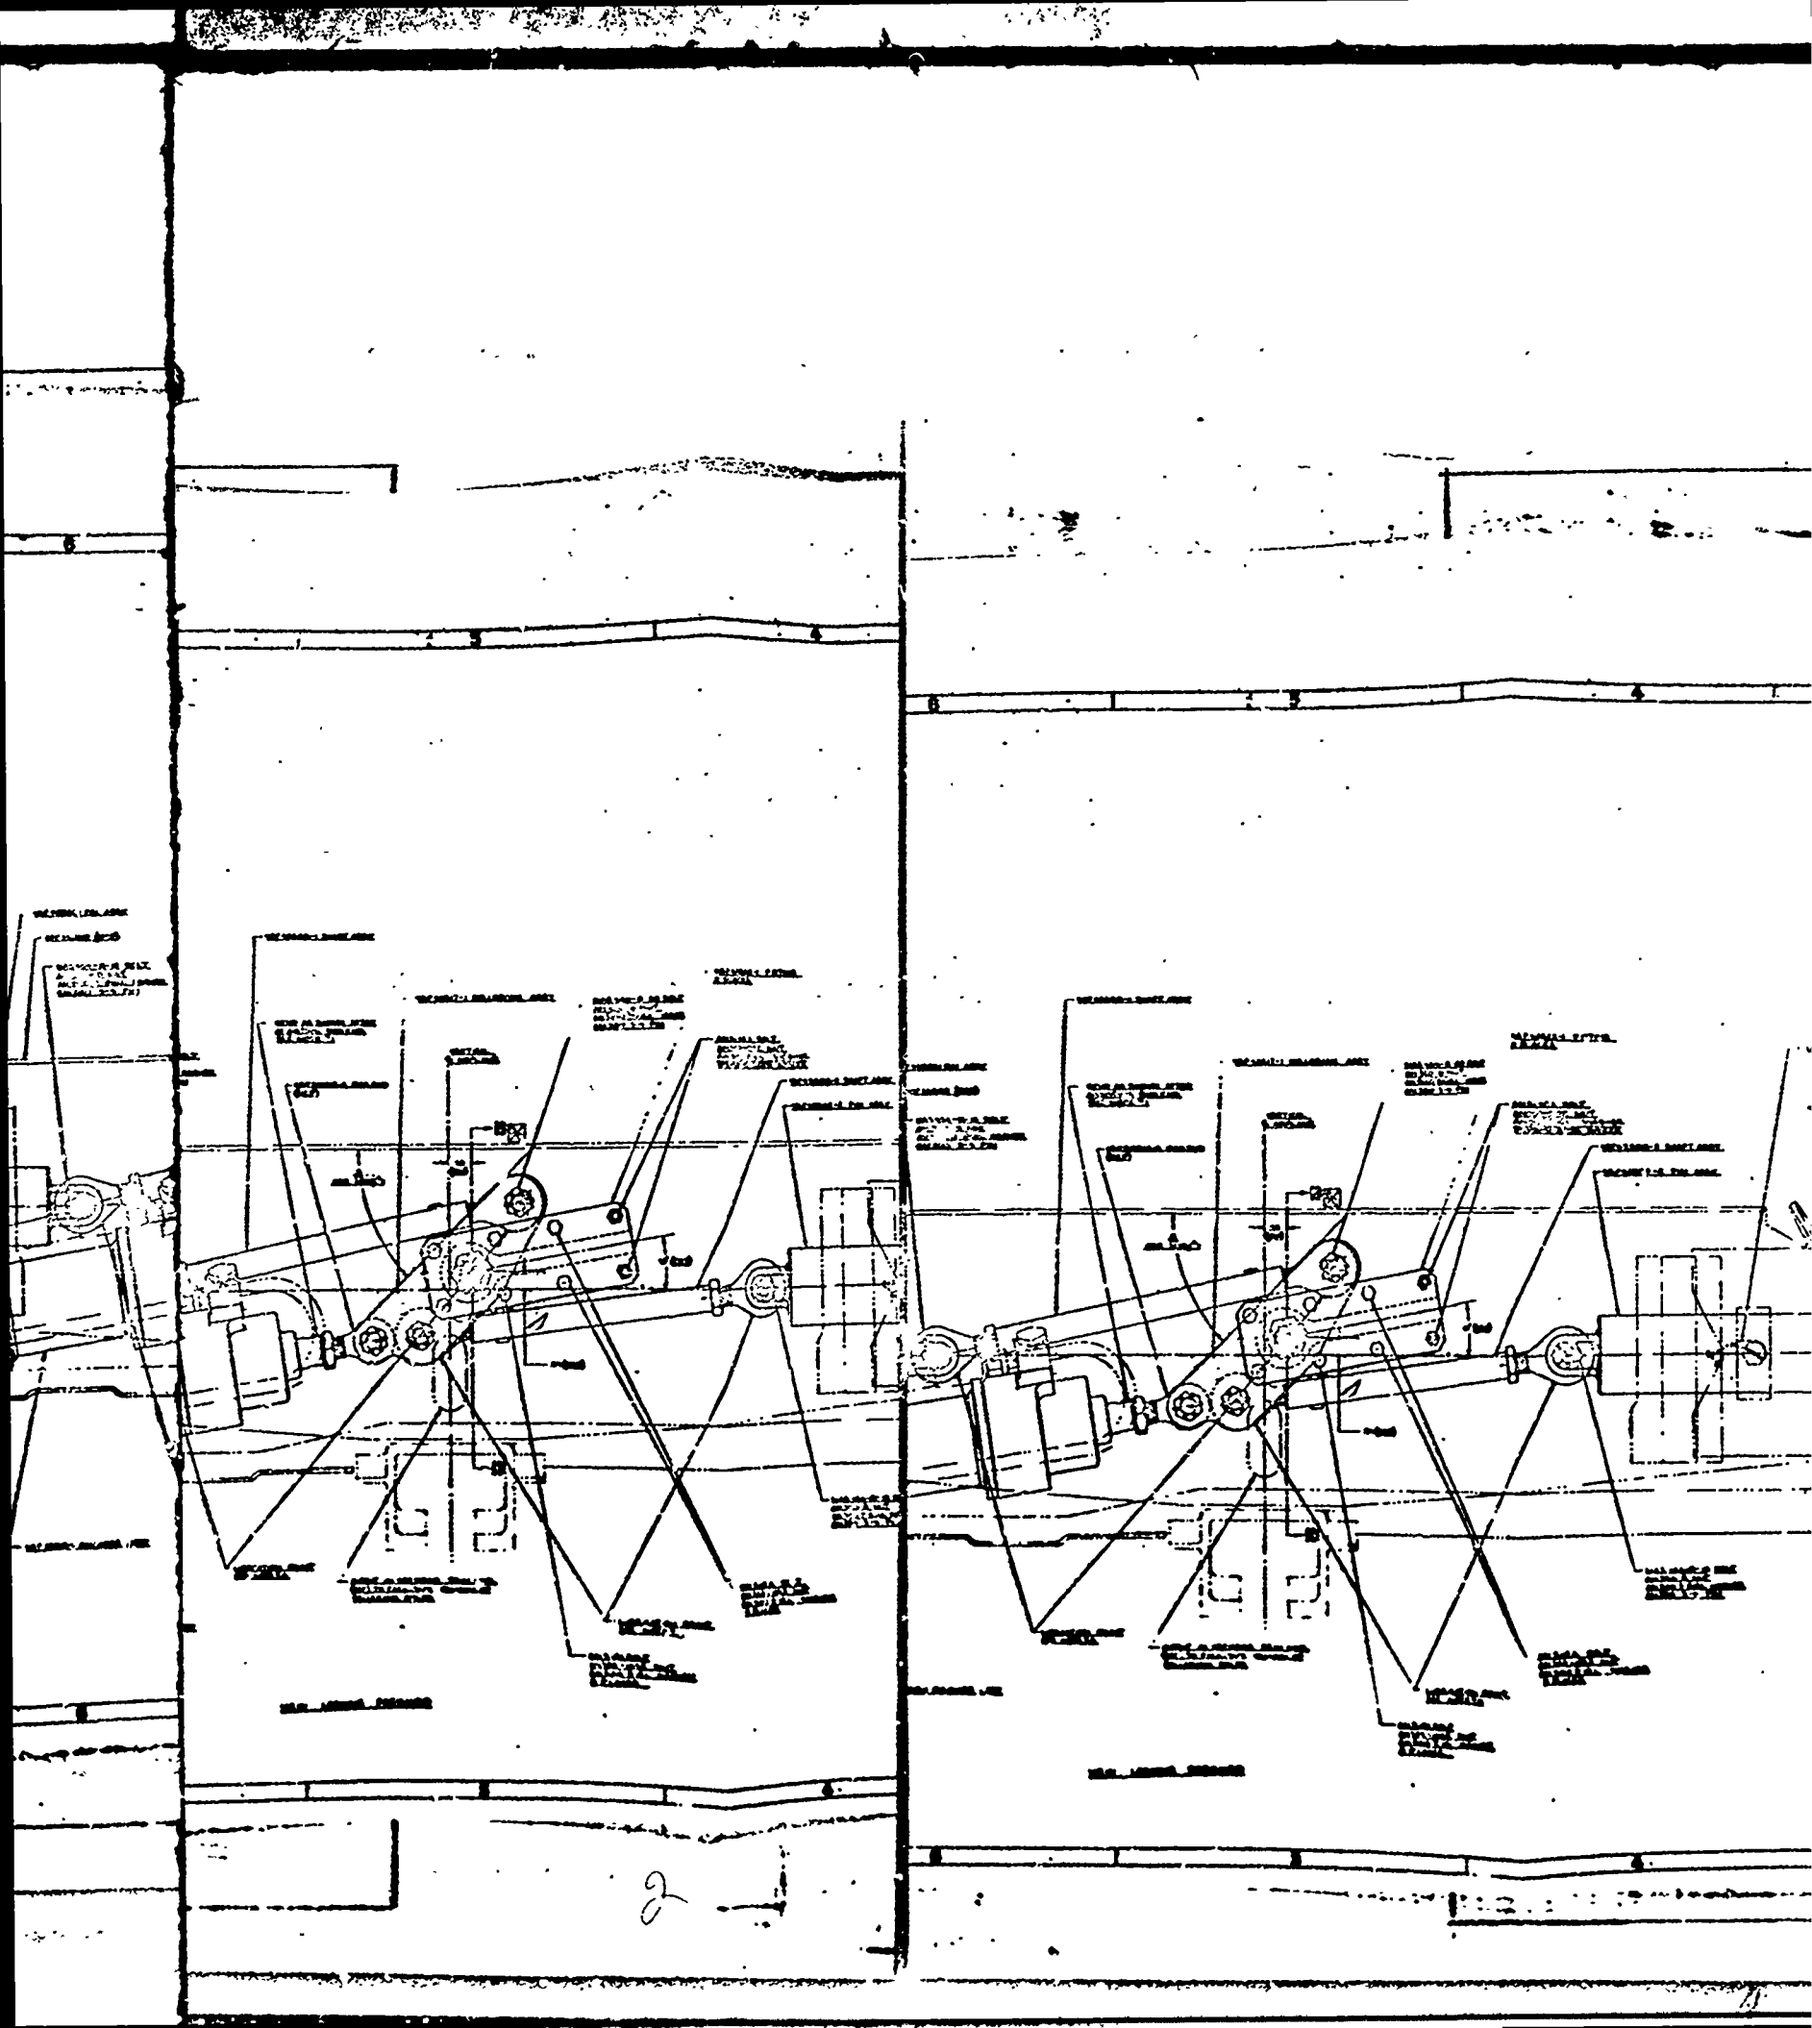


SECRET

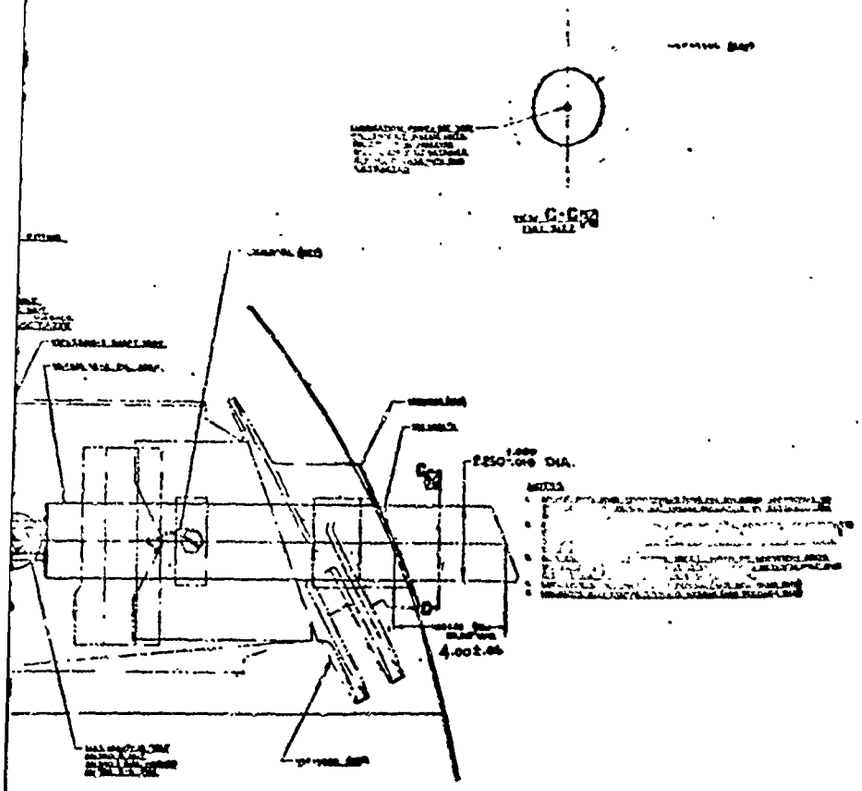

SECRET

WT - 32

SECRET

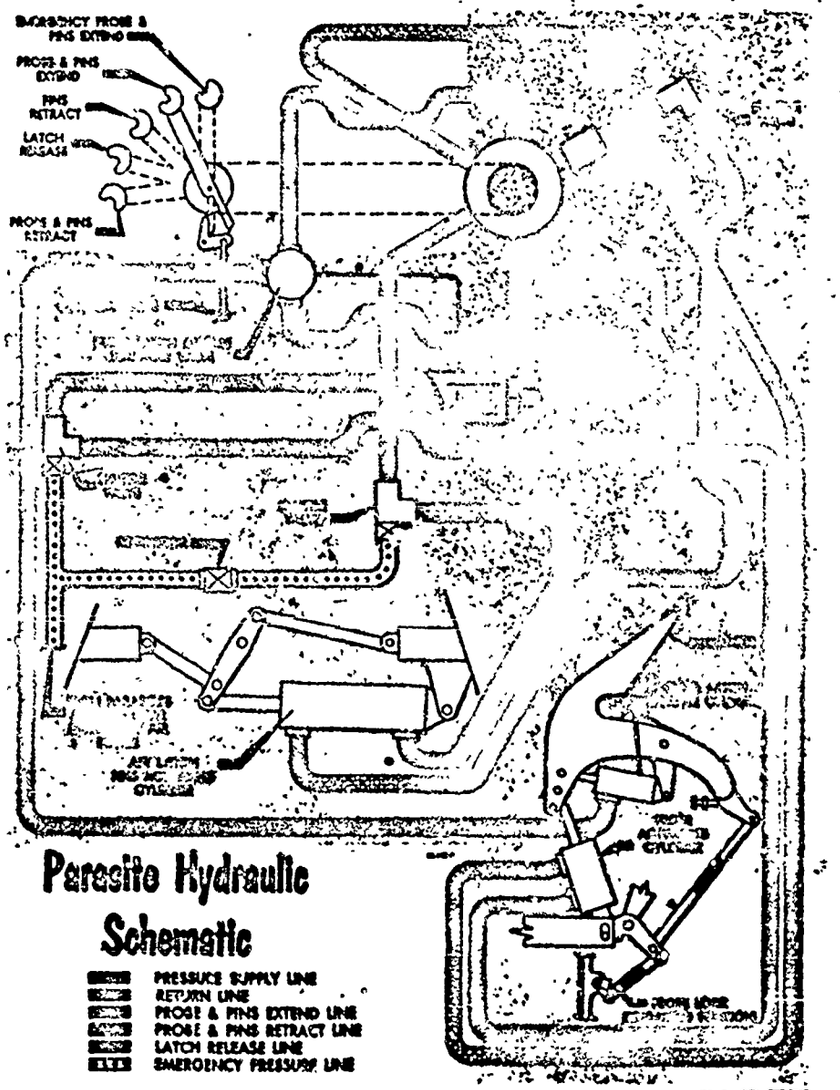



## Paresite Hydraulic Schematic

- PRESSURE SUPPLY LINE
- RETURN LINE
- PROBE & PINS EXTEND LINE
- PROBE & PINS RETRACT LINE
- LATCH RELEASE LINE
- EMERGENCY PRESSURE LINE

SECRET


PLATE 4

SECRET

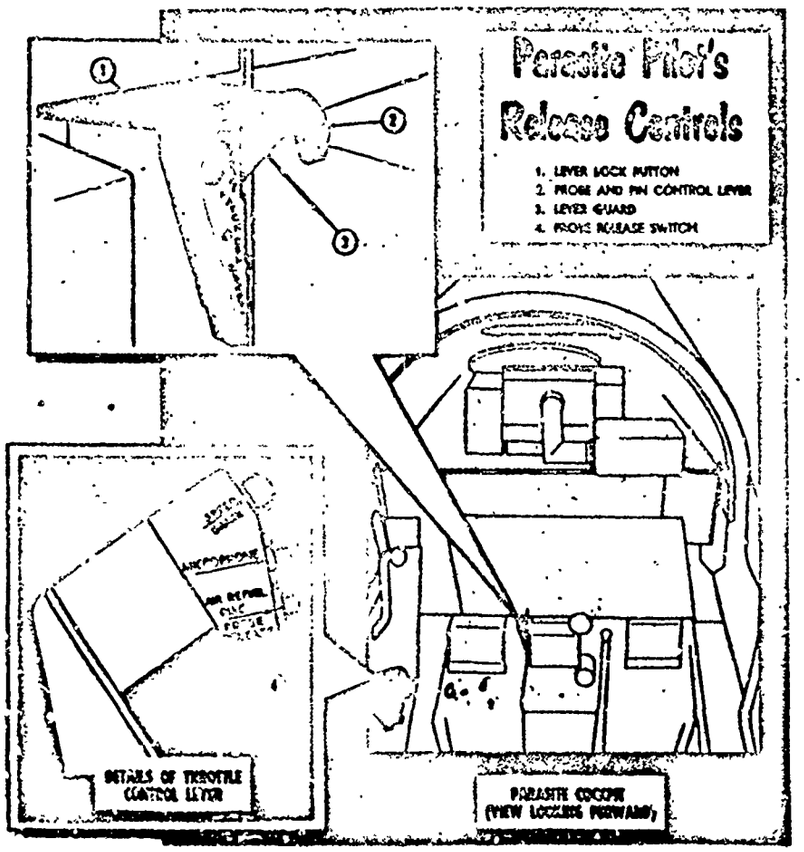


SECRET

PLATE 5

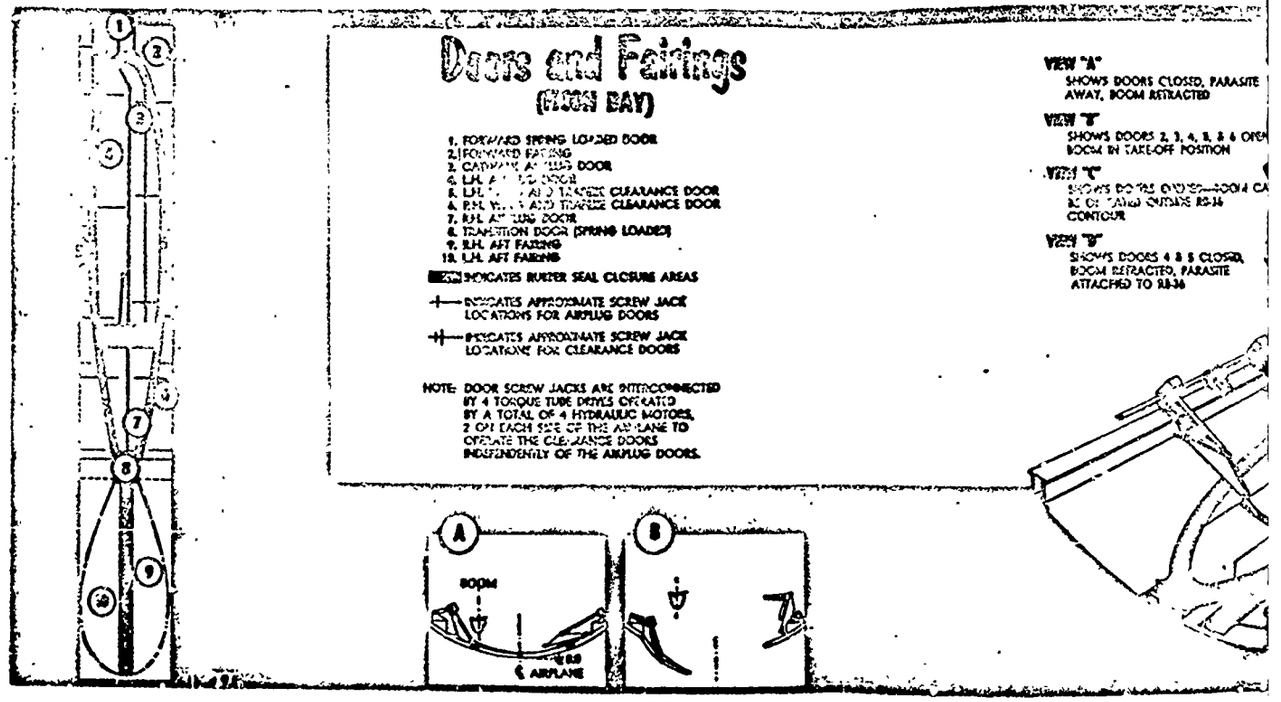
Doors and Fairings
(MAIN BAY)
1. FORWARD SPRING LOADED DOOR
2. FORWARD FAIRING
3. CATWALK AFT DOOR
4. LH. AFT PLUG DOOR
5. L.H. FWD TRANSITION CLEARANCE DOOR
6. R.H. FWD TRANSITION CLEARANCE DOOR
7. R.H. AFT PLUG DOOR
8. TRANSITION DOOR (SPRING LOADED)
9. R.H. AFT FAIRING
10. L.H. AFT FAIRING
INDICATES RUBBER SEAL CLOSURE AREAS
INDICATES APPROXIMATE SCREW JACK LOCATIONS FOR AIRPLUG DOORS
INDICATES APPROXIMATE SCREW JACK LOCATIONS FOR CLEARANCE DOORS
NOTE: DOOR SCREW JACKS ARE INTERCONNECTED BY 4 TORQUE TUBE DRIVES OPERATED BY A TOTAL OF 4 HYDRAULIC MOTORS, 2 ON EACH SIDE OF THE AIRPLANE TO OPERATE THE CLEARANCE DOORS INDEPENDENTLY OF THE AIRPLUG DOORS.
VIEW "A"
SHOWS DOORS CLOSED, PARASITE AWAY, BOOM RETRACTED
VIEW "B"
SHOWS DOORS 2, 3, 4, 5, & 6 OPEN BOOM IN TAKE-OFF POSITION
VIEW "C"
CONTOUR
VIEW "D"
SHOWS DOORS 4 & 5 CLOSED, BOOM RETRACTED, PARASITE ATTACHED TO SB-36
A
B
80PM
AIRPLANE

SECRET

## Fairings


(SAAF)


VIEW "A"
SHOWS DOORS CLOSED, PARASITE AWAIT. BOOM RETRACTED


VIEW "B"
SHOWS DOORS 2, 3, 4, 5, & 6 OPEN BOOM IN TAKE-OFF POSITION

VIEW "C"
SHOWS DOORS OPENED—BOOM CAN BE OPERATED OUTSIDE RB-36 CONTOUR

VIEW "D"
SHOWS DOORS 4 & 5 CLOSED, BOOM RETRACTED, PARASITE ATTACHED TO RB-36

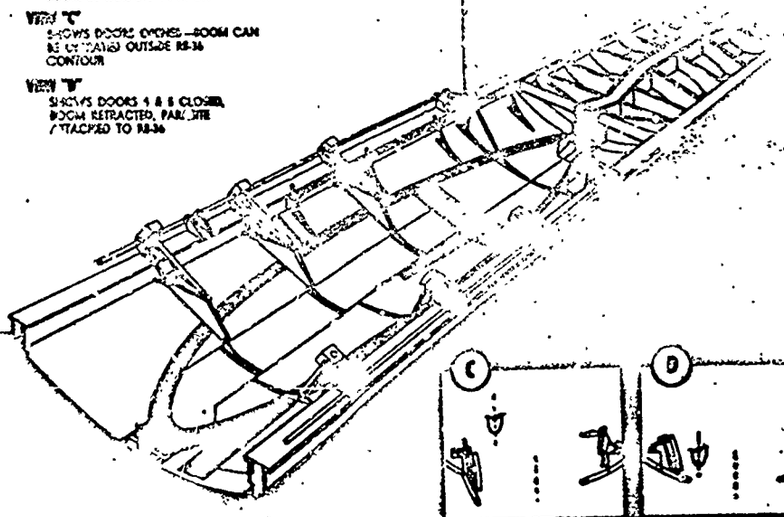







SECRET


PLATE 6

2

PREPARED BY_____
CHECKED BY_____
REVISED BY_____

FORT WORTH DIVISION
FORT WORTH, TEXAS

REPORT NO.
MODEL
DATE 4 1

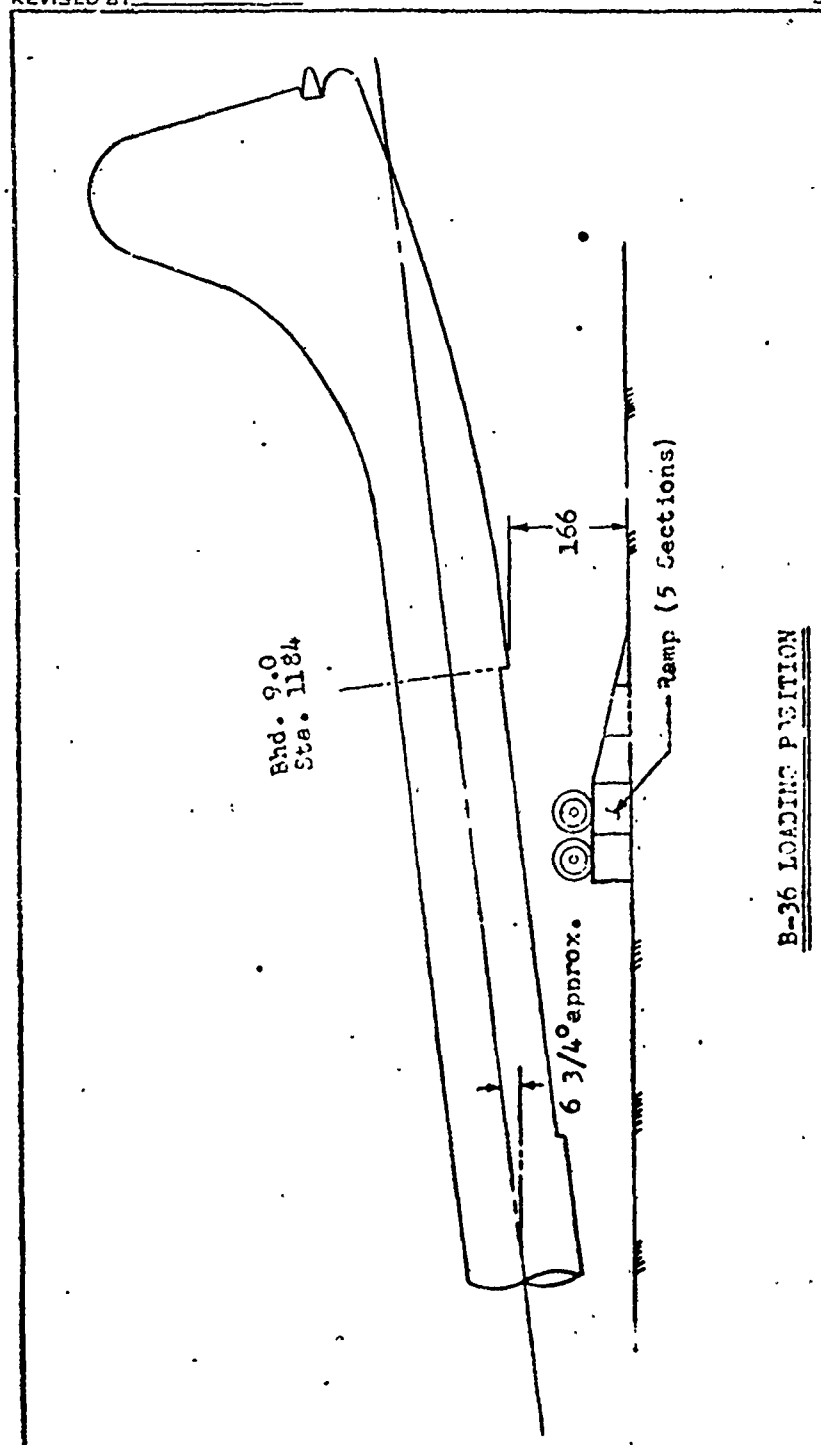


B-36 LOADING POSITION

PLATE 7

# DISCLAIMER NOTICE

THIS DOCUMENT IS BEST QUALITY PRACTICABLE. THE COPY FURNISHED TO DTIC CONTAINED A SIGNIFICANT NUMBER OF PAGES WHICH DO NOT REPRODUCE LEGIBLY.

DEPARTMENT OF THE AIR FORCE
HEADQUARTERS 88TH AIR BASE WING (AFMC)
WRIGHT-PATTERSON AIR FORCE BASE OHIO

88 CS/SCOKIF (FOIA)
3810 Communications Blvd
Wright-Patterson AFB OH 45433-7802

2 SEP 2009

Defense Technical Information Center
Attn: Ms. Kelly Akers (DTIC-R)
8725 John J. Kingman Rd, Suite 0944
Ft Belvoir VA 22060-6218

Dear Ms. Akers,

This concerns the following Technical Reports:
**AD030368**, Project FICON, 28 February 1966 (*FOIA#2009-03050FJM*)
**AD00052997**, Description of Parasite System utilizing Covair, 16 July 1958 (*FOIA# 2009-03049FJM*
**AD0162502**, Project TOM TOM, 16 July 1958 (*FOIA#2009-03046FJM*)

All of these reports have previous Distribution Limitation: 02- DoD and their contractors.

Subsequent to WPAFB FOIA Control Numbers 2009-03050-FJM, 2009-03049FJM and 2009-03046FJM these records have been cleared for public release by Air Force Research Lab Materials and Manufacturing Senior Scientist and Deputy Chief on 25 August 2009. Therefore, record is now fully releasable to the public. I ask that it be available online for public view so that the requestor may obtain the records as needed.

Please let my point of contact know when the record is available to the public. Email: jodi.mccoy@wpafb.af.mil ,if you have any questions, my point of contact is Jodi McCoy at (937) 522-3095.

Sincerely,

KAREN M. COOK
Freedom of Information Act Manager
Base Information Management Section
Knowledge Operations

8 Attachments
1. FOIA Request # 2009-03046FJM
2. Copy of AFMC Form 559
3. FOIA Request # 2009-03050FJM
4. Copy of AFMC Form 559
5. FOIA Request # 2009-03050FJM
6. Copy of AFMC Form 559
7. FOIA Request # 2009-03049FJM
8. Copy of AFMC Form 559