

AD-A049 274

HARRY DIAMOND LABS ADELPHI MD
AN APPROXIMATE SOLUTION FOR THE RESPONSE OF A SPHERE IN A TACTI--ETC(U)

F/G 20/14

DEC 77 M R WILSON
HDL-TM-77-34

UNCLASSIFIED

NL

| OF |
AD
A049 274




END
DATE
FILMED
2-78
DDC

AD A O 49274

ODC FILE COPY

14

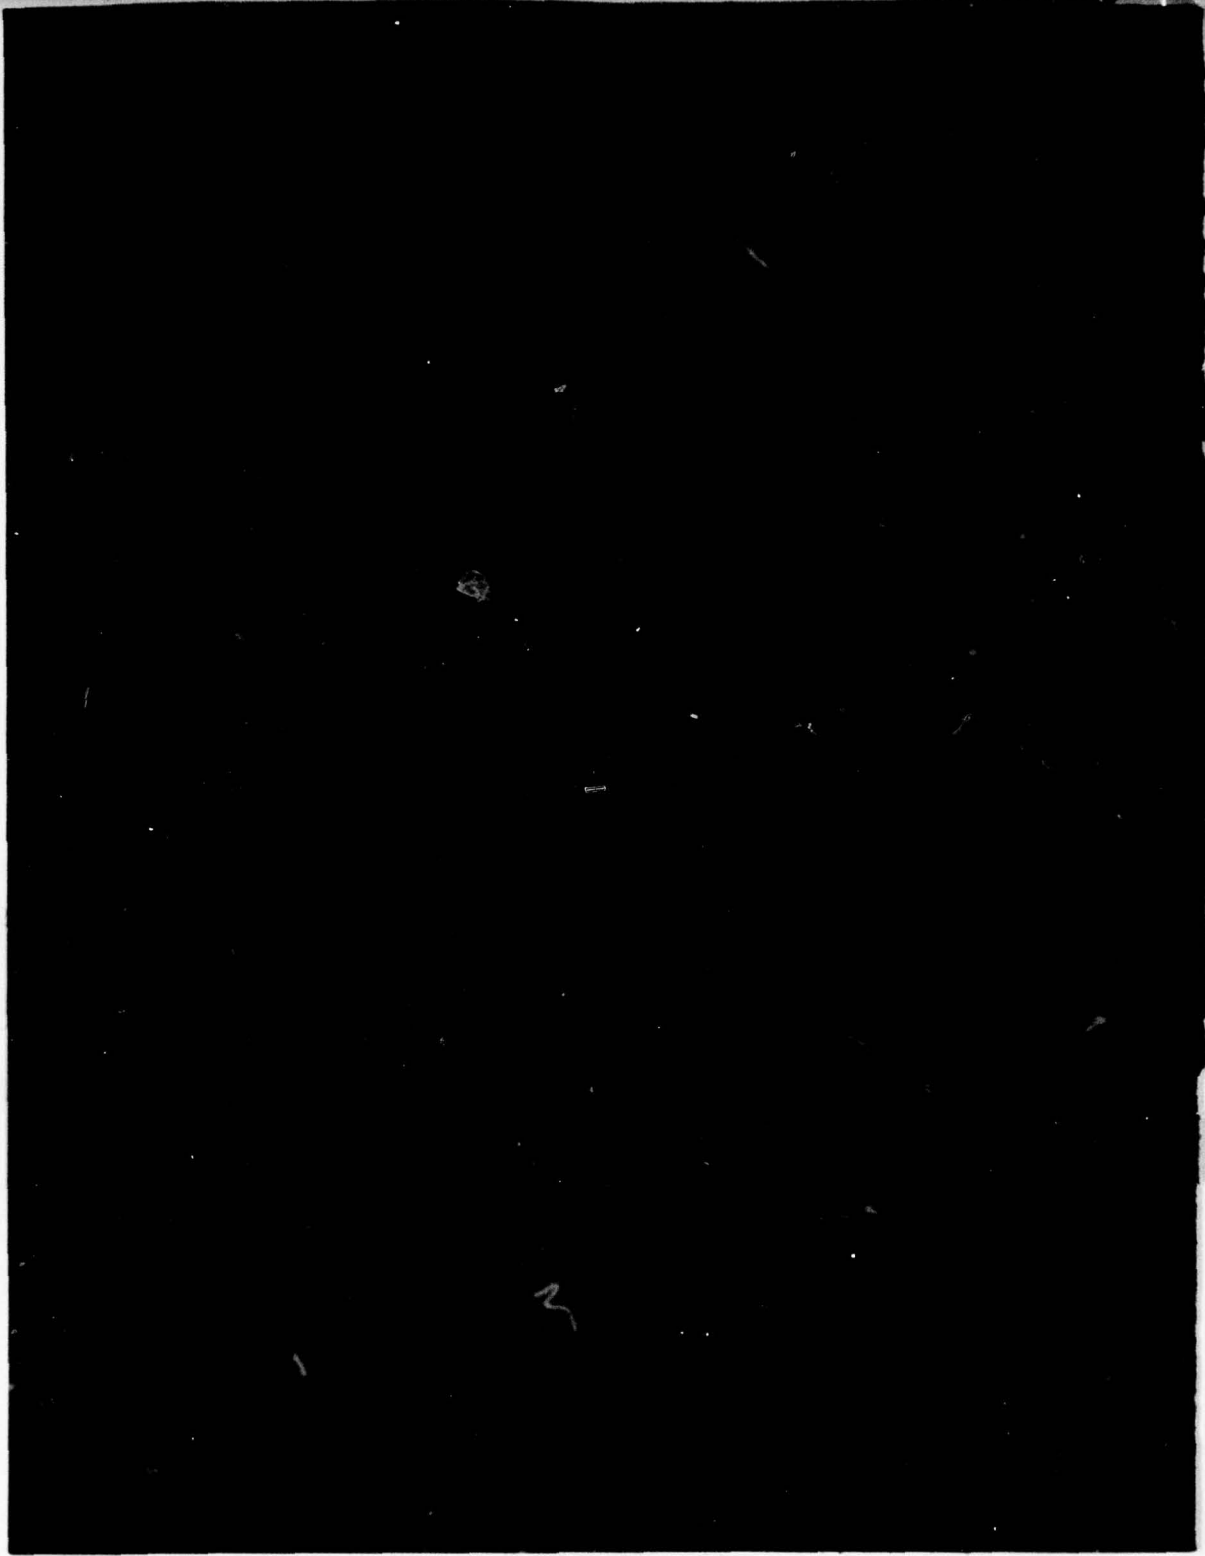

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER HDL-TM-77-34 ✓	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER 9
4. TITLE (and Subtitle) An Approximate Solution for the Response of a Sphere in a Tactical EMP Source Region and Estimates of Coupling to an Antenna		5. DATE OF REPORT & PERIOD COVERED Technical Memorandum
7. AUTHOR(s) Monti R. Wilson		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS Harry Diamond Laboratories 2800 Powder Mill Road Adelphi, MD 20783 ✓		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Program Ele: 62118A
11. CONTROLLING OFFICE NAME AND ADDRESS US Army Materiel Development and Readiness Command Alexandria, VA 22333		12. REPORT DATE December 1977
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) 1227p.		13. NUMBER OF PAGES 33
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		15. SECURITY CLASS. (of this report) UNCLASSIFIED
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
18. SUPPLEMENTARY NOTES HDL Project No: X757E7 DRCMS Code: 612118W750011		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Compton current density Source region coupling (tactical) EMP response of a sphere		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Bombardt (1975) has discussed an early time model for the electromagnetic response of a sphere over a guard plane in the presence of source and conduction currents in the air. In this report the formal field solutions from this model are approximately evaluated via contour integration of inverse Laplace transforms. The resulting scattered radial electric field is used to estimate the electromagnetic pulse response of a sphere-mounted antenna.		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

163 050

LB

Preceding Page BLANK - NOT FILMED

White Section <input checked="" type="checkbox"/>	Buff Section <input type="checkbox"/>
UNCEC	
SECTION	
SECTION/AVAILABILITY CODES	
AVAIL. 800/80 SPECIAL	
A	

CONTENTS

	<u>Page</u>
1. INTRODUCTION	5
2. SPHERE MODEL AND APPROXIMATE SOLUTION	6
3. ANTENNA COUPLING ESTIMATES	11
4. SAMPLE CALCULATION	20
5. CONTOUR INTEGRATION	24
6. TRANSMISSION LINE	27
7. CONCLUDING REMARKS	28
DISTRIBUTION	29

FIGURES

1 Sphere exposed to Compton current density-- A/m^2 in presence of constant conductivity σ (mhos/m)	6
2 Antenna coupling geometry	11
3 Transmission line antenna model	14
4 Transmission line response $I_{ro}(t)$ to equation (25): $\sigma = 0$, L from equation (31), $l(V/M)$	16
5 Incident electric field E_z^i and Compton current pulse	18
6 Short-circuit current ($\alpha/a = 2.08$)	22
7 Short-circuit current ($\alpha/a = 1.5$)	23
8 Short-circuit current ($\alpha/a = 1.0$)	23
9 Bromwich contour	25

TABLES

I Parameters for the Bessel Integral	13
II Exponential Approximation to $(a/r)^3$: ($a = 1 m$)	15

1. INTRODUCTION

One class of problems of current military interest concerns the response of antennas mounted on the exterior surface of metallic equipment shelters to the tactical electromagnetic pulse (EMP) environment created by a near-surface nuclear detonation. With the hope of ultimately obtaining models suitable for engineering purposes, analytic formulations of such problems are posed in ideal geometries with simplified problem physics.

One such formulation consists of a perfectly conducting sphere of radius a , in unbounded space filled with a medium of constant conductivity σ , in the presence of Compton electron flux of velocity v and current density J_c . The source-current density is curl-free and the total electromagnetic current density (in the absence of the sphere) vanishes. The sphere is treated as ideally gamma-thin; that is, for each electron entering the sphere another electron leaves the sphere in the direction of the photon flux.

A formal, frequency-domain series solution to the latter formulation has been obtained by Bombardt.¹ In this report, we obtain an approximate time-domain solution for the electromagnetic fields on or about the sphere by contour integration of inverse Laplace transforms. The approximate solutions are used to perform some tentative estimates of the coupling of the radial electric field near the sphere to an antenna.

¹J. N. Bombardt, Jr., *Electromagnetic Response of a Sphere Over a Ground Plane in the Presence of Source and Conduction Currents in the Air*, Harry Diamond Laboratories TR-1716 (October 1975).

2. SPHERE MODEL AND APPROXIMATE SOLUTION

The problem geometry¹ for the sphere of radius a is shown in figure 1. We use mks units with free-space permittivity

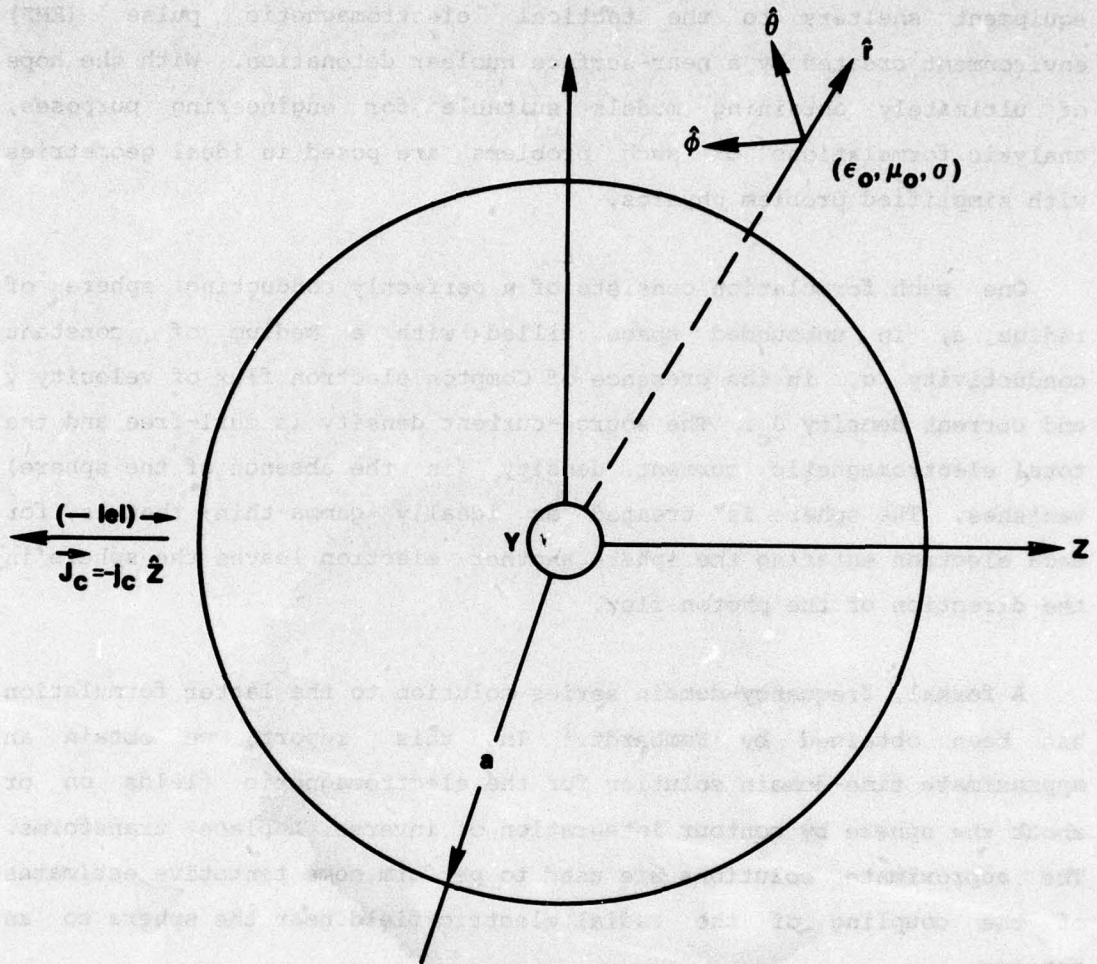


Figure 1. Sphere exposed to Compton current density $--A/m^2$ in presence of constant conductivity $\sigma \frac{mhos}{m}$.

¹J. N. Bombardt, Jr., *Electromagnetic Response of a Sphere Over a Ground Plane in the Presence of Source and Conduction Currents in the Air*, Harry Diamond Laboratories TR-1716 (October 1975).

$\epsilon_0 = 10^{-9}/36\pi$ F/m and free-space permeability $\mu_0 = 4\pi \times 10^{-7}$ H/m. The Compton current density is, with explicit sign for the electron charge,

$$\begin{aligned} \vec{j}_c &= -j_c \left(t - \frac{z}{v} \right) u \left(t - \frac{z}{v} \right) \vec{z} \text{ A/m}^2 \\ &= \tilde{f}(\omega) e^{i\beta z}, \quad \beta = \frac{\omega}{v} \end{aligned} \quad (1)$$

$$u(t) = 0 \quad (t < 0); = 1 \quad (t > 0).$$

In equation (1),

t = time,

z = horizontal coordinate (see fig. 1),

u = Heaviside unit step,

ω = radian frequency, and

$$-\tilde{f}(\omega) = \int_{-\infty}^{\infty} j_c(t) e^{i\omega t} dt \quad (2)$$

$$-j_c(t) = \frac{1}{2\pi} \int_{-\infty}^{\infty} \tilde{f}(\omega) e^{-i\omega t} d\omega.$$

The electric field in the medium in the absence of the sphere is

$$E_z^i = \frac{-\tilde{f}(\omega) e^{i\beta z}}{\sigma - i\omega\epsilon_0}. \quad (3)$$

The formal series solution of the boundary value problem¹ yields the sum of incident and scattered electric fields:

$$\vec{E}^{\text{total}} = \vec{E}^i + \vec{E}^s, \quad (4)$$

where

$$\tilde{H}_\phi(r, \theta, \omega) = \frac{-\tilde{f}(\omega)}{\frac{\omega}{v}} \sum_{n=1}^{\infty} i^{n-1} (2n+1) j_n\left(\frac{\omega a}{v}\right) \frac{h_n^{(1)}(kr)}{\frac{d}{du} [u h_n^{(1)}(u)]_{u=ka}} \frac{\partial P_n}{\partial \theta} \quad (5)$$

¹J. N. Bombardt, Jr., *Electromagnetic Response of a Sphere Over a Ground Plane in the Presence of Source and Conduction Currents in the Air*, Harry Diamond Laboratories TR-1716 (October 1975).

$$\tilde{E}_r^s(r, \theta, \omega) = \frac{\left(\frac{a}{r}\right) \tilde{f}(\omega)}{\epsilon_0 \left(\frac{\omega a}{v}\right) \left(\frac{\sigma}{\epsilon_0} - i\omega\right)} \sum_{n=1} i^{n-1} n(n+1)(2n+1) j_n\left(\frac{\omega a}{v}\right). \quad (6)$$

$$\frac{h_n^{(1)}(kr)}{\frac{d}{du} \left[u h_n^{(1)}(u) \right]_{u=ka}} P_n$$

$$\tilde{E}_\theta^s(r, \theta, \omega) = \frac{\left(\frac{a}{r}\right) \tilde{f}(\omega)}{\epsilon_0 \left(\frac{\omega a}{v}\right) \left(\frac{\sigma}{\epsilon_0} - i\omega\right)} \sum_{n=1} i^{n-1} (2n+1) j_n\left(\frac{\omega a}{v}\right). \quad (7)$$

$$\frac{\frac{d}{du} \left[u h_n^{(1)}(u) \right]_{u=kr}}{\frac{d}{du} \left[u h_n^{(1)}(u) \right]_{u=ka}} \frac{\partial P_n}{\partial \theta}$$

where j_n is the spherical Bessel function, P_n the Legendre polynomial and $h_n^{(1)} = j_n + iy_n$ the Hankel function of the first kind. All special functions are defined with the conventions of Abramowitz and Stegun.² For convenience, we convert the Fourier forms in equations (5) to (7) to Laplace form and perform (term by term) an evaluation of the inversion integral

$$g(t) = \frac{1}{2\pi i} \int_{d-i\infty}^{d+i\infty} \exp(tz_0) \tilde{g}(z_0) dz_0 \quad (8)$$

where $g(z_0)$ represents the desired field from equations (5) to (7) and z_0 is the Laplace transform variable, s , regarded as a complex variable. A Bromwich contour³ is employed (see sect. 5).

²M. Abramowitz and I. A. Stegun, eds., *Handbook of Mathematical Functions*, National Bureau of Standards, AMS 55 (1965).

³F. B. Hildebrand, *Advanced Calculus for Engineers*, Prentice Hall (1949). (We start with the Fourier integral theorem having complex exponential signs opposite to 87(a), p 601).

Formally, equation (8) does not converge on the large semicircle because of a factor in the integrand modulus arising from $j_n \left(iz_0 \frac{a}{v} \right)$. We, therefore, actually evaluate

$$g\left(t + \frac{a}{v}\right) = \frac{1}{2\pi i} \int_{d-i\infty}^{d+i\infty} \exp(tz_0) \left[\exp\left(\frac{a}{v} z_0\right) \tilde{g}(z_0) \right] dz_0. \quad (9)$$

Term by term, the right-hand sides of equations (5) to (7) have no poles (see sect. 5), for $\sigma \neq 0$, other than the pole introduced into equations (6) and (7) by $\sigma - i\omega\epsilon_0$. In order to evaluate equation (9), we resort to the ansatz of calculating for the H_ϕ evaluation, an integrand multiplied by $1/(s + \epsilon)$, with ϵ infinitesimal, then subsequent differentiation. The operand is a step function which yields a Dirac delta function (see sect. 5).

If we use the pole at $z_0 = -\sigma/\epsilon_0$ for the evaluation of E_r^S and E_θ^S , the factor $(a/v)(\sigma/\epsilon_0)$ appears in our expressions.

We can evaluate E_r^S and E_θ^S by a similar ansatz used for H_ϕ by extracting $\tilde{f}(s)/[\epsilon_0(s + \sigma/\epsilon_0)]$ rather than $\tilde{f}(s)$ from the Laplace inversion integrand. With $f(0) = E^{(inc)}(0) = 0$, the subsequent convolutions yield the same result as the σ/ϵ_0 pole evaluations for

$$\frac{\sigma}{\epsilon_0} \frac{a}{v} \ll 1. \quad (10)$$

The approximate field solutions should be subject to the usual skin-depth restriction we give below. In equation (9), it is interesting that $(\sigma/\epsilon_0)(a/v)$ enters the $n=1$ electric field via the factor $\left(1 + [(\sigma/\epsilon_0)(a/v)]^2/10\right)$ in which the difference from unity is small, even for $(\sigma/\epsilon_0)(a/v) \sim 1$. Lerch's Theorem³ assures the uniqueness of equation (15) below in the electric field evaluations.

³F. B. Hildebrand, *Advanced Calculus for Engineers*, Prentice Hall (1949). (We start with the Fourier integral theorem having complex exponential signs opposite to 87(a), p 601).

The resulting solutions for a step in $\tilde{f}(\omega)$, including the electron charge sign, are

$$H_{\phi}^{\text{step}}(r, \theta, t) \approx a \left(\frac{a}{r}\right)^2 D(t) \sin \theta \quad (11)$$

$$E_r^{\text{step}}(r, \theta, t) \approx \frac{2}{\epsilon_0} \left(\frac{a}{r}\right)^3 \cos \theta \int_0^t \exp\left[-\frac{\sigma}{\epsilon_0} (t - \tau)\right] D(\tau) d\tau \quad (12)$$

$$E_{\theta}^{\text{step}}(r, \theta, t) \approx \frac{1}{\epsilon_0} \left(\frac{a}{r}\right)^3 \sin \theta \int_0^t \exp\left[-\frac{\sigma}{\epsilon_0} (t - \tau)\right] D(\tau) d\tau \quad (13)$$

where

$$D(t) = \exp\left[-\frac{\sigma}{2\epsilon_0} \left(\frac{r-a}{c}\right)\right] u\left(t - \frac{r-a}{c}\right) + \frac{\sigma}{2\epsilon_0} \left(\frac{r-a}{c}\right) \int_{\frac{r-a}{c}}^t \exp\left[-\frac{\sigma}{2\epsilon_0} \tau'\right] \frac{I_1\left[\frac{\sigma}{2\epsilon_0} \sqrt{\tau'^2 - \left(\frac{r-a}{c}\right)^2}\right]}{\sqrt{\tau'^2 - \left(\frac{r-a}{c}\right)^2}} d\tau' \quad (14)$$

In equation (14), I_1 is an integer order modified Bessel function. The desired responses are, therefore,

$$g(t) = \int_0^t \frac{\partial}{\partial (t - \tau)} [j_c(t - \tau) u(t - \tau)] g^{\text{step}}(\tau) d\tau, \quad j_c(0) = 0 \quad (15)$$

where g^{step} represents any of the functions in equations (11) to (13).

At $r=a$, the H field and surface current from equations (11), (14), and (15) is

$$\begin{aligned} H_{\phi}(t) &\approx a j_c(t) \sin \theta \\ K_{\theta}(t) &\approx -a j_c(t) \sin \theta \end{aligned} \quad (15)'$$

3. ANTENNA COUPLING ESTIMATES

We desire to estimate the short-circuit base-current contribution for an antenna mounted on the sphere as shown in figure 2, due to the field E_r^S . The direct coupling of E_i to the antenna is not considered here.

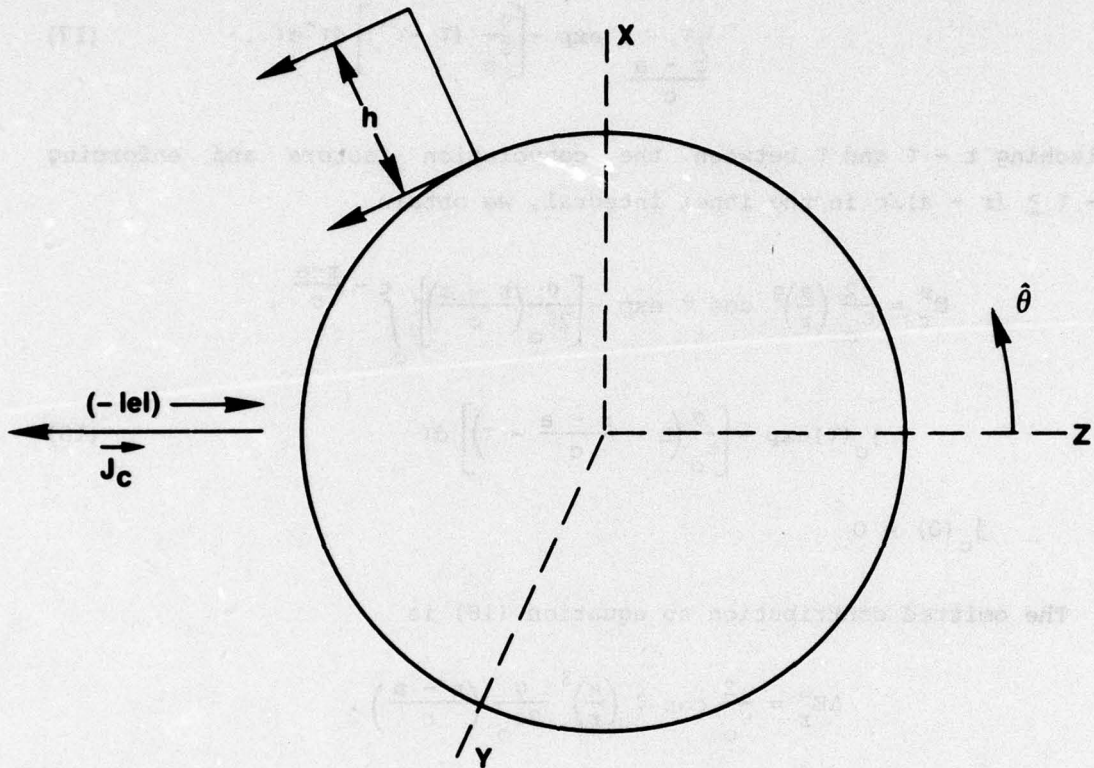


Figure 2. Antenna coupling geometry.

We assume in these calculations that the skin depth in the air is significantly greater than twice the sphere radius. Thus, skin depth is

$$\sqrt{\langle x^2 \rangle} = \sqrt{\frac{1.6}{\sigma} \times 10^6 t(\text{seconds})} \text{ (meters)} > 2a \quad (16)$$

where t is the time of interest.

To use E_r^S for coupling estimates, we shall keep the first term in equation (14) and roughly estimate the importance of the second term. Thus, from equations (12), (14), and (15), we find

$$E_r^S = \frac{2}{\epsilon_0} \left(\frac{a}{r}\right)^3 \cos \theta \exp \left[-\frac{\sigma}{2\epsilon_0} \left(\frac{r-a}{c}\right) \right] \int_0^t \frac{\partial j_c(t-\tau)}{\partial(t-\tau)} \cdot \int_{\frac{r-a}{c}}^{\tau} \exp \left[-\frac{\sigma}{\epsilon_0} (\tau - \tau') \right] d\tau' d\tau . \quad (17)$$

Switching $t - \tau$ and τ between the convolution factors and enforcing $t - \tau \geq (r - a)/c$ in the inner integral, we obtain

$$E_r^S = \frac{2}{\epsilon_0} \left(\frac{a}{r}\right)^3 \cos \theta \exp \left[-\frac{\sigma}{2\epsilon_0} \left(\frac{r-a}{c}\right) \right] \int_0^{t - \frac{r-a}{c}} j_c(\tau) \exp \left[-\frac{\sigma}{\epsilon_0} \left(t - \frac{r-a}{c} - \tau\right) \right] d\tau \quad (18)$$

$$j_c(0) = 0$$

The omitted contribution to equation (18) is

$$\Delta E_r^S = \frac{2}{\epsilon_0} \cos \theta \left(\frac{a}{r}\right)^3 \frac{\sigma}{2\epsilon_0} \left(\frac{r-a}{c}\right) \cdot \int_0^t j_c'(\tau) \int_{\frac{r-a}{c}}^{t-\tau} \exp \left[-\frac{\sigma}{\epsilon_0} (t - \tau - \tau') \right] d\tau' d\tau \quad (19)$$

$$\int_{\frac{r-a}{c}}^{\tau'} \exp \left[-\frac{\sigma}{2\epsilon_0} \tau'' \right] \frac{I_1 \left[\frac{\sigma}{2\epsilon_0} \sqrt{\tau''^2 - \left(\frac{r-a}{c}\right)^2} \right]}{\sqrt{\tau''^2 - \left(\frac{r-a}{c}\right)^2}} d\tau'' d\tau' d\tau .$$

The τ'' integral in equation (19) is

$$\leq (0.2) \int_1^{\tau'/(r-a)} \frac{\exp\left[-\frac{\sigma}{2\epsilon_0} \left(\frac{r-a}{c}\right) (u - \sqrt{u^2 - 1})\right]}{\sqrt{u^2 - 1}} du$$

$$\leq (0.2) \int_1^{\tau'/(r-a)} \left(\frac{\tau'}{c}\right) (\sqrt{u^2 - 1})^{-1} du = 0.2 \ln \left[\sqrt{\left(\frac{\tau'}{c}\right)^2 - 1} + \frac{\tau'}{c} \right], \quad (20)$$

where the 0.2 comes from a constant approximation (an overestimate) to $e^x I_1(x)$ shown in Abramowitz and Stegun.²

Some values of interest are shown in table I.

TABLE I. PARAMETERS FOR THE BESSEL INTEGRAL

u	$u - \sqrt{u^2 - 1}$	$\frac{\tau'}{c}$	$\ln \left[\sqrt{\frac{\tau'}{c} - 1} + \frac{\tau'}{c} \right]$
1	1	1	0
1.5	0.38	5	2.3
3	0.17	10	3.0
5	0.1	100	5.3
10	0.05	1000	7.6

Thus, in the total E_r^S integral, the factor multiplying the exponential in the τ' integration is

$$\leq \left(\exp \left[-\frac{\sigma}{2\epsilon_0} \left(\frac{r-a}{c}\right) \right] + (0.2) \ln \left[\sqrt{\left(\frac{\tau'}{c}\right)^2 - 1} + \frac{\tau'}{c} \right] \right) \frac{\sigma}{2\epsilon_0} \left(\frac{r-a}{c}\right) \quad (21)$$

²M. Abramowitz and I. A. Stegun, eds., *Handbook of Mathematical Functions*, National Bureau of Standards, AMS 55 (1965).

We may use equation (21) to qualitatively judge if the second term from equation (19) is not dominant in our estimate.

The Laplace transform of equation (18) is

$$\tilde{E}_r^s(s) = \frac{2}{\epsilon_0} \cos \theta \left(\frac{a}{r}\right)^3 \exp \left[-\frac{\sigma}{2\epsilon_0} \left(\frac{r-a}{c}\right) \right] \exp \left[-\left(\frac{r-a}{c}\right)s \right] \frac{j_c(s)}{\frac{\sigma}{\epsilon_0} + s} . \quad (22)$$

We shall treat the antenna as a monopole over an infinite, perfectly conducting ground plane. To model the antenna, we use a transmission line analog due to Stark,⁴ shown in figure 3. The transmission line is lossless ($\sigma = 0$) and the characteristic impedance is

$$z_c = 60 \left[\ln \left(\frac{2h}{r_0} \right) - 1 \right] \text{ (ohms) } , \quad (23)$$

where r_0 is the antenna radius.

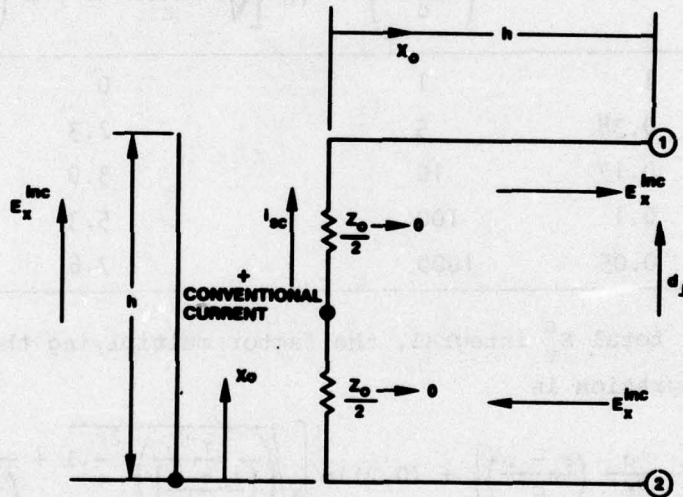


Figure 3. Transmission line antenna model.

⁴Werner J. Stark, *Transient Response of a Log-Periodic Antenna Based on Broad-band Continuous-Wave Measurements*, Harry Diamond Laboratories TR-1792 (April 1977).

The incident field for the transmission line from equation (22)

$$E_{x_0}^{inc}(s) = \frac{2}{\epsilon_0} \cos \theta \exp \left[-x_0 \left(\frac{\alpha}{a} + \frac{\sigma}{2\epsilon_0 c} \right) - x_0 \frac{s}{c} \right] \frac{j_c(s)}{s + \frac{\sigma}{\epsilon_0}} \quad (24)$$

where we have approximated the $\left(\frac{a}{r}\right)^3$ falloff by an exponential as shown typically in table II.

TABLE II. EXPONENTIAL APPROXIMATION TO $\left(\frac{a}{r}\right)^3$: ($a = 1$ m)

r	$\left(\frac{a}{r}\right)^3$	$\exp \left[-\frac{\alpha}{a} (r-a) \right]$		
		$\frac{\alpha}{a} = 2.08$	$\frac{\alpha}{a} = 1.5$	$\frac{\alpha}{a} = 1$
a	1.0	1.0	1.0	1.0
1.25a	0.51	0.59	0.69	0.78
1.5a	0.30	0.35	0.47	0.61
2.0a	0.13	0.12	0.22	0.37

In comparison, $\frac{\sigma}{2\epsilon_0 c} = 0.02 \frac{\sigma}{10^{-4}}$.

The transmission line response (see sect. 6) to

$$E_{step}^{inc} = \frac{1}{s} \exp \left(-\frac{x_0 s}{c} \right) \exp \left[-x_0 \left(\frac{\alpha}{a} + \frac{\sigma}{2\epsilon_0 c} \right) \right] \quad (25)$$

is shown in figure 4.

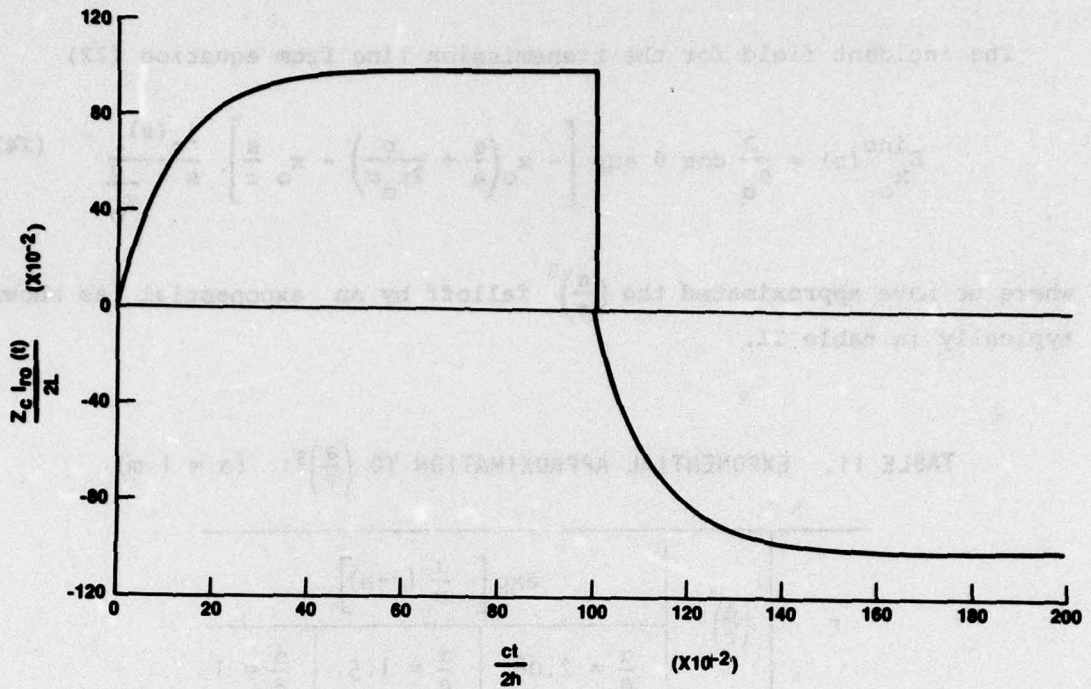


Figure 4. Transmission line response $I_{ro}(t)$ to equation (25): $\sigma = 0$, L from equation (31), $1 \frac{V}{M}$.

From equation (25) we may then convolve $I_{ro}(t)$ with $e^{-\sigma/\epsilon_0 t}$ and restore the amplitude:

$$\begin{aligned}
 I_r(t) &= \frac{2}{\epsilon_0} \cos \theta \int_0^t I_{ro}(t - \tau) \exp\left(-\frac{\sigma}{\epsilon_0} \tau\right) d\tau \\
 &= \frac{2L}{z_c} \left[\frac{1 - \exp\left(-\frac{\sigma}{\epsilon_0} t\right)}{\frac{\sigma}{\epsilon_0}} - \frac{\exp\left(-\frac{\sigma}{\epsilon_0} t\right) - \exp\left(-\frac{c}{2L} t\right)}{\frac{c}{2L} - \frac{\sigma}{\epsilon_0}} \right], \quad 0 \leq t \leq \frac{2h}{c} = t_1 \\
 &= \frac{2L}{z_c} \left[\frac{\exp\left[-\frac{\sigma}{\epsilon_0}(t - t_1)\right] - 1}{\frac{\sigma}{\epsilon_0}} + \frac{\exp\left[-\frac{\sigma}{\epsilon_0}(t - t_1)\right] - \exp\left(-\frac{\sigma}{\epsilon_0} t\right)}{\frac{\sigma}{\epsilon_0}} \right]
 \end{aligned}$$

$$\begin{aligned}
& + \frac{\exp\left[-\frac{\sigma}{\epsilon_0}(t - t_1)\right] - \exp\left[-\frac{c}{2L}(t - t_1)\right]}{\frac{c}{2L} - \frac{\sigma}{\epsilon_0}} \\
& - \frac{\exp\left[-\frac{\sigma}{\epsilon_0}t\right] - \exp\left[-\frac{\sigma}{\epsilon_0}(t - t_1)\right] \exp\left(-\frac{c}{2L}t_1\right)}{\frac{c}{2L} - \frac{\sigma}{\epsilon_0}} \Bigg], \quad t_1 \leq t \leq 2t_1. \quad (26)
\end{aligned}$$

The constant L is given in equation (31) below. The short-circuit current estimate is

$$I_{sc}(t) = \int_0^t \frac{\partial}{\partial(t - \tau)} [j_c(t - \tau)u(t - \tau)] I_r(\tau) d\tau \quad (27)$$

where the voltage and current polarities (see fig. 3) are

$$\begin{aligned}
V_{line} &= -\int_2^1 \vec{E}_1 \cdot d\vec{l} \\
\frac{\partial V}{\partial x} &= -L_0 \frac{\partial i_1}{\partial t} + E_x^{i_1} - E_x^{i_2}, \quad (28)
\end{aligned}$$

where L_0 is line inductance per unit length. Equation (27) has a Laplace transform identical to the more familiar form in which $j_c \rightarrow E^S$, $I_r \rightarrow I_{ro}$. Uniqueness is again assured by Lerch's Theorem.

We choose the following test pulse, shown in figure 5,

$$j_c(t) = \frac{j_m}{t_r} t \exp\left(1 - \frac{t}{t_r}\right) A/m^2. \quad (29)$$

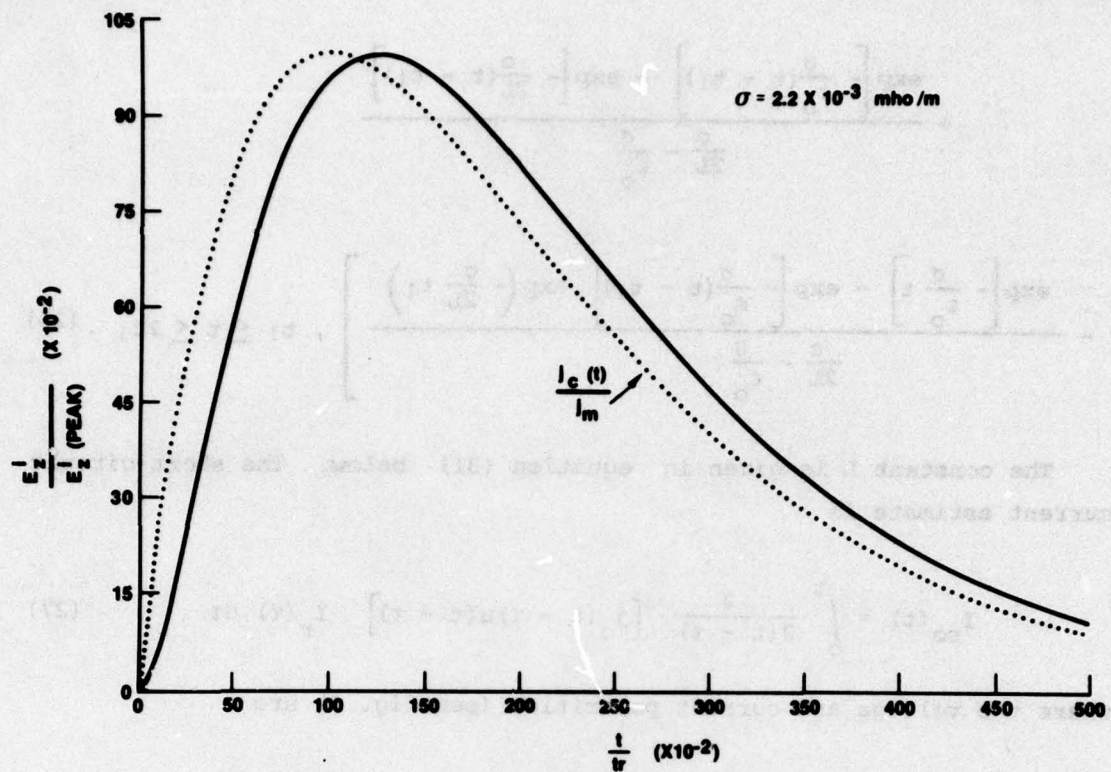


Figure 5. Incident electric field E_z^i and Compton current pulse.

From equations (26) and (27) (see sect. 6, eq 59),

$$I_{sc} \left(0 \leq t \leq t_1 = \frac{2h}{c} \right) = \frac{2}{\epsilon_0} \cos \theta \left(\frac{2L}{z_c} \right) j_m t_r e^{1 \frac{\frac{c}{2L}}{\frac{c}{2L} - \frac{\sigma}{\epsilon_0}}} \cdot$$

$$\left[\frac{t}{t_r} \exp \left(- \frac{t}{t_r} \right) \frac{\frac{c}{2L} t_r - \frac{\sigma}{\epsilon_0} t_r}{\left(\frac{\sigma}{\epsilon_0} t_r - 1 \right) \left(\frac{c}{2L} t_r - 1 \right)} + \frac{1}{\left(\frac{c}{2L} t_r - 1 \right)^2} \cdot \right.$$

$$\left. \left(\exp \left[- \frac{t}{t_r} \right] - \exp \left[- \frac{c}{2L} t \right] \right) + \frac{1}{\left(\frac{\sigma}{\epsilon_0} t_r - 1 \right)^2} \left(\exp \left[- \frac{\sigma}{\epsilon_0} t \right] - \exp \left[- \frac{t}{t_r} \right] \right) \right] \quad (30)$$

where

$$L = \frac{1}{\frac{a}{a} + \frac{\sigma}{2\epsilon_0 c}} \quad (\text{see table II}), \quad (31)$$

$$\begin{aligned}
 I_{sc} \left(t_1 \leq t \leq \frac{4h}{c} \right) &= \frac{2}{\epsilon_0} \cos \theta \left(\frac{2L}{z_c} \right) j_m t_r e^1 \left\{ \left[-2 + \exp \left(-\frac{\sigma}{\epsilon_0} t_1 \right) \right. \right. \\
 &+ \left. \frac{\frac{\sigma}{\epsilon_0}}{\frac{c}{2L} - \frac{\sigma}{\epsilon_0}} \left(\exp \left[-\frac{\sigma}{\epsilon_0} t_1 \right] - 1 - \exp \left[-\frac{c}{2L} t_1 \right] \right) \right] \left[\frac{\left(\frac{t-t_1}{t_r} \right) \exp \left(-\frac{t-t_1}{t_r} \right)}{\frac{\sigma}{\epsilon_0} t_r - 1} \right. \right. \\
 &\left. \left. - \frac{1}{\left(\frac{\sigma}{\epsilon_0} t_r - 1 \right)^2} \left(\exp \left[-\frac{t-t_1}{t_r} \right] - \exp \left[-\frac{\sigma}{\epsilon_0} (t-t_1) \right] \right) \right] \right\} \\
 &+ \frac{\frac{c}{2L}}{\frac{c}{2L} - \frac{\sigma}{\epsilon_0}} \left[\frac{\left(\frac{t-t_1}{t_r} \right) \exp \left(-\frac{t-t_1}{t_r} \right)}{\frac{c}{2L} t_r - 1} \right. \\
 &\left. - \frac{1}{\left(\frac{c}{2L} t_r - 1 \right)^2} \left(\exp \left[-\frac{t-t_1}{t_r} \right] - \exp \left[-\frac{c}{2L} (t-t_1) \right] \right) \right] \\
 &+ \frac{\frac{c}{2L}}{\frac{c}{2L} - \frac{\sigma}{\epsilon_0}} \left[\left(\frac{t}{t_r} \right) \exp \left(-\frac{t}{t_r} \right) \frac{\frac{c}{2L} t_r - \frac{\sigma}{\epsilon_0} t_r}{\left(\frac{c}{2L} t_r - 1 \right) \left(\frac{\sigma}{\epsilon_0} t_r - 1 \right)} \right. \\
 &\left. + \frac{1}{\left(\frac{c}{2L} t_r - 1 \right)^2} \left(\exp \left[-\frac{t}{t_r} \right] - \exp \left[-\frac{t-t_1}{t_r} \right] \exp \left[-\frac{ct_1}{2L} \right] \right) \right]
 \end{aligned}$$

$$\begin{aligned}
& + \frac{1}{\left(\frac{\sigma}{\epsilon_0} t_r - 1\right)^2} \left(\exp\left[-\frac{t-t_1}{t_r}\right] \exp\left[-\frac{\sigma}{\epsilon_0} t_1\right] - \exp\left[-\frac{t}{t_r}\right] \right) \\
& + \left(\frac{t-t_1}{t_r} \right) \exp\left(-\frac{t-t_1}{t_r}\right) \left(\frac{\exp\left[-\frac{c}{2L} t_1\right]}{\frac{c}{2L} t_r - 1} - \frac{\exp\left[-\frac{\sigma}{\epsilon_0} t_1\right]}{\frac{\sigma}{\epsilon_0} t_r - 1} \right) \Bigg\} \quad (32)
\end{aligned}$$

Equations (30) and (32) are only valid for the following restriction since only $I_{ro}(t)$ was so simplified.

$$\exp\left(-\frac{h}{L}\right) \ll 1. \quad (33)$$

4. SAMPLE CALCULATION

If we use the model of section 3 for a sphere near a ground plane, we should attempt to take some account of E^i in the presence of the ground. Following a suggestion of Bombardt, we force E^i by adjusting j_m , t_r , and σ to be as representative as possible of some prescribed near-ground horizontal electric field.

Now,

$$\epsilon_0 \dot{E}_z^i + \sigma E_z^i = -J_C \quad (34)$$

and with our test pulse,

$$E_z^i = \frac{j_m e^{-t/t_r}}{\epsilon_0} \left[\frac{\left(\frac{t}{t_r}\right) \exp\left(-\frac{t}{t_r}\right)}{\frac{\sigma}{\epsilon_0} t_r - 1} + \frac{\exp\left[-\frac{\sigma}{\epsilon_0} t_r \left(\frac{t}{t_r}\right)\right] - \exp\left(-\frac{t}{t_r}\right)}{\left(\frac{\sigma}{\epsilon_0} t_r - 1\right)^2} \right]. \quad (35)$$

This electric field peaks at

$$\left(\frac{t}{t_r}\right)_{\text{peak}} = \frac{\left(\frac{\sigma}{\epsilon_0} t_r\right) \left[1 - \exp\left(-\left(\frac{\sigma}{\epsilon_0} t_r - 1\right) \left(\frac{t}{t_r}\right)_{\text{peak}}\right) \right]}{\frac{\sigma}{\epsilon_0} t_r - 1} \quad (36)$$

In order to have a peak, we must fix t_r and select $(\sigma/\epsilon_0)t_r > 1$. For the example, we choose

$$z_c = 372 \text{ ohms,}$$

$$a = 1 \text{ m,}$$

$$\frac{a}{a} = 2.08 \text{ (table II),}$$

$$h = 4 \text{ m, and}$$

$$t_r = 20 \text{ ns,}$$

in which case the exponential more closely approximates $\left(\frac{a}{r}\right)^3$. The electric field E_z^i at $r=a$ for one value of $(\sigma/\epsilon_0)t_r$ is shown in figure 5. The short-circuit current estimate for the case in figure 5 is shown in figure 6.

The peak value of I_{sc} is

$$|I_{sc}| \text{ (first peak)} \sim (1.9) j_m(1) |\cos \theta| \quad (37)$$

$$\left(\frac{\sigma}{\epsilon_0} t_r = 5\right). \quad (38)$$

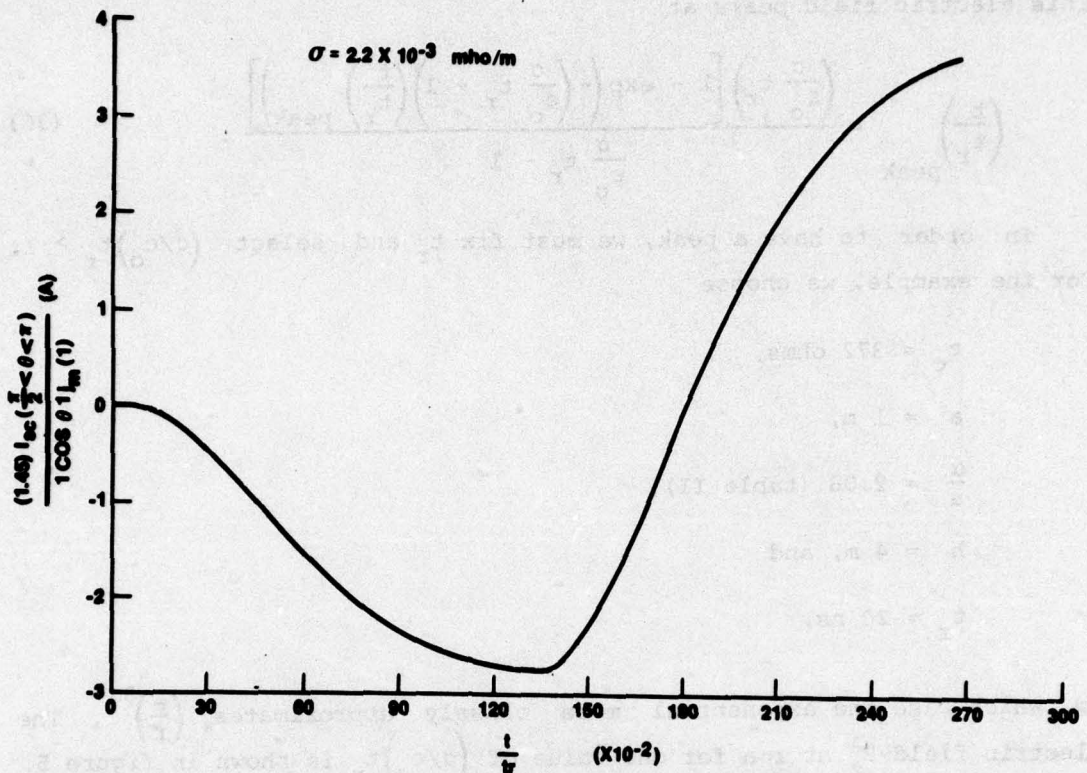


Figure 6. Short-circuit current ($\frac{\alpha}{a} = 2.08$).

Let us now vary the exponential attenuation, $\frac{\alpha}{a}$, while keeping the remaining parameter set fixed. Results are shown in figures 7 and 8. The peak currents vary monotonically upward as the attenuation is decreased.

The ideally gamma-thin sphere model¹ yields a net time-dependent charge which is equal to the total charge that would be present in the volume of conducting medium excluded by the sphere. Our approximate driving electric field E_r^S yields zero net charge on the sphere.

¹J. N. Bombardt, Jr., *Electromagnetic Response of a Sphere Over a Ground Plane in the Presence of Source and Conduction Currents in the Air*, Harry Diamond Laboratories TR-1716 (October 1975).

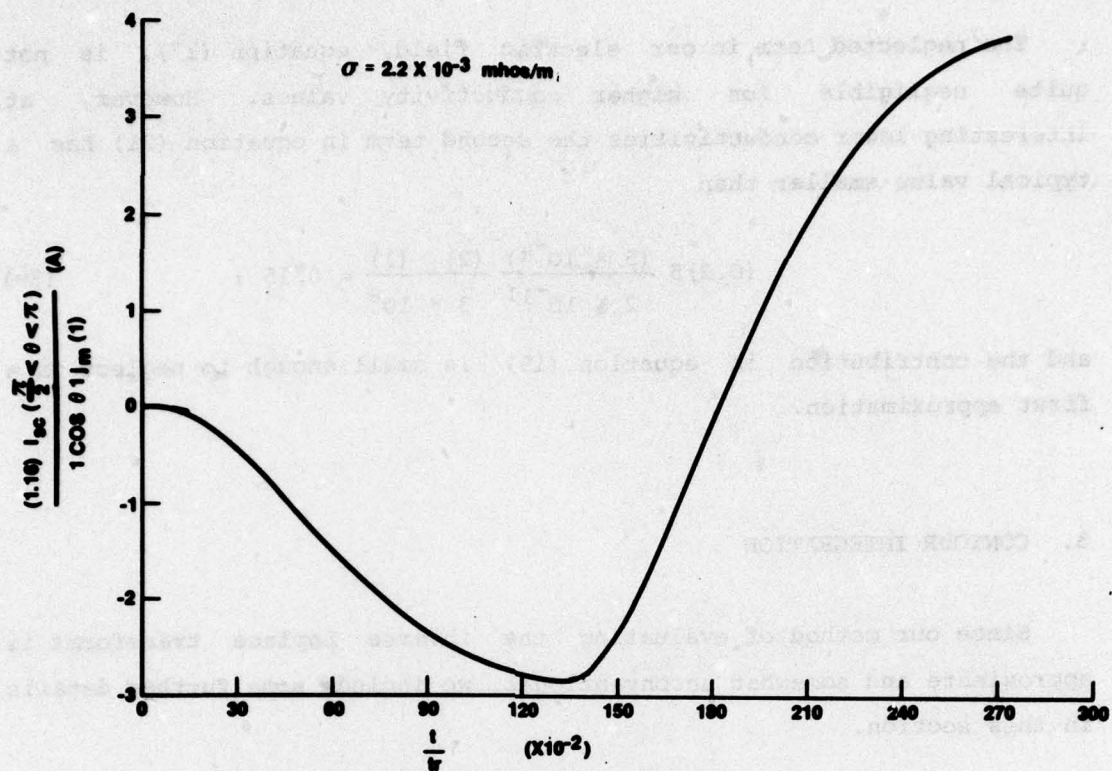


Figure 7. Short-circuit current ($\alpha/a = 1.5$).

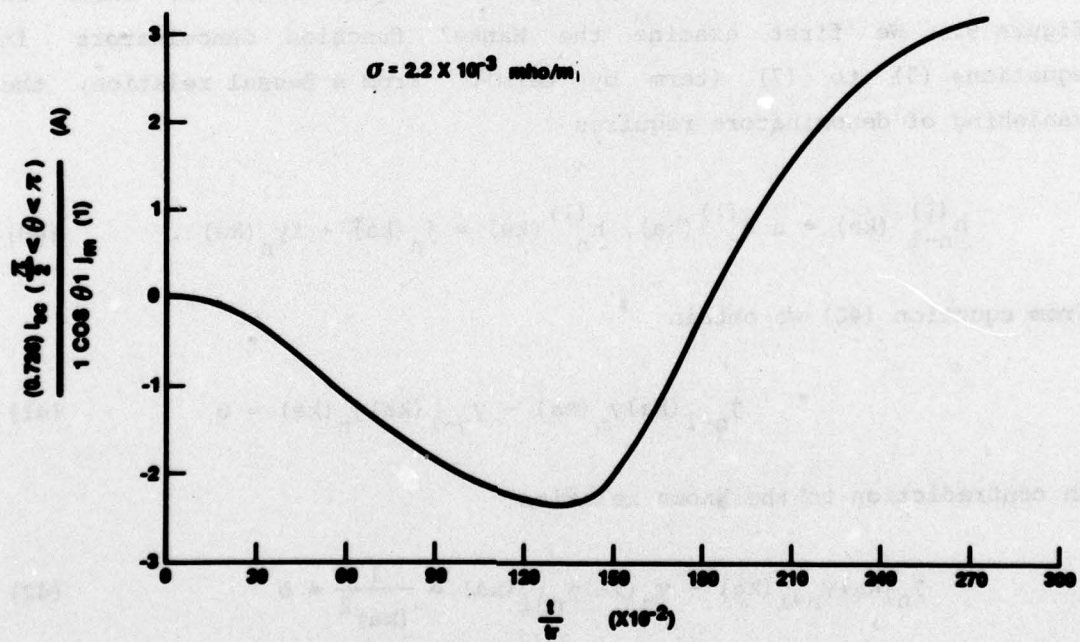


Figure 8. Short-circuit current ($\alpha/a = 1.0$).

The neglected term in our electric field, equation (17), is not quite negligible for higher conductivity values. However, at interesting lower conductivities the second term in equation (21) has a typical value smaller than

$$(0.2)5 \frac{(5 \times 10^{-4})}{2 \times 10^{-11}} \frac{(2)}{3 \times 10^8} \frac{(1)}{3 \times 10^8} = 0.15 ; \quad (39)$$

and the contribution in equation (19) is small enough to neglect in a first approximation.

5. CONTOUR INTEGRATION

Since our method of evaluating the inverse Laplace transforms is approximate and somewhat unconventional, we include some further details in this section.

The Bromwich contour for evaluation of equation (9) is shown in figure 9. We first examine the Hankel function denominators in equations (5) to (7) (term by term). From a Bessel relation, the vanishing of denominators requires

$$h_{n-1}^{(1)}(ka) = n h_n^{(1)}(ka), \quad h_n^{(1)}(ka) = j_n(ka) + iy_n(ka). \quad (40)$$

From equation (40) we obtain

$$j_{n-1}(ka)y_n(ka) - y_{n-1}(ka)j_n(ka) = 0 \quad (41)$$

in contradiction to the known relation

$$j_n(ka)y_{n-1}(ka) - y_n(ka)j_{n-1}(ka) = \frac{1}{(ka)^2} \neq 0 \quad (42)$$

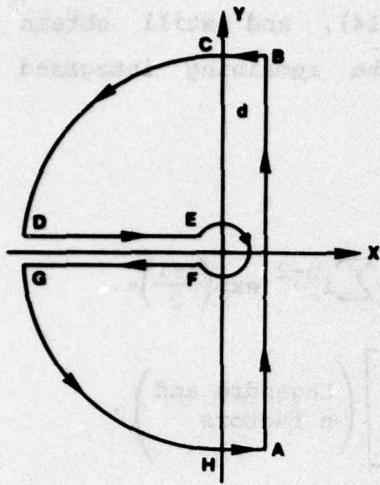


Figure 9. Bromwich contour.

since $\sigma \neq 0$. As $|k| \rightarrow 0$, the Hankel function factors in our residue evaluations vanish. For convenience we work with the Laplace variable

$$s = d - i\omega. \quad (43)$$

The argument of the Hankel functions comes from

$$k^2 = i\omega\mu_0(\sigma - i\omega\epsilon_0)$$

$$k = \frac{1}{c} e^{i\pi/2} k_0 \exp\left[i\left(\frac{\theta}{2} + m\pi\right)\right] \quad (44)$$

$$m = 0, \pm 1, \pm 2, \dots$$

where

$$z = r_0 e^{i\theta} \quad (45)$$

$$k_0 = \frac{\sqrt{r_0}}{c} \left[r_0^2 + 2 \frac{\sigma}{\epsilon_0} r_0 \cos \theta + \left(\frac{\sigma}{\epsilon_0} \right)^2 \right]^{1/2} \quad (46)$$

$$\theta_0 = \arctan \left[\frac{r_0 \sin 2\theta + \frac{\sigma}{\epsilon_0} \sin \theta}{r_0 \cos 2\theta + \frac{\sigma}{\epsilon_0} \cos \theta} \right] + l\pi \quad (47)$$

$$l = 0, \pm 1, \pm 2, \dots$$

First we state that (term by term) the modulus of $\exp(a/v)z \tilde{g}(z)$ vanishes on CB and HA where $\tilde{g}(z)$ are the integrands resulting from the fields in equations (5) to (7). The integrand moduli also vanish on AB as $r_0 \rightarrow \infty$.

Likewise, the integrand moduli also vanish on CD and GH as $r_0 \rightarrow \infty$. We find that we may remove as a convolution factor:

$$\frac{\exp[ik(r-a)]}{z} \rightarrow \frac{\exp\left[-\left(\frac{r-a}{c}\right) \sqrt{s\left(s + \frac{\sigma}{\epsilon_0}\right)}\right]}{s} \quad (48)$$

the known transform of which⁵ yields equation (14), and still obtain vanishing moduli on the contour extremes for the remaining integrand factors.

The loop integrals DEFG are of the form

$$I_{\text{loop}} = - \int_0^{\infty} dx e^{-tx} \exp\left(-\frac{a}{v}x\right) \left(\frac{\text{numerical}}{\text{factor}}\right) \frac{1}{x} \sum_i i^{n-2} \exp\left(\frac{n\pi i}{2}\right) \cdot \frac{\left(-\frac{a}{v}x\right)^n}{1.3..(2n+1)} \left[1 + \frac{\left(\frac{a}{v}x\right)^2}{(2n+3)} + \dots \right] \left(\frac{\text{Legendre and}}{n \text{ factors}}\right) \cdot \left[F_H(|x|e^{-\pi i}) - F_H(|x|e^{\pi i}) \right] e^{dt} \quad (49)$$

where F_H is a Hankel function factor--the exponential in the Hankel products is in the convolution product of equation (48). We find that the small circle integral vanishes as $\rho \rightarrow 0$ because of the ρ factor from dz in $z = \rho e^{i\theta}$ on the circle. We find explicitly that the difference of the functions F_H in equation (50) is always zero (even for $|k| = 0$); hence, the loop integrals contribute nothing within our approximate problem formulation.

The residue evaluation for H_ϕ including the ansatz is

$$\text{Res}\left(\tilde{H}_\phi(z) \frac{1}{z + \epsilon}\right) \quad (48) \text{ removed} = a \left(\frac{a}{r}\right)^2 \sin \theta \exp\left[-\epsilon\left(t + \frac{a}{v}\right)\right] e^{dt} \quad (50)$$

For ϵ and d infinitesimal, we differentiate equation (50) to obtain

$$\approx a \left(\frac{a}{r}\right)^2 \sin \theta \delta(t) \quad (51)$$

Equation (51) convolved with equation (14) yields equation (11).

⁵N. W. McLachlan, *Complex Variable Theory and Transform Calculus*, Cambridge (1963).

Using the pole at $z_0 = -\frac{\sigma}{\epsilon_0}$, the residue evaluations for the electric fields yield

$$\approx \frac{1}{\epsilon_0} \left(\frac{a}{r}\right)^3 \sin \theta \exp\left(-\frac{\sigma}{\epsilon_0} t\right) : (E_\theta) \quad (52)$$

$$\approx \frac{2}{\epsilon_0} \left(\frac{a}{r}\right)^3 \cos \theta \exp\left(-\frac{\sigma}{\epsilon_0} t\right) : (E_r) \quad (53)$$

Convolving equations (52) and (53) with (14) yields (13) and (12), respectively.

Utilizing the δ function ansatz, the electric field evaluation yields equation (15) with $j_c \rightarrow (35)$ and $g^{\text{step}} \rightarrow \left(\frac{a}{r}\right)^3 \sin \theta D(\tau)$, $2\left(\frac{a}{r}\right)^2 \cos \theta D(\tau)$ for E_θ , E_r , respectively.

6. TRANSMISSION LINE

The transmission line solution in sections 3 and 4 is straightforward. We include the following development for completeness.

The Laplace-domain short-circuit current for the (lossless) transmission line of figure 3 ($x_0 \rightarrow$ is the space variable increasing toward the open end) is

$$\tilde{i}_{ro}(s) = \frac{2}{z_c} \frac{1}{1 + \exp\left(-\frac{2sh}{c}\right)} \int_0^h dx_0 \tilde{E}_{x_0}^{\text{inc}}(x_0, s) \left[\exp\left(-\frac{sx_0}{c}\right) - \exp\left(-\frac{s}{c}[2h - x_0]\right) \right] \quad (54)$$

where, for a step

$$\tilde{E}_{x_0}^{\text{inc}}(x_0, s) = \exp\left(-\frac{a}{a} x_0\right) \exp\left(-\frac{x_0 s}{c}\right) \left(\frac{1}{s}\right). \quad (55)$$

From a series development of equation (54) we find

$$I_{ro}(t) = I_1(t) + I_2(t) + I_3(t) \quad (56)$$

where

$$\begin{aligned} I_1(t) &= \frac{2a}{\alpha z_c} \left[1 - \exp\left(-\frac{c\alpha}{2a} t\right) \right] \quad 0 \leq t \leq \frac{2h}{c} \\ &= \left(\frac{2a}{\alpha z_c}\right) \left[1 - \exp\left(-\frac{\alpha h}{a}\right) \right] \exp\left[-\frac{c\alpha}{2a}\left(t - \frac{2h}{c}\right)\right] \quad \left(\frac{2h}{c} \leq t \leq \frac{4h}{c}\right), \end{aligned} \quad (57)$$

and we are interested only in the case

$$\exp\left(-\frac{\alpha h}{a}\right) \ll 1. \quad (58)$$

Now,

$$I_2(t) = -\exp\left(-\frac{\alpha h}{a}\right) I_1\left(t - \frac{2h}{c}\right) u\left(t - \frac{2h}{c}\right) \quad (59)$$

and

$$I_3(t) = -\frac{2a}{\alpha z_c} \left[1 - \exp\left(-\frac{\alpha h}{a}\right) \right] \left[\frac{2h}{c} \frac{4h}{c}, \frac{6h}{c} \frac{8h}{c}, \dots \right].$$

Assuming equation (58), the response (56) is shown in figure 4.

7. CONCLUDING REMARKS

The radial scattered electric field solution obtained in section 3 should be used strictly in an essentially quasistatic situation. It appears, however, that only an exact analytic solution for the Compton-driven sphere in a dissipative medium will provide a satisfying resolution of this problem.

DISTRIBUTION

DEFENSE DOCUMENTATION CENTER
CAMERON STATION, BUILDING 5
ALEXANDRIA, VA 22314
ATTN DDC-TCA (12 COPIES)

COMMANDER
USA RSCH & STD GP (EUR)
BOX 65
FPO NEW YORK 09510
ATTN LTC JAMES M. KENNEDY, JR.
CHIEF, PHYSICS & MATH BRANCH

COMMANDER
US ARMY MATERIEL DEVELOPMENT
& READINESS COMMAND
5001 EISENHOWER AVENUE
ALEXANDRIA, VA 22333
ATTN DRXAM-TL, HQ TECH LIBRARY

COMMANDER
US ARMY ARMAMENT MATERIEL
READINESS COMMAND
ROCK ISLAND ARSENAL
ROCK ISLAND, IL 61201
ATTN DR SAR-ASF,
FUZE & MUNITIONS SPT DIV

COMMANDER
USA MISSILE & MUNITIONS
CENTER & SCHOOL
REDSTONE ARSENAL, AL 35809
ATTN ATSK-CTD-F

COMMANDER IN CHIEF
US EUROPEAN COMMAND, JCS
APO NEW YORK 09128
ATTN TECHNICAL LIBRARY

DIRECTOR
DEFENSE ADVANCED RSCH PROJ AGENCY
ARCHITECT BUILDING
1400 WILSON BLVD.
ARLINGTON, VA 22209
ATTN TECHNICAL LIBRARY
ATTN AD/E&PS GEORGE H. HALMEIER

DIRECTOR
DEFENSE CIVIL PREPAREDNESS AGENCY
ASSISTANT DIRECTOR FOR RESEARCH
WASHINGTON, DC 20301
ATTN TS (AED)
ATTN RE (EO)
ATTN ADMIN OFFICER

DEFENSE COMMUNICATION
ENGINEER CENTER
1860 WIEHLE AVENUE
RESTON, VA 22090
ATTN CODE R720, C. STANSBERRY
ATTN CODE R400
ATTN CODE R124C, TECH LIB

DIRECTOR
DEFENSE COMMUNICATIONS AGENCY
WASHINGTON, DC 20305
ATTN CODE 540.5
ATTN CCTC/C672 FRANKLIN D. MOORE
ATTN CODE 930, MONTE I. BURGETT, FR

DIRECTOR
DEFENSE NUCLEAR AGENCY
WASHINGTON, DC 20305
ATTN RATN
ATTN DDST
ATTN RAEV

DEFENSE NUCLEAR AGENCY (Cont'd)
ATTN TITL TECH LIBRARY
ATTN TISI ARCHIVES
ATTN STVL

DIRECTOR OF DEFENSE RESEARCH
& ENGINEERING
DEPARTMENT OF DEFENSE
WASHINGTON, DC 20301
ATTN DD/S&SS

COMMANDER
FIELD COMMAND
DEFENSE NUCLEAR AGENCY
KIRTLAND AFB, NM 87115
ATTN FCPR
ATTN FCSM-F3/CDR SMITH

DIRECTOR
INTERSERVICE NUCLEAR WEAPONS SCHOOL
KIRTLAND AFB, NM 87115
ATTN DOCUMENT CONTROL

DIRECTOR
JOINT STRATEGIC TARGET PLANNING
STAFF, JCS
OFFUTT AFB
OMAHA, NB 68113
ATTN STINFO LIBRARY
ATTN JSAS
ATTN JPST

CHIEF
LIVERMORE DIVISION, FIELD COMMAND DNA
LAWRENCE LIVERMORE LABORATORY
P.O. BOX 808
LIVERMORE, CA 94550
ATTN FCPR

NATIONAL COMMUNICATIONS SYSTEM
OFFICE OF THE MANAGER
WASHINGTON, DC 20305
ATTN NCS-TS, CHARLES D. BODSON

DIRECTOR
NATIONAL SECURITY AGENCY
FT. GEORGE G. MEADE, MD 20755
ATTN O. O. VAN GUNTEN, R-425
ATTN TECHNICAL LIBRARY

OJCS/J-6
THE PENTAGON
WASHINGTON, DC 20301
ATTN J-6, ESD-2

DIRECTOR
BMD ADVANCED TECH CTR
HUNTSVILLE OFFICE
PO BOX 1500
HUNTSVILLE, AL 35807
ATTN TECH LIB

COMMANDER
BMD SYSTEM COMMAND
P.O. BOX 1500
HUNTSVILLE, AL 35807
ATTN TECHNICAL LIBRARY
ATTN BDMSC-TEN, NOAH J. HURST

DEP CHIEF OF STAFF FOR RSCH
DEV & ACQ
DEPARTMENT OF THE ARMY
WASHINGTON, DC 20310
ATTN DAMA-CSM-N, LTC G. OGDEN

COMMANDER
US ARMY ARMAMENT RESEARCH
& DEVELOPMENT COMMAND
DOVER, NJ 07801
ATTN DRDAR-ND-D-B, EDWARD J. ARBER
ATTN PAUL HARRIS
ATTN DRDAR-ND-D-C-2
ATTN DRDAR-ND-W
ATTN DRDAR-ND-DA-4
ATTN TECHNICAL LIBRARY
ATTN HYMAN POSTERNAK

COMMANDER
TRASANA
WHITE SANDS MISSILE RANGE, NM 88002
ATTN ATAA-EAC, FRANCIS N. WINANS

COMMANDER
US ARMY ARMOR CENTER
FORT KNOX, KY 40121
ATTN TECHNICAL LIBRARY

CHIEF
US ARMY COMMUNICATIONS SYSTEMS AGENCY
FORT MONMOUTH, NJ 07703
ATTN SCCM-AD-SV (LIBRARY)

COMMANDER
US ARMY COMPUTER SYSTEMS COMMAND
FORT BELVOIR, VA 22060
ATTN TECHNICAL LIBRARY

COMMANDER
US ARMY ELECTRONICS COMMAND
FORT MONMOUTH, NJ 07703
ATTN DRSEL-CT-HDK, ABRAHAM E. COHEN
ATTN DRSEL-CE, T. PREIFFER
ATTN DRSEL-TL-MD, GERHART K. GAULE
ATTN DRSEL-GG-TD, W. R. WERK
ATTN DRSEL-TL-ENV, HANS A. BOMKE
ATTN DRSEL-TL-ME, M. W. POMERANTZ
ATTN DRSEL-TL-IR, ROBERT A. FREIBERG
ATTN DRSEL-WI-D
ATTN DRSEL-NL-D

DIRECTOR
US ARMY MATERIAL SYS ANALYSIS ACTIVITY
ABERDEEN PROVING GROUND, MD 21005
ATTN DRXSY-CC, D. R. BARTHEL
ATTN TECHNICAL LIBRARY

COMMANDER
US ARMY MISSILE COMMAND
REDSTONE ARSENAL
HUNTSVILLE, AL 35809
ATTN DRSMI-RGP, HUGH GREEN
ATTN DRCPM-LCEX, HOWARD H. HENRIKSEN
ATTN DRCPM-PE-EA, WALLACE O. WAGNER
ATTN DRSMI-RGD, VICTOR W. RUWE

COMMANDER
US ARMY MOBILITY EQUIPMENT R & D CENTER
FORT BELVOIR, VA 22060
ATTN STSPB-MW, JOHN W. BOND, JR.
ATTN TECHNICAL LIBRARY

COMMANDER
US ARMY NUCLEAR AGENCY
7500 BACKLICK ROAD
BUILDING 2073
SPRINGFIELD, VA 22150
ATTN TECH LIB
ATTN ATCN-W, LTC LEONARD A. SLUGA
ATTN COL DEVERILL

DISTRIBUTION (Cont'd)

COMMANDER
US ARMY SECURITY AGENCY
ARLINGTON HALL STATION
4000 ARLINGTON BLVD
ARLINGTON, VA 22212
ATTN TECHNICAL LIBRARY

COMMANDER
US ARMY TEST AND EVALUATION COMMAND
ABERDEEN PROVING GROUND, MD 21005
ATTN DRSTE-EL, R. I. KOLCHIN
ATTN DRSTE-NB, R. R. GALASSO
ATTN TECHNICAL LIBRARY

COMMANDER
US ARMY TRAINING AND DOCTRINE COMMAND
FORT MONROE, VA 23651
ATTN TECH LIBRARY

COMMANDER
WHITE SANDS MISSILE RANGE
WHITE SANDS MISSILE RANGE, NM 88002
ATTN TECHNICAL LIBRARY
ATTN STEWS-TE-AN/A DE LA PAZ
ATTN STEWS-TE-NT,
MR. MARVIN P. SQUIRES

CHIEF OF NAVAL OPERATIONS
NAVY DEPARTMENT
WASHINGTON, DC 20350
ATTN CODE 604C3, ROBERT PIACESI

CHIEF OF NAVAL RESEARCH
DEPARTMENT OF THE NAVY
ARLINGTON, VA 22217
ATTN TECHNICAL LIBRARY
ATTN CODE 464, R. GRACEN JOINER
ATTN CODE 427
ATTN CODE 464, THOMAS P. QUINN

COMMANDER
NAVAL AIR SYSTEMS COMMAND
HEADQUARTERS
WASHINGTON, DC 21360
ATTN TECH LIB
ATTN AIR-350F, LCDR HUGO HERT

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
HEADQUARTERS
WASHINGTON, DC 20360
ATTN TECH LIB
ATTN PME-117-T
ATTN PME 117-21
ATTN PME117-215A, GUNTER BRUNHART

COMMANDER
NAVAL INTELLIGENCE SUPPORT CENTER
4301 SUITLAND ROAD, BLDG 5
WASHINGTON, DC 20390
ATTN TECHNICAL LIBRARY

COMMANDER
NAVAL OCEAN SYSTEMS CENTER
SAN DIEGO, CA 92152
ATTN CODE 2200 1,
VERNE E. HILDEBRAND
ATTN CODE 3100, E. E. MCCOWN
ATTN CODE 2400, S. W. LICHTMAN
ATTN TECHNICAL LIBRARY

SUPERINTENDENT
NAVAL POSTGRADUATE SCHOOL
MONTEREY, CA 93940
ATTN CODE 2124, TECH RPTS LIBRARIAN

DIRECTOR
NAVAL RESEARCH LABORATORY
WASHINGTON, DC 20375
ATTN CODE 6631, JAMES C. RITTER
ATTN CODE 7706, JAY P. BORIS
ATTN CODE 4104, EMANUAL L. BRAICATO
ATTN CODE 2600, TECH LIB
ATTN CODE 2627, DORIS R. FOLEN
ATTN CODE 7701, JACK D. BROWN

COMMANDER
NAVAL SEA SYSTEMS COMMAND
NAVY DEPARTMENT
WASHINGTON, DC 20362
ATTN SEA-9931, RILEY B. LANE

COMMANDER
NAVAL SURFACE WEAPONS CENTER
WHITE OAK, SILVER SPRING, MD 20910
ATTN CODE 431, EDWIN B. DEAN
ATTN CODE WA501, NAVY NUC PRGMS OFF
ATTN CODE 431, EDWIN R. RATHBURN
ATTN CODE WA50, JOHN H. MALLOY
ATTN CODE 223, L. LIBELLO
ATTN CODE WR43

COMMANDER
NAVAL SURFACE WEAPONS CENTER
DAHLGREN LABORATORY
DAHLGREN, VA 22448
ATTN TECHNICAL LIBRARY
ATTN CODE FUR, ROBERT A. AMADORI

COMMANDING OFFICER
NAVAL WEAPONS EVALUATION FACILITY
KIRTLAND AIR FORCE BASE
ALBUQUERQUE, NM 87117
ATTN LAWRENCE R. OLIVER
ATTN CODE ATG, MR. STANLEY

COMMANDING OFFICER
NAVAL WEAPONS SUPPORT CENTER
CRANE, IN 47522
ATTN CODE 7024, JAMES RAMSEY
ATTN TECHNICAL LIBRARY

DIRECTOR
STRATEGIC SYSTEMS PROJECT OFFICE
NAVY DEPARTMENT
WASHINGTON, DC 20376
ATTN SP2701, JOHN W. PITSENBERGER
ATTN NSP-2342, RICHARD L. COLEMAN
ATTN NSP-43, TECH LIB
ATTN NSP-230, DAVID GOLD

COMMANDER
ADCOM/XPD
ENT AFB, CO 80912
ATTN XPQDQ, MAJ G. KUCH
ATTN XPDQ

AF GEOPHYSICS LABORATORY, AFSC
HANSCOM AFB, MA 01731
ATTN J. EMERY CORMIER

AF OFFICE OF SCIENTIFIC RESEARCH
BOLLING AFB, DC 20332
ATTN NP

AF WEAPONS LABORATORY, AFSC
KIRTLAND AFB, NM 87117
ATTN NT, JOHN DARRAH
ATTN DYX, DONALD C. WUNSCHE
ATTN SAT
ATTN ELA
ATTN ELC
ATTN NT, CARL E. BAUM
ATTN EL
ATTN SAS
ATTN SUL
ATTN ELA, J. P. CASTILLO
ATTN EL (LIBRARY)

AFTAC
PATRICK AFB, FL 32925
ATTN TECH LIB

HEADQUARTERS
AIR FORCE SYSTEMS COMMAND
ANDREWS AFB
WASHINGTON, DC 20331
ATTN TECHNICAL LIBRARY

COMMANDER
AIR UNIVERSIT
MAXWELL AFB, AL 36112
ATTN AUL/LSE-70-250

COMMANDER
ASD
WPAFB, OH 45433
ATTN ENFTV
ATTN ASD-YH-EX

HEADQUARTERS
ELECTRONIC SYSTEMS DIVISION/XR
HANSCOM AFB, MA 01731
ATTN XRT, LTC JOHN M. JASINSKI

HEADQUARTERS
ELECTRONIC SYSTEMS DIVISION/YS
HANSCOM AFB, MA 01731
ATTN YSEV

HEADQUARTERS
ELECTRONIC SYSTEMS DIVISION/YW
HANSCOM AFB, MA 01731
ATTN YWEI

HEADQUARTERS
ELECTRONIC SYSTEMS DIVISION, (AFSC)
HANSCOM AFB, MA 01731
ATTN TECHNICAL LIBRARY

COMMANDER
FOREIGN TECHNOLOGY DIVISION, AFSC
WRIGHT-PATTERSON AFB, OH 45433
ATTN NICD LIBRARY
ATTN ETRP

HQ USAF/RD
WASHINGTON, DC 20330
ATTN RDQSM

COMMANDER
OGDEN AIR LOGISTICS CENTER
HILL AFB, UT 84401
ATTN TECH LIB
ATTN MMEWM, ROBERT JOFFS

DISTRIBUTION (Cont'd)

SAMSO/DY
POST OFFICE BOX 92960
WORLDWAY POSTAL CENTER
LOS ANGELES, CA 90009
(TECHNOLOGY)
ATTN DYS, MAJ LARRY A. DARDA

SAMSO/MN
NORTON AFB, CA 92409
(MINUTEMAN)
ATTN MNMH, MAJ M. BARAN
ATTN MNMH, CAPT B. STEWART

SAMSO/SK
POST OFFICE BOX 92960
WORLDWAY POSTAL CENTER
LOS ANGELES, CA 90009
(SPACE COMM SYSTEMS)
ATTN SKF, PETER H. STADLER

COMMANDER IN CHIEF
STRATEGIC AIR COMMAND
OFFUTT AFB, NB 68113
ATTN MRI-STINFO LIBRARY
ATTN DEF, FRANK N. BOUSHA
ATTN XFPS, MAJ BRIAN STEPHAN

DIVISION OF MILITARY APPLICATION
US ENERGY RSCH & DEV ADMIN
WASHINGTON, DC 20545
ATTN TECHNICAL LIBRARY

EG&G, INC.
LOS ALAMOS DIVISION
PO BOX 809
LOS ALAMOS, NM 85544
ATTN TECH LIB

UNIVERSITY OF CALIFORNIA
LAWRENCE LIVERMORE LABORATORY
P.O. BOX 808
LIVERMORE, CA 94550
ATTN E. K. MILLER, L-156
ATTN FREDERICK R. KOVAR, L-31
ATTN HANS KRUKER, L-96
ATTN L-153, ROBERT A. ANDERSON
ATTN LELAND C. LOQUIST, L-154
ATTN TERRY R. LONICH, L-96
ATTN TECH INFO LYPT, L-3
ATTN WILLIAM J. RYGAN, L-531
ATTN DONALD J. MELNER, L-545
ATTN LOUIS F. WOUTERS, L-48

LOS ALAMOS SCIENTIFIC LABORATORY
P.O. BOX 1663
LOS ALAMOS, NM 87545
ATTN REPORTS LIBRARY
ATTN ARTHUR FREED
ATTN RICHARD L. WAKEFIELD

SANDIA LABORATORIES
PO BOX 5800
ALBUQUERQUE, NM 87115
ATTN ORD 9353, R. L. PARKER
ATTN 3141 SANDIA RPT COLL
ATTN ELMER F. HARTMAN
ATTN GERALD W. BARR, 1114
ATTN DIV 5231, JAMES H. RENKEN

UNION CARBIDE CORPORATION
HOLIFIELD NATIONAL LABORATORY
P.O. BOX X
OAK RIDGE, TN 37830
ATTN PAUL R. BARNES
ATTN TECH LIBRARY

AEROSPACE CORPORATION
PO BOX 92957
LOS ANGELES, CA 90009
ATTN C. B. PEARLSTON
ATTN IRVING M. GARFUNKEL
ATTN JULIAN REINHEIMER
ATTN LIBRARY
ATTN S. P. BOWER
ATTN NORMAN D. STOCKWELL
ATTN BAL KRISHAN

BATTELLE MEMORIAL INSTITUTE
505 KING AVENUE
COLUMBUS, OH 43201
ATTN TECHNICAL LIBRARY

BDM CORPORATION, THE
7915 JONES BRANCH DRIVE
MCLEAN, VA 22101
ATTN T. H. NEIGHBORS
ATTN TECHNICAL LIBRARY

BDM CORPORATION, THE
PO BOX 9274
ALBUQUERQUE INTERNATIONAL
ALBUQUERQUE, NM 87119
ATTN TECH LIB

BOEING COMPANY, THE
PO BOX 3707
SEATTLE, WA 98124
ATTN HOWARD W. WICKLEIN, MS 17-11
ATTN D. E. ISBELL
ATTN DAVID DYE, MS 87-75
ATTN DAVID KEMLE
ATTN AEROSPACE LIBRARY

BOOZ-ALLEN AND HAMILTON, INC.
106 APPLE STREET
TINTON FALLS, NJ 07724
ATTN TECH LIB
ATTN R. J. CHRISNER

BROWN ENGINEERING COMPANY, INC.
CUMMINGS RESEARCH PARK
HUNTSVILLE, AL 35807
ATTN JOHN M. MCFARLIN, MS 18
ATTN TECH LIB, MS12, P. SHELTON

BURROUGHS CORPORATION
FEDERAL AND SPECIAL SYSTEMS GROUP
CENTRAL AVE AND ROUTE 252
PO BOX 517
PAOLI, PA 19301
ATTN ANGELO J. MAURIELLO
ATTN TECH LIB

CALSPAN CORPORATION
PO BOX 235
BUFFALO, NY 14221
ATTN TECH LIBRARY

CHARLES STARK DRAPER LABORATORY INC.
555 TECHNOLOGY SQUARE
CAMBRIDGE, MA 02139
ATTN TECH LIB
ATTN KENNETH FERTIG

COMPUTER SCIENCES CORPORATION
P.O. BOX 530
6565 ARLINGTON BLVD
FALLS CHURCH, VA 22046
ATTN TECH LIB

COMPUTER SCIENCES CORPORATION
201 LA VETA DRIVE, NE
ALBUQUERQUE, NM 87108
ATTN RICHARD H. DICKHAUT
ATTN ALVIN SCHIFF

CONTROL DATA CORPORATION
P.O. BOX 0
MINNEAPOLIS, MN 55440
ATTN JACK MEEHAN

CUTLER-HAMMER, INC.
AFL DIVISION
COMAC ROAD
DEER PARK, NY 11729
ATTN CENTRAL TECH FILES, ANN ANTHONY

DIKEWOOD INDUSTRIES, THE
1009 BRADBURY DRIVE, SE
UNIVERSITY RESEARCH PARK
ALBUQUERQUE, NM 87106
ATTN TECH LIB
ATTN L. WAYNE DAVIS
ATTN K. LEE

EG&G, INC.
ALBUQUERQUE DIVISION
PO BOX 10218
ALBUQUERQUE, NM 87114
ATTN TECHNICAL LIBRARY

ESL, INC.
495 JAVA DRIVE
SUNNYVALE, CA 94086
ATTN TECHNICAL LIBRARY

EXP AND MATH PHYSICS CONSULTANTS
P. O. BOX 66331
LOS ANGELES, CA 90066
ATTN THOMAS M. JORDAN

FORD AEROSPACE & COMMUNICATIONS
OPERATIONS
FORD & JAMBOREE ROADS
NEWPORT BEACH, CA 92663
ATTN TECH INFO SECTION
ATTN KEN C. ATTINGER
ATTN E. R. PONCELET, JR.

GARRETT CORPORATION
PO BOX 92248, SEPULVEDA BLVD
LOS ANGELES, CA 90009
ATTN ROBT. WEIR, DEPT. 93-9
ATTN TECH LIB

GENERAL ELECTRIC COMPANY
TEMPO-CENTER FOR ADVANCED STUDIES
816 STATE STREET (PO DRAWER QQ)
SANTA BARBARA, CA 93102
ATTN DASIAC
ATTN ROYDEN R. RUTHERFORD

GENERAL ELECTRIC COMPANY-TEMPO
ATTN: DASIAC
C/O DEFENSE NUCLEAR AGENCY
WASHINGTON, DC 20305
ATTN WILLIAM ALFONTE

GENERAL RESEARCH CORPORATION
P.O. BOX 3587
SANTA BARBARA, CA 93105
ATTN TECH INFO OFFICE
ATTN JOHN ISE, JR.

DISTRIBUTION (Cont'd)

GEORGIA INSTITUTE OF TECHNOLOGY
 GEORGIA TECH RESEARCH INSTITUTE
 ATLANTA, GA 30332
 ATTN R. CURRY

GTE SYLVANIA, INC.
 ELECTRONICS SYSTEMS GRP-EASTERN DIV
 77 A STREET
 NEEDHAM, MA 02194
 ATTN CHARLES A. THORNHILL, LIBRARIAN
 ATTN LEONARD L. BLAISDELL
 ATTN JAMES A. WALDON

GTE SYLVANIA, INC.
 189 B STREET
 NEEDHAM HEIGHTS, MA 02194
 ATTN CHARLES H. RAMSBOTTOM
 ATTN A S M DEPT, S. E. PERLMAN
 ATTN DAVID P. FLOOD
 ATTN COMM SYST DIV, EMIL P. MOTCHOK
 ATTN HERBERT A. ULLMAN
 ATTN H & V GROUP, MARIO A. NUREFORA

HARRIS CORPORATION
 HARRIS SEMICONDUCTOR DIVISION
 P.O. BOX 883
 MELBOURNE, FL 32901
 ATTN C. F. DAVIS, MS 17-220
 ATTN WAYNE E. ABARE, MS 16-111
 ATTN T. CLARK, MS 4040
 ATTN TECH LIB
 ATTN CHARLES DENTON, JR., MS 1-500

HONEYWELL INCORPORATED
 AVIONICS DIVISION
 13350 US HIGHWAY 19 NORTH
 ST. PETERSBURG, FL 33733
 ATTN TECHNICAL LIBRARY
 ATTN HARRISON H. NOBLE, MS 725-5A

IIT RESEARCH INSTITUTE
 10 WEST 35TH STREET
 CHICAGO, IL 60616
 ATTN TECHNICAL LIBRARY
 ATTN IRVING N. MINDEL
 ATTN JACK E. BRIDGES

INSTITUTE FOR DEFENSE ANALYSES
 400 ARMY-NAVY DRIVE
 ARLINGTON, VA 22202
 ATTN IDA, LIBRARIAN,
 RUTH S. SMITH

IRT CORPORATION
 P.O. BOX 81087
 SAN DIEGO, CA 92138
 ATTN R. L. MERTZ
 ATTN TECHNICAL LIBRARY
 ATTN MDC

JAYCOR
 1401 CAMINO DEL MAR
 DEL MAR, CA 92014
 ATTN ERIC P. WENAAS
 ATTN RALPH H. STAHL

JAYCOR
 205 S WHITTING STREET, SUITE 500
 ALEXANDRIA, VA 22304
 ATTN CATHERINE TURESKO
 ATTN ROBERT SULLIVAN

JOHNS HOPKINS UNIVERSITY
 APPLIED PHYSICS LABORATORY
 JOHNS HOPKINS ROAD
 LAUREL, MD 20810
 ATTN TECH LIB

KAMAN SCIENCES CORPORATION
 P.O. BOX 7463
 COLORADO SPRINGS, CO 80933
 ATTN LIBRARY
 ATTN J. R. CURRY
 ATTN DONALD H. BRYCE
 ATTN ALBERT P. BRIDGES
 ATTN W. FOSTER RICH
 ATTN WALTER E. WARE
 ATTN JERRY I. LUBELL

LITTON SYSTEMS, INC.
 AMECOM DIVISION
 5115 CALVERT ROAD
 COLLEGE PARK, MD 20740
 ATTN TECH LIB

LOCKHEED MISSILES AND
 SPACE COMPANY, INC.
 P.O. BOX 504
 SUNNYVALE, CA 94088
 ATTN DEPT 85-85, SAMUEL I. TAIMUTY
 ATTN G. F. HEATH, D/81-14
 ATTN BENJAMIN T. KIMURA,
 DEPT 81-14,
 ATTN PHILIP J. HART, DEPT 81-14
 ATTN KEVIN MCCARTHY 0-85-71
 ATTN EDWIN A. SMITH, DEPT 85-85
 ATTN TECHNICAL LIBRARY
 ATTN L-365 DEPT 81-20
 ATTN ROSSI, DEPT 81-64

M.I.T. LINCOLN LABORATORY
 P.O. BOX 73
 LEXINGTON, MA 02173
 ATTN LEONA LOUGHLIN, LIBRARIAN

MARTIN MARIETTA CORPORATION
 DENVER DIVISION
 PO BOX 179
 DENVER, CO 80201
 ATTN RESEARCH LIB, 6617,
 J. R. MCKEE
 ATTN BEN T. GRAHAM, MS PO-454

MAXWELL LABORATORIES, INC.
 9244 BALBOA AVENUE
 SAN DIEGO, CA 92123
 ATTN TECH LIB
 ATTN VICTOR FARGO

MISSION RESEARCH CORPORATION
 735 STATE STREET
 SANTA BARBARA, CA 93101
 ATTN TECH LIB
 ATTN CONRAD L. LONGMIRE
 ATTN WILLIAM C. HART
 ATTN DANIEL F. HIGGINS

MISSION RESEARCH CORPORATION
 P.O. BOX 8693, STATION C
 ALBUQUERQUE, NM 87108
 ATTN LARRY D. SCOTT
 ATTN TECH LIB
 ATTN DAVID E. MEREWETHER

MISSION RESEARCH CORPORATION-SAN DIEGO
 P.O. BOX 1209
 LA JOLLA, CA 92038
 ATTN V. A. J. VAN LINT

MITRE CORPORATION, THE
 P.O. BOX 208
 BEDFORD, MA 01730
 ATTN LIBRARY
 ATTN THEODORE JARVIS
 ATTN M. F. FITZGERALD

NORTHROP CORPORATION
 ELECTRONIC DIVISION
 1 RESEARCH PARK
 PALOS VERDES PENINSULA, CA 90274
 ATTN TECH LIB

NORTHROP CORPORATION
 NORTHROP RESEARCH AND
 TECHNOLOGY CENTER
 3401 WEST BROADWAY
 HAWTHORNE, CA 92050
 ATTN LIBRARY
 ATTN DAVID N. POCOCC

NORTHROP CORPORATION
 ELECTRONIC DIVISION
 2301 WEST 120TH STREET
 HAWTHORNE, CA 90250
 ATTN VINCENT R. DEMARTINO
 ATTN JOHN M. REYNOLDS

PHYSICS INTERNATIONAL COMPANY
 2700 MERCED STREET
 SAN LEANDRO, CA 94577
 ATTN TECH LIB
 ATTN JOHN H. HUNTINGTON

PULSAR ASSOCIATES, INC.
 7911 HERSCHEL AVENUE
 LA JOLLA, CA 92037
 ATTN CARLETON H. JONES

R & D ASSOCIATES
 PO BOX 9695
 MARINA DEL REY, CA 90291
 ATTN TECHNICAL LIBRARY
 ATTN S. CLAY ROGERS
 ATTN WILLIAM R. GRAHAM, JR.
 ATTN LEONARD SCHLESSINGER
 ATTN CHARLES MO
 ATTN RICHARD R. SCHAEFER
 ATTN WILLIAM J. KARZAS
 ATTN GERARD K. SCHLEGEL

RCA CORPORATION
 GOVERNMENT SYSTEMS DIVISION
 ASTRO ELECTRONICS
 PO BOX 800, LOCUST CORNER
 EAST WINDSOR TOWNSHIP
 PRINCETON, NJ 08540
 ATTN TECH LIB
 ATTN GEORGE J. BRUCKER

ROCKWELL INTERNATIONAL CORPORATION
 P.O. BOX 3105
 ANAHEIM, CA 92803
 ATTN N. J. RUDIE, FA53
 ATTN J. L. MONROE, DEPT 243-027,
 DIV 031
 ATTN L. APODACA, FA53
 ATTN K. F. HULL
 ATTN TECHNICAL LIBRARY
 ATTN JAMES E. BELL, HA10
 ATTN DONALD J. STEVENS, FA70

DISTRIBUTION (Cont'd)

SCIENCE APPLICATIONS, INC.
PO BOX 2351
LA JOLLA, CA 92038
ATTN TECHNICAL LIBRARY
ATTN LEWIS M. LINSON
ATTN R. PARKINSON

SCIENCE APPLICATIONS, INC.
HUNTSVILLE DIVISION
2109 W. CLINTON AVENUE
SUITE 700
HUNTSVILLE, AL 35805
ATTN NOEL R. BYRN
ATTN TECH LIB

SCIENCE APPLICATIONS, INC.
PO BOX 3507
ALBUQUERQUE, NM 87110
ATTN RICHARD L. KNIGHT
ATTN J. ROGER HILL

SCIENCE APPLICATIONS, INC.
8400 WESTPARK DRIVE
MCLEAN, VA 22101
ATTN WILLIAM L. CHADSEY

SIMULATION PHYSICS, INC.
P.O. BOX D
BEDFORD, MA 01730
ATTN JOHN R. UGLUM

STANFORD RESEARCH INSTITUTE
3980 EL CAMINO REAL
PALO ALTO, CA 94306
ATTN MR. PHILIP DOLAN
ATTN GEORGE CARPENTER
ATTN ARTHUR LEE WHITSON
ATTN MEL BERNSTEIN

SYSTEMS, SCIENCE AND SOFTWARE
P.O. BOX 4803
HAYWARD, CA 94540
ATTN TECH LIB

SYSTEMS, SCIENCE AND SOFTWARE, INC.
PO BOX 1620
LA JOLLA, CA 92038
ATTN TECHNICAL LIBRARY

TEXAS INSTRUMENTS, INC.
P.O. BOX 6015
DALLAS, TX 75222
ATTN TECH LIB
ATTN DONALD J. MANUS, MS 72

TRW DEFENSE & SPACE SYS GROUP
ONE SPACE PARK
REDONDO BEACH, CA 90278
ATTN TECH INFO CENTER/S-1930
ATTN ROBERT M. WEBB, MS R1-1150
ATTN AARON H. NAREVSKY, R1-2144

TRW DEFENSE & SPACE SYS GROUP
SAN BERNARDINO OPERATIONS
PO BOX 1310
SAN BERNARDINO, CA 92402
ATTN F. B. FAY

VECTOR RESEARCH ASSOCIATES
735 STATE STREET
SANTA BARBARA, CA 93101
ATTN W. A. RADASKY

HARRY DIAMOND LABORATORIES
ATTN RAMSDEN, JOHN J., COL, COMMANDER/
FLYER, I.N./LANDIS, P.E./
SOMMER, H./OSWALD, R. B.
ATTN CARTER, W.W., DR., TECHNICAL
DIRECTOR/MARCUS, S.M.
ATTN KIMMEL, S., PAO
ATTN CHIEF, 0021
ATTN CHIEF, 0022
ATTN CHIEF, LAB 100
ATTN CHIEF, LAB 200
ATTN CHIEF, LAB 300
ATTN CHIEF, LAB 400
ATTN CHIEF, LAB 500
ATTN CHIEF, LAB 600
ATTN CHIEF, DIV 700
ATTN CHIEF, DIV 800
ATTN CHIEF, LAB 900
ATTN CHIEF, LAB 1000
ATTN RECORD COPY, BR 041
ATTN HDL LIBRARY (5 COPIES)
ATTN CHAIRMAN, EDITORIAL COMMITTEE
ATTN CHIEF, 047
ATTN TECH REPORTS, 013
ATTN PATENT LAW BRANCH, 071
ATTN GIDEP OFFICE, 741
ATTN LANHAM, C., 0021
ATTN WONG, R., 1000
ATTN BEILFUSS, J. W., 1010
ATTN GRAY, R. F., 1000
ATTN WYATT, W. T., 1000
ATTN WIMENITZ, F. N., 0024
ATTN MILETTA, J. R., 1010
ATTN TOMPKINS, J. E., 230
ATTN SWETON, J. F., 1000
ATTN KLEBERS, J., 1000
WILSON, M. R., 1000 (10 COPIES)