

AD-A062 071

ILLINOIS UNIV AT URBANA-CHAMPAIGN ELECTROMAGNETICS LAB F/G 20/14
SOLVING THE CURRENT ELEMENT PROBLEM OVER LOSSY HALF-SPACE WITHO--ETC(U)
OCT 78 R MITTRA, P PARHAMI, Y RAHMAT-SAMII DAAG29-77-G-0111

UNCLASSIFIED

UIEM-78-14

ARO-14686.1-EL


NL

1 OF 1
ADA
062071



END
DATE
FILMED

3 -79
DDC

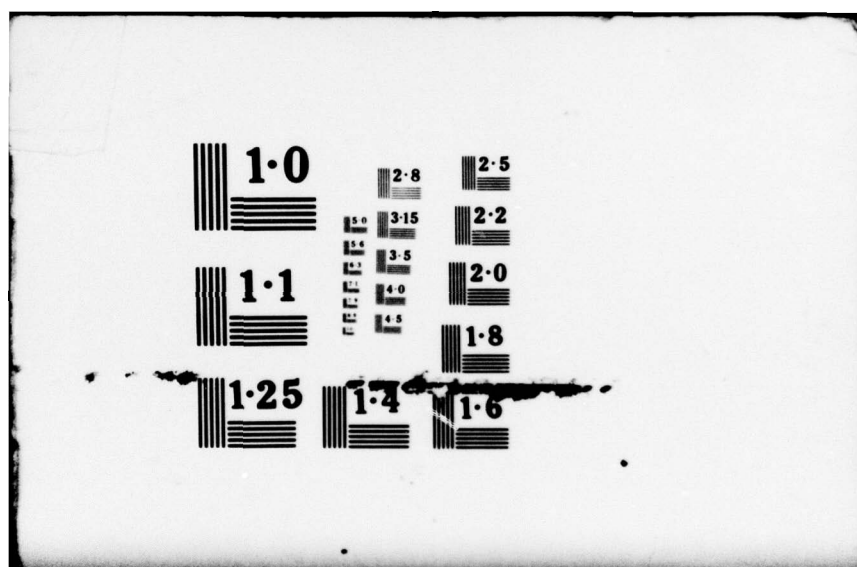

ARO 14686.1-EL

Electromagnetics Laboratory Report No. 78-14

SOLVING THE CURRENT ELEMENT PROBLEM OVER
LOSSY HALF-SPACE WITHOUT SOMMERFELD INTEGRATIONS

Interim Technical Report

LEVEL

R. Mittra
P. Parhami
Y. Rahmat-Samii

October 1978

U. S. Army Research Office
DAAG29-77-G-0111



Electromagnetics Laboratory
Department of Electrical Engineering
University of Illinois
Urbana, IL 61801

Approved for public release.
Distribution unlimited.

78 12 04 168

ADA062071

DDC FILE COPY



THE FINDINGS IN THIS REPORT ARE NOT TO BE
CONSTRUED AS AN OFFICIAL DEPARTMENT OF
THE ARMY POSITION, UNLESS SO DESIGNATED
BY OTHER AUTHORIZED DOCUMENTS.

Electromagnetics Laboratory Report No. 78-14

SOLVING THE CURRENT ELEMENT PROBLEM OVER
LOSSY HALF-SPACE WITHOUT SOMMERFELD INTEGRATIONS

Interim Technical Report

R. Mittra
P. Parhami
Y. Rahmat-Samii

October 1978

U. S. Army Research Office

DAAG29-77-G-0111

Electromagnetics Laboratory
Department of Electrical Engineering
University of Illinois
Urbana, IL 61801

Approved for public release.
Distribution unlimited.

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle)		5. TYPE OF REPORT & PERIOD COVERED
(6) SOLVING THE CURRENT ELEMENT PROBLEM OVER LOSSY HALF-SPACE WITHOUT SOMMERFELD INTEGRATIONS		(9) Interim Technical Report, October 1978
7. AUTHOR(s)		6. PERFORMING ORG. REPORT NUMBER
(10) R. Mittra, P. Parhami and Y. Rahmat-Samii		EM 78-14; UILU-ENG-78-2556
9. PERFORMING ORGANIZATION NAME AND ADDRESS		8. CONTRACT OR GRANT NUMBER(s)
Electromagnetics Laboratory Department of Electrical Engineering University of Illinois, Urbana, IL 61801		(15) DAAG29-77-G-0111 ^{new}
10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS		11. REPORT DATE
P-14686-EL		(11) October 1978
11. CONTROLLING OFFICE NAME AND ADDRESS		12. NUMBER OF PAGES
U. S. Army Research Office Post Office Box 12211 Research Triangle Park, NC 27709		24
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		13. SECURITY CLASS. (of this report)
U. S. Army Research Office Post Office Box 12211 Research Triangle Park, NC 27709		Unclassified
15. DISTRIBUTION STATEMENT (of this Report)		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
Approved for public release; distribution unlimited. (12) 25 p.		
17. DISTRIBUTION STATEMENT (of this abstract entered in Block 20, if different from Report)	14. UIEM-78-14, UILU-ENG-78-2556	
NA		
18. SUPPLEMENTARY NOTES		
The findings in this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)		
Antenna over Lossy Half-space Sommerfeld Integral Transform Domain Technique (18) ARO (19) 14686.1-EL		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)		
In this paper a new approach is presented for efficient computation of the vector potentials arising in the problem of a current element radiating over a lossy half-space. The present approach departs from the conventional ones in that it works primarily with the transform domain representations rather than with the Sommerfeld integrals which are the corresponding spatial domain counterparts. The key step in the present method is to approximate the transforms using a suitable approximation which is valid for a wide range of parameters of practical interest. The approximated transforms can be		

DD FORM 1 JAN 73 1473

408 102

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

$P_i \text{ sub } x$

$P_i \text{ sub } z$

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

inverted in a closed form for the horizontal component of the vector potentials (II), and can be expressed in a computationally efficient form for the vertical component (III). Numerical results illustrating the accuracy of the method are presented in the paper and some estimates of comparative computational times also are included.

ACCESSION for	
NTIS	W. C. Section ☒
DDC	B. C. Section ☐
UNANNOUNCED	☐
JUSTIFICATION	
BY	
DISTRIBUTION/AVAILABILITY NOTES	
Dist.	AA
A	

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

ABSTRACT

In this paper a new approach is presented for efficient computation of the vector potentials arising in the problem of a current element radiating over a lossy half-space. The present approach departs from the conventional ones in that it works primarily with the transform domain representations rather than with the Sommerfeld integrals which are the corresponding spatial domain counterparts. The key step in the present method is to approximate the transforms using a suitable approximation which is valid for a wide range of parameters of practical interest. The approximated transforms can be inverted in a closed form for the horizontal component of the vector potentials (Π_x), and can be expressed in a computationally efficient form for the vertical component (Π_z). Numerical results illustrating the accuracy of the method are presented in the paper and some estimates of comparative computational times also are included.

TABLE OF CONTENTS

	Page
1. Introduction.	1
2. Transformed Vector Potentials	2
3. Approximate Expressions for the Transformed Vector Potentials	6
4. Numerical Results and Conclusions	15
REFERENCES.	17

48 12 04 108

LIST OF FIGURES

Figure	Page
1. Geometry and the coordinate systems for the current element P_1 radiating over imperfect ground, where $\epsilon_{1r} = 1$ and $\epsilon_{2r} = \epsilon_r - j\sigma/(\omega\epsilon_0)$ has been assumed.	3

LIST OF TABLES

Table	Page
1. Demonstration of the stability of the present technique for evaluating Π_z , as a function of z'	10
2. Π evaluation by three techniques for $\epsilon_r = 40$, $\sigma = 1$ mhos/m, $r_2^x = 10$ m, $\theta_2 = 10^\circ$, and $\phi_2 = 0$	11
3. Π evaluation by three techniques for $\epsilon_r = 40$, $\sigma = 1$ mhos/m, $r_2^z = 10$ m, $\theta_2 = 10^\circ$, and $\phi_2 = 0$	12
4. Π evaluation by three techniques for $\epsilon_r = 10$, $\sigma = .01$ mhos/m, $r_2^x = 10$ m, $\theta_2 = 10^\circ$, and $\phi_2 = 0^\circ$	13
5. Π evaluation by three techniques for $\epsilon_r = 10$, $\sigma = .01$ mhos/m, $r_2^z = 10$ m, $\theta_2 = 10^\circ$, and $\phi_2 = 0^\circ$	14

1. Introduction

The conventional approach to analyzing antenna structures radiating in the presence of a lossy half-space involves repeated evaluation of the Sommerfeld integrals appearing in the expressions for the vector potentials [1]. Since the evaluation of these infinite integrals is an extremely time-consuming process, much attention has been focused in recent years on developing techniques for efficiently evaluating the Sommerfeld integrals without unduly sacrificing the accuracy [2-8]. However, even the latest reported techniques for evaluating the Sommerfeld integrals are 40 to 100 times slower than the Reflection Coefficient Method (RCM), which evaluates these integrals asymptotically and is valid for large kr (where k is the free space wave number, and r is the distance between the image and observation points).

In this paper, we present a new approach for rapid and accurate numerical evaluation of the vector potentials that avoids the tedious task of handling the Sommerfeld integrals. We begin with the two-dimensional Fourier transforms of the vector potentials which are conveniently expressed in simple closed forms. Next, we show that under a suitable approximation the inverse transform of the vector potentials can be performed analytically using a set of identities. The resulting space domain expressions are either expressed in a closed form or require evaluating a finite integral. These expressions are valid for a wide range of frequencies, ground parameters, and observation points.

In the following sections, the use of the above procedure is demonstrated by considering a horizontal current element over lossy ground, and several numerical examples are included to illustrate the accuracy and computational efficiency of the method. We find that the computational time is only slightly

larger than the reflection coefficient method (RCM) and the accuracy of the results is good for a wide range of parameters of practical interest.

2. Transformed Vector Potentials

The fields radiated by a horizontal current element over a lossy ground (see Fig. 1) can be expressed in terms of two vector potential components Π_x and Π_z [5,8]. We define the following two-dimensional Fourier transform pair:

$$\tilde{\Pi} = \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \Pi \exp[-j(\alpha x + \beta y)] dx dy \quad (1a)$$

$$\tilde{\Pi} = \frac{1}{4\pi^2} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \Pi \exp[j(\alpha x + \beta y)] d\alpha d\beta \quad (1b)$$

where the $\sim$ on top represents the transformed quantities. It has been shown [5,8] that, using the $\exp(j\omega t)$ time convention and for observation points above the lossy ground, the following expressions for the vector potentials satisfy the Maxwell's equations and the required boundary conditions:

$$\tilde{\Pi}_x = \tilde{\Pi}_x^i + \tilde{\Pi}_x^r + \tilde{\Pi}_x^0 \quad (2a)$$

$$\tilde{\Pi}_x^i = I_0 \frac{1}{2j\gamma_1} \exp[-j\gamma_1|z-h|] \quad (2b)$$

$$\tilde{\Pi}_x^r = I_0 \frac{-1}{2j\gamma_1} \exp[-j\gamma_1(z+h)] \quad (2c)$$

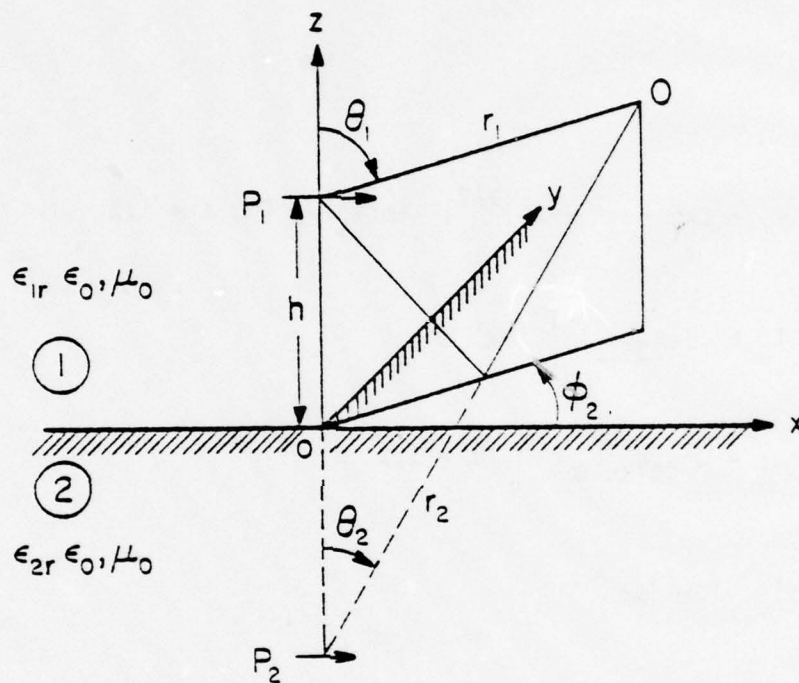


Figure 1. Geometry and the coordinate systems for the current element P_1 radiating over imperfect ground, where $\epsilon_{1r} = 1$ and $\epsilon_{2r} = \epsilon_r - j\sigma/(\omega\epsilon_0)$ has been assumed.

$$\tilde{\Pi}_x = I_0 \frac{1}{j(\gamma_1 + \gamma_2)} \exp[-j \gamma_1(z+h)] \quad (2d)$$

and

$$\tilde{\Pi}_z = I_0 j\alpha \frac{\gamma_1 - \gamma_2}{\kappa \gamma_1 + \gamma_2} \exp[-j \gamma_1(z+h)] \quad (3)$$

where

$$\gamma_i = [k_i^2 - \alpha^2 - \beta^2]^{1/2}; \quad \text{Im}(\gamma_i) \leq 0; \quad i = 1, 2 \quad (4a)$$

$$I_0 = (j\omega\epsilon_0\epsilon_{1r})^{-1} Idx' \quad (4b)$$

$$k_i^2 = \omega^2\mu_0\epsilon_{ir}\epsilon_0; \quad i = 1, 2 \quad (4c)$$

$$\kappa = \epsilon_{2r}/\epsilon_{1r} \quad (4d)$$

Equations (2b) and (2c) are the solutions to the problem of a current element radiating in free space and can be interpreted as the direct and the reflected contributions to the field at the observation point for a perfectly conducting ground. Their inverse transforms are expressed in the following well-known space domain forms:

$$\Pi_x^i = I_0 \exp(-j k_1 r_1) / 4\pi r_1 \quad (5a)$$

$$\Pi_x^r = -I_0 \exp(-j k_1 r_2) / 4\pi r_2 \quad (5b)$$

where (r_1, θ_1, ϕ_1) and (r_2, θ_2, ϕ_2) are the spherical coordinate systems erected at the source and its image point respectively. Equations (2d) and (3) are the correction terms to the perfect ground solution and are not directly amenable to inversion in closed forms. Traditionally, these two equations are transformed into space domain representations comprised of infinite integrals that are oscillatory in nature. These integral representations take many different forms and the following are examples which contain the Hankel functions:

$$\Pi_x^0 = \frac{I_0}{4\pi j} \int_{-\infty}^{\infty} \frac{\lambda}{\sqrt{k_1^2 - \lambda^2} + \sqrt{\kappa k_1^2 - \lambda^2}} H_0^{(2)}(\rho_2 \lambda) \exp(-j z_2 \sqrt{k_1^2 - \lambda^2}) d\lambda \quad (6a)$$

and

$$\Pi_z = -\frac{I_0}{4\pi k_1^2} \cos \phi_2 \int_{-\infty}^{\infty} \lambda^2 \frac{\sqrt{k_1^2 - \lambda^2} - \sqrt{\kappa k_1^2 - \lambda^2}}{\kappa \sqrt{k_1^2 - \lambda^2} + \sqrt{\kappa k_1^2 - \lambda^2}} H_1^{(2)}(\rho_2 \lambda) \exp(-j z_2 \sqrt{k_1^2 - \lambda^2}) d\lambda \quad (6b)$$

The integrals appearing in equations (6a) and (6b), better known as the Sommerfeld integrals, are quite time-consuming to evaluate and represent a major hurdle to the task of efficient analysis of antennas located over a lossy ground. Many of the recent works in the literature [4-8] have concentrated on the problem of reducing the computational time required in the evaluation of the Sommerfeld integrals without sacrificing the accuracy beyond a tolerable level. In the following sections, an alternate approach is proposed for Fourier inverting (2d) and (3) in a more direct manner which circumvents the need for computing the Sommerfeld integrals (6a) and (6b).

3. Approximate Expressions for the Transformed Vector Potentials

An examination of the expressions for transformed vector potentials given in (2d) and (3) reveals two important and useful properties. First, both of the equations have an identical z -variation that corresponds to a space domain solution emanating from the image point of the original dipole source. Second, it is apparent that the two equations are well behaved in the Fourier transform domain and decay exponentially to zero outside the circle $\alpha^2 + \beta^2 = k_1^2$.

Starting from the transform pair (2c) and (5b), one can generate a set of useful identities by successively applying the operator $\partial/\partial z$ to the transform pair. We have, for instance.

$$\tilde{Q} = \gamma_1^{n-1} \exp[-j \gamma_1 (z+h)] \quad (7a)$$

$$Q = 2(j)^{n+1} \frac{\partial^n}{\partial z^n} g \quad ; \quad n = 0, 1, 2, \dots \quad (7b)$$

where g is the free-space Green's function

$$g(x,y,z) = \exp[-j k_1 r_2] / 4\pi r_2 ; r_2 = \sqrt{x^2 + y^2 + (z+h)^2} . \quad (8)$$

We also note that the successive partial derivatives of g can be obtained explicitly; hence, (7b) is expressible in a closed form. We will now attempt to approximate the transformed vector potentials ${}_0\tilde{\Pi}_x$ and ${}_0\tilde{\Pi}_z$, given in (2d) and (3), such that the inverse transform operation is performed via (7a-b) without an undue sacrifice in the accuracy. To this end, we introduce the only approximation needed to accomplish this goal, by letting

$$\gamma_2 = k_1 \sqrt{\kappa} \quad (9)$$

Kuo and Mei [7, Eq. 8] have employed this approximation to manipulate the Sommerfeld integrals (6) and have found it to be accurate inside the $x^2 + y^2 = k_1^2$ circle for most practical parameter ranges of interest. In addition, outside the circle of visible range, the decaying exponential overcomes most of the errors introduced by the substitution of (9) into (2d) and (3).

3a. Approximation for $\tilde{\Pi}_x$

The transform ${}_0\tilde{\Pi}_x$, given in (2d), can be written in the following form

$${}_0\tilde{\Pi}_x = I_0 \frac{1}{jk_1^2 (1-\kappa)} (\gamma_1 - \gamma_2) \exp[-j \gamma_1 (z+h)] \quad (10)$$

Introducing the approximation in (9) and using the identities in (7), one can express the space-domain expression for ${}_0\Pi_x$ in a closed form

$${}_0\Pi_x = I_0 \frac{2\sqrt{\kappa}}{jk_1(1-\kappa)} \frac{\partial}{\partial z} g - I_0 \frac{2}{k_1^2(1-\kappa)} \frac{\partial^2}{\partial z^2} g \quad (11)$$

Before closing this subsection, it may be worthwhile to point out one of the key differences between the Kuo and Mei scheme [7] and the present method, both of which employ identical approximations. In contrast to the method in [7], the present approach requires no numerical integration and generates the ${}_0\Pi_x$ solution entirely in a closed form.

3b. Approximation for Π_z

The expression for Π_z , given in (3), can be rearranged into the following form

$$\tilde{\Pi}_z = I_0 \frac{j\alpha}{k_1^2 \kappa} [1 - (\kappa+1) \frac{\gamma_2}{\kappa\gamma_1 + \gamma_2}] \exp[-j\gamma_1(z+h)] \quad (12)$$

Again introducing the approximation expressed in (9), one can further simplify (12) into

$$\tilde{\Pi}_z = I_0 \frac{j\alpha}{k_1^2 \kappa} \exp[-j\gamma_1(z+h)] - I_0 \frac{c(\kappa+1)}{k_1^2 \kappa} \tilde{P} \quad (13)$$

where

$$\tilde{P} = \frac{j\alpha}{\gamma_1 + c} \exp[-j\gamma_1(z+h)] \quad (14a)$$

$$c = k_1/\sqrt{\kappa} \quad (14b)$$

The space-domain expression for Π_z can now be expressed in terms of P , the inverse transform of $\tilde{P}$, given in (14a) as

$$\Pi_z = I_0 \frac{-2}{k_1^2 \kappa} \frac{\partial^2}{\partial x \partial z} g - I_0 \frac{c(\kappa+1)}{k_1^2 \kappa} P \quad (15)$$

Using the identities in (7), it can be shown that P satisfies the following first-order linear inhomogeneous differential equation

$$\frac{\partial P}{\partial z} - j\kappa P = 2j \frac{\partial^2 g}{\partial x \partial z} \quad (16)$$

The boundary condition required for the above differential equation can be imposed by evaluating the asymptotic solution to the vector potential expression in (15), derived in [5], at an observation point which is sufficiently high above ground. The asymptotic solution is given by

$$\begin{aligned} \Pi_{za} = 2 I_0 \cos \theta_2 \sin \theta_2 \cos \theta_2 \frac{\cos \theta_2 - \sqrt{\kappa - \sin^2 \theta_2}}{\kappa \cos \theta_2 + \sqrt{\kappa - \sin^2 \theta_2}} \\ \cdot \exp(-jk_1 r_2) / 4\pi r_2 \end{aligned} \quad (17a)$$

Using (17a) in (15), we arrive at

$$P(z') = \frac{-1}{c(\kappa+1)} \left\{ \frac{k_1^2 \kappa}{I_0} \Pi_{za}(z') + 2 \frac{\partial^2}{\partial x \partial z} g(z') \right\} \quad (17b)$$

where z' is a suitable height at which the RCM approximation in (17a) is valid. We point out that for the sake of simplicity, the x and y dependences of the P , Π_{za} , and g have been suppressed from their arguments. The solution for P can be obtained by integrating (16) and one can arrive at the following form which is convenient for numerical computation:

$(z+h)/\lambda$	$(z'+h)/\lambda$	Π_z (present method) $\times 10^3$
.42	.50	1.82 - j.953
.42	.75	1.76 - j1.39
.42	1.00	1.57 - j1.31
.42	1.25	1.64 - j1.22
.42	1.50	1.68 - j1.29
.42	1.75	1.63 - j1.30
.42	2.00	1.62 - j1.25

At $(z+h)/\lambda = .42$ Exact $\Pi_z \times 10^3 =$ 1.58 - j1.29

At $(z+h)/\lambda = .42$ RCM $\Pi_z \times 10^3 =$ 1.64 - j.773

TABLE 1. Demonstration of the stability of the present technique for evaluating Π_z , as a function of z' . For this example, $\epsilon_r = 10$, $\sigma = .01$ mhos/m, frequency = 18 MHz, $r_2/\lambda = .6$, and $\theta_2 = 45^\circ$.

Freq. (MHZ)	r_2/λ	Exact Sommerfeld Integration $\times 10^4$	Asymptotic Evalu- ation (RCM) $\times 10^4$	Present Method $\times 10^4$
3.	.1	2.49 - j2.74	1.98 + j.289	2.49 - j2.74
6.	.2	1.48 - j3.26	2.49 - j1.33	1.48 - j3.26
9.	.3	-.111 - j3.88	1.49 - j3.11	-.109 - j3.88
12.	.4	-2.25 - j3.61	-.742 - j3.90	-2.24 - j3.61
15.	.5	-4.17 - j2.01	-3.24 - j3.02	-4.17 - j2.01
18.	.6	-4.94 + j.675	-4.81 - j.561	-4.94 + j.674
21.	.7	-3.96 + j3.57	-4.53 + j2.58	-3.96 + j3.57
24.	.8	-1.29 + j5.51	-2.27 + j5.09	-1.29 + j5.51
27.	.9	2.22 + j5.54	1.24 + j5.77	2.22 + j5.54
30.	1.0	5.26 + j3.39	4.64 + j4.12	5.26 + j3.39

TABLE 2. Π_x evaluation by three techniques for $\epsilon_r = 40$, $\sigma = 1$. mhos/m, $r_2 = 10$ m,
 $\theta_2 = 10^\circ$, and $\phi_2 = 0$.

Freq. (MHz)	r_2/λ	Exact Sommerfeld Integration $\times 10^5$	Asymptotic Evalu- ation (RCM) $\times 10^5$	Present Method $\times 10^5$
3.	.1	-4.38 + j4.73	-3.47 - j.473	-4.39 + j4.72
6.	.2	-2.59 + j5.70	-4.31 + j2.37	-2.60 + j5.70
9.	.3	.247 + j6.77	-2.49 + j5.44	.225 + j6.79
12.	.4	4.00 + j6.24	1.41 + j6.73	3.96 + j6.29
15.	.5	7.31 + j3.37	5.71 + j5.09	7.25 + j3.46
18.	.6	8.55 - j1.35	8.31 + j.777	8.46 - j1.22
21.	.7	6.71 - j6.35	7.69 - j4.63	6.58 - j6.15
24.	.8	1.98 - j9.57	3.67 - j8.83	1.82 - j9.30
27.	.9	-4.10 - j9.44	-2.40 - j9.82	-4.31 - j9.08
30.	1.0	-9.23 - j5.57	-8.15 - j6.81	-9.49 - j5.12

TABLE 3. H_z evaluation by three techniques for $\epsilon_r = 40$, $\sigma = 1$ mhos/m, $r_2 = 10$ m,
 $\theta_2 = 10^\circ$, and $\phi_2 = 0$.

Freq. (MHZ)	r_2/λ	Exact Sommerfeld Integration $\times 10^4$	Asymptotic Evalu- ation (RCM) $\times 10^4$	Present Method $\times 10^4$
3.	.1	21.5 - j19.8	18.3 + j.0076	24.4 - j17.3
6.	.2	9.98 - j27.2	18.3 - j16.1	11.6 - j26.6
9.	.3	-6.48 - j29.8	4.11 - j27.7	-5.27 - j29.9
12.	.4	-23.8 - j21.8	-15.7 - j26.2	-22.5 - j22.4
15.	.5	-32.9 - j4.22	-30.3 - j11.1	-32.5 - j5.09
18.	.6	-29.9 + j16.5	-31.8 + j10.4	-30.1 + j15.6
21.	.7	-14.6 + j31.6	-19.2 + j28.5	-15.2 + j31.1
24.	.8	7.10 + j34.6	2.15 + j34.9	6.33 + j34.6
27.	.9	26.6 + j24.0	23.2 + j26.9	26.0 + j24.3
30.	1.0	35.9 + j3.54	35.1 + j7.50	35.7 + j4.18

TABLE 4. 0° evaluation by three techniques for $\epsilon_r = 10$, $\sigma = .01$ mhos/m, $r_2 = 10$ m,
 $\theta_2 = 10^\circ$, and $\phi_2 = 0^\circ$.

Freq. (MHz)	r_2/λ	Exact Sommerfeld Integration $\times 10^5$	Asymptotic Evaluation (RCM) $\times 10^5$	Present Method $\times 10^5$
3.	.1	-34.5 + j28.7	-29.0 + j2.68	-45.0 + j19.6
6.	.2	-14.1 + j43.1	-24.5 + j27.5	-20.1 + j41.6
9.	.3	13.9 + j44.4	-.462 + j40.8	9.95 + j45.6
12.	.4	37.9 + j27.8	27.1 + j33.3	36.2 + j30.6
15.	.5	47.2 - j.194	43.1 + j9.34	47.6 + j2.87
18.	.6	37.9 - j28.1	40.3 - j19.5	40.0 - j25.7
21.	.7	13.8 - j44.9	20.3 - j40.4	16.9 - j43.7
24.	.8	-15.3 - j44.3	-8.29 - j44.6	-12.2 - j44.2
27.	.9	-38.3 - j26.7	-33.5 - j30.8	-36.0 - j27.3
30.	1.0	-46.6 + j.971	-44.5 - j4.61	-45.2 + j.42

TABLE 5. H_z evaluation by three techniques for $\epsilon_r = 10$, $\sigma = .01$ mhos/m, $r_2 = 10$ m,
 $\theta_2 = 10^\circ$, and $\phi_2 = 0^\circ$.

$$P(z) = [P(z') - 2j \frac{\partial}{\partial x} g(z')] \exp [jc (z-z')] + 2j \frac{\partial}{\partial x} g(z)$$

$$-2c \exp(jcz) \int_{z'}^z \frac{\partial}{\partial x} g(z) \exp(-jcz) dz . \quad (18)$$

Several important features of the integral appearing in (18) will now be pointed out. First, as seen in Table 1, the results of integration are quite stable as a function of z' . For example, for $z'/\lambda > 1.0$ the difference between the exact Π_z values and those computed by using the expression derived here is less than 5% for $z/\lambda = 0.42$. Second, for the range of parameters investigated thus far, the integrand has been found to be quite smooth. This is due partly to the fact that the singularity associated with g is located at P_2 (see Fig. 1) and because the range of integration is less than one wavelength. As a result of these properties, the numerical integration in (18) can be carried out quite rapidly.

Finally, because the parameter z appears only in the limit of the integral, and not in the integrand itself, the values of vector potential Π_z along an entire vertical line can be rapidly generated by simply marching on the incremental integration steps. This is in contrast to the conventional integrals where the entire integrand must be recomputed for each value of the observation point z .

4. Numerical Results and Conclusions

Tables 2-3 compare the accuracy of the present ${}_0\Pi_x$ and Π_z expressions, given in (11) and (15), with those obtained via the exact and asymptotic evaluations of the Sommerfeld integrals. The present technique is virtually as accurate as the exact integration for a relatively high conducting ground (or $|k|$ large) such as sea water (see Tables 2-3) even for extremely small

image to observation point distance r_2/λ . For less conducting grounds (or $|\kappa|$ small), the approximation of γ_2 defined by (9) introduces some errors as r_2/λ decreases (see Tables 4-5). However the results are still useful for most practical antenna problems and remain superior to those derived by using the RCM method.

The procedure has been successfully tested for a wide variety of r_2 , θ_z , and $|\kappa| > 5$. On the Cyber-175 computer, the evaluation of a ${}_0\Pi_x$ and Π_z pair for a given observation point required ~ 5 msec for the present technique, while the RCM method needed ~ 1 msec, and a recent efficient Sommerfeld exact integration technique [5,8] typically required 40-60 msec of computing time.

Although not discussed here, it is worthwhile to mention that the problem of a vertical dipole radiating over a lossy ground can be handled in a similar manner. The analysis of various antenna structures, comprising both horizontal and vertical wire sections over a lossy ground, will appear in a future communication.

REFERENCES

- [1] A. Banos. Dipole Radiation in the Presence of Conducting Half-Space, New York: Pergamon Press, 1966.
- [2] E.K. Miller, A.J. Poggio, G.J. Burke, and E.S. Selden, "Analysis of Wire Antennas in the Presence of a Conducting Half-Space. Part I. The Vertical Antenna in Free Space," Can. J. Phys., Vol. 50, pp. 879-888, 1972.
- [3] E.K. Miller, A.J. Poggio, G.J. Burke and E.S. Selden, "Analysis of Wire Antennas in the Presence of Conducting Half-Space: Part II. The Horizontal Antenna in Free Space," Can. J. Phys., Vol. 50, pp. 2614-2627, 1972.
- [4] T.K. Sarkar and B.J. Strait, "Analysis of Arbitrarily Oriented Thin Wire Antenna Arrays Over Imperfect Ground Planes," Scientific Report No. 9 on contract F19628-73-C-0047, AFCL-TR-75-0641, Syracuse University, Syracuse, New York, December 1975.
- [5] Y. Rahmat-Samii, P. Parhami, and R. Mittra, "Transient Response of a Loaded Horizontal Antenna Over Lossy Ground with Application to EMP Simulators," University of Illinois at Urbana-Champaign, Electromagnetics Laboratory, Technical Report No. 77-26, December 1977.
- [6] J.N. Brittingham, E.K. Miller, J.T. Okada, "SOMINT: An Improved Model for Studying Conducting Objects Near Lossy Half-Spaces," Lawrence Livermore Laboratory, Report UCRL-52423, February 1978.
- [7] W.C. Kuo, K.K. Mei, "Numerical Approximations of the Sommerfeld Integral for Fast Convergence," Radio Science, Vol. 13, No. 3, pp. 407-415, May 1978.
- [8] P. Parhami, Y. Rahmat-Samii, and R. Mittra, "An Efficient Approach for Evaluating the Sommerfeld Integrals Encountered in the Current Element Problem Radiating Over Lossy Ground," to appear in IEEE Trans. Antennas Propagat.