

AD-A062 772

MARYLAND UNIV BALTIMORE COUNTY BALTIMORE DIV OF MATH--ETC F/G 9/3
OPTIMAL FILTERS FOR NILPOTENT ASSOCIATE-ALGEBRAIC BILINEAR SYST--ETC(U)
OCT 78 S D CHIKTE, J T LO AFOSR-74-2671

UNCLASSIFIED

MPR-78-12


AFOSR-TR-78-1544

NL

| OF |
AD
A062772



END
DATE
FILMED
3-79
DDC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A



LEVEL 1

#2

2

Mathematics Programs at U.M.B.C.

Mathematics Research Reports

AD A062772




AIR FORCE OFFICE OF SCIENTIFIC RESEARCH (AFSC)

NOTICE OF TRANSMITTAL TO DDC

This technical report has been reviewed and is approved for public release IAW AFR 190-12 (7b). Distribution is unlimited.

A. D. BLOSE

Technical Information Officer



Division of Mathematics and Physics

**UNIVERSITY OF MARYLAND
BALTIMORE COUNTY**

Baltimore, Maryland 21228

THIS DOCUMENT IS BEST QUALITY PRACTICABLE.
THE COPY FURNISHED TO DDC CONTAINED A
SIGNIFICANT NUMBER OF PAGES WHICH DO NOT
REPRODUCE LEGIBLY.

78 12 21 03 1

Approved for public release;
distribution unlimited.

DDC FILE COPY

DISCLAIMER NOTICE

**THIS DOCUMENT IS BEST QUALITY
PRACTICABLE. THE COPY FURNISHED
TO DDC CONTAINED A SIGNIFICANT
NUMBER OF PAGES WHICH DO NOT
REPRODUCE LEGIBLY.**

ACCESSION for	
NTIS	White Section ☒
DDC	Blue Section ☐
OTHER INFORMATION	
DISPATCH SYMBOL AND MY CODES	
SPECIAL	
A 23	

6 Optimal Filters For Nilpotent *
 Associate-Algebraic Bilinear Systems,
 by
 10 Shirish D. Chikte and James T. Lo **
 9 Mathematics Research Report, No. 78-12
 11 October 1978

DDC
 RECEIVED
 JAN 4 1979
 F

14 MRR-78-12

12 13p

Abstract

We consider a bilinear signal process driven by a, Gauss-Markov process which is observed in additive, white, gaussian noise. An exact stochastic differential equation for the least squares filter is derived when the signal process satisfies a nilpotency condition. It is shown that the filter is also bilinear and moreover that it satisfies an analogous nilpotency condition. Finally, an example is presented and ways of reducing filter dimensionality discussed.

MJMc

16 2344 17 AI

18 AFOSR 19 TR-78-1544

* Presented at the Sixteenth Allerton Conference on Communication, Control and Computing.

**This research was supported by the Air Force Office of Scientific Research, Air Force Systems Command, USAF, under Grant No. AFOSR-74-2671C.

409 579

78

12

21

15

JRC

OPTIMAL FILTERS FOR NILPOTENT ASSOCIATE-ALGEBRAIC BILINEAR SYSTEMS

SHRISH D. CHIKTE and JAMES TING-HO LO

Department of Mathematics, University of Maryland Baltimore County
Baltimore, Maryland

1. INTRODUCTION

Recently, optimal estimation and detection of signal processes generated by bilinear dynamical systems has been the subject of investigation in a number of articles, e.g. [1], [2] and [3]. Problems of this type arise in such practical applications as inertial navigation, satellite attitude control and angle modulation.

We consider least-squares filtering of stochastic processes generated by the so called nilpotent bilinear dynamical system driven by a Gauss-Markov process observed in white gaussian noise environment. In view of the work by Fliess [4] and Sussman [5], there is strong reason to suspect that the above class of systems can approximate a much wider class of nonlinear systems. The existence of finite dimensional, recursive filters for such processes was established in [3] under a somewhat weaker Lie-algebraic nilpotency condition. In the present paper, explicit stochastic differential equations realizing such filters are derived by "closing" the infinite dimensional nonlinear filtering equations of Kushner [6]. It is found that the filter structure is not only bilinear but it also inherits the nilpotency property from the original system.

The next section presents the problem formulation. The third section contains the derivation of filter equations. The final section concludes with an example and computational considerations.

2. PROBLEM STATEMENT

We first delineate the class of nonlinear filtering problems addressed to in this paper.

We are given the standard linear Itô models for the signal process $\{\xi(t)\}_{t \geq 0}$ and the observation process $\{z(t)\}_{t \geq 0}$ respectively, as follows.

The signal model:

$$d\xi(t) = F(t)\xi(t)dt + Q^{\frac{1}{2}}(t)dw(t), \quad t \geq 0 \quad (2.1)$$

The observation model:

$$dz(t) = H(t)\xi(t)dt + R^{\frac{1}{2}}(t)dv(t), \quad t \geq 0 \quad (2.2)$$

where $w(\cdot)$ and $v(\cdot)$ are standard N and P dimensional independent Wiener processes respectively, $\xi(t) \in \mathbb{R}^N$, $z(t) \in \mathbb{R}^P$, $\xi(0)$ is a zero mean gaussian random vector independent of $w(\cdot)$ and $v(\cdot)$ processes and $F(\cdot)$, $Q^{\frac{1}{2}}(\cdot)$, $H(\cdot)$, $R^{\frac{1}{2}}(\cdot)$ are time-dependent matrices of appropriate dimensions with $Q(t)$, $R(t)$ positive definite and continuously differentiable for all t .

Now consider a process $\{x(t)\}_{t \geq 0}$ generated by a bilinear

dynamical system of the following form:

$$dx(t) = (A + \sum_{i=1}^N B_i \xi_i(t))x(t)dt, \quad x(t) \in \mathbb{R}^M, \quad t \geq 0 \quad (2.3)$$

where $x(0)$ is a gaussian random vector independent of $\xi(0)$,

$$\{w(t)\}_{t \geq 0}, \quad \{v(t)\}_{t \geq 0}.$$

We are interested in an exact, finite dimensional system of stochastic differential equations for the least squares estimator

$E[x(t)|z^t] \triangleq \hat{x}(t|t)$ of $x(t)$. It is well-known (see e.g. [6]) that this, in general, is not possible. In this paper, we intend to derive such a filter and study its characteristics with the proviso that the matrices A and $\{B_i\}_{i=1}^N$ in (2.3) satisfy a well-known algebraic property called nilpotency.

Definition 1:

An associative algebra $\mathcal{A}$ of matrices is said to be nilpotent (of order K) if there exists a positive integer K such that the (matrix) product of any K or more matrices in $\mathcal{A}$ vanishes.

Assumption 2:

The associative algebra $\mathcal{A}$ generated by the set of matrices $\{Ad_A^k(B_i) | i=1,2,\dots,N; k=0,1,\dots\}$ is nilpotent (of order K , say) where

$$Ad_A^0(B_i) \triangleq B_i$$

and

$$Ad_A^k(B_i) \triangleq [A, Ad_A^{k-1}(B_i)] \triangleq A \cdot Ad_A^{k-1}(B_i) - Ad_A^{k-1}(B_i) \cdot A$$

for $k = 1, 2, \dots$

Remark:

Assumption 2 is stronger than the Lie-algebraic nilpotency assumption made in [3].

3. THE STRUCTURE OF THE NONLINEAR FILTER

The filtering problem posed in the last section, was shown to be amenable to solution in [3]. In the main theorem of this paper that follows shortly, we explicitly exhibit the structure of the nonlinear filter and study its characteristics. We begin with some lemmas.

Lemma 3:

The input-output map realized by the system (2.3) satisfying Assumption 2 can also be realized by a bilinear system which is a "direct sum" of (a finite number of) finite dimensional systems of the following form

$$\bar{dx}^k(t) = (\bar{A}^k + \sum_{i=1}^N \bar{B}_i^k \xi_i(t)) \bar{x}^k(t)dt, \quad t \geq 0 \quad (3.1)$$

where,

$$\bar{A}^k = \begin{bmatrix} A_1^k & 0 & \cdots & 0 \\ 0 & A_2^k & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & \cdots & 0 & A_{M_k}^k \end{bmatrix} \quad (3.2)$$

with A_i^k , $i=1, \dots, M_k$ being $J_i \times J_i$ Jordan blocks, and

$$\bar{B}_i^k = \begin{bmatrix} 0 & B_{i,1}^k & 0 & \cdots & 0 \\ \vdots & 0 & B_{i,2}^k & \cdots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ \vdots & \vdots & \vdots & 0 & B_{i,M_k-1}^k \\ 0 & \cdots & \cdots & \cdots & 0 \end{bmatrix} \quad (3.3)$$

with $B_{i,j}^k$, $i=1, \dots, N$; $j=1, \dots, M_k-1$ being $J_j \times J_{j+1}$ matrices.

Hence, the associative algebra $\left\{ \text{Ad}_A^k (\bar{B}_i) \mid k=0,1,\dots; i=1,\dots,N \right\}$ is also nilpotent of the same order K .

Proof:

The proof follows closely the ideas in the proofs of theorems 4 and 6 of Brockett [7] and hence is kept brief.

Using the transformation $z(t) = e^{-At} x(t)$ and applying the Peano-Baker formula, we find that the Volterra series solution to (2.3) is given by

$$\begin{aligned} x(t) = & \left[e^{At} + \int_0^t e^{A(t-\sigma_1)} \left(\sum_{i=1}^N B_i \xi_i(\sigma_1) \right) e^{A\sigma_1} d\sigma_1 \right. \\ & + \int_0^t \int_0^{\sigma_1} e^{A(t-\sigma_1)} \left(\sum_{i=1}^N B_i \xi_i(\sigma_1) \right) \cdot e^{A(\sigma_1-\sigma_2)} \\ & \left. \left(\sum_{j=1}^N B_j \xi_j(\sigma_2) \right) e^{A\sigma_2} d\sigma_1 d\sigma_2 + \dots \right] x(0). \end{aligned} \quad (3.4)$$

It now follows from the Baker-Campbell-Hausdorff formula together with Assumption 2 that all the terms in (3.4) beyond the first K terms will vanish.

Now, let the Jordan form of A be given by $\text{diag} \{A_1, A_2, \dots, A_s\}$ where A_i is, say, $J_i \times J_i$. Let $K_i \triangleq \sum_{k=1}^{i-1} J_k$, $i=1, \dots, s$ with

$K_1 \triangleq 0$, and define $y^i \triangleq [x_{K_i+1} \dots x_{K_{i+1}}]^T$, $i=1, \dots, s$. Recall that e^{At} consists of $J_i \times J_k$ blocks, $i, k=1, \dots, s$ which can be written as $\sum_{\ell=1}^s C_\ell e^{A_\ell t} D_\ell^T$, for some $J_i \times J_\ell$ matrices C_ℓ and $J_\ell \times J_k$ matrices D_ℓ .

With these remarks in mind, it is not difficult to see that the r^{th} order term, $1 \leq r < K$, in the Volterra series (3.4), for the subset $y^i(\sigma_0)$ of components of $x(\sigma_0)$, $i=1, \dots, s$, consists of groups of terms of the form

$$\int_0^{\sigma_0} \int_0^{\sigma_1} \dots \int_0^{\sigma_{r-1}} \sum_{m_1, \dots, m_r=1}^N C_1 e^{A_1(\sigma_0 - \sigma_1)} D_1 e^{A_2(\sigma_1 - \sigma_2)} D_2 \dots D_r e^{A_r \sigma_r} y^k(0) \prod_{i=1}^r \xi_{m_i}(\sigma_i) d\sigma_i$$

But each group of this type is realizable by a system of the type claimed in the lemma with $\bar{A}$ and $\{\bar{B}_i\}_{i=1}^N$ as in (3.2), (3.3) (see theorem 4 of [7] for details). The final assertion regarding nilpotency is obvious if we note that $\bar{A}$ is upper triangular while $\bar{B}_i$, $i=1, \dots, N$ are strictly upper triangular.

Lemma 4:

Consider the signal and observation models of (2.1) and (2.2) respectively. Define a (vector) process $\{y(t)\}_{t \geq 0}$ by

$$dy(t) = Dy(t)dt + \sum_{i=1}^N E_i \xi_i(t) y(t)$$

where $D, \{E_i\}_{i=1}^N$ are matrices of appropriate dimension,

$y(0)$ is independent of $\xi(0)$, $w(\cdot)$ and $v(\cdot)$ processes. (3.5)

Then $\hat{y}(t|t) \triangleq E[y(t)|z^t]$ satisfies the following stochastic differential equation:

$$\begin{aligned} d\hat{y}(t|t) &= D\hat{y}(t|t)dt + \sum_{i=1}^N E_i \cdot E^t[\xi_i(t)y(t)]dt \\ &+ \{E^t[y(t)\xi^T(t)] - \hat{y}(t|t)\hat{\xi}^T(t|t)\} H^T(t)R^{-1}(t)dv(t) \\ \hat{y}(0|0) &= E[y(0)] \end{aligned} \quad (3.6)$$

where,

$$E^t[\cdot] \triangleq E[\cdot|z^t] \triangleq E[\cdot | \{z(\tau) | 0 \leq \tau \leq t\}]$$

$$dv(t) = dz(t) - H(t)\hat{\xi}(t|t)dt.$$

Proof:

Apply the Kushner nonlinear filtering equations [6] to the signal process $(y^T(\cdot), \xi^T(\cdot))^T$ with $z(\cdot)$ as the observation process.

Lemma 5:

Let $x = (x_0, x_1, \dots, x_n)^T$ be a gaussian random vector with mean vector $m = (m_0, m_1, \dots, m_n)^T$ and covariance matrix $P = [P_{ij}]_{i,j=0}^n = 0$. We then have the following relation:

$$E \left[\prod_{i=0}^n x_i \right] = \begin{cases} m_0 E \left[\prod_{i=1}^n x_i \right] + \sum_{j=1}^n P_{0j} E \left[\prod_{\substack{i=2 \\ i \neq j}}^n x_i \right], & n > 1 \\ m_0 m_1 + P_{01}, & n = 1. \end{cases} \quad (3.7)$$

Proof: See e.g. [8].

We are now ready to state and prove the main theorem of this paper.

Theorem 6:

Consider the signal process $\{x(t), \xi(t)\}_{t \geq 0}$ evolving as in (2.3) and (2.1) and the observation process $\{z(t)\}_{t \geq 0}$ as in (2.2). Assume that (2.3) satisfies Assumption 2. Then the least squares filtered estimate $\hat{x}(t|t)$ can be obtained via the following finite dimensional system of bilinear stochastic differential equations with suitable initial conditions:

$$d\hat{x}^*(t|t) = (A^*(t)dt + \sum_{i=1}^N B_i^* \hat{\xi}_i^*(t|t)dt + \sum_{i=1}^N C_i^* d\mu_i(t)) \hat{x}^*(t|t)dt$$

$$\hat{x}(t|t) = L \hat{x}^*(t|t), \quad t \geq 0 \quad (3.8)$$

where $\hat{\xi}_i^*(t|t)$, $t \geq 0$ is given by the standard Kalman-Pucy filter [9], $A^*(\cdot)$ is a deterministic matrix time function. $L, \{B_i^*, C_i^*\}_{i=1}^N$ are constant matrices, and

$$\mu(t) \triangleq [\mu_1(t) \mu_2(t) \dots \mu_N(t)]^T \triangleq \int_0^t H^T(\tau) R^{-1}(\tau) dV(\tau)$$

is the modified innovations process.

Furthermore, the associative algebra generated by the following set of matrices,

$$\left\{ Ad_{(Ad_{C_i}^* (A^*(t)))}^k (B_j^*) \mid i, j=1, 2, \dots, N; k, \ell=0, 1, 2, \dots \right\} \quad t \geq 0$$

is nilpotent of order K .

Proof:

From Lemma 3, it is clear that we may take - without loss of generality - (2.3) to be a stationary bilinear system in which the matrices A and $\{B_i\}_{i=1}^N$ are of the special form stipulated in (3.2) and (3.3) respectively. Furthermore, we shall assume for ease of exposition, that

$A = \text{diag}(a_1, a_2, \dots, a_M)$; consequently $B_k \triangleq [b_k^{i,j}]$ is such that

$$b_k^{i,j} = \begin{cases} 0, & j \neq i+1 \\ b_k^i, & j = i+1 \end{cases}, \quad k=1, \dots, N \quad \text{and} \quad x_i(0) = 0 \quad \text{a.s.} \quad \text{for } i < M. \quad \text{For,}$$

it would become apparent in the sequel, the proof for the general case would involve little more than additional notational complexity.

We now apply Lemma 4 to (2.3) with the above mentioned specialization. With the help of Lemma 5, the resulting differential equation analogous to (3.6) can be written in the following form:

$$\begin{aligned} d\hat{x}(t|t) = & (A + \sum_{j=1}^N B_j \hat{\xi}_j(t|t)) \hat{x}(t|t) dt + \sum_{j=1}^N B_j \hat{x}^j(t|t) dt \\ & + [\hat{x}^1(t|t), \hat{x}^2(t|t), \dots, \hat{x}^N(t|t)] H^T(t) R(t) dv(t) \end{aligned} \quad (3.9)$$

where the "augmenting states" appearing in (2.17) are defined as

$$x^j(\cdot) \triangleq [x_1^j(\cdot), x_2^j(\cdot), \dots, x_M^j(\cdot)]^T, \quad j=1, 2, \dots, N,$$

$$x_q^k(\sigma_0) = \begin{cases} \sum_{m_1, \dots, m_{M-q}=1}^N \sum_{r=1}^{M-q} \int_0^{\sigma_0} \int_0^{\sigma_1} \dots \int_0^{\sigma_{M-q-1}} P_{k, m_r}(\sigma_0, \sigma_r) e^{a_{q+r}(\sigma_r - \sigma_{r+1})} \\ \cdot b_{q+r}^{m_r} e^{a_M \sigma_{M-q}} x_M(0) \left(\prod_{\substack{i=0 \\ i \neq r}}^{M-q-1} e^{a_{q+i}(\sigma_i - \sigma_{i+1})} m_{i+1} \cdot b_{q+i}^{m_{i+1}} \right. \\ \left. \cdot \xi_{m_{i+1}}(\sigma_{i+1}) d\sigma, \quad q < M \right. \\ 0, \quad q=M \end{cases} \quad (3.10)$$

(Note: In the general case $x_q^k(\sigma_0)$ would be a vector of a dimension consistent with the q^{th} Jordan block).

and, $P_{i,j}(t, \sigma), \quad i, j=1, \dots, N; \quad 0 \leq \sigma \leq t,$

is the i, j^{th} element of the conditional covariance matrix

$$P(t, \sigma) = E[(\xi(t) - \hat{\xi}(t|t))(\xi(\sigma) - \hat{\xi}(\sigma|t))^T | \mathcal{Z}_t] \quad (3.11)$$

Also recall [10] that $P(t, \sigma), \sigma \leq t$ satisfies the following differential equation

$$\frac{\partial P(t, \sigma)}{\partial t} = [F(t) - P(t)H^T(t)\bar{R}^{-1}(t)H(t)]P(t, \sigma). \quad (3.12)$$

Now, if we differentiate the augmenting state vector

$$1_x(\cdot) \triangleq [x_1^T(\cdot), x_2^T(\cdot), \dots, x_N^T(\cdot)]^T \in \mathbb{R}^{MN}, \quad (3.13)$$

then utilizing (3.12), we find that

$$d^1 x(t) = \alpha^1(t) x(t) dt + \beta^1(t) x(t) dt + \sum_{i=1}^N \gamma_i^1 x(t) \xi_i(t) dt \quad (3.14)$$

where $\alpha^1(\cdot)$, $\beta^1(\cdot)$, $\{\gamma_i^1\}_{i=1}^N$ are determined by the problem parameters and the error covariance $P(\cdot)$, the $(M \times M)$ blocks of $\alpha^1(\cdot)$ and $\beta^1(\cdot)$ are upper triangular and $\{\gamma_i^1\}_{i=1}^N$ are block diagonal matrices with identical strictly upper triangular blocks given by

$$\begin{bmatrix} 0 & b_1^i & 0 & \dots & 0 \\ 0 & 0 & b_2^i & \dots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ 0 & \dots & \dots & b_{M-2}^i & 0 \\ 0 & \dots & \dots & \dots & 0 \end{bmatrix} \triangleq \text{a block of } \gamma_i^1 \quad (3.15)$$

Now we may again apply Lemmas 4 and 5 to (3.14), and get

$$\begin{aligned} d^1 \hat{x}(t|t) &= (\alpha^1(t) + \sum_{i=1}^N \gamma_i^1 \hat{\xi}_i(t|t)) \hat{x}(t|t) dt + \beta^1(t) \hat{x}(t|t) dt \\ &+ \sum_{j=1}^N \gamma_j^1 \hat{x}^j(t|t) dt + [\hat{x}^1(t|t), \hat{x}^2(t|t), \dots, \hat{x}^N(t|t)]^T H(t) R^{-1}(t) dv(t) \end{aligned} \quad (3.16)$$

where the "new" set of augmenting states are

$$\hat{x}^j(\cdot) \triangleq [x^{j,1}(\cdot), x^{j,2}(\cdot), \dots, x^{j,N}(\cdot)]^T, \quad j=1, \dots, N$$

$$x^{j,k}(\cdot) \triangleq [x_1^{j,k}(\cdot), x_2^{j,k}(\cdot), \dots, x_M^{j,k}(\cdot)]^T$$

$$x_q^{j,k}(\sigma_0) = \begin{cases} \sum_{m_1, \dots, m_{M-q-1}}^N \sum_{\substack{r_1, r_2=1 \\ r_1 \neq r_2}}^{M-q} \int_0^{\sigma_0} \int_0^{\sigma_1} \dots \int_0^{\sigma_{M-q-1}} P_{j, m_{r_1}}(\sigma_0, \sigma_{r_1}) p_{k, m_{r_2}}(\sigma_0, \sigma_{r_2}) \\ \cdot e^{a_{q+r_1}(\sigma_{r_1} - \sigma_{r_1+1})} b_{q+r_1}^{m_{r_1}} e^{a_{q+r_2}(\sigma_{r_2} - \sigma_{r_2+1})} \\ \cdot e^{a_{M-q} \sigma_{M-q}} x_M^{(0)}(\pi_{i=0}^{M-q-1} e^{a_{q+i}(\sigma_i - \sigma_{i+1})} b_{q+i}^{m_{i+1}} (\sigma_{i+1}) d\sigma_{i+1}), \\ q < M-1 \\ 0 \quad q \geq M-1 \end{cases} \quad (3.17)$$

Now the new augmenting state vector

$${}^2x(\cdot) \triangleq [{}^1x^1(\cdot)^T, {}^1x^2(\cdot)^T, \dots, {}^1x^N(\cdot)^T]^T \in \mathbb{R}^{MN^2} \quad (3.18)$$

analogous to (3.16), is seen to satisfy the differential equation

$$d^2x(t) = \alpha^2(t) {}^2x(t) dt + \beta^2(t) {}^1x(t) dt + \sum_{i=1}^N \gamma_i^2 {}^2x(t) \xi_i(t) dt \quad (3.19)$$

in which $M \times M$ blocks of $\alpha^2(\cdot)$, $\beta^2(\cdot)$ and γ_i^2 have the same properties as those of $\alpha^1(\cdot)$, $\beta^1(\cdot)$ and $\gamma_i^1(\cdot)$ respectively with a block of γ_i^2 obtained by setting $b_{M-2}^i = 0$ in the block (3.15) of γ_i^1 . The above process can now be iterated and it is clear that this sequence will terminate at the M^{th} application - in the general case, this would be the total number of Jordan blocks - of Kushner equations since $\gamma_i^{M-1} = 0$, $i=1, 2, \dots, N$. Collecting together the differential equations for $x(\cdot)$, ${}^1x(\cdot)$, $\dots$, ${}^{M-1}x(\cdot)$, we see that the dimension of the resulting nonlinear filter equals

$(MNMN^2 + \dots + MN)^{M-1} = \frac{M}{N-1} (N^{M-1})$. The filter form (3.8) follows upon writing the innovations term in the standard bilinear format, which also reveals the fact that the matrices $\{C_i^*\}_{i=1}^N$ consist of upper triangular $M \times M$ blocks. We thus see that $\{B_i^*\}_{i=1}^N$ consists of (strictly) upper triangular $(M \times M)$ blocks, while $\{A^*(t)\}_{t \geq 0}$ and $\{C_i^*\}_{i=1}^N$ consist of $(M \times M)$ blocks that are upper triangular. It is, therefore, easy to see - if we carry out matrix multiplications blockwise - that the set of matrices $\{Ad_{C_i}^{\ell} (A^*(t))\}_{i \geq 0; i=1, \dots, N; \ell=0, 1, \dots}$ also have $(M \times M)$ blocks all upper triangular. Consequently the set

$$\left\{ Ad_{C_i}^k (Ad_{C_i}^{\ell} (A^*(t))) (E_j^*) \right\}_{t \geq 0; i, j=1, \dots, N; k, \ell=0, 1, 2, \dots}$$

has $(M \times M)$ blocks that are all strictly upper triangular. Hence, blockwise multiplication shows that the associative algebra generated by them is nilpotent of order K . Q.E.D.

The filter structure revealed in the above theorem has some interesting features worth noting. We first see that analogous to the case of linear signal models, the "drift" terms in (3.8) do preserve the bilinear structure of the signal model (2.14) and also inherit its nilpotency property; nevertheless the matrix $A^*(\cdot)$ is time varying although the matrix A is constant. Secondly, the filter is bilinear in the innovations as well. Also observe that the state spaces of both the signal model and the filter are (not necessarily identical) nilpotent group manifolds. This suggests that it may be worthwhile to investigate optimal filters under criteria that are defined on such manifolds. Such an approach for abelian groups was followed in [1].

4. COMPUTATIONAL CONSIDERATIONS

Realization of the filter (2.16) in the form of a block schematic is shown in figure 1 on the following page. The practical importance of the bilinear property of the above filter is that a real-time analog implementation of the filter is still possible with easily available and cheap hardware consisting of integrators, summers and multipliers.

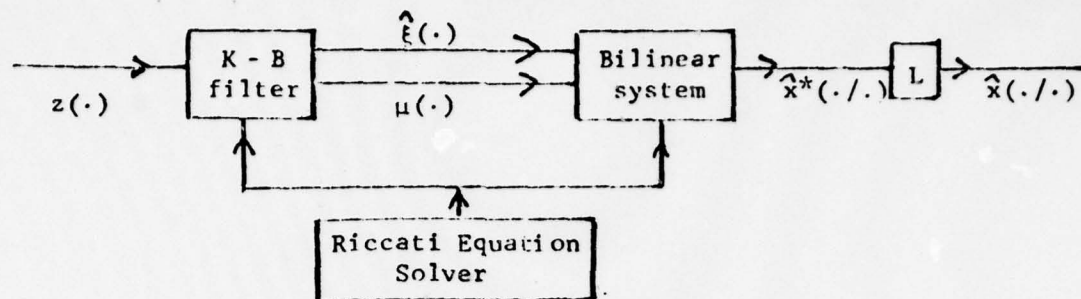


Figure 1

However, a major drawback of the filter is its "curse of dimensionality". The following example illustrates the problem and shows one way of its mitigation. Example: We now apply the algorithm developed in the theorem to construct the optimal filter for the case of system (2.3) with $M = 3$,

$$N = 2 \text{ and } A = \begin{bmatrix} a_1 & 0 & 0 \\ 0 & a_2 & 0 \\ 0 & 0 & a_3 \end{bmatrix}, \quad B_i = \begin{bmatrix} 0 & b_1^i & 0 \\ 0 & 0 & b_2^i \\ 0 & 0 & 0 \end{bmatrix}, \quad i = 1, 2$$

The filter is found to have a dimension of 21, having required 3 applications of Kushner's equations. We enumerate below the nonzero 3×3 blocks of $A^*(t)$, $\{B_k^*\}_{k=1}^N$, $\{C_k^*\}_{k=1}^N$ and L . The notation used is as follows:

$T^{i,j}$: i, j^{th} block of matrix T

$P_{i,j}(t), \epsilon_{i,j}(t)$: i, j^{th} elements of matrices $P(t)$ and $[F(t) - P(t)H^T(t)R^{-1}(t)H(t)]$ respectively.

$\delta(\cdot)$: Krönecker delta function.

and finally, for any $n \times n$ matrix T and $0 \leq i \leq n$,

T^i : Matrix T with last i rows and columns replaced by zeros.

$$A^{*1,1}(t) = A; \quad A^{*1,j}(t) = B_{j-1, j-2, 3}^1;$$

$$A^{*i,1}(t) = \sum_{k=1}^2 P_{(i-1),k}(t) B_k; \quad A^{*i,j}(t) = [A^{1+\epsilon_{(i-1), (j-1)}(t)} I_3^1],$$

$$i, j = 2, 3;$$

$$A^{*4,2}(t) = 2 \sum_{i=1}^2 B_i^1 P_{1,i}(t), \quad A^{*4,j}(t) = 2[A^{2+\epsilon_{1, (j-3)}(t)} I_3^2], \quad j = 4, 5;$$

$$A^{*i,2}(t) = \sum_{k=1}^2 P_{2,k}(t) B_k, \quad i = 5, 6; \quad A^{*i,3}(t) = \sum_{k=1}^2 P_{1,k}(t) B_k, \quad i = 5, 6;$$

$$A^{*i,j}(t) = [A^2 + \epsilon_{2, (j-3)}(t) I_3^2], \quad i = 5, 6; \quad j = 4, 5;$$

$$A^{*i,j}(t) = [A^2 + \epsilon_{1, (j-5)}(t) I_3^2], \quad i = 5, 6; \quad j = 6, 7;$$

$$A^{*7,3}(t) = 2 \sum_{k=1}^2 P_{2,k}(t) B_k^1;$$

$$A^{*7,j}(t) = 2[A^2 + \epsilon_2^{(j-5)}(t)I_3^2], \quad j = 6,7$$

$$B_k^{*1,1} = B_k; \quad B_k^{*1,1} = B_k, \quad i=2,3; \quad k=1,2$$

$$C_k^{*1,2} = \delta(k-1)I_3^1; \quad C_k^{*1,3} = \delta(k-2) \cdot I_3^1;$$

$$C_k^{*2,4} = \delta(k-1) \cdot I_3^2; \quad C_k^{*2,6} = \delta(k-2) \cdot I_3^2;$$

$$C_k^{*3,5} = \delta(k-1) \cdot I_3^2; \quad C_k^{*3,7} = \delta(k-2) I_3^2; \quad k = 1,2$$

$$L^{1,1} = I_3$$

In the above matrices, note the repetition of certain block rows and the presence of some all zero rows. This allows us in effect to reduce the filter dimension from 21 to 10. This argument can be extended to the general case, and it is not difficult to show that the dimensionality can be reduced in this way from

$$\frac{M}{N-1} (N^M-1) \text{ to } \sum_{i=0}^{M-1} (M-i) \binom{N+i-1}{i}$$

References:

1. James T. Lo and Alan S. Willsky, "Estimation for Rotational Processes with One Degree of Freedom - Part I: Introduction and Continuous-Time Processes", *IEEE Trans. on A.C.*, 20, 10-21 (1975).
2. James T. Lo, "Signal Detection for Bilinear Systems", *Information Sciences*, 9, 249-278 (1975).
3. Steven I. Marcus and Alan S. Willsky, "Algebraic Structure and Finite Dimensional Nonlinear Estimation", *S.I.A.M. J. on Math. Anal.*, 9, 312-327 (1978).
4. M. Fliess, "Un Outil Algebrique: Les Series Formelles Non Commutatives", *Lecture Notes in Math. Systems and Economics*, Springer-Verlag (Proc. of the Conf. on Math. Systems Theory, Udine, Italy, 1975).
5. H. Sussman, "Semigroup Representation, Bilinear Approximation of Input-Output Maps, and Generalized Inputs", *Lecture Notes in Math. Systems and Economics*, Springer-Verlag. (Proc. Conf. on Math. Systems Theory, Udine, Italy, 1975).
6. Harold J. Kushner, "Dynamical Equations for Optimal Nonlinear Filtering", *J. Diff. Equations*, 3, 179-190 (1967).
7. R. W. Brockett, "Volterra Series and Geometric Control Theory", *Automatica*, 12, 167-176 (1976).
8. K. S. Miller, *Multidimensional Gaussian Distributions*, John Wiley and Sons, New York (1965).
9. R. E. Kalman and R. S. Bucy, "New Results in Linear Filtering and Prediction Theory", *Trans. ASME, Ser. D.; J. Basic Eng.*, 83, 95-107 (1961).
10. T. Kailath and P. Frost, "An Innovations Approach to Least-Squares Estimation: Part II. Linear Smoothing in Additive White Noise", *IEEE Trans. on A.C.*, 13, 655-660 (1968).

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER AFOSR-TR. 78-1544	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) OPTIMAL FILTERS FOR NILPOTENT ASSOCIATE- ALGEBRAIC BILINEAR SYSTEMS	5. TYPE OF REPORT & PERIOD COVERED Interim	
7. AUTHOR(s) Shirish D. Chikte and James Ting-Ho Lo	6. PERFORMING ORG. REPORT NUMBER	
9. PERFORMING ORGANIZATION NAME AND ADDRESS University of Maryland, Baltimore County Department of Mathematics Baltimore, Maryland 21228	8. CONTRACT OR GRANT NUMBER(s) AFOSR 74-2671	
11. CONTROLLING OFFICE NAME AND ADDRESS Air Force Office of Scientific Research/NM Bolling AFB, Washington, DC 20332	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 61102F 2304/A1	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	12. REPORT DATE October 1978	
	13. NUMBER OF PAGES 11	
	15. SECURITY CLASS. (of this report) UNCLASSIFIED	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES Proceedings of the Sixteenth Allerton Conference on Communication, Control and Computing, held at University of Illinois at Urbana-Champaign, Oct. 1978		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Optimal least-squares estimation, Nilpotent associative algebra, Bilinear filter, Innovations process, Kushner equations.		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) We consider a bilinear signal process driven by a, Gauss-Markov process which is observed in additive, white, gaussian noise. An exact stochastic differential equation for the least squares filter is derived when the signal process satisfies a nilpotency condition. It is shown that the filter is also bilinear and moreover that it satisfies an analogous nilpotency condition. Finally, an example is presented and ways of reducing filter dimensionality discussed.		

DD FORM 1 JAN 73 1473

UNCLASSIFIED
SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)