

UNCLASSIFIED

AD NUMBER: AD0082471

CLASSIFICATION CHANGES

TO: Unclassified

FROM: Confidential

LIMITATION CHANGES

TO:
Approved for public release; distribution is unlimited.

FROM:
Distribution authorized to U.S. Government Agencies and their Contractors; Administrative/Operational Use; 1 Apr 1955. Other requests shall be referred to Office of Naval Research, Arlington, VA 22203.

AUTHORITY

U per DoDD 5200.1 dtd 31 Dec 1967; ST-A per ONR ltr dtd 13 Sep 1977

THIS PAGE IS UNCLASSIFIED

**THIS REPORT HAS BEEN DELIMITED
AND CLEARED FOR PUBLIC RELEASE
UNDER DOD DIRECTIVE 5200.20 AND
NO RESTRICTIONS ARE IMPOSED UPON
ITS USE AND DISCLOSURE.**

DISTRIBUTION STATEMENT A

**APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION UNLIMITED.**

UNCLASSIFIED

AD _____

*Reproduced
by the*

ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA



DOWNGRADED AT 3 YEAR INTERVALS:
DECLASSIFIED AFTER 12 YEARS
DOD DIR 5200.10

UNCLASSIFIED

AD 82471

Armed Services Technical Information Agency

**Reproduced by
DOCUMENT SERVICE CENTER
KNOTT BUILDING, DAYTON, 2, OHIO**

This document is the property of the United States Government. It is furnished for the duration of the contract and shall be returned when no longer required, or upon recall by ASTIA to the following address:
Armed Services Technical Information Agency, Document Service Center,
Knott Building, Dayton 2, Ohio.

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.



8924

AD No. 82471
ASTIA FILE COPY

Cessna

FC

Model 319A

Report No. 1339-3

FLIGHT TEST OBSERVED & CORRECTED
DATA REPORT: III-TAKE-OFF AND
LANDING PERFORMANCE OF MODEL 319A

NONR CONTRACT 856(00)

Cessna Aircraft Company
Wichita, Kansas

NOV 10 1955

55AA

55639

CONFIDENTIAL

Cessna
Aircraft Company
Wichita, Kansas

Engineering Report - Research Department

MODEL 319A : REPORT NO. 1339-3
FLIGHT TEST OBSERVED & CORRECTED
DATA REPORT: III - TAKE-OFF & LANDING
PERFORMANCE OF MODEL 319A

NONR CONTRACT 858(00)

Copy to

REPORT DATE: April 1, 1955

PREPARED BY: W. M. Gertsen

WITNESSED BY:

APPROVED BY: J. W. Fisher
A. N. Petroff

8/8/55

R. G. Jones for
761

55

53683

CONFIDENTIAL

TITLE **Take-offs and Landings**

~~CONFIDENTIAL~~

PREPARED BY **WMG** DATE **4-1-55**

CESSNA AIRCRAFT CO.

WICHITA KANSAS

CHECKED BY **JWF** DATE **4-1-55**

PAGE **1**

REPORT NO **1339-3**

MODEL **319A**

TABLE OF CONTENTS

	Page No.
I. Summary	1
II. Introduction	2
A. Object	2
B. Place and Date of Tests	2
C. Methods and Equipment Used	2
D. Description of Airplane	4
E. List of Symbols	5
III. Results - Tables of Reduced Data	6
IV. Discussion	10
V. Conclusions and Recommendations	17
VI. References	19
VII. Appendix	20
A. Photograph of Typical Take-off (Figure 1)	21
B. Plots of Corrected Distances vs. Gross Weight (Figures 2-7)	22
C. Plots of Uncorrected Data (Figures 8 - 50)	28
D. BLC System Diagram (Figure 51)	71
E. BLC System Flow Quantities (Figure 52)	72
F. Propeller and Engine Curves (Figures 53 - 55)	73

NOTE: All original data, film analyses, take-off and landing data corrections and reductions are on file in the Research Department, Cessna Aircraft Company. Copies are available upon request by authorized agencies.

~~CONFIDENTIAL~~

TITLE **Take-offs and Landings**

~~CONFIDENTIAL~~

PAGE 1

PREPARED BY **WMG** DATE **4-1-55**

CESSNA AIRCRAFT CO.

REPORT NO **1339-3**

WICHITA KANSAS

CHECKED BY **JWF** DATE **4-1-55**

MODEL **319A**

FORM 484

I. SUMMARY

Flight tests were conducted with the Cessna Model 319A airplane on five different occasions from February through August 1954 for the purpose of determining take-off and landing performance over a 50 ft. obstacle. On two occasions, a record of the actual flight path of the airplane was made by means of a photographic flight path recording camera. Twice, data was obtained by observing distances required to take-off and land over an actual 50 ft. barrier. One series of tests was recorded by means of a 35 mm Ditto camera which took a series of still photographs covering the whole range of the take-off or landing test run.

Results of this take-off and landing test program revealed varying distances when corrected to same gross weights and standard sea level conditions. These differences are attributable to several changes made to the airplane and to changes in piloting technique throughout the program. These changes are fully discussed in Section IV of this report.

During the last phase of the program, after best piloting techniques had been established, a reduction in both take-off and landing distance over a 50 ft. obstacle of 25% was achieved by means of the boundary layer control system. An even larger reduction in ground run distance was achieved (approximately 36%).

TITLE **Take-offs and Landings**

CONFIDENTIAL

PAGE **2**

PREPARED BY **WMG** DATE **4-1-55**

CESSNA AIRCRAFT CO.
WICHITA KANSAS

REPORT NO **1339-3**

CHECKED BY **JWF** DATE **4-1-55**

MODEL **319A**

II. INTRODUCTION

A. Object

Take-off and landing performance tests of Model 319A were administered by the Office of Naval Research for Army Transportation Corps under NONR Contract 856(00).

The object of this report is to set forth in detail all take-off and landing performance test data, reduced and corrected data, and all pertinent information regarding methods of obtaining the data and other factors influencing the program.

B. Place and Date

The tests in this program were conducted by Cessna Research Department and Flight Test personnel on the dates and in the places indicated below:

18 February 1954 - Cessna Aircraft Company field (not photographed)

4 March 1954 - Cessna Aircraft Company field (not photographed)

4 June 1954 - Wichita Municipal Airport (photographed)

16 June 1954 - Cessna Aircraft Company field (photographed)

24 August 1954 - Wichita Municipal Airport (photo sequence)

C. Methods and Equipment Used

On 18 February 1954, and 4 March 1954, the following procedure was used: All data was taken by observers at the scene. Wind

CONFIDENTIAL

CONFIDENTIAL

TITLE **Take-offs and Landings**

PREPARED BY **WMG** DATE **4-1-55**

CHECKED BY **JWF** DATE **4-1-55**

CESSNA AIRCRAFT CO.
WICHITA KANSAS

PAGE **3**

REPORT NO **1339-3**

MODEL **319A**

FORM 484

velocity, pressure altitude, outside air temperature, time of day for each test run as well as actual distances required by the airplane to take-off and land over a 50 ft. obstacle were recorded. An actual obstacle 50 ft. high (consisting of a pole, the top of which was plainly marked so as to be visible from a considerable distance) was erected. This permitted observers to detect how high the airplane was when it passed by. Cases where the airplane failed to clear 50 ft. exactly at the obstacle were corrected to obtain the exact runway location where the airplane was 50 ft. high. This information, together with observed points of start and break ground (take-off), touch down and stop (landing) allowed exact distances to be determined.

On 4 June 1954, and 16 June 1954, the following procedure was used: The take-offs and landings were photographed with a CAA Bell & Howell Photographic Flight Path Recording camera set perpendicular to the runway at a specified distance. The film, superimposed upon a grid, recorded at the rate of four frames per second the horizontal and vertical location of the airplane. A stop watch was included in the camera field of view.

Observers at the scene recorded wind velocity, pressure altitude, outside air temperature, and time of day for each test run.

On 24 August 1954, tests were conducted in conjunction with a standard L-19A, the two airplanes being flown side by side. Still photographs of the entire flight paths were made by means of a Ditto 35 mm

CONFIDENTIAL

TITLE **Take-offs and Landings**

CONFIDENTIAL

PAGE **4**PREPARED BY **WMG** DATE **4-1-55**CESSNA AIRCRAFT CO.
WICHITA, KANSASREPORT NO **1339-3**CHECKED BY **JWF** DATE **4-1-55**MODEL **319A**

camera which takes up to 10 exposures in rapid order without resetting.

Each photograph of each run overlapped the preceding photograph to such a degree that the entire flight path was traced. The runway location of the airplane in each photograph was determined by comparing location of the airplane with known objects in the background, together with the use of a map of the area where the tests were run (Wichita Municipal Airport).

The point at which the airplane was at 50 ft. was determined by finding the point at which the airplane was 2 lengths above the runway, since the airplane was 25 feet long.

D. Description of Airplane

The Cessna Model 319A was designed to utilize the fuselage of a Cessna Model 305 (L-19), and the tail surfaces of a Cessna Model 180. It contained in a specially designed wing an improved "Arado" type Boundary Layer Control System. This system consisted of axial fans located in the wings, which were driven by hydraulic motors. The motors were run by a variable displacement pump which extracted its power from the main engine. The fans sucked air in through suction slots along the inboard portion of the wings into internal ducts and blew the air out through blowing slots along the outboard portions of the wings. A detailed description of the airplane appears in Reference 1.

CONFIDENTIAL

CONFIDENTIALTITLE **Take-offs and Landings**PAGE **5**PREPARED BY **WMG** DATE **4-1-55**

CESSNA AIRCRAFT CO.

REPORT NO **1339-3**

WICHITA, KANSAS

CHECKED BY **JWF** DATE **4-1-55**MODEL **319A**

FORM 484

E. List of Symbols

AF	Activity factor
BLC	Boundary Layer Control
CBHP	Corrected brake horsepower
CL_{max}	Maximum lift coefficient, (W/Sq)
C_Q	Flow quantity coefficient (Q/SV)
MAC	Mean aerodynamic chord
OAT	Outside air temperature, °F
S	Wing area, sq. ft.
V	Velocity, ft/sec.
V_w	Wind velocity, mi/hr.
W	Aircraft weight, lbs.
c	Local wing chord, ft.
h_p	Pressure altitude, ft.
q	Dynamic pressure, lbs/ft²
s_a	Air distance, ft.
s_g	Ground distance, ft.
s_t	Total distance, ft.
δ_A	Aileron droop, deg.
δ_F	Flap deflection, deg.

CONFIDENTIAL

CONFIDENTIAL

TITLE **Take-offs and Landings**

PREPARED BY **WMG** DATE **4-1-55**

CHECKED BY **JWF** DATE **4-1-55**

CESSNA AIRCRAFT CO.
WICHITA KANSAS

PAGE **6**

REPORT NO **1339-3**

MODEL **319A**

III. RESULTS - TABLES OF REDUCED AND CORRECTED DATA

(All data corrected to Standard Sea Level, Zero Wind Conditions)
Distances in Feet

18 February 1954 Observed Data (not photographed) W = 2250 lbs.

Take-off No.	Configuration	Remarks	Ground Run	Air Distance	Total Distance
5	$\delta F = 30^\circ, \delta A = 15^\circ$ BLC-on	Firm turf	207	257	464

Landing

No.	Configuration	Remarks	Ground Run	Air Distance	Total Distance
7	$\delta F = 45^\circ, \delta A = 30^\circ$ BLC-on	Firm turf	192	401	593

4 March 1954 Observed Data (not photographed) W = 2250

Take-off No.	Configuration	Remarks	Ground Run	Air Distance	Total Distance
1	$\delta F = 30^\circ, \delta A = 15^\circ$	Firm turf	350	269	619
2	BLC-on		275	282	557
3			222	335	557
4			233	344	577
5			265	331	596
6			291	315	606
7			254	271	525 *
8			265	358	623
9			214	296	510 *
10			232	257	489 *
11			252	314	566
* Average of best 3 (No. 7, 9, 10)			233	282	495

Landing

No.	Configuration	Remarks	Ground Run	Air Distance	Total Distance
11	$\delta F = 55^\circ, \delta A = 30^\circ$	Firm turf	203	417	620 *
12	BLC-on		268	354	622 *
13			231	385	616 *
14			249	418	667
* Average of best 3 (No. 11, 12, 13)			234	385	619

CONFIDENTIAL

CONFIDENTIAL

TITLE Take-offs and Landings

PAGE 7

PREPARED BY WMC DATE 4-1-55

CESSNA AIRCRAFT CO.
WICHITA KANSAS

REPORT NO 1339-3

CHECKED BY JWF DATE 4-1-55

MODEL 319A

4 June 1954		CAA Camera Data	W = 2250 lbs.		
Take-off			Ground	Air	Total
No.	Configuration	Remarks	Run	Distance	Distance
1	$\delta_F=30^\circ, \delta_A=15^\circ$ BLC-on	Concrete	254	287	541
2			215	310	525 *
3			237	303	540
4			195	318	513 *
5			211	387	598
6			166	360	526 *
* Average of best 3 (No. 2, 4, 6)			192	330	522
7	$\delta_F=20^\circ, \delta_A=10^\circ$ BLC-on	Concrete	201	356	557 *
8			187	393	580
9			181	400	581
10			188	390	578 *
11			228	299	527 *
* Average of best 3 (No. 7, 10, 11)			206	348	554

Landing					
No.					
1	$\delta_F=55^\circ, \delta_A=30^\circ$ BLC-on	Concrete	346	329	675
2			286	317	603
3			295	387	682
4			236	452	688
5			249	348	597 *
6			241	402	653
7			306	361	667
8			196	438	634
9			234	354	588 *
10			310	370	680
11			283	296	579 *
* Average of best 3 (No. 5, 9, 11)			255	333	588

CONFIDENTIAL

CONFIDENTIAL

TITLE Take-offs and Landings

PAGE 8

PREPARED BY WMG DATE 4-1-55

CESSNA AIRCRAFT CO.

REPORT NO 1339-3

CHECKED BY JWF DATE 4-1-55

WICHITA, KANSAS

MODEL 319A

FORM 484

16 June 1954

CAA Camera Data

W = 2250 lbs.

Take-off			Ground	Air	Total
No.	Configuration	Remarks	Run	Distance	Distance
1	$\delta_F=30^\circ, \delta_A=15^\circ$	Firm turf	289	440	729
2	BLC-off		305	373	678
3			280	399	679
4			380	305	685
5			327	319	646 *
6			390	229	619 *
7			338	289	627 *
* Average of best 3 (No. 5, 6, 7)			355	276	631
8	$\delta_F=0^\circ, \delta_A=0^\circ$	Firm turf	466	416	882 *
9	BLC-off		569	360	929
10			562	328	890 *
11			416	397	813 *
* Average of best 3 (No. 8, 10, 11)			483	379	862

Landing

No.					
1	$\delta_F=55^\circ, \delta_A=30^\circ$	Firm turf	392	644	1036
2	BLC-off		334	332	666 *
3			242	388	630 *
4			397	313	710
5			326	262	588 *
6			230	514	744
7			388	337	725
* Average of best 3 (No. 2, 3, 5)			301	327	628
8	$\delta_F=0^\circ, \delta_A=0^\circ$	Firm turf	799	366	1165 *
9	BLC-off		734	396	1130 *
10			1110	552	1662
* Average of best 2 (No. 8, 9)			767	381	1148

CONFIDENTIAL

CONFIDENTIAL

TITLE **Take-offs and Landings**

PREPARED BY **WMG** DATE **4-1-55**

CHECKED BY **JWF** DATE **4-1-55**

CESSNA AIRCRAFT CO.

WICHITA, KANSAS

PAGE **9**

REPORT NO **1339-3**

MODEL **319A**

24 August 1954

Ditto Camera Photo Sequence

Take-off Performance:

(Concrete runway)

	BLC-on	BLC-off
Ground Run	190	297
Air Distance	260	303
Total	450	600

Landing Performance:

Ground Run	160	258
Air Distance	290	342
Total	450	600

NOTE: BLC-off data is L-19A data

SUMMARY TABLE - MEASURED TAKE-OFF AND LANDING DISTANCES

Take-off								
Date	BLC ON			BLC OFF			Remarks	
	s _g	s _a	s _t	s _g	s _a	s _t	δ _F - δ _A	
2-18	207	257	464	--	---	---	30 - 15	50 ft. barrier by observation
3-4	233	262	495	388	274	662	" "	50 ft. barrier by observation
6-4	190	331	521	--	--	--	" "	CAA Camera Hydraulic pressure 3200 psi
6-16	--	--	--	355	276	631	" "	" " " " " "
8-24	190	260	450	297	303	600	" "	Photo sequence
Landing								
2-18	192	401	593	---	---	---	45 - 30	Prop low pitch 7 1/2°
3-4	234	385	619	330	379	709	55 - 30	Prop low pitch 4°
6-4	255	333	588	--	---	---	" "	Prop low pitch 4°
6-16	---	---	---	301	327	628	" "	" " " "
8-24	160	290	450	258	342	600	" "	Prop low pitch 2 1/2° Reverse sense propeller

NOTE: On 3-4 and 8-24, BLC-off data is taken from L-19A data.
On 8-24, 319A W=2300 lbs., L-19A W = 2100 lbs; all other cases,
W = 2250

CONFIDENTIAL

TITLE **Take-offs and Landings**
PREPARED BY **WMG** DATE **4-1-55**
CHECKED BY **JWF** DATE **4-1-55**

CONFIDENTIAL

CESSNA AIRCRAFT CO.
WICHITA, KANSAS

PAGE **10**
REPORT NO **1339-3**
MODEL **319A**

IV. DISCUSSION

General

Take-off and landing performance of Model 319A was measured on five different occasions as shown in the preceding tables of results. The first case (18 February 1954) gives values of only the best take-off and landing in a short series. All the other cases give the averages of the best three measurements made, except in the case of BLC-off landing, $\delta F=0$, $\delta A=0$, where the best two of three measurements were used.

More exact distances were obtained in the second test series (4 March 1954). At that time the desired take-off distance improvement was achieved; however, obstacle landing performance improvement was somewhat less than expected.

The third and fourth series of tests (4 June 1954 and 16 June 1954) were photographed by means of the CAA flight path recording camera, and consisted of BLC on and off take-off and landing performance data. These tests did not produce the desired improvements in distance. This situation was subsequently corrected by improved piloting technique and changes made to the aircraft. These changes resulted in the final distance improvements as shown by the tests of 24 August 1954.

On that date a standard L-19A was flown side-by-side with the Model 319A. Flights were made with a 200 lb. difference of gross weight in favor of the L-19A. This exceeded the estimated weight of a production BLC system

CONFIDENTIAL

CONFIDENTIAL

TITLE Take-offs and Landings

PREPARED BY WMG DATE 4-1-55

CHECKED BY JWF DATE 4-1-55

CESSNA AIRCRAFT CO.
WICHITA, KANSAS

PAGE 11

REPORT NO 1339-3

MODEL 319A

by 50 lbs. Even with this weight penalty, ground roll for both take-off and landing was reduced by over 35% and total distance by 25%.

During the program, an endeavor was made to obtain superior barrier performance by shortening air distance rather than continuing to shorten ground run by technique and by an investigation of the many flap-aileron deflection combinations available. Further gains could doubtless have been achieved; however, funds were depleted before the program of shortening ground run was completed.

The better performance obtained in the latter portion of the testing program was the result of several factors. Important among these was improved piloting technique. Also strongly influencing the results were the following changes made to the aircraft.

- (1) Hydraulic pressure, which had been raised to 3200 psi in the hope of increasing $C_{L_{max}}$, was lessened to 3000 psi. This in turn lessened the power drain on the main engine, allowing greater propeller thrust to develop. Angle of climb and acceleration were thereby increased, and distance to a 50 ft. obstacle was decreased.
- (2) Stall strips, which had been quite large, were made smaller, after a systematic series of tests showed smaller strips to be equally as effective as the larger ones in controlling stalling

CONFIDENTIAL

CONFIDENTIAL

TITLE **Take-offs and Landings**

PREPARED BY **WMG** DATE **4-1-55**

CHECKED BY **JWF** DATE **4-1-55**

CESSNA AIRCRAFT CO.
WICHITA KANSAS

PAGE **12**

REPORT NO **1339-3**

MODEL **319A**

motions. This change prevented so much of the wing from being blanketed, thus improving lifting power of the wing. See Reference 7 for a detailed explanation of the stall strip tests and installation.

- (3) Landing air distance was improved by changing the propeller low pitch setting from 4° to $2\ 1/2^{\circ}$, and by use of a "reverse sense" propeller which insured that the propeller blades would remain on the low pitch setting during landing runs at the 1400 rpm engine speed required for a BLC landing. This constant lower pitch setting increased drag, and thereby shortened landing air distance.

During the flight test program, erratic sawtooth glide data was found to be caused by the idling propeller (See Reference 8). The propeller installed at that time was forced onto the low pitch stop by governor oil pressure, and pitch was increased at high engine speeds by the propeller counterweights. The trouble was eliminated by use of a "reverse sense" propeller, which, without counterweights, tended to ride on the low pitch stop, and which depended on governor oil pressure for higher pitch settings. (References 5 and 9). Use of this propeller improved sawtooth glide data as well as shortening landing air distances.

CONFIDENTIAL

CONFIDENTIAL

TITLE **Take-offs and Landings**
PREPARED BY **WMG** DATE **4-1-55**
CHECKED BY **JWF** DATE **4-1-55**

CESSNA AIRCRAFT CO.
WICHITA KANSAS

PAGE **13**
REPORT NO **1339-3**
MODEL **319A**

Importance of Technique

During this testing program, the importance of piloting technique became increasingly apparent, particularly in the case of landing.

Previously, the pilot experienced difficulty in controlling a floating tendency prior to touch down. This was also experienced in earlier tests of BLC research aircraft at Cessna (Reference 2). If approach speeds were allowed to get too high, the reduction in speed during transition caused a rather sudden increase in C_Q and of the lifting effectiveness of the wing, thus causing floating. If speed was too low, a proper flare could not be executed. The range of allowable airspeed variation for optimum performance for the 319A was approximately ± 2 mph, which was difficult to maintain in gusty air. The piloting technique which produced the best results consisted of making the approach at a somewhat higher speed and closing the throttle after the airplane had slowed down at the end of the flare. Closing the throttle reduced the power input to the BLC system, and, as wing lift diminished, the airplane settled onto the ground instead of floating. Maximum braking was then applied, making possible a very short ground roll.

Take-off technique which was used consisted of raising the tail wheel off the ground as soon as possible in order to reduce drag, allowing the aircraft to become airborne as soon as possible, then accelerating just

CONFIDENTIAL

CONFIDENTIAL

TITLE **Take-offs and Landings**

PREPARED BY **WMG** DATE **4-1-55**

CHECKED BY **JWF** DATE **4-1-55**

CESSNA AIRCRAFT CO.
WICHITA, KANSAS

PAGE **14**

REPORT NO **1339-3**

MODEL **319A**

above the ground to 1.1 x stall speed before pulling up into transition and climb-out, and maintaining that speed throughout the climb-out over the 50 ft. obstacle.

It was noted during the tests, and later analysis of the data substantiated the fact, that in a number of instances, the airplane actually left the ground at a speed below previously determined stall speeds. This apparent discrepancy was thought to have been caused either by dynamic maneuvering, or some unaccountable influence of the ground proximity, or both. This phenomenon appeared to be fertile ground for possible future investigation.

Optimum Flap Deflections

On the basis of wind tunnel data (Reference 3), and limited flight testing, take-off flap and aileron deflections were determined to be $\delta_F = 30^\circ$, $\delta_A = 15^\circ$. Landing flap and aileron deflections were intended to be $\delta_F = 60^\circ$, $\delta_A = 45^\circ$. However, poor lateral control characteristics with BLC on prevented use of full aileron droop for landing. Thus, the maximum aileron deflection used was $\delta_A = 30^\circ$.

Observation of the tufted airplane helped explain lack of lateral control. In a rolling maneuver the down aileron separated while flow on the up aileron remained smooth. This indicated loss of lift on the up going wing, causing poor lateral control. Subsequent widening of the blowing slot from 0.4% to 0.6% increased flow quantities and resulted in improved response to lateral control motion. Had a further increase in flow quantity been possible, lateral

CONFIDENTIAL

CONFIDENTIAL

TITLE **Take-offs and Landings**

PREPARED BY **WMG** DATE **4-1-55**

CHECKED BY **JWF** DATE **4-1-55**

CESSNA AIRCRAFT CO.
WICHITA KANSAS

PAGE **15**

REPORT NO **1339-3**

MODEL **319A**

control probably would have improved enough that full aileron droop could have been used to shorten further the landing distances.

It should be noted that it is not certain that the $\delta_F = 30^\circ$, $\delta_A = 15^\circ$ was the optimum for take-off performance. It was felt that further gains in performance may have been possible by exploring other combinations. However, limited funds prevented a comprehensive investigation of this subject. For this reason, further testing to yield optimum deflection would seem to be in order.

Insufficient Elevator Power

At forward center of gravity locations (20% MAC) the pilot was unable to trim the airplane at low speeds with BLC on and was unable to achieve a 3-point attitude for landing with engine power off. For this reason, ballast had to be placed in the airplane, thus moving the center of gravity aft to a degree sufficient to allow 3-point landings.

This same phenomenon also was experienced in previous tests with BLC research aircraft at Cessna (See Reference 4).

This difficulty indicates that BLC airplanes need considerably greater elevator power than conventional ones. The logical way to achieve greater elevator power would be to increase the tail volume coefficient. However, if this proved impractical due to the size of tail which would be required, then boundary layer control applied to the tail surfaces would produce the necessary improvement in power. Reference 6 contains details of a method

CONFIDENTIAL

CONFIDENTIAL

TITLE **Take-offs and Landings**

PAGE **16**

PREPARED BY **WMG** DATE **4-1-55**

CESSNA AIRCRAFT CO.
WICHITA KANSAS

REPORT NO **1339-3**

CHECKED BY **JWF** DATE **4-1-55**

MODEL **319A**

of application of BLC to tail surfaces.

Hard Landing

During the tests of 16 June 1954, on the fourth barrier landing with clean configuration and BLC system off, the airplane made an abnormally hard landing with resultant damage to propeller, main landing gear spring, and tail gear spring. Damage was caused by gusty weather conditions. Early in the day, testing was begun under almost zero wind conditions, but as the testing progressed, surface wind increased and became gusty. Since weather conditions for several months had been adverse, testing was continued even though conditions were marginal. The approach for the fourth landing was normal until part way through the landing flare, when a gust dropped the airspeed approximately 5 mph. The airplane mushed into the ground, still in a nose low attitude, before power was developed, even though it had been applied. The main gear spread out on impact with the brake drums dragging. The nose low attitude was thus aggravated, nearly causing the airplane to nose over. (See Reference 5)

It appeared as a result of this minor accident, that performance of barrier landings in gusty conditions is extremely critical at speeds just above stall without the BLC system. This illustrates the fact that an aircraft with BLC can approach and land with airspeeds at a greater margin over stall speed, for safety in gusty conditions, and still retain excellent short field landing characteristics.

CONFIDENTIAL

CONFIDENTIAL

TITLE **Take-offs and Landings**
PREPARED BY **WMG** DATE **4-1-55**
CHECKED BY **JWF** DATE **4-1-55**

CESSNA AIRCRAFT CO.
WICHITA, KANSAS

PAGE **17**
REPORT NO **1339-3**
MODEL **319A**

V. CONCLUSIONS AND RECOMMENDATIONS

Analysis of the results of the Model 319A take-off and landing performance test program led to the following conclusions:

1. The use of Boundary Layer Control resulted in an improvement of 25% in overall take-off and landing distance over a 50 ft. obstacle. Improvement in ground run was 36% on take-off and 38% on landing.
2. Piloting technique is of the utmost importance in obtaining maximum take-off and landing performance over an obstacle. This factor is extremely important in obtaining optimum landing performance.
3. Optimum flap deflections for take-off performance were not determined due to limited funds available for the program. It is therefore recommended that a flight test program be conducted to determine optimum flap deflections.
4. Lack of sufficient elevator power at forward center of gravity locations with BLC on, engine power off, indicates that BLC aircraft need more elevator power than conventional ones. Application of boundary layer control to tail surfaces is recommended to achieve this greater power, in the event that increase in tail volume coefficient proves impracticable.

CONFIDENTIAL

CONFIDENTIAL

TITLE **Take-offs and Landings**

PAGE **18**

PREPARED BY **WMG** DATE **4-1-55**

CESSNA AIRCRAFT CO.
WICHITA KANSAS

REPORT NO **1339-3**

CHECKED BY **JWF** DATE **4-1-55**

MODEL **319A**

FORM 484

5. As a result of the minor accident which occurred during this testing program, it is concluded that performance of barrier landings in gusty conditions is hazardous without the BLC system operating.

CONFIDENTIAL

CONFIDENTIAL

TITLE Take-offs and Landings

PREPARED BY WMG DATE 4-1-55

CHECKED BY JWF DATE 4-1-55

CESSNA AIRCRAFT CO.
WICHITA, KANSAS

PAGE 19

REPORT NO 1339-3

MODEL 319A

VI. REFERENCES

1. Crawshaw, R. L. and Silady, M. F.: Flight Test Observed and Corrected Data Report: I - Aerodynamic Characteristics as Determined by Full Throttle Sawtooth Climbs, Model 319A, Engineering Report No. 1339-1, Cessna Aircraft Company, Wichita, Kansas, 24 March 1955. (CONFIDENTIAL)
2. Waring, H. F. and Razak, K.: Flight Test Performance Data Report, Model 309, Engineering Report No. 1309-3, Cessna Aircraft Company, Wichita, Kansas, 2 July 1952 (CONFIDENTIAL)
3. Razak, Kenneth; Razak, Virgil; Wagner, Friedrich; and Wallace, Richard E.: Experimental Development and Tests of a High-Lift Circulation-Control Wing, Aerodynamic Report No. 097, University of Wichita, Wichita, Kansas, May 1953. (CONFIDENTIAL)
4. Gertsen, W. M.: Flight Test Observed and Corrected Data Report: Take-off and Landing Performance of Model 309A with Battery Operated Axial Fans, Engineering Report No. 1309-9, Cessna Aircraft Company, Wichita, Kansas. 6 April 1954 (CONFIDENTIAL)
5. Fisher, Jack W.: Application of Circulation Control to an Airplane of Military Liaison Type, Interim Engineering Report 30 April through 30 June 1954, Cessna Aircraft Company, Wichita, Kansas, 6 July 1954. (CONFIDENTIAL)
6. Proposal for Investigation of Boundary Layer Control Applied to Tail Surfaces, Research Proposal No. RP-17A, Cessna Aircraft Company, October 1954 (CONFIDENTIAL)
7. Fisher, Jack W.: Flight Test Observed and Corrected Data Report: IV - Miscellaneous Flight Test and Wind Tunnel Data, Model 319A, Engineering Report No. 1339-4, Cessna Aircraft Company, Wichita, Kansas, 25 February 1955 (CONFIDENTIAL)
8. Smith, John L.: Flight Test Observed and Corrected Data Report: II - Aerodynamic Characteristics as Determined by Sawtooth Glides, Model 319A, Engineering Report No. 1339-2, Cessna Aircraft Company, Wichita, Kansas, April 1955 (CONFIDENTIAL)
9. Wise, W. D.: Design of Ducting, Hydraulic System Equipment and Instrumentation of Model 319A Boundary Layer Control Airplane, Engineering Report No. 1339-5, Cessna Aircraft Company, Wichita, Kansas, 1 April 1955 (CONFIDENTIAL)

CONFIDENTIAL

CONFIDENTIAL

TITLE **Take-offs and Landings**
PREPARED BY **WMG** DATE **4-1-55**
CHECKED BY **JWF** DATE **4-1-55**

CESSNA AIRCRAFT CO.
WICHITA KANSAS

PAGE **20**
REPORT NO **1339-3**
MODEL **319A**

FORM 482

VII. APPENDIX

CONFIDENTIAL

CONFIDENTIAL

TITLE **Take-offs and Landings**
PREPARED BY **WMG** DATE **4-1-55**
CHECKED BY **JWF** DATE **4-1-55**

CESSNA AIRCRAFT CO.
WICHITA KANSAS

PAGE **21**
REPORT NO **1339-3**
MODEL **319A**



Fig. 1

The above figure is a photograph of a typical take-off of Model 319A along with a standard L-19A. This photograph is a composite of a sequence of photographs, made with a Ditto 35 mm camera, taken from the beginning and throughout the take-off run. The two aircraft were side by side at the beginning of the run, and as the run progressed, the L-19A gained velocity faster, but required a considerably greater length of runway in order to break ground and to climb to 50 ft. In this sequence the L-19A weighed 2100 lbs., and the 319A weighed 2300 lbs.

CONFIDENTIAL

CONFIDENTIAL


PAGE 22

FIG. 2

MODEL 319A

TOTAL TAKE-OFF DISTANCE OVER 50 FT OBSTACLE
VS
GROSS WEIGHT

CORRECTED TO ZERO WIND
STANDARD SEA LEVEL

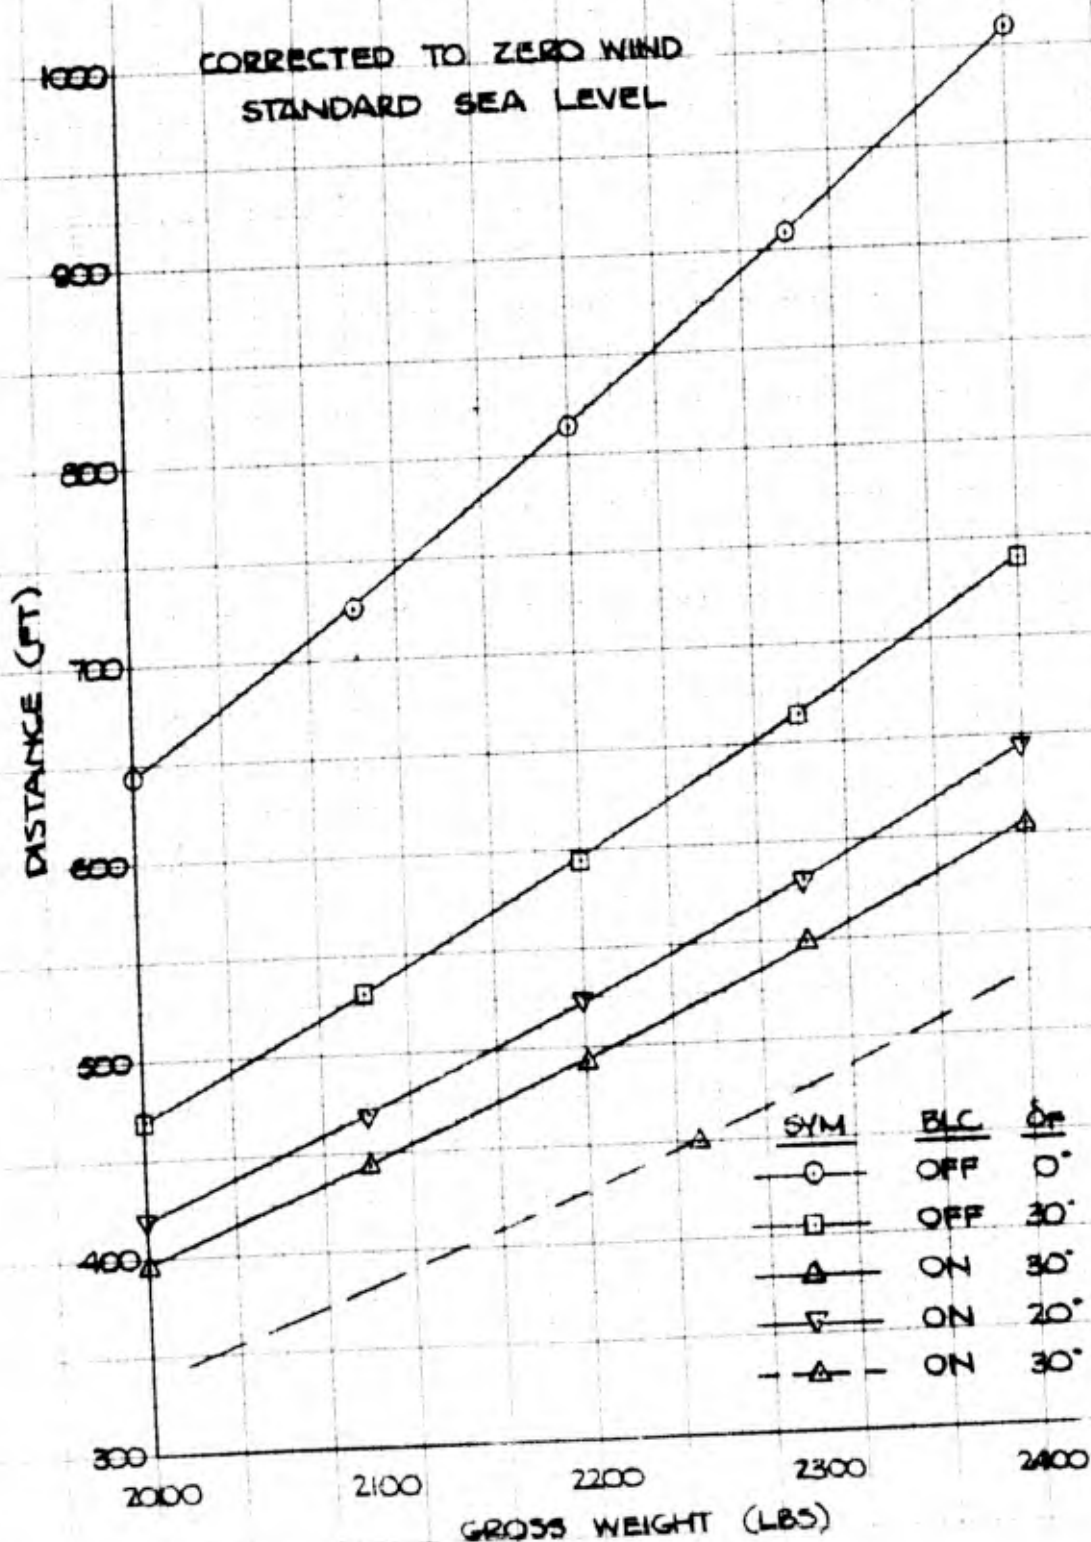

SYM	BLC	Δ _W	Δ _θ	DATE
○	OFF	0°	0°	6-16-54
□	OFF	30°	15°	6-16-54
△	ON	30°	15°	6-4-54
▽	ON	20°	10°	6-4-54
-△-	ON	30°	15°	8-24-54

CONFIDENTIAL

3-25-58
16


CONFIDENTIAL

MODEL 319A

PAGE 23

FIG. 3

TAKE-OFF GROUND RUN AND AIR DISTANCE
VS
GROSS WEIGHT

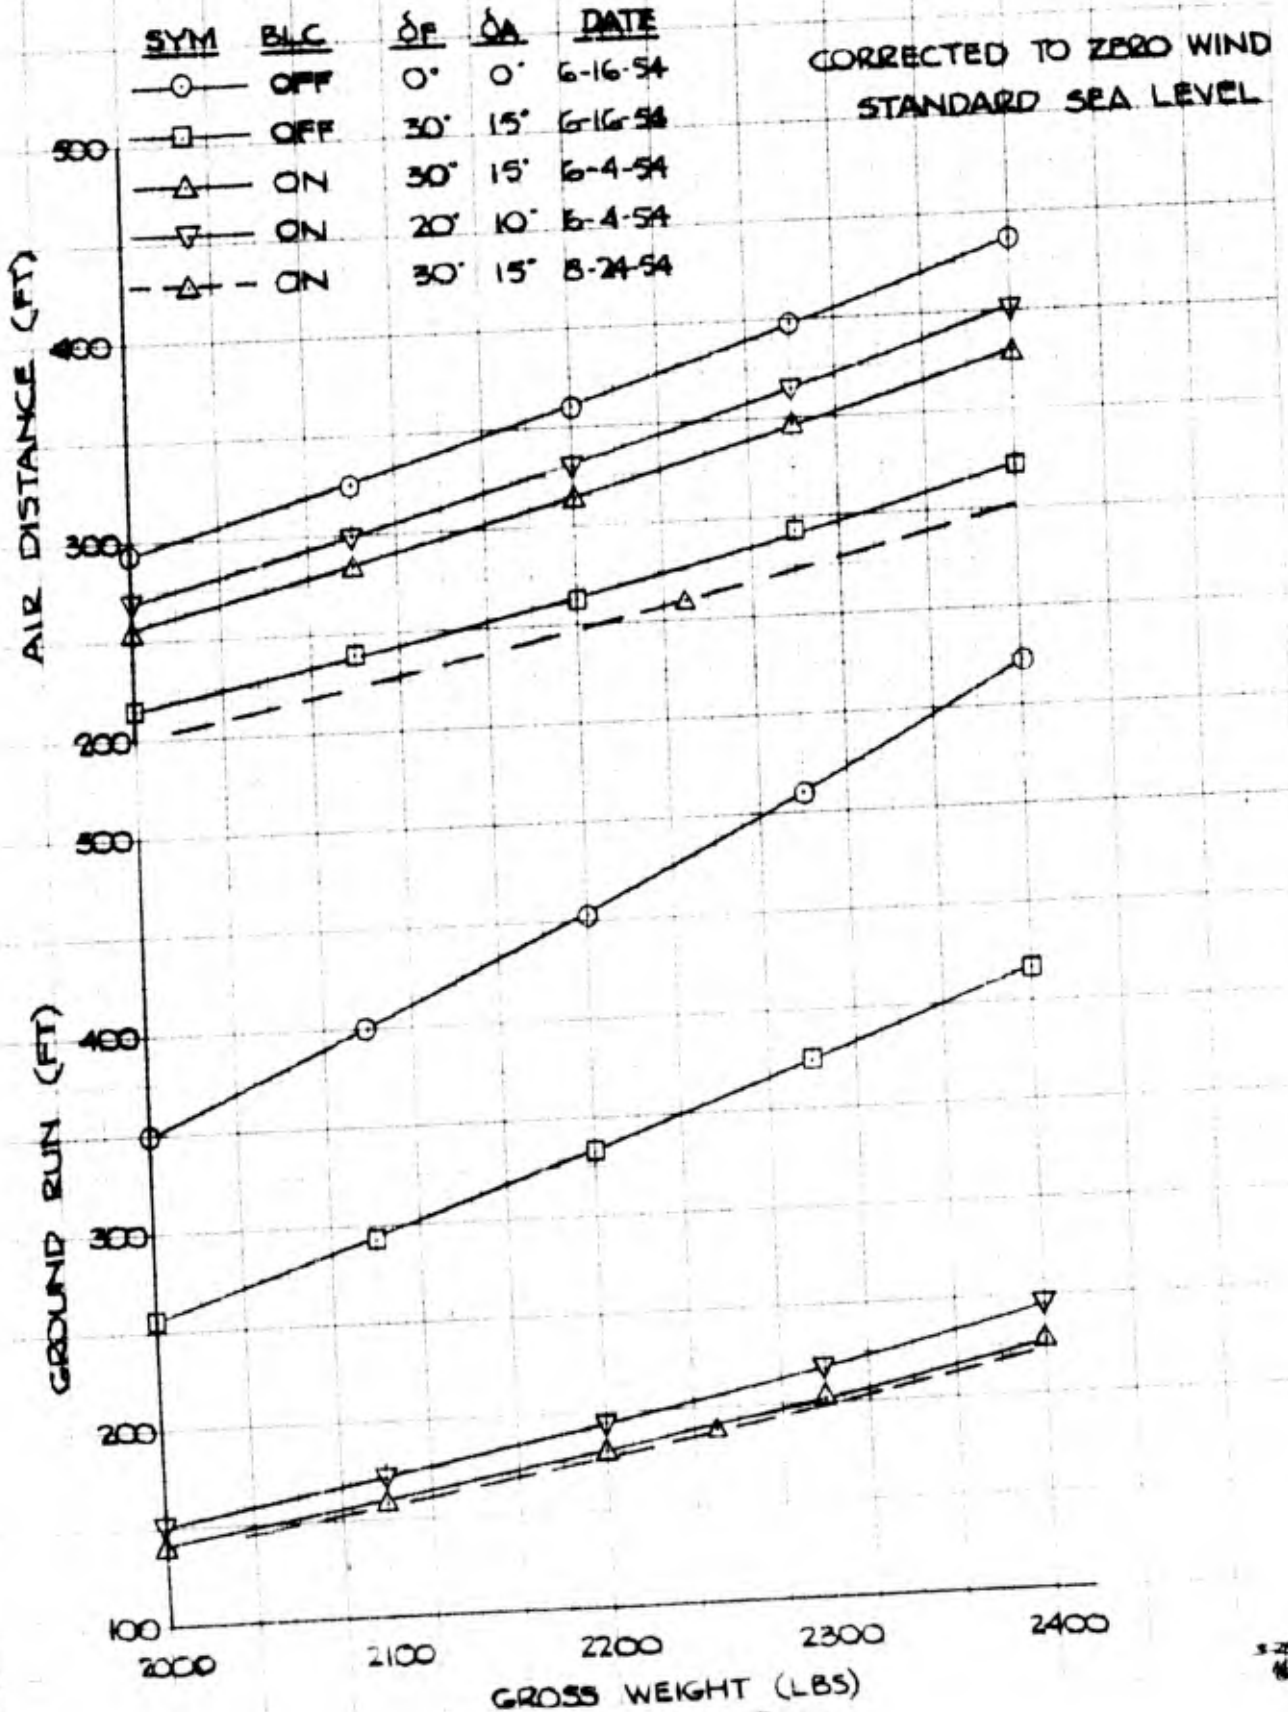

CONFIDENTIAL


CONFIDENTIAL

PAGE 24

FIG. 4

MODEL 319A

TOTAL LANDING DISTANCE OVER 50 FT OBSTACLE.
VS
GROSS WEIGHT

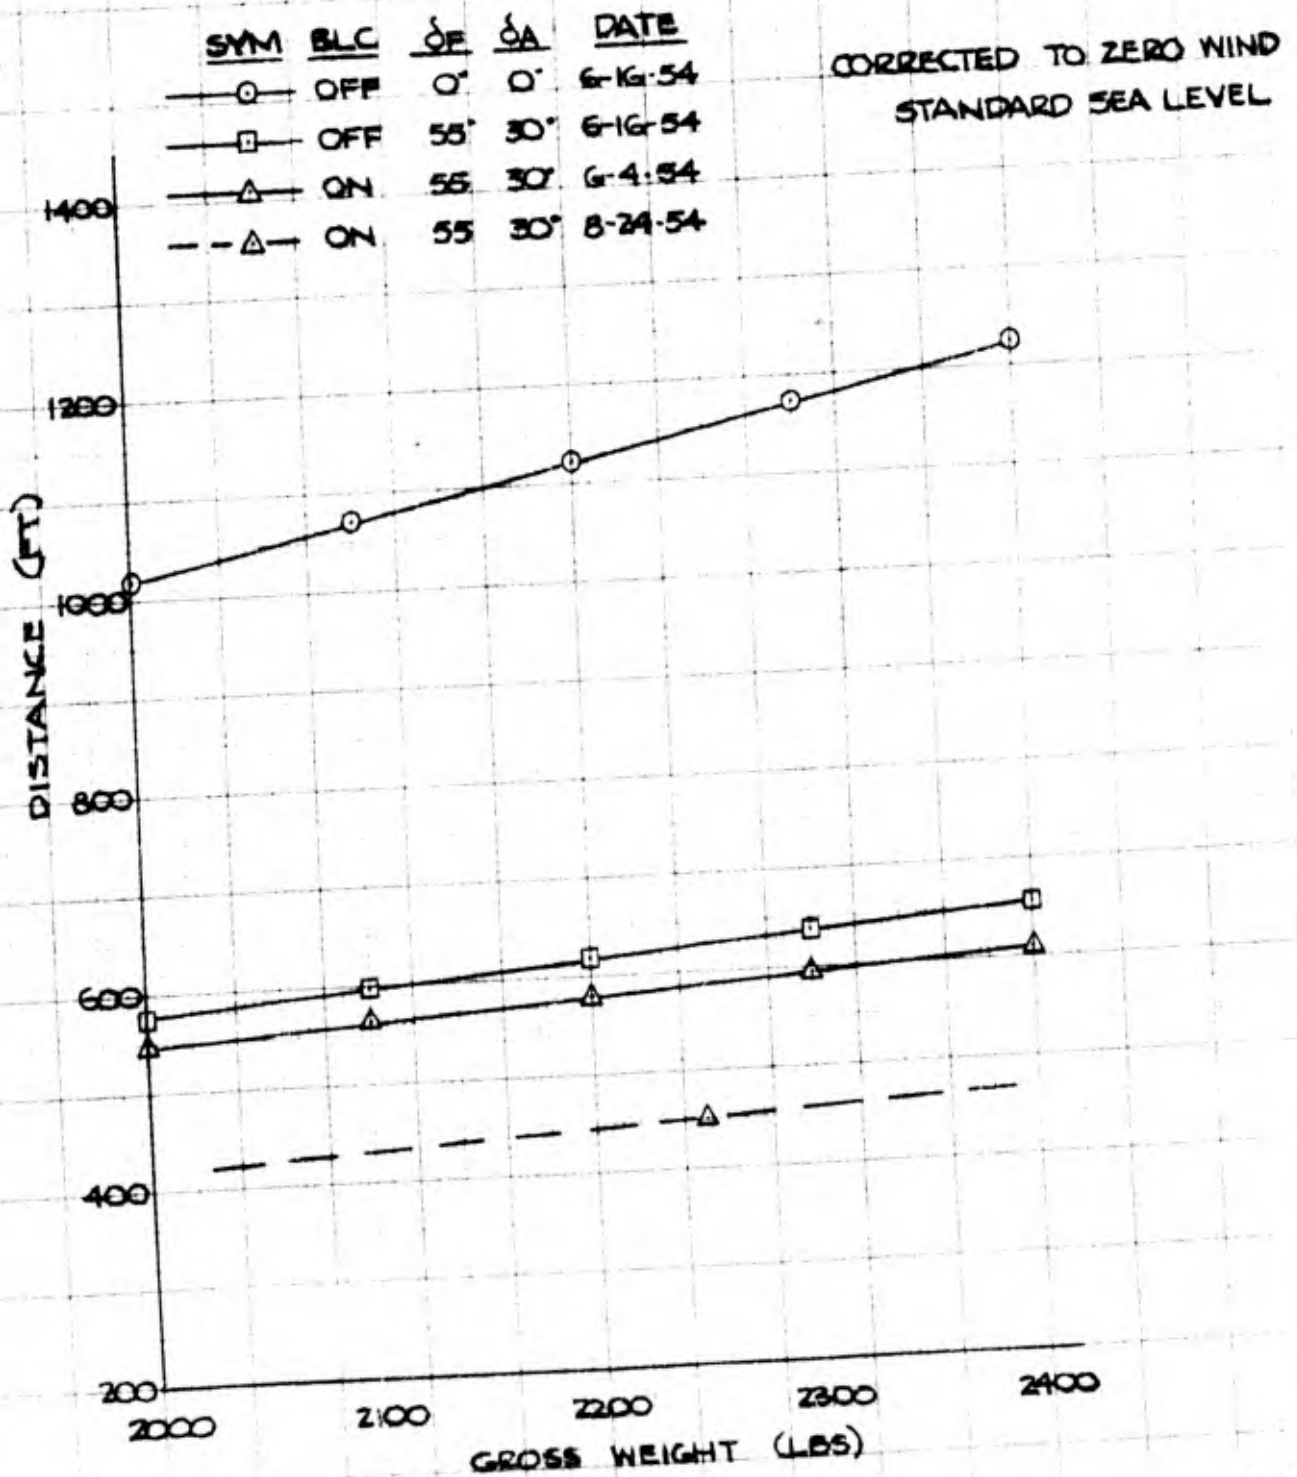

CONFIDENTIAL

3-24-55
4

CONFIDENTIAL


PAGE 25

FIG. 5

MODEL 319A

LANDING GROUND ROLL AND AIR DISTANCE
VS
GROSS WEIGHT

CORRECTED TO ZERO WIND
STANDARD SEA LEVEL

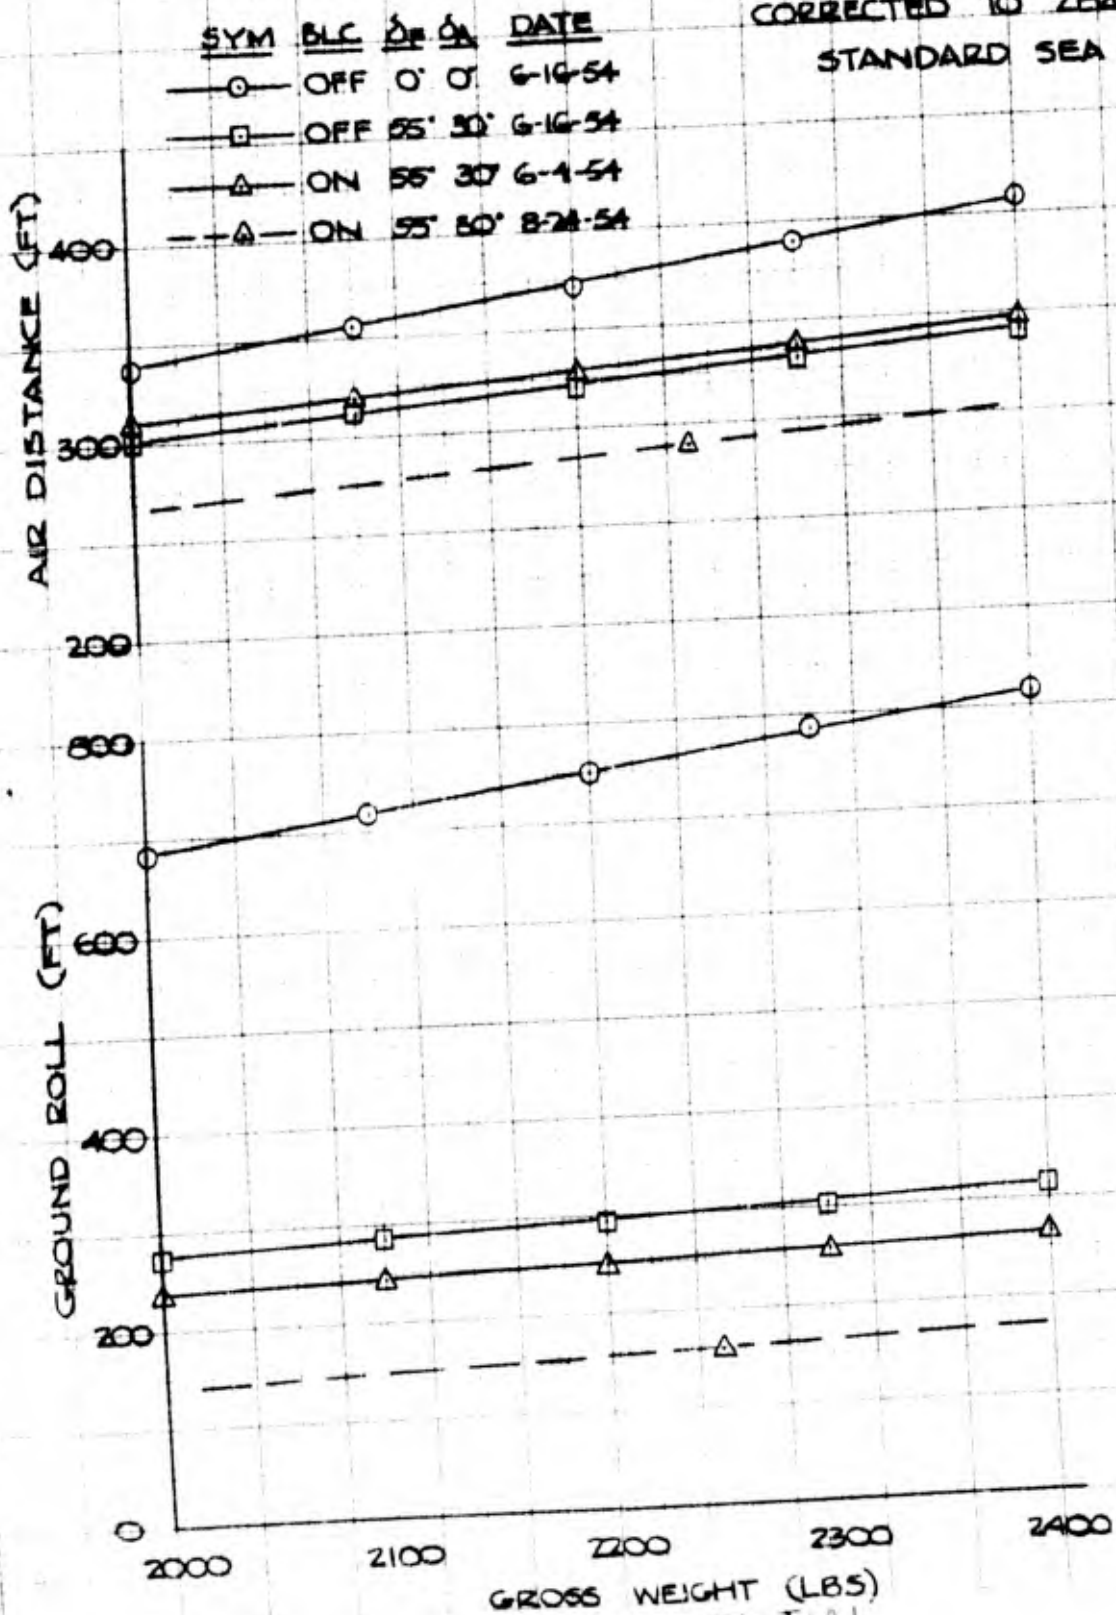

CONFIDENTIAL

3-24-56
16

CONFIDENTIAL

PAGE 26


FIG. 6

MODEL 319A

TOTAL TAKE-OFF DISTANCE OVER 50 FT OBSTACLE
VS
GROSS WEIGHT

SYM	BLC	DATE	FILM	RUNWAY	δ_F	δ_A
—○—	OFF	6-16-54	YES	TURF	30°	15°
—□—	ON	6-4-54	YES	CONCRETE	30°	15°
—△—	ON	3-4-54	NO	TURF	30°	15°
—▽—	ON	2-18-54	NO	TURF	30°	15°
—◇—	ON	8-24-54	YES	CONCRETE	30°	15°

CORRECTED TO ZERO WIND
STANDARD SEA LEVEL

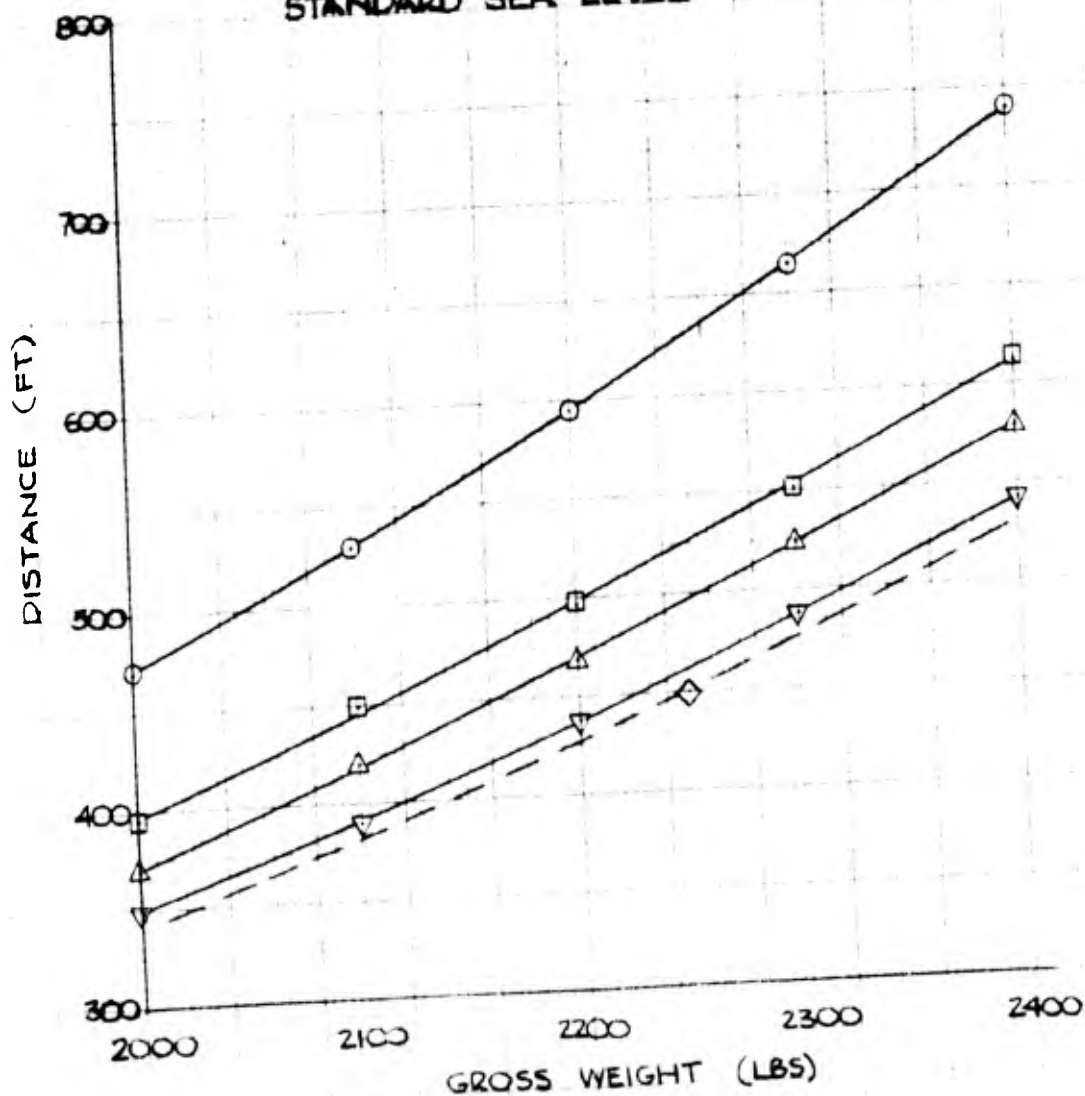

CONFIDENTIAL

3-24-55
1/2

CONFIDENTIAL


MODEL 319A

PAGE 27

FIG. 7

TOTAL LANDING DISTANCE OVER 50 FT OBSTACLE
VS
GROSS WEIGHT

SYM	BLC	DATE	FILM	RUNWAY	δ_e	δ_a
—○—	OFF	6-16-54	YES	TURF	55°	30°
—□—	ON	6-4-54	YES	CONCRETE	55°	30°
—△—	ON	3-4-54	NO	TURF	55°	30°
—▽—	ON	2-18-54	NO	TURF	45°	30°
—◇—	ON	8-24-54	YES	CONCRETE	55°	30°

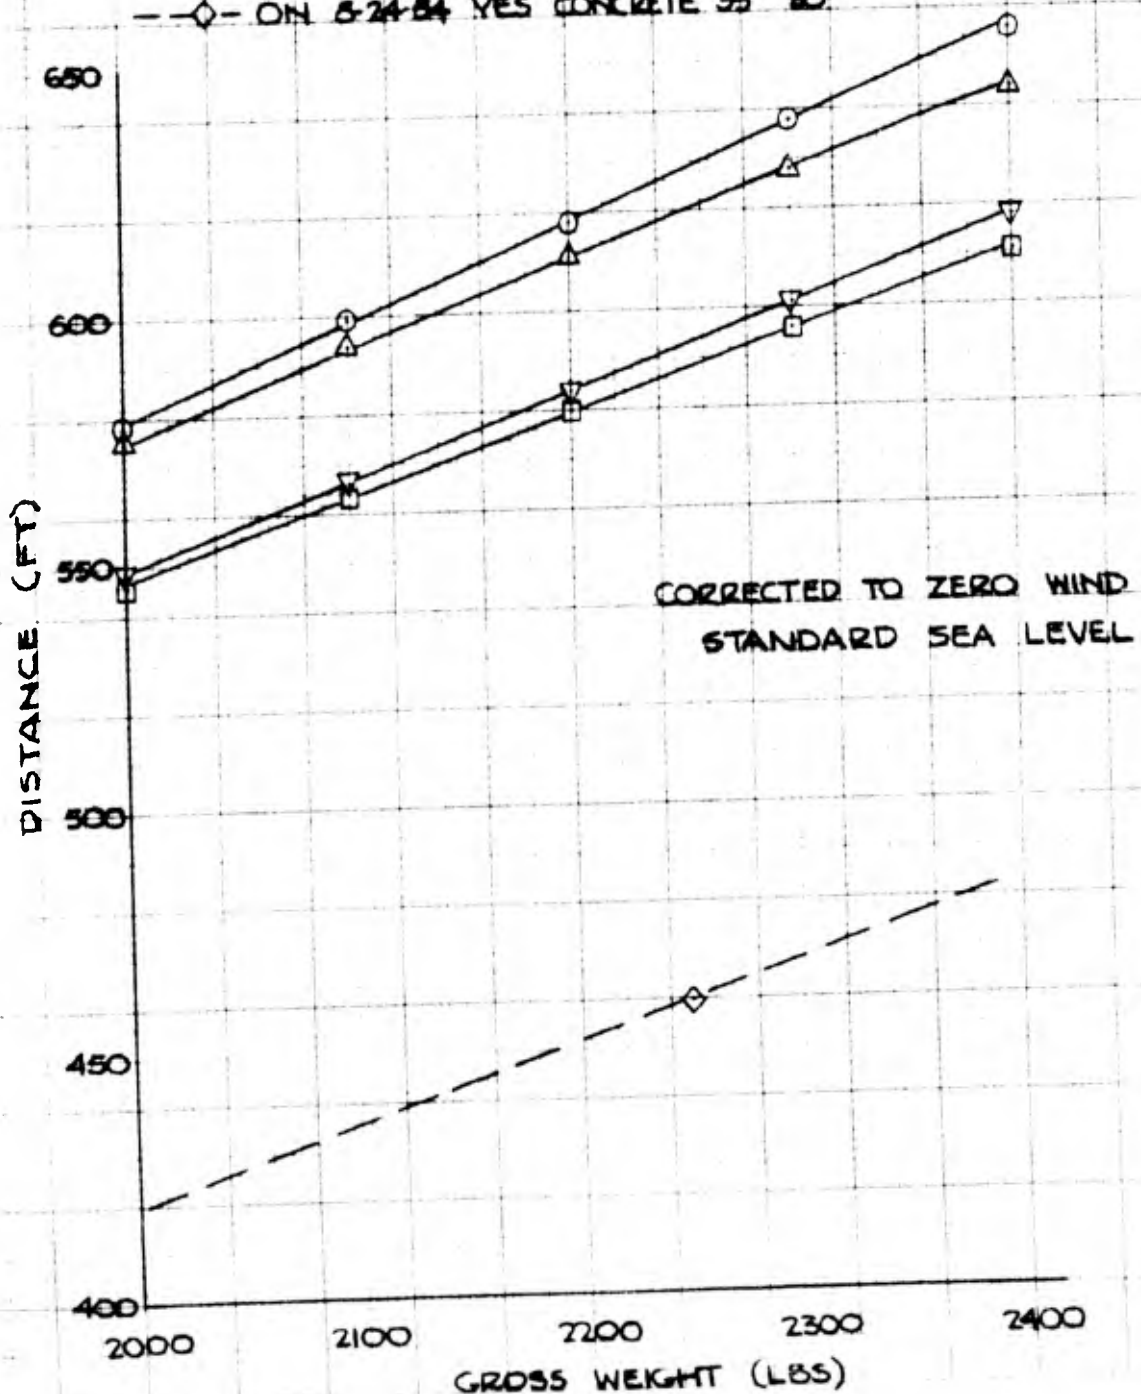



CONFIDENTIAL


3-24-58


MODEL 319A
TAKE-OFF NO. 1
BLC ON
 $\delta_F = 30^\circ$, $\delta_A = 15^\circ$


4 JUNE 1954
W = 2338 LBS
hp = 1150
OAT = $40^\circ F$
 $V_W = 70.4 \text{ MPH}$

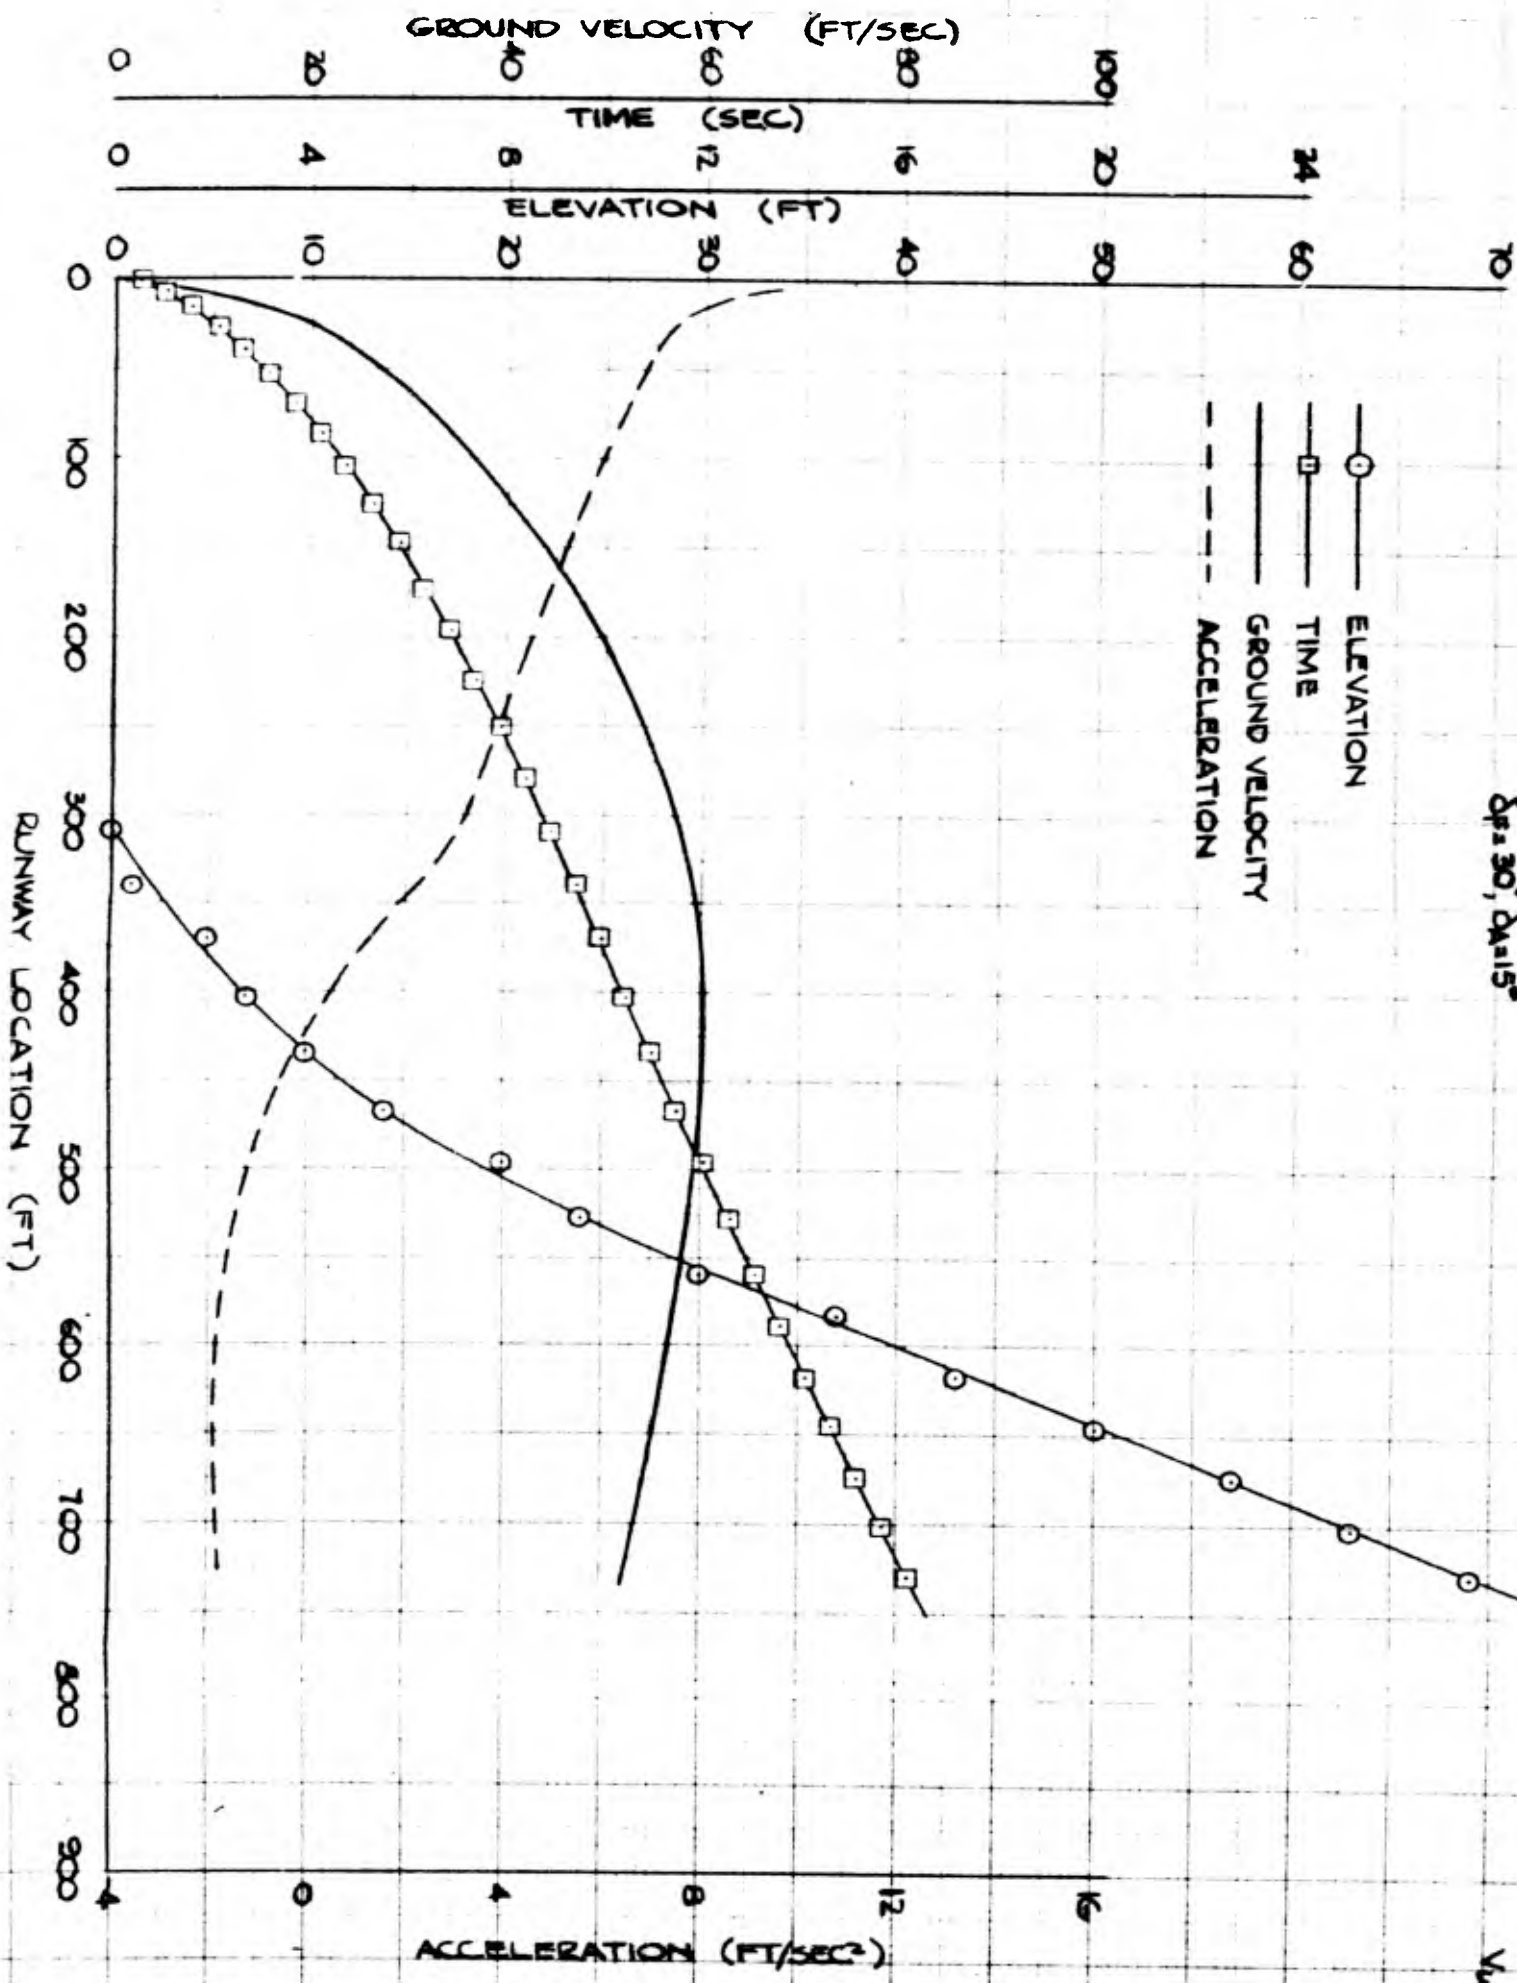

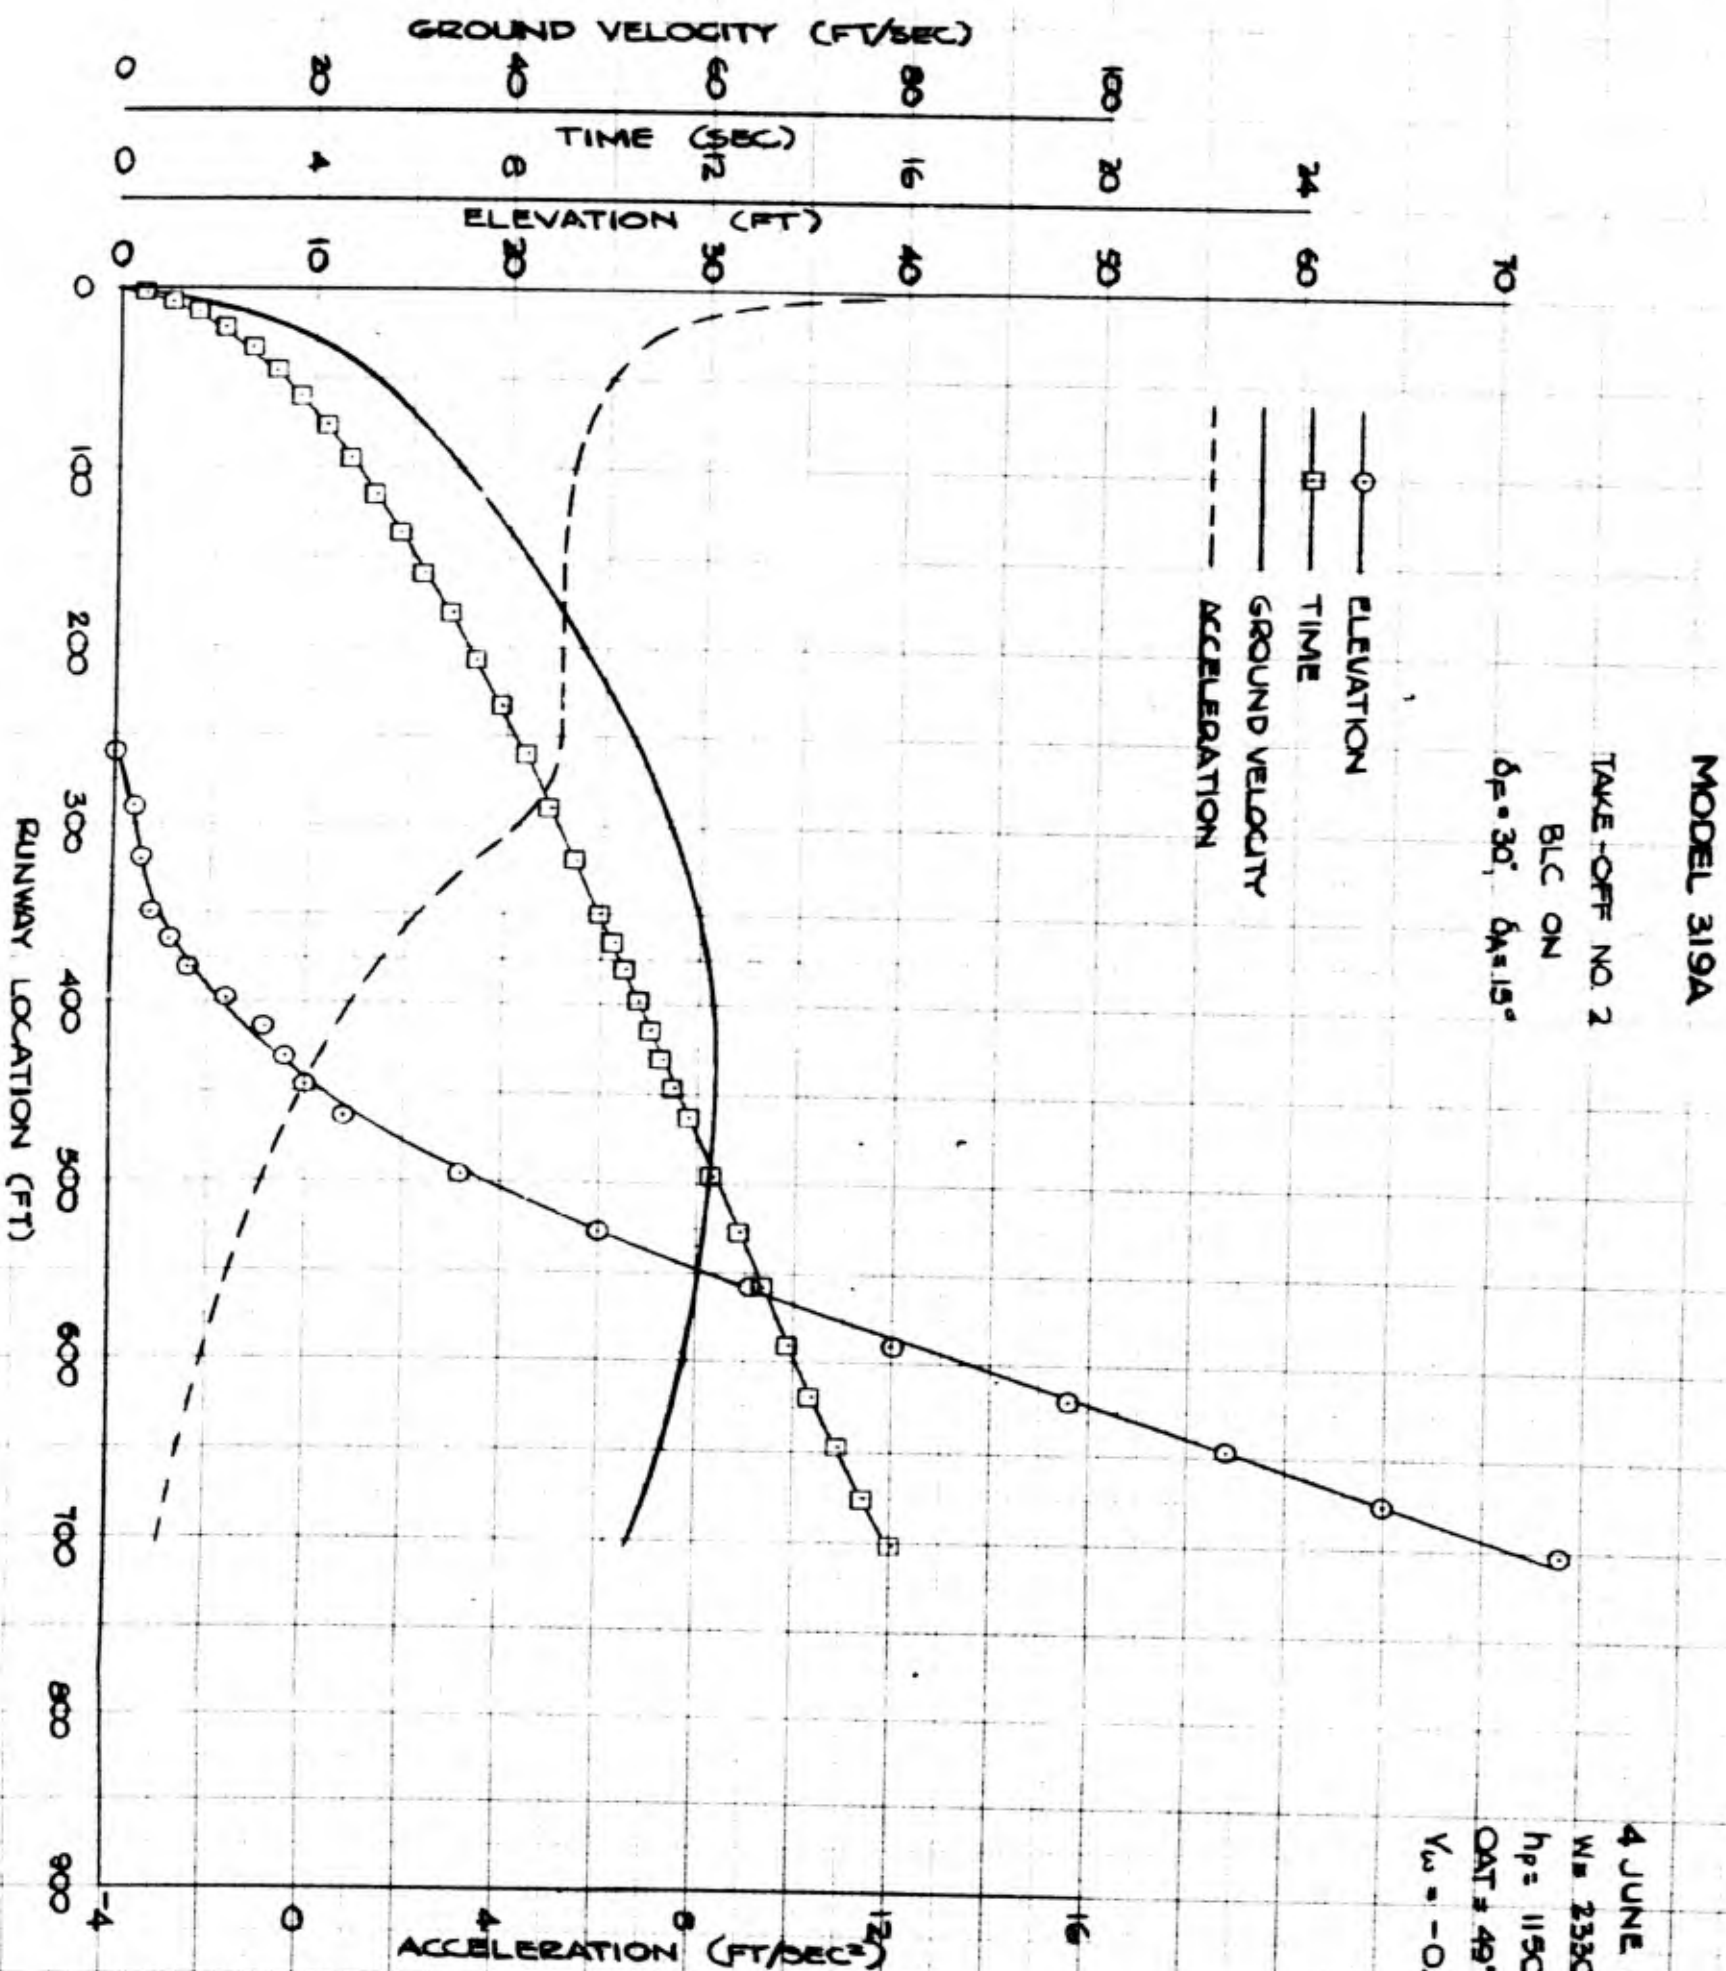

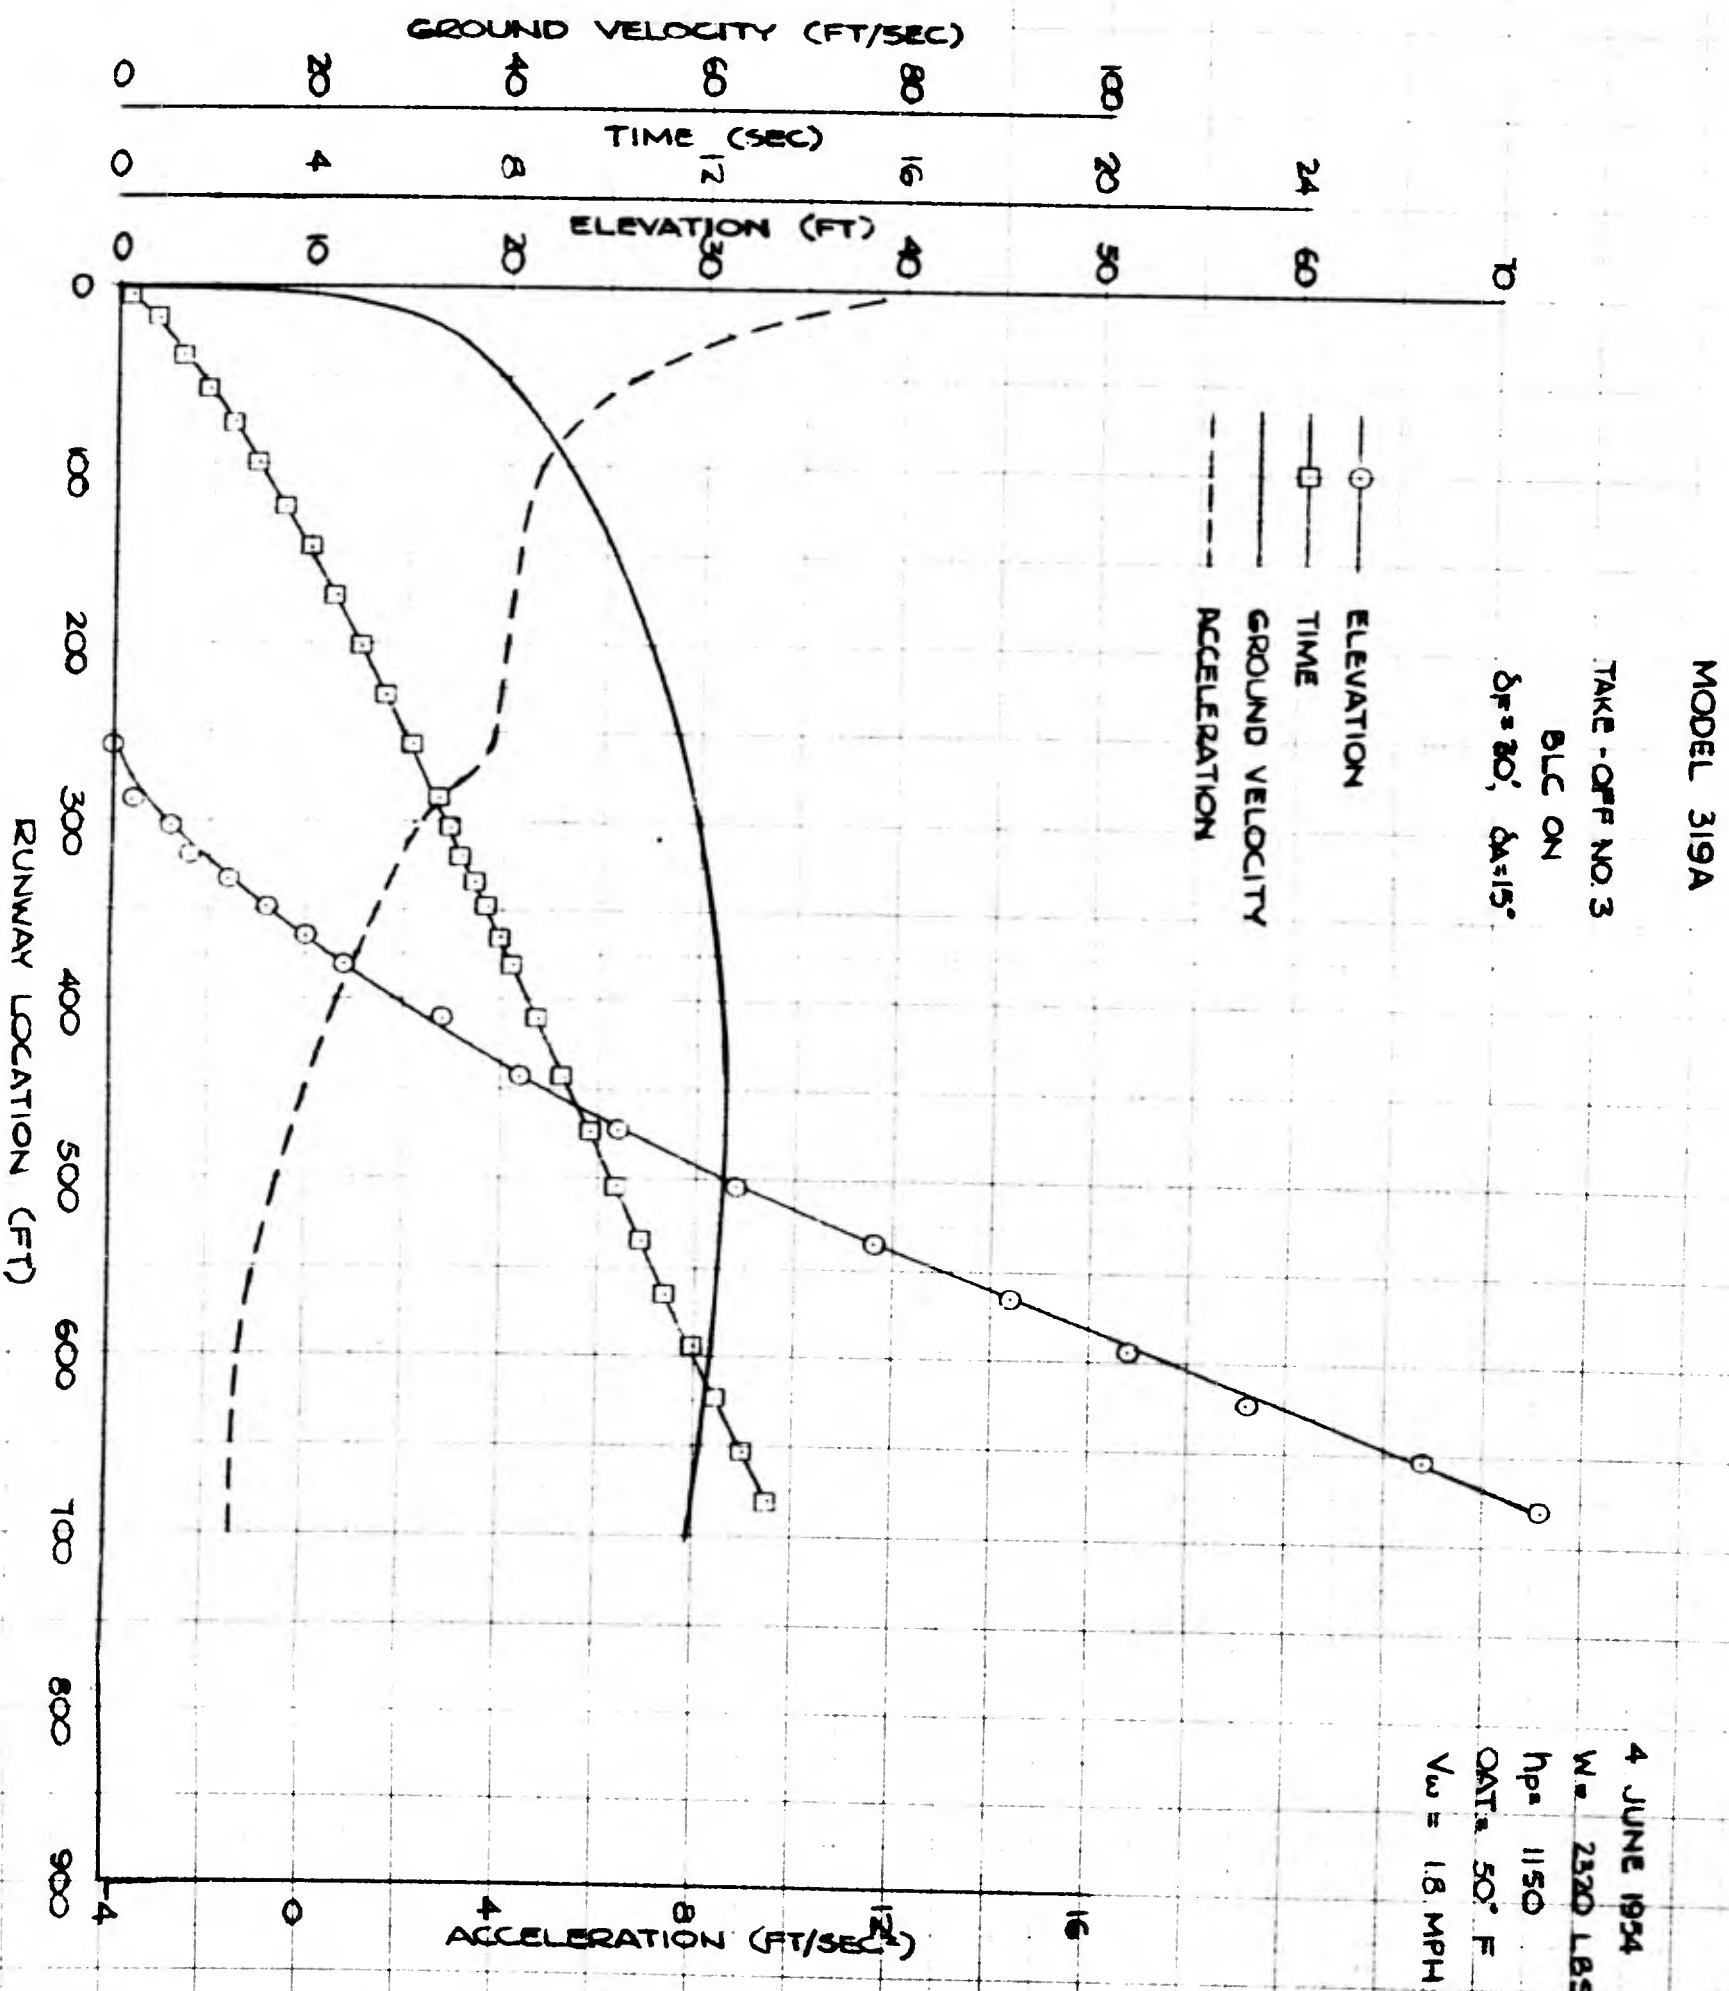


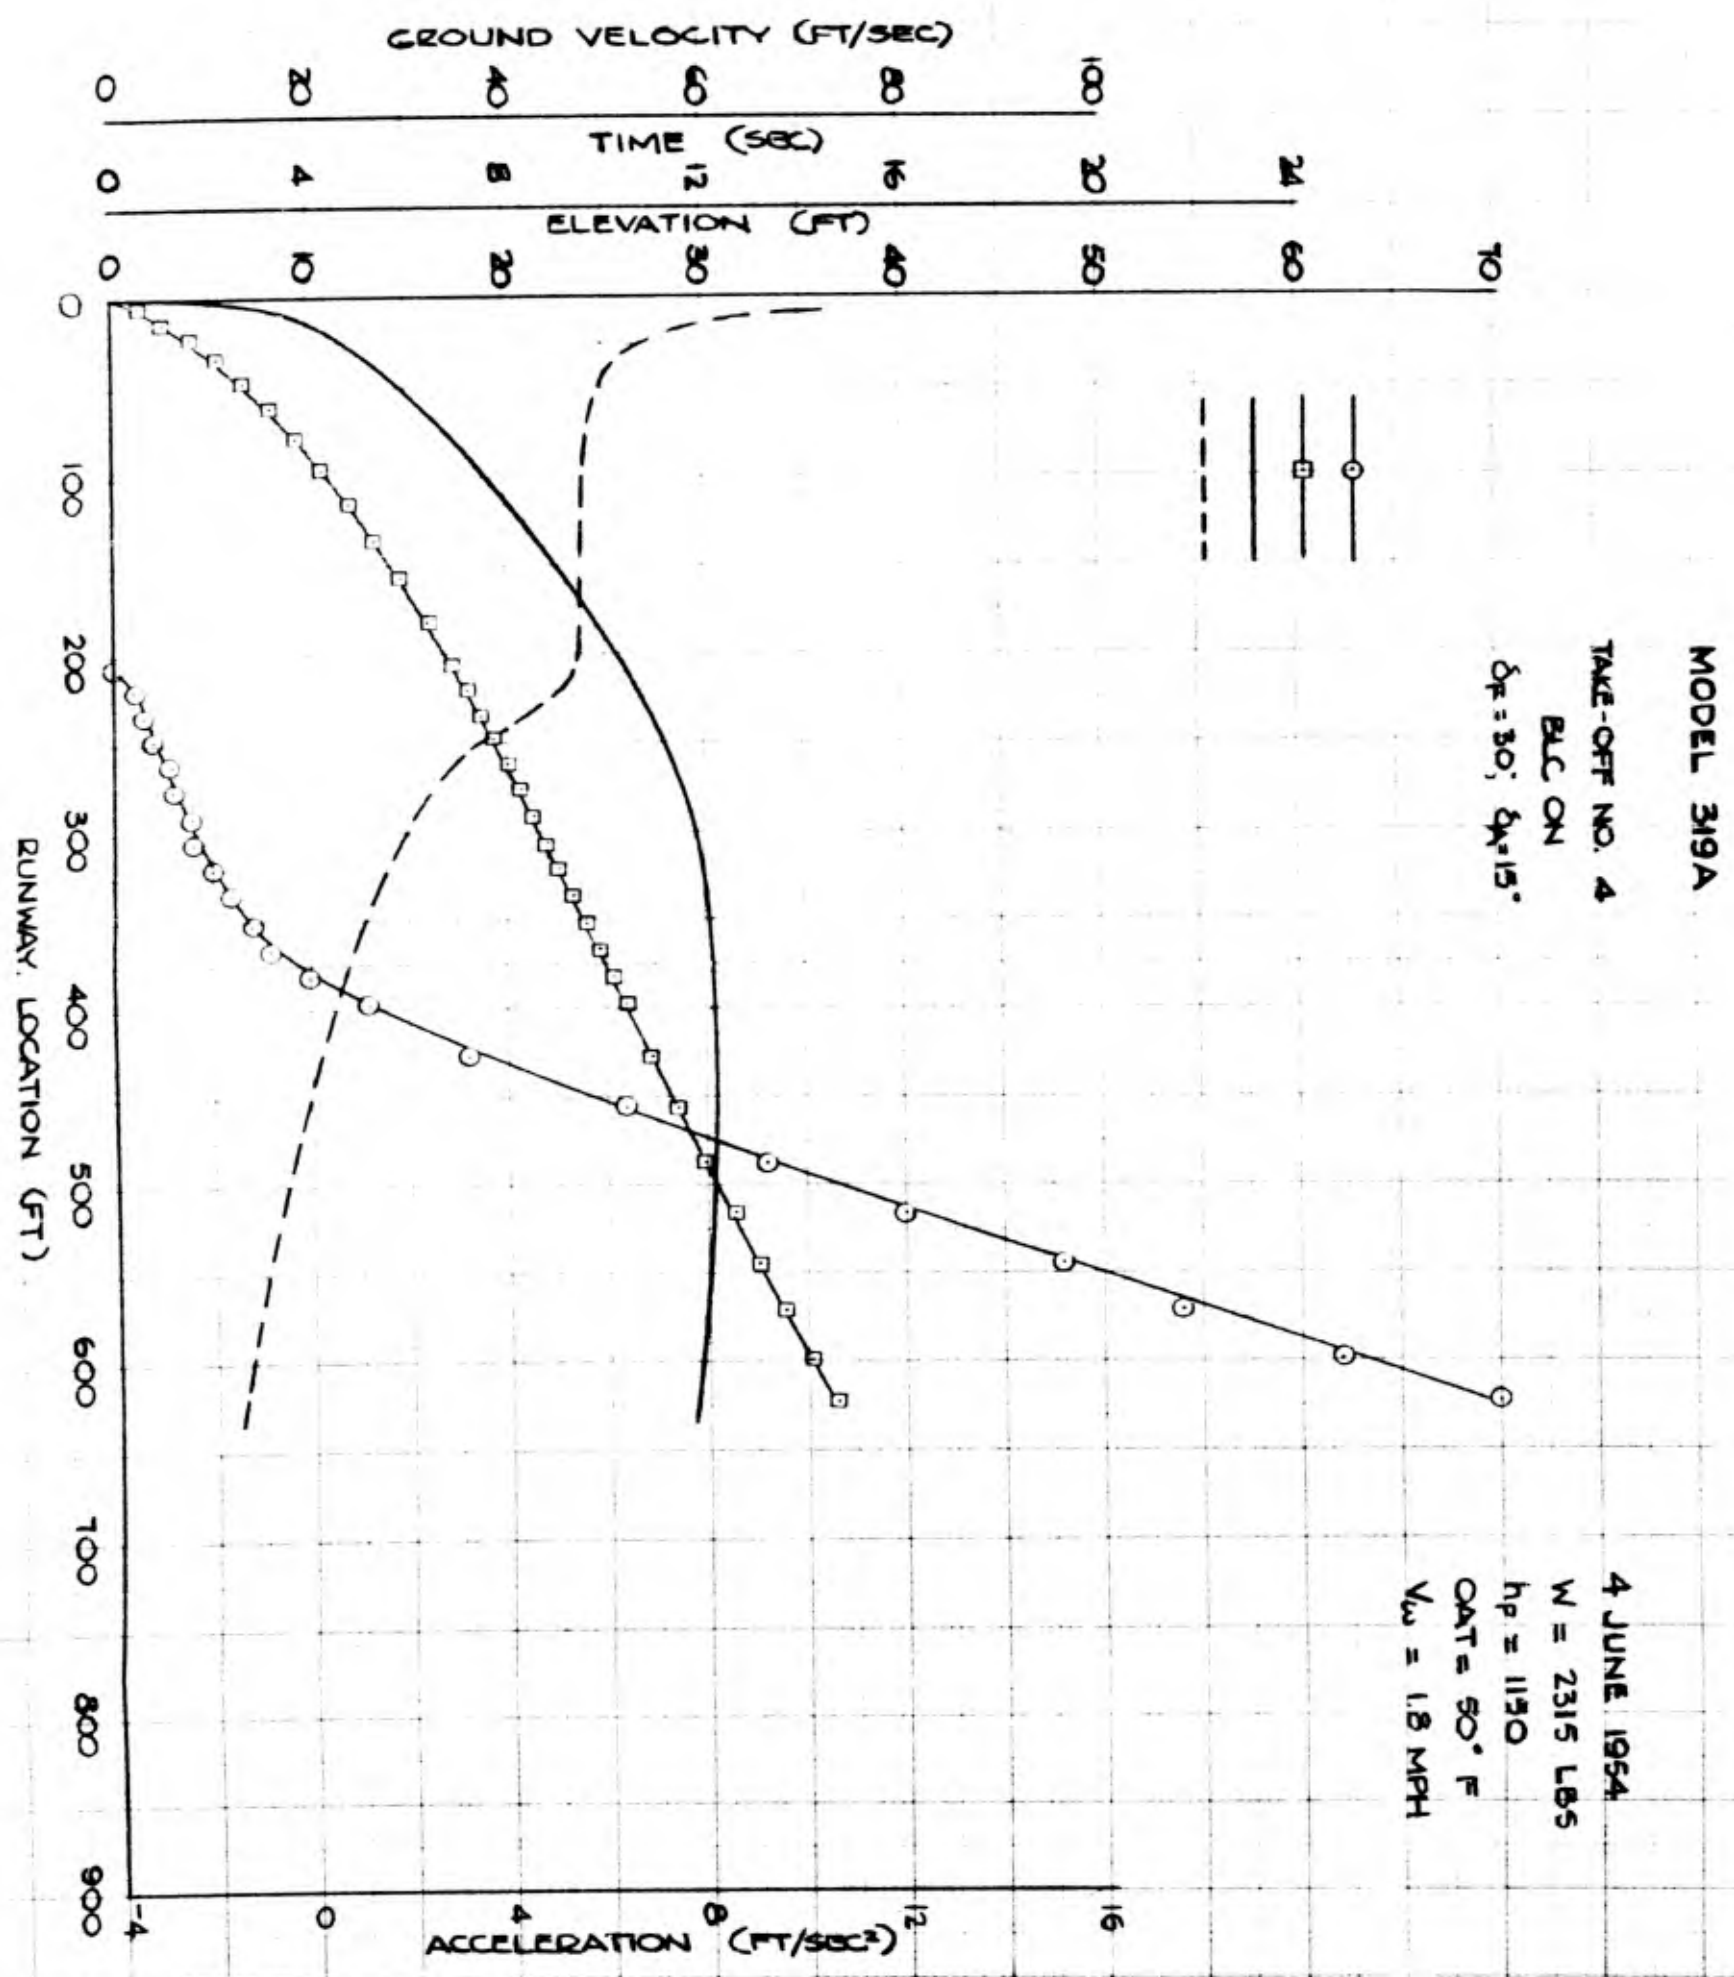

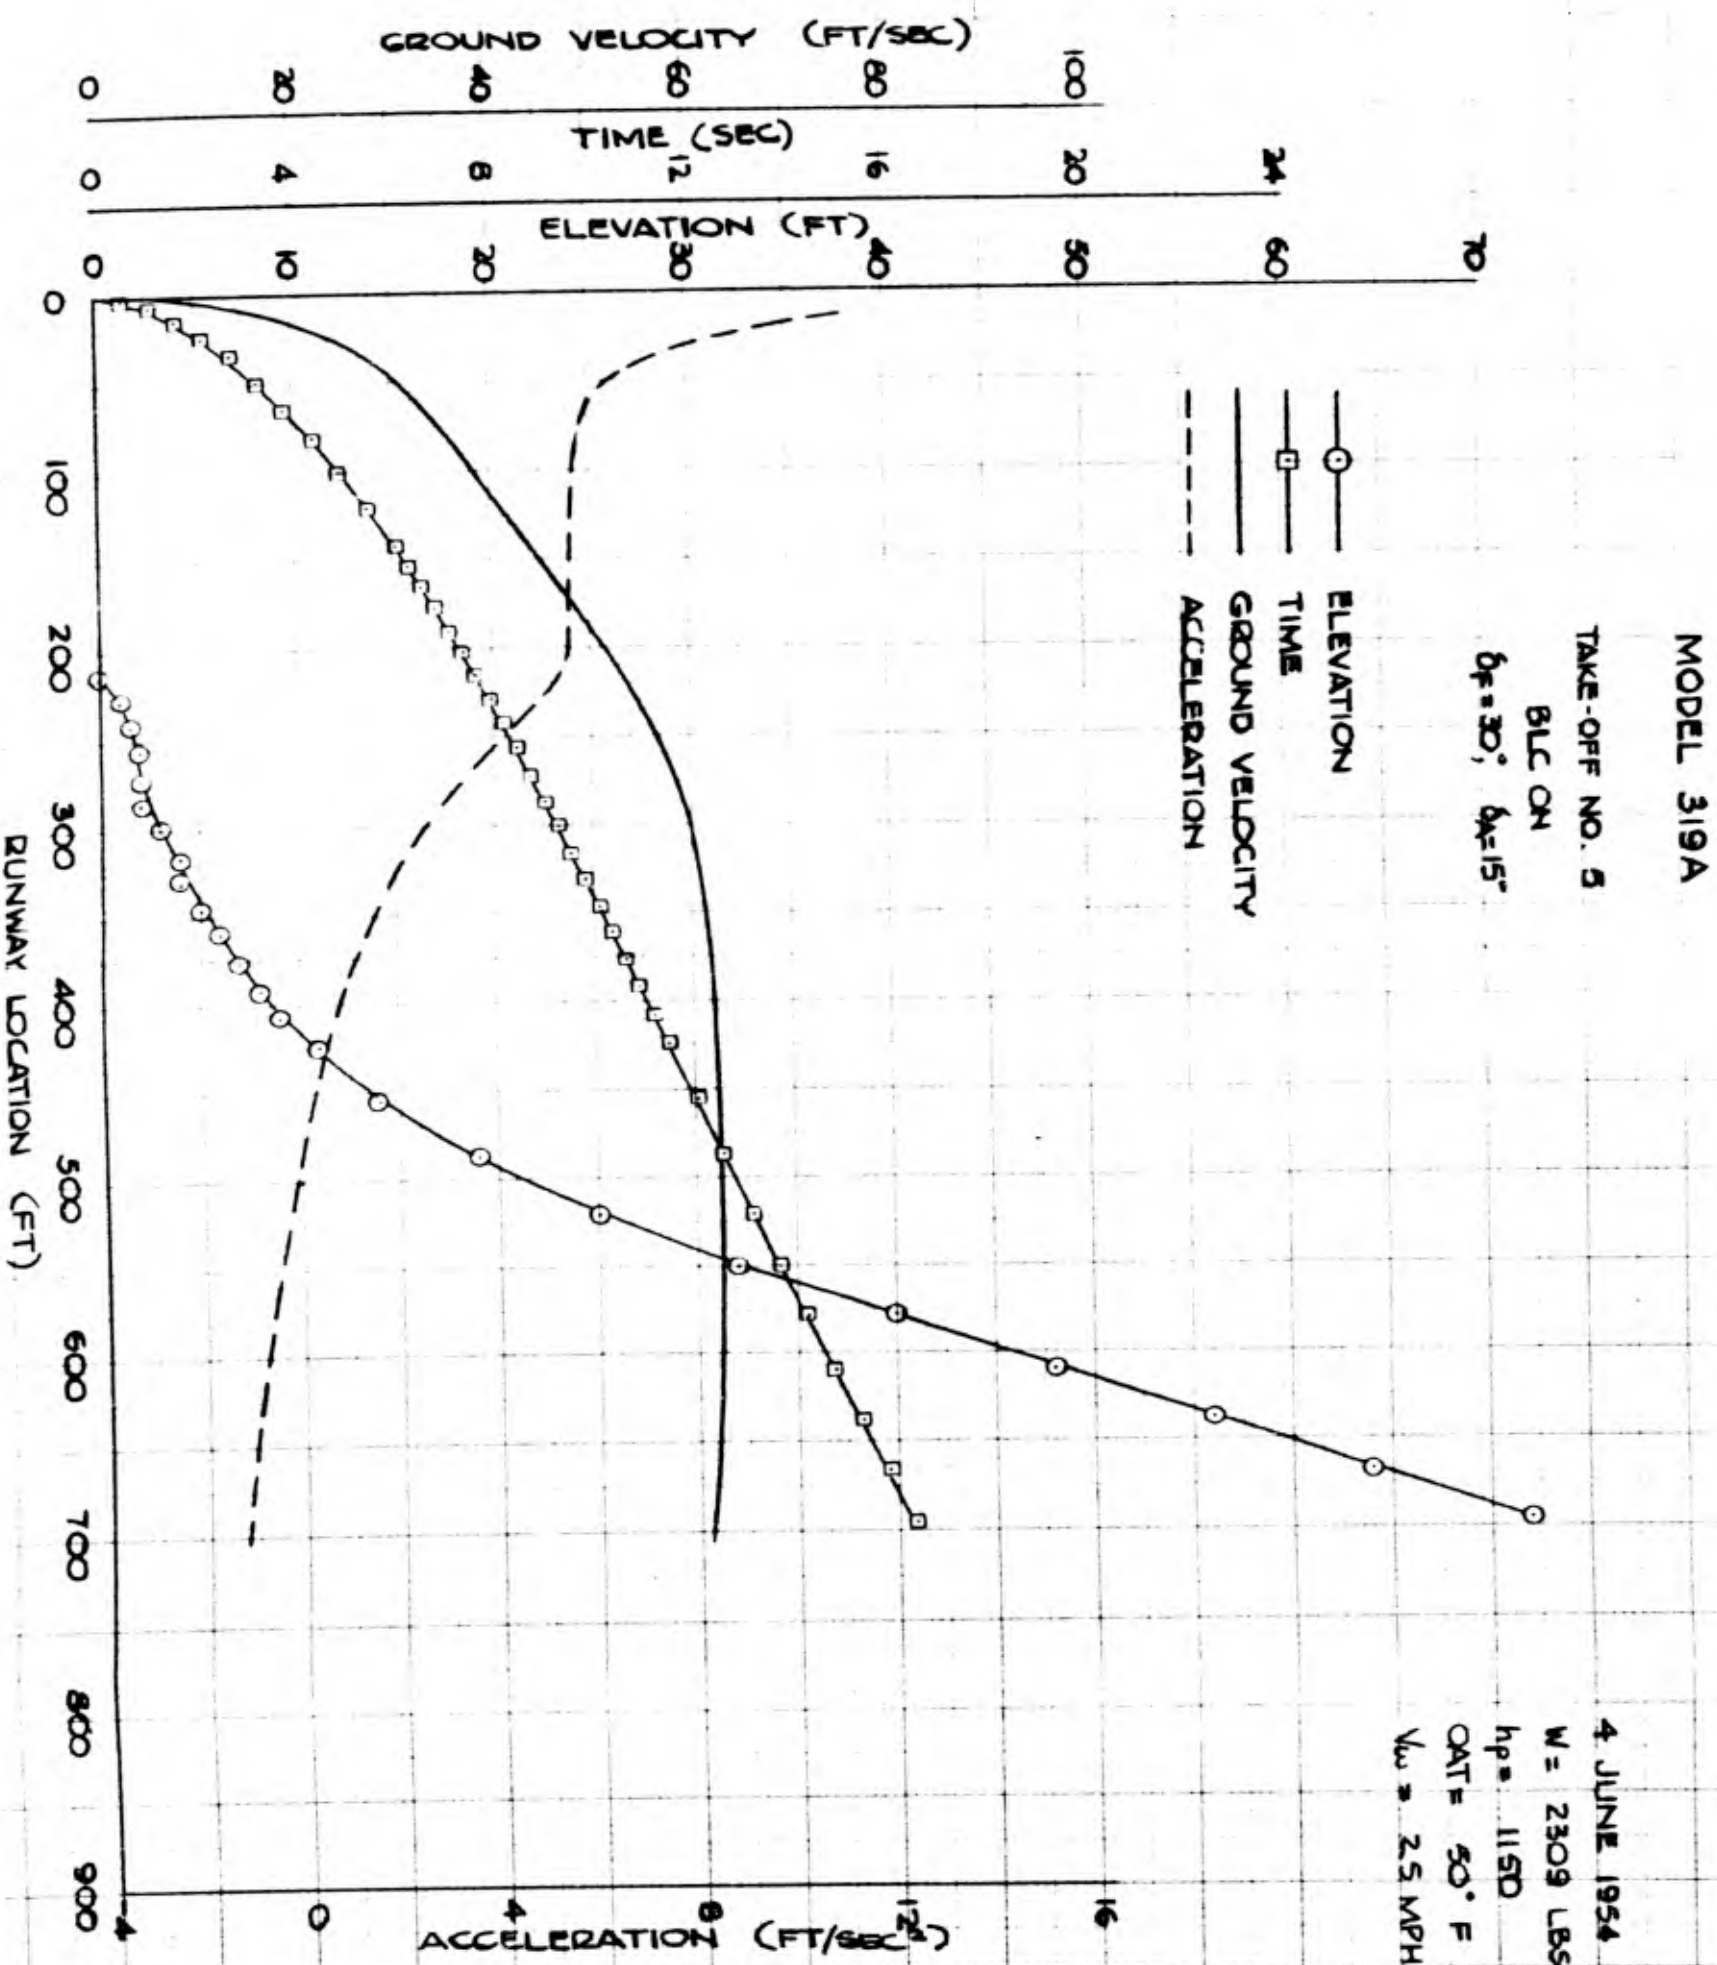


CONFIDENTIAL


PAGE 35
FIG. 15

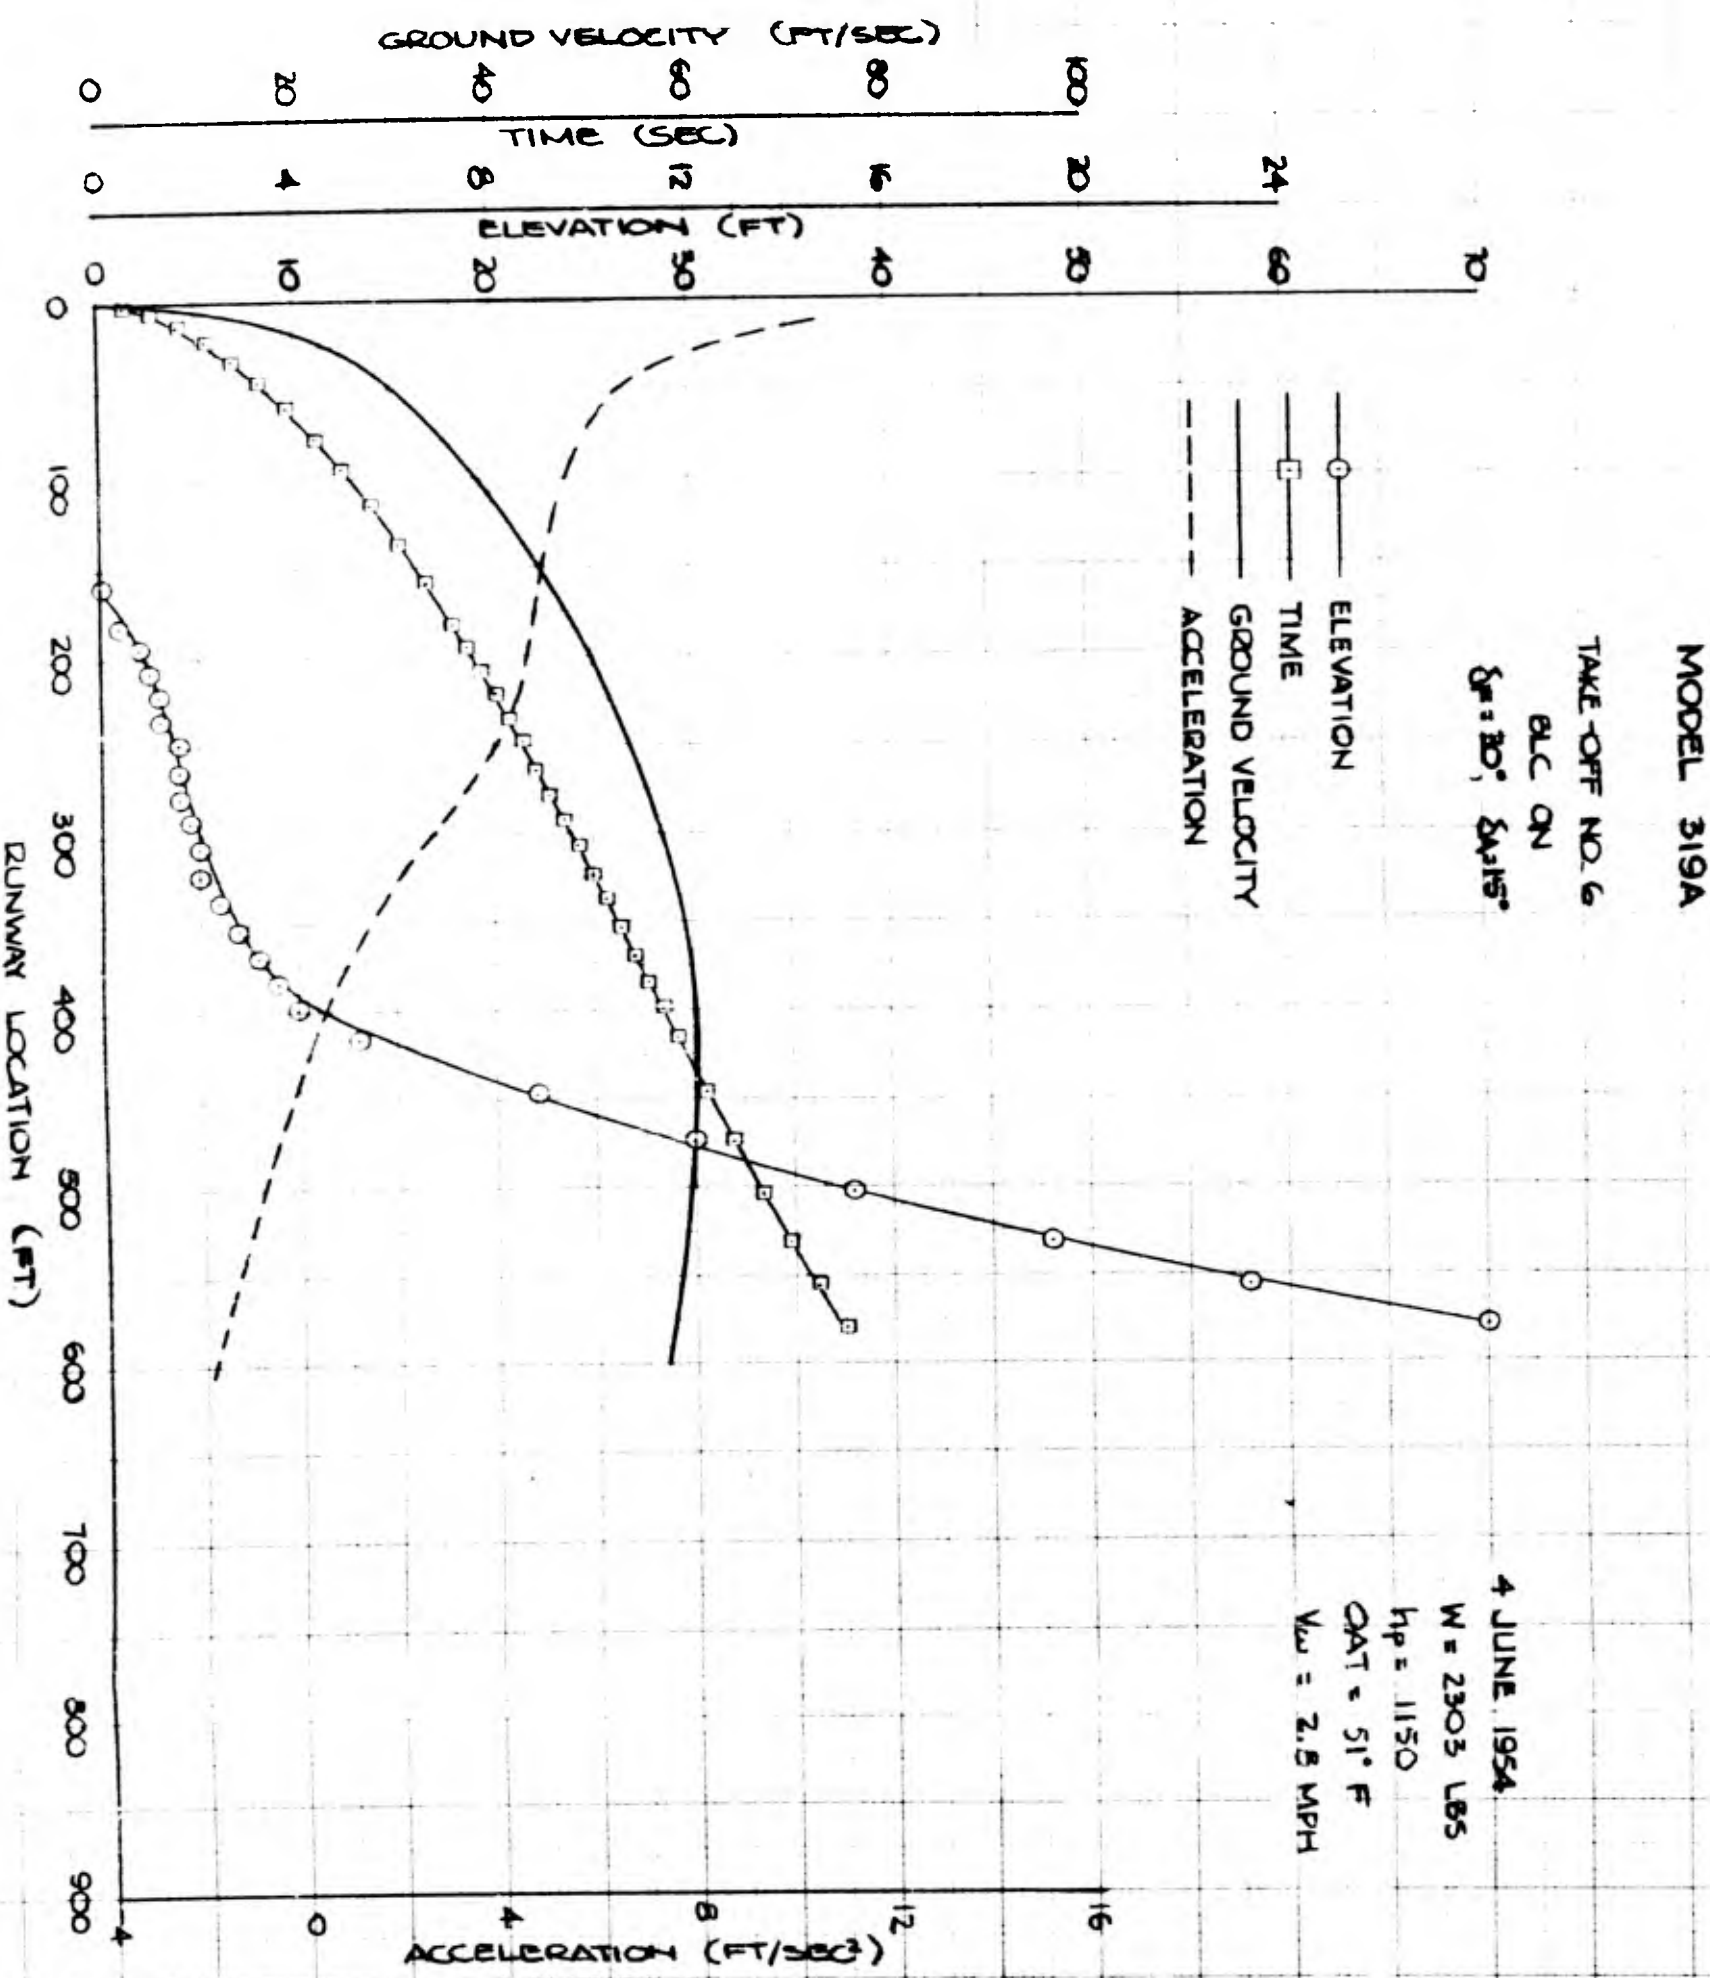

CONFIDENTIAL

2-23-55
45

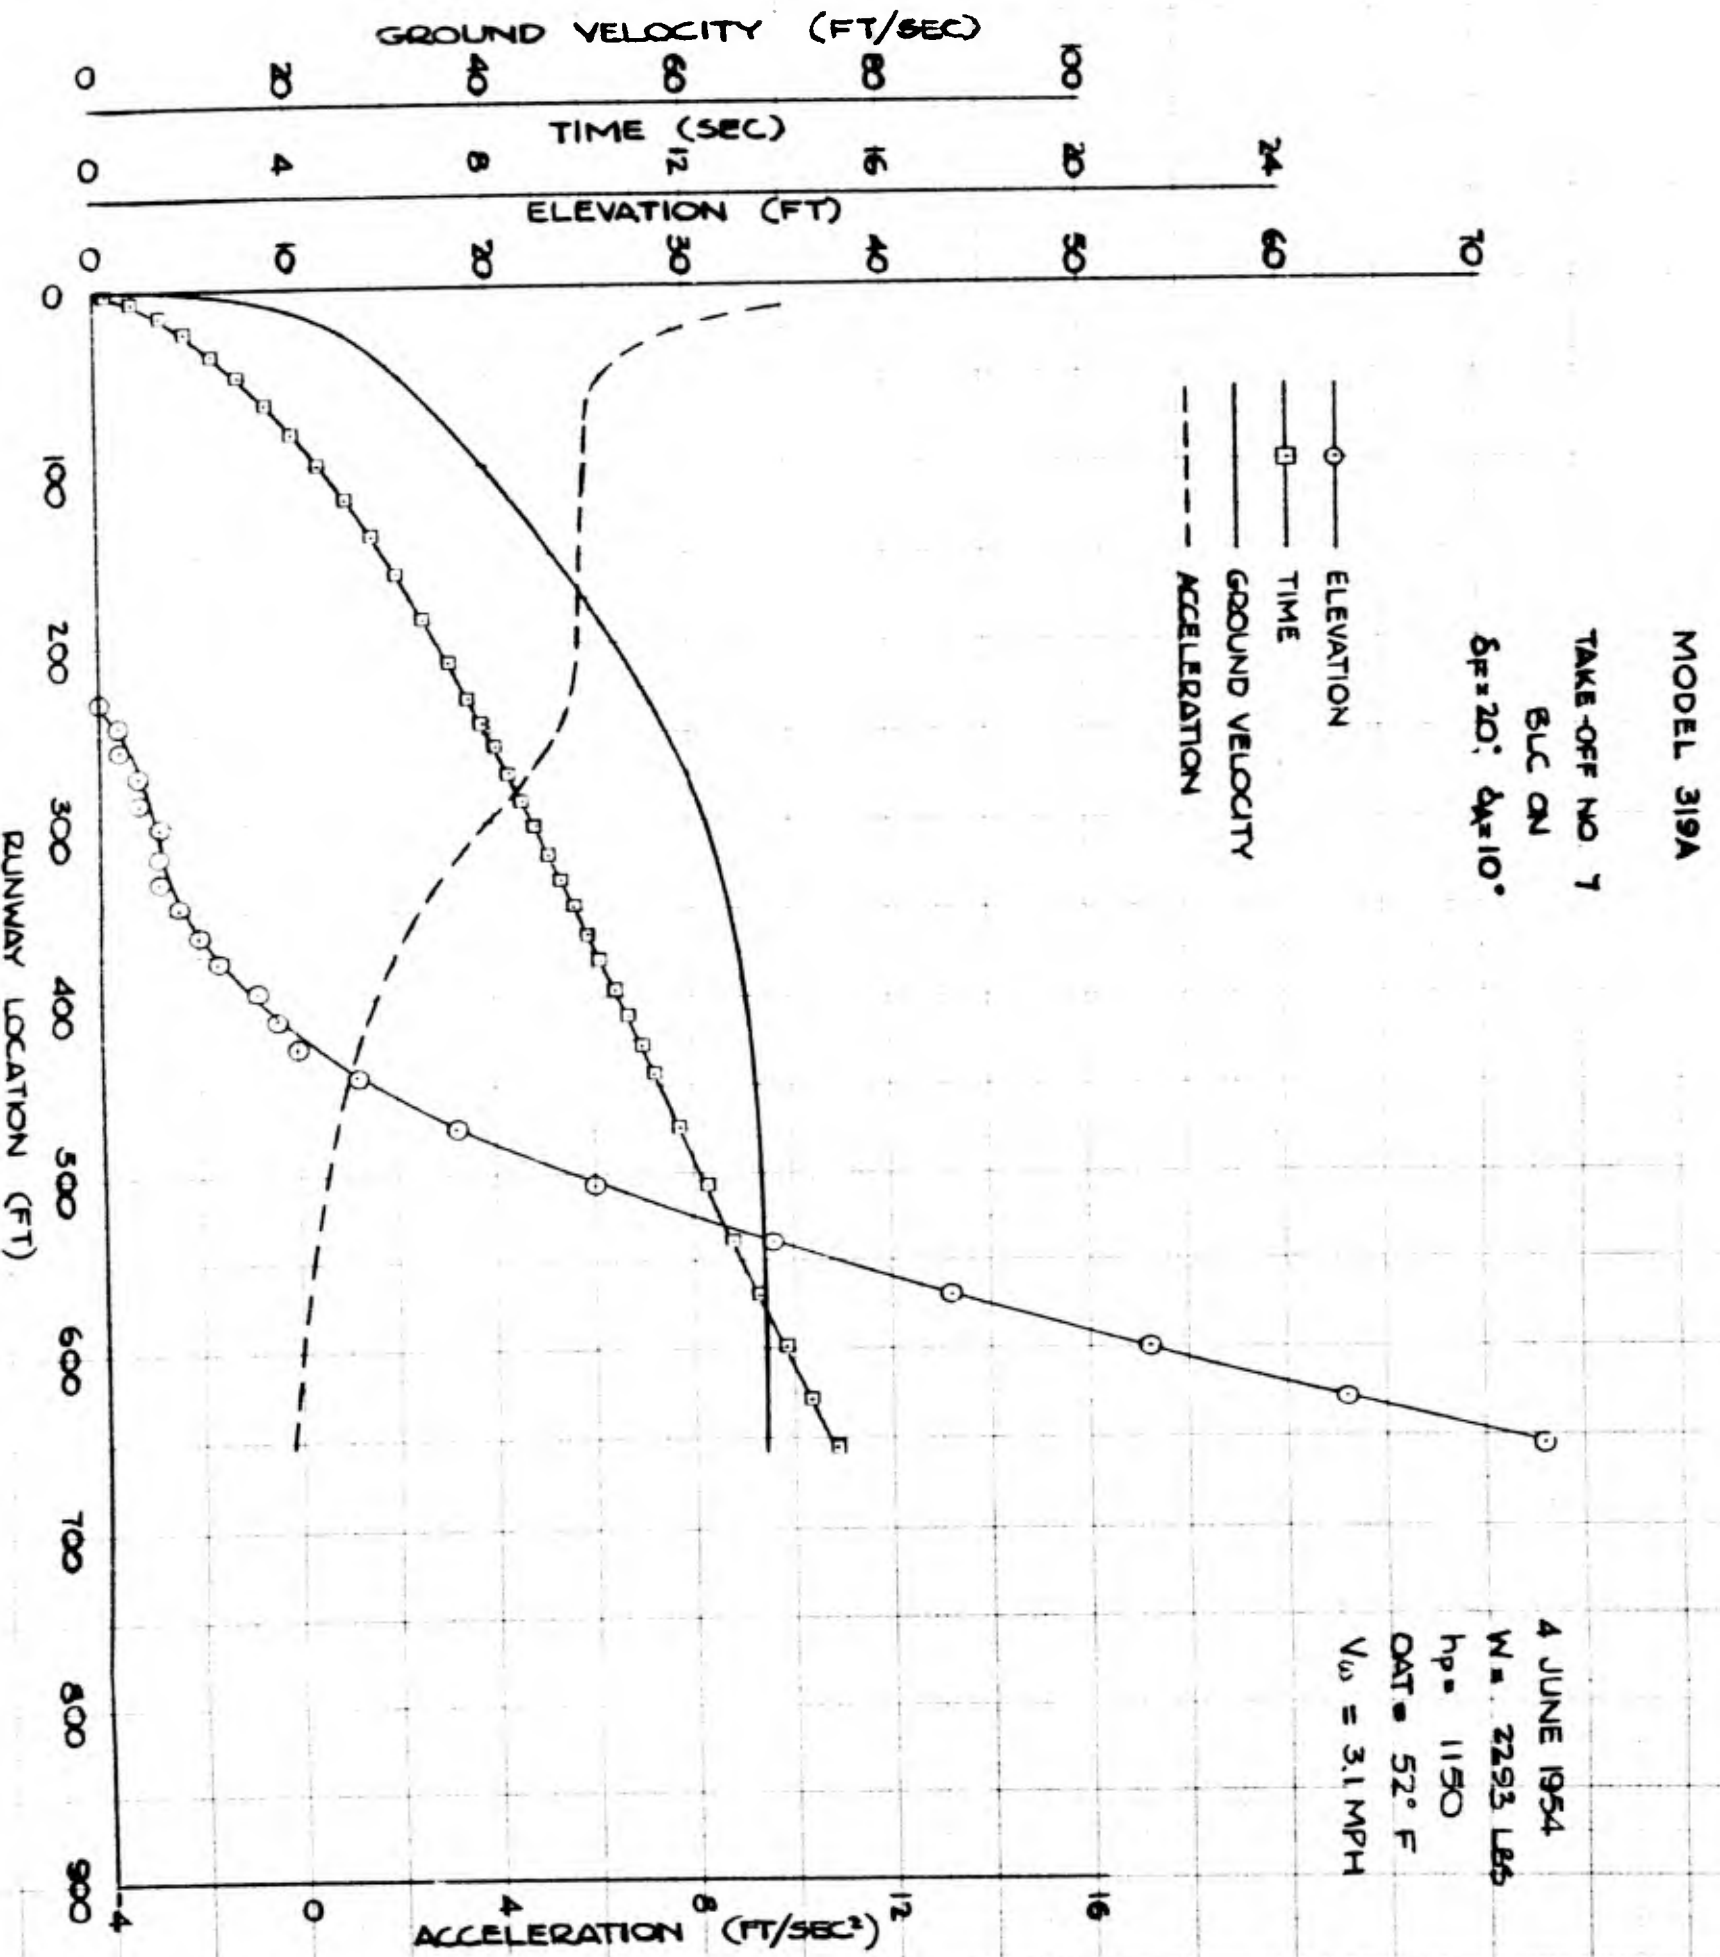

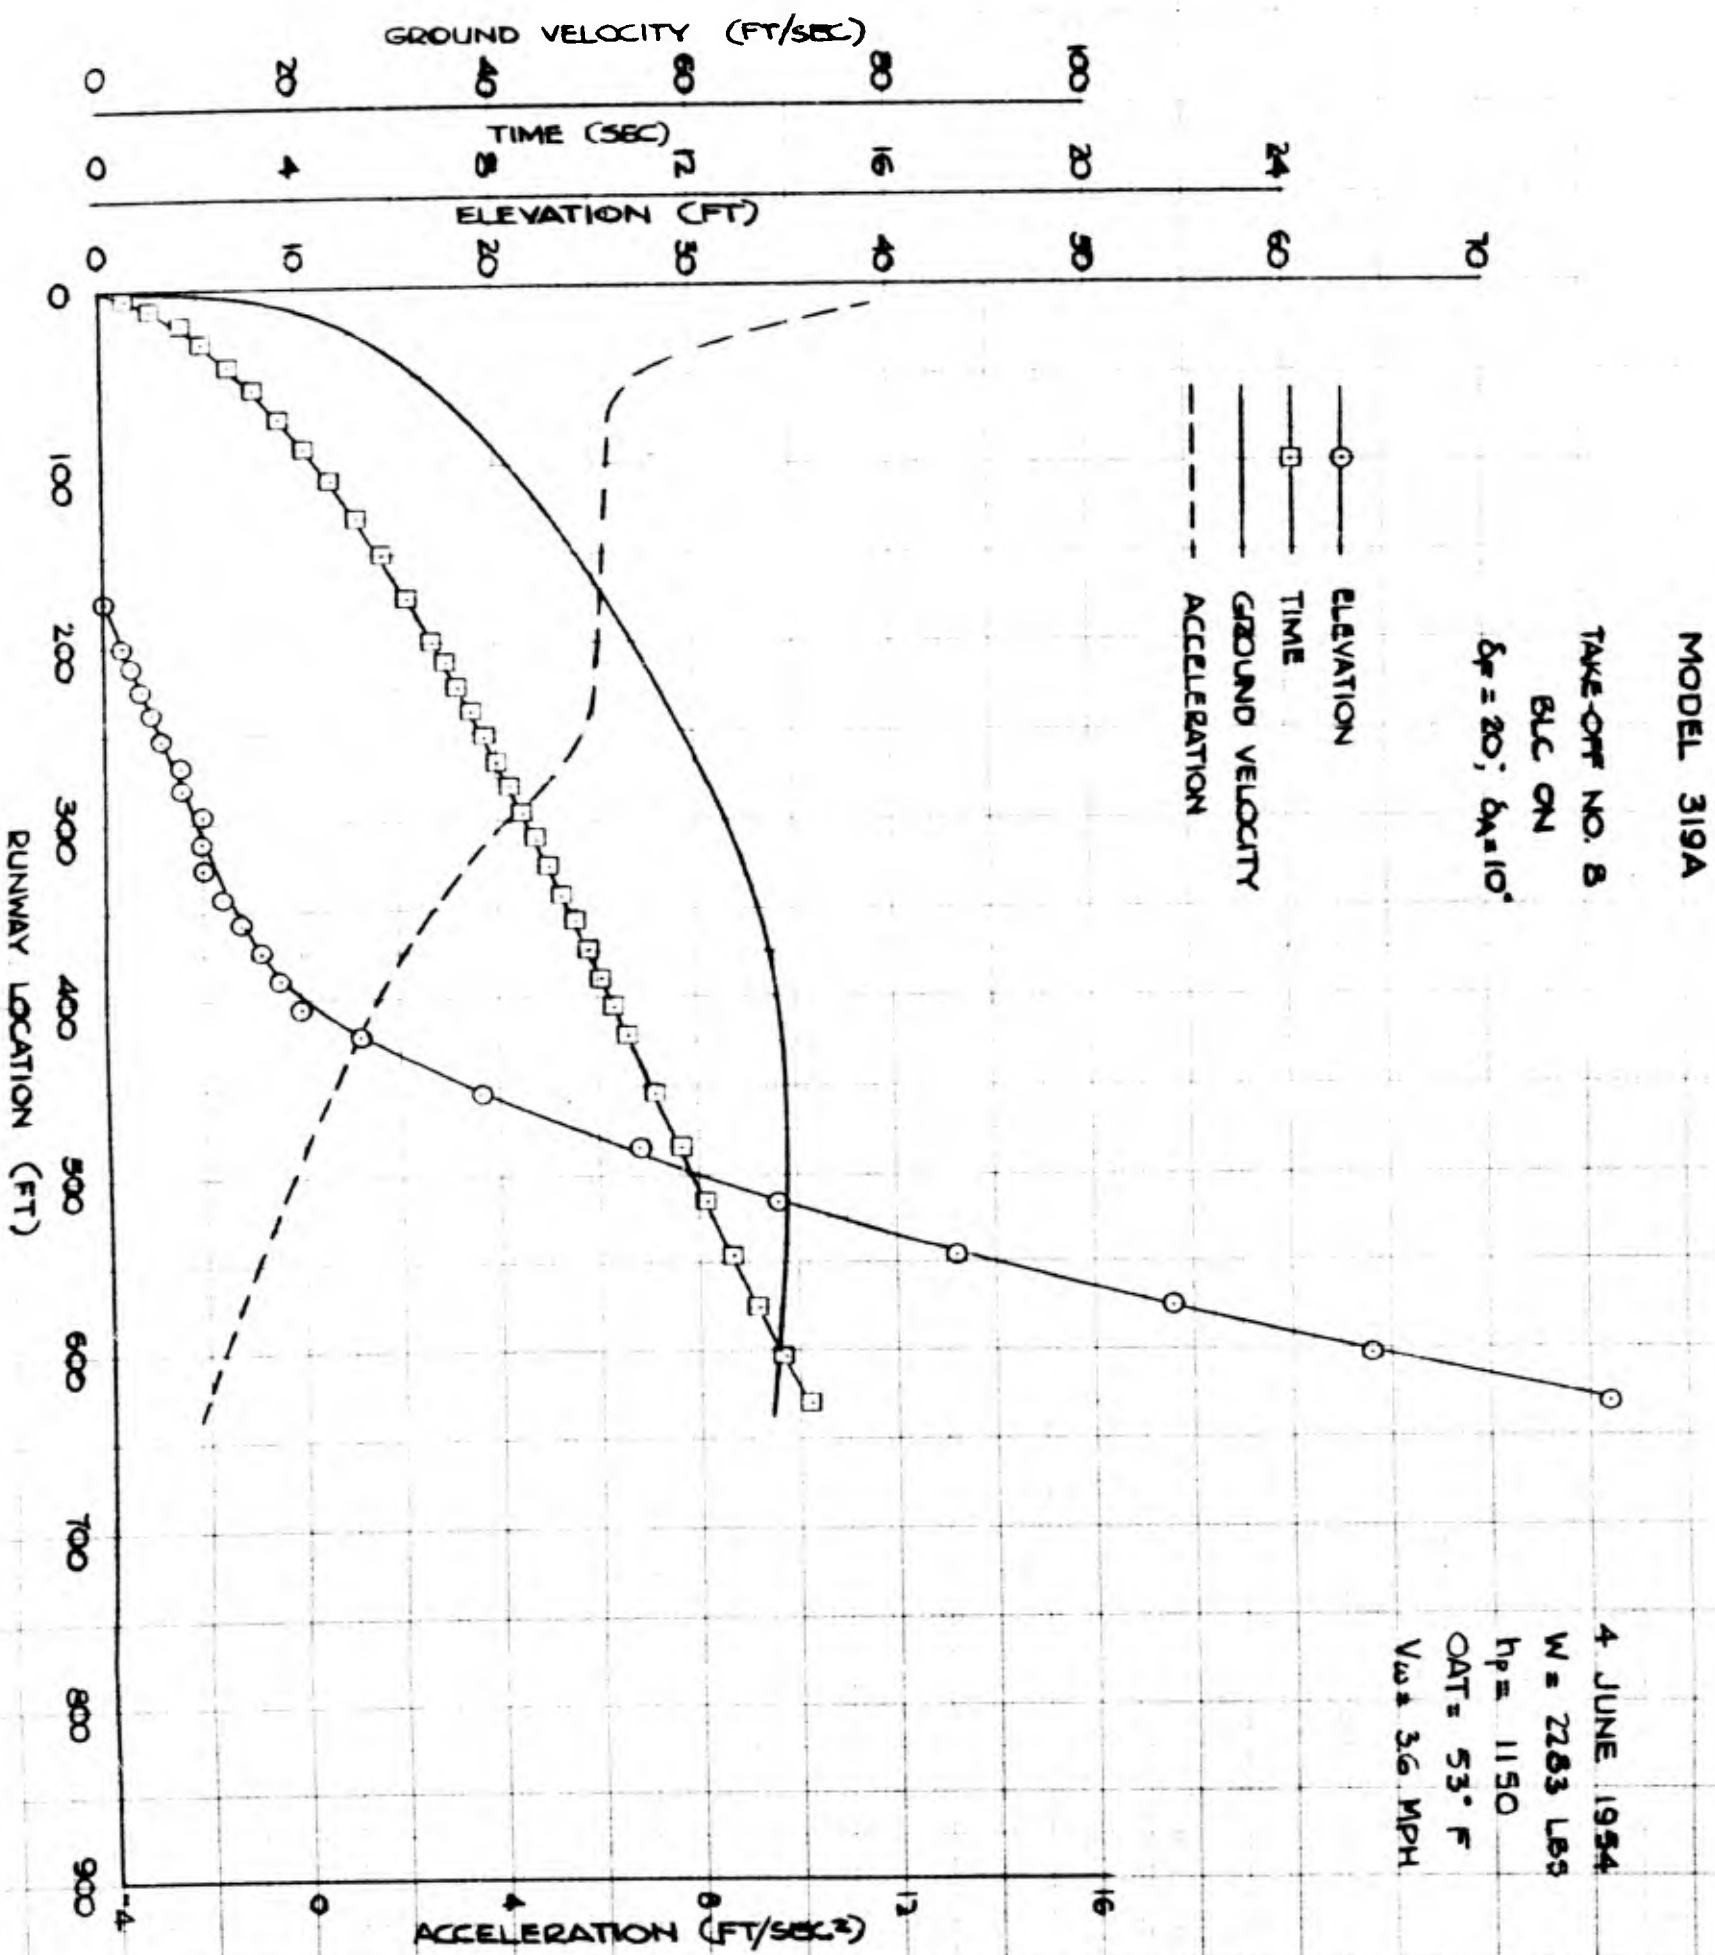

MODEL 319A

TAKE-OFF NO. 9

BLC ON

$\delta = 20^\circ$, $\delta_A = 10^\circ$


4 JUNE 1954

W = 2276 LBS

hp = 1150

OAT = 54° F

$V_{LO} = 2.5$ MPH

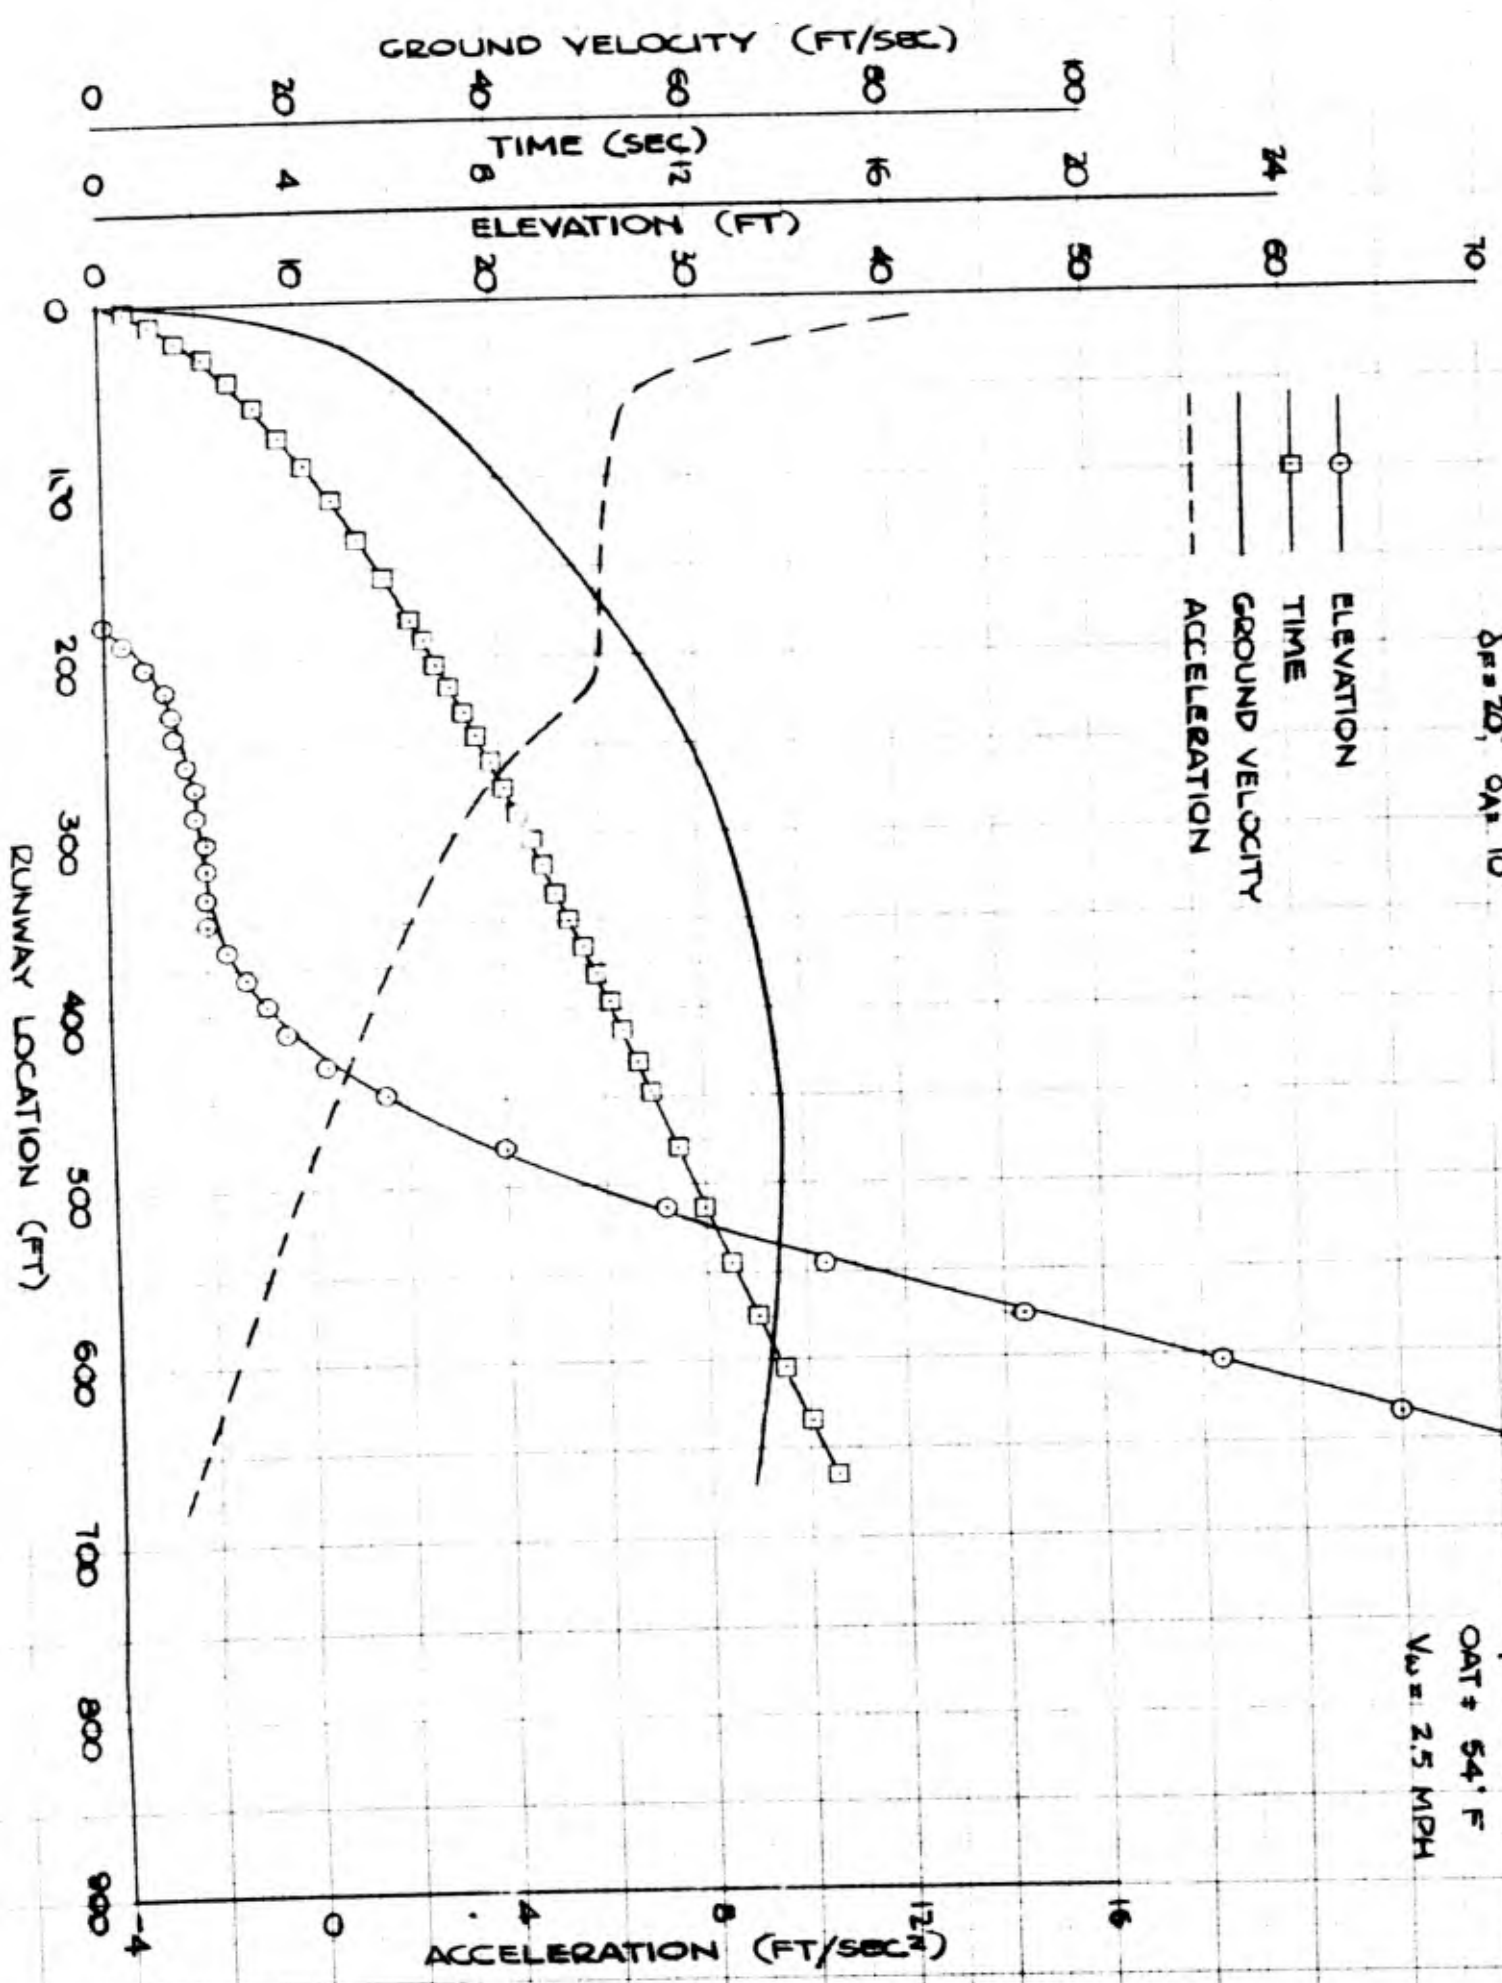


5-1-55
14

MODEL 319A

TAKE-OFF NO. 10
BLC ON
 $\delta_{\theta} = 20^\circ$, $\delta_{\alpha} = 10^\circ$

4 JUNE 1954
W = 2273 LBS
hp = 1150
OAT = 55° F
VW = 3.6 MPH

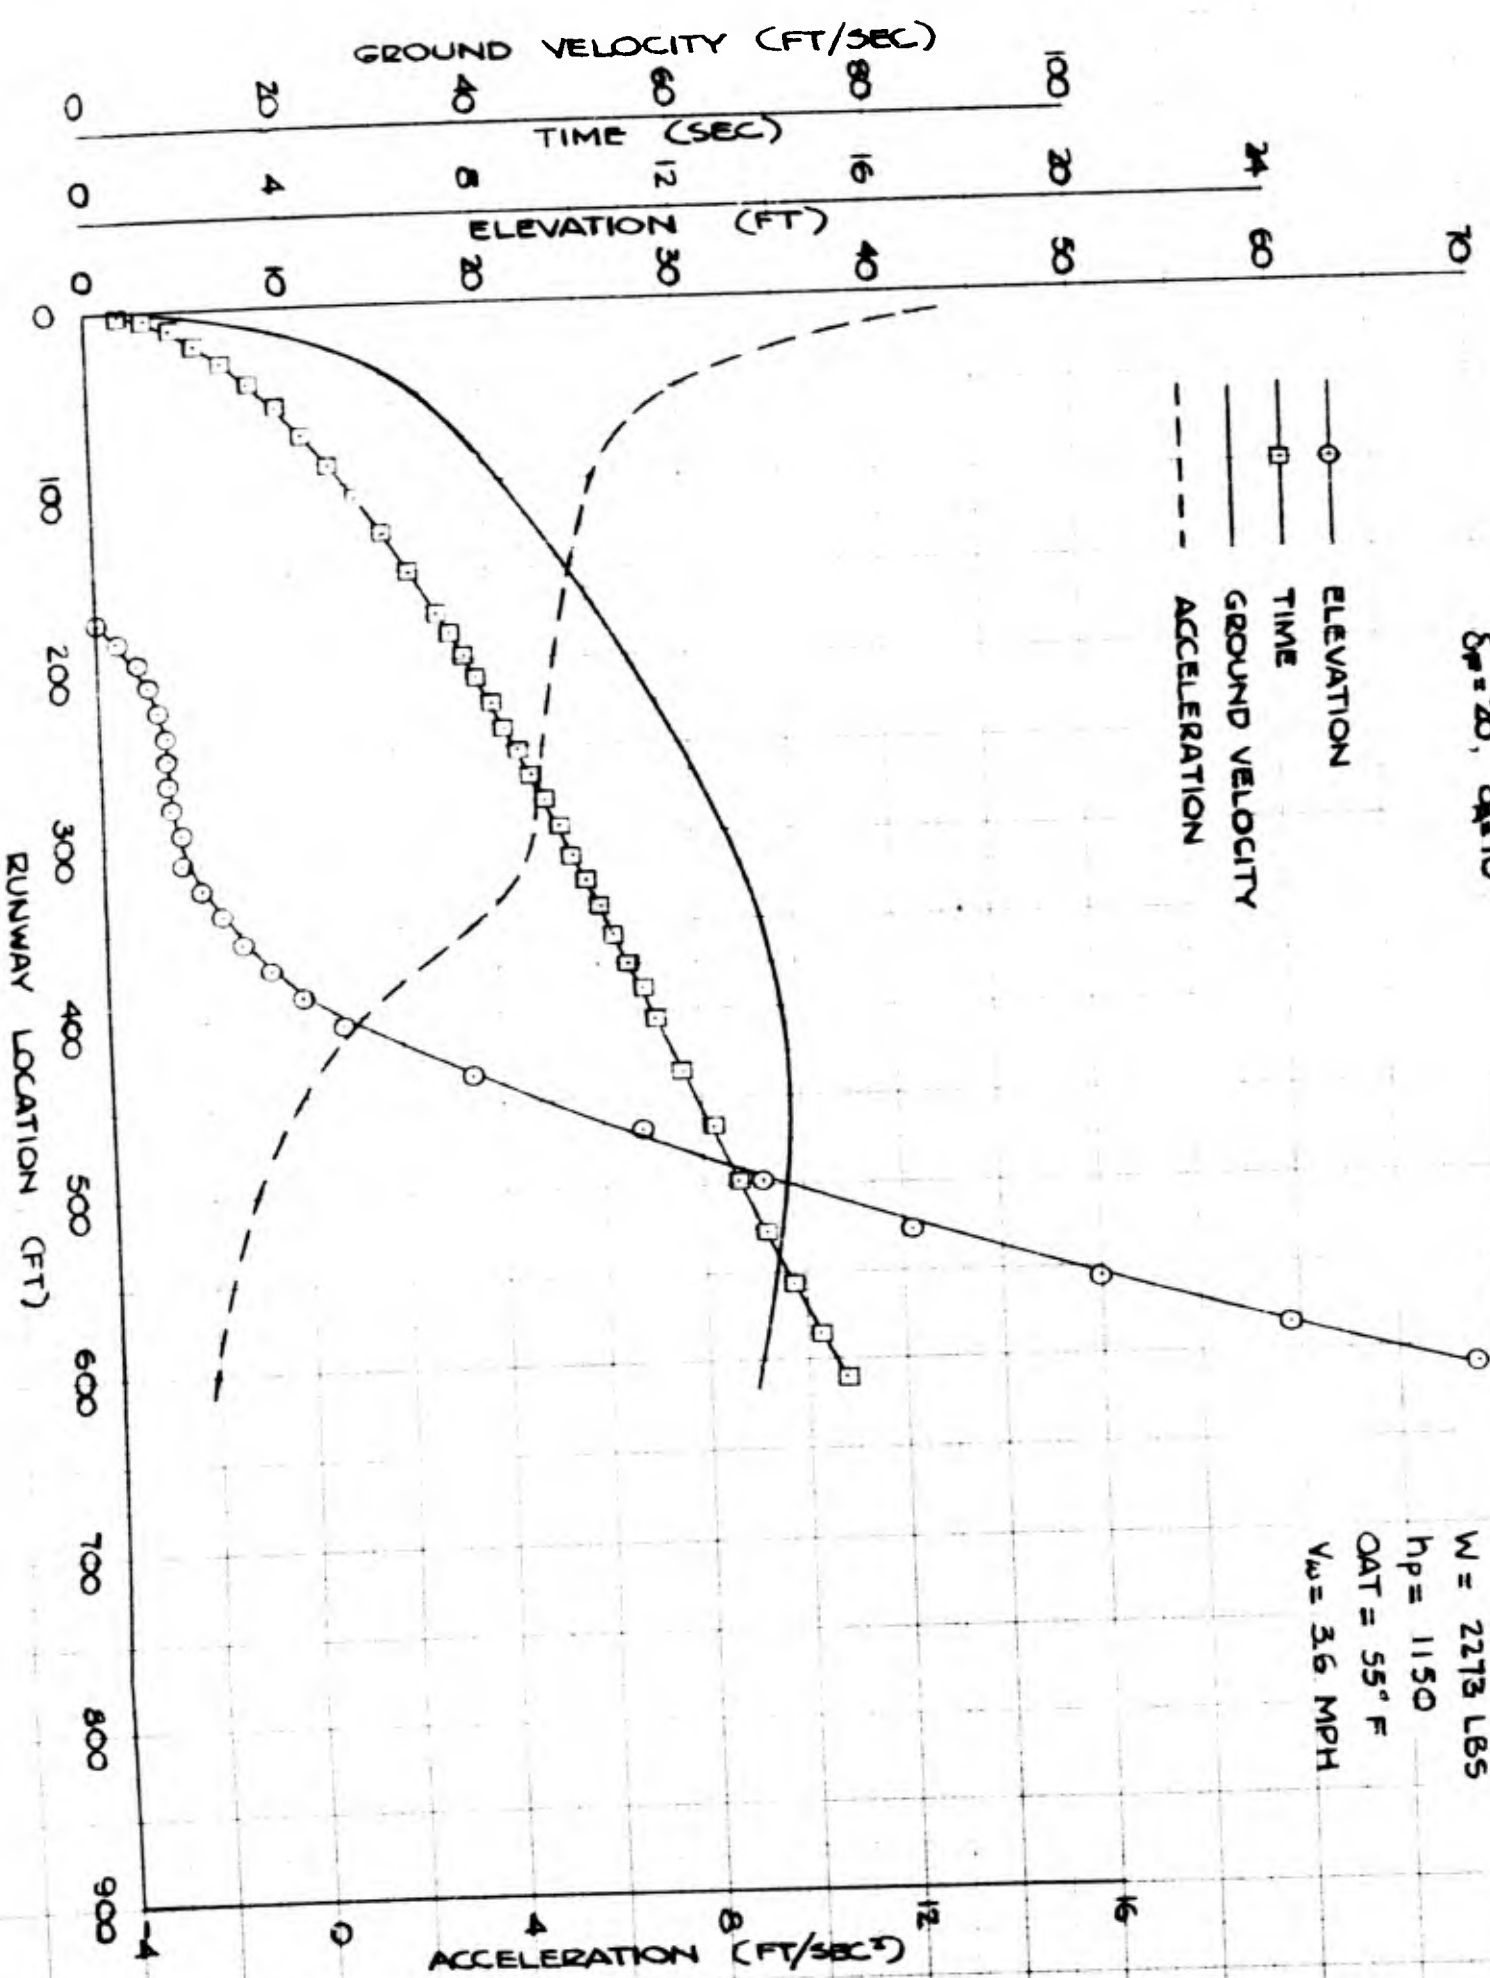

CONFIDENTIAL

PAGE 38
FIG. 18


MODEL 319A

TAKE-OFF NO.11

BLC ON

$\delta_p = 20^\circ$, $\delta_a = 10^\circ$

4 JUNE 1954
W = 2267 LBS
hp = 1150
OAT = 56° F
V₀ = 2.8 MPH

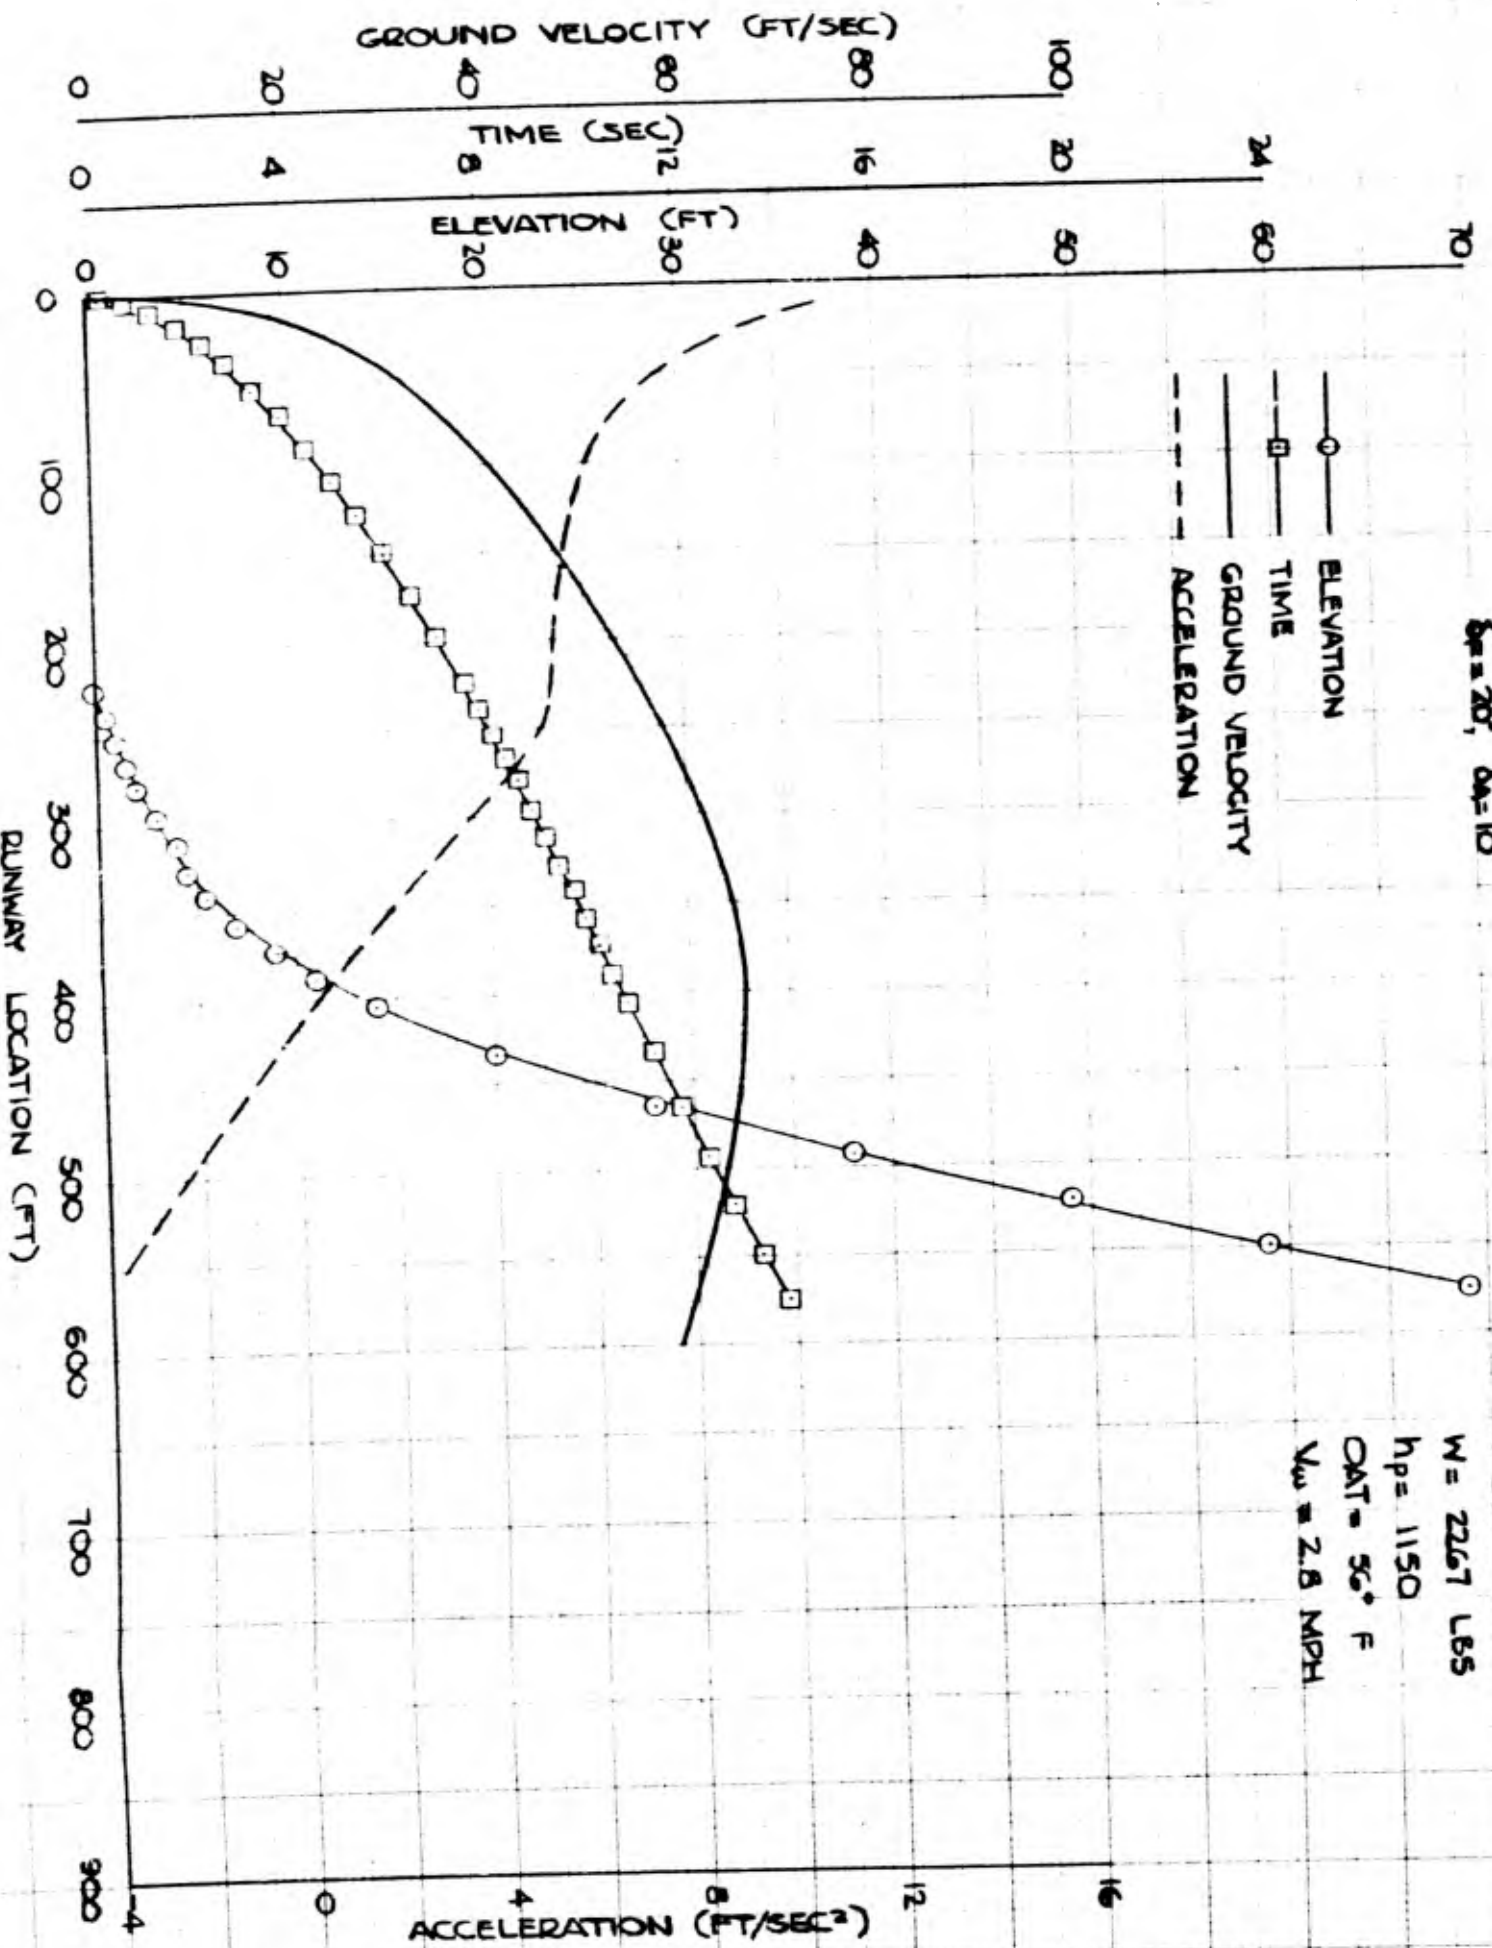

CONFIDENTIAL

3-1-55
4/5

MODEL 319A

LANDING NO. 1

BLC ON

$\delta = 55^\circ$ $\delta_{A30} = 30^\circ$


4 JUNE 1954


W = 2335 LBS

hp = 1150

OAT = $49^\circ F$

$V_{LO} = -0.4$ MPH

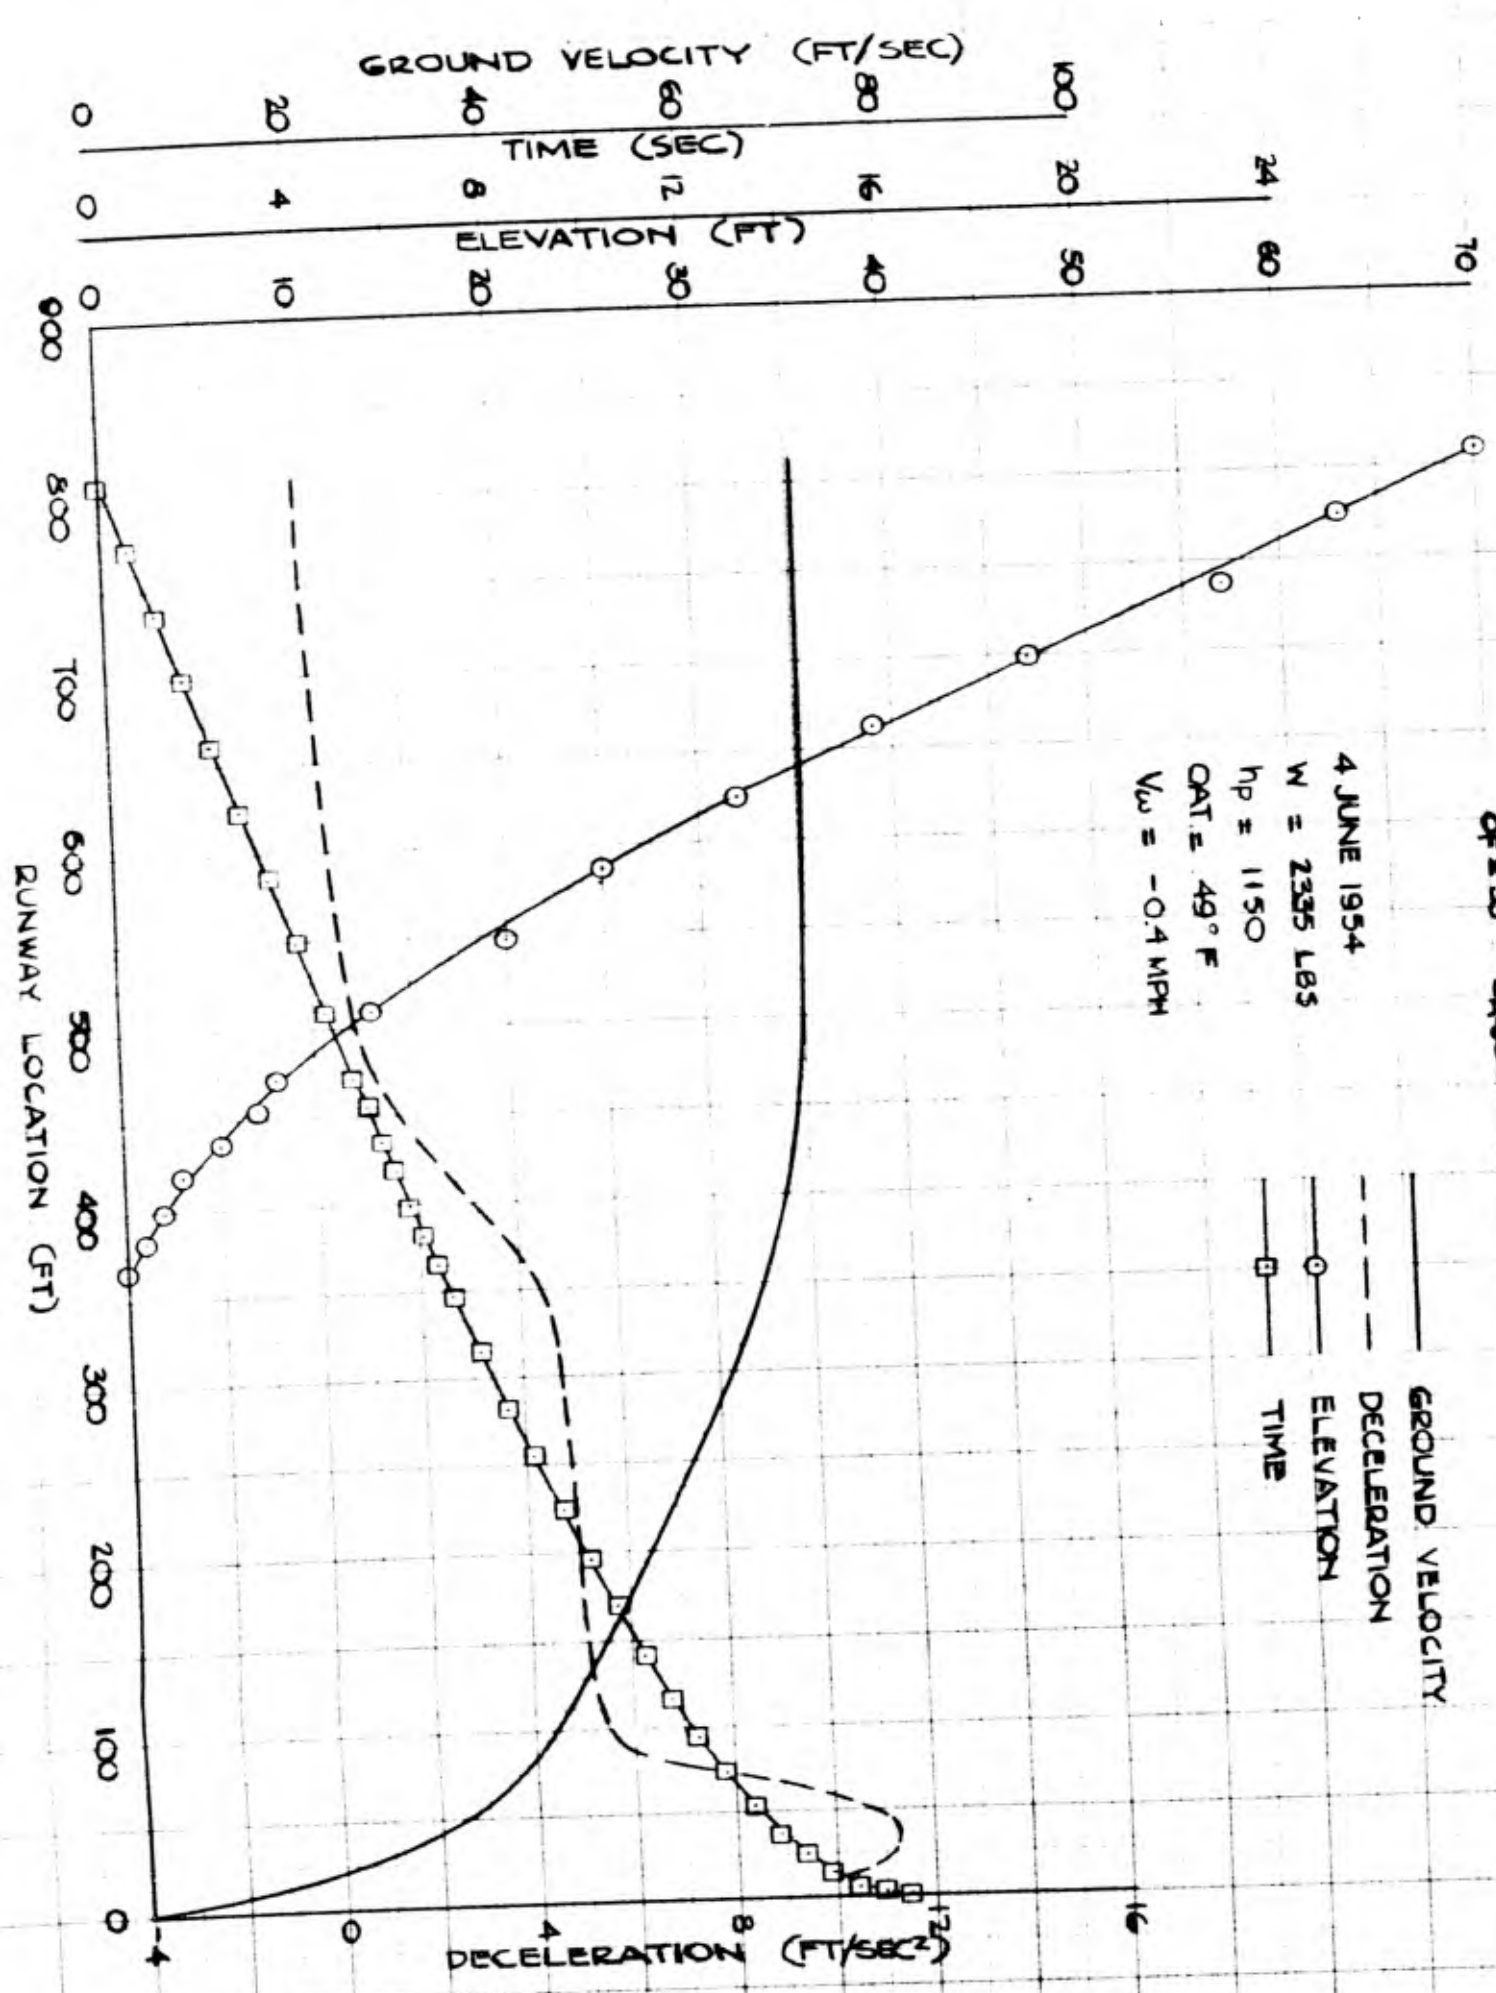

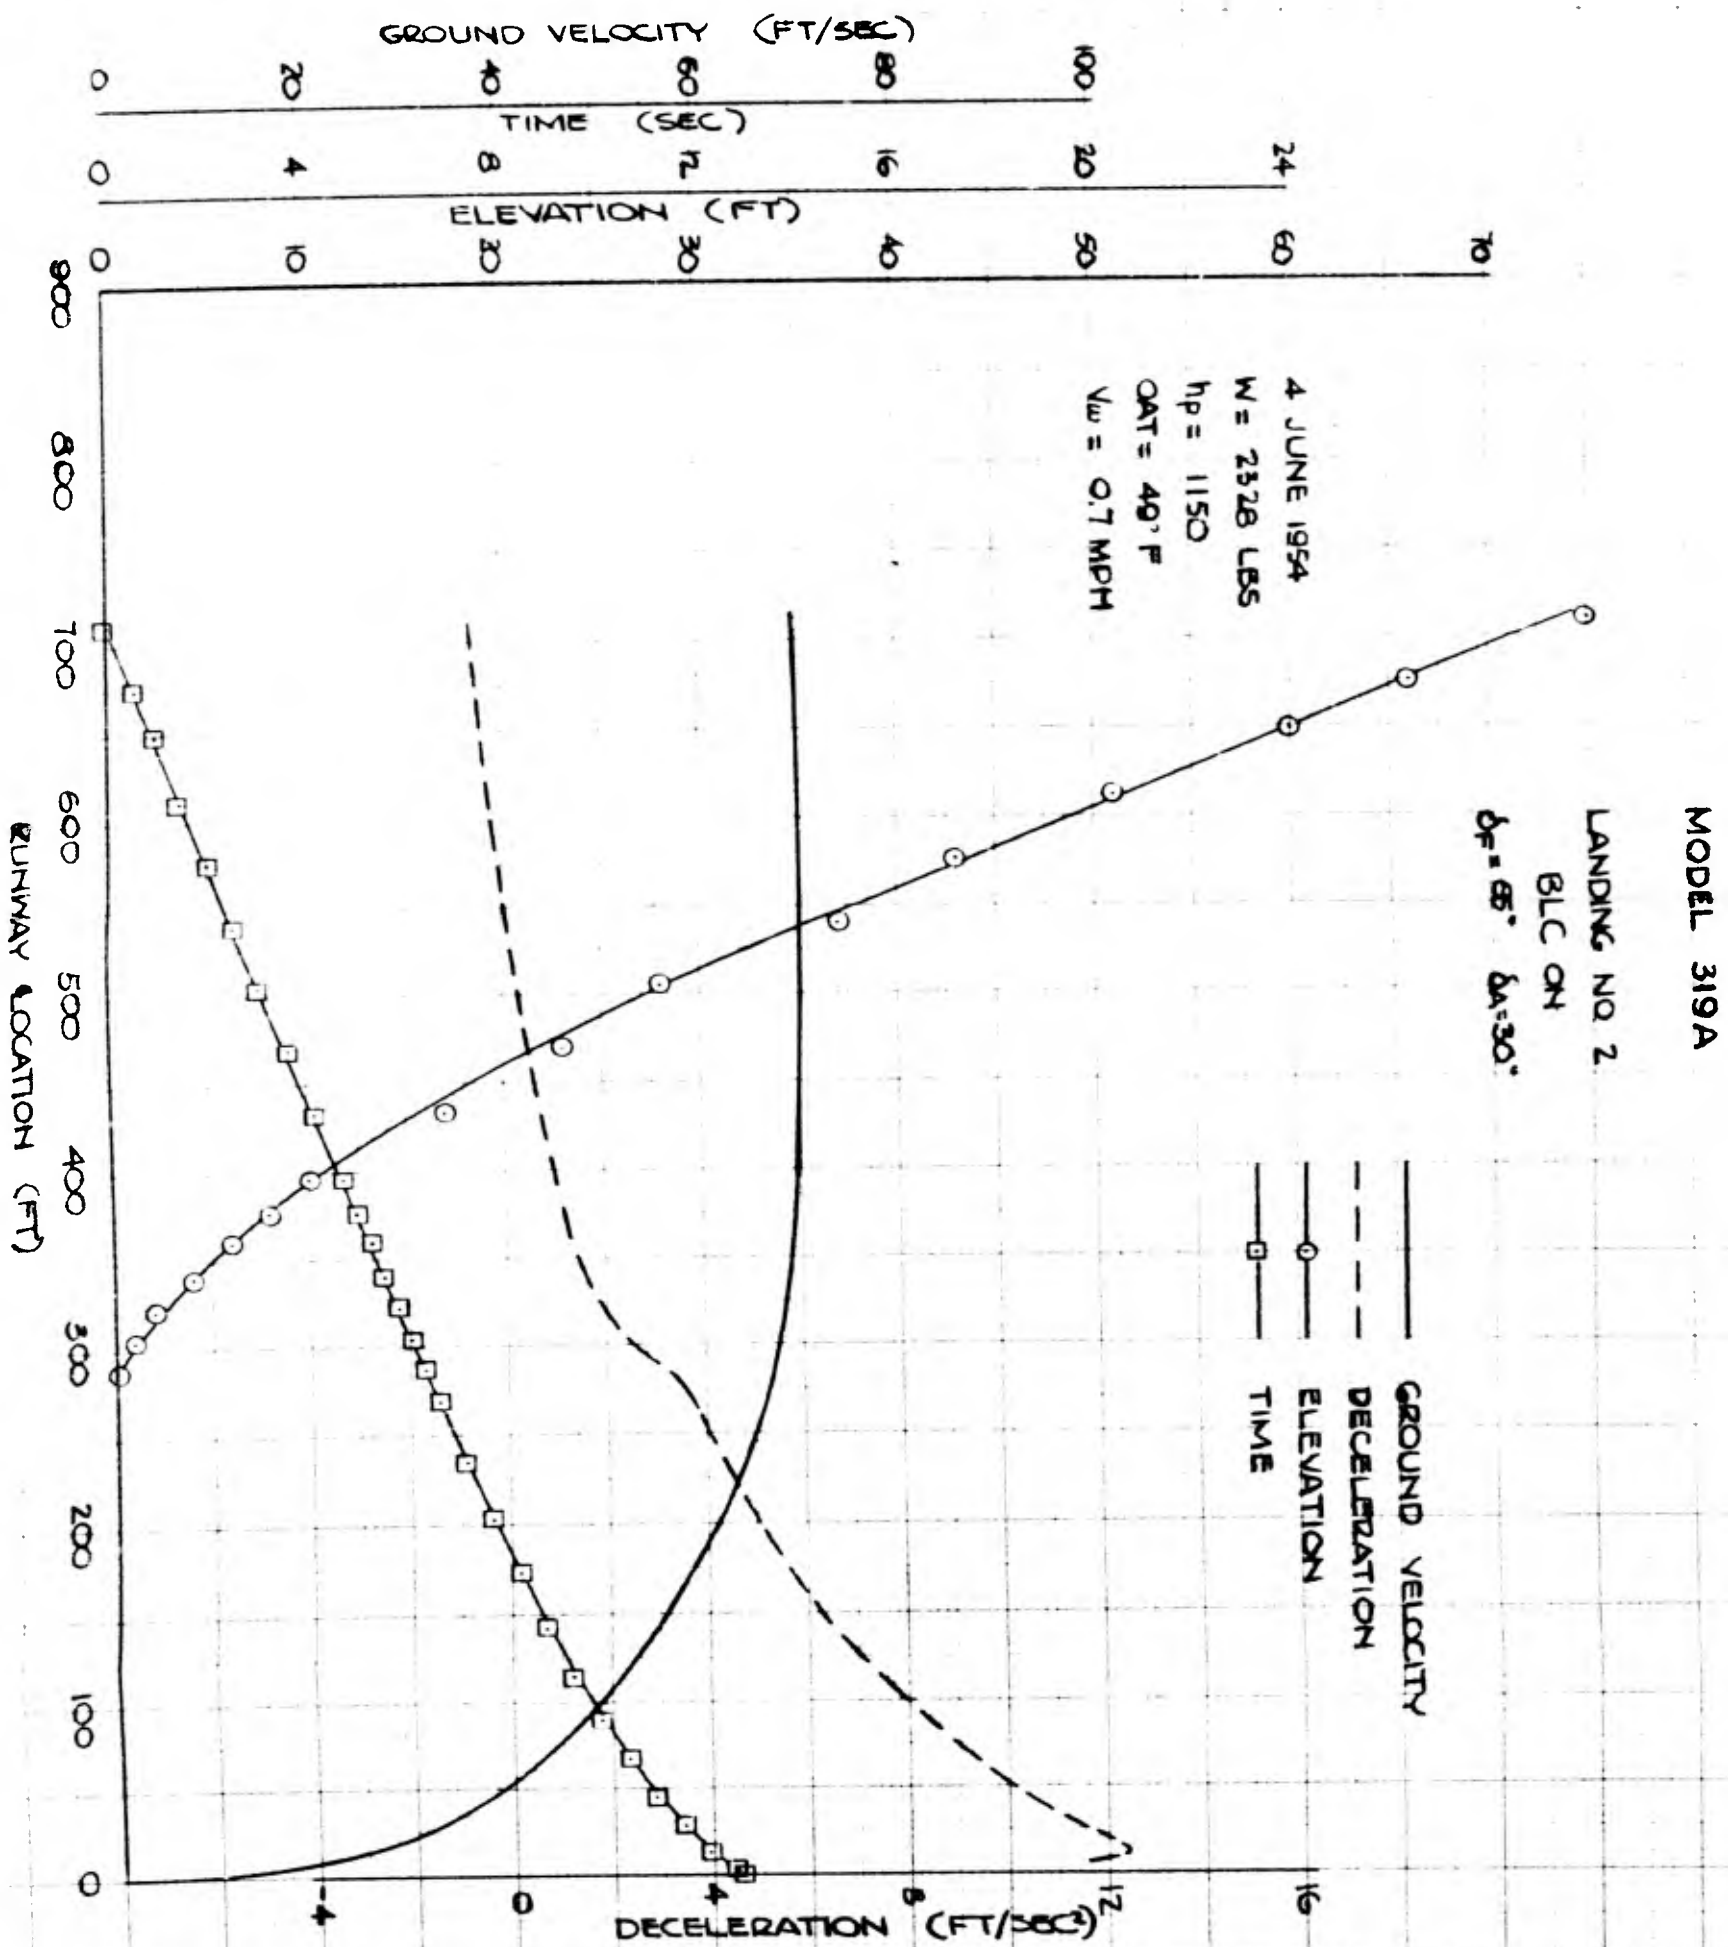


MODEL 319A


LANDING NO. 3

8LC ON

$\delta F = 88^\circ$ $\delta A = 30^\circ$


4 JUNE 1954
W = 2317 LBS
h_p = 1150
OAT = 50°F
V₀ = 1.8 MPH

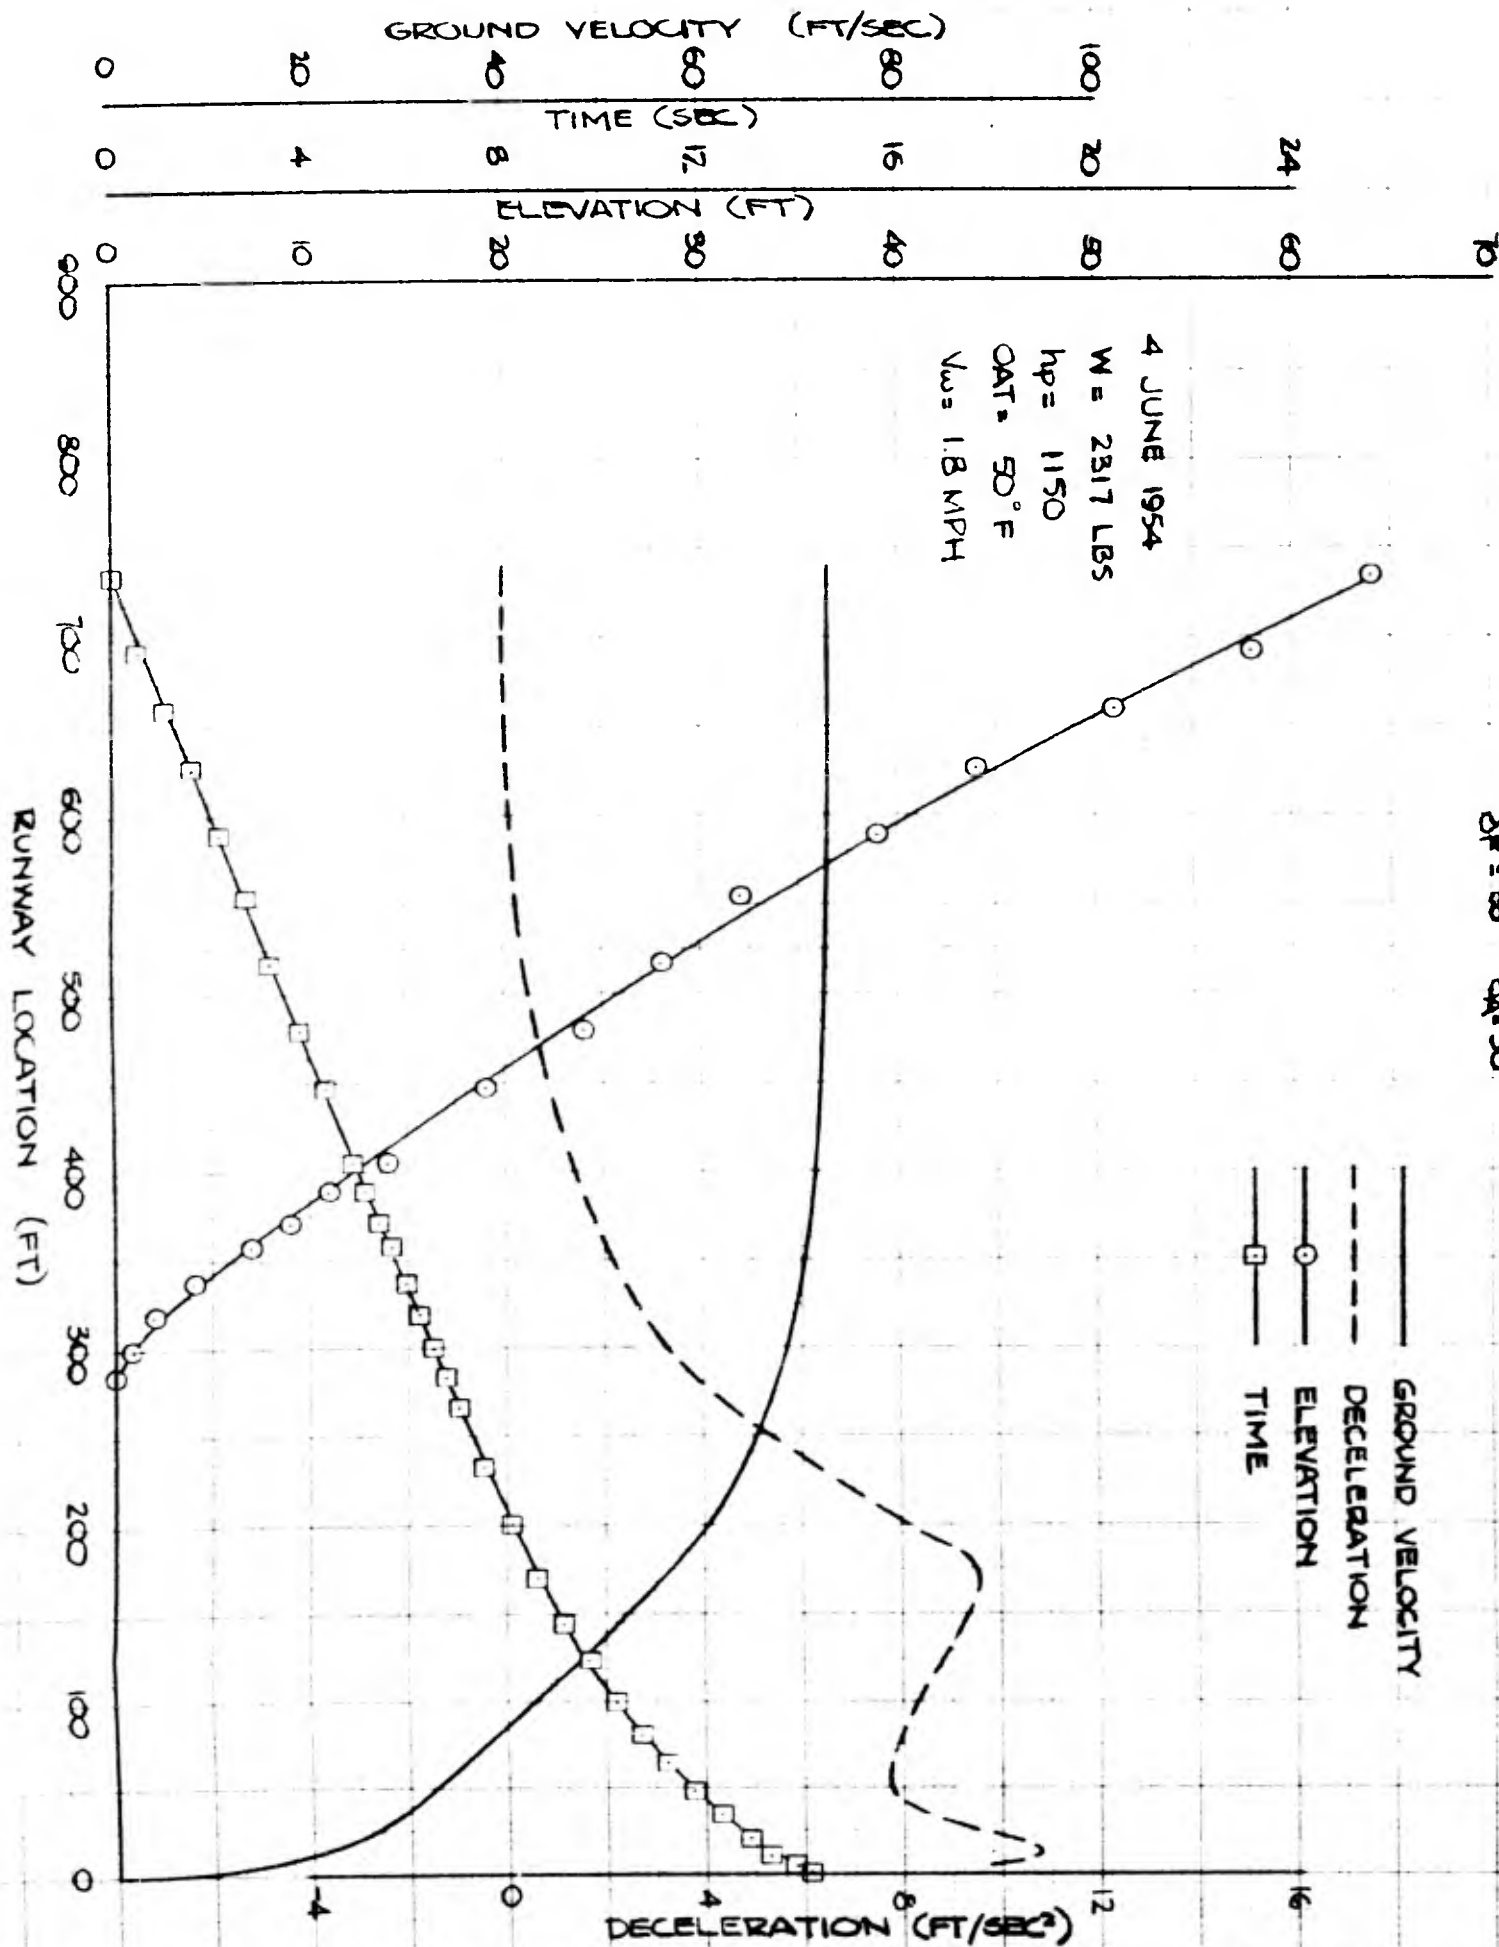

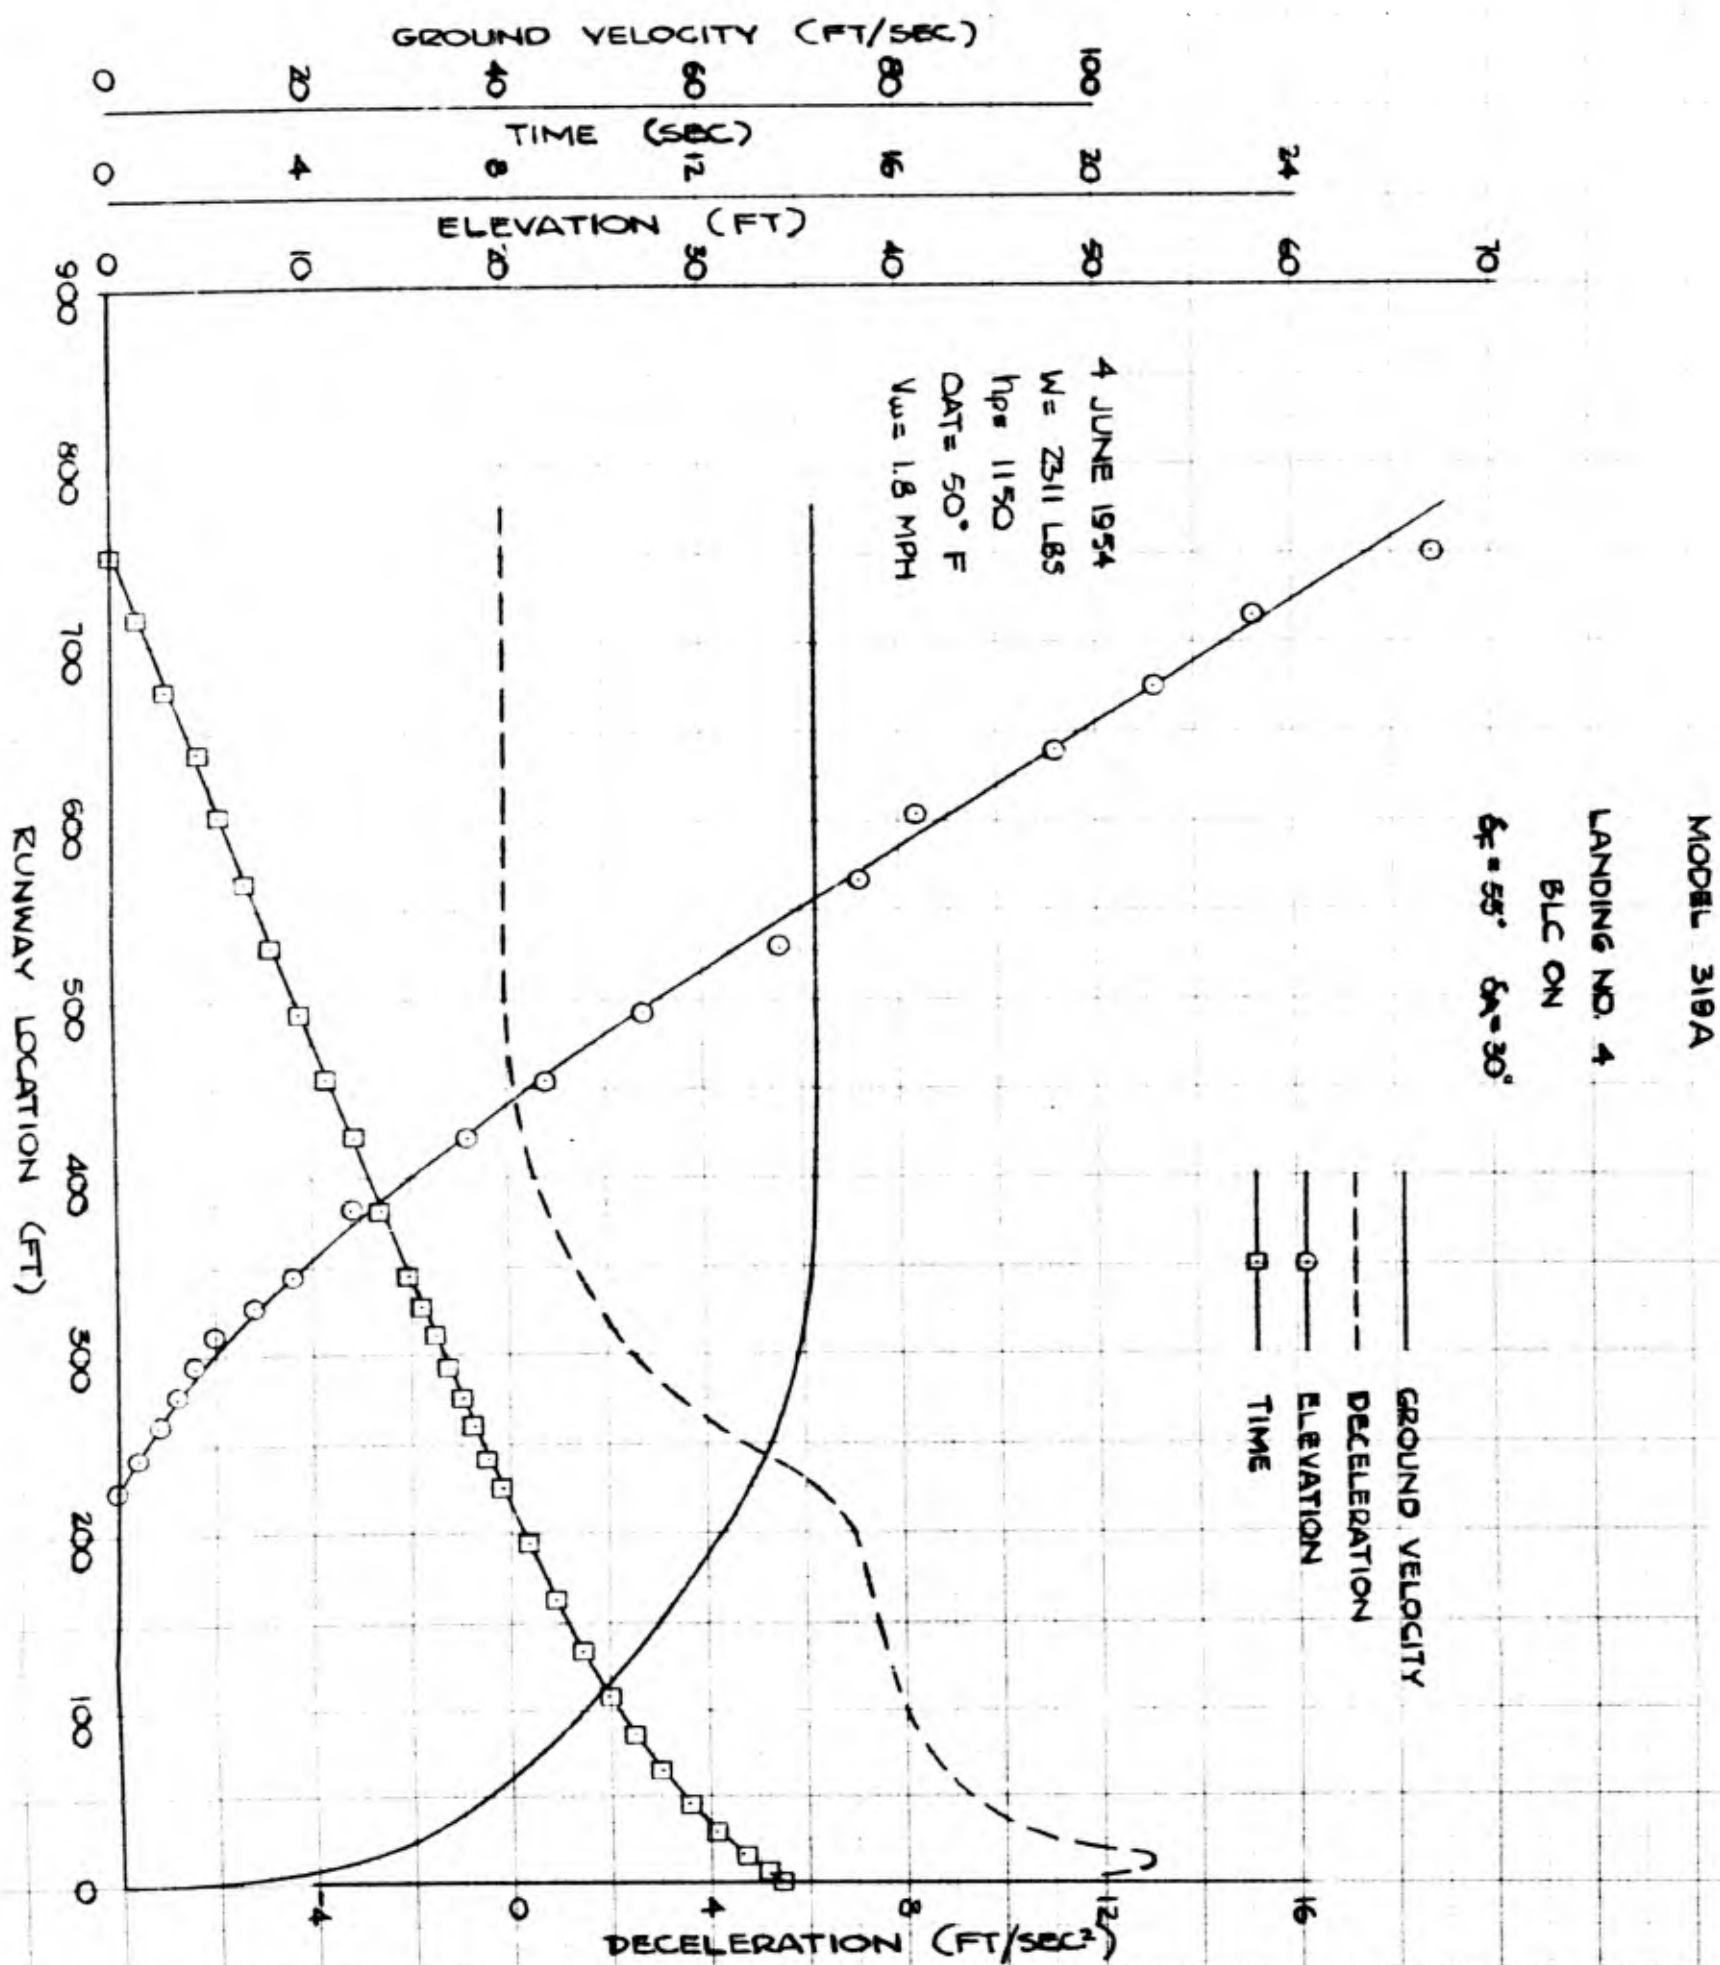


CONFIDENTIAL


PAGE 43
FIG. 23

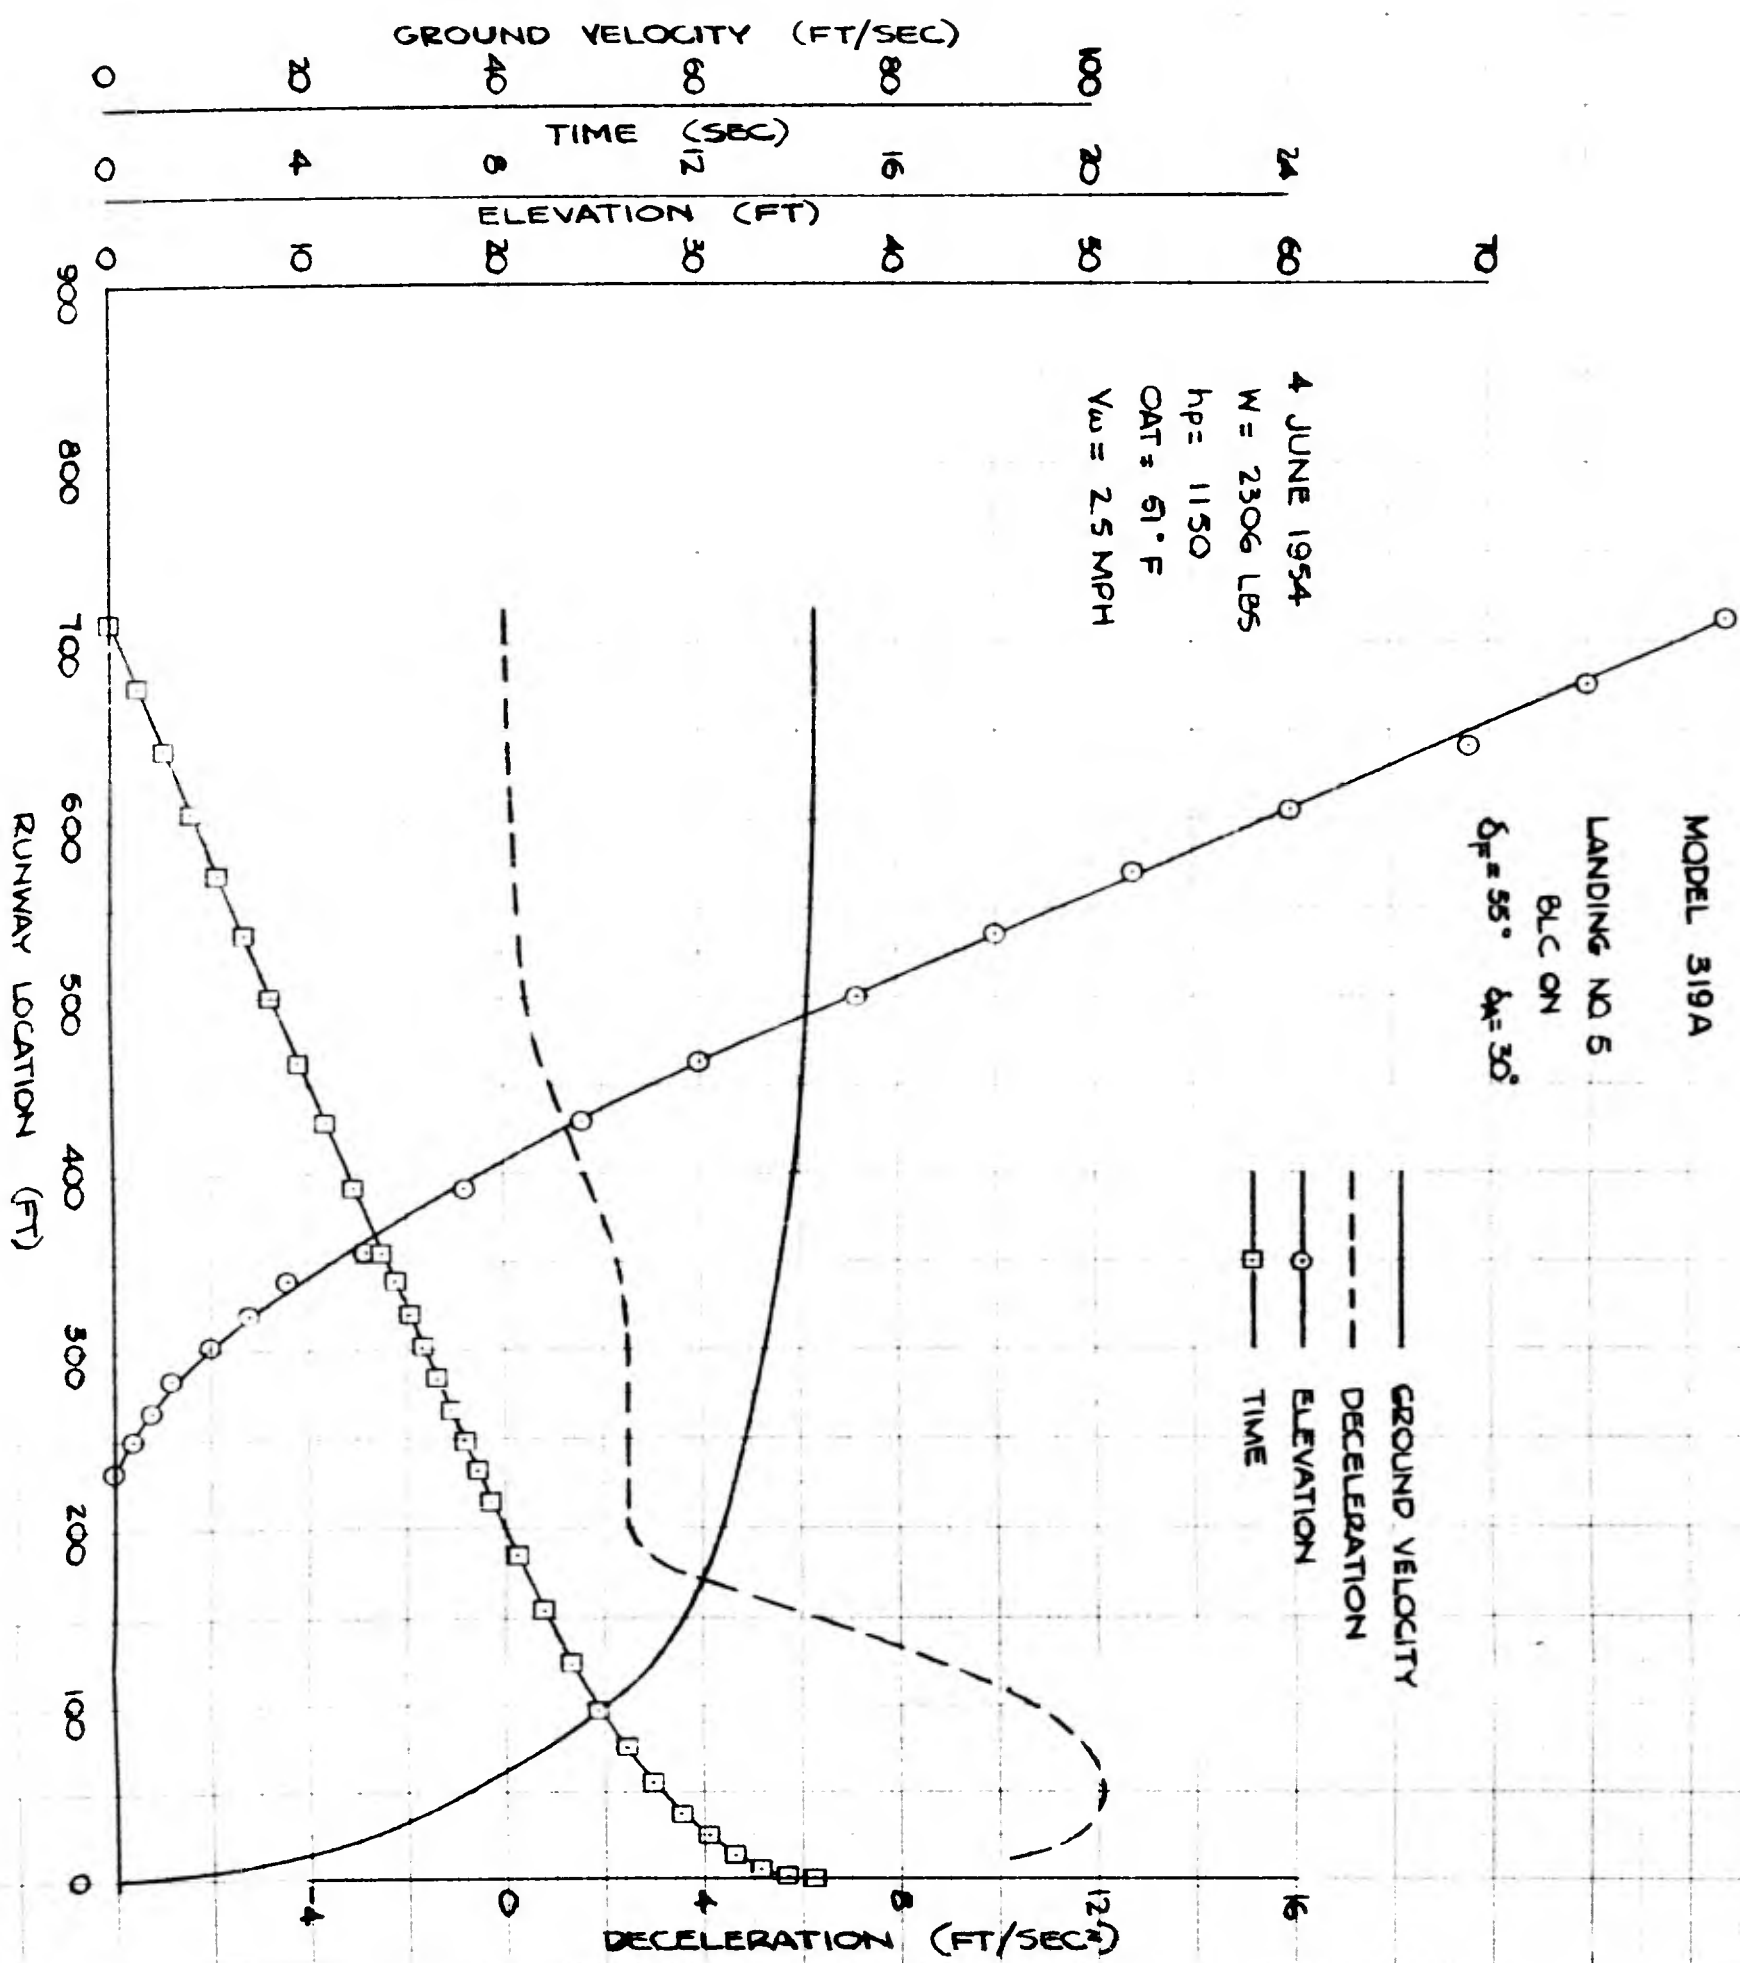



CONFIDENTIAL


3345
K

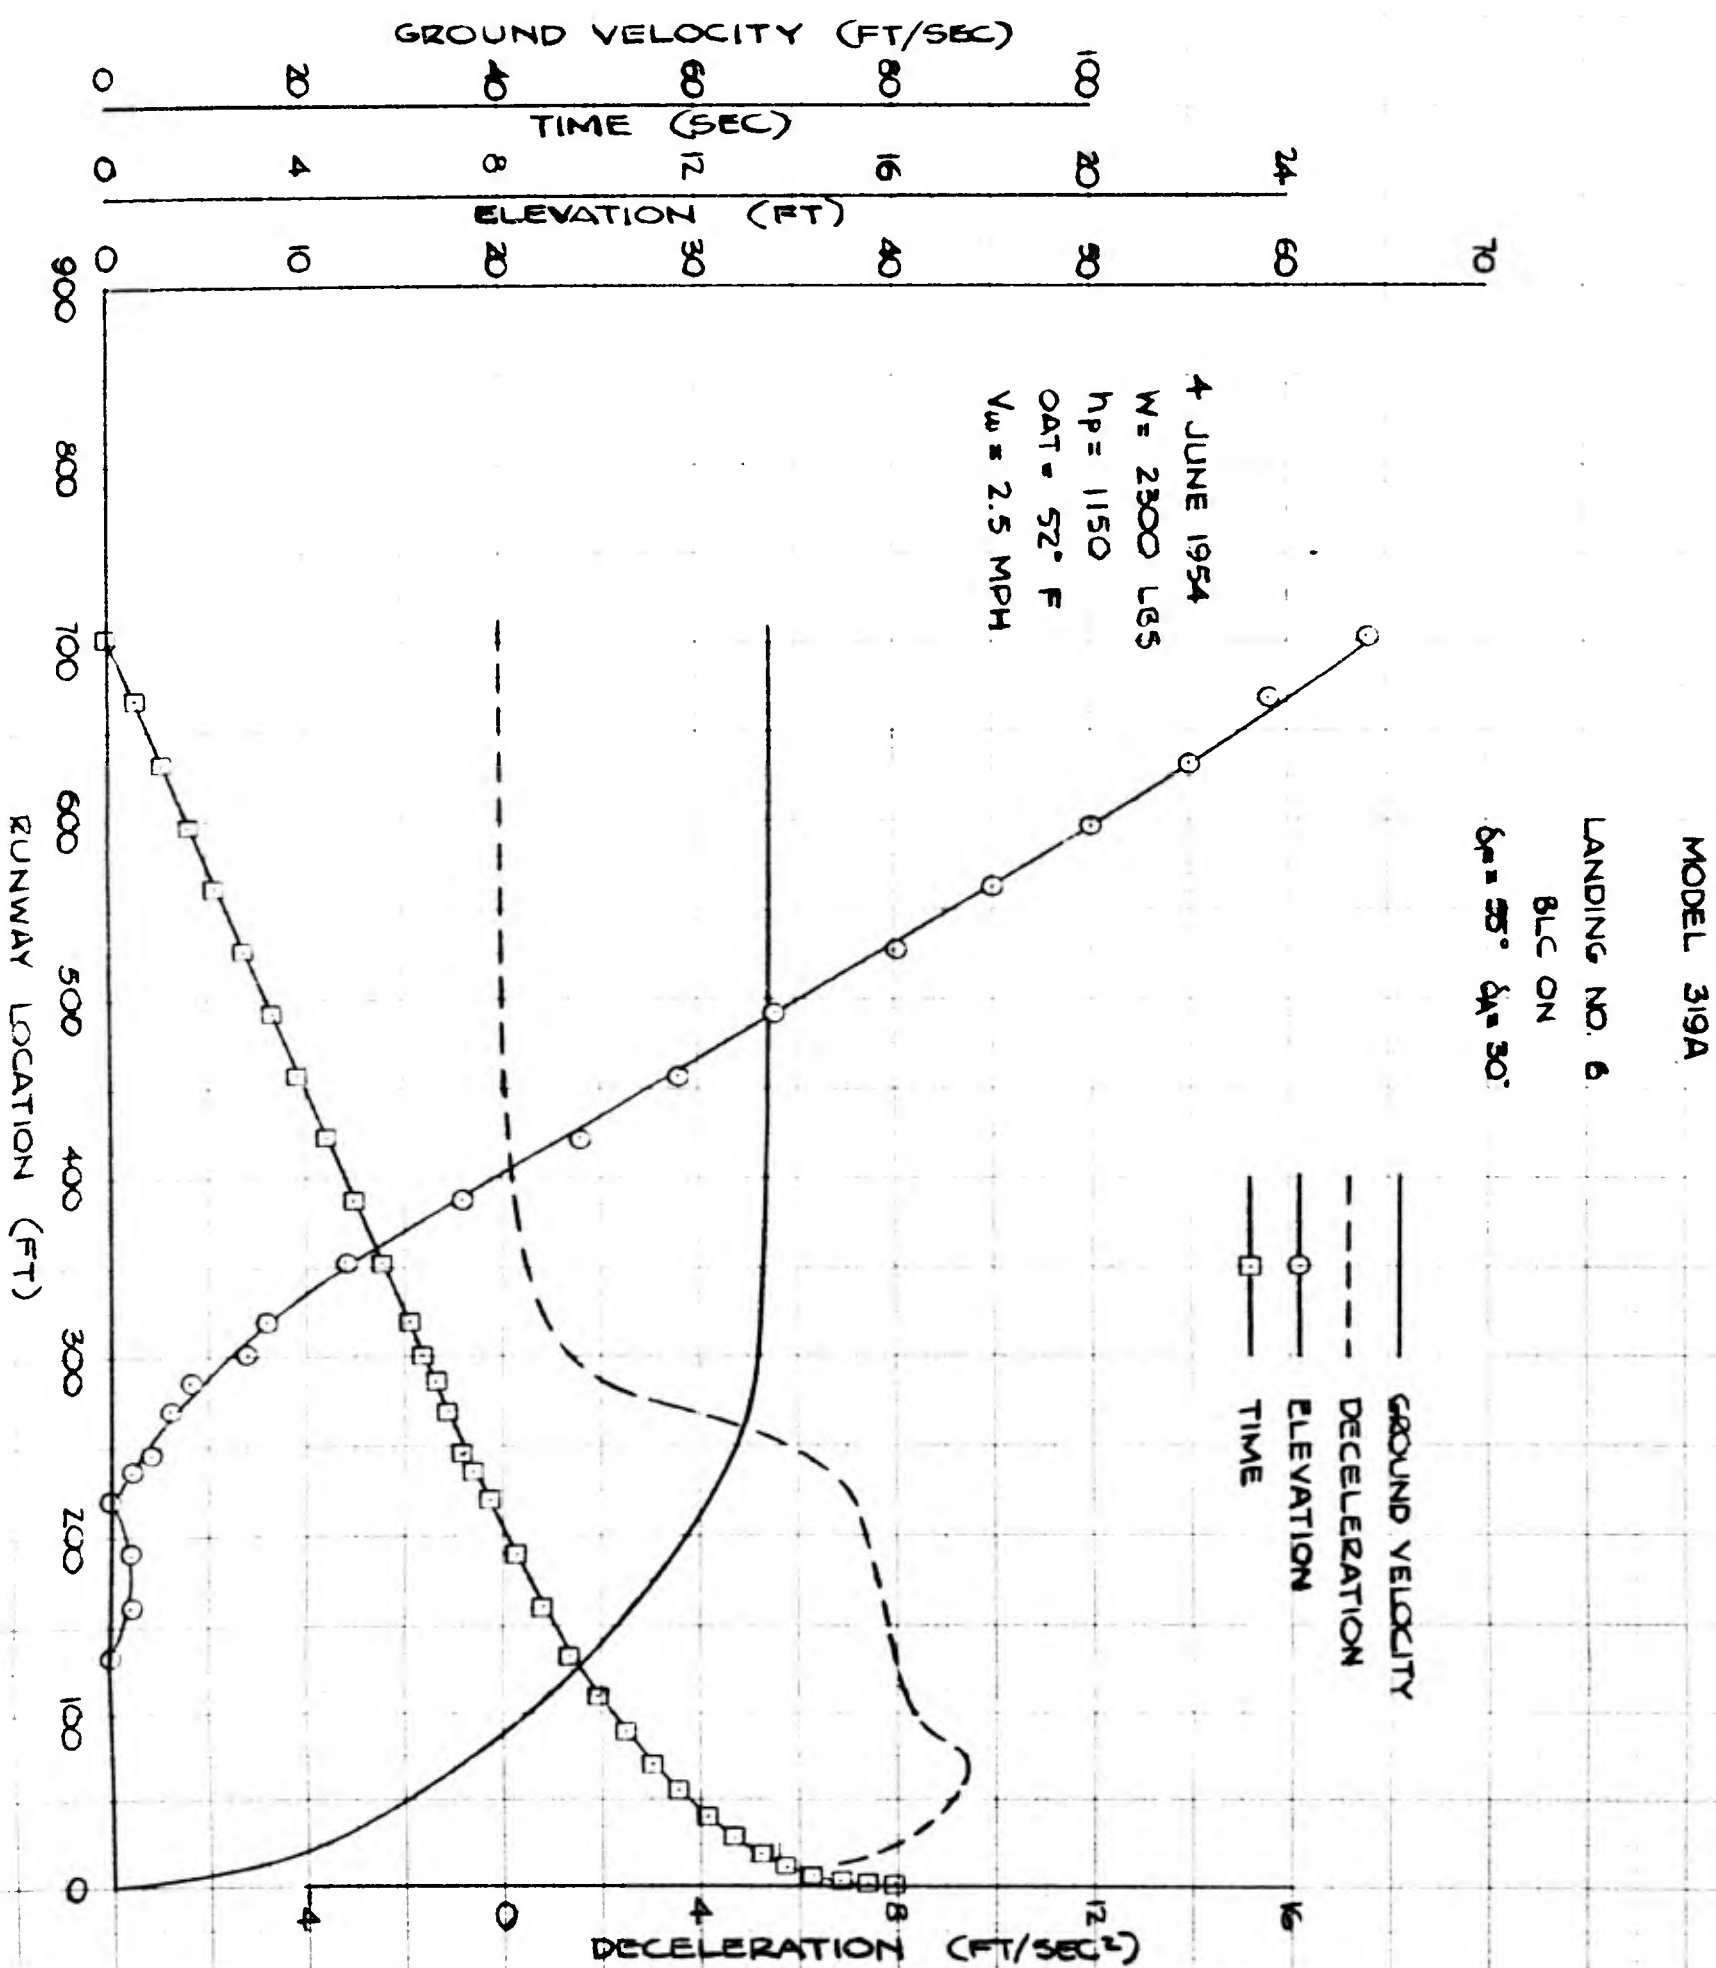


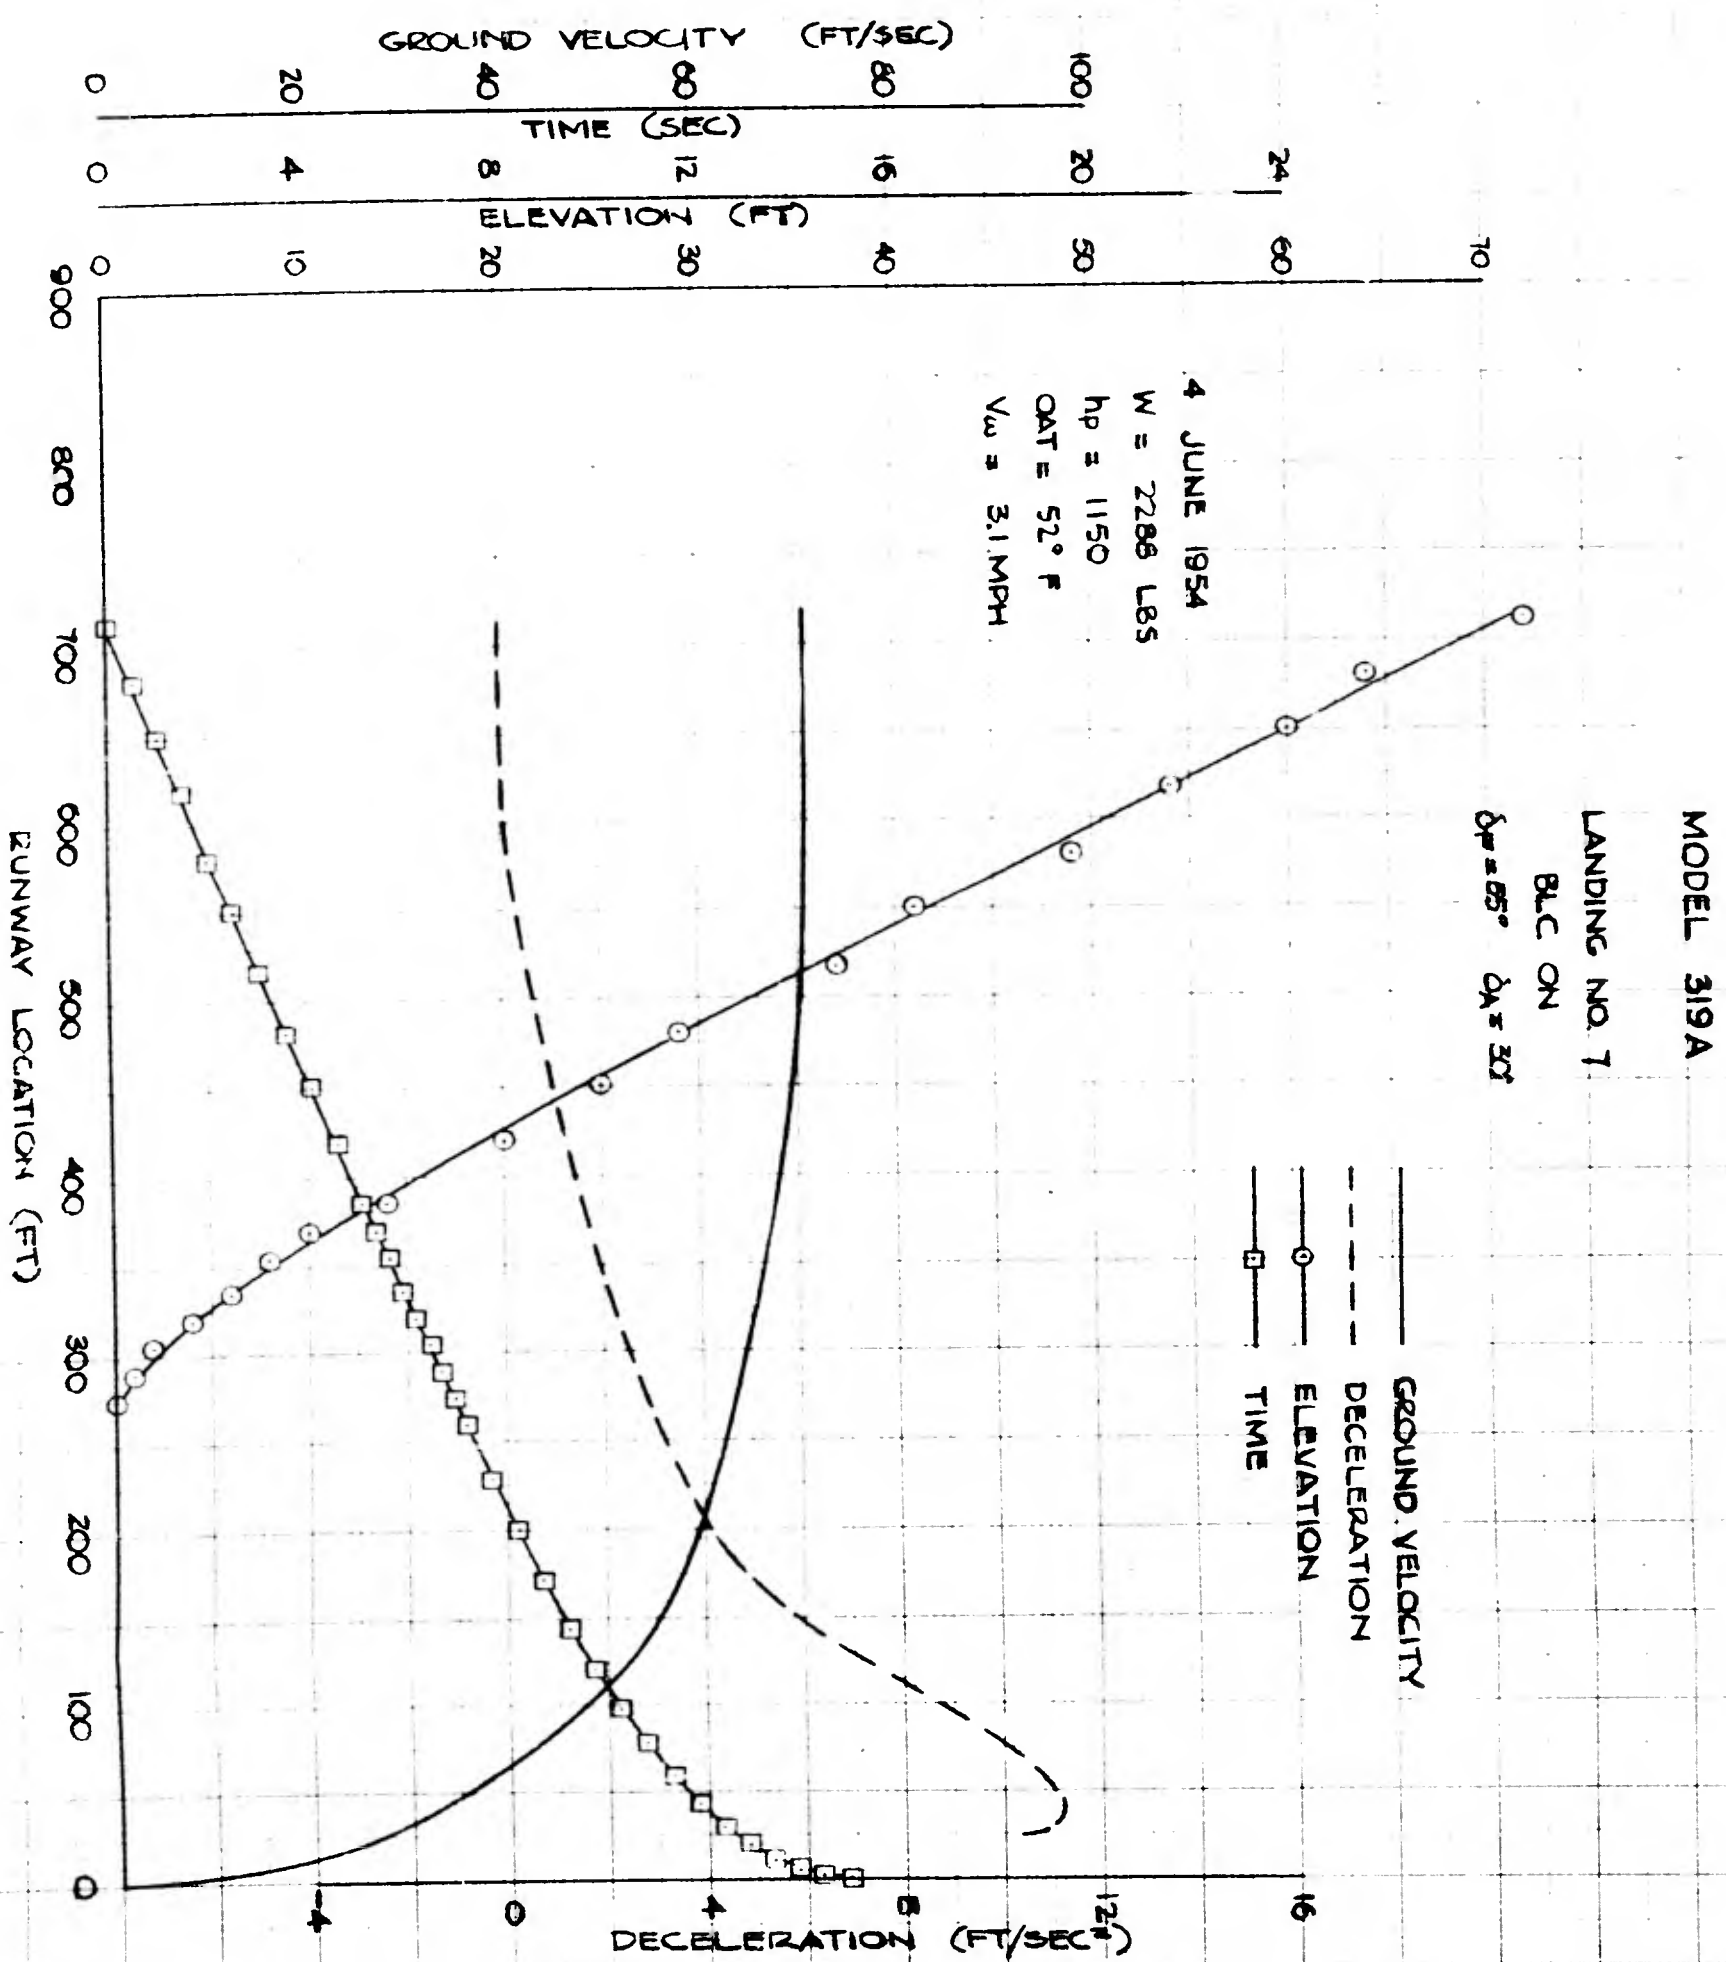

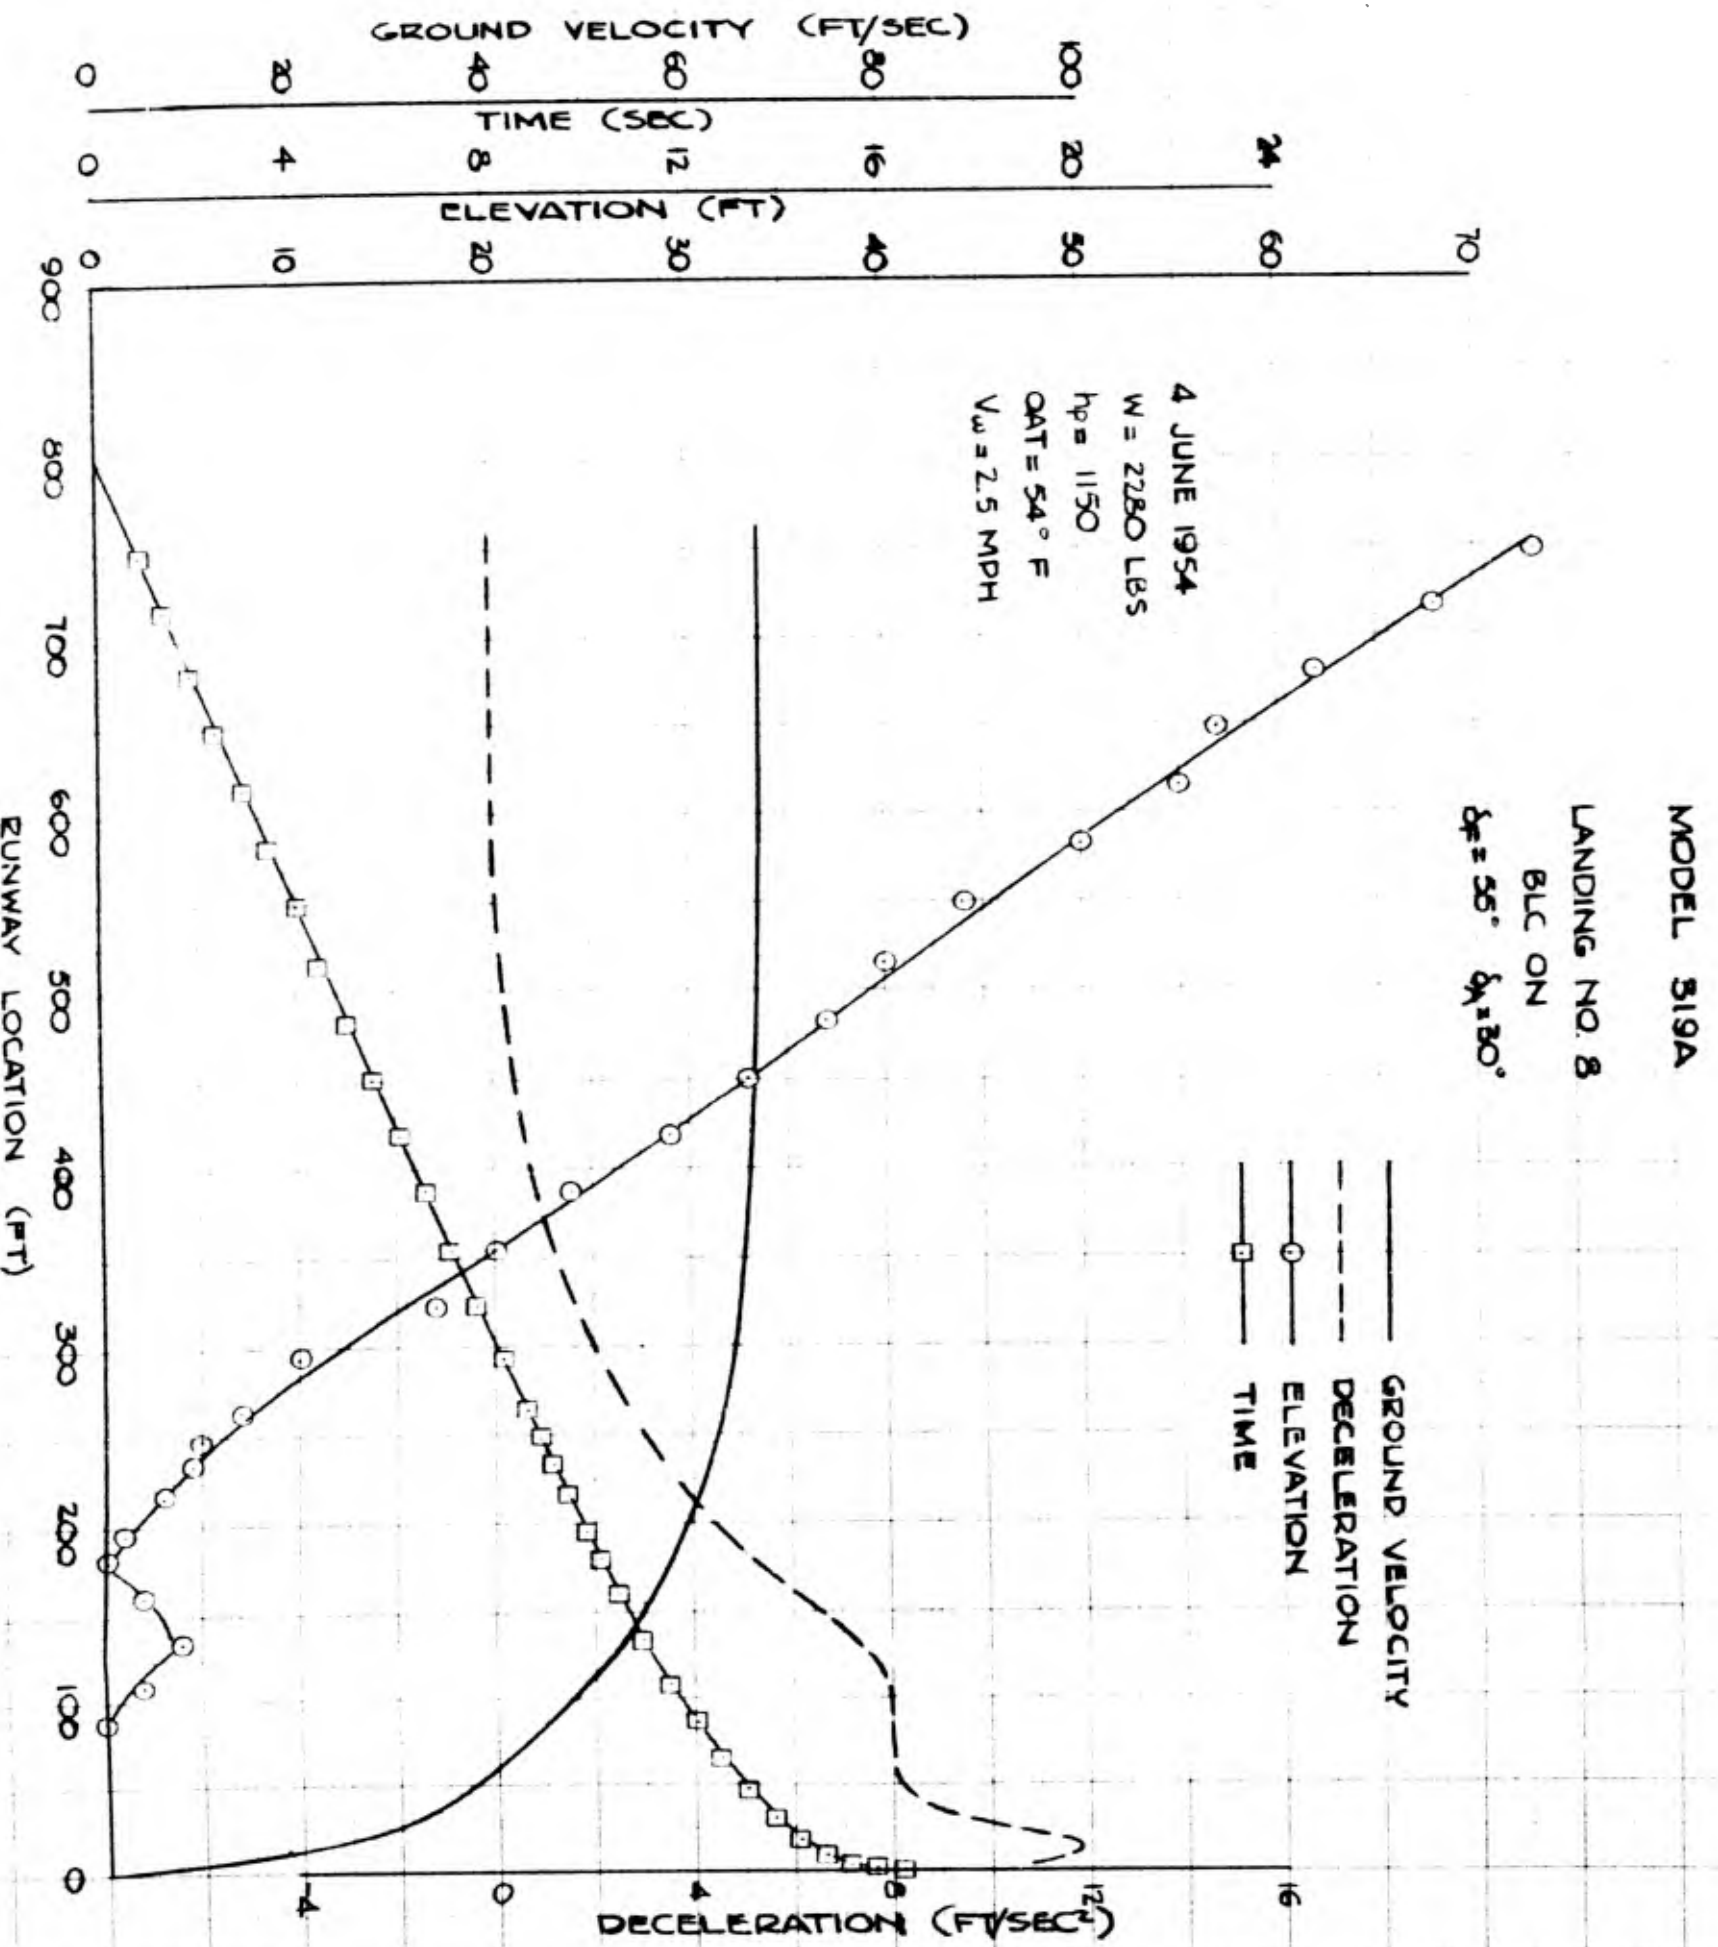

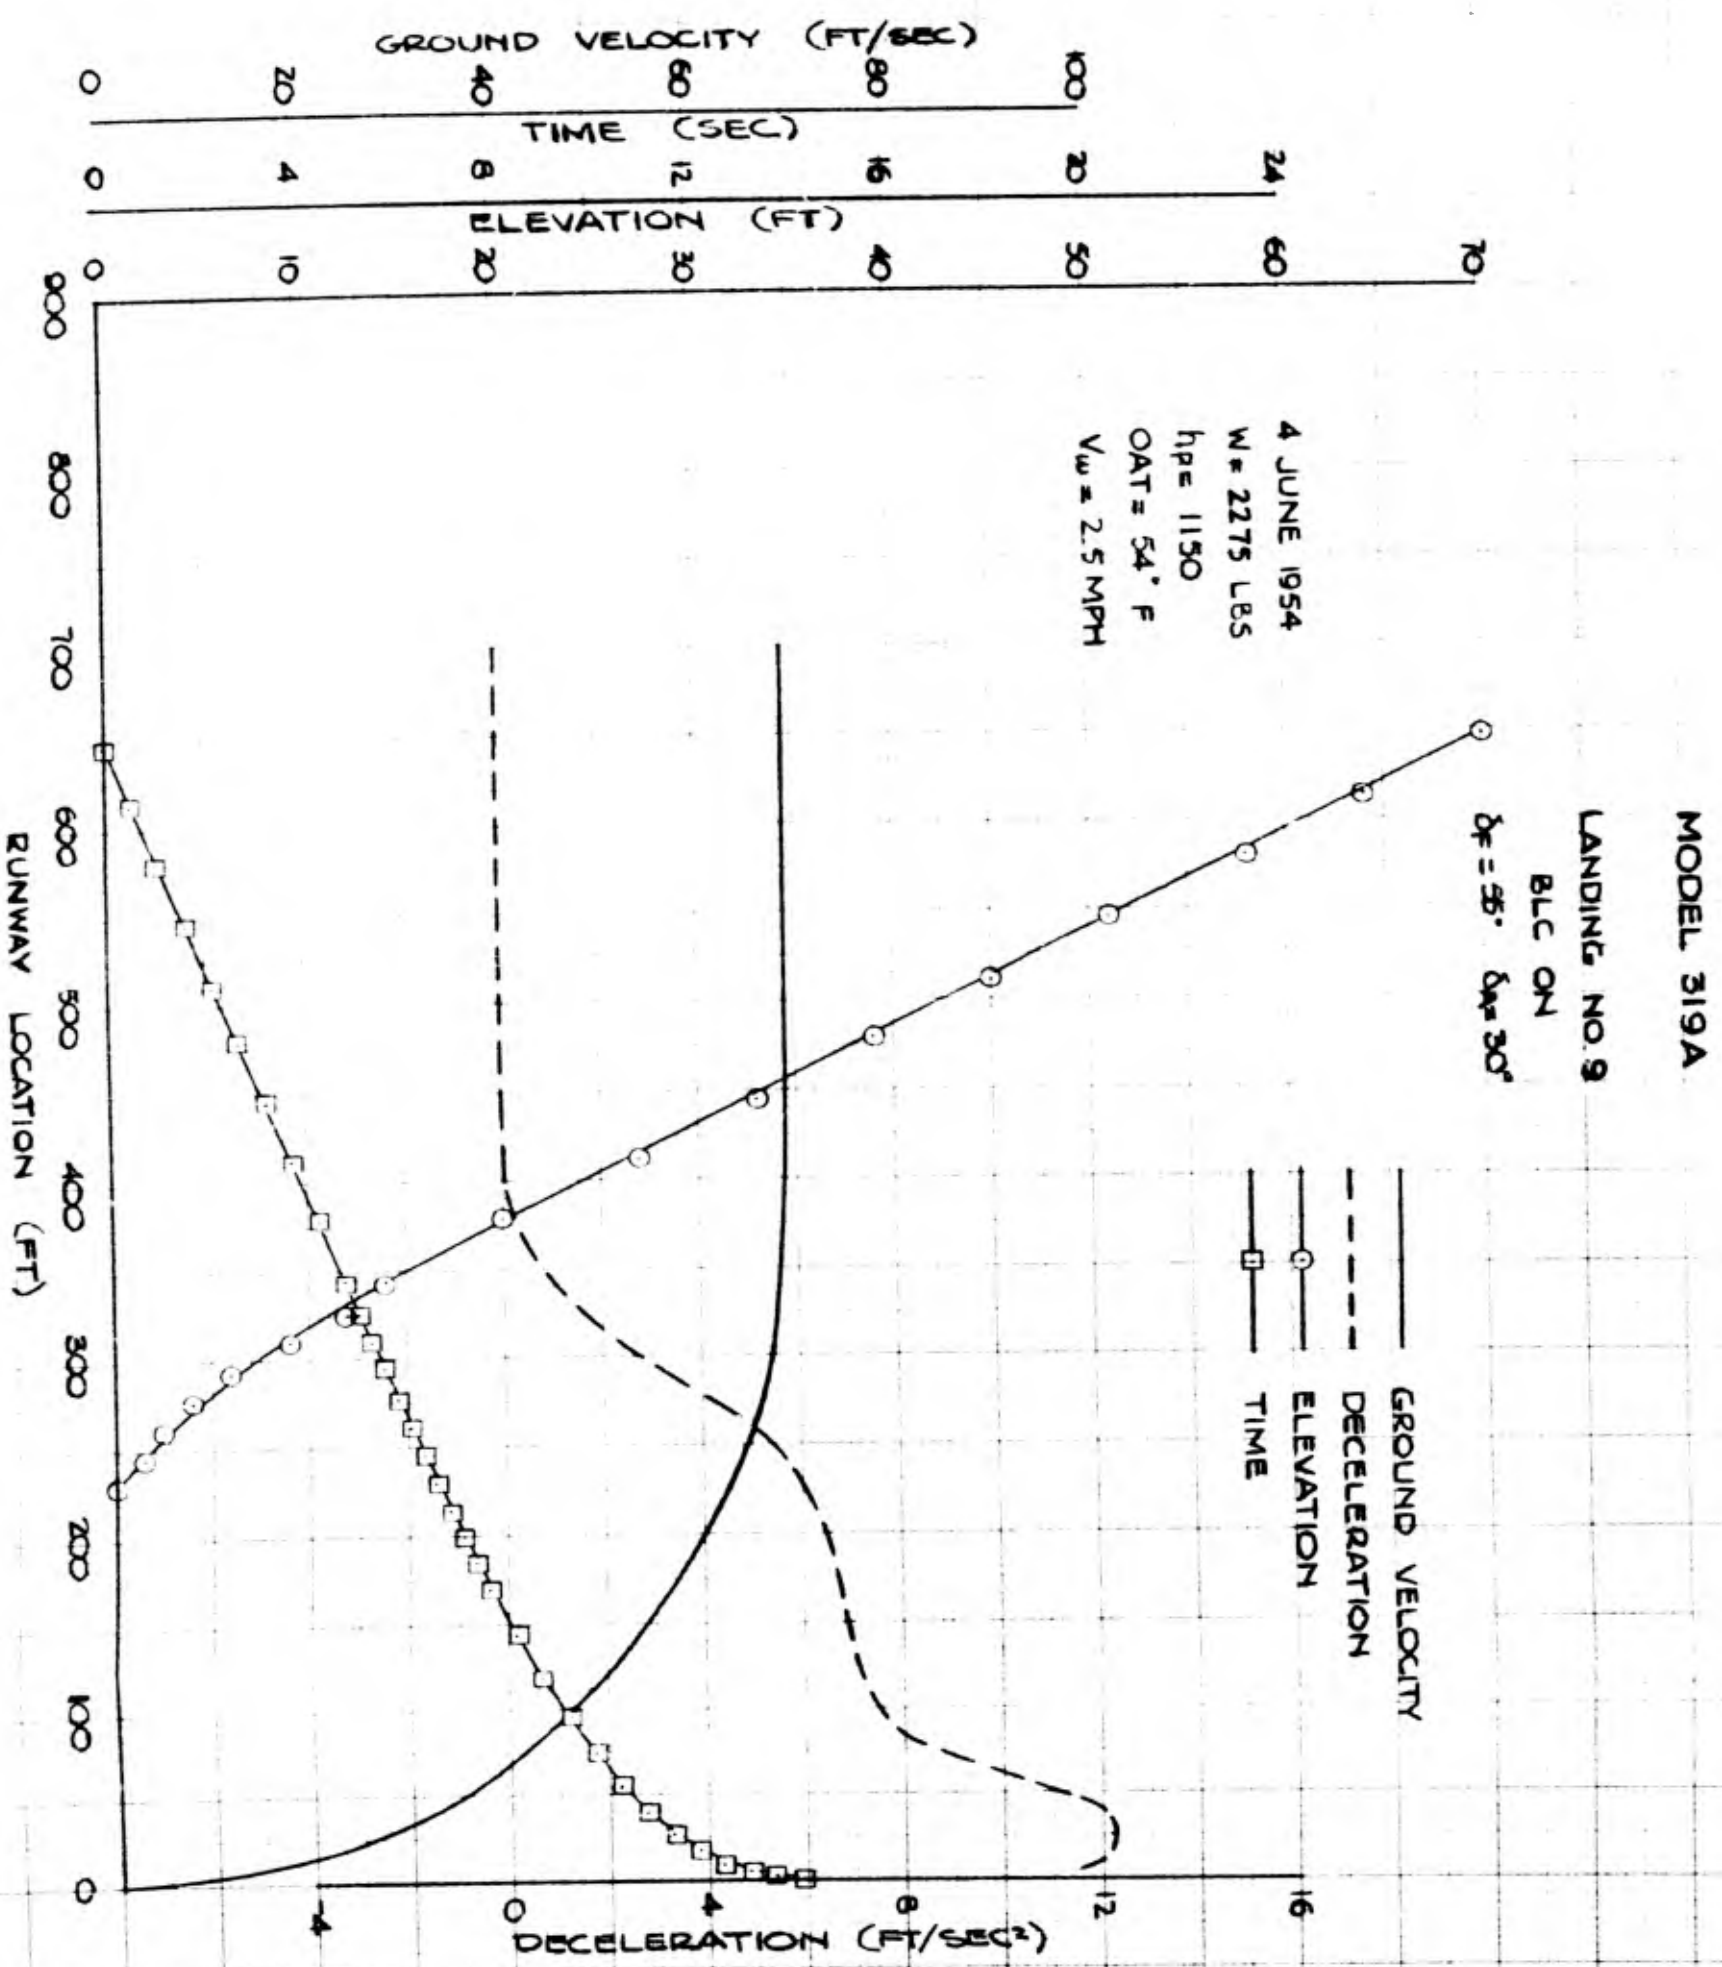


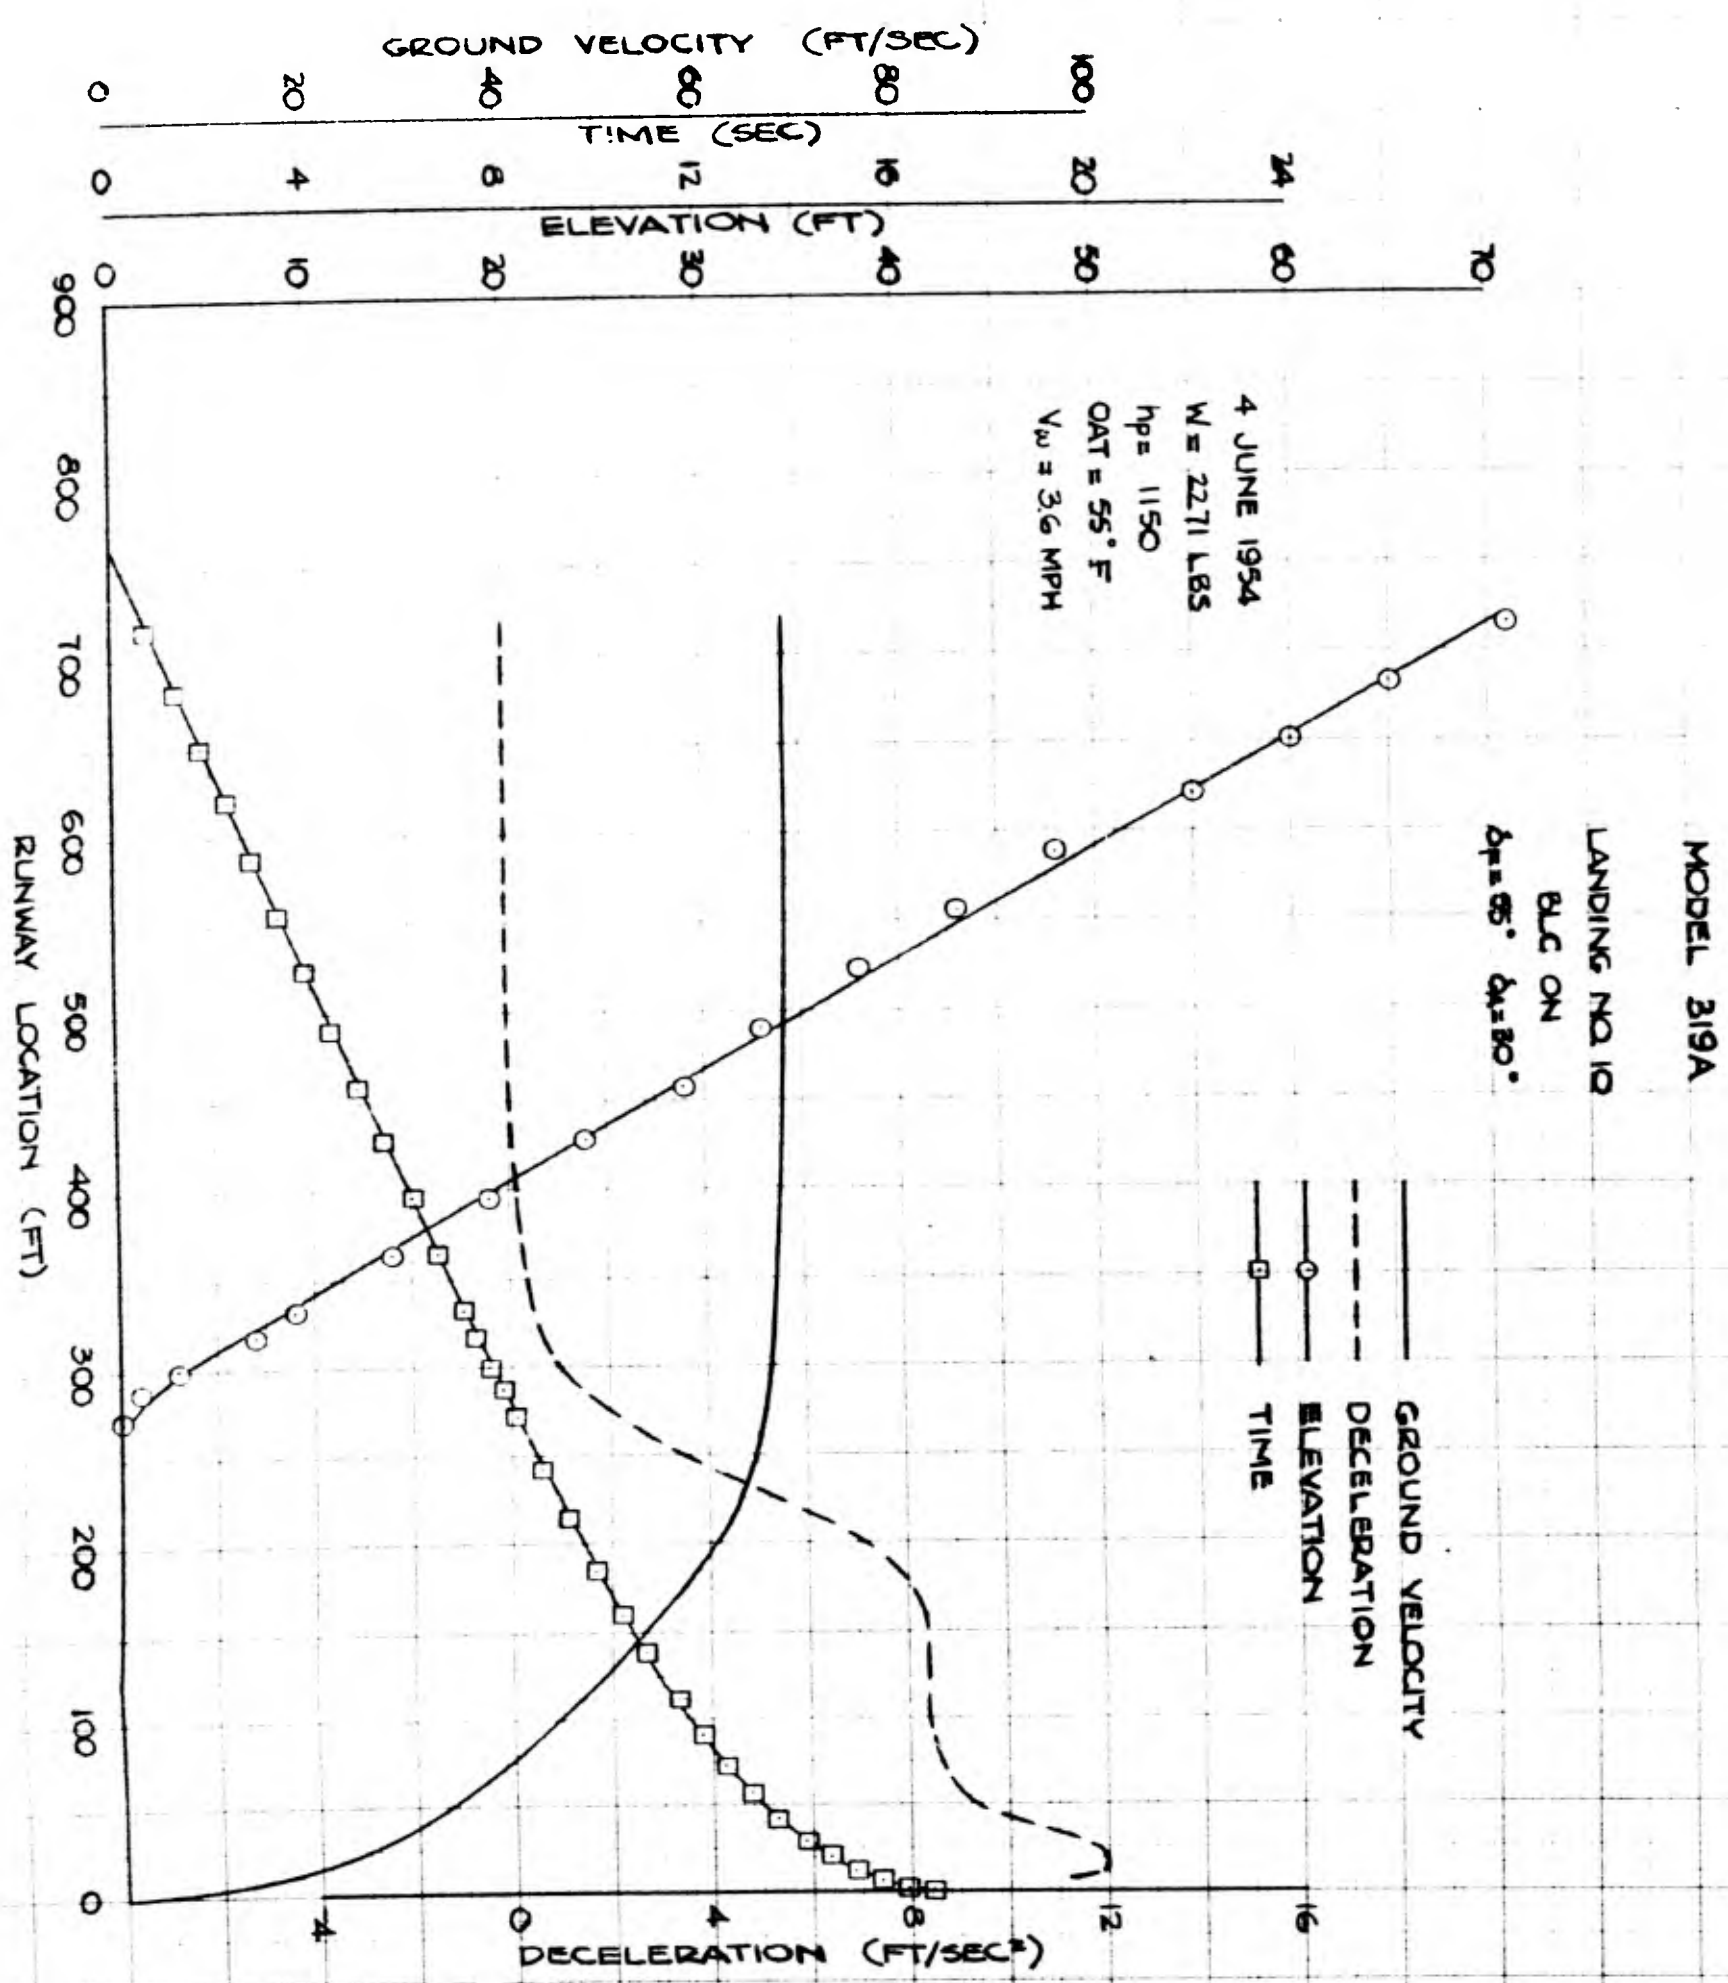

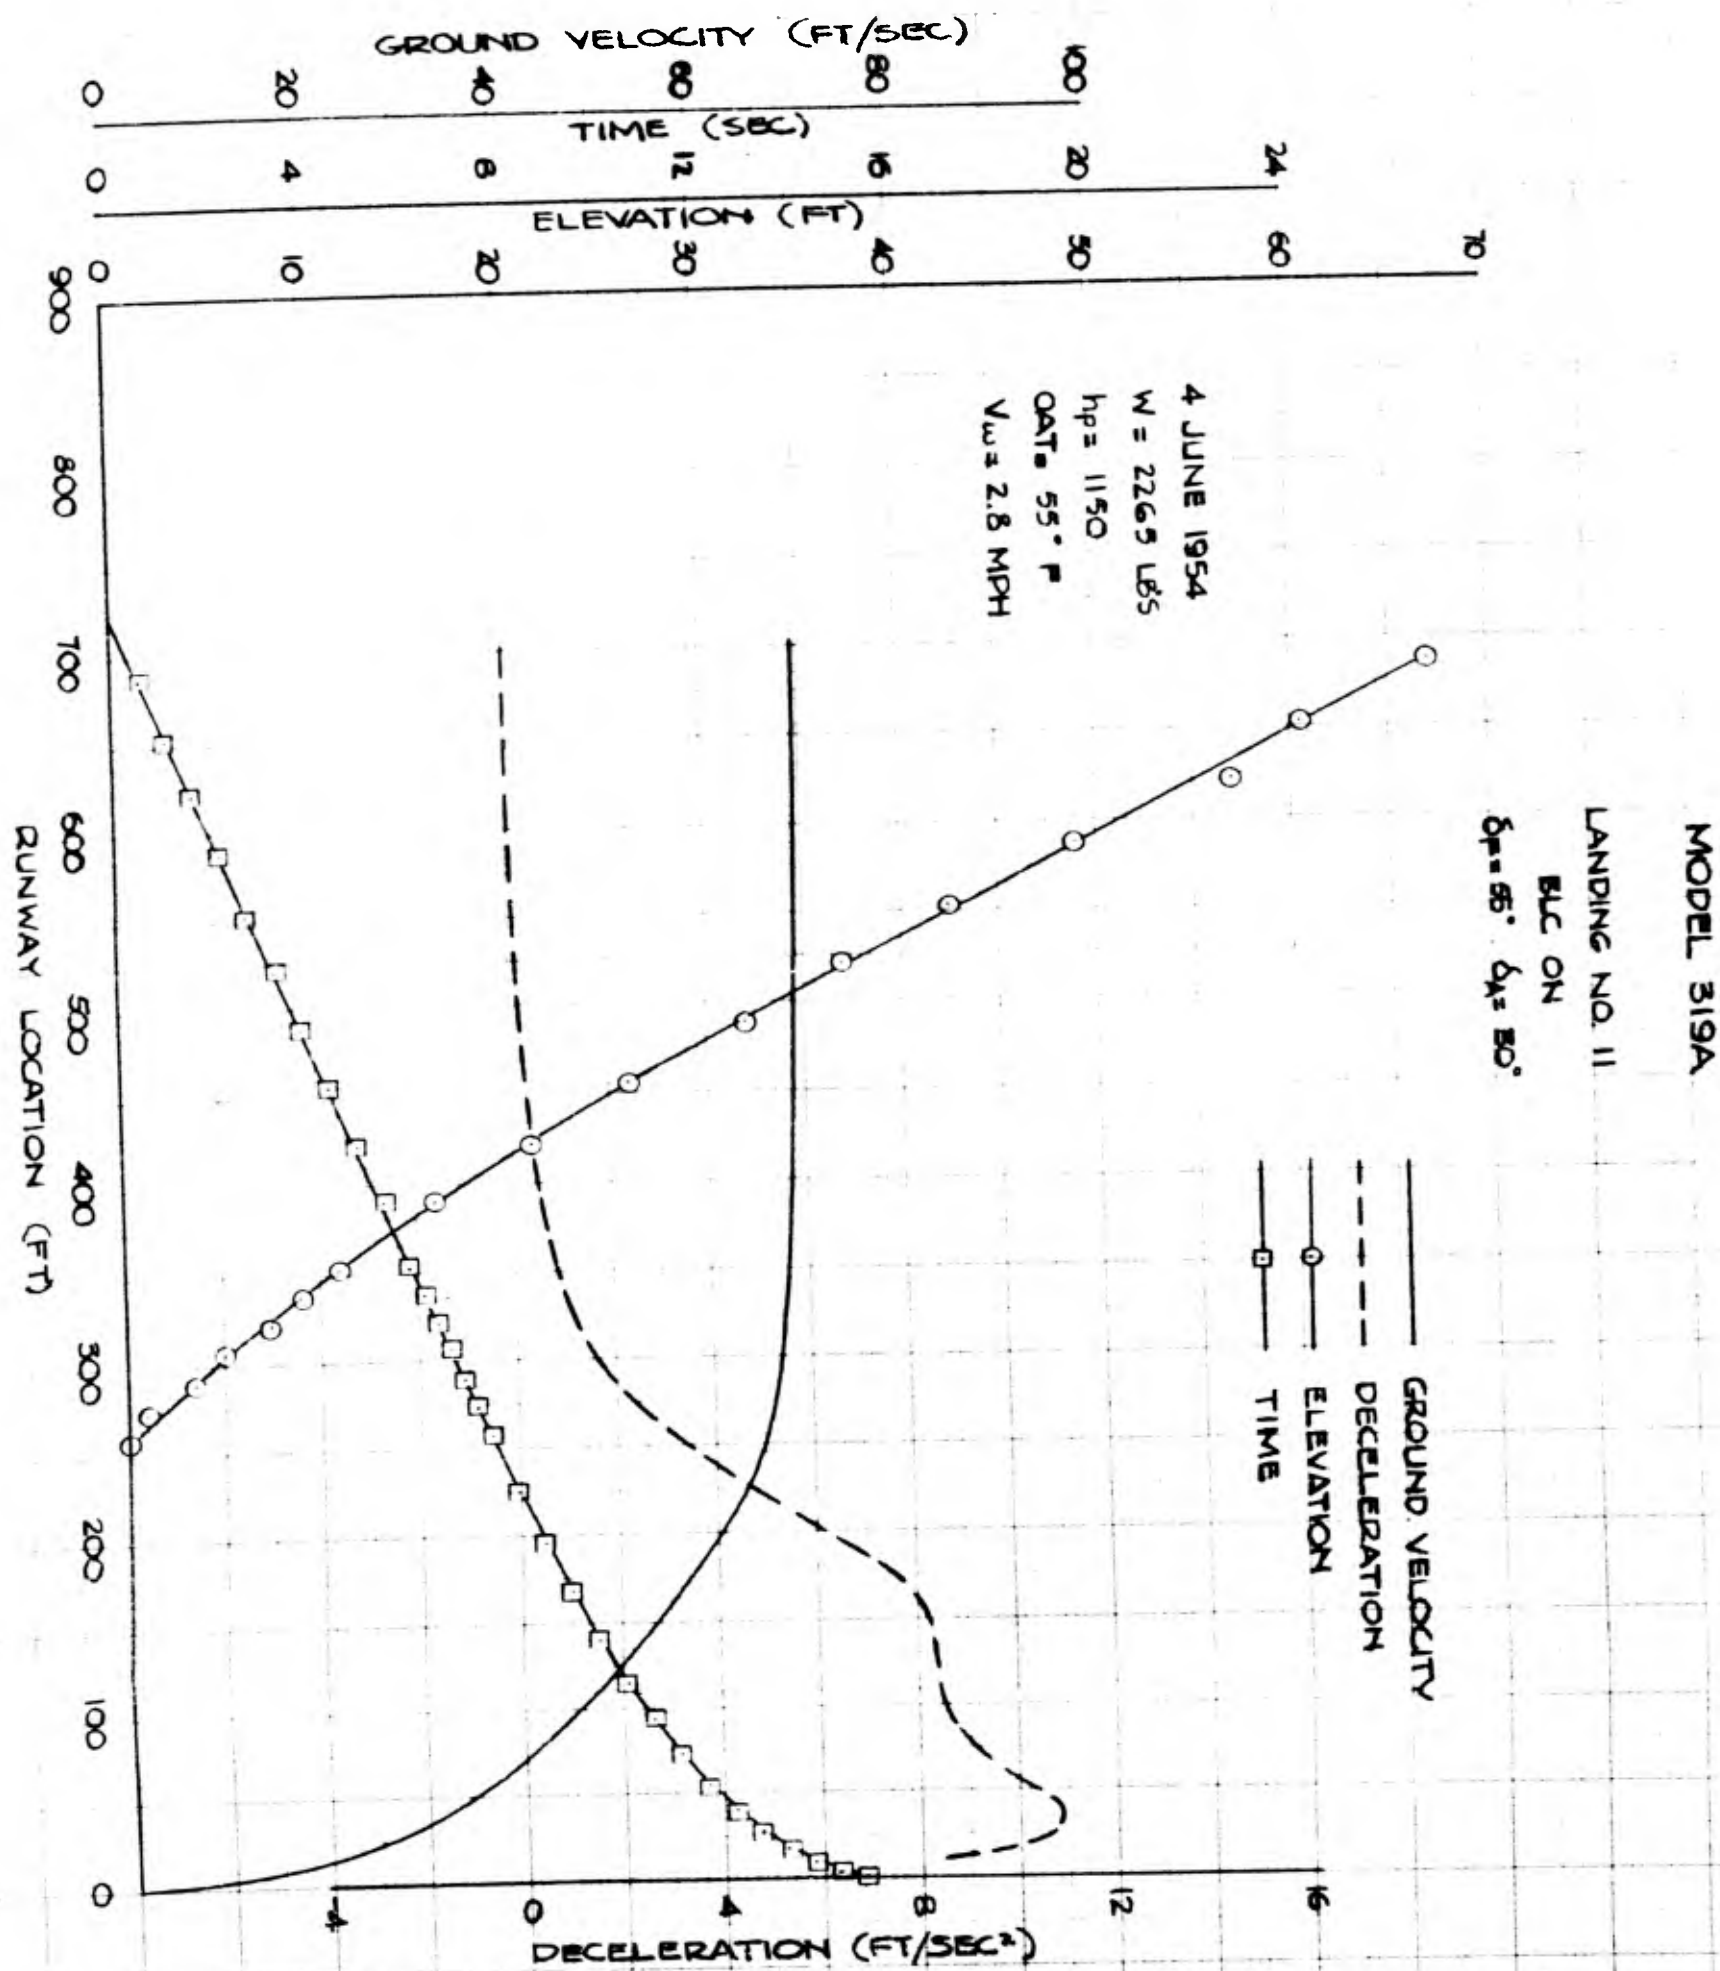

CONFIDENTIAL

PAGE 50
FIG. 30

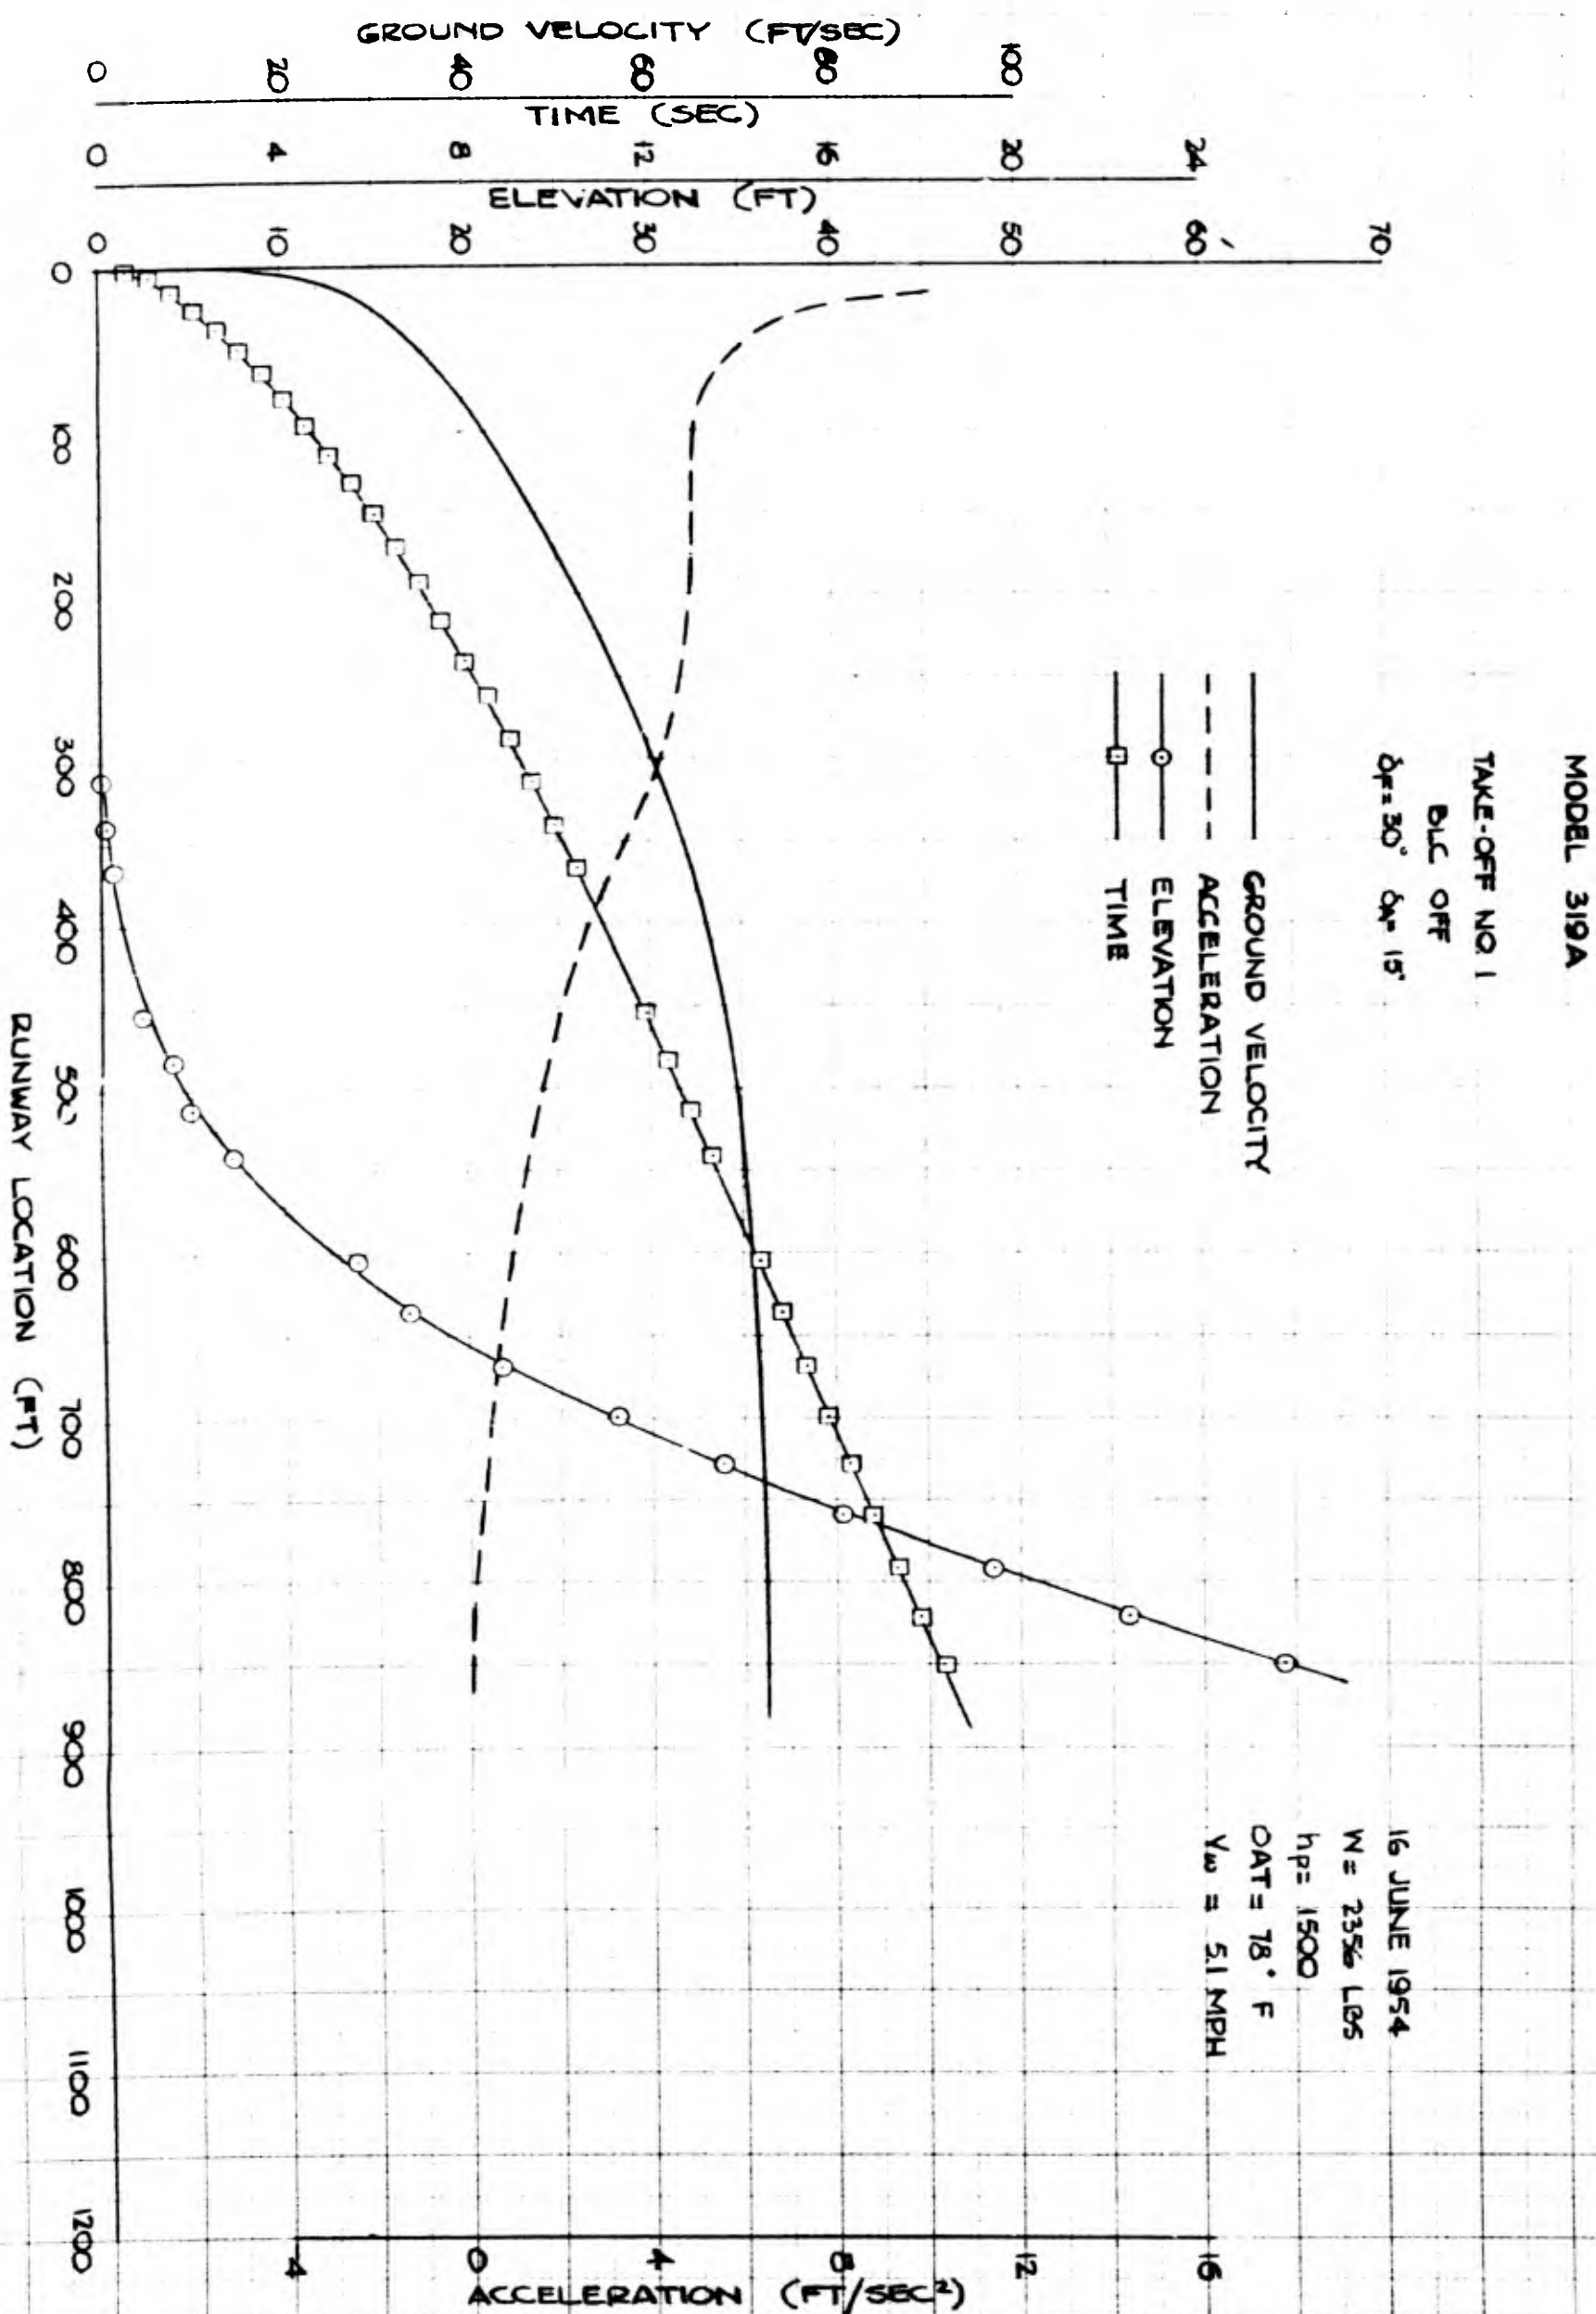

CONFIDENTIAL


MODEL 219A

TAKE-OFF NO. 2

BLC OFF

$\phi_r = 30^\circ$ $\phi_H = 15^\circ$

16 JUNE 1954
W = 2352 LBS
hp = 1500
OAT = 78° F
V_W = 3.3 MPH

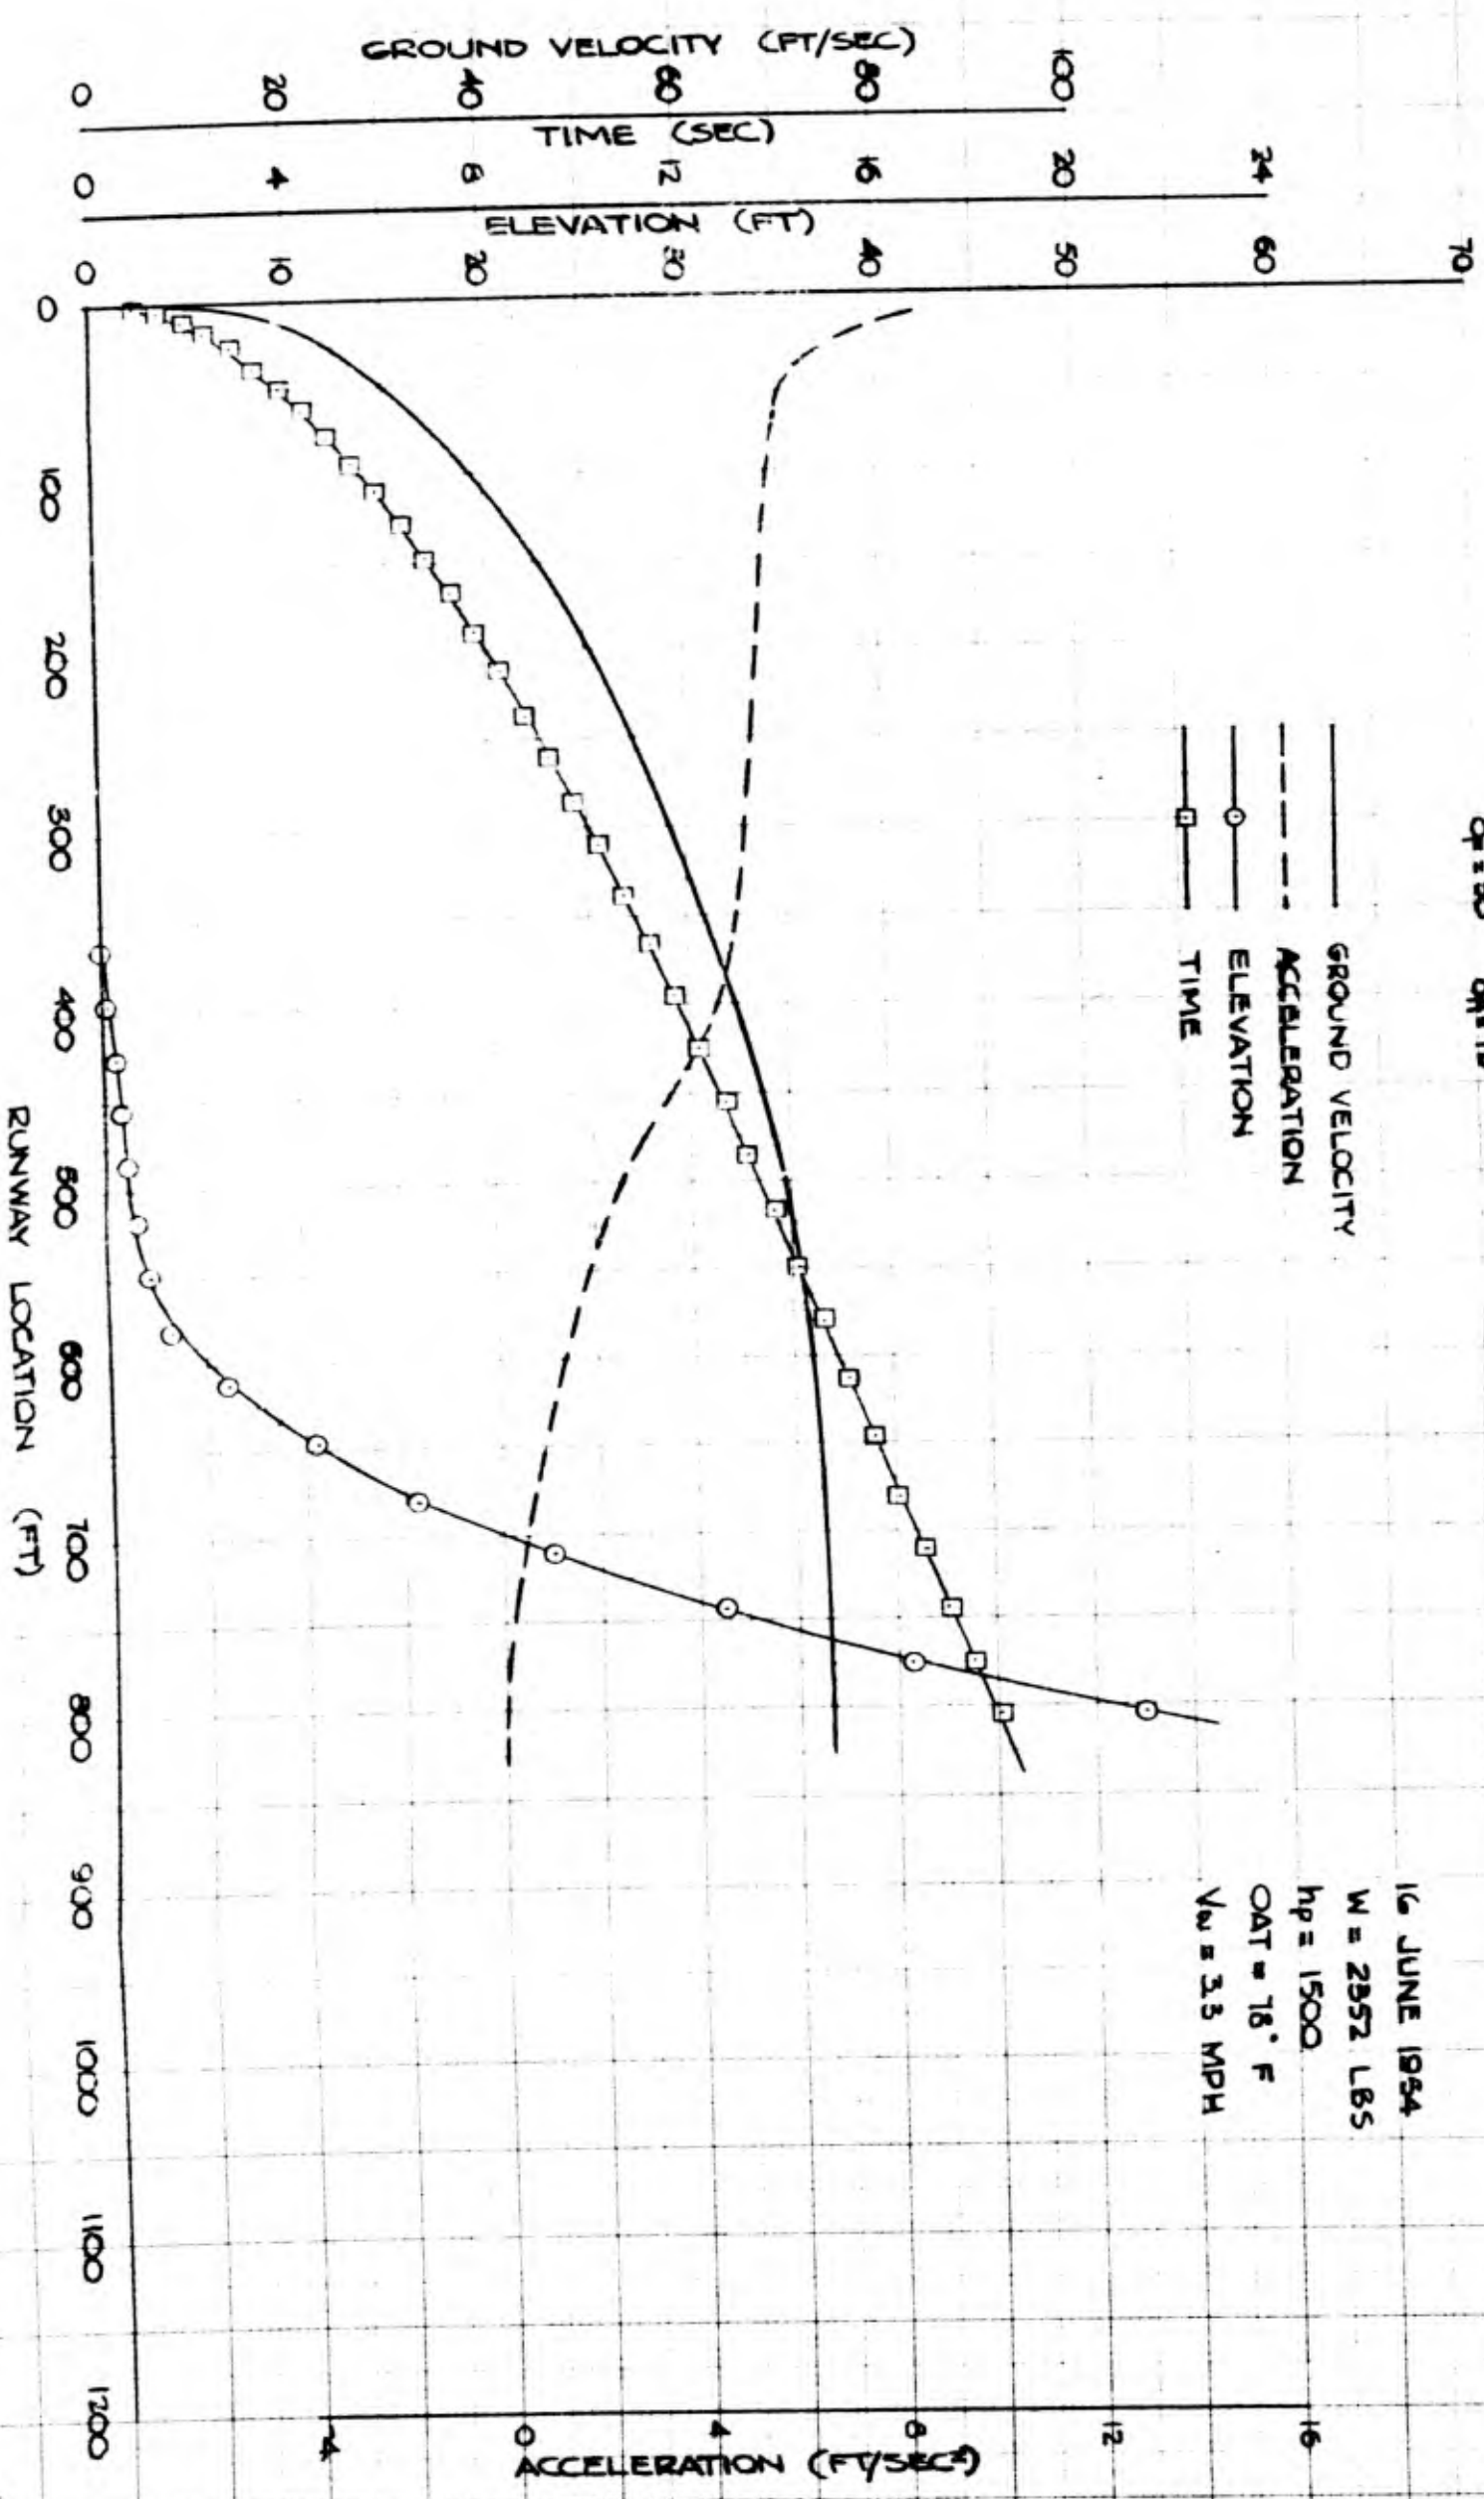

MODEL 319A


TAKE-OFF NO. 3

BLC OFF

$\delta = 50'$ $\delta_A = 15'$

— GROUND VELOCITY
- - - ACCELERATION
— ELEVATION
— TIME

16 JUNE 1954
W = 2348 LBS
hp = 1500
OAT = 78° F
 $V_w = 0.7$ MPH

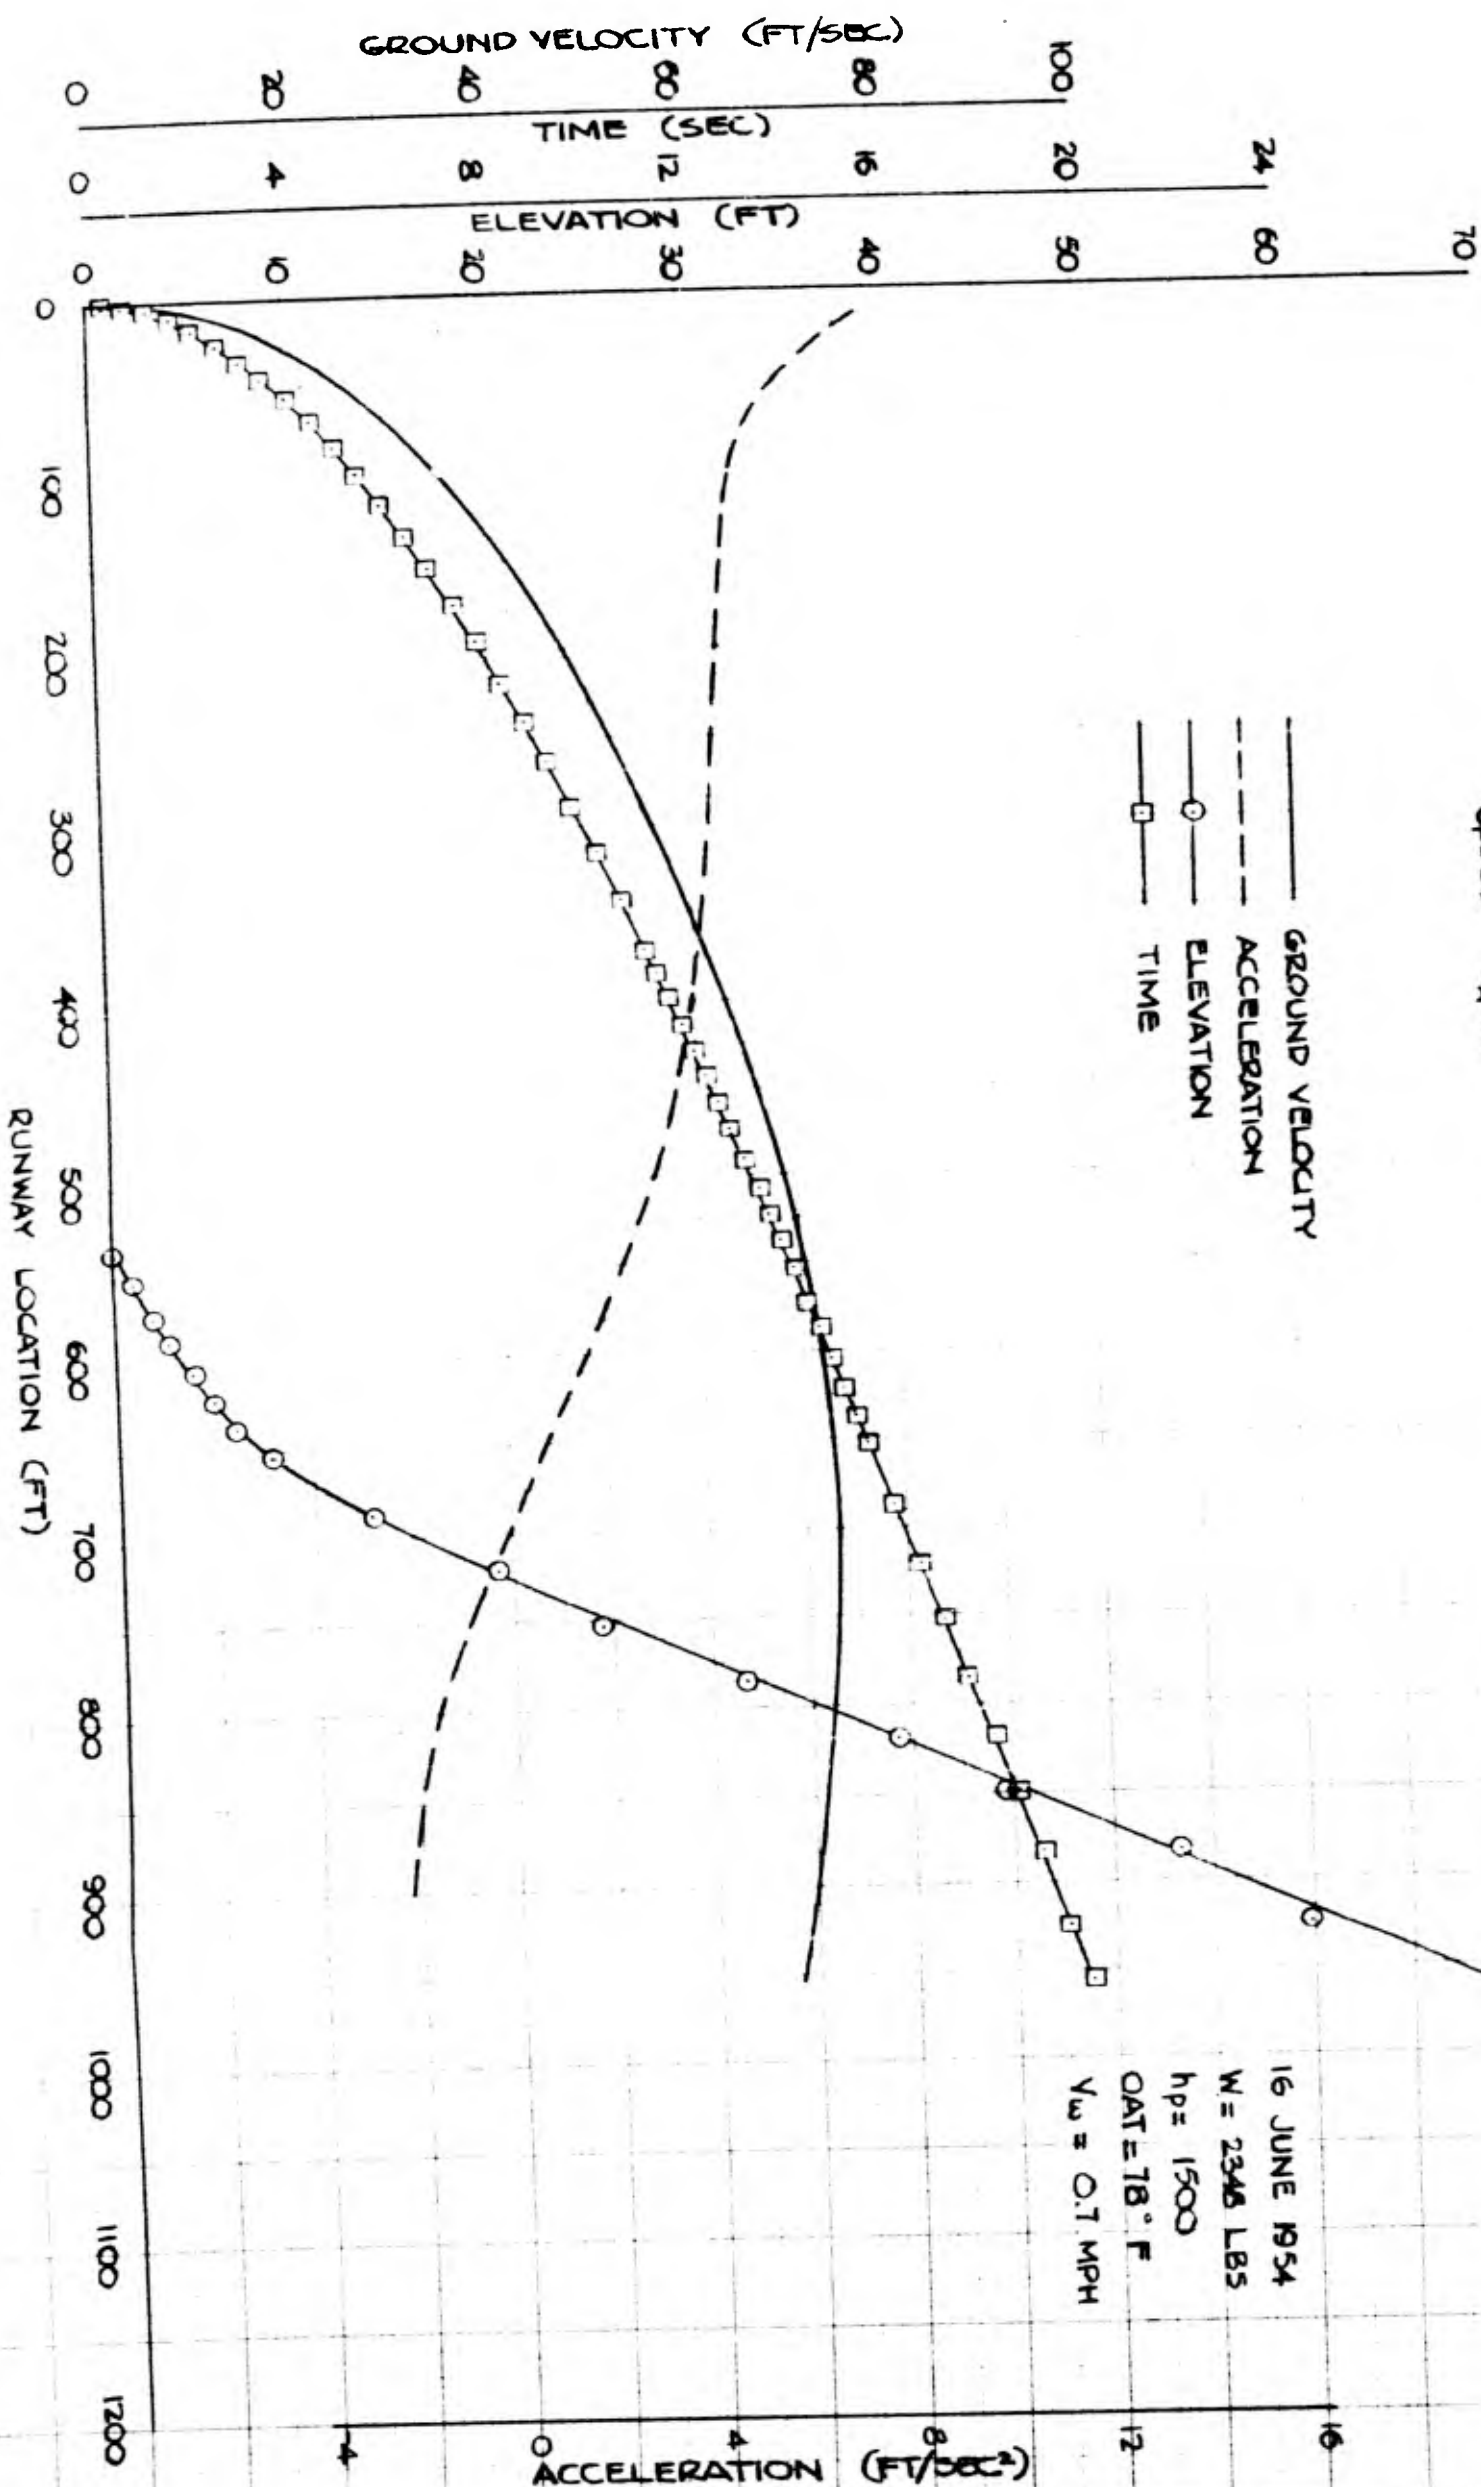

MODEL 319A


TAKE-OFF NO. 4

BLC OFF

$\delta_p = 30^\circ$ $\delta_a = 15^\circ$

— GROUND VELOCITY
- - - ACCELERATION
— ELEVATION
— TIME

16 JUNE 1954
W = 2345 LBS
hp = 1500
OAT = 79° F
V_w = 2.3 MPH

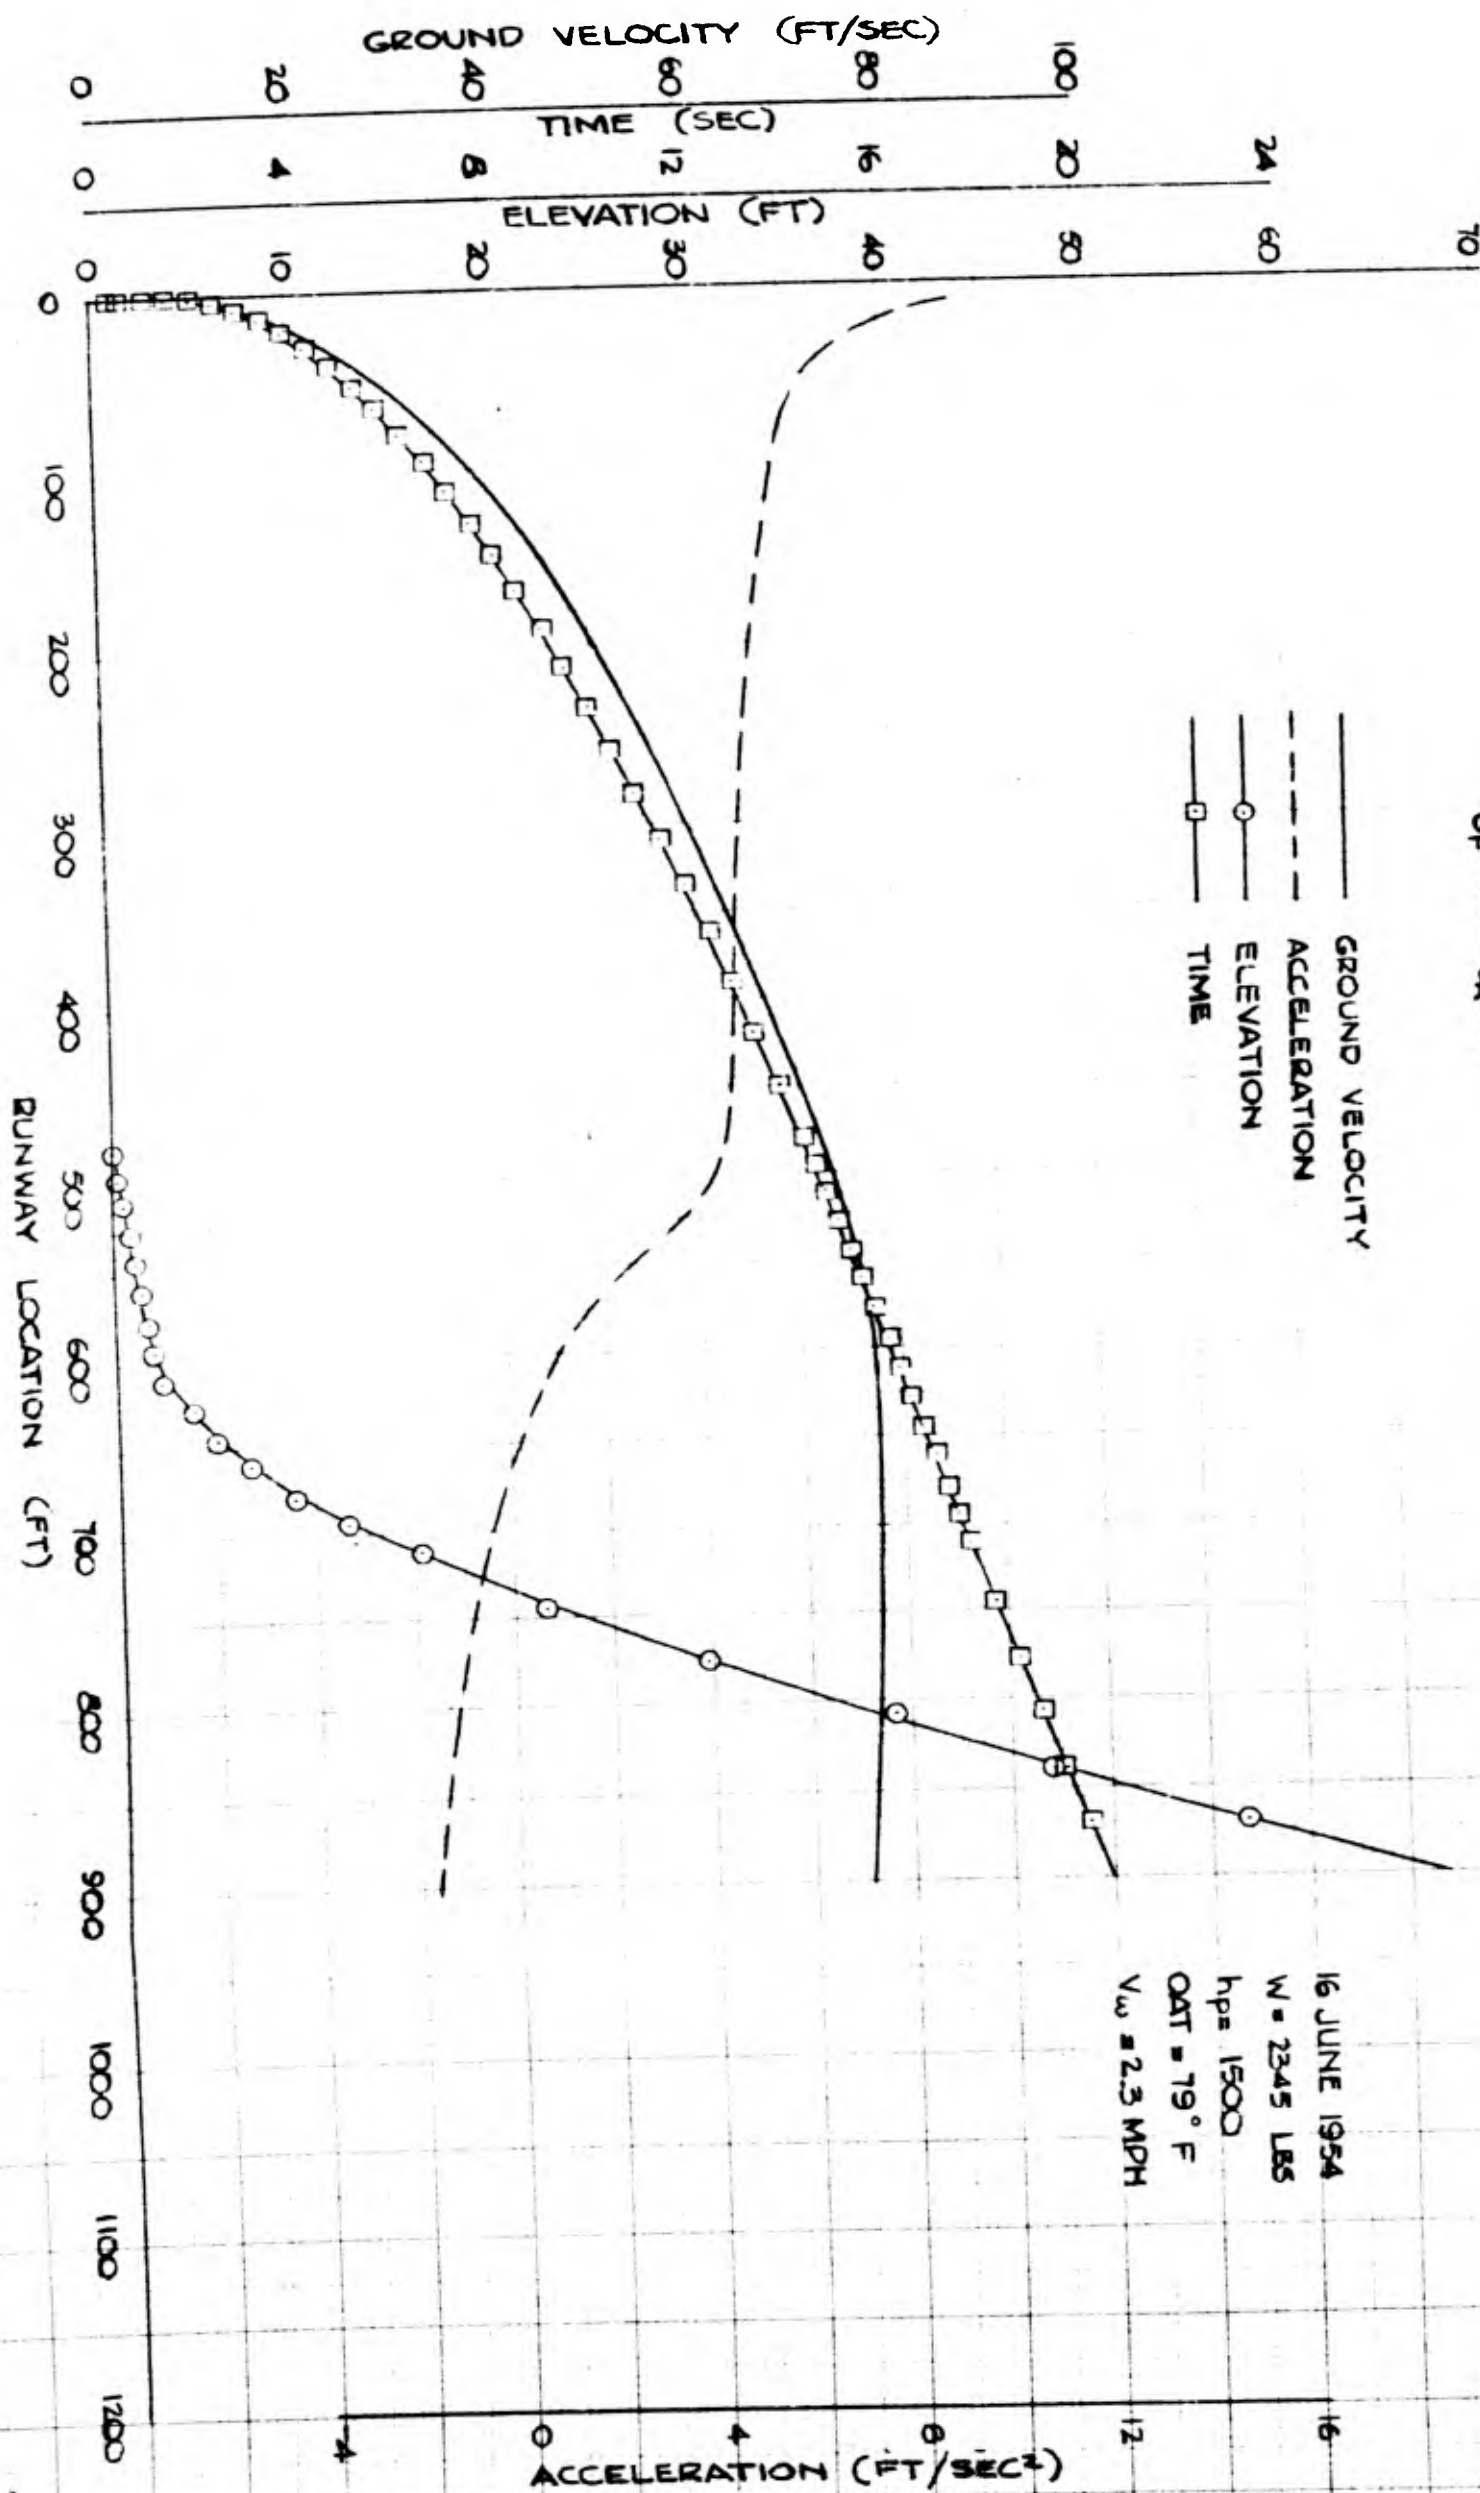

MODEL 319A


TAKE-OFF NO. 5

BLC OFF

$\delta_p = 30^\circ$ $\delta_A = 15^\circ$

GROUND VELOCITY
ACCELERATION
ELEVATION
TIME

16 JUNE 1954
W = 2343 LBS
hp = 1900
OAT = 79° F
 $V_{LO} = 3.6$ MPH

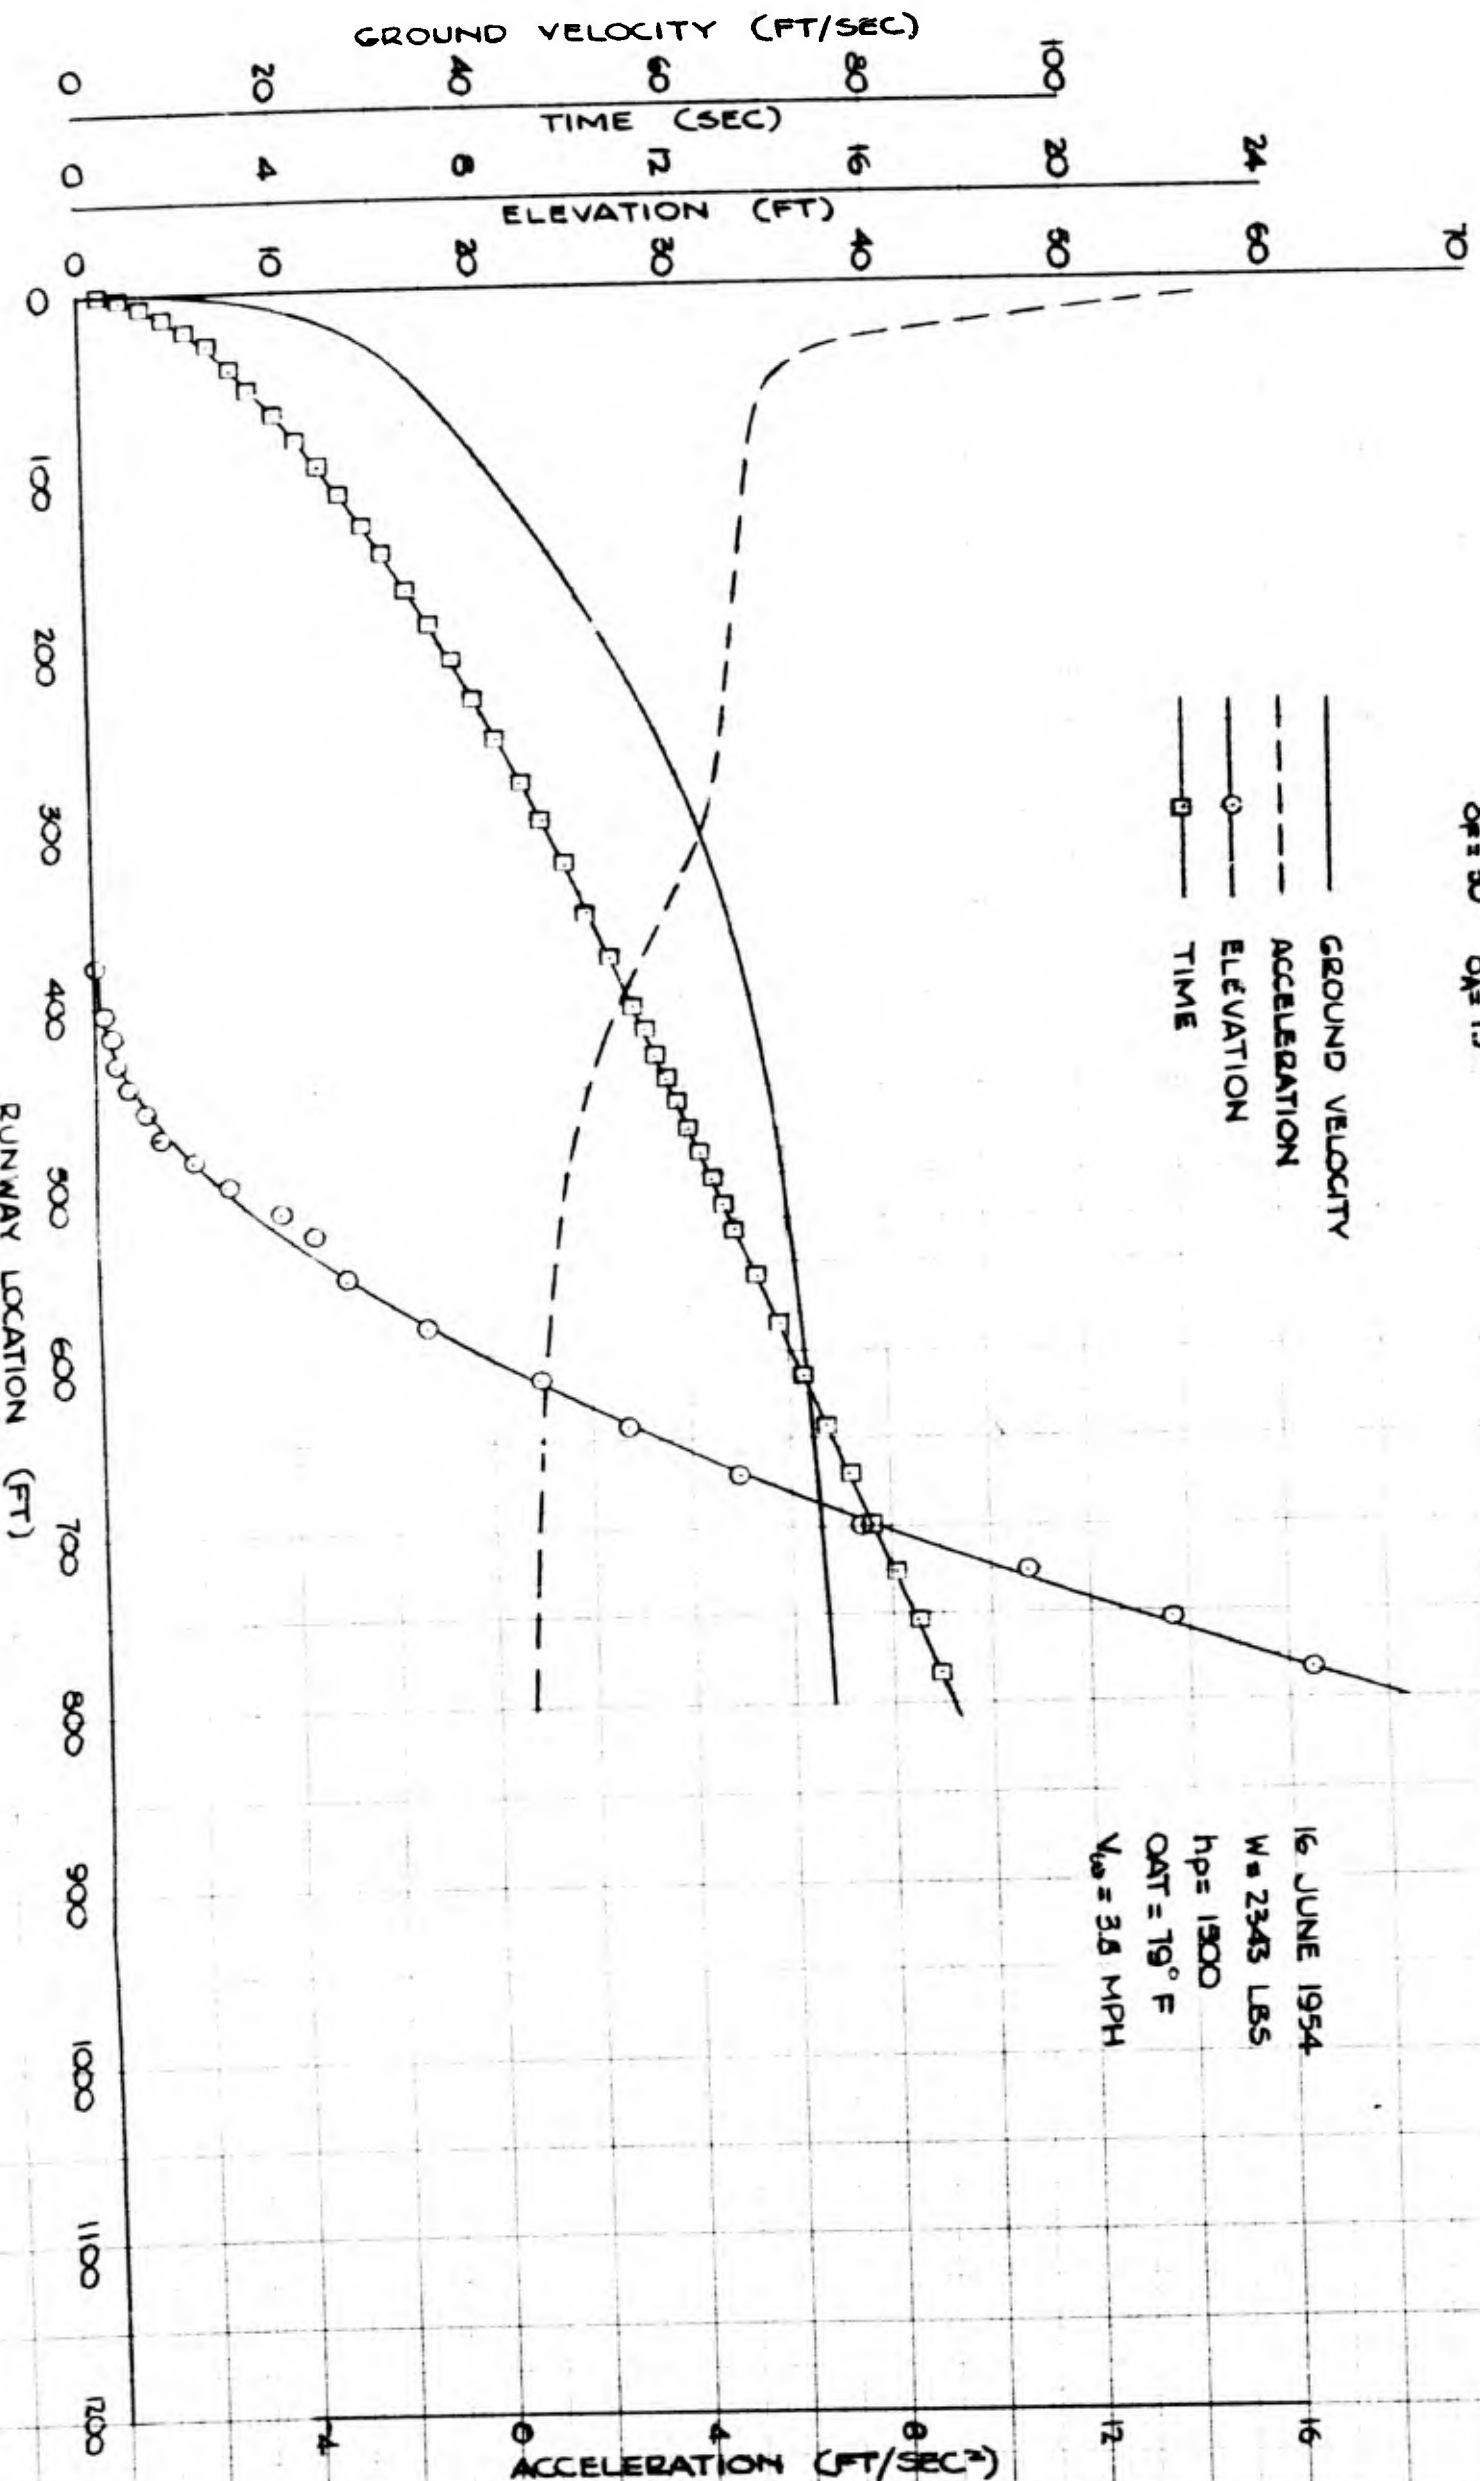


MODEL 319A

TAKE-OFF NO. 6

BLC OFF

$\delta p = 20^\circ$ $\delta \alpha = 15^\circ$

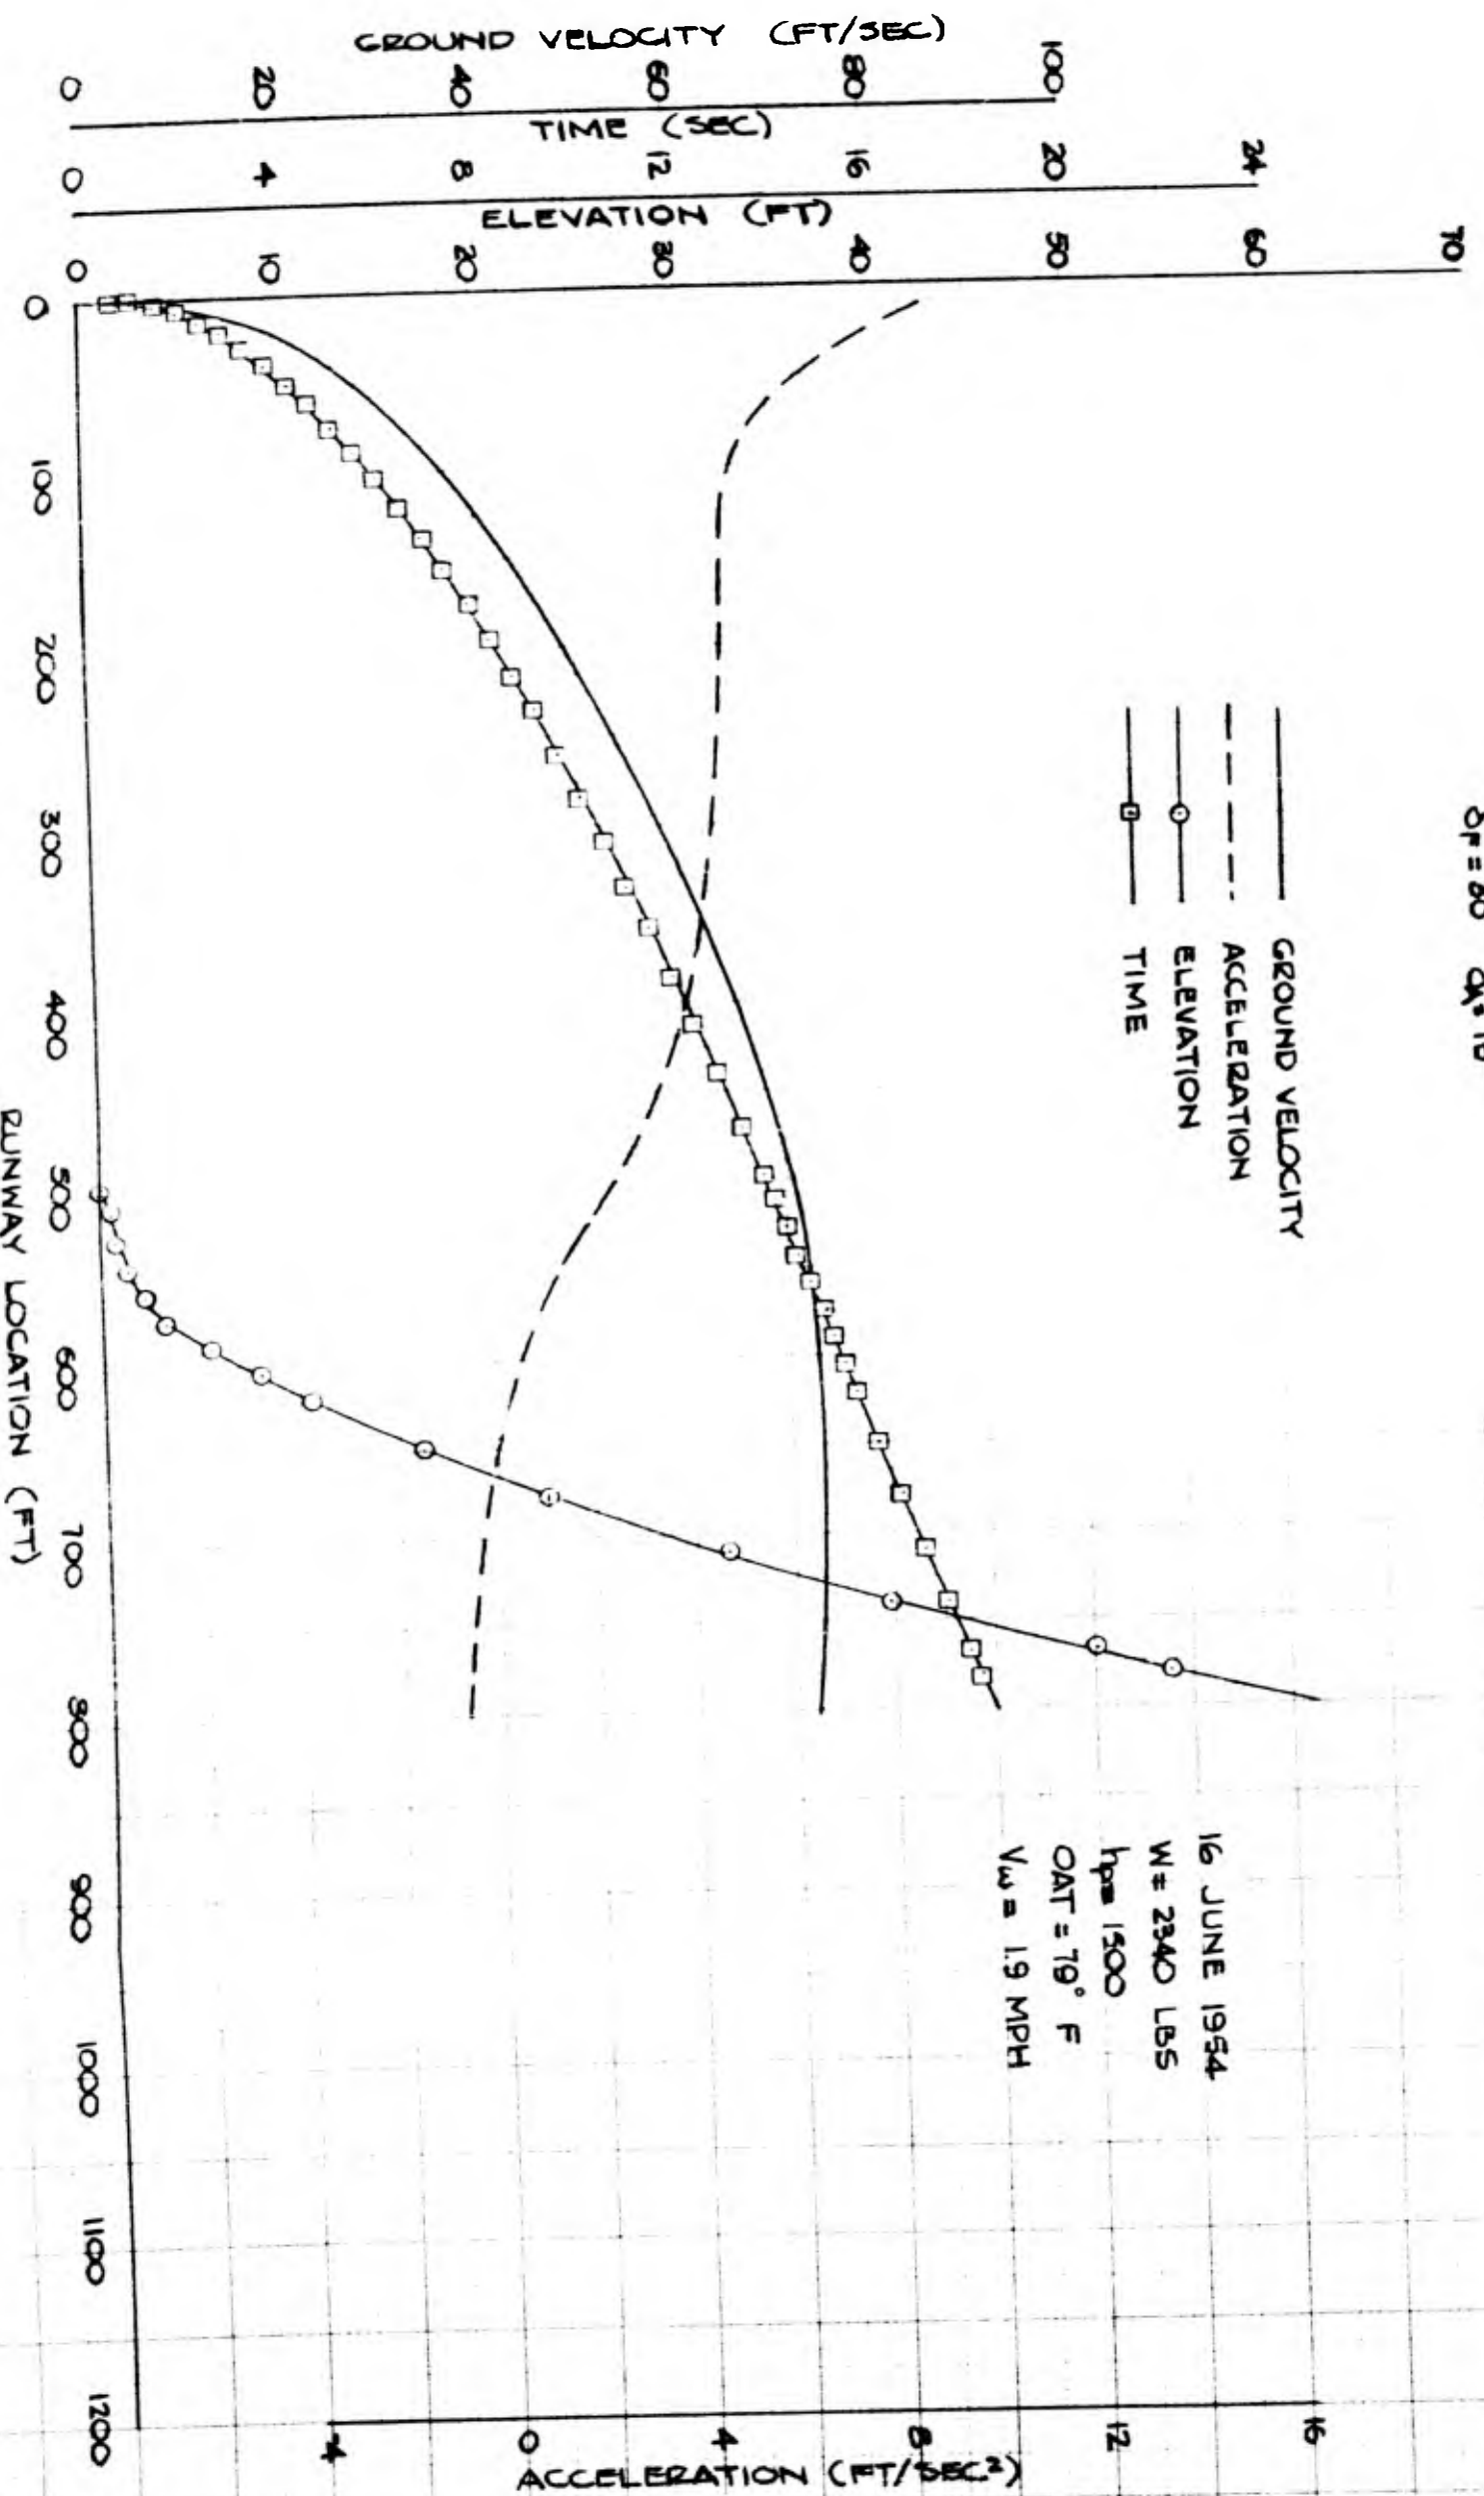

MODEL 319A


TAKE-OFF NO. 7


BLC OFF

$\delta_p = 30^\circ$ $\delta_A = 15^\circ$

GROUND VELOCITY
ACCELERATION
ELEVATION
TIME


16 JUNE 1954
W = 2337 LBS
 $h_p = 1500$
OAT = 80° F
 $V_w = 3.6$ MPH

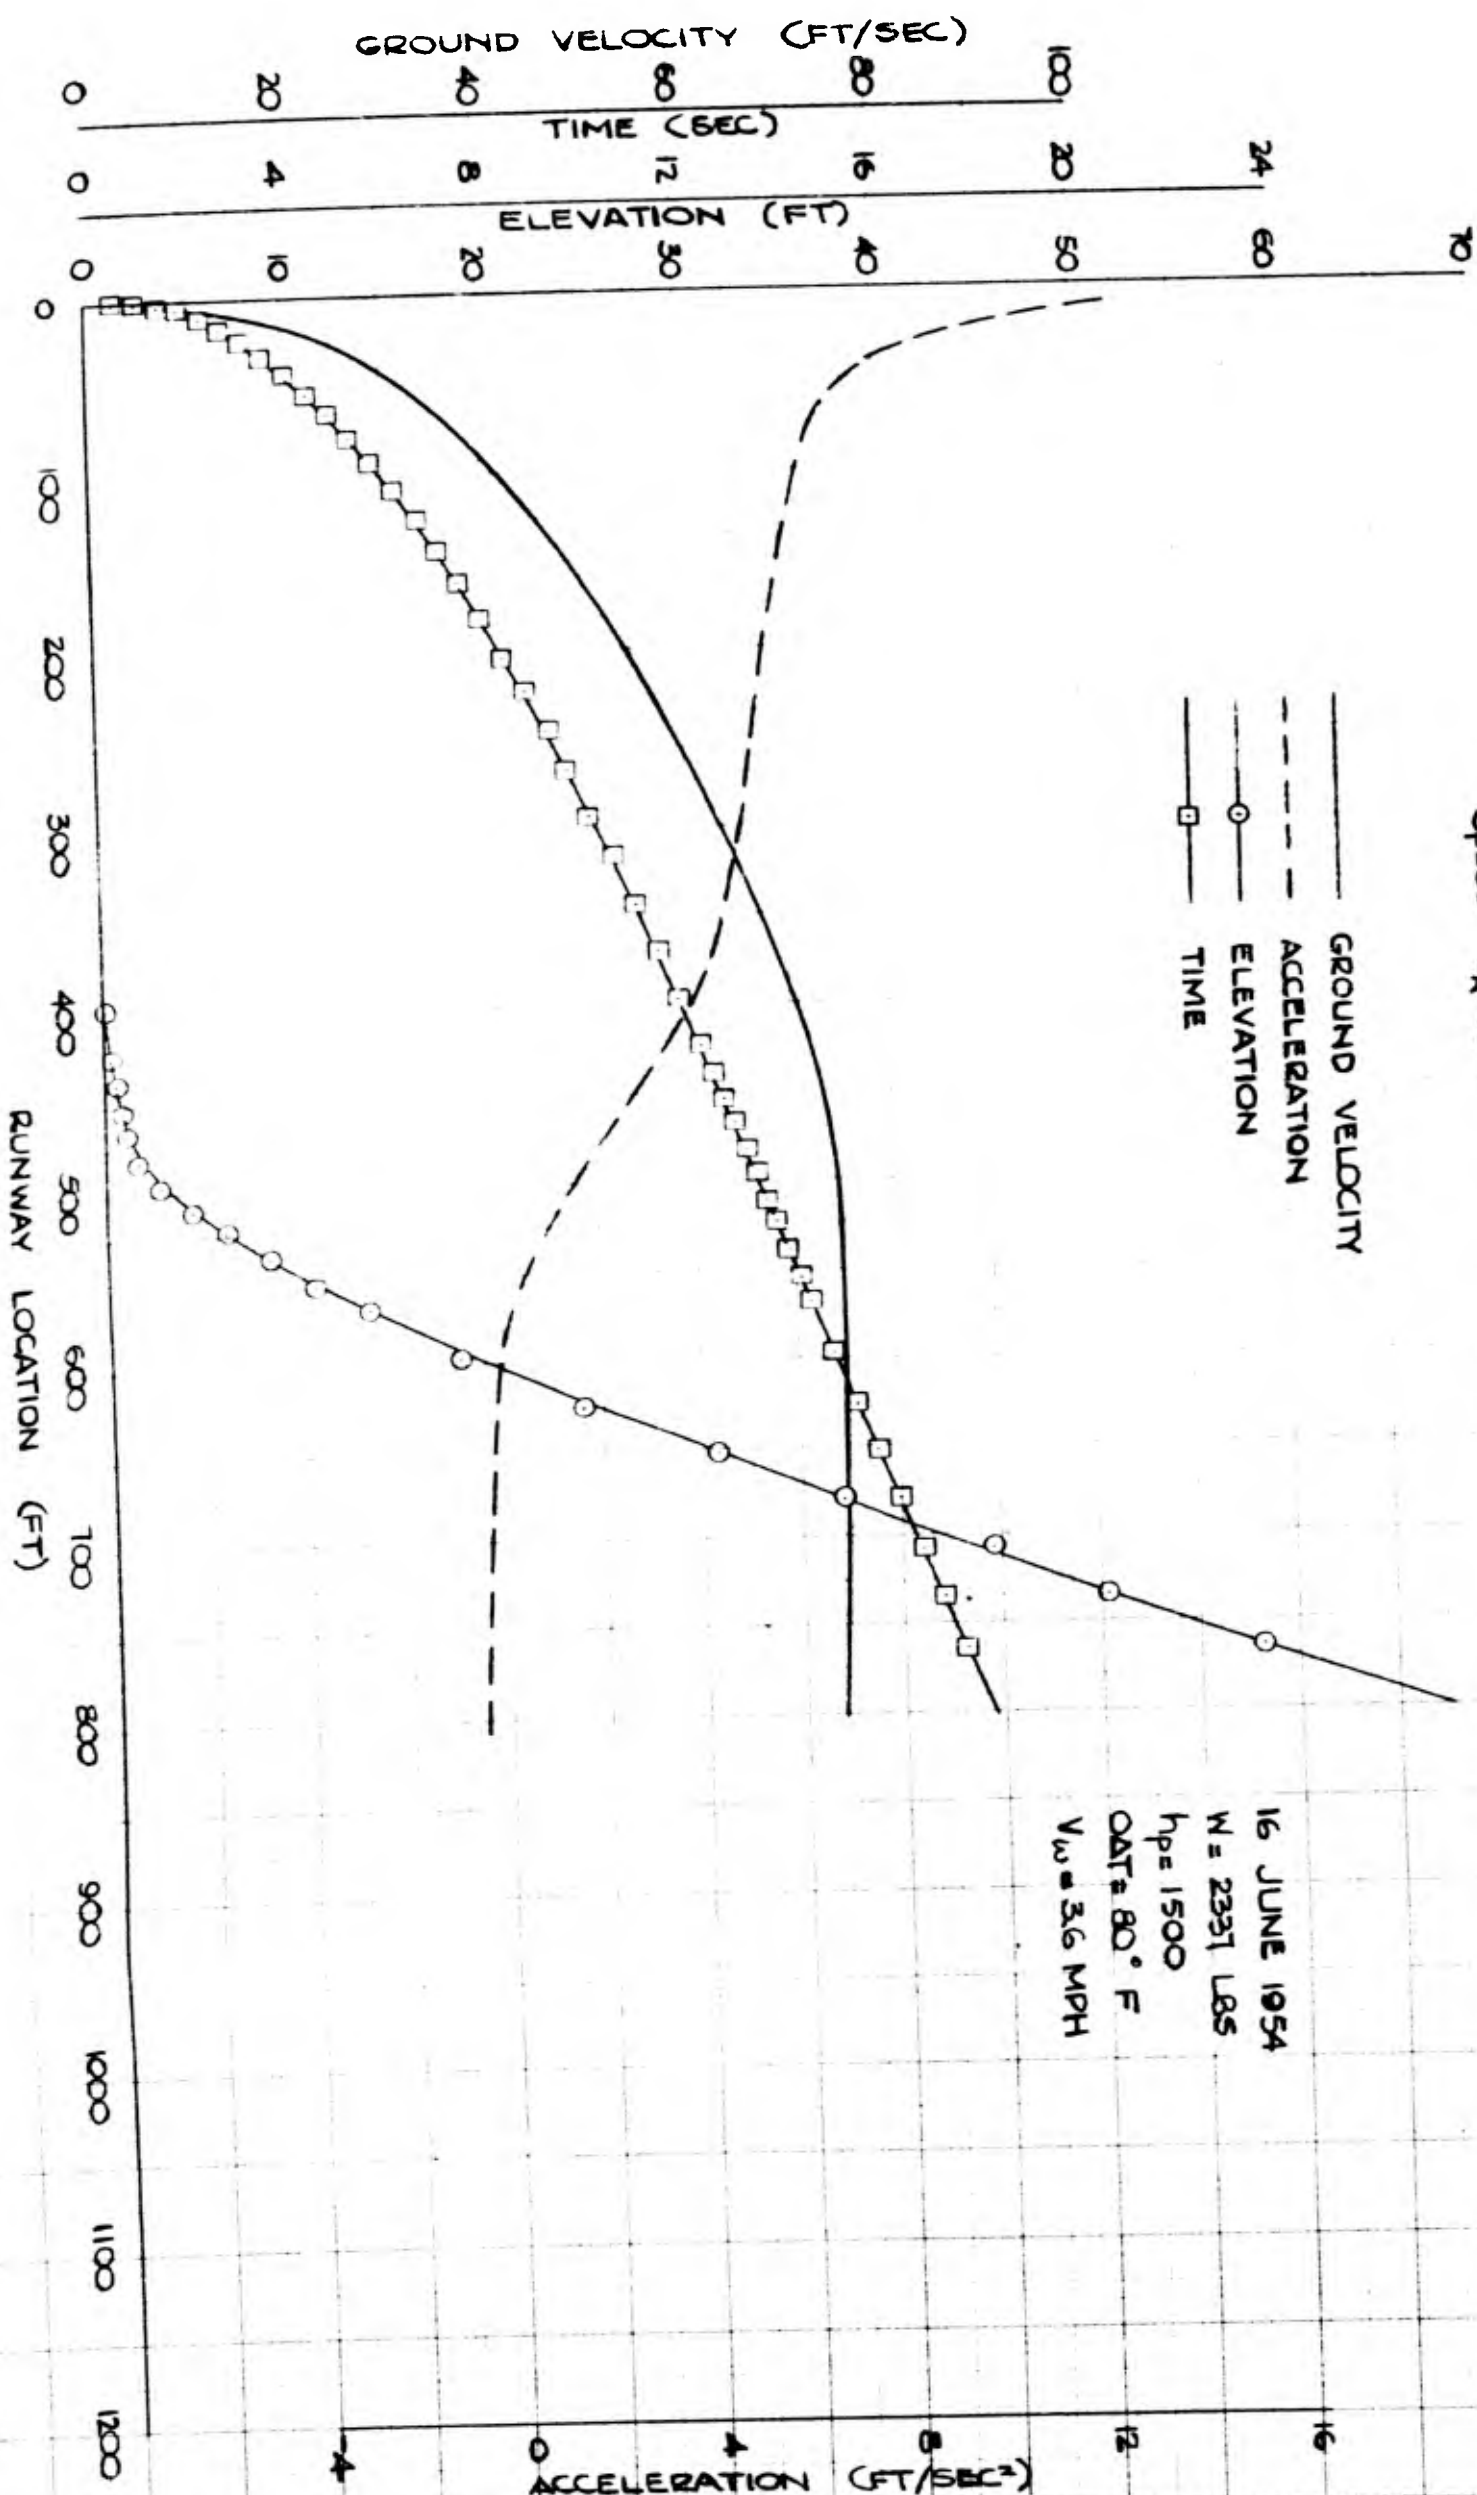

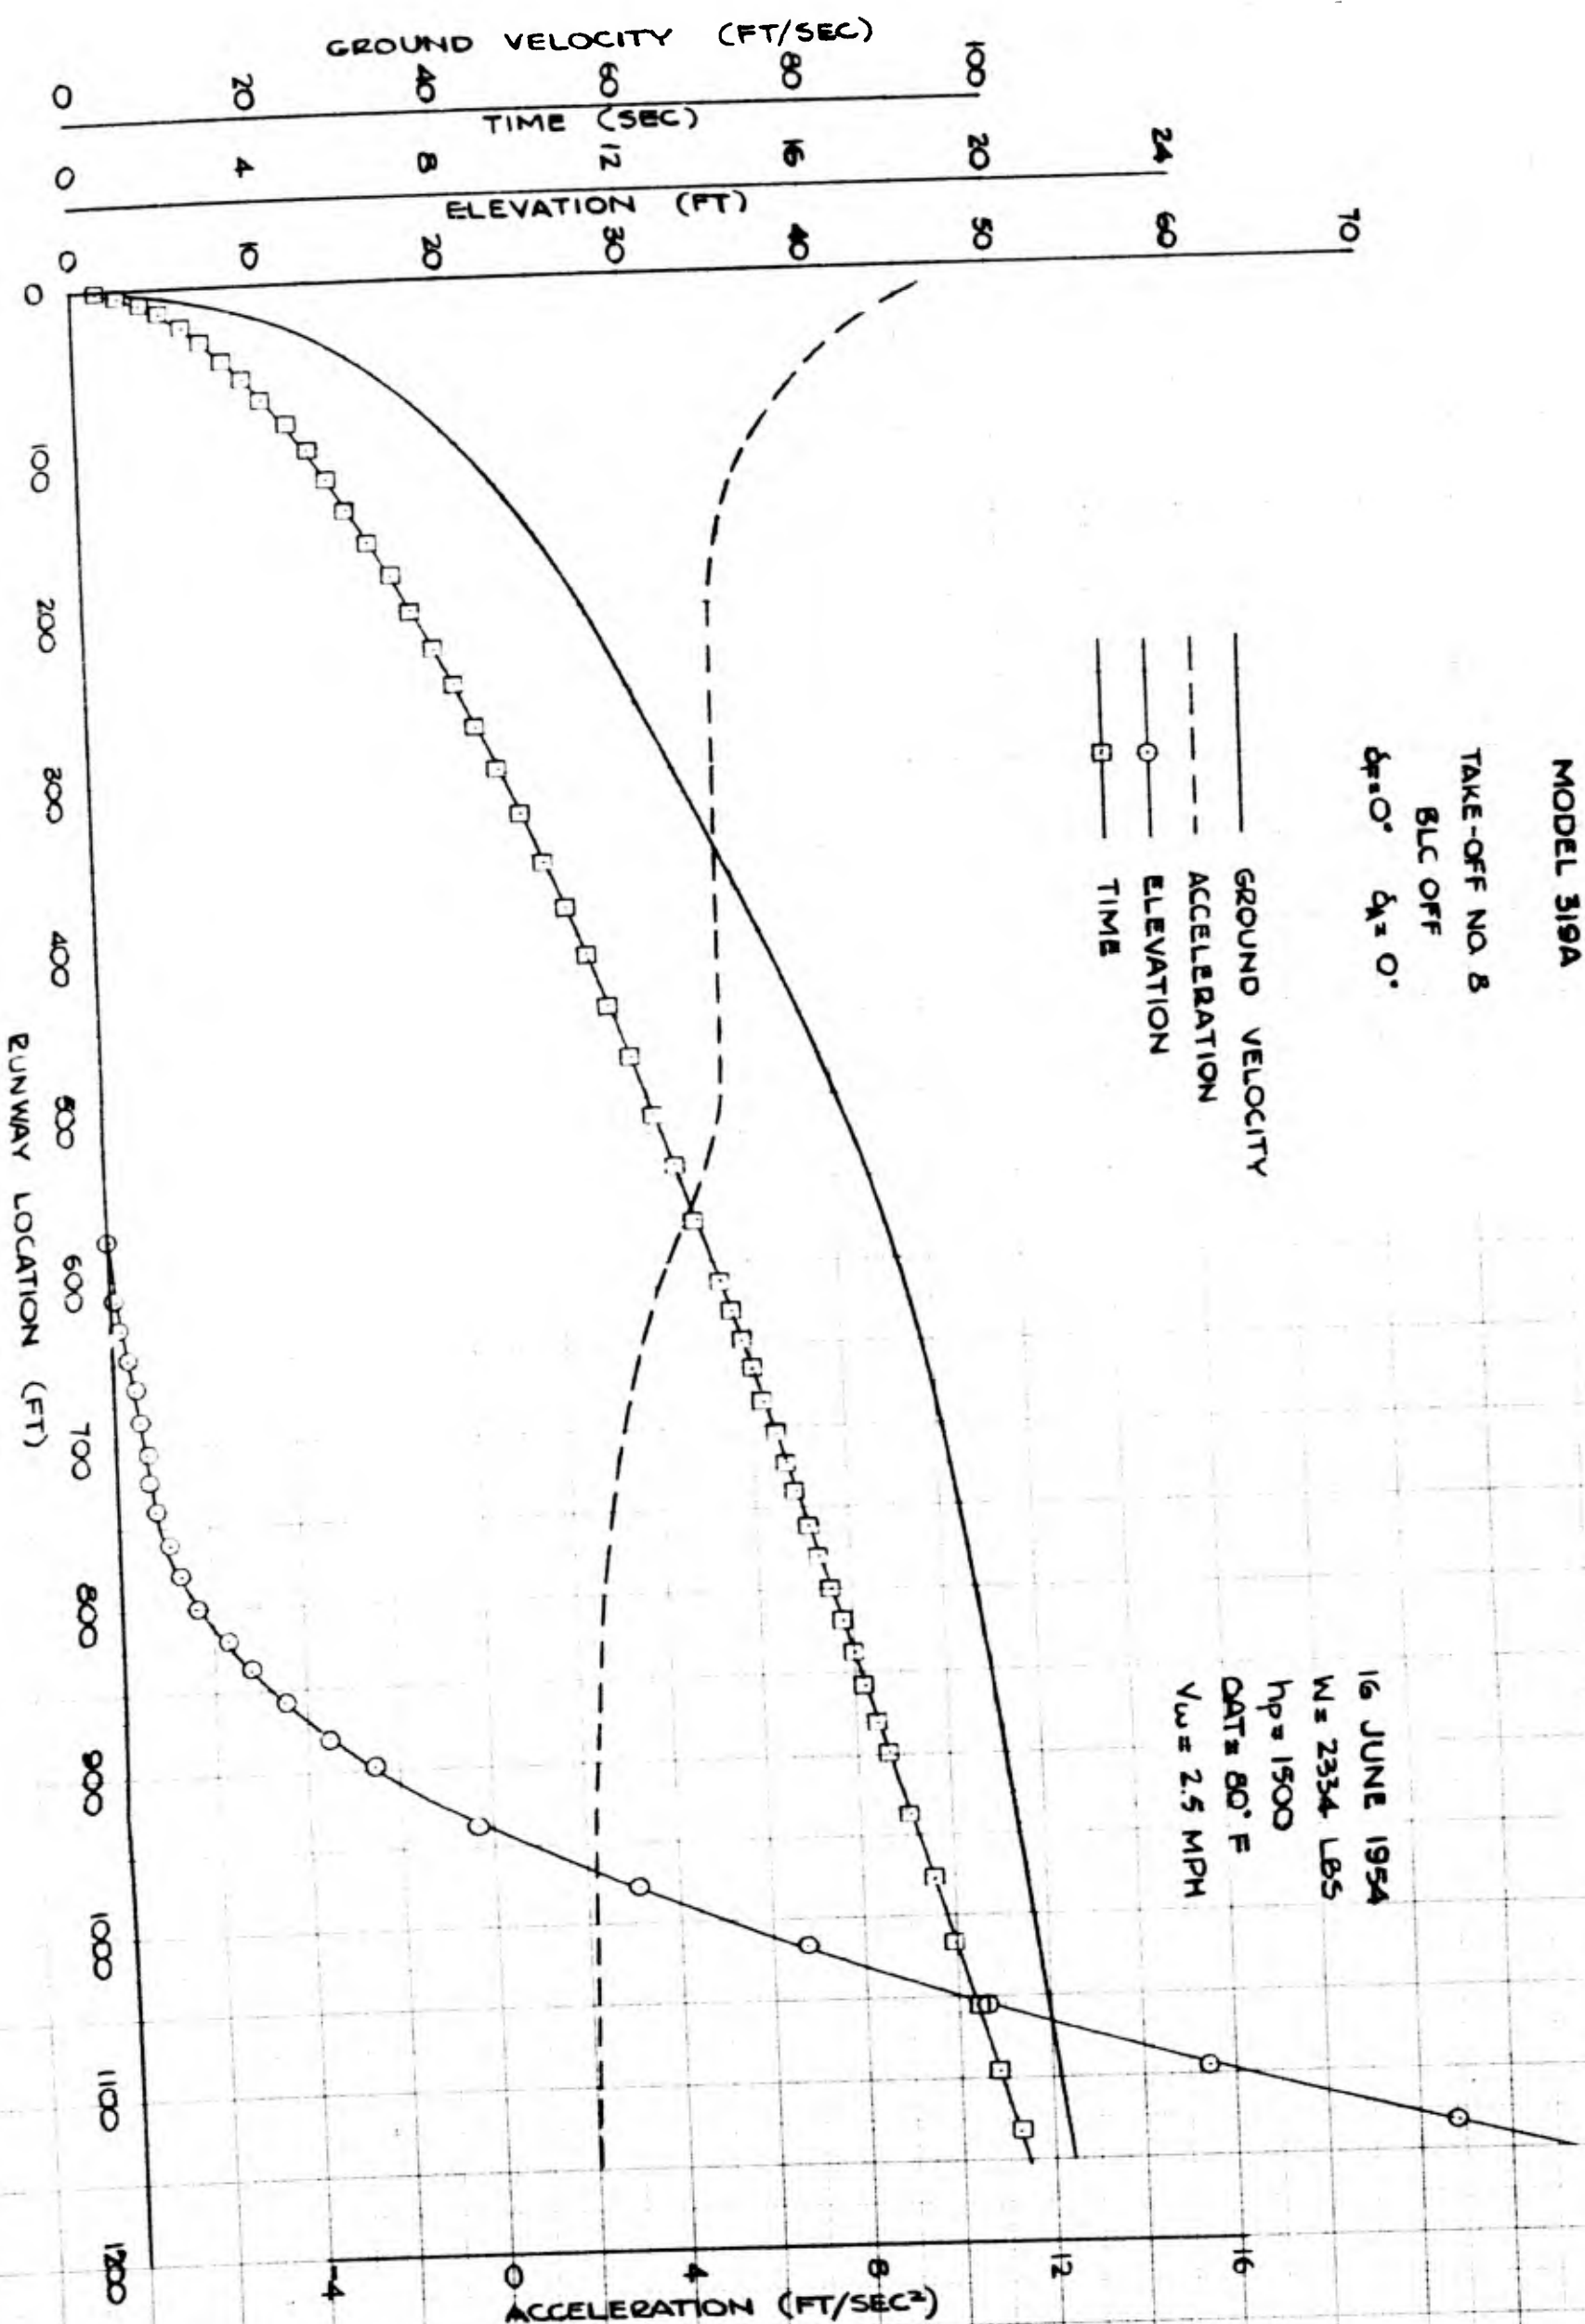

CONFIDENTIAL


PAGE 58
FIG. 38

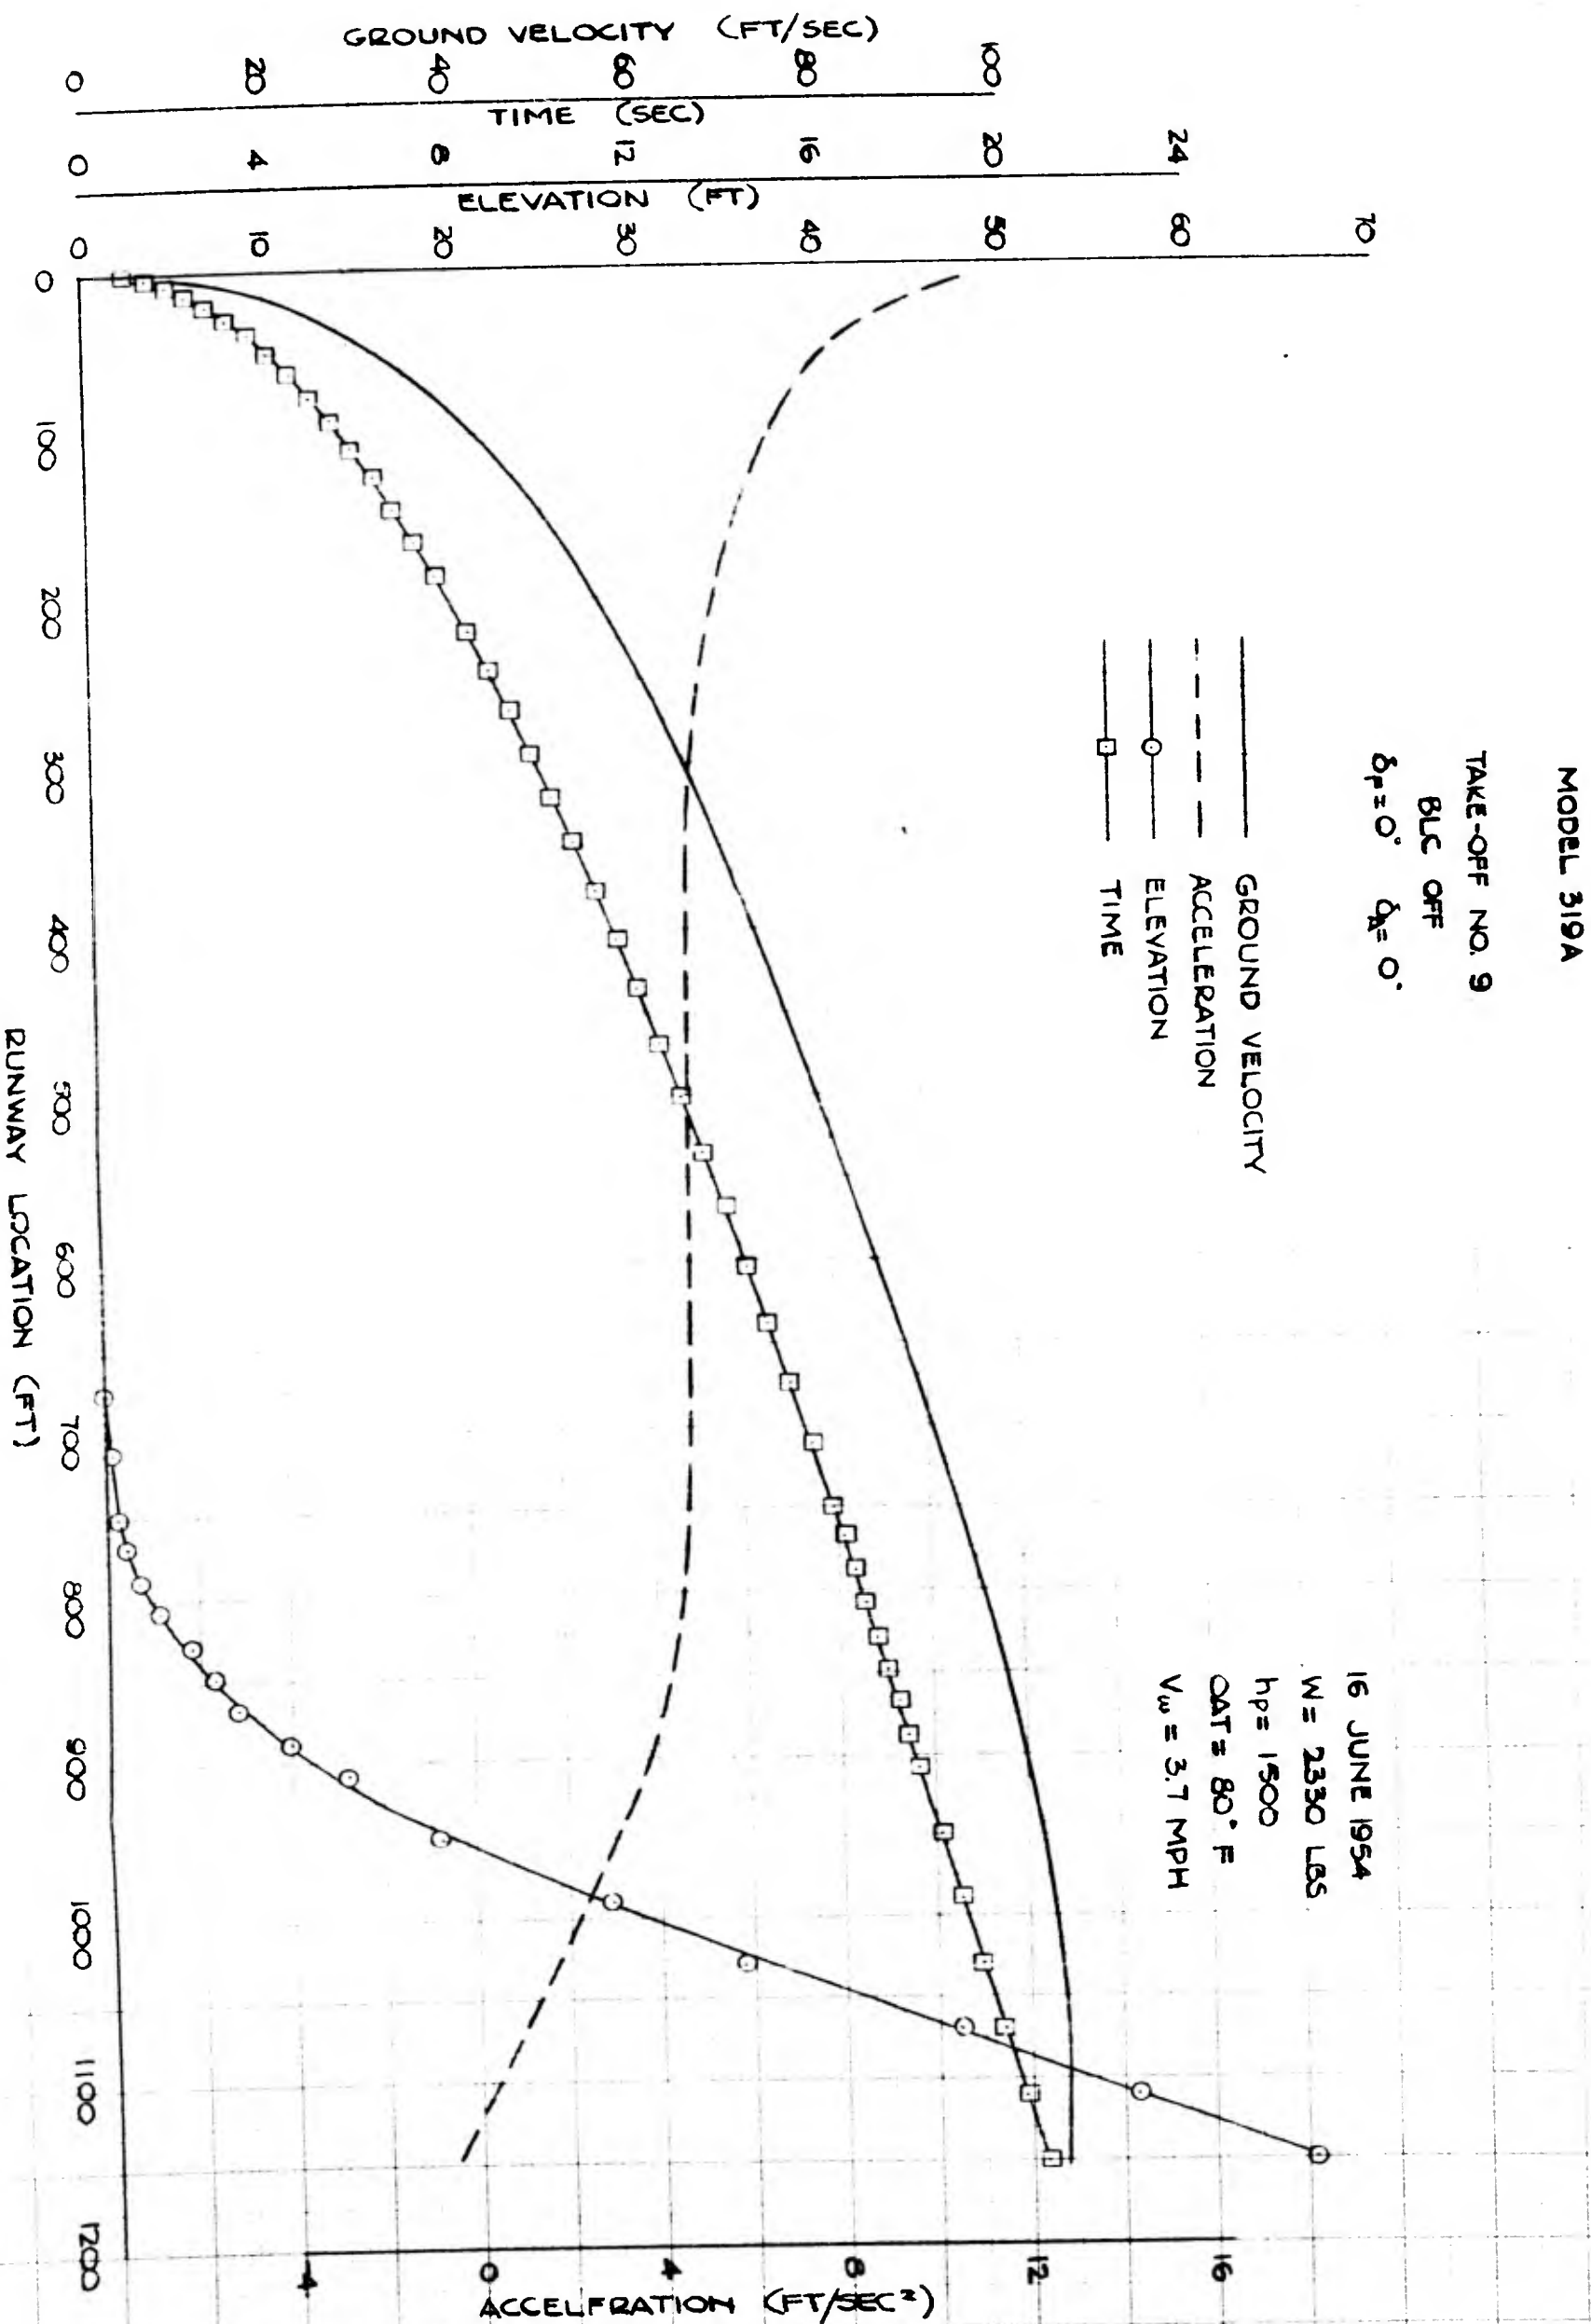

CONFIDENTIAL

CONFIDENTIAL

PAGE 59
FIG. 39

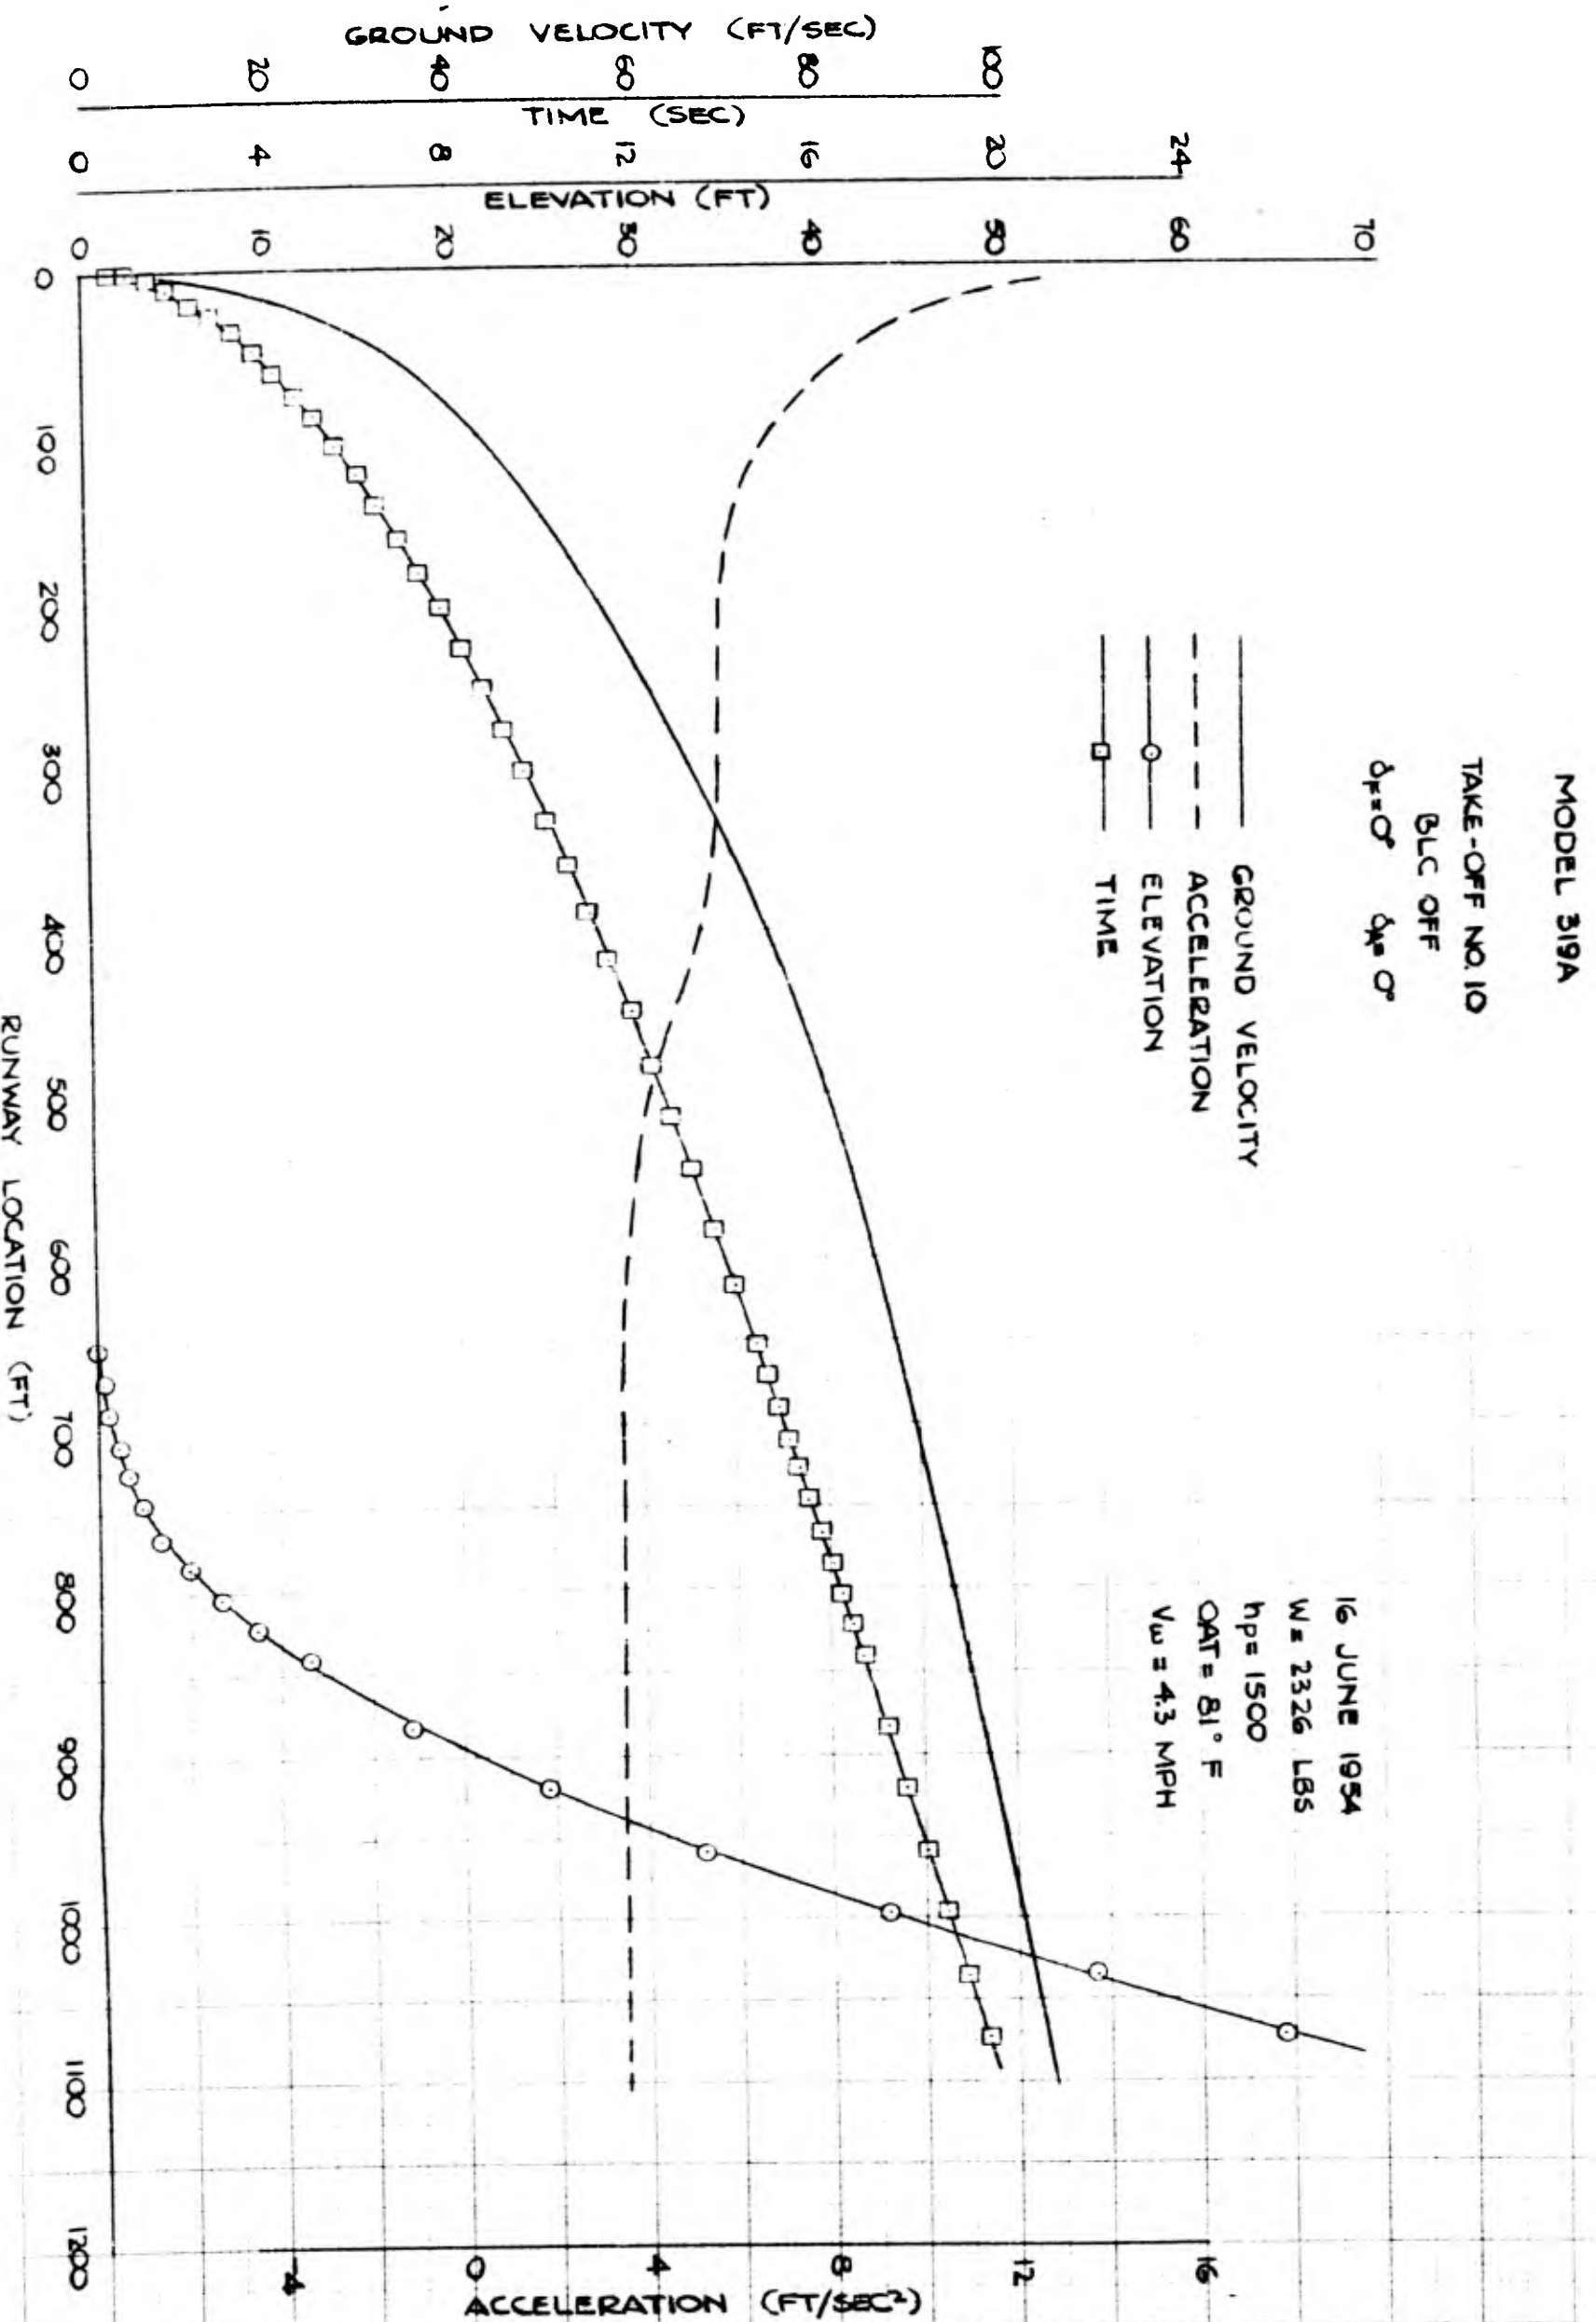

CONFIDENTIAL

MODEL 319A


TAKE-OFF NO. 11

BLC OFF

$\delta_F = 0^\circ$ $\delta_A = 0^\circ$

— GROUND VELOCITY
- - - ACCELERATION
— ELEVATION
— TIME

16 JUNE 1954
W = 2321 LBS
hp = 1500
OAT = 81° F
V_{LO} = 25 MPH

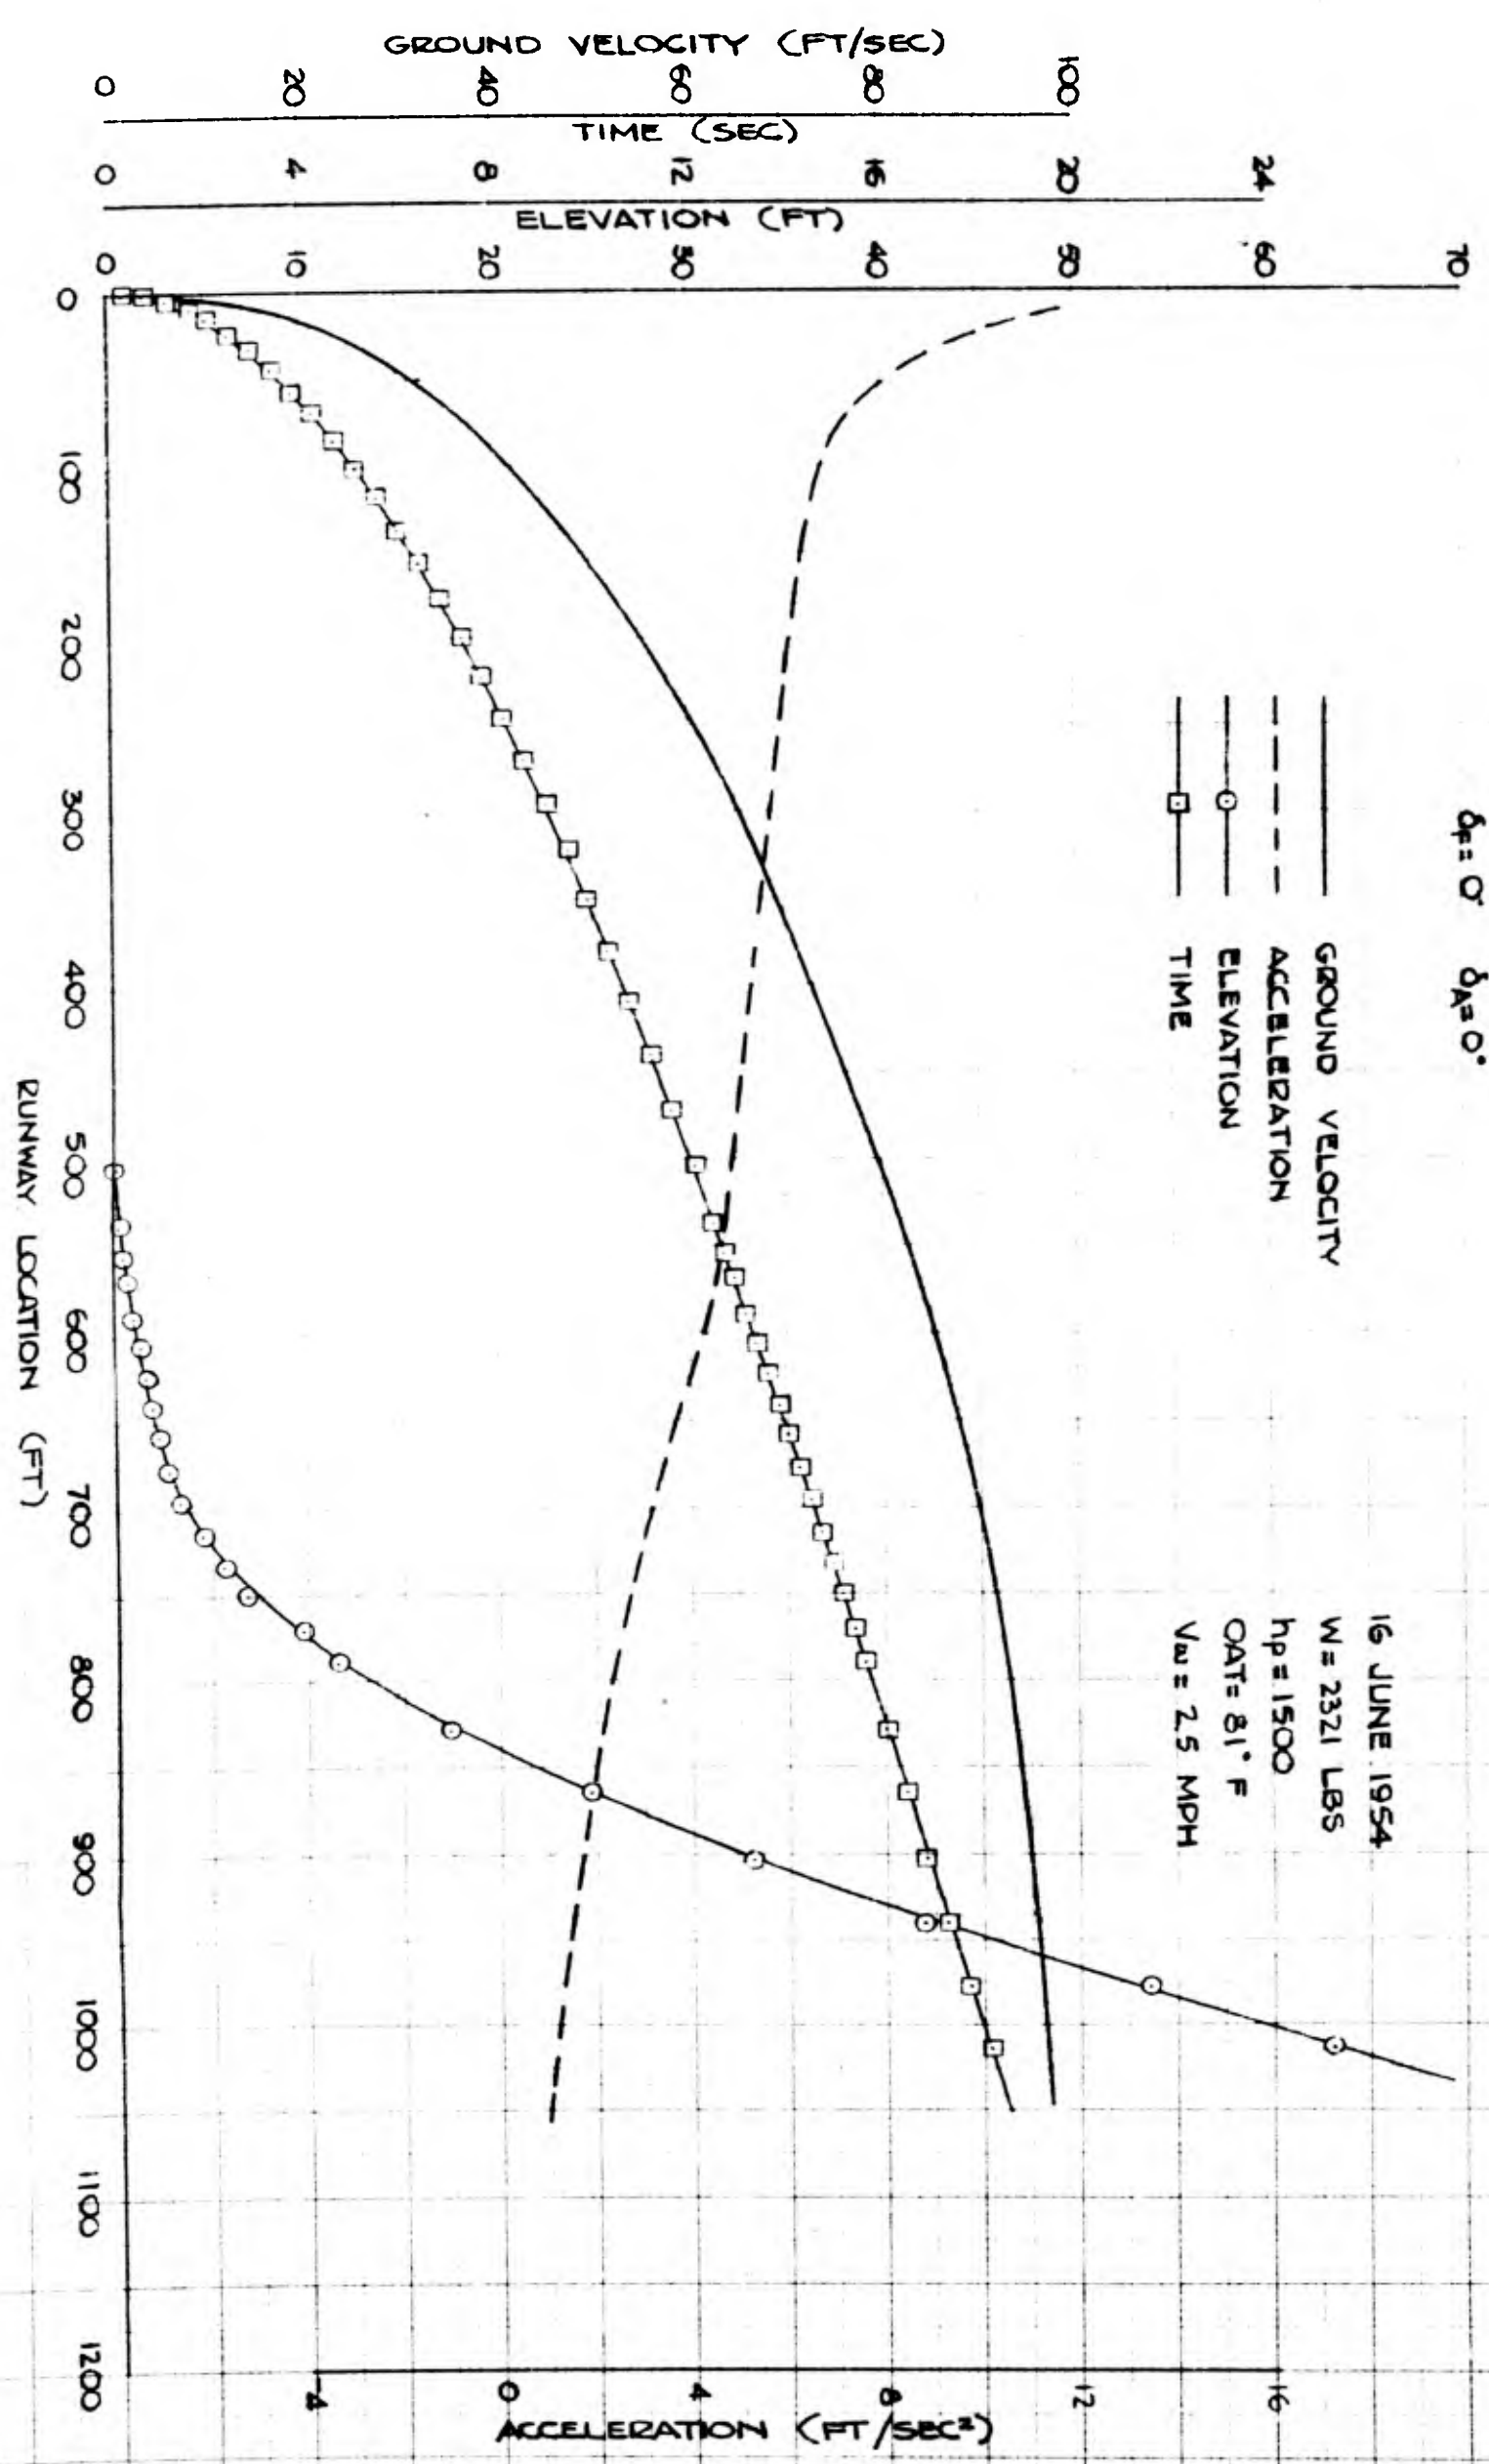


MODEL 319A

LANDING NO. 1

BLC OFF

$\delta_F = 55^\circ$ $\delta_A = 30^\circ$

16 JUNE 1954
W = 2354 LBS
hp = 1500
OAT = 78° F
V_w = 3.4 MPH

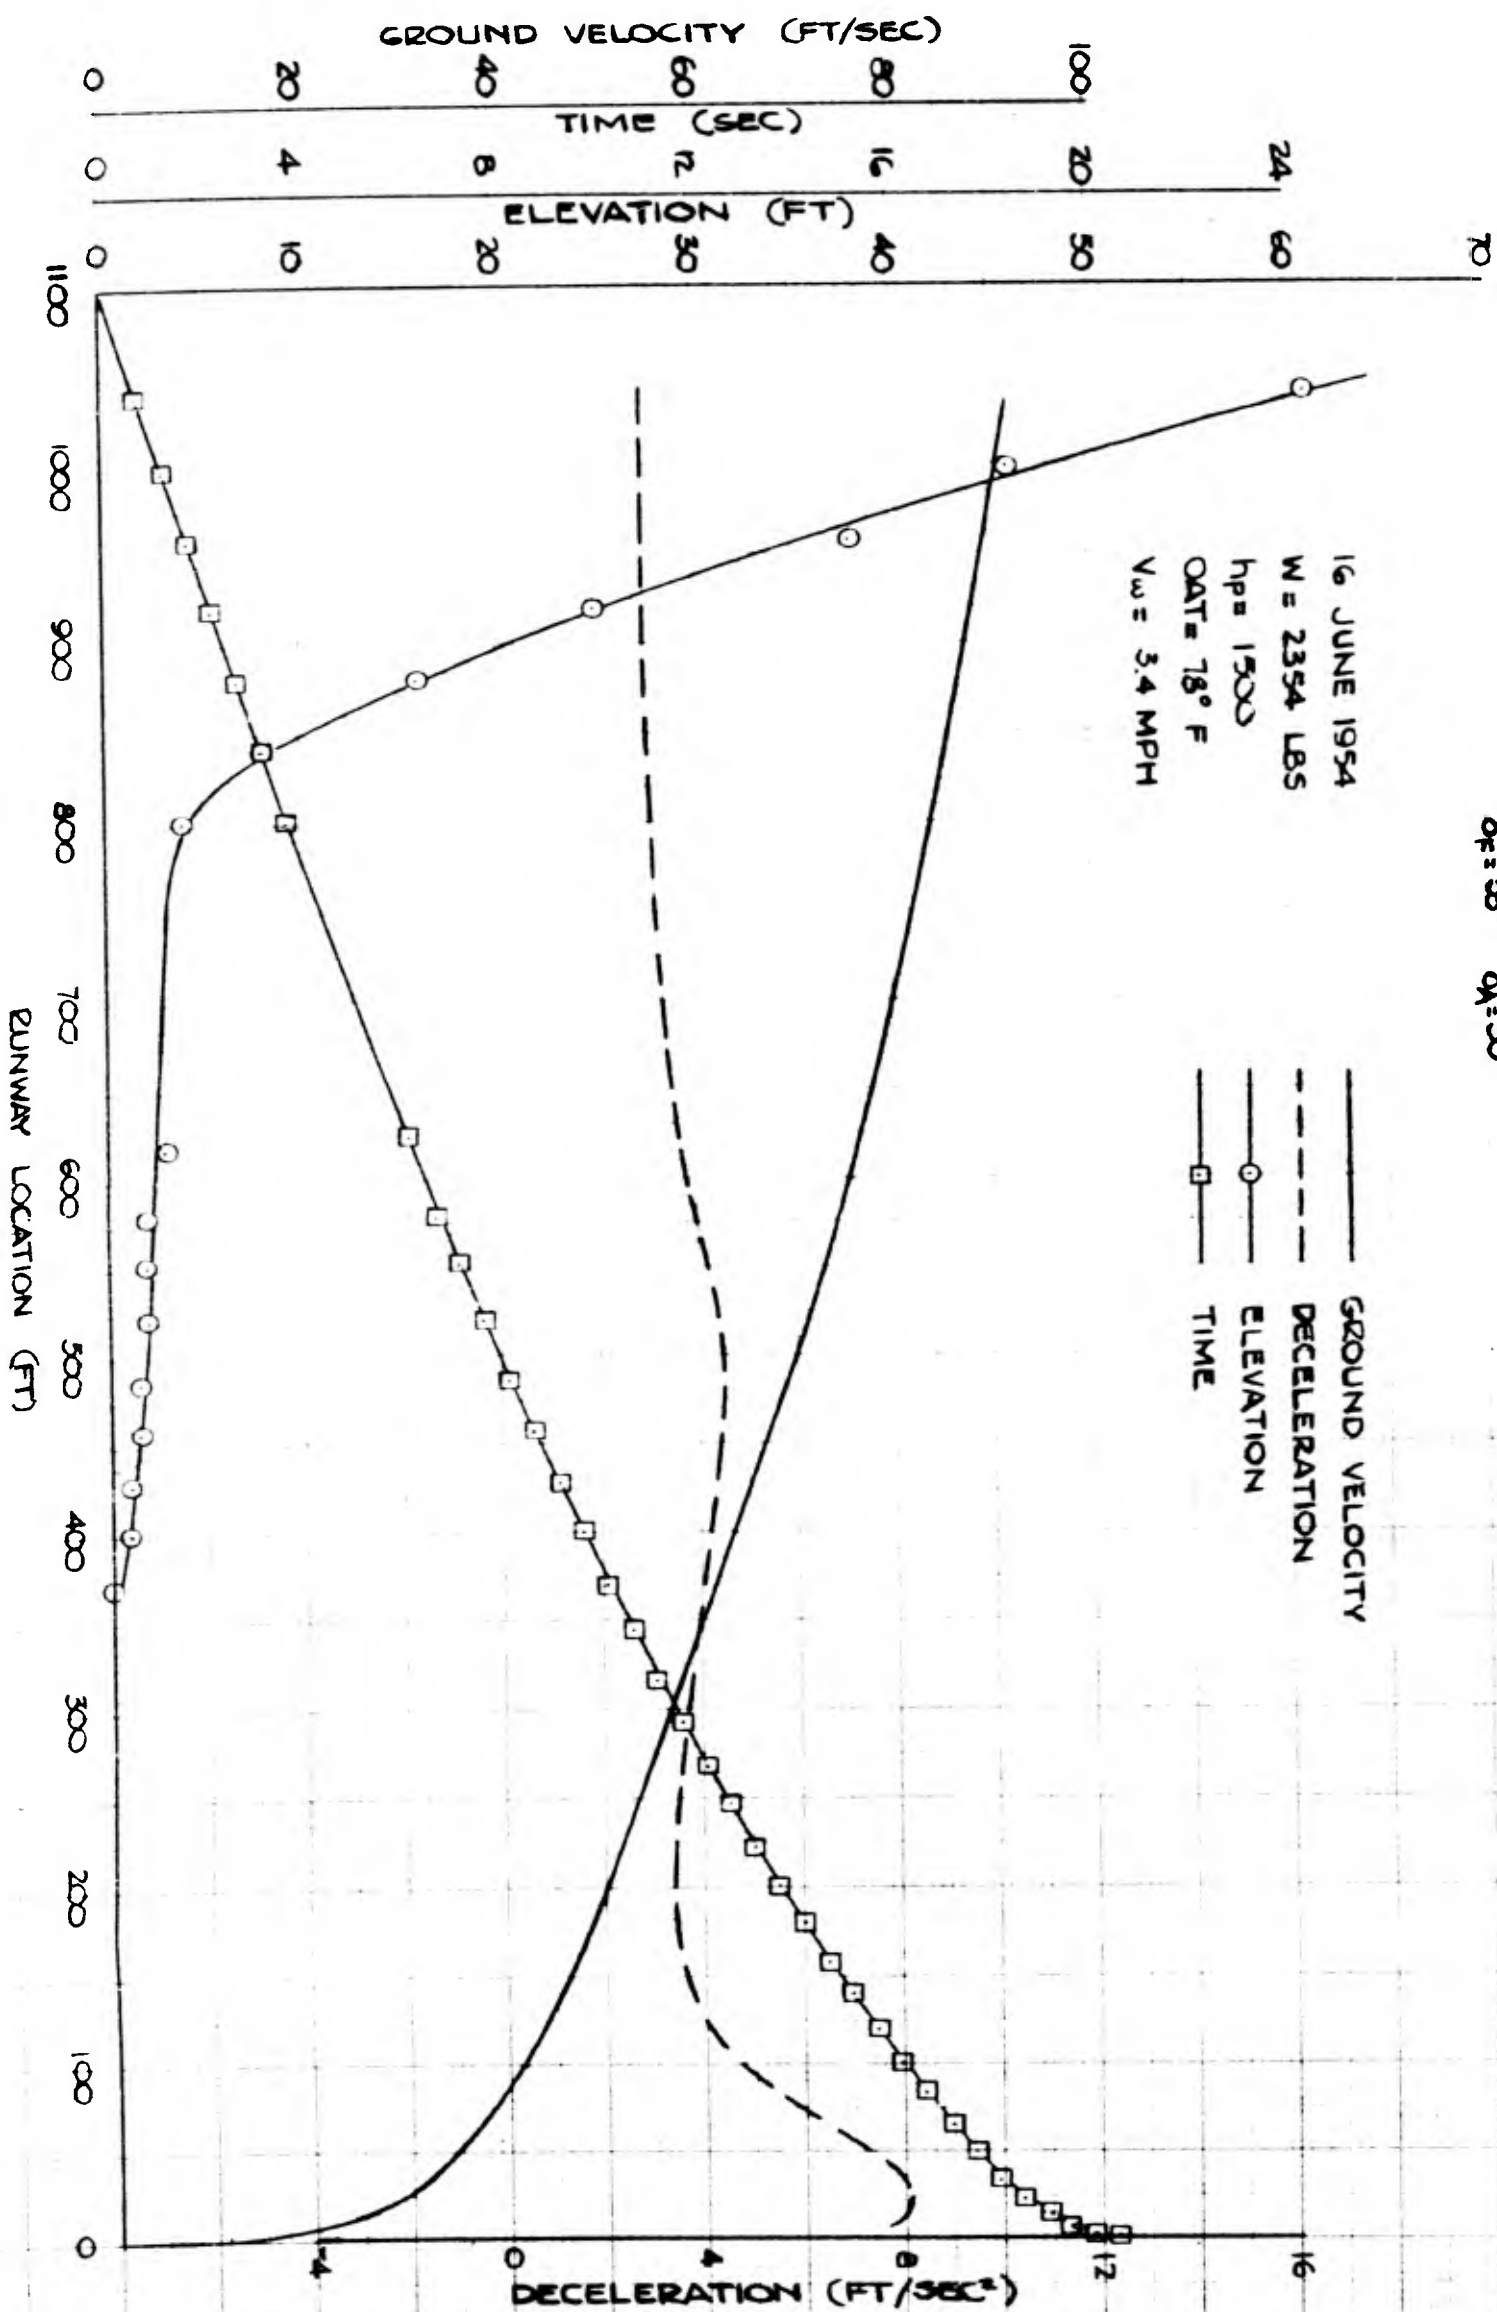


MODEL 319A

LANDING NO. 2
BLC OFF

$\delta_F = 55^\circ$ $\delta_A = 30^\circ$

16 JUNE 1954
W = 2350 LBS
hp = 1500
OAT = 78° F
 $V_w = 1.7$ MPH

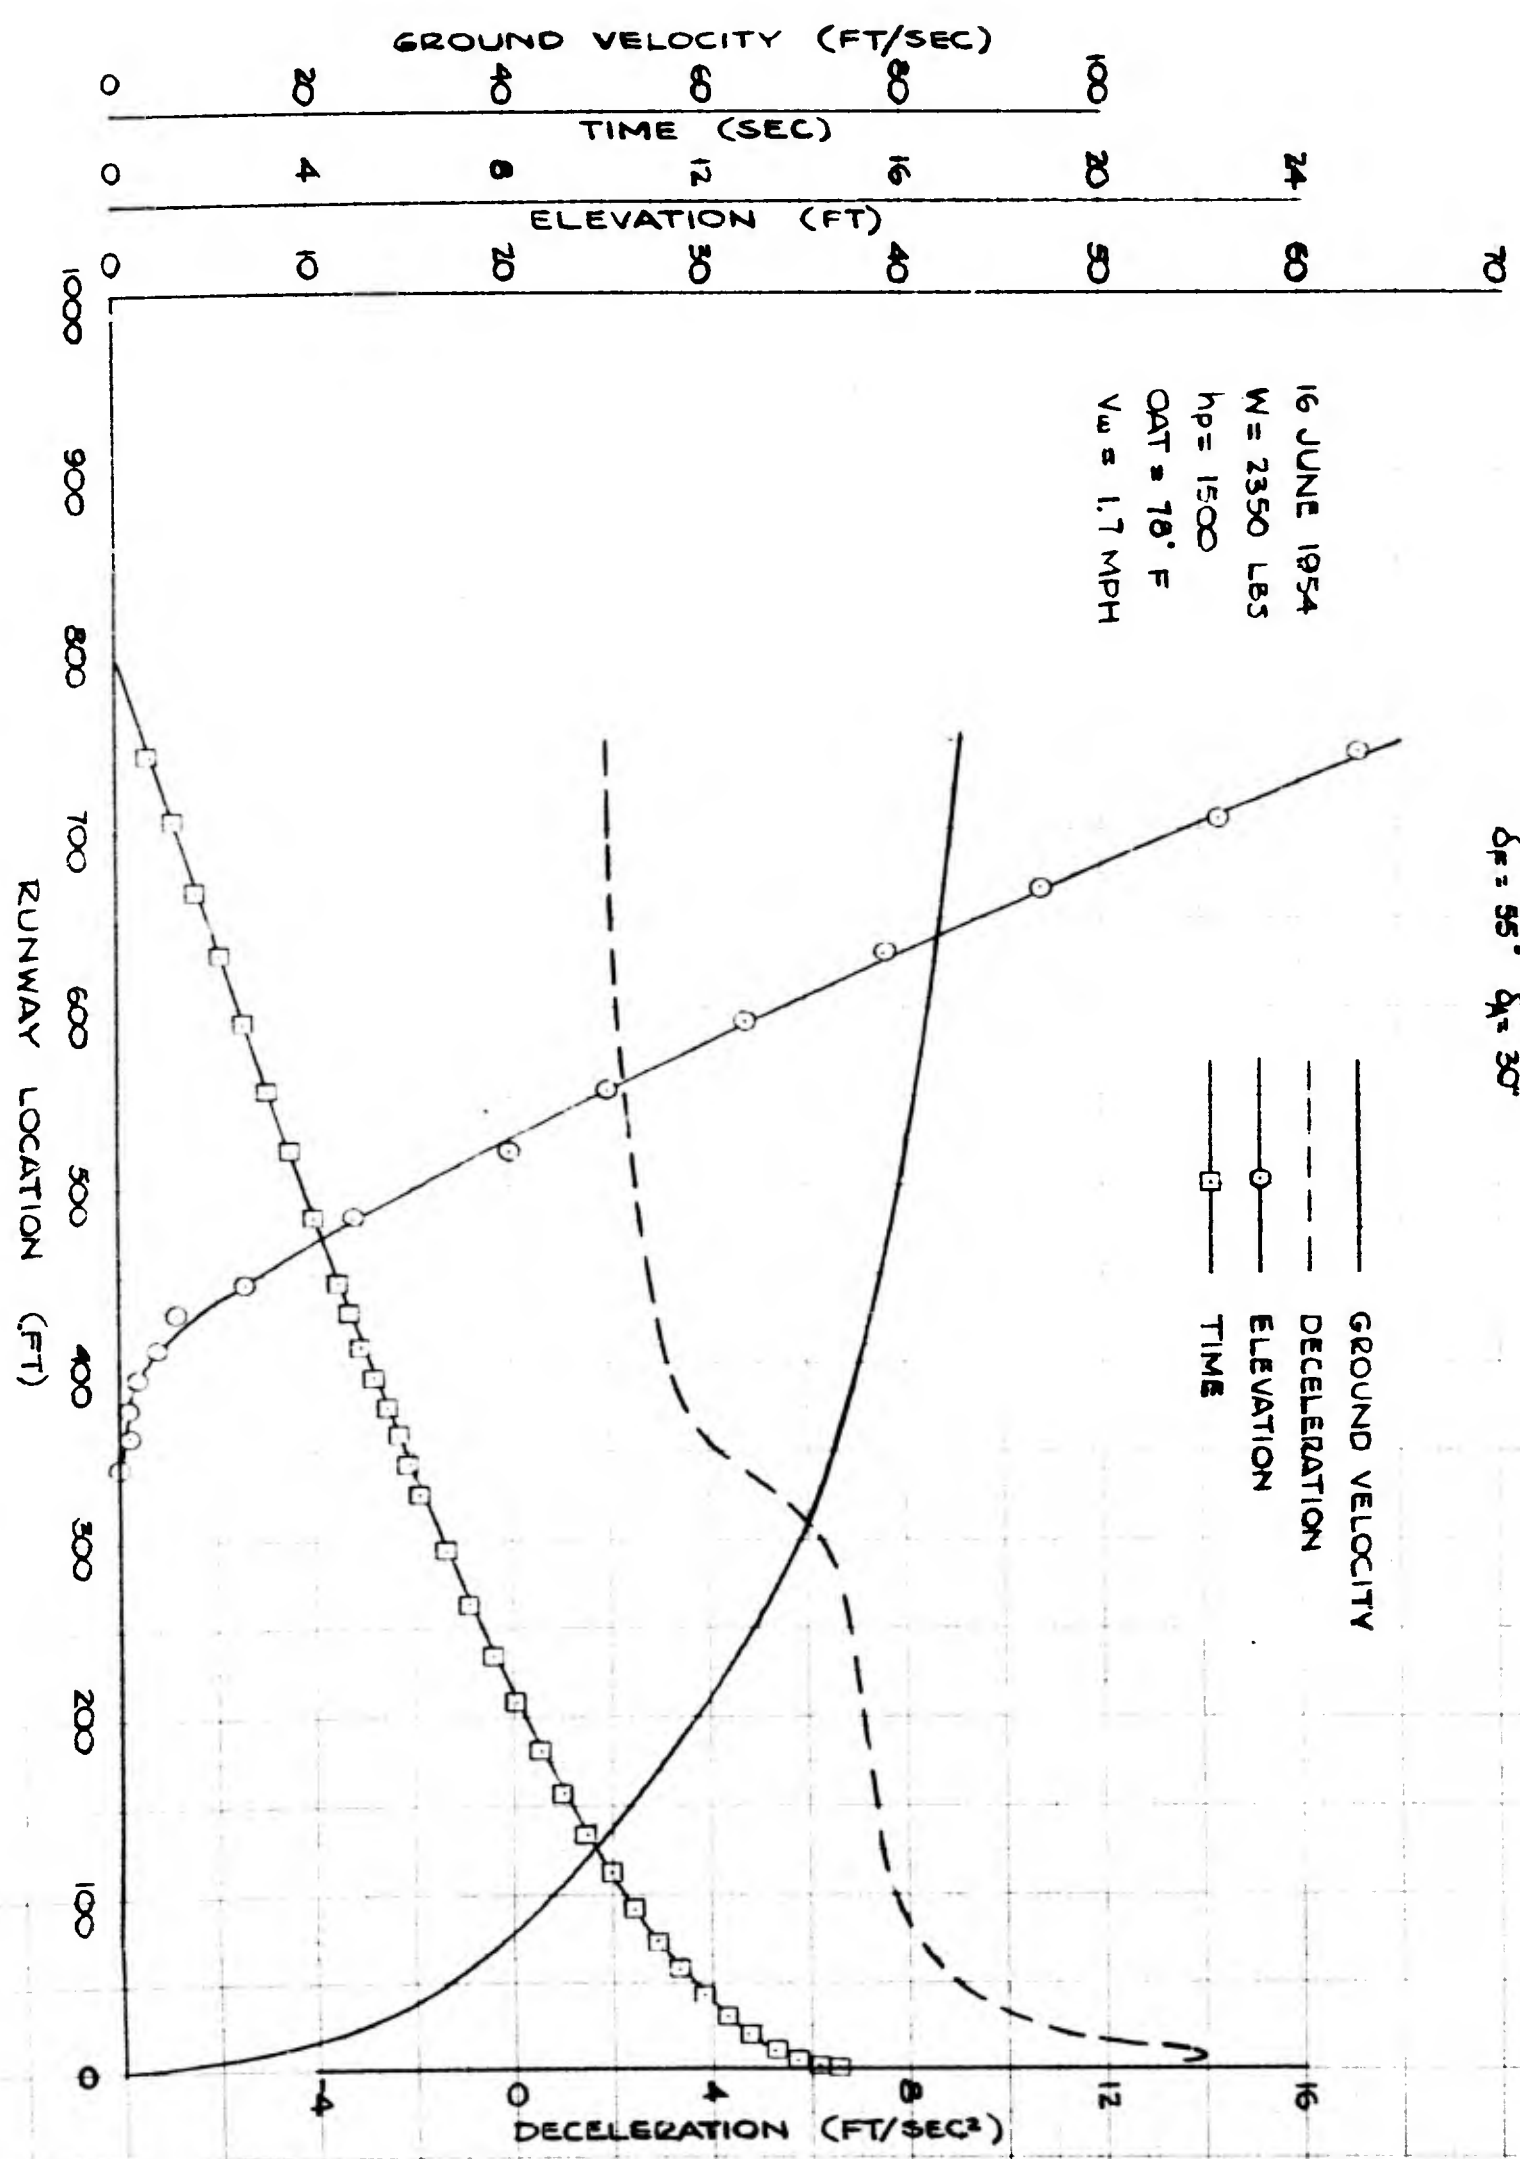


MODEL 319A

LANDING NO 3

BLC OFF

$\delta = 35^\circ$ $\alpha = 30^\circ$


16 JUNE 1954
W = 2346 LBS
hp = 1500
CAT = 18° F
 $V_w = 0$

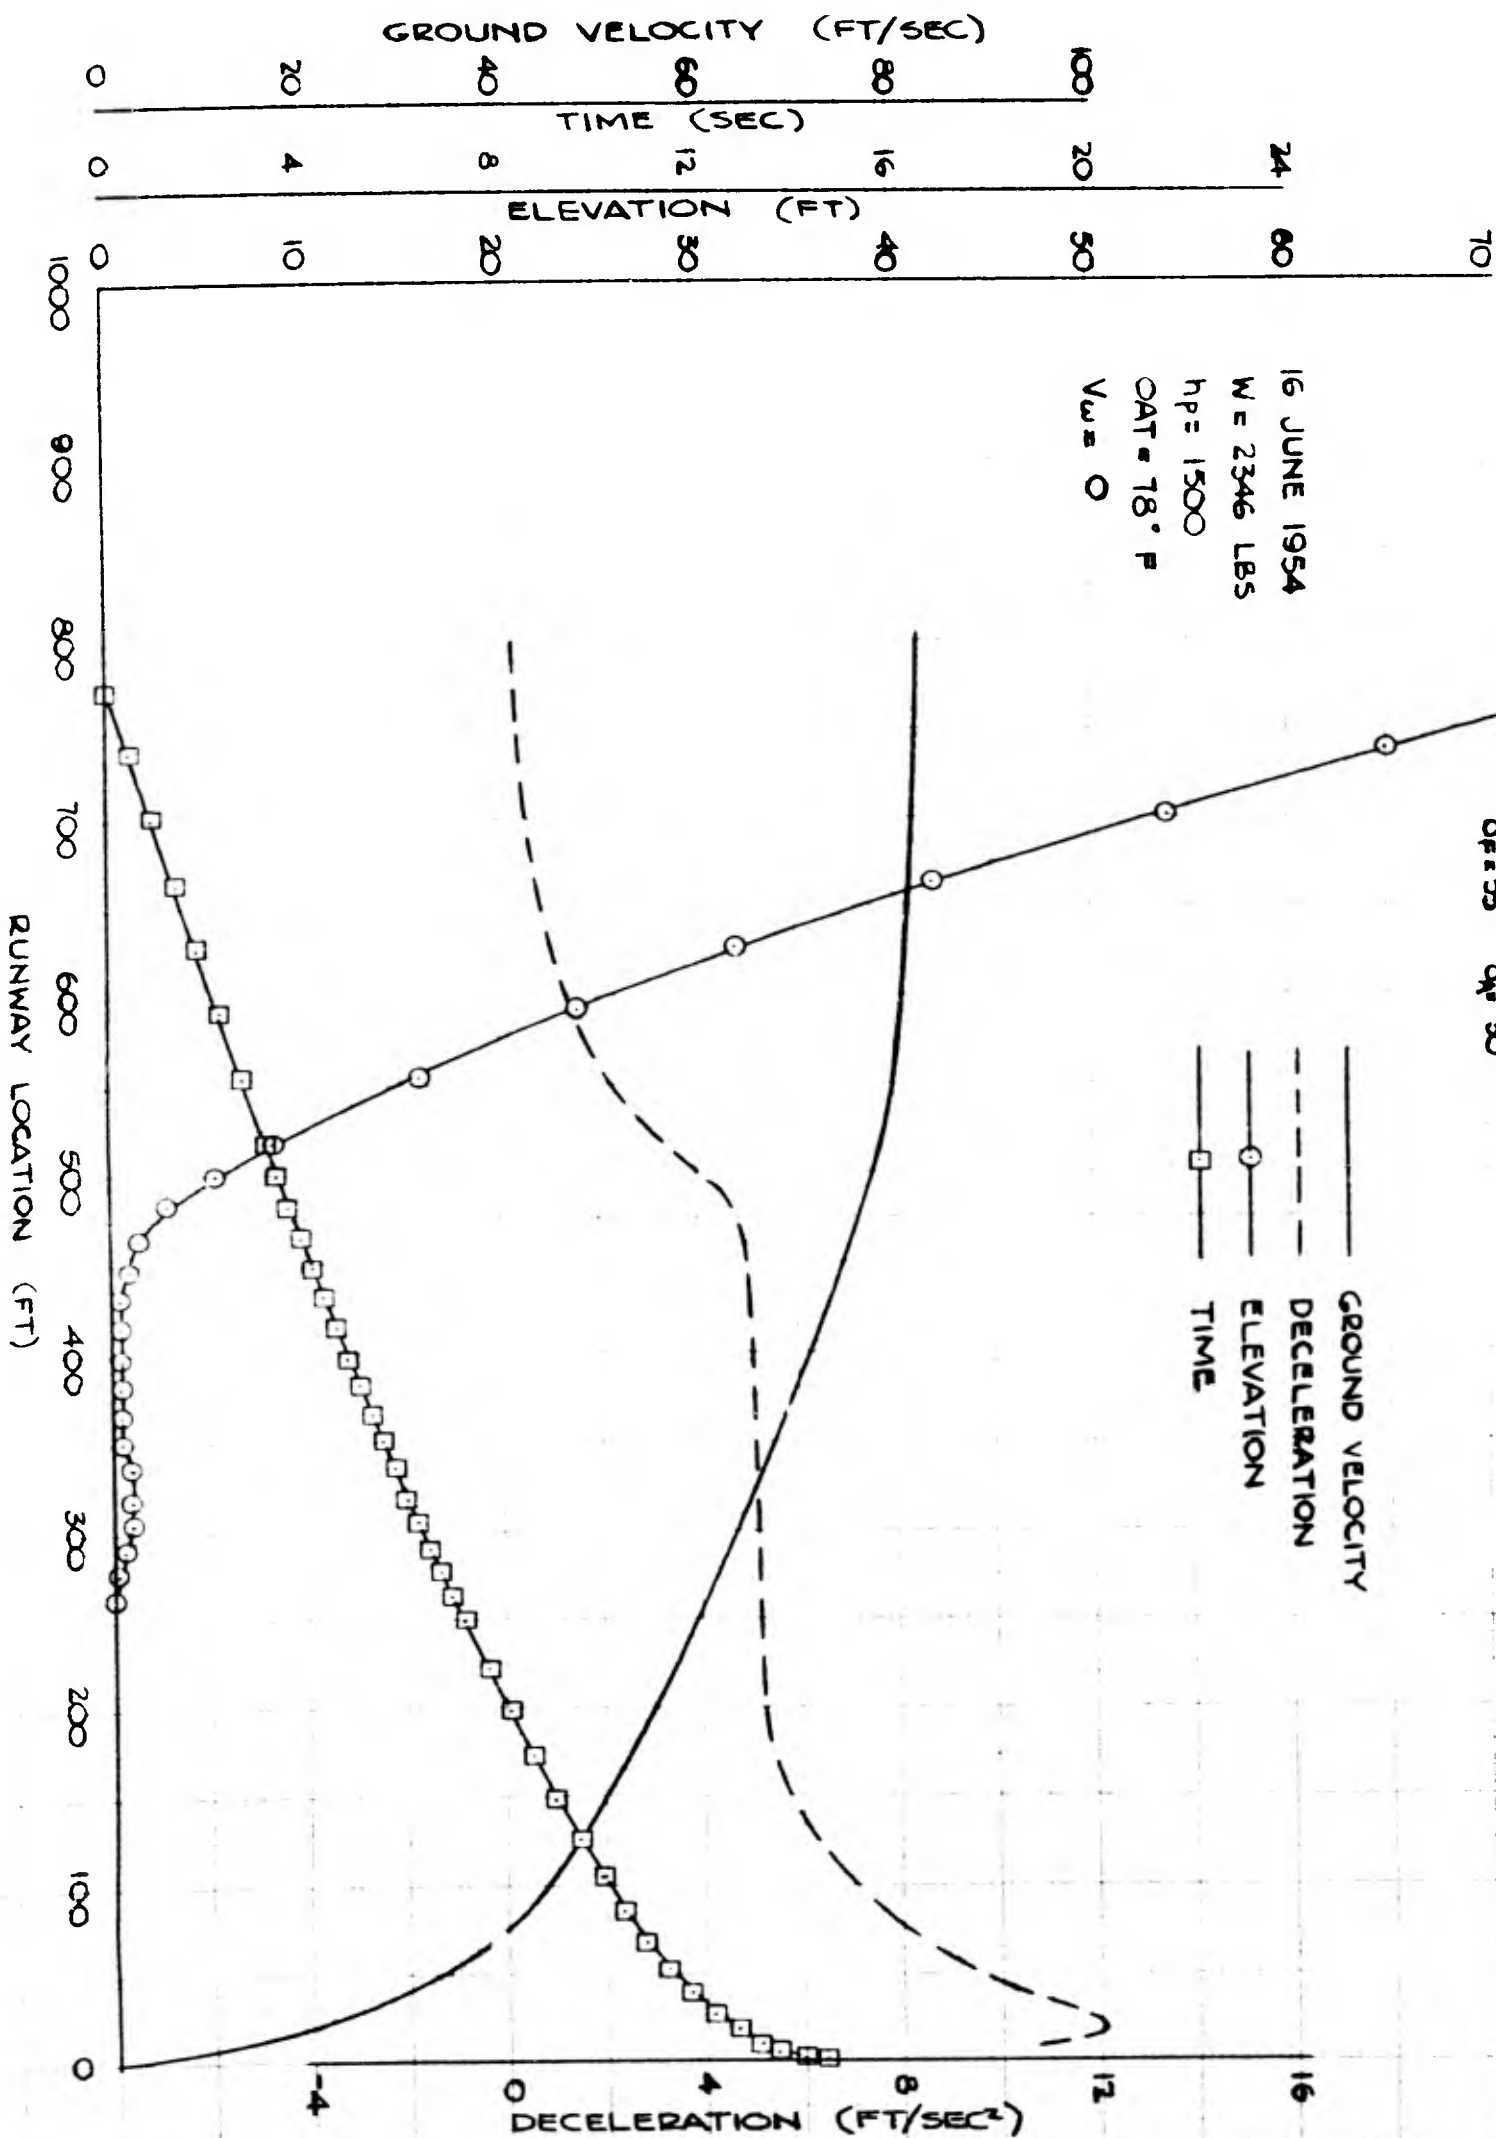

MODEL 319A

LANDING NO. 4
BLC OFF
 $\delta p = 55^\circ$ $\delta \alpha = 20^\circ$

16 JUNE 1954
W = 2344 LBS
hp = 1900
OAT = 79° F
 $V_{LO} = 2.8$ MPH

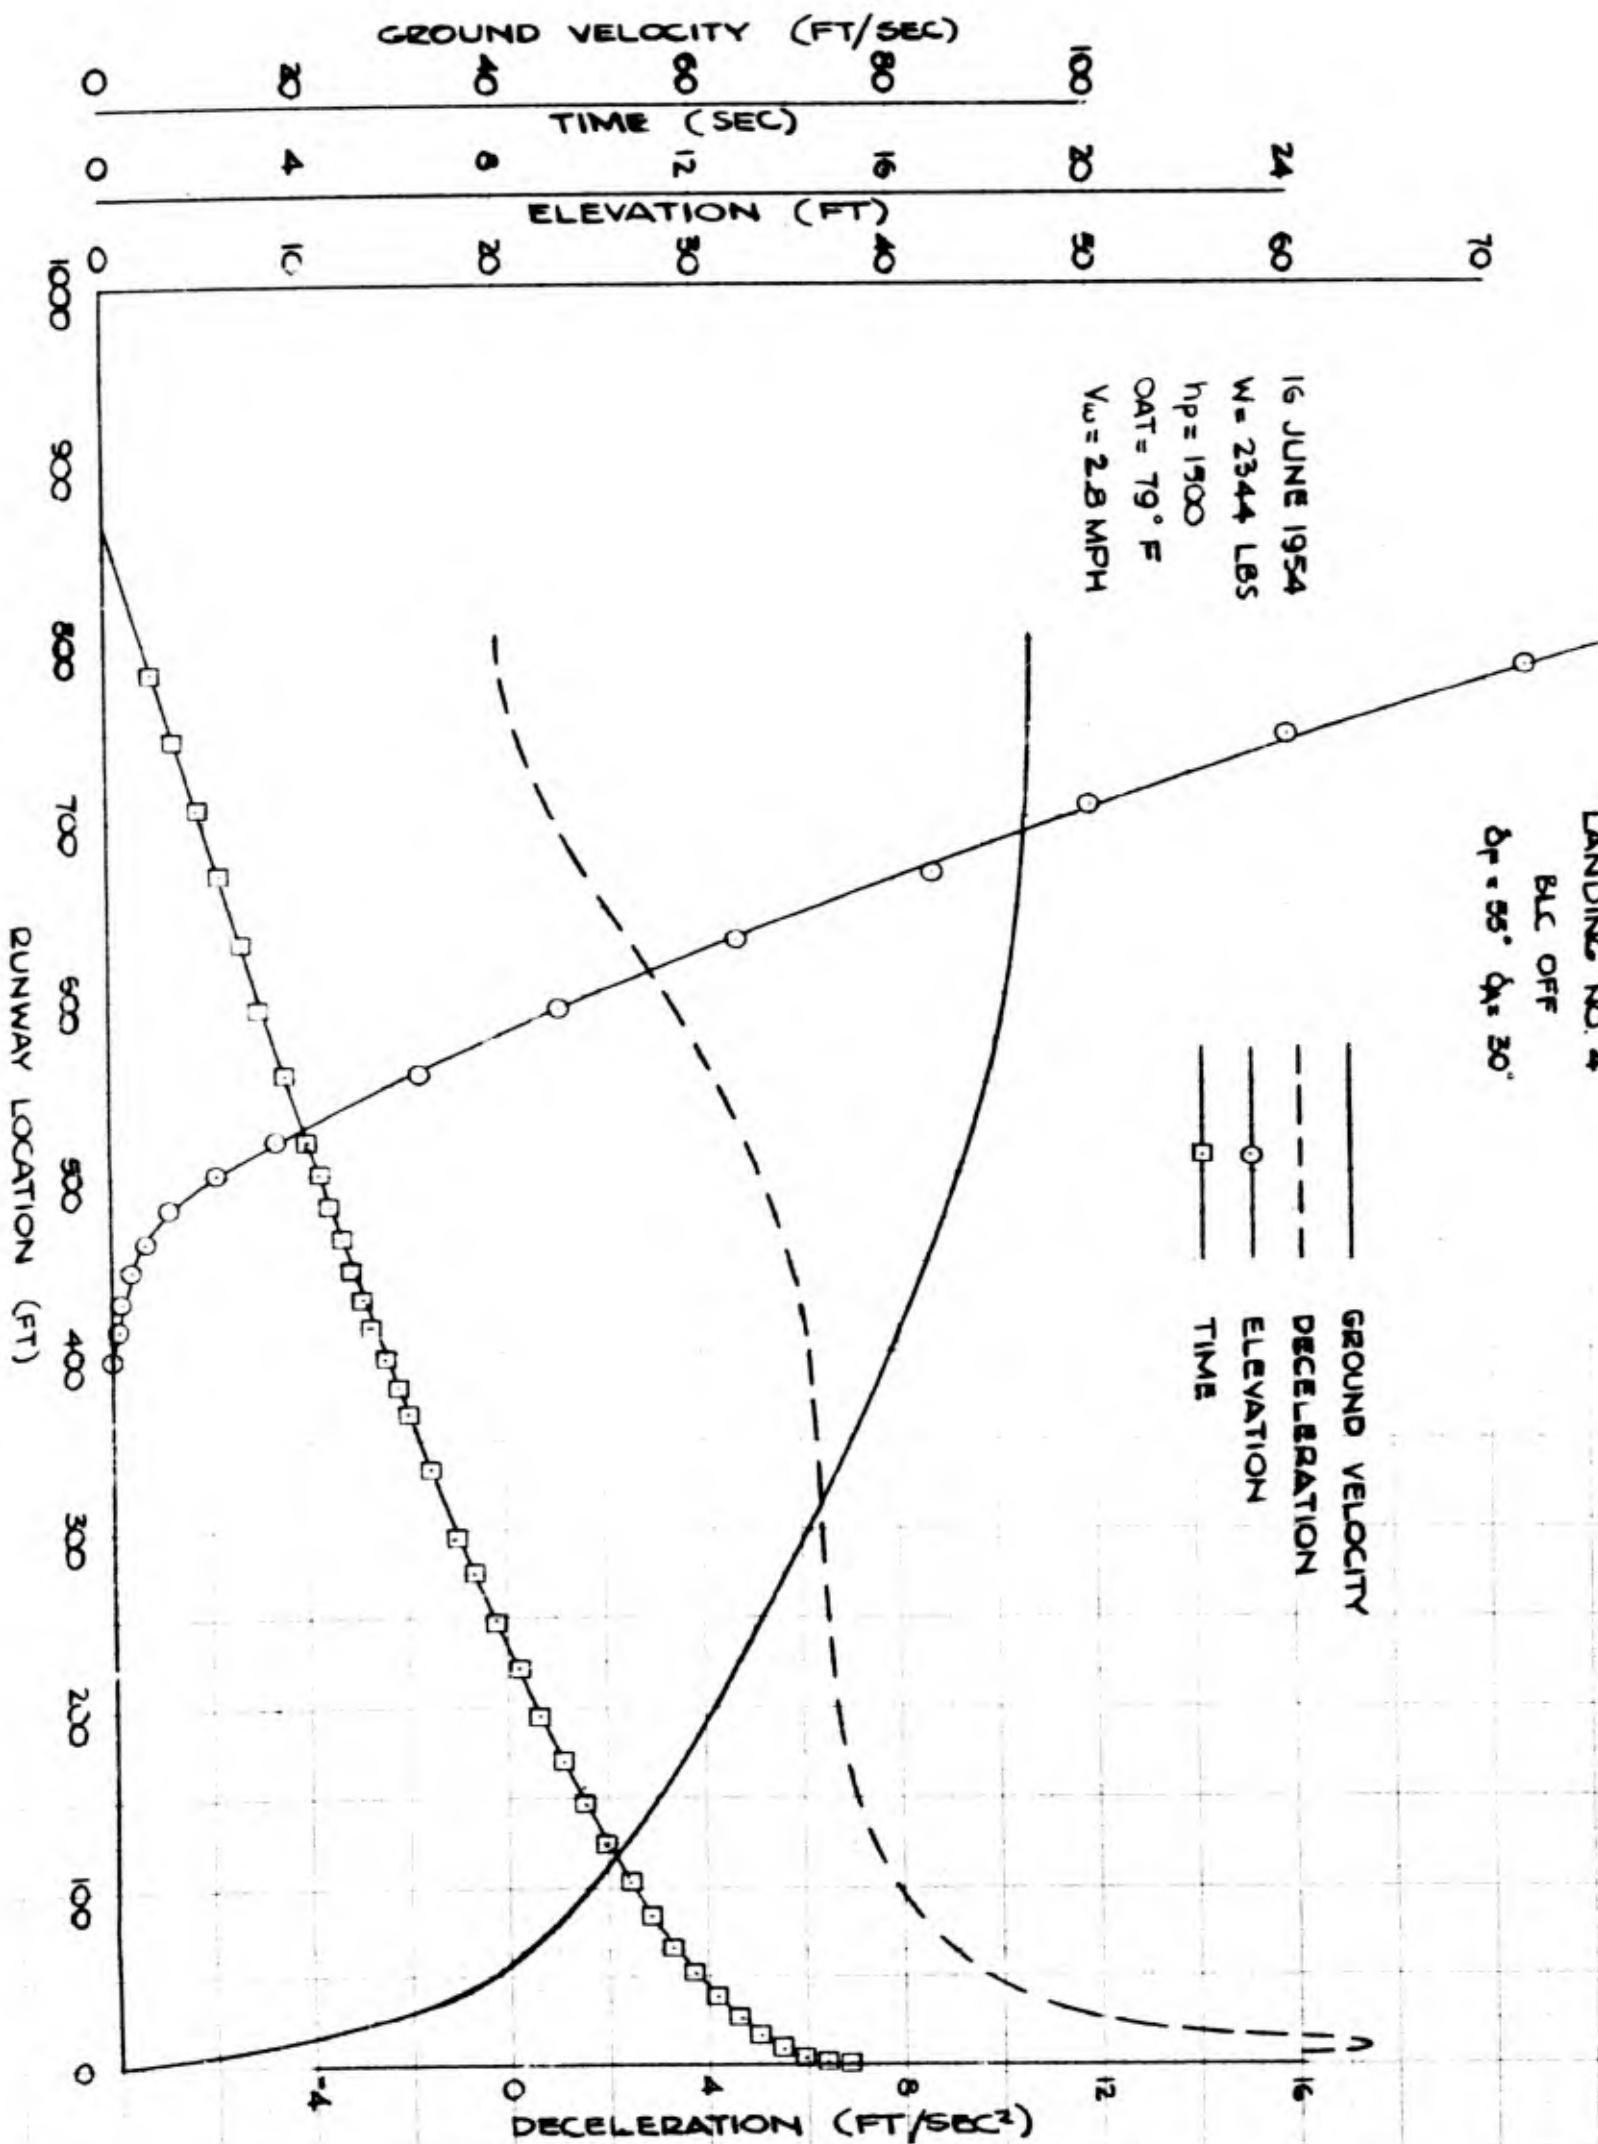

CONFIDENTIAL

PAGE 63
FIG. 45


MODEL B19A

LANDING NO. 5


BLC OFF


$\delta F = 55'$ $\delta A = 30'$


16 JUNE 1954
W = 2342 LBS
 $h_p = 1500$
OAT = $79^\circ F$
 $V_w = 3.2$ MPH

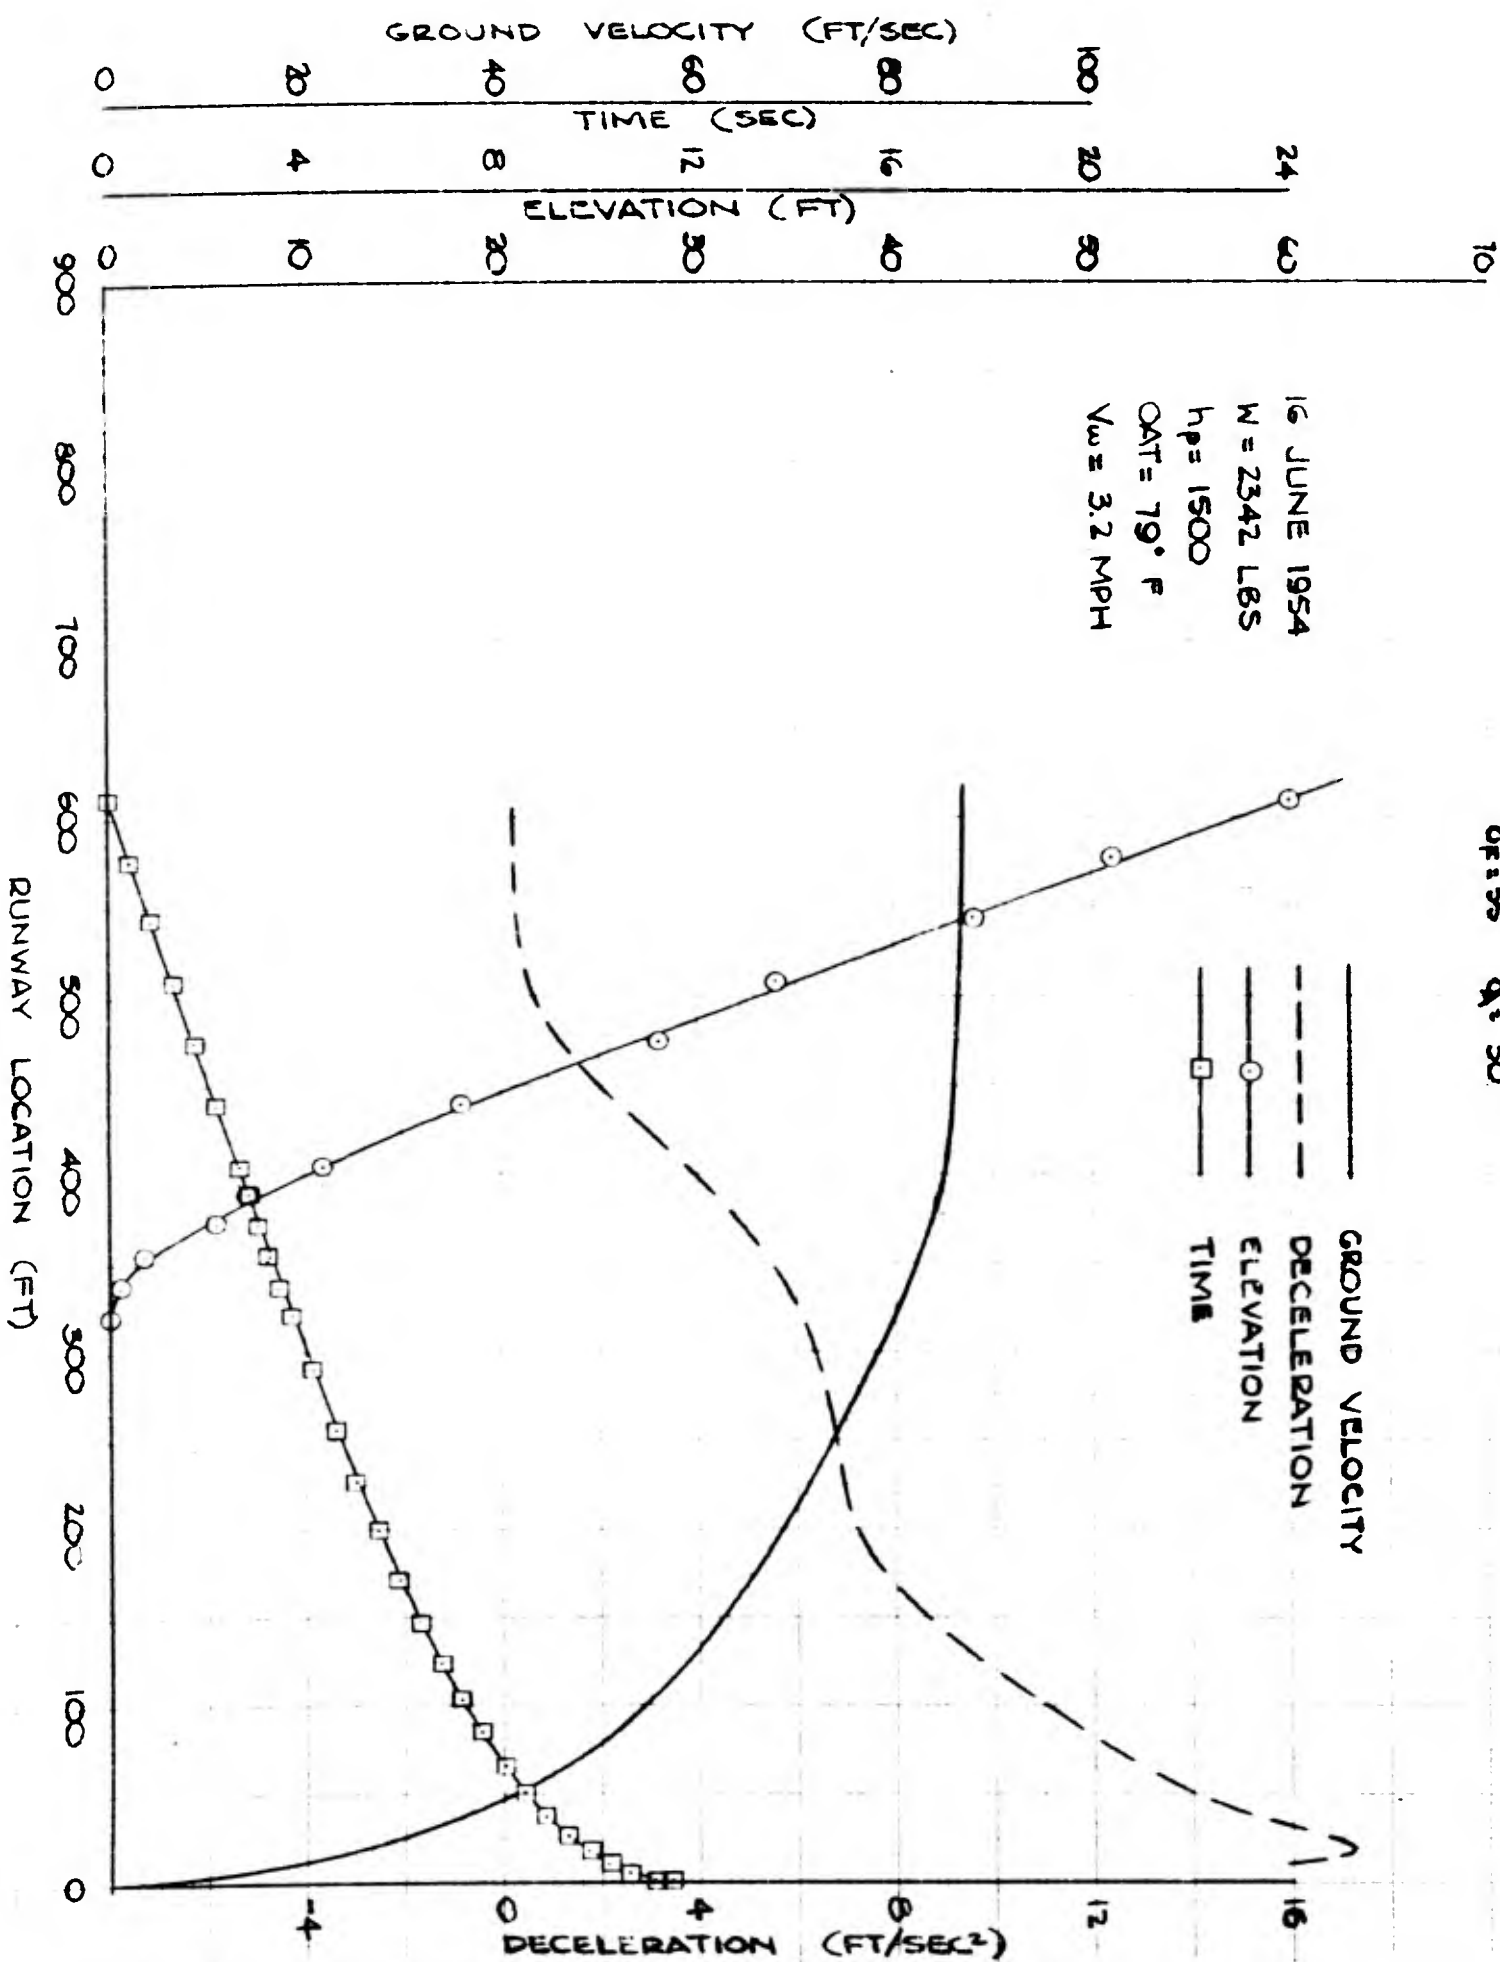



CONFIDENTIAL

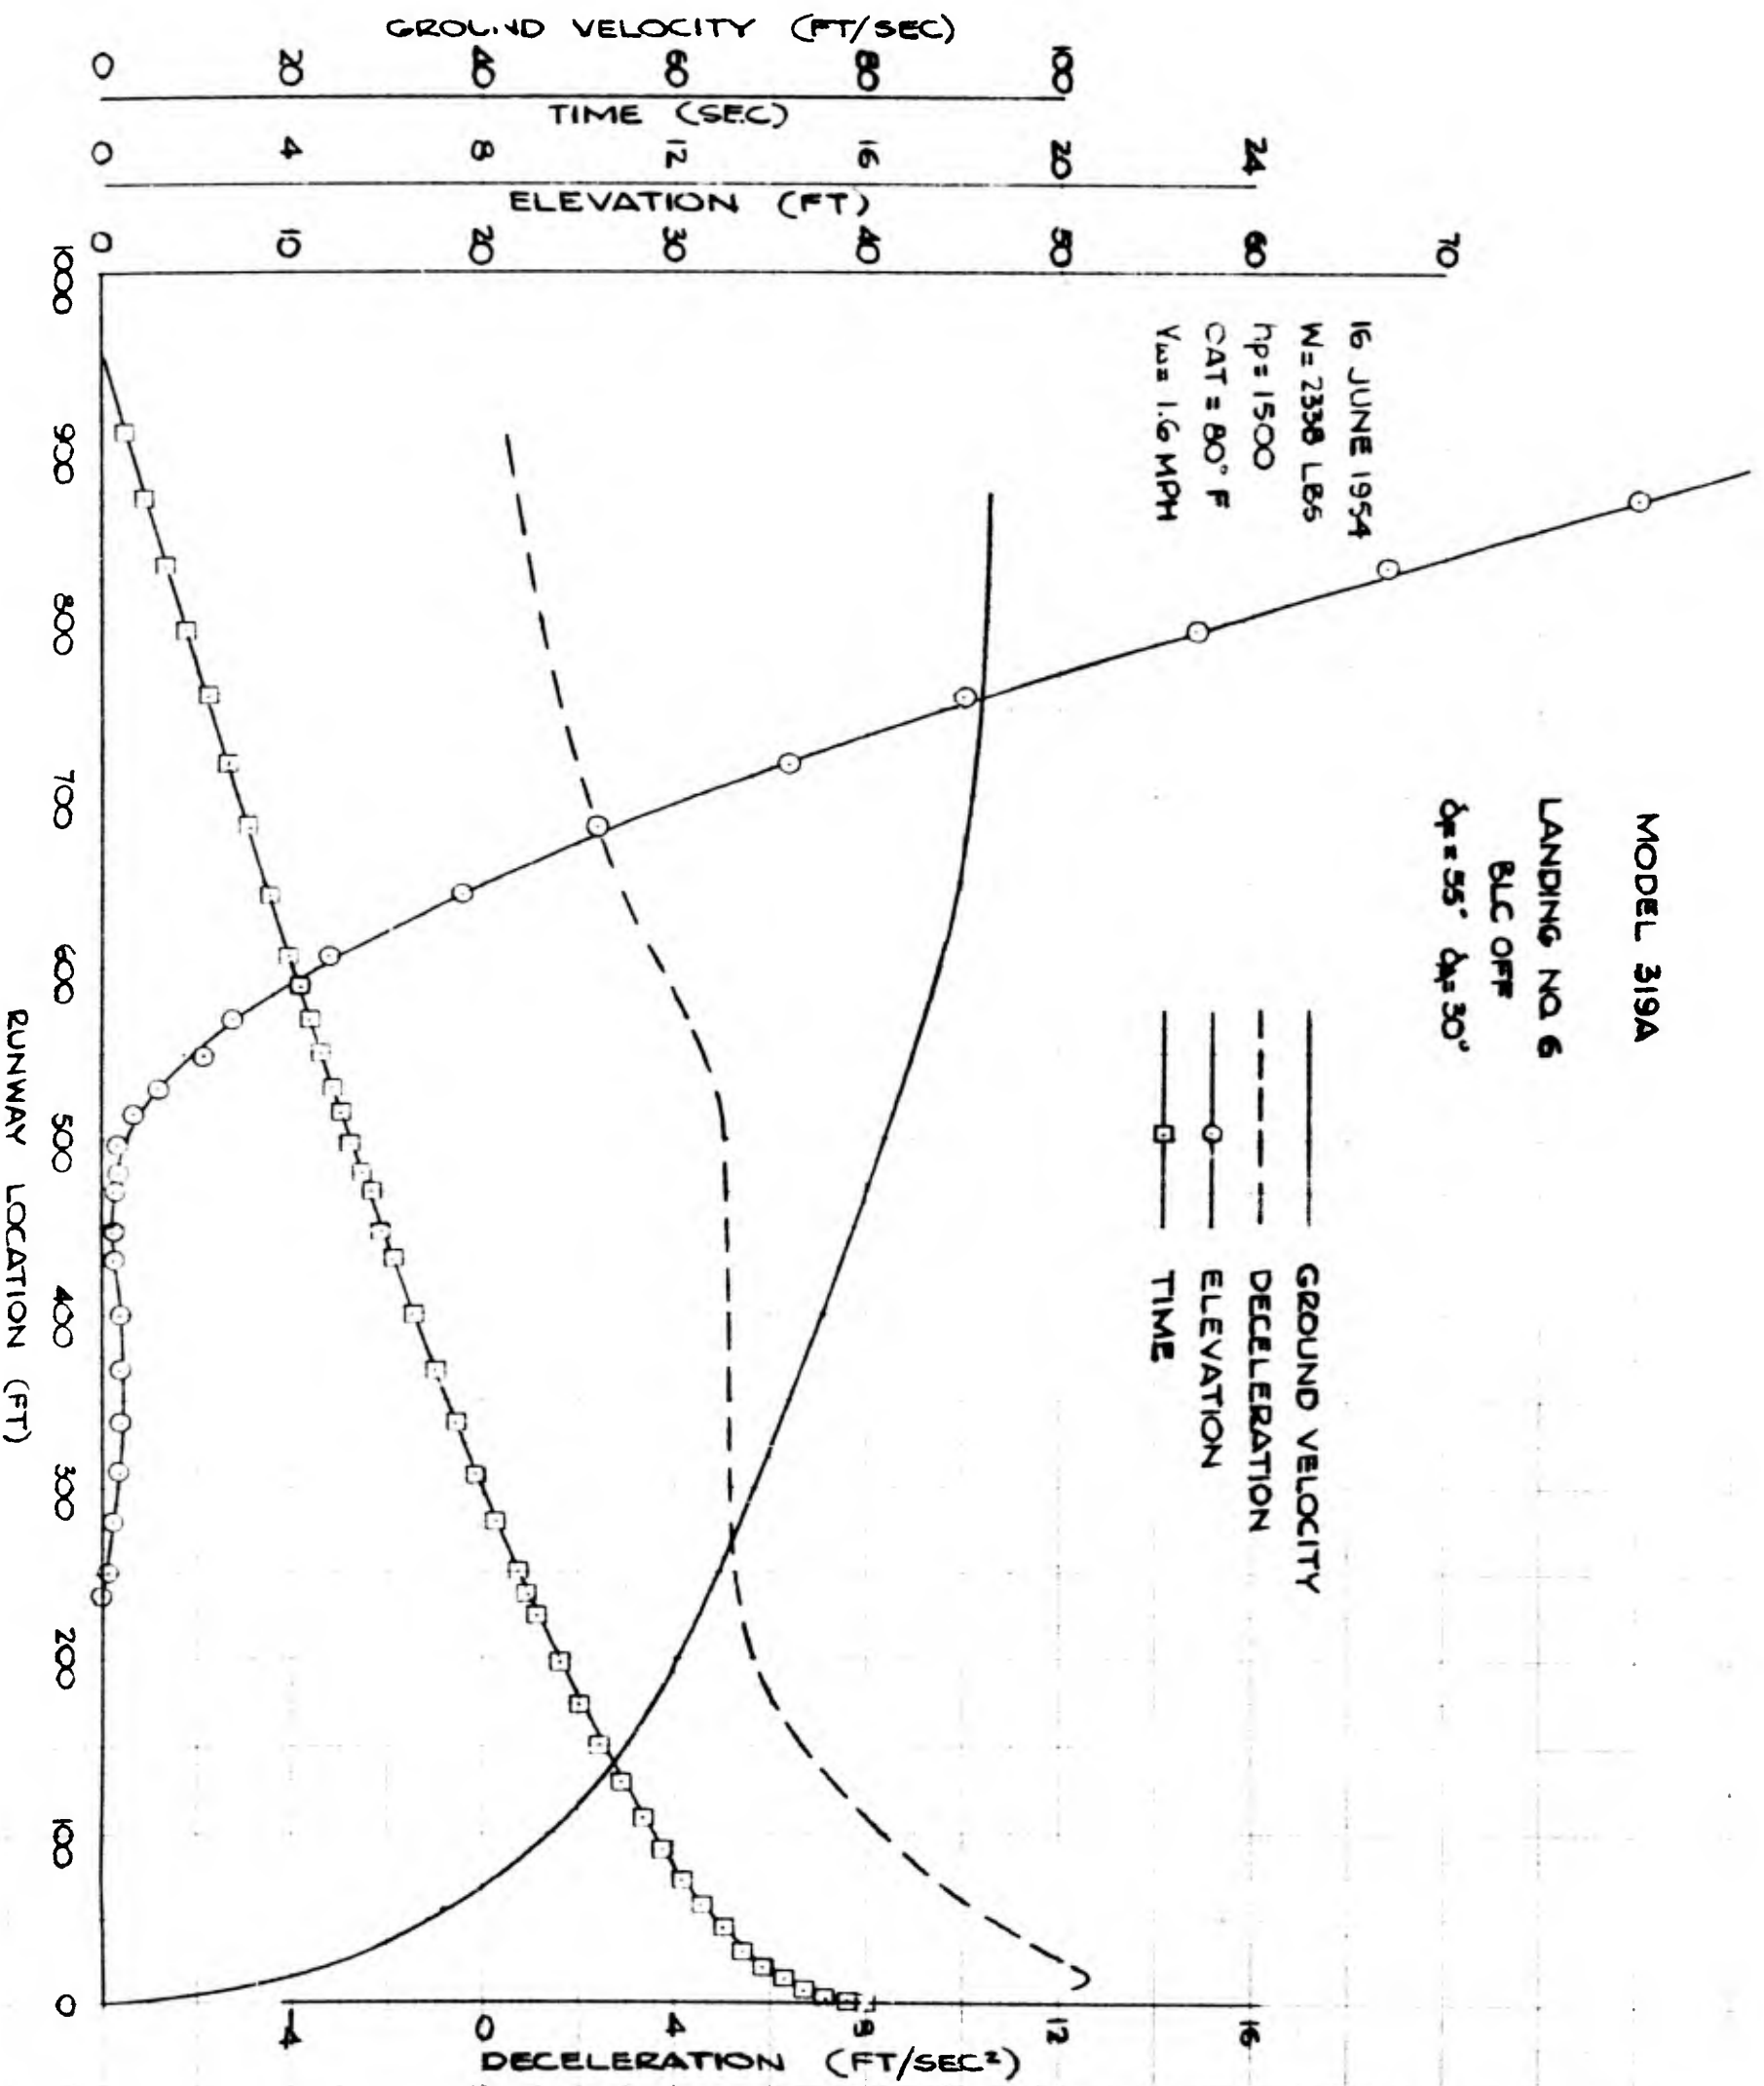

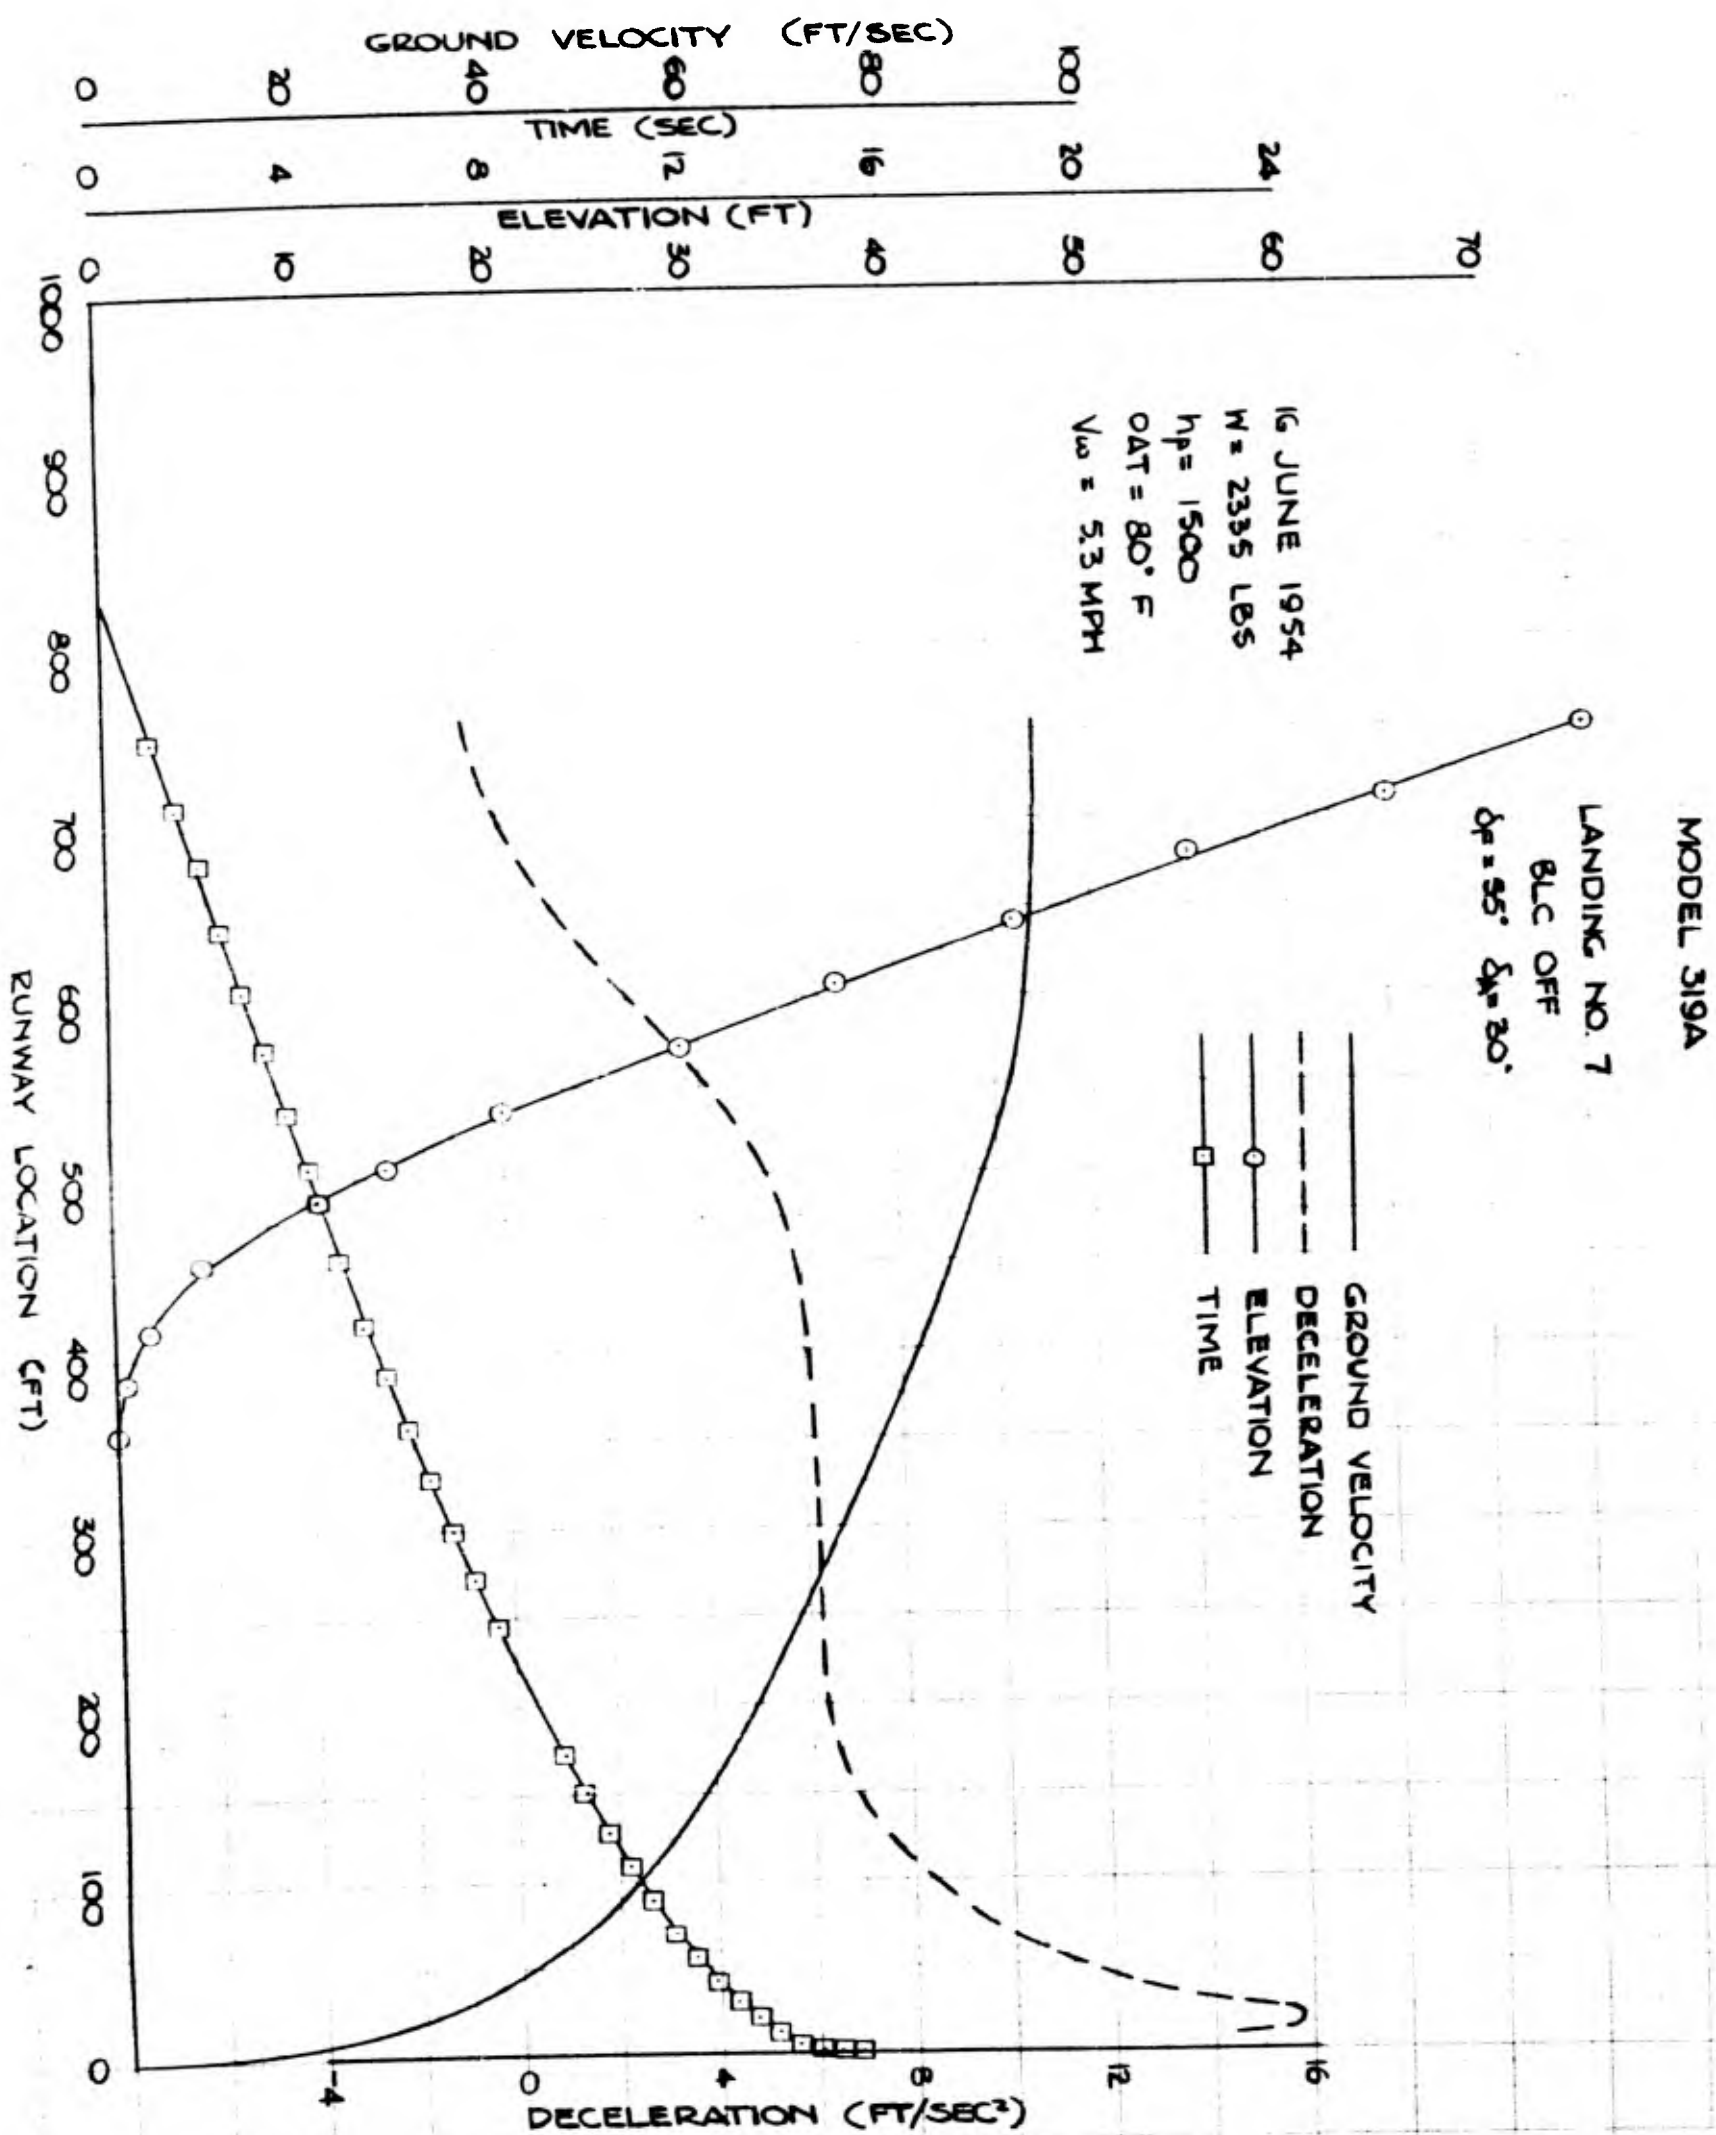

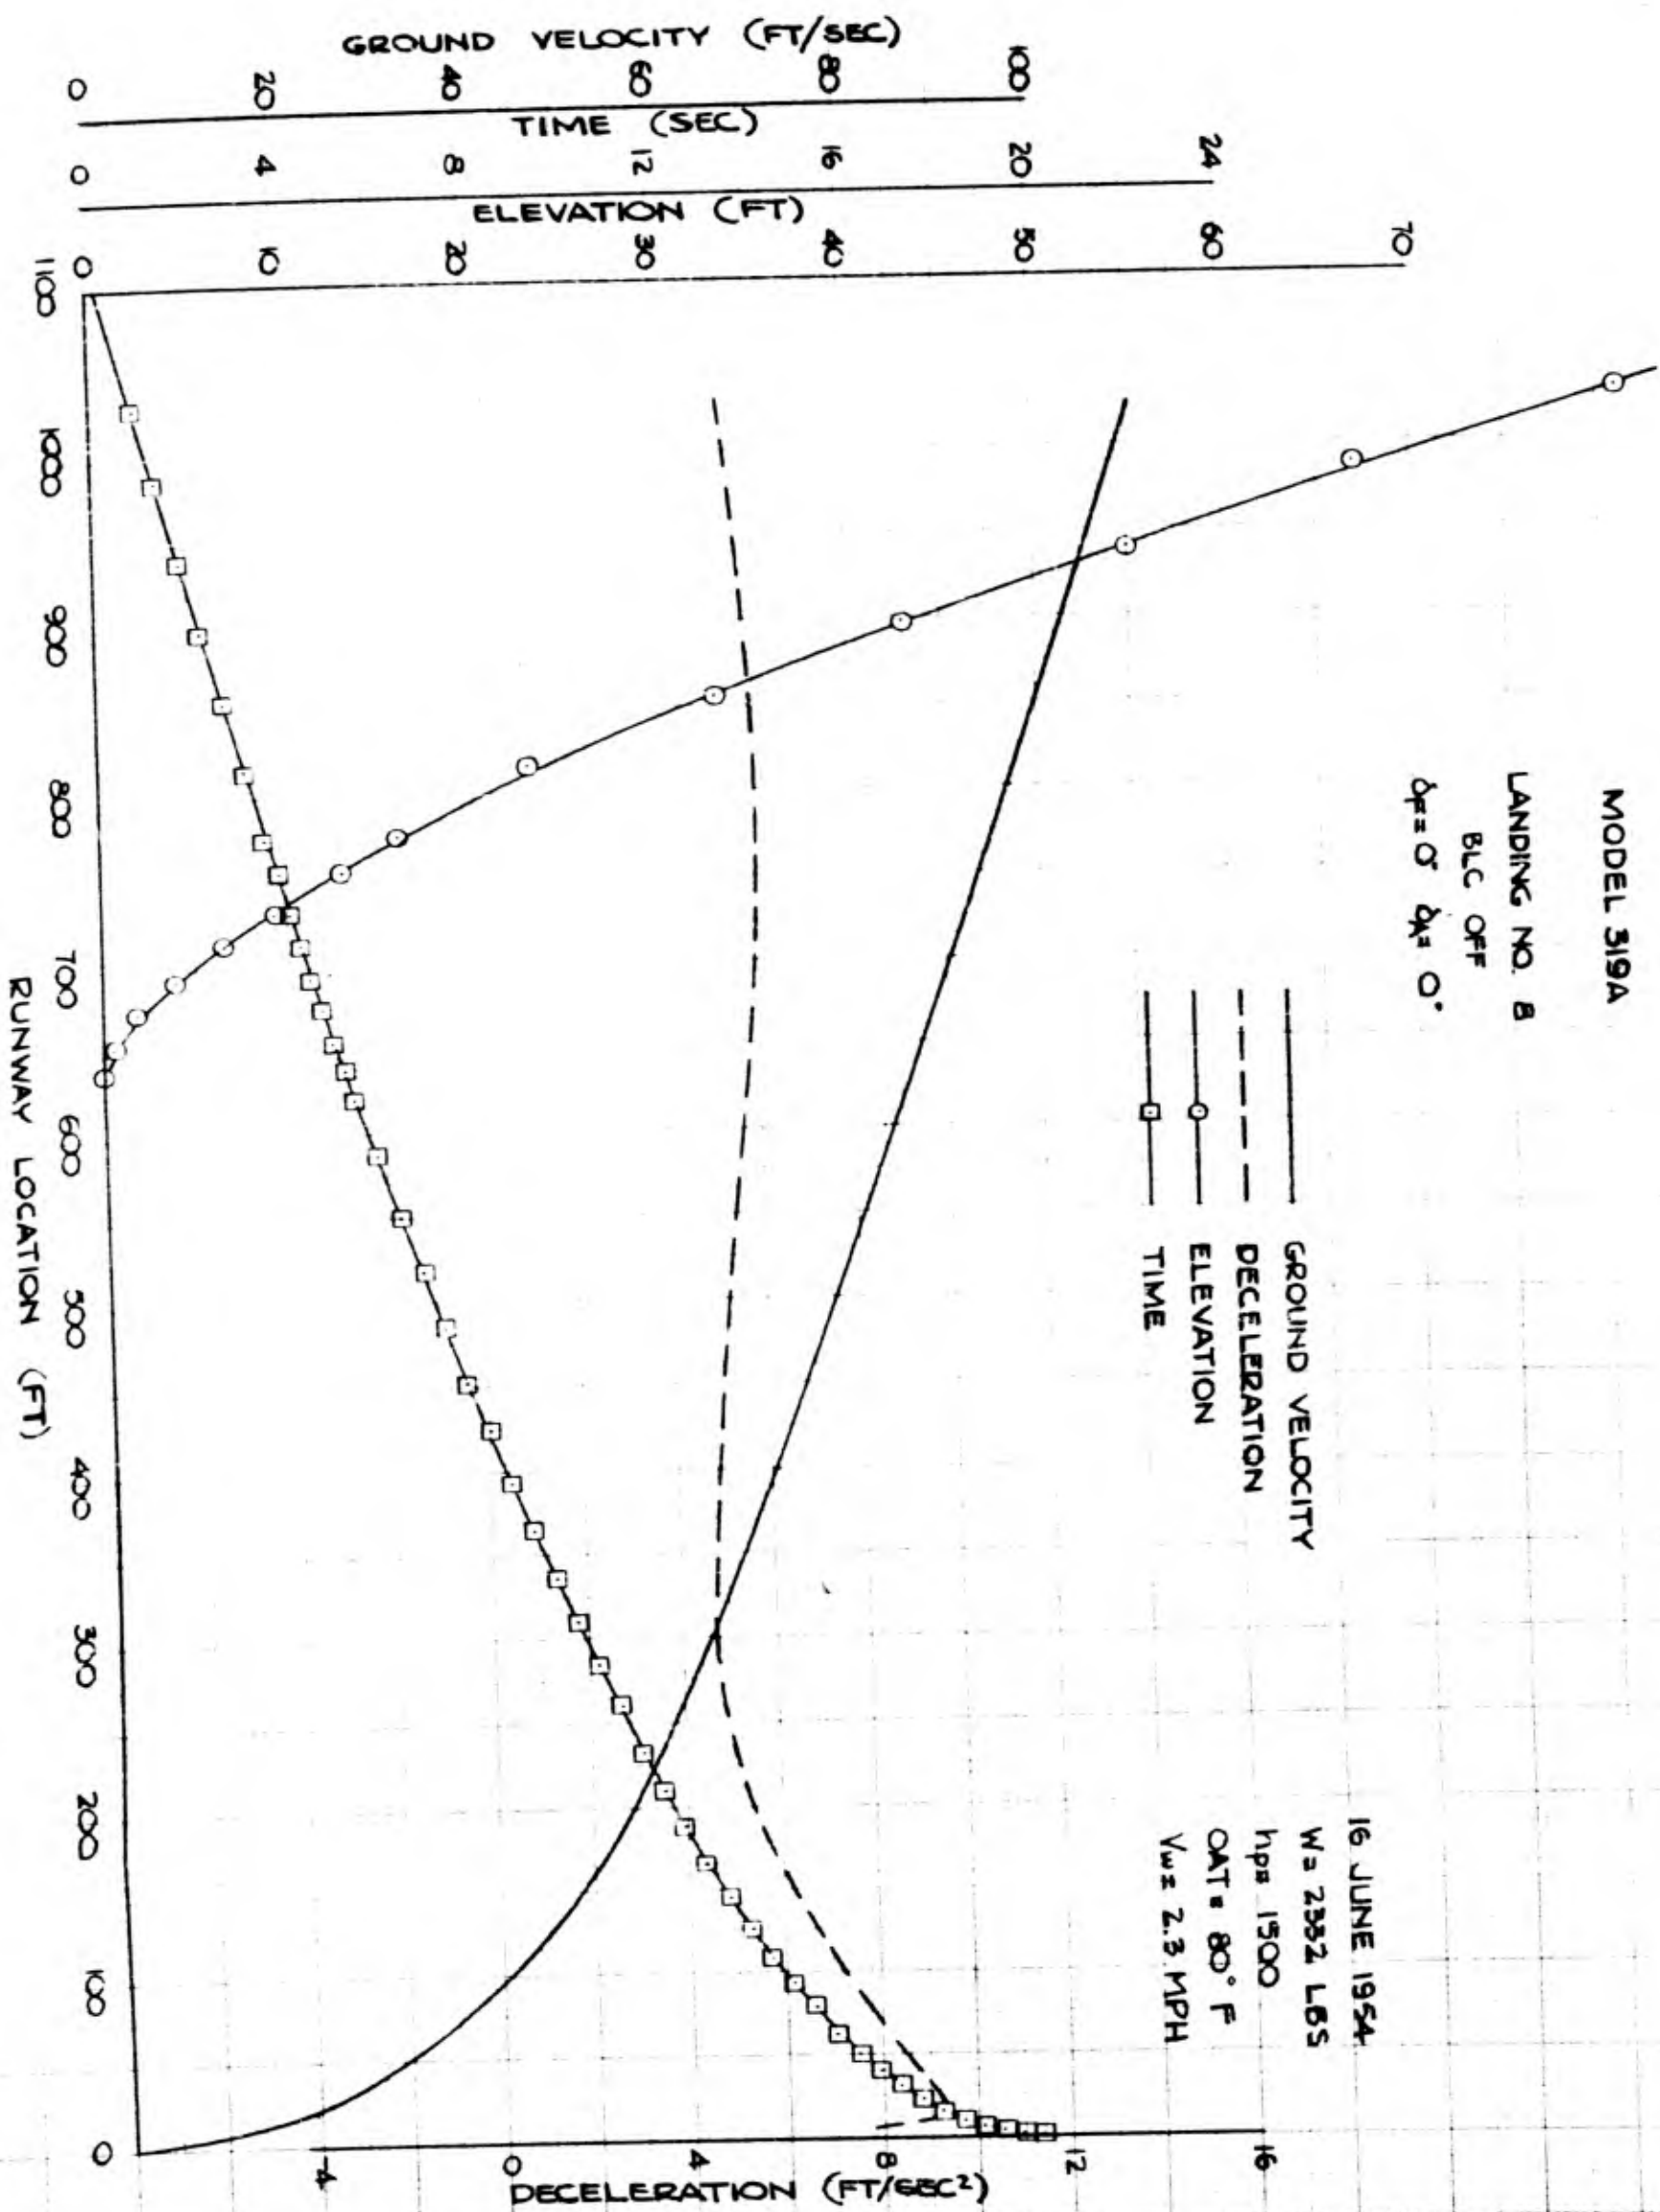


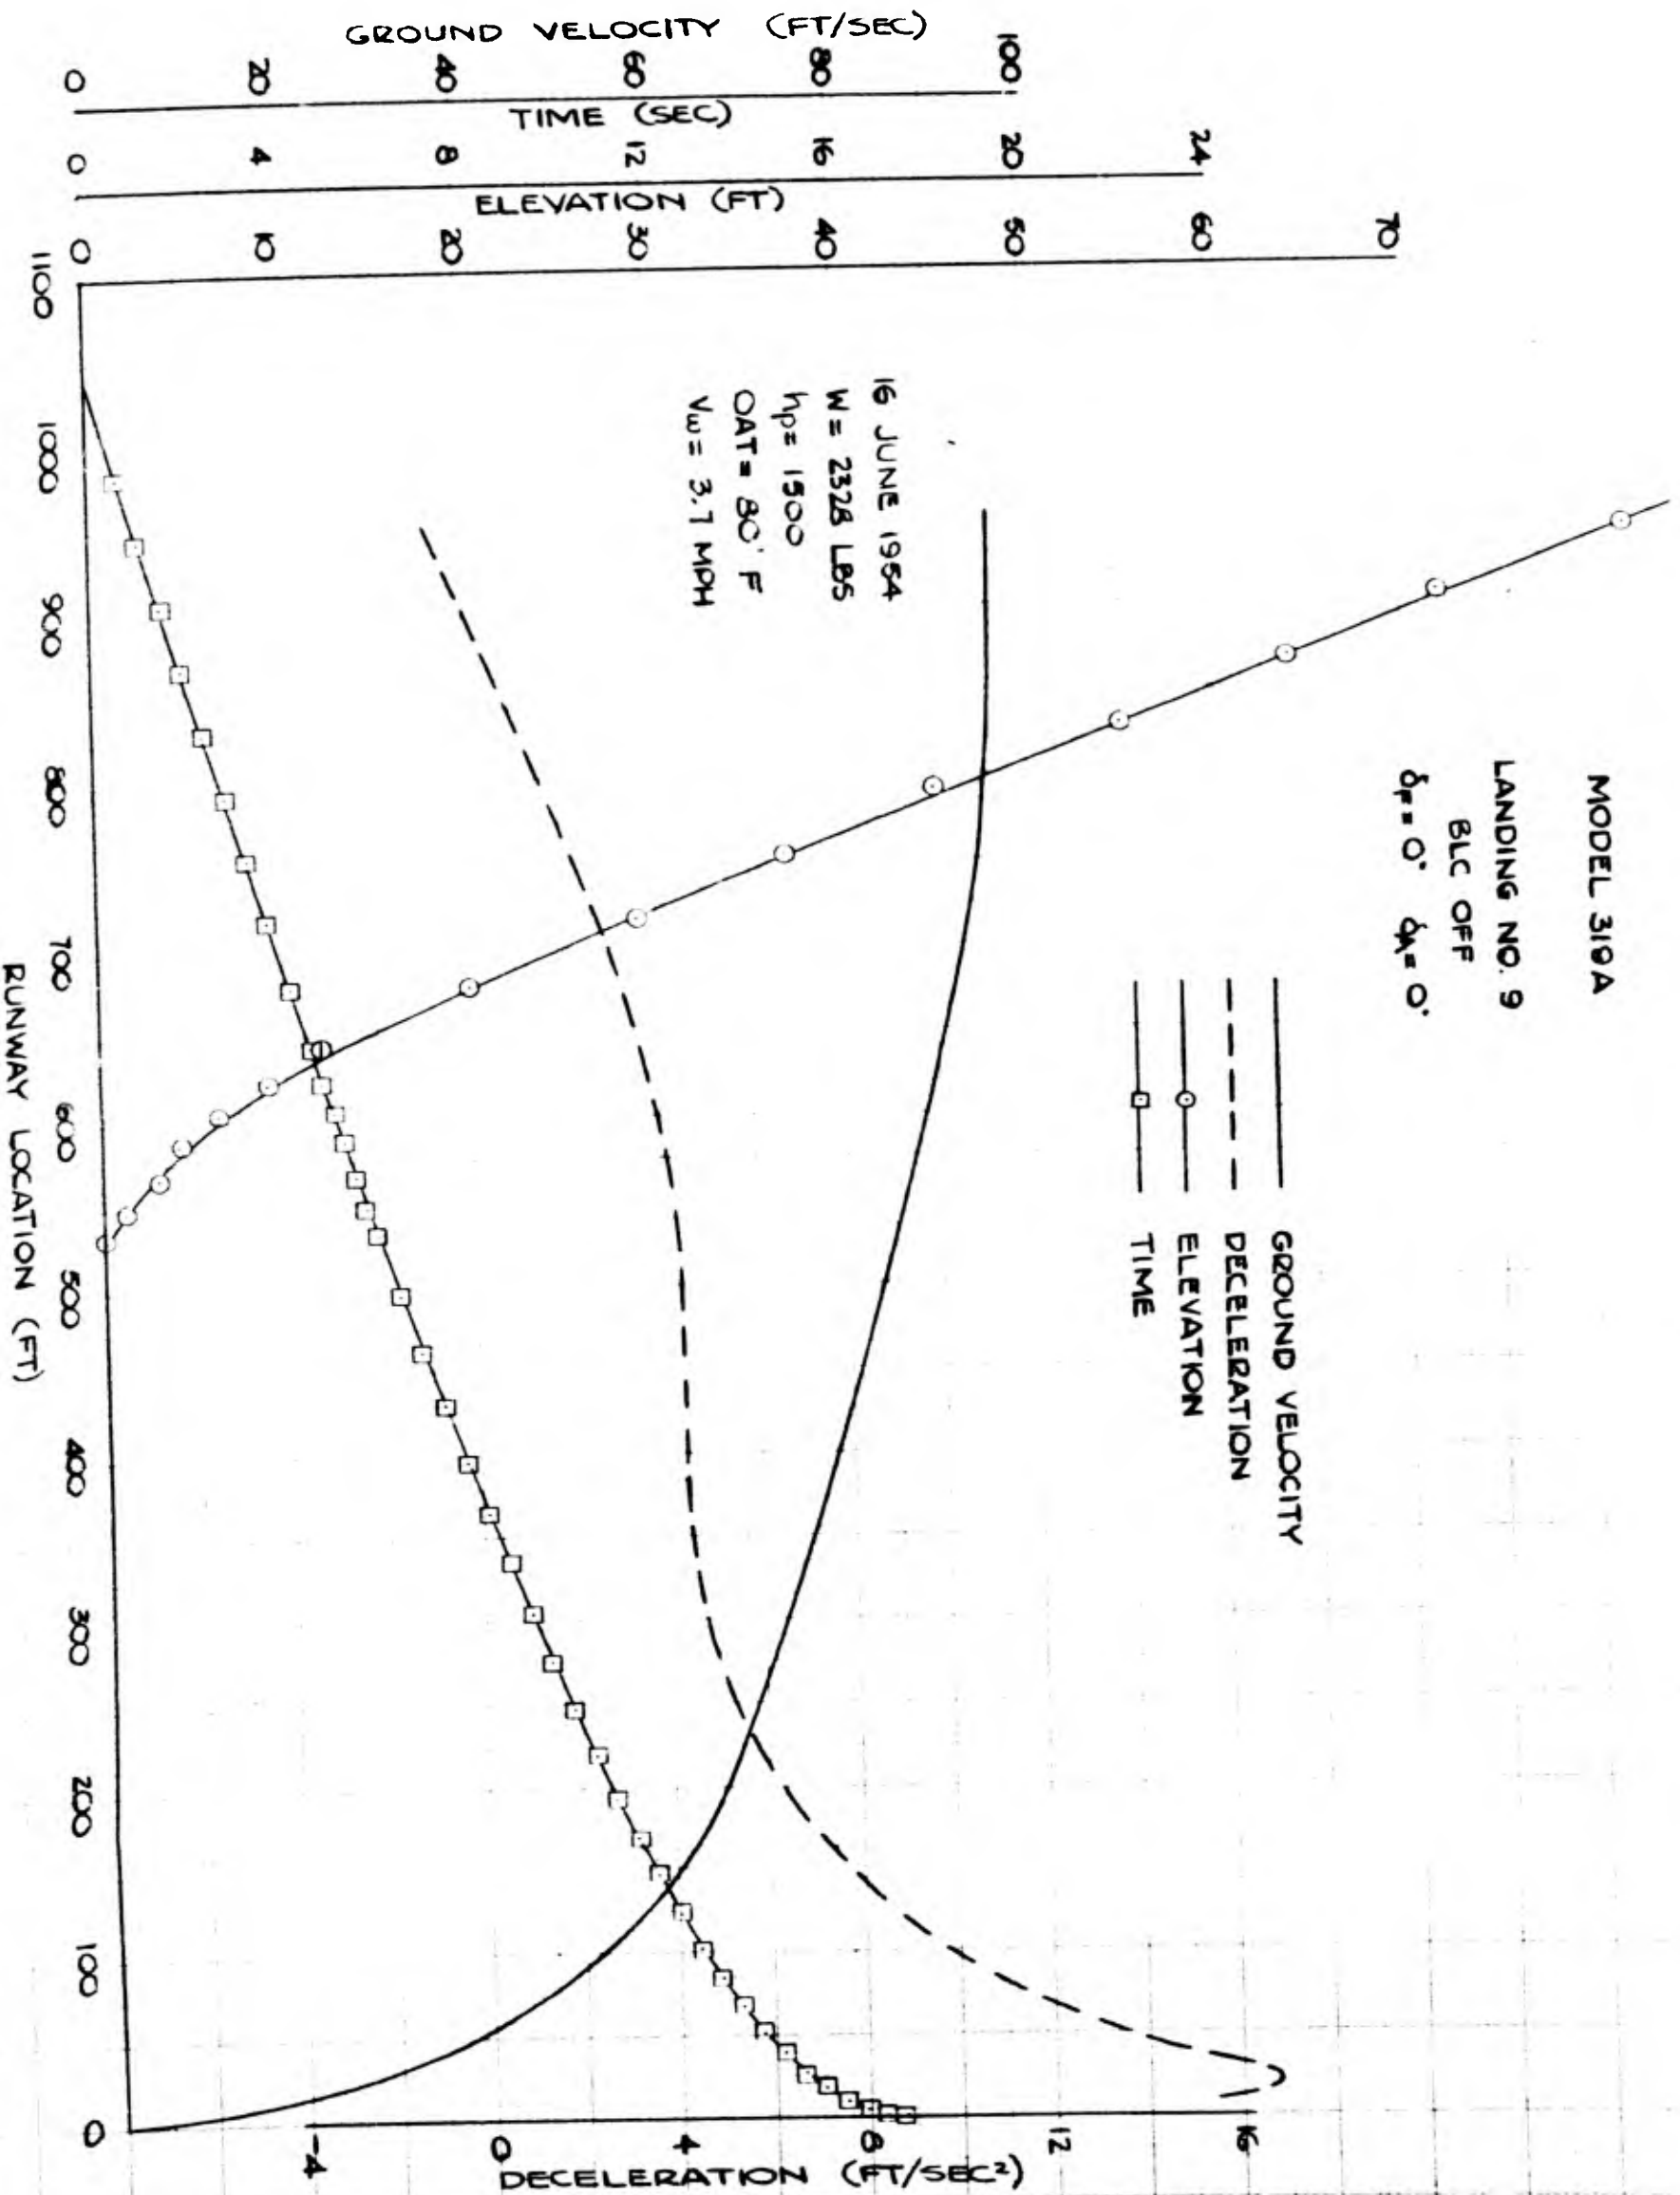

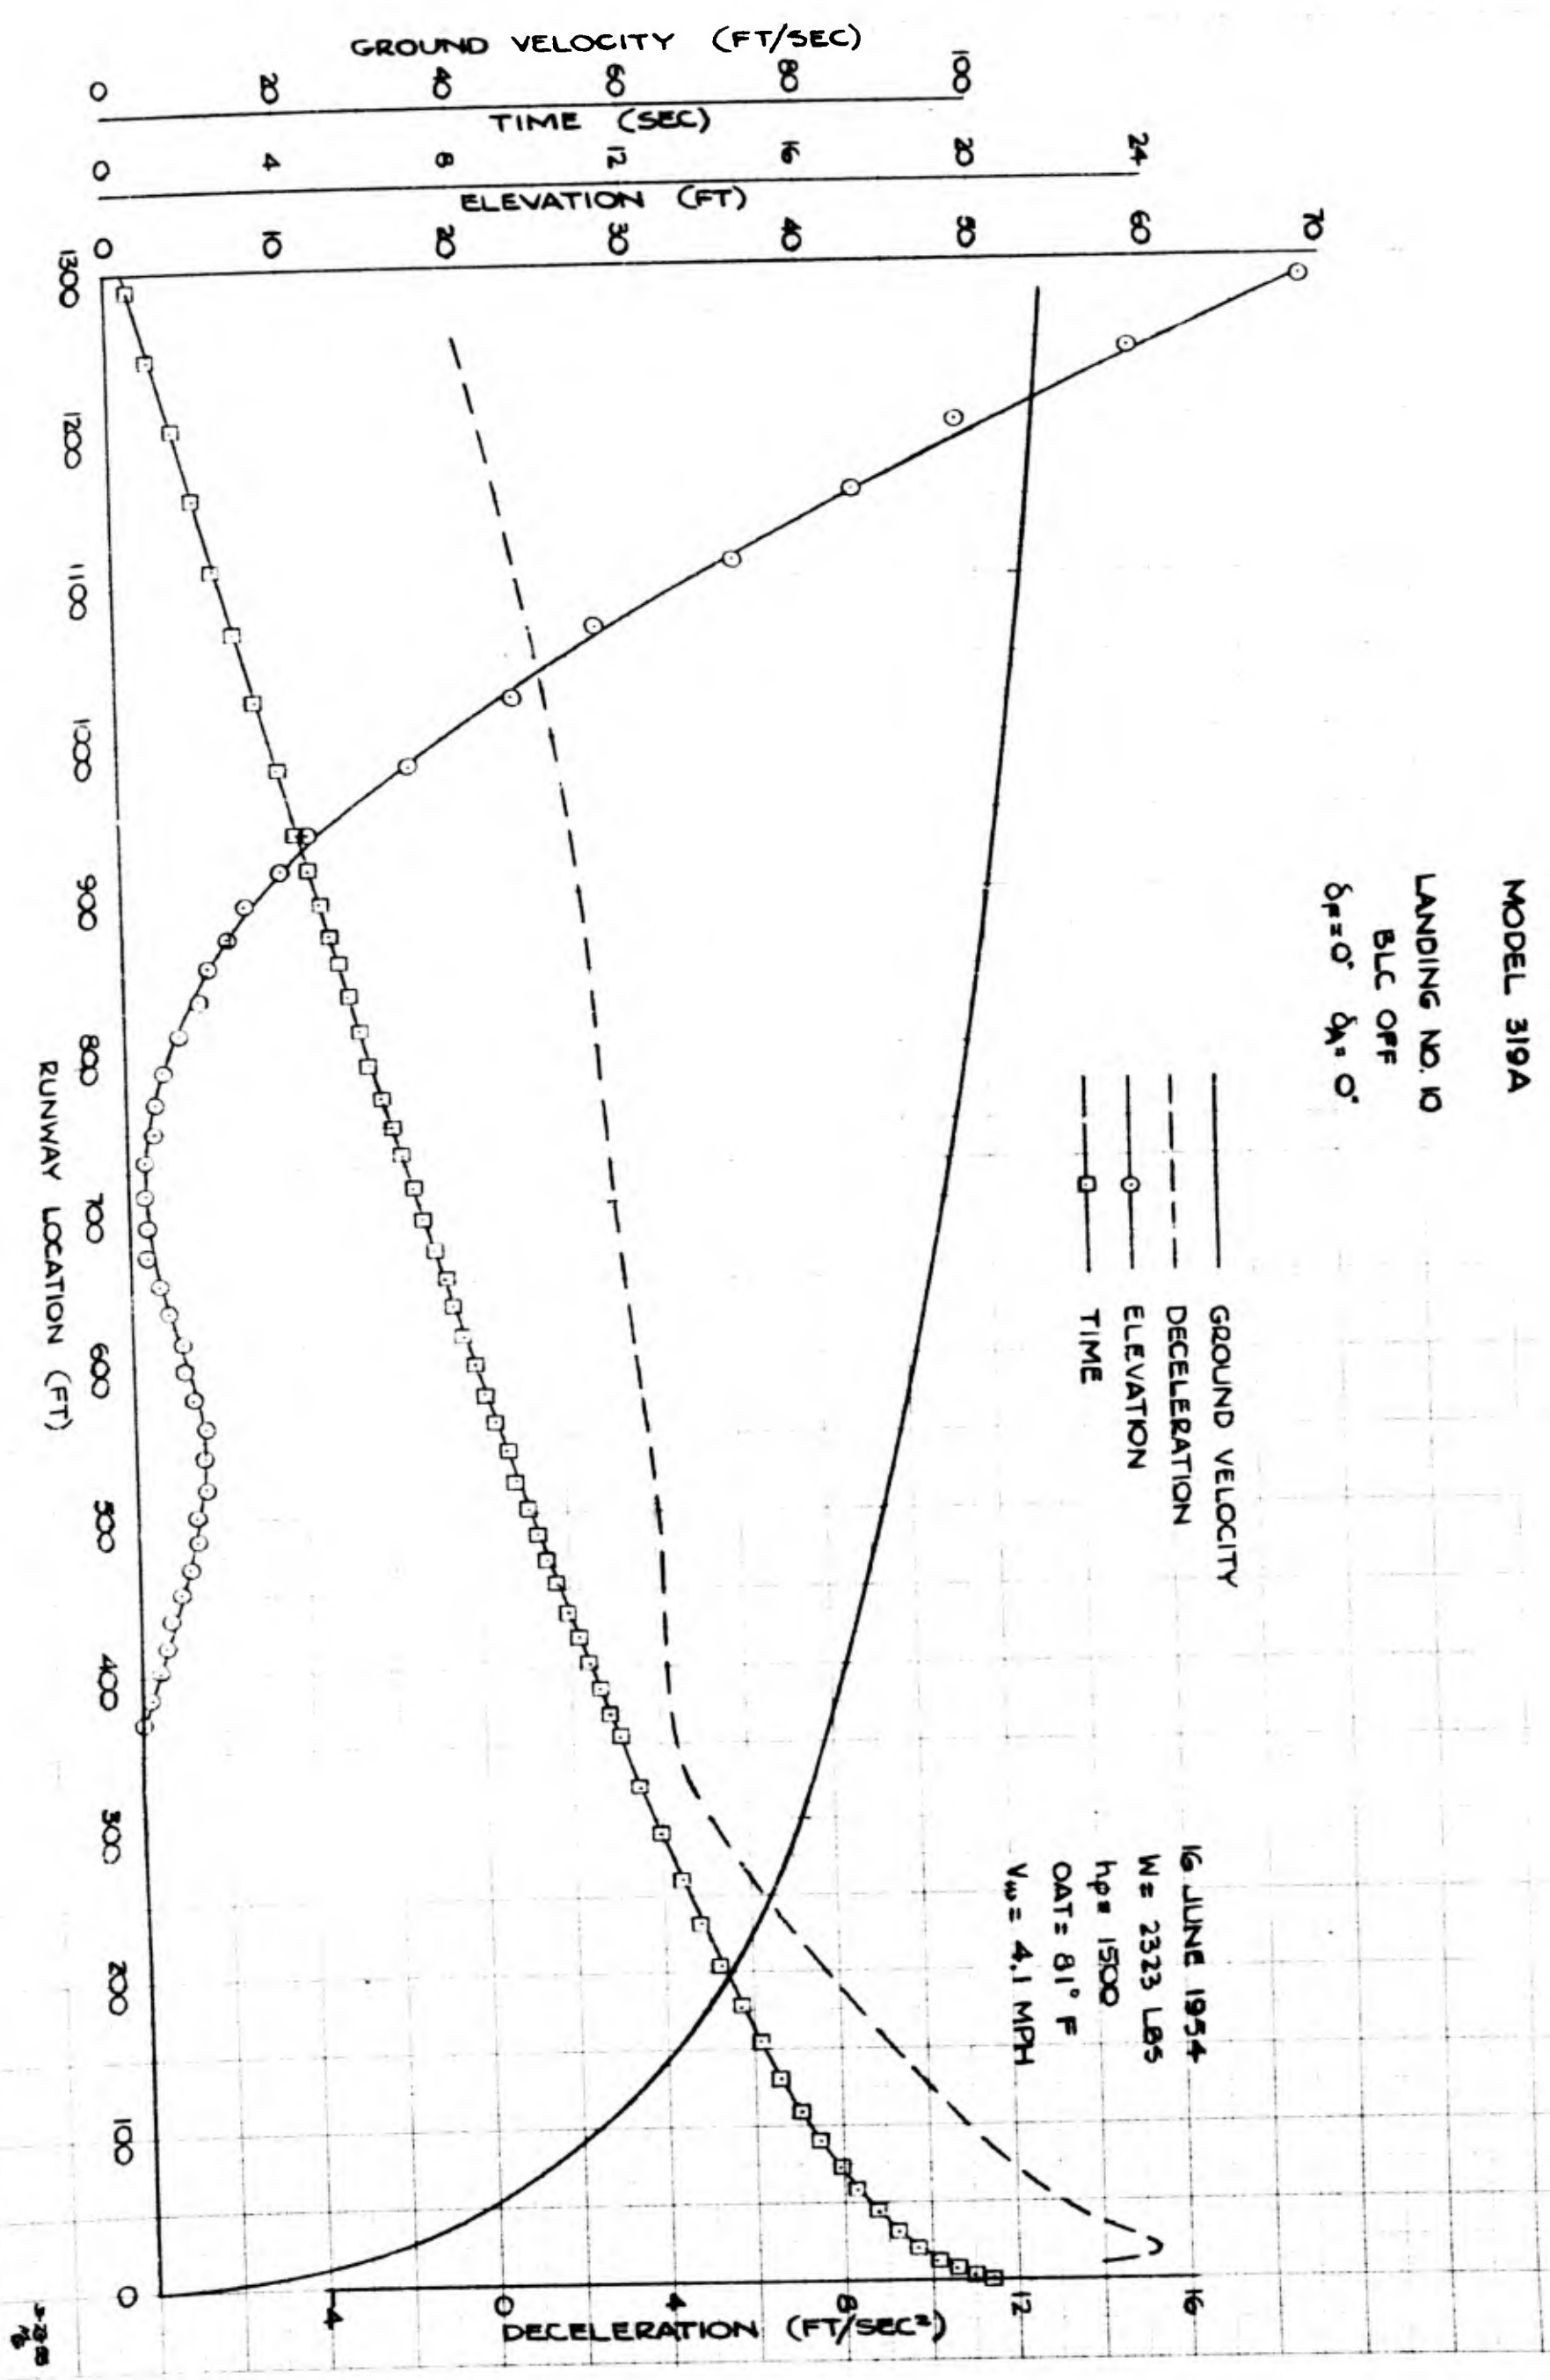

CONFIDENTIAL

PAGE 71
FIG 51

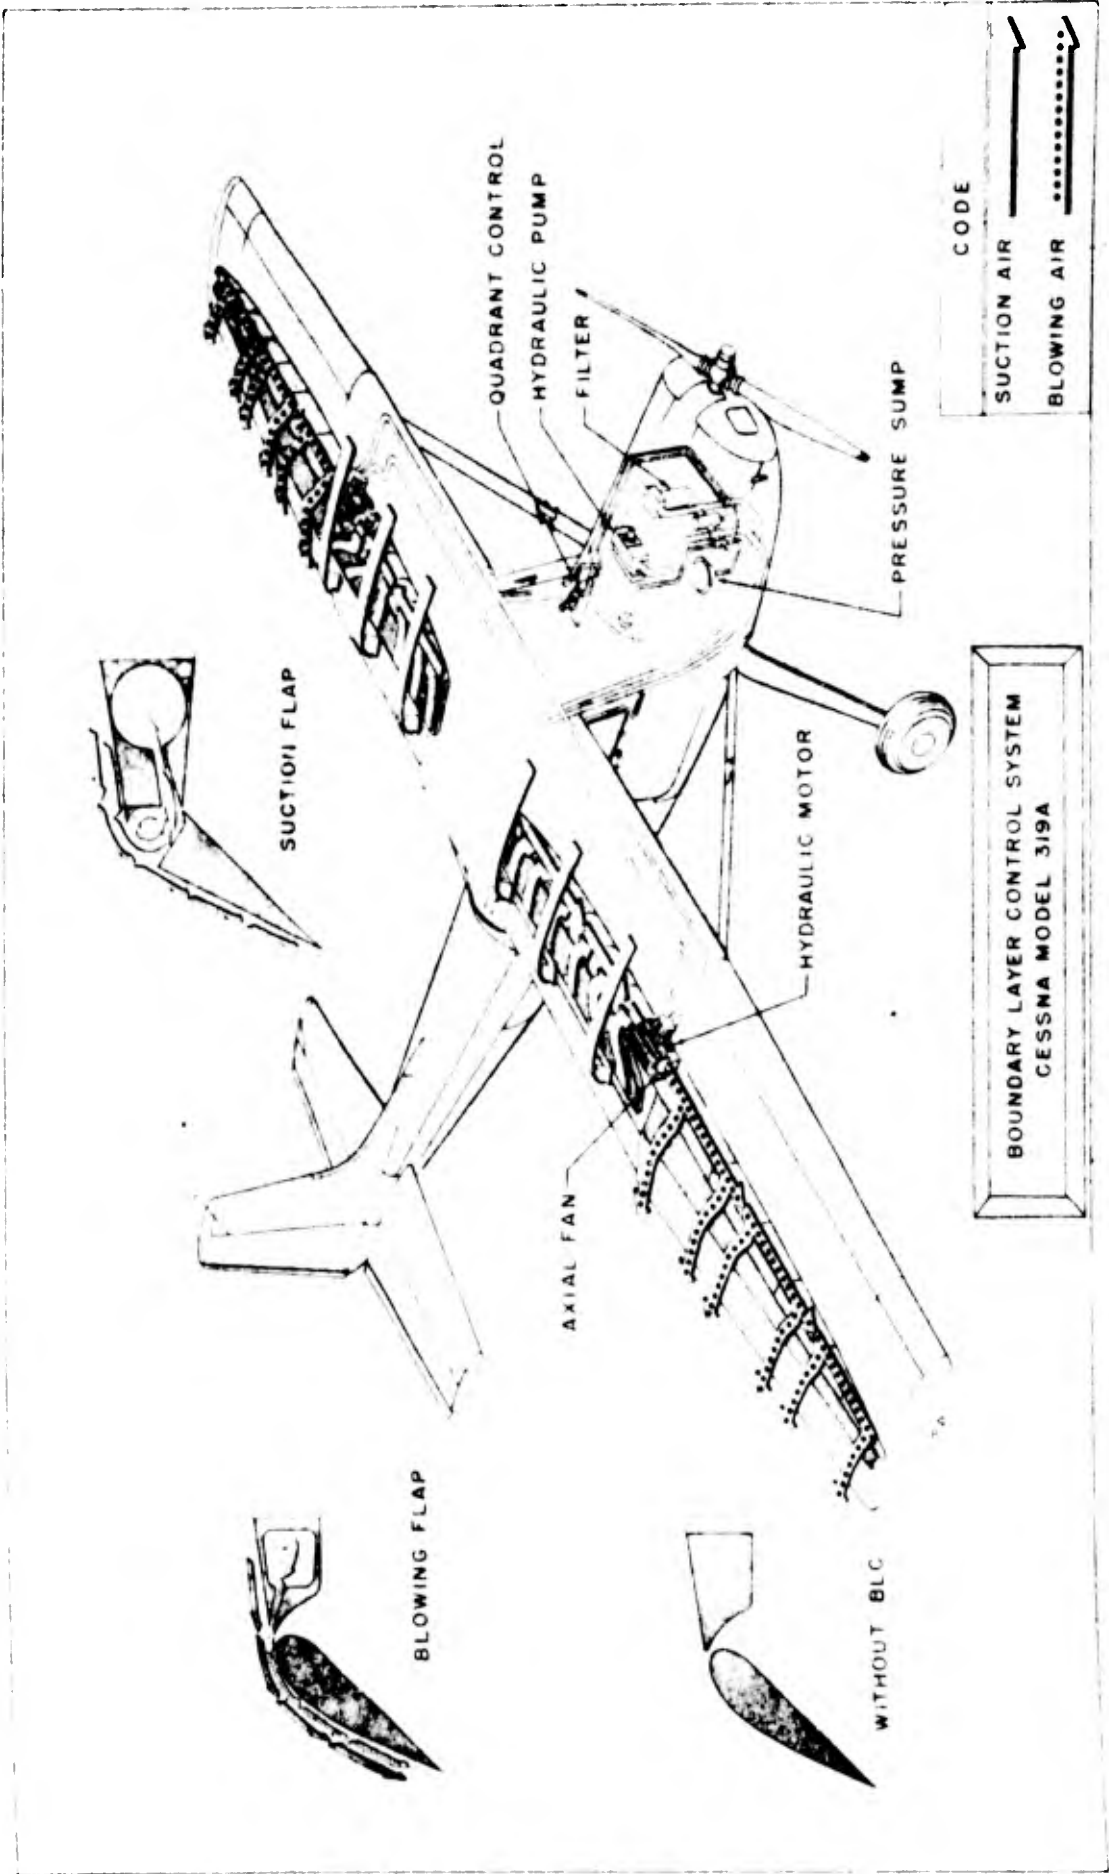

CONFIDENTIAL


MODEL 319A

C_{QS} VS C_L

FIG. 52

SYMBOL	BLOWING SLOT WIDTH
□	.006 C
○	.004 C

$$C_{Q_s} = \frac{Q}{S_s V}$$

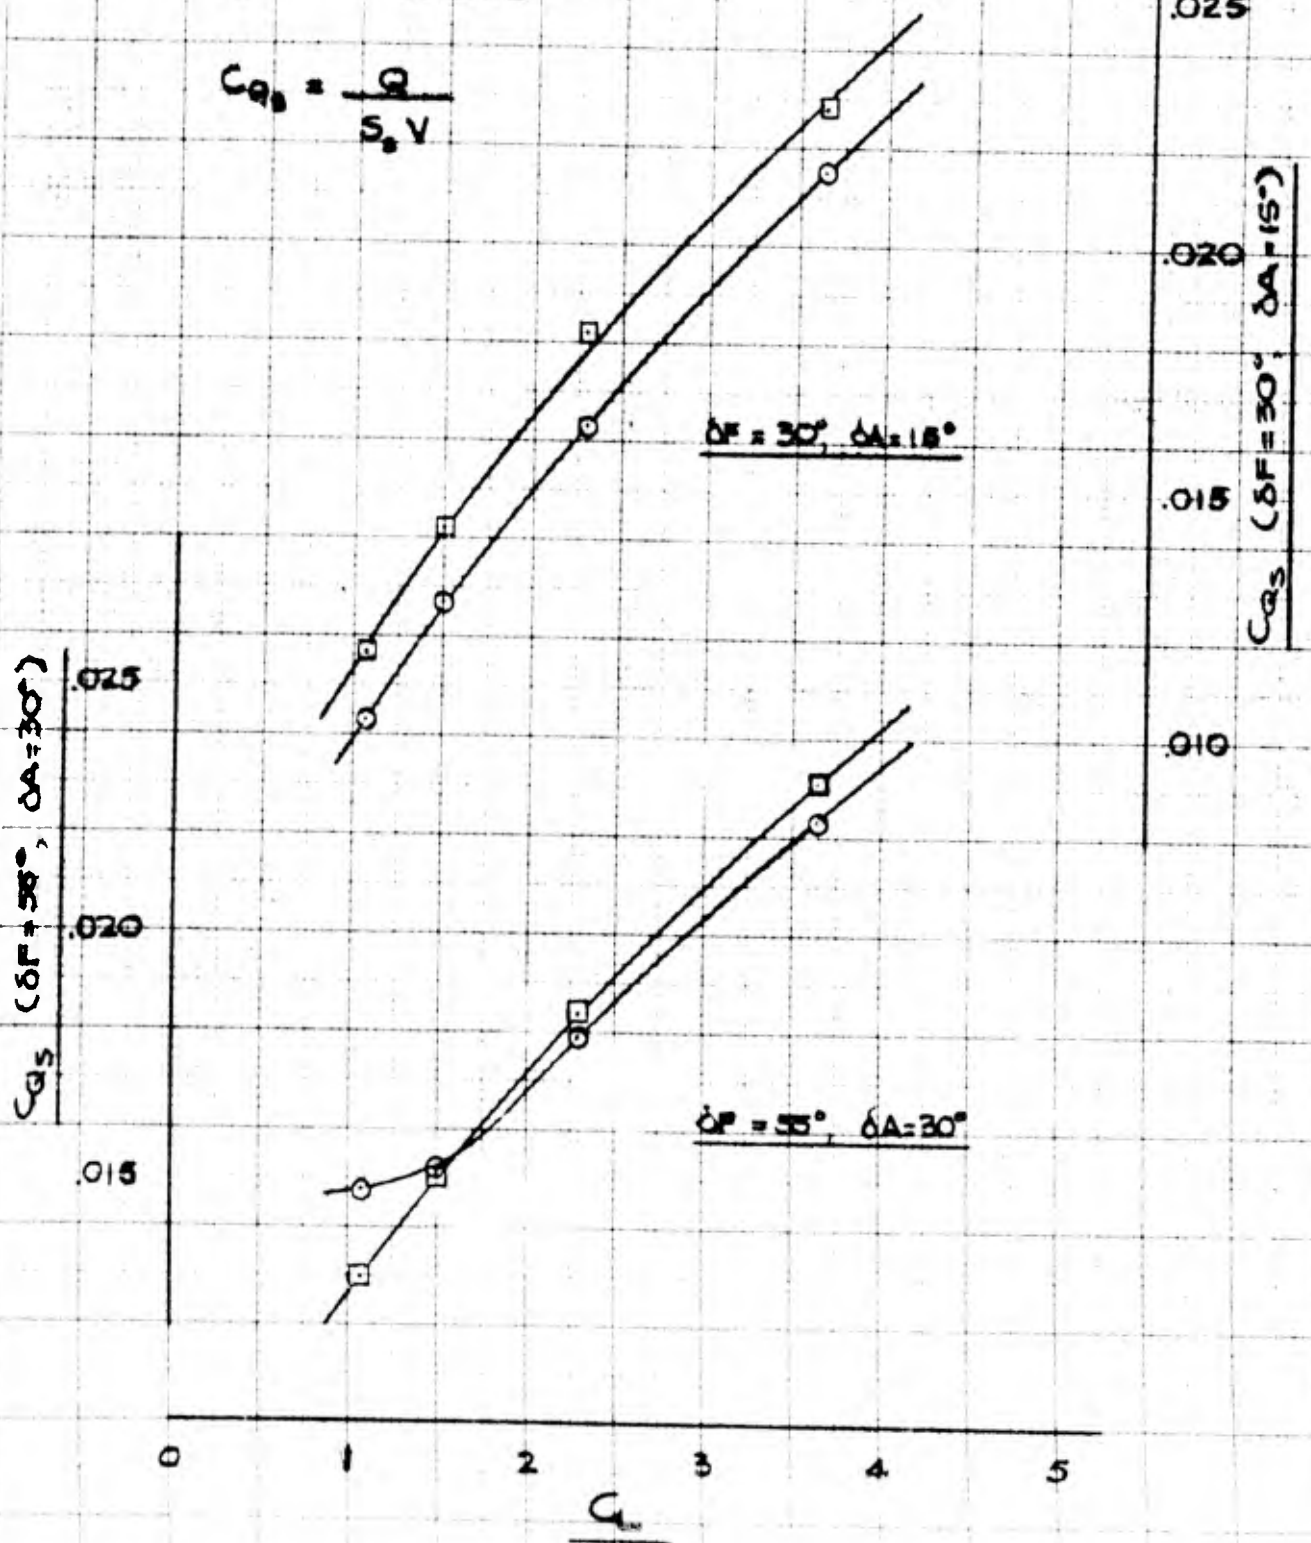




HARTZELL PROP CHARACTERISTICS

225 HP @ 2600 RPM

55" DIA. AF 87

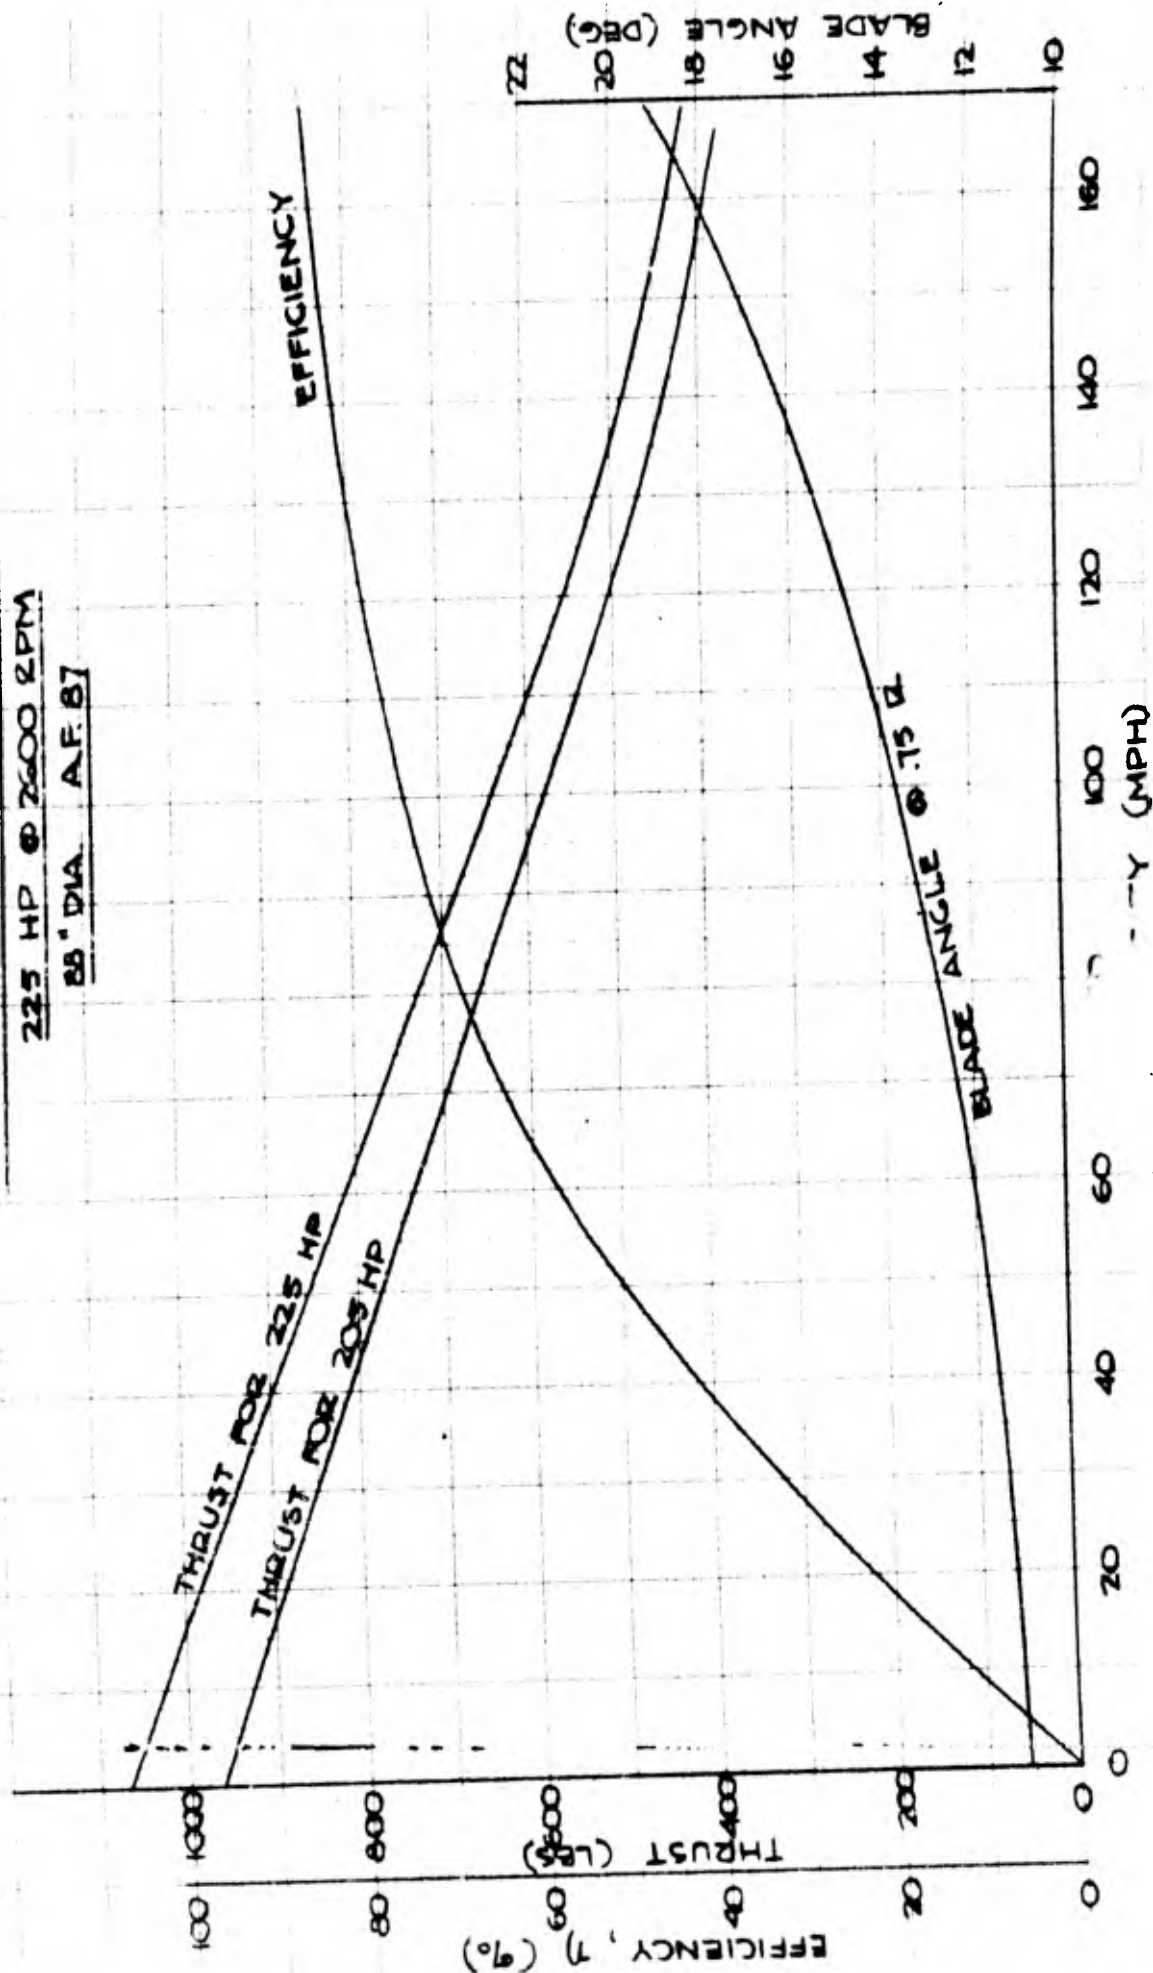

CONFIDENTIAL


CONFIDENTIAL

~~CONFIDENTIAL~~

CONTINENTAL MOTORS CORPORATION

PAGE 74
FIG. 54


0-470-A-27X TEST
WITH VICKERS HYDRAULIC PUMP NO. AA 35500L
Hyd. Fluid - Vitres No. 27
Hyd. Pump Inlet Pressure - 34 psi
Aug. 20, 1953

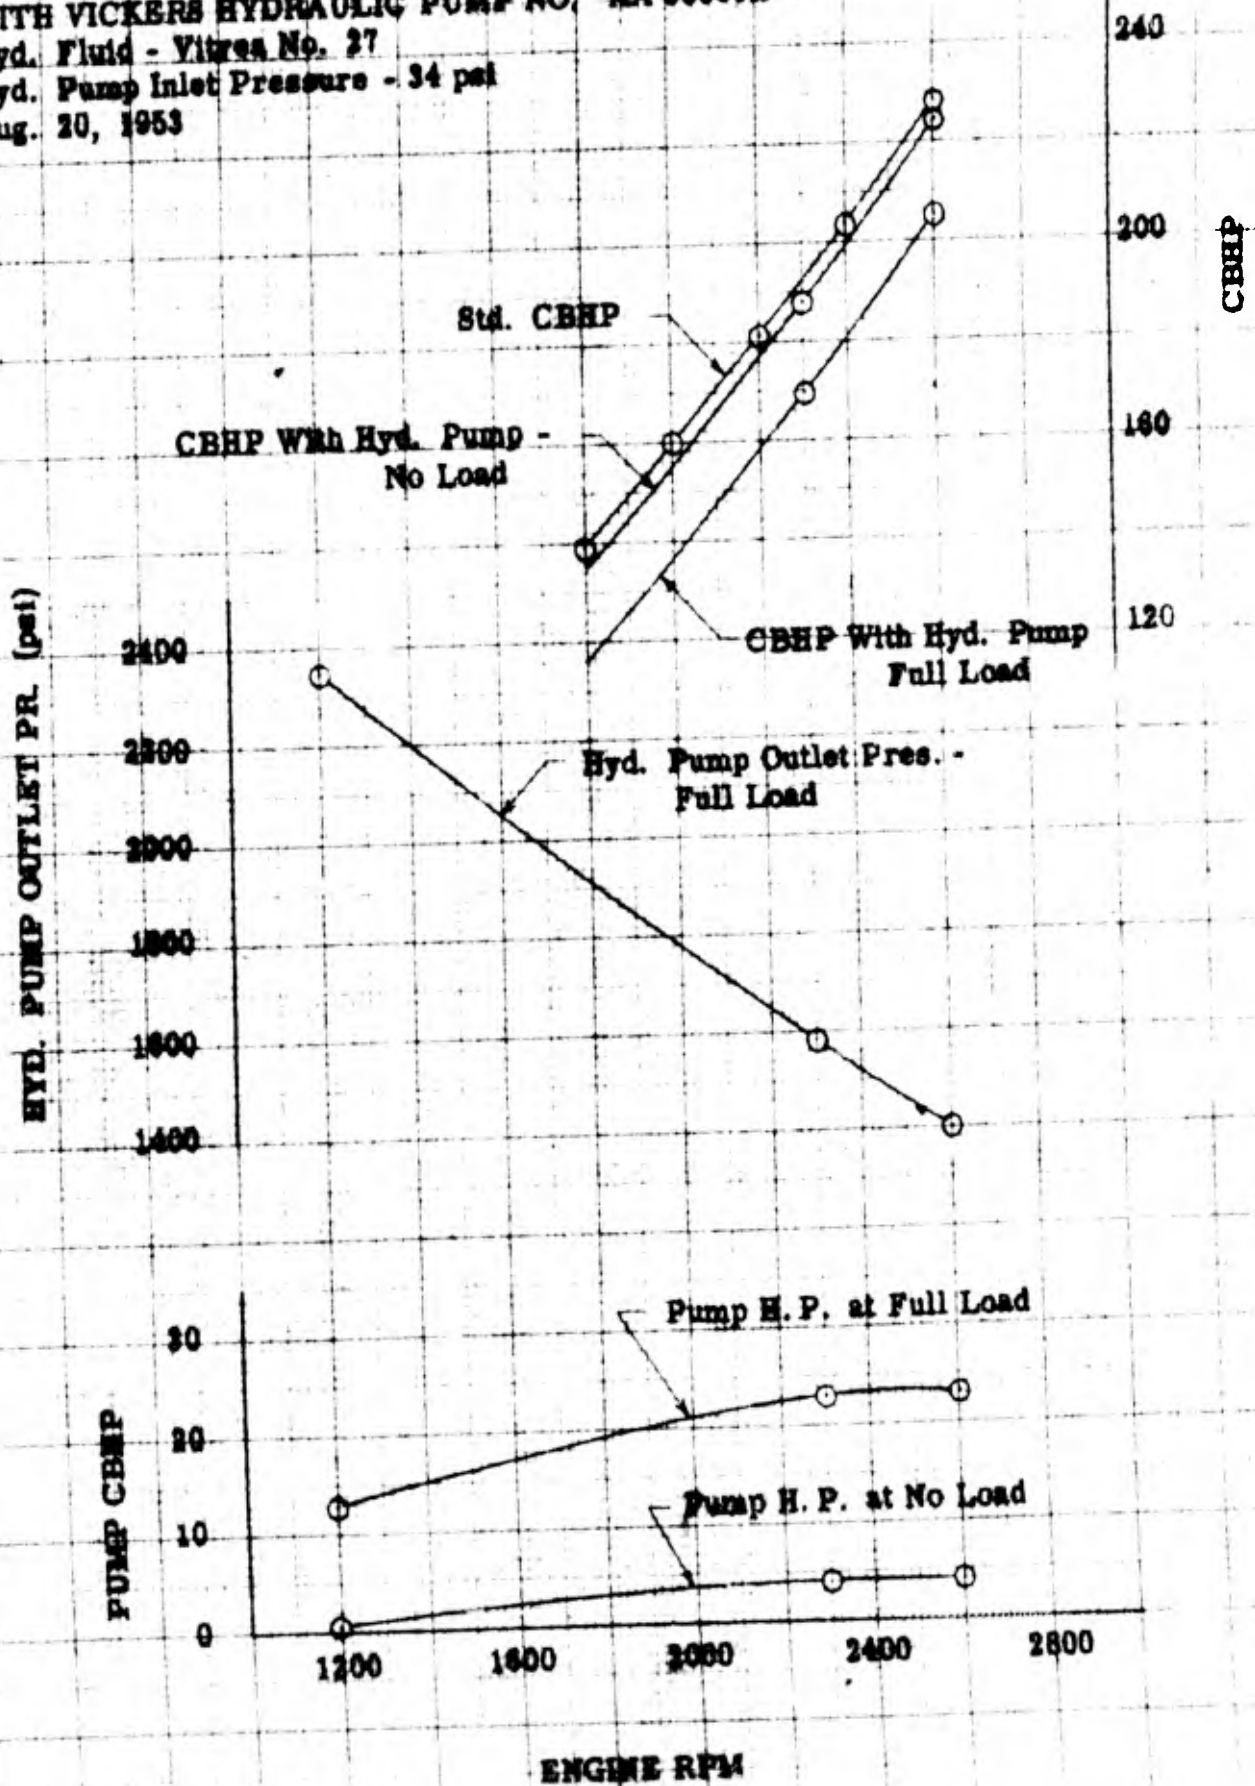


ENGINE RPM

~~CONFIDENTIAL~~

LEVEL PERFORMANCE

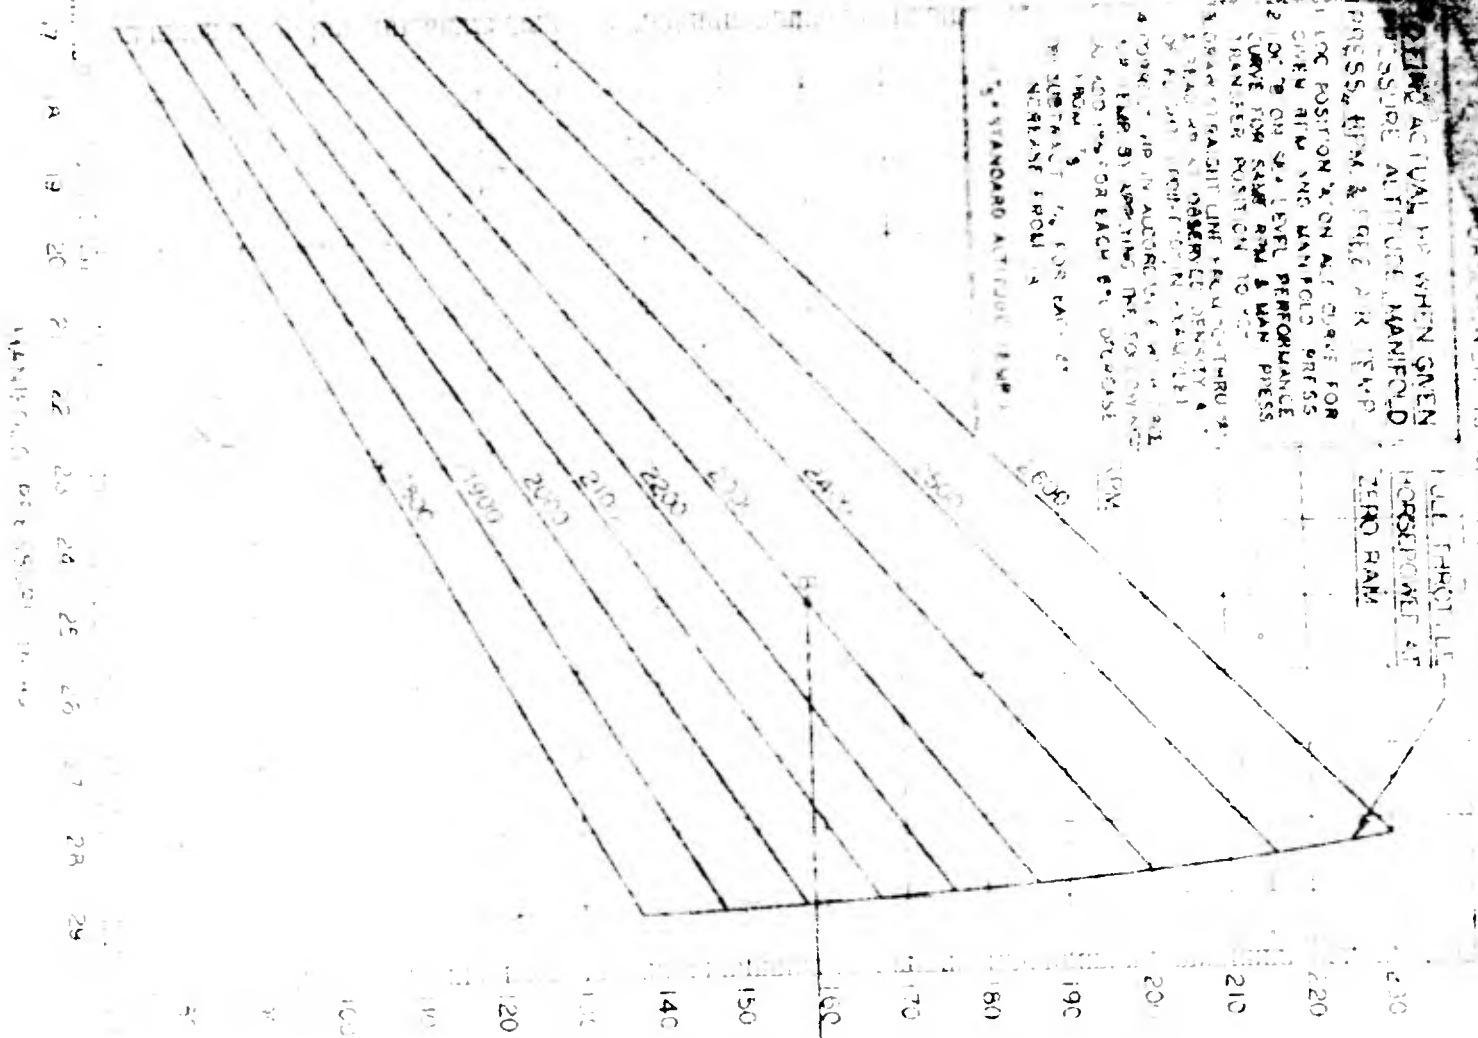

ALTITUDE PERFORMANCE

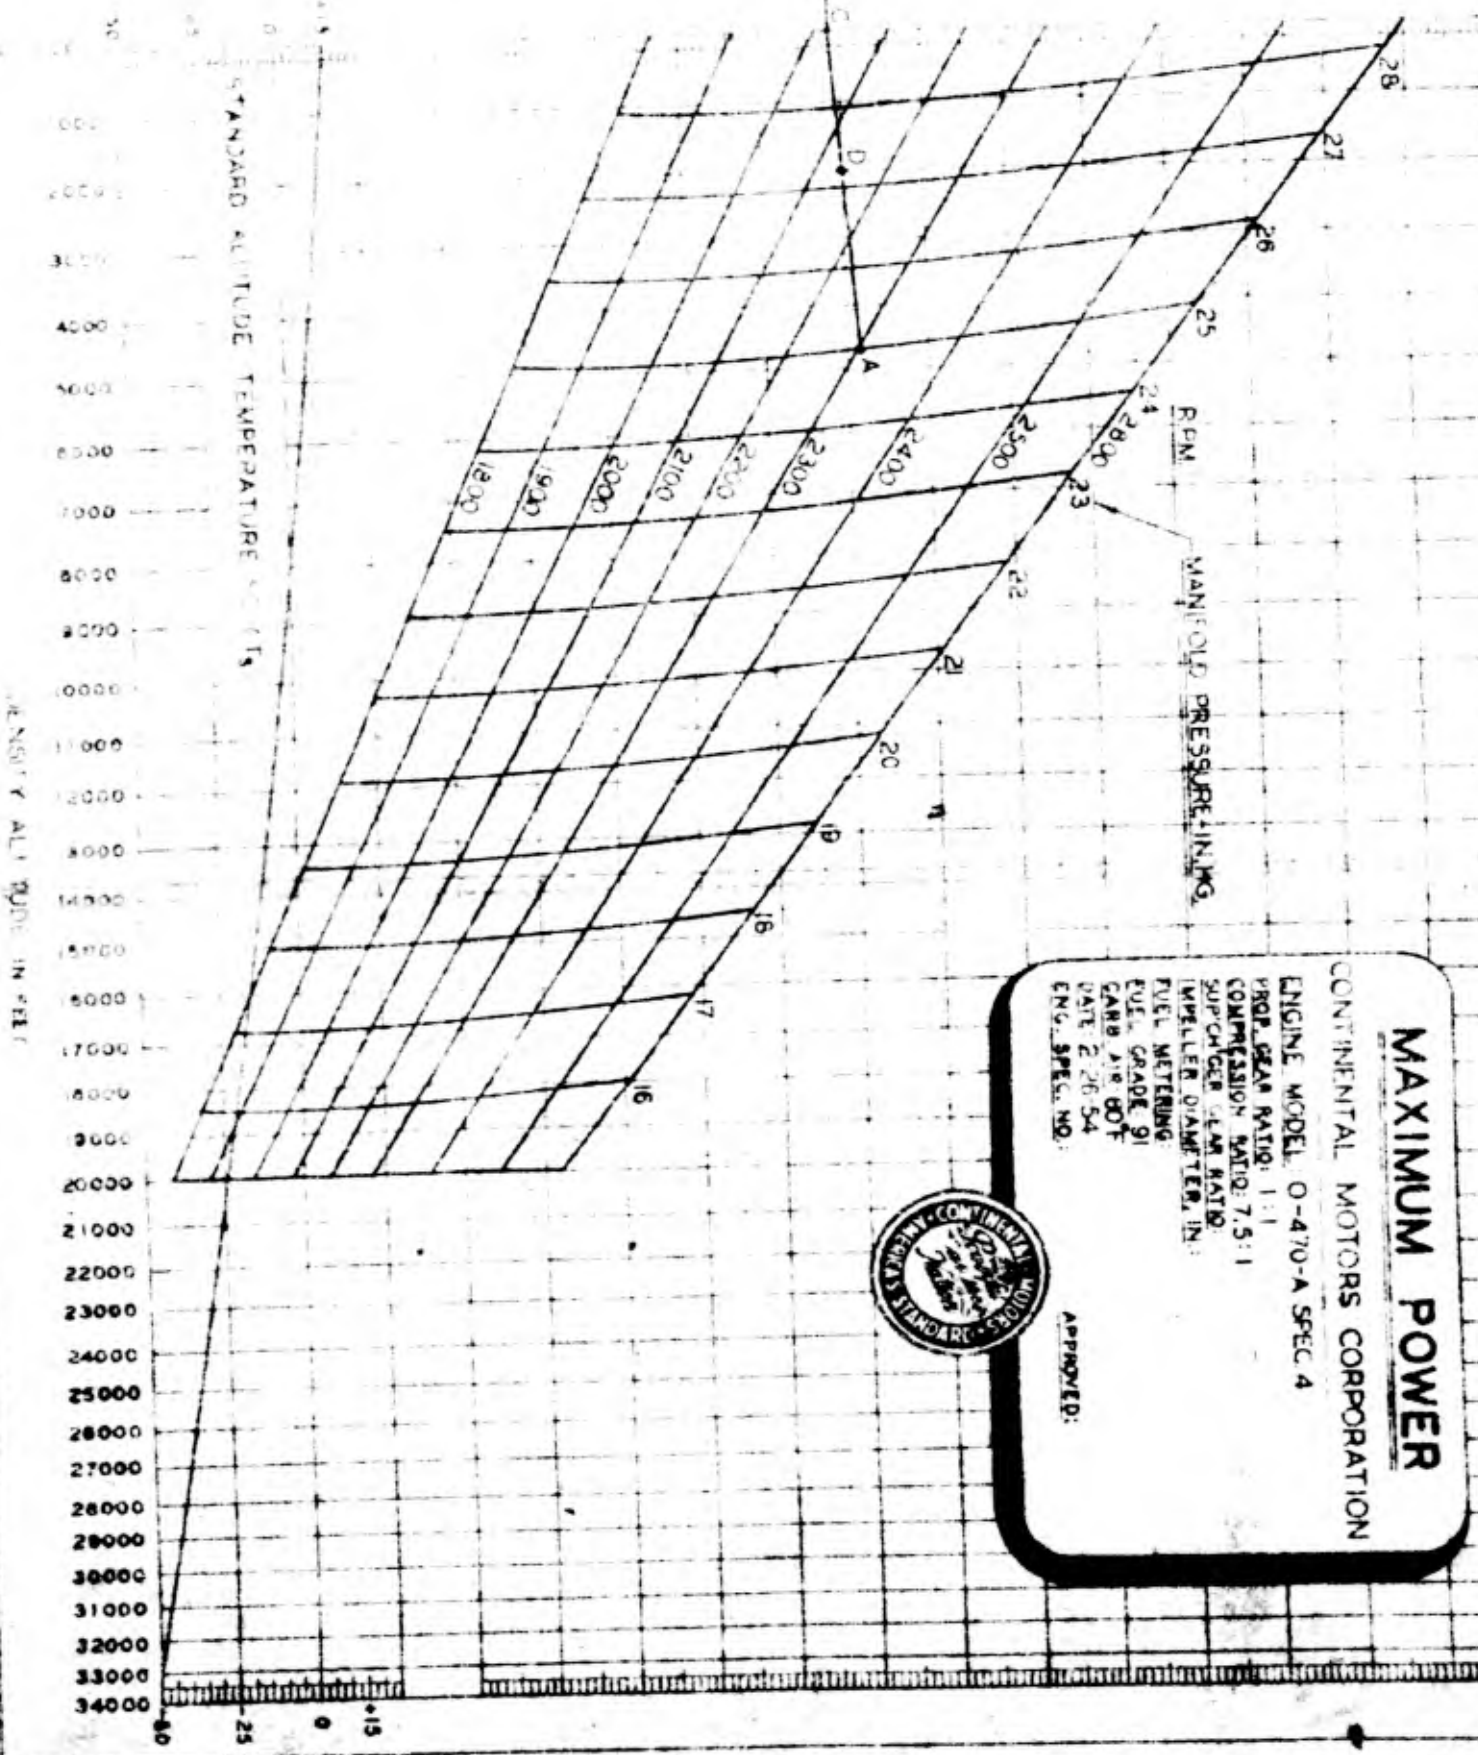

MAXIMUM POWER

CONTINENTAL MOTORS CORPORATION

ENGINE MODEL O-470-A SPEC 4

PROP. GEAR RATIO 1:1

COMPRESSION RATIO 7.5:1

SUPPLIER GEAR RATIO

FUEL METERING

FUEL GRADE 91

CARB. AIR 80°F

DATE 2-26-54

ENG. SPEC. NO.

APPROVED:

WARRANTY ALL MADE IN U.S.A.



TITLE _____

CESSNA AIRCRAFT CO.

PAGE _____

PREPARED BY _____

DATE _____

WICHITA KANSAS

REPORT NO _____

CHECKED BY _____

DATE _____

MODEL 319A

FORM 481

REPORT DISTRIBUTION LISTCopy No. Individual and/or Organization to Whom Report was Sent

1-2 Office of Chief of Transportation
TCATS Engineering and Development
Department of the Army
Washington 25, D. C.
Attention: Mr. Russell Putnam

3-4 Office of Naval Research
Resident Representative
c/o Washington University
Room 207 Crow Hall
St. Louis 5, Missouri
Attention: Mr. M. R. Lipman

5-6-7 Office of Naval Research
Code 461 - Air Branch
Building T-3, Room 2609
Washington 25, D. C.
Attention: Mr. A. Satin

8-9 A. N. Petroff
Cessna Aircraft Company
(File copies)

10 Mr. Joe Flatt
Aircraft Laboratory
Wright Air Development Center
Wright-Patterson Air Force Base
Dayton, Ohio Att: WCLSR

11 Lt. Wilson
Project Engineer
Wright Air Development Center
Wright-Patterson Air Force Base
Dayton, Ohio Att: WCLCM

AD 82471

Armed Services Technical Information Agency

Reproduced by
DOCUMENT SERVICE CENTER
KNOTT BUILDING, DAYTON, 2, OHIO

This document is the property of the United States Government. It is furnished for the duration of the contract and shall be returned when no longer required, or upon recall by ASTIA to the following address:
Armed Services Technical Information Agency, Document Service Center,
Knott Building, Dayton 2, Ohio.

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

