

UNCLASSIFIED

AD NUMBER
AD088799
NEW LIMITATION CHANGE
TO Approved for public release, distribution unlimited
FROM Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; FEB 1956. Other requests shall be referred to Ballistic Research Labs., Aberdeen Proving Ground, MD 21010.
AUTHORITY
USABRL ltr, 22 Apr 1981

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED
AD 88799

Armed Services Technical Information Agency

Reproduced by
DOCUMENT SERVICE CENTER
KNOTT BUILDING, DAYTON, 2, OHIO

This document is the property of the United States Government. It is furnished for the duration of the contract and shall be returned when no longer required, or upon recall by ASTIA to the following address: **Armed Services Technical Information Agency, Document Service Center, Knott Building, Dayton 2, Ohio.**

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

UNCLASSIFIED

88799
6668

BRL

7C

MEMORANDUM REPORT No. 967

FEBRUARY 1956

**Investigation Of
The Causes Of High Dispersion
Of The Production
90MM Fin-Stabilized Shell,
Heat, T108E40**

WAYNE E. SIMON

DEPARTMENT OF THE ARMY PROJECT No. 5B0305005
ORDNANCE RESEARCH AND DEVELOPMENT PROJECT No. TB3-0230

BALLISTIC RESEARCH LABORATORIES



ABERDEEN PROVING GROUND, MARYLAND

BALLISTIC RESEARCH LABORATORIES

MEMORANDUM REPORT NO. 967

February 1956

INVESTIGATION OF THE CAUSES OF HIGH DISPERSION OF THE
PRODUCTION 90MM FIN-STABILIZED SHELL, HEAT, T108E40

Wayne E. Simon

Department of the Army Project No. 5B0305005
Ordnance Research and Development Project No. TB3-0230

ABERDEEN PROVING GROUND, MARYLAND

TABLE OF CONTENTS

	Page
ABSTRACT	3
INTRODUCTION	5
TEST PROCEDURE	5
ANALYSIS OF EXPLORATORY GROUPS	6
ANALYSIS OF FIN DAMAGE PROGRAM	7
CONCLUSIONS	11
REFERENCES	12
TABLES (1 through 5)	13
FIGURES (1 through 15)	18
DISTRIBUTION LISTS	33

BALLISTIC RESEARCH LABORATORIES

MEMORANDUM REPORT NO. 967

WESimon/mjf
Aberdeen Proving Ground, Md.
February 1956

INVESTIGATION OF THE CAUSES OF HIGH DISPERSION OF THE
PRODUCTION 90MM FIN-STABILIZED SHELL, HEAT, T108E40

ABSTRACT

The results of a program investigating the high dispersion of the production shell are presented. It was found that the high dispersion at short ranges (to 1000 yards) is principally a result of jump due to high initial yawing velocity, which is a function of fin damage. The magnitude of fin damage was found to be a function of the strength of the fin assemblies.

In addition, it was found that over half of the rounds were launched with initial spin in the region of resonance which, in conjunction with the severe fin damage which is occurring, would further increase the dispersion at ranges beyond 1000 yards.

INTRODUCTION

The 90mm, HEAT, T108 is a fin-stabilized shell with an overall length of 10.07 calibers, consisting of a conventional boattailed body and a body-diameter six-bladed tail assembly on a 3.18 caliber long boom, Figure 1. During its research and development, the shell performed satisfactorily giving an accuracy on a vertical target at 1000 yards of 0.3 to 0.4 mils (p.e.); so it was released for production. However, initial lots of production shell did not perform well. The dispersion increased to about one mil with frequent occurrence of "mavericks" developing excessively large yaws. Our problem was to find the causes of such marked deterioration in the accuracy of this shell.

For this purpose, we received some eighty rounds from typical production lots. All shell were carefully measured with special attention being given to the tails.

Since causes of excessive dispersion were not known, although various hypotheses were entertained, two exploratory programs were fired. These firings showed that fin damage was occurring on many rounds. To explore this further, a third program was fired to determine the relation of the fin damage to fin hardness and dispersion.

TEST PROCEDURE

All rounds were fired through the Transonic Range⁴ from a T-119E1 gun equipped with muzzle brake, mounted on an M47 tank. Instrumentation for the first exploratory group of 20 rounds consisted of 25 spark shadowgraph stations for yaw and swerve, one microflash station, yaw cards to measure spin³ at 93, 445, 823, and 1241 feet and a 1000 yard target for dispersion. For the second exploratory group of 16 rounds only six microflash stations were used with 280 and 1000 yard targets.

For the fin damage program of 20 rounds, nine spark shadowgraph stations were used for yaw and swerve, with 14 microflash stations (spaced over an interval of 380 feet to assure 2 to 6 pictures of each fin) and targets at 280 and 1000 yards. The hardness of each fin assembly of this group was measured before firing at three points along each fin blade.⁵

ANALYSIS OF EXPLORATORY GROUPS

The probable error, in mils, of the first group was: $H = .67$, $V = .58$ at 260 yards and $H = .67$, $V = .56$ at 1000 yards (target). The fact that the dispersion is the same at the two ranges indicated that the cause of the large dispersion was somehow connected with the launching conditions and not with the performance of the shell in flight.

The average initial spin was 1.3 ± 0.2 deg/ft and was lower than expected.* The average steady-state spin was much higher than expected, 5.3 deg/ft, with a standard deviation of ± 4.4 . The predicted average steady-state spin, using measured fin characteristics and using the parameters of Reference 2, was 0.3 deg/ft. This discrepancy suggested that fin damage was occurring; this was substantiated by a number of the available microflash pictures which showed the type of fin damage of Figure 2.

In order to secure more evidence on the extent of fin damage, the second exploratory group of sixteen rounds was fired. Range instrumentation was rearranged so as to obtain six microflash pictures along the trajectory, instead of the one microflash of the initial group.

The probable error, in mils, of the second group was: $H = .65$, $V = .97$ at 280 yards (end of range) and $H = .65$, $V = .98$ at 1000 yards (target). This confirmed the conclusion from the initial firings that the source of the increased dispersion of the production round must be connected with the launching.

The microflash pictures indicated that only four rounds had no observable fin damage, and seven showed individual fin deformation of over 1° .

Since some fin assemblies of the same lot as those used in Reference² were still available, these assemblies were compared with the new production assemblies. No significant differences in the dimensions could be found,

* Previous tests (unpublished) had indicated that the initial spin was quite consistent even for different lots of shell and ranged from 1.6 to 2.0 degrees per foot.

but the Rockwell Hardness of the older assemblies averaged B-39, with minimum readings of B-34, while the production assemblies averaged B-35, with a minimum of B-28*, Table 1. While scale differences were not large, they represented considerable yield strength differences and suggested that the fin damage might be a function of the hardness (and therefore, the yield strength) of the fins.

Since the preliminary firings suggested a causal relationship between fin hardness, fin damage, and dispersion, a fin damage program was planned to investigate this relationship.

ANALYSIS OF FIN DAMAGE PROGRAM

For measurement purposes, fin deformation is defined as the angle between a line connecting the leading and trailing edges of the fin, and the axis of the shell. This measurement was made only on the one or two fins in the microflash picture whose orientation was within 45° of the line of sight of the cameras. A simple geometrical correction was made for change in apparent angle with rotation from the line of sight. Change in apparent angle with the position of the missile in the field of the camera was estimated to be less than 0.10° , hence this correction was neglected.

Since the orientation of the shell could be computed for each picture, and the approximate spin rate was known (1.2 to 2.2 deg/ft) the spin could be determined, and individual fins identified in each picture. Figure 3 shows fin deformations which were measured for a typical round. The individual measurements are estimated to be accurate to $\pm 3/4$ degree, and the individual average for each fin to possibly $\pm 1/4$ degree.

The total deformation of a round is taken to be the sum of absolute values of the individual fin deformations, and the total asymmetry angle is then the vector sum of the individual deformations (positive deformation is defined to be deformation of the leading edge in a clockwise direction

* As a matter of interest, one of the original development fin assemblies was available and was tested for hardness. It was found to be Rockwell B-86, indicating a yield strength of over twice that of these later rounds.

looking down range). Figure 4 illustrates the vector addition of measured deformations from Figure 3. Since the asymmetry angle used in the analog computations is the angle between the axis of an undamaged fin assembly and the axis of the shell, the total asymmetry angle from Figure 4 is divided by five. (If an undamaged fin assembly is set at 1° with the shell axis, the vector sum of the six blade angles will be 5° .) These values are presented in Table 2. In this way, measured deformations are expressed in terms of an equivalent angle of undamaged fin assembly set at this angle relative to shell axis.

The correlation between total fin deformation and average fin hardness is presented in Figure 5. The correlation is unmistakable, at least for minimum damage for a given fin hardness. One-quarter of the rounds appear to receive greater damage, possibly from some different mechanism.

In order to confirm the asymmetry calculated from the microflash pictures, and to investigate initial conditions, the yaw of six rounds of Group 3 was fitted to the equations for the yawing motion of an asymmetrical fin-stabilized missile⁶, spinning near resonance, with a non-linear moment ($K_M = K_{M_0} + K_{M_2} \cdot \delta^2$), using the methods of Reference 7. Table 3 presents the values determined by these fittings. Figure 6 shows the rather surprisingly good agreement between the asymmetry estimated from fin measurements from microflash pictures and the asymmetry determined from the yaw fit.

Figure 7 presents the very important relationship found between the asymmetry of the round and its initial yawing velocity. The square symbols are for rounds for which only nine yaw stations are available. After these rounds, for which the spin history in the fitted trajectory was known, were fitted, the experience in fitting made it possible to fit some of the rounds of the initial program which had 25 yaw stations, but in which the spin was known only at the end of the fitted trajectory. The circular symbols in Figure 7 represent these six rounds. It is interesting to note that the scatter of initial yawing velocity about this function of asymmetry is about 0.4 deg/ft. This is approximately the range of initial yawing velocities observed in the development rounds of Reference 1.

Thus the magnitude of the initial yawing velocity of the production rounds is a function of asymmetry, and might be some five times as large as with undamaged fins. In addition, as shown in Table 3, the orientation difference between the initial yawing velocity and asymmetry is approximately 90° (all rounds between $+35^\circ$ and $+118^\circ$) suggesting that this initial yawing velocity is caused by the inability of the low strength fins to resist forces exerted on the shell at the muzzle. If two fins receive most of the damage, as was the case in all rounds, it appears probable that the force causing the damage is acting in a plane between the two fins. The vector asymmetry resulting from the damage will have a vector component at 90° to this plane, and will result in a yawing velocity whose direction will be normal to measured asymmetry.* An example of the yaw fit which was obtained on the analog computer is given in Figure 8, where the data points are represented by symbols, and the computed yaws by solid lines.

From the yaw fit, the aerodynamic jump of the round may be calculated. The method used required computation of the trajectory on an analog computer out to 1000 feet with no gravity drop, by integrating the fitted yawing motion twice. As a matter of interest, the jump was also computed for each round (1) using the fitted value of asymmetry, but setting initial conditions to zero, and (2) using fitted initial conditions, but setting asymmetry to zero. The jump due to fitted initial conditions, case (2), was from two to five times that due to asymmetry alone (1). The two values of jump were out of phase by approximately 180° . The actual jump of each round was calculated from the range co-ordinates, corrected for gravity drop. These values are compared in Table 4 and Figures 9 and 10. The agreement in the size of the jump, as computed from yaw fit and range co-ordinates, is fairly good. The agreement in phase or direction of jump is poor. On the average, these differ by about 90° . Why this is so is not clear and might well be due to errors in initial conditions arising from extrapolation of the yawing motion to the muzzle,

* If the initial yawing velocity were due to forces exerted on the shell in the blast regime, orientation of the asymmetry and the initial yawing velocity should be identical.

a distance of some 104 feet.

The dispersion at 280 yards and 1000 yards is presented in Table 5 and plotted in Figure 11. Again it is evident that the dispersions at 280 yards and 1000 yards are essentially identical, confirming the fact that the increased dispersion of the production shell is caused by launching conditions.

While the results of these firings indicate that large, persistent yaws, due to resonance, are not responsible for the increase of dispersion at 1000 yards, the increase in drag due to yaw will lower the impact point of the shell at longer ranges. Figure 12 shows this effect for a $1/3$ increase in drag out to 4000 yards. (The normal service maximum range is 2000 yards.) This increase in drag is approximately that which would result from a persistent yaw of eight degrees.

Figure 13 presents a yaw history common to over one-half of the rounds examined. This yaw history shows typical resonance phenomena⁶, which appear when the spin of an asymmetrical round approaches the natural yaw frequency of the round. It can be shown⁶ that when spin approaches this critical frequency, the asymmetry vector is amplified. For a constant overturning moment, the amplification function resembles that drawn in Figure 14. However, if the overturning moment is non-linear, i.e., is a function of yaw, which is the case for the T108 shell, and the asymmetry is sufficiently large, then the amplification function becomes more complicated⁹. An example of such a response curve is given in Figure 15. It is seen that at certain spin values, the function is multivalued, or the asymmetry vector, at zero spin, can be amplified by different amounts depending on the initial conditions.

Although computations for Figures 14 and 15 were made for constant spin, it is probable that the yaw will be amplified for spin increasing slowly through resonance, or, for starting with higher spin, decreasing slowly through resonance. Thus it appears that with non-linear moment and large asymmetry and the nature of the response curve, the yaw due to resonance may be present not only in the region of spins of 1.1 deg/ft but also with spins up to 1.7 deg/ft. This is the reason that, although only 6 of 20 rounds had initial spin of less than 1.4 deg/ft, over half of the rounds exhibited resonance type yaw histories.

CONCLUSIONS

In a series of experimental firings of production T108E40 rounds it was found that severe fin damage was occurring and that the magnitude of damage was a function of the hardness (that is, the strength) of the fin assembly. The high dispersion of the production round at 1000 yards was found to be primarily a result of jump due to the high initial yawing velocity of the damaged rounds. A strong indication was found that this yawing velocity was imparted at the muzzle by the same mechanism which damaged the fins.

In addition, it was found that over half of the production rounds were launched with initial spin in the region of resonance. This, in combination with the severe fin damage which occurred, resulted in large circular yaw and high drag. This high drag would further increase the dispersion at longer ranges (beyond 1000 yards).

WAYNE E. SIMON
Cpl.

REFERENCES

1. Karpov, B. G., Aerodynamic and Flight Characteristics of the 90mm Fin-Stabilized Shell, HEAT, T108, BRLM 696 (C), (1953).
2. Karpov, B. G., Simon, W.E., Effectiveness of Several Simple Methods of Aerodynamic Control of Spin of the 90mm HEAT, T108E40 Shell, BRLM 879 (C), (1955).
3. MacAllister, L. C., A Method of Determining the Spin Characteristics from Yaw Card Firings as Applied to the 105mm Shell, T131E31, BRLM 697 (C), (1953).
4. Rogers, W. K., Jr., The Transonic Free Flight Range, BRL Report 849 (U), (1953).
5. Hall, C. L., Test of Twenty Fin Sections From 90mm Shell, LSD, PTIR 55-T-58. (U).
6. Nicolaides, J. D., On the Free Flight Motion of Missiles Having Slight Configurational Asymmetries, BRL Report 585 (U), (1954).
7. Schmidt, J. M., A Study of the Resonating Yawing Motion of Asymmetrical Missiles by Means of Analog Computer Simulation, BRL Report 922 (U), (1954).
8. Rose, L. J., Krieger, R. H., Wind Tunnel Tests of the T108 90mm HEAT Projectile at Mach Number 1.72, BRLM 763, (C), (1954).
9. Minorsky, N., Non-linear Mechanics, pp 317 - 19, J. W. Edwards, Ann Arbor (U), (1947).

TABLE I
AVERAGE FIN HARDNESS

<u>No.</u>	<u>Round</u>	<u>Average Hardness Rockwell "B"</u>
1	3278	35.8
2	3279	28.5
3	2380	30.3
4	3281	41.9
5	3282	30.8
6	3283	37.7
7	3284	31.8
8	3285	37.3
9	3286	33.9
10	3287	36.0
11	3288	43.5
12	3289	37.2
13	3290	33.7
14	3291	39.2
15	3292	37.8
16	3293	42.6
17	3294	29.3
18	3295	22.0
19	3296	32.1
20	3297	28.1

TABLE 2

INITIAL SPIN, TOTAL DEFORMATION, AND ASYMMETRY
FROM MICROFLASH PICTURES FOR GROUP 3,
AND CALCULATED STEADY-STATE RESONANT FREQUENCY

<u>No.</u>	<u>Total Deformation (Degree)</u>	<u>Asymmetry (Degree)</u>	<u>Initial Spin (Degrees per foot)</u>	<u>Steady-State Resonant Frequency (Degrees per foot)</u>	<u>Difference (Degrees per foot)</u>
1	4.44	.71	1.55	1.28	+ .27
2	8.28	.93	1.60	1.38	+ .22
3	6.96	.72	1.84	1.28	+ .56
4	8.07	.92	2.06	1.38	+ .66
5	4.56	.40	1.56	1.17	+ .39
6	10.72	1.40	1.70	1.65	+ .05
7	5.65	.82	1.91	1.33	+ .58
8	4.41	.53	1.40	1.21	+ .19
9	9.94	1.50	2.02	1.72	+ .30
10	3.46	.53	1.59	1.21	+ .38
11	7.18	1.11	1.90	1.48	+ .42
12	4.82	.52	1.66	1.21	+ .45
13	4.30	.43	1.43	1.18	+ .25
14	1.14	.11	1.67	1.12	+ .55
15	2.34	.36	1.31	1.16	+ .15
16	.96	.10	1.28	1.12	+ .14
17	6.06	.66	1.42	1.26	+ .16
18	8.58	1.31	1.28	1.60	- .32
19	11.34	1.54	1.34	1.74	- .40
20	6.22	.92	1.32	1.38	- .06

TABLE 3

INITIAL CONDITIONS DETERMINED
BY FIT OF YAWING MOTIONA. Initial Program

Round	K_{M_0}	Initial Yaw		Initial Yawing Velocity		Asymmetry		Orient. Diff. between yawing Velocity and Asymmetry (Deg)
		Mag	Orient	Mag	Orient	Mag	Orient	
		(Deg)	(Deg)	(Deg/ft)	(Deg)	(Deg)	(Deg)	
2841	-1.11*	.92	9	.056	211	.52	156	+ 55
2844	-1.02*	.87	224	.132	200	1.26	120	+ 80
2845	-.93	0	--	.185	104	1.15	5	+ 99
2847	-1.07	1.99	173	.119	258	1.20	177	+ 81
2866	-1.02	1.18	107	.140	225	1.04	162	+ 63
2871	-1.02	.31	90	.202	167	1.16	49	+118
Avg	-1.03							+ 83

B. Final Program

3278	-.94*	1.72	270	.078	83	.75	21	+ 62
3279	-.97	1.04	56	.058	225	.93	138	+ 87
3281	-1.06*	.64	298	.012	245	.62**	175	+ 70
3283	-1.15	.71	114	.127	199	1.68**	164	+ 35
3295	-.98	2.00	55	.138	249	1.35	175	+ 64
3296	-1.00	2.10	325	.132	248	1.30**	210	+ 38
Avg	-1.02							+ 71

* Maximum yaw less than 5° , so linear moment used for fitting ($K_{M_0} \cdot \delta^2$ is less than 10% of K_{M_0})

** Asymmetry approx. 0.5° higher than average for fin hardness of round.
(See Figure 5.)

TABLE 4

AERODYNAMIC JUMP (COMPUTED FROM FIT OF YAWING MOTION,
 EXTRAPOLATED TO MUZZLE)
 AND
 TOTAL JUMP (FROM MEAN TRAJECTORY THROUGH RANGE)

A. Initial Program

<u>Round</u>	<u>Magnitude (Mils)</u>		<u>Orientation (Deg)</u>	
	Comp. Aero. Jump	Obs. Total Jump	Comp. Aero. Jump	Obs. Total Jump
2841	.63	1.28	193	262
2844	2.48	2.83	187	276
2845	2.50	.25	111	244
2847	1.19	1.62	239	244
2866	.85	1.29	165	280
2871	2.87	2.21	173	266
Avg	1.75	1.58	178	262

B. Final Program

3278	.95	3.41	85	264
3279	.56	.60	245	213
3281	.10	.35	13	120
3282	1.88	1.56	180	262
3295	1.85	3.84	240	293
3296	3.03	3.24	175	300
Avg	1.40	2.17	156	242

TABLE 5

DISPERSION AT 280 YARDS AND 1000 YARDS

No.	Round	280 Yards		1000 Yards	
		x(Mils)	y(Mils)	x(Mils)	y(Mils)
1	3278	+ 1.30	- .83	+ 1.47	- .95
2	3279	+ 1.62	+ 2.17	+ 1.63	+ 2.11
3	3280	+ .54	+ 1.30	+ .51	+ 1.16
4	3281	+ 1.31	+ 2.80	+ 1.28	+ 2.72
5	3282	- .18	- .70	- .30	- .68
6	3283	+ .84	+ .47	+ 1.36	+ .86
7	3284	+ .74	+ 1.14	+ .36	+ 1.60
8	3285	0	- .16	+ .13	- .48
9	3286	+ .20	- 1.90	+ .20*	- 1.90*
10	3287	- .53	- .80	- .50	- .88
11	3288	+ .10	- .13	- .32	- .33
12	3289	- 1.33	- .93	- 1.26	- .95
13	3290	- .63	+ 1.02	- .53	+ .73
14	3291	- .93	+ 1.74	- 1.20	+ 1.80
15	3292	+ .64	- .66	+ 1.02	- .49
16	3293	- .70	- .68	- 1.09	- .73
17	3294	- .56	- 1.03	- .63	- .89
18	3295	- .43	- 1.08	- .43*	- 1.08*
19	3296	- .78	- .86	- .49	- .39
20	3297	- 1.13	- .86	- 1.40	- 1.20

Probable error at 280 yards, H = .58, V = .86

Probable error at 1000 yards, H = .64, V = .87

* Estimated from 280 yard impact.



Figure 1

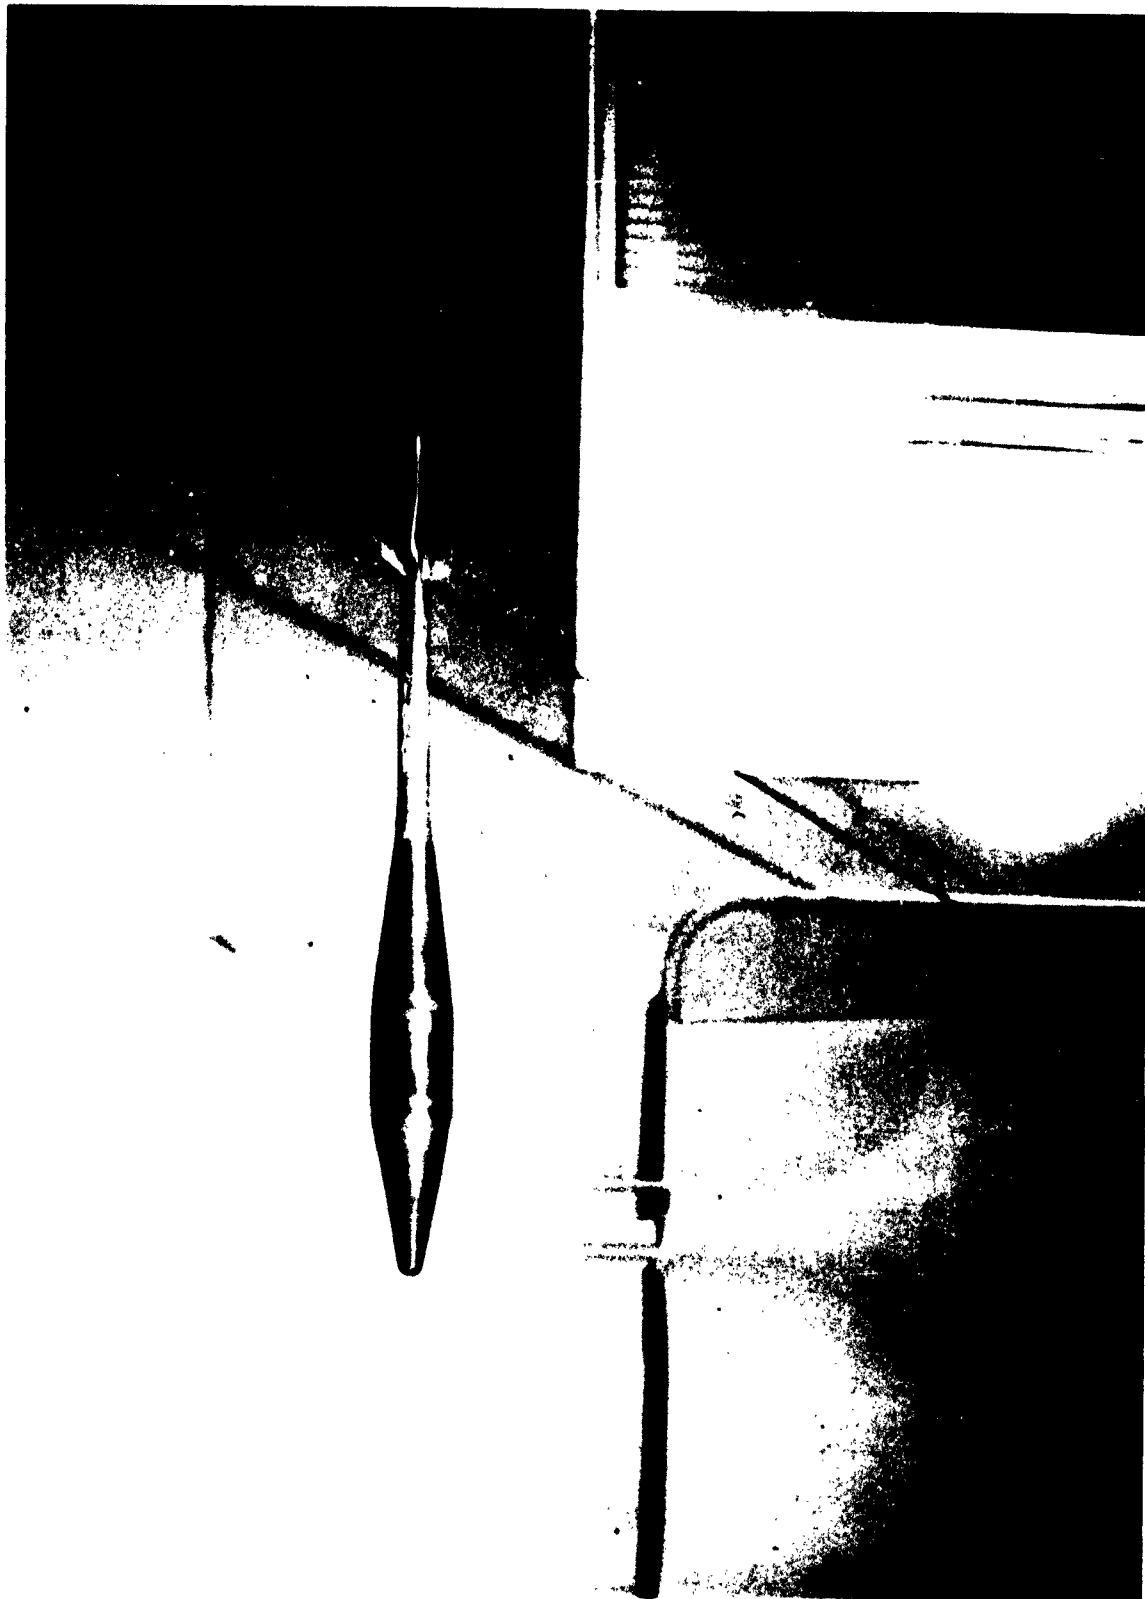


Figure 2

90 mm T108E40, ROUND 3297

FIN DEFORMATION PROFILE

- WALL STATION MICROFLASH
- PIT STATION MICROFLASH
- STANDARD MICROFLASH
- AVERAGE

TOTAL DEFORMATION = SUM OF ABSOLUTE VALUES OF
AVERAGE DEFORMATION OF INDIVIDUAL FINS = 622 DEGREES

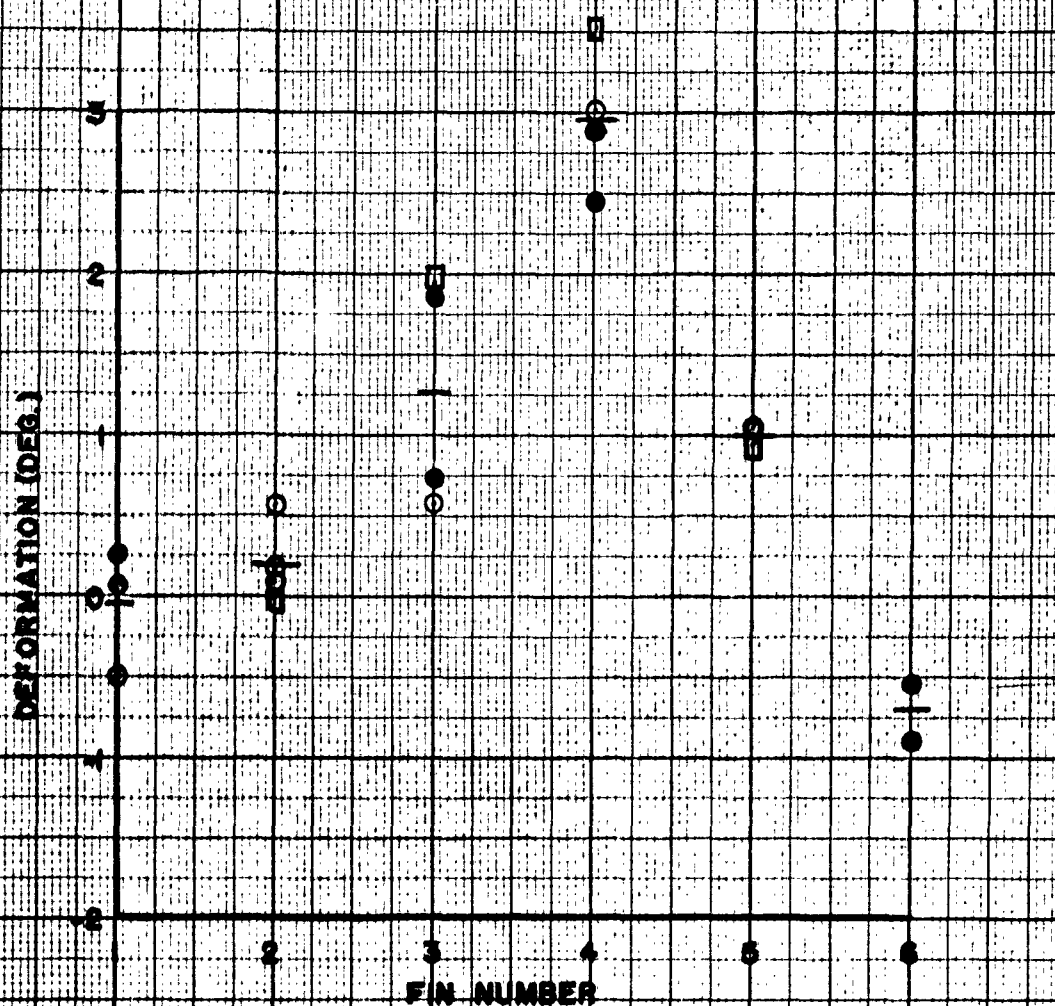


FIGURE 3

90 mm T108E40, ROUND 3297

TOTAL ASYMMETRY ANGLE
(VECTOR SUM OF FIN DEFORMATION)

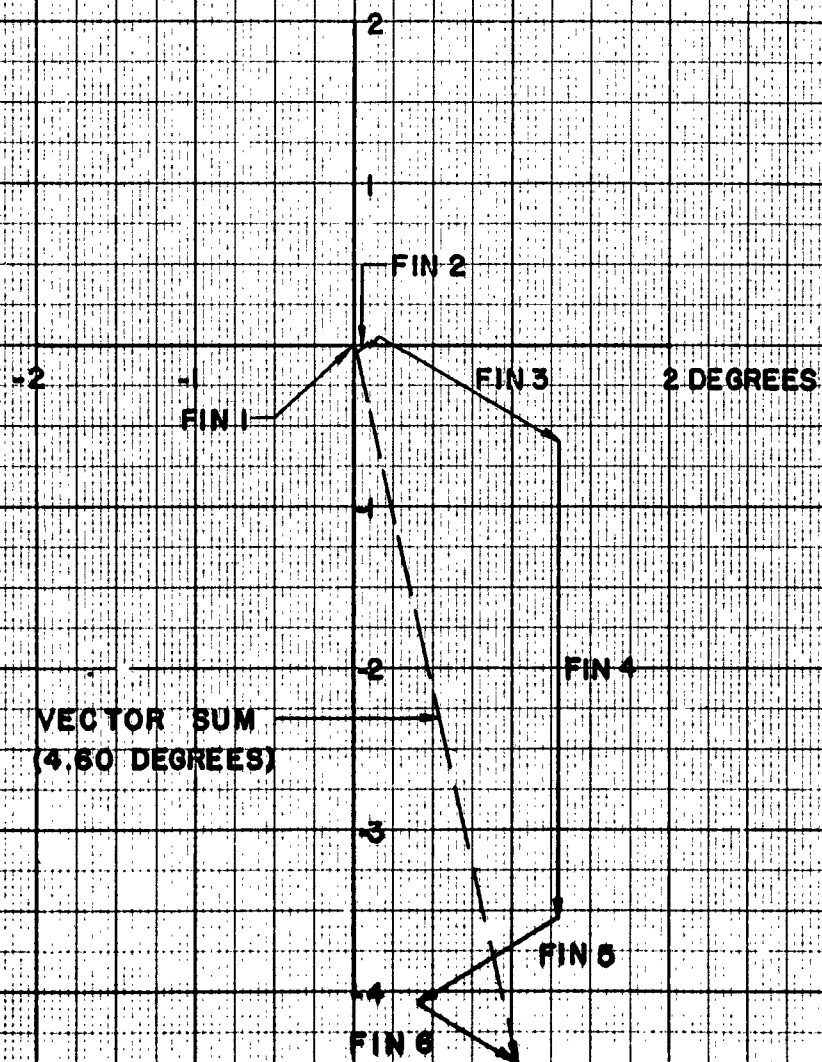


FIGURE 4

90 mm T108E40 CORRELATION OF FIN HARDNESS (STRENGTH) AND DEFORMATION

NOTE: THE DEFORMATION OF THE TWO WORST FINS
(ADJACENT IN ALL CASES) WAS FROM 53 TO
52 % OF THE TOTAL

● PROBABLY ADDITIONAL DAMAGE FROM SOME
OTHER MECHANISM

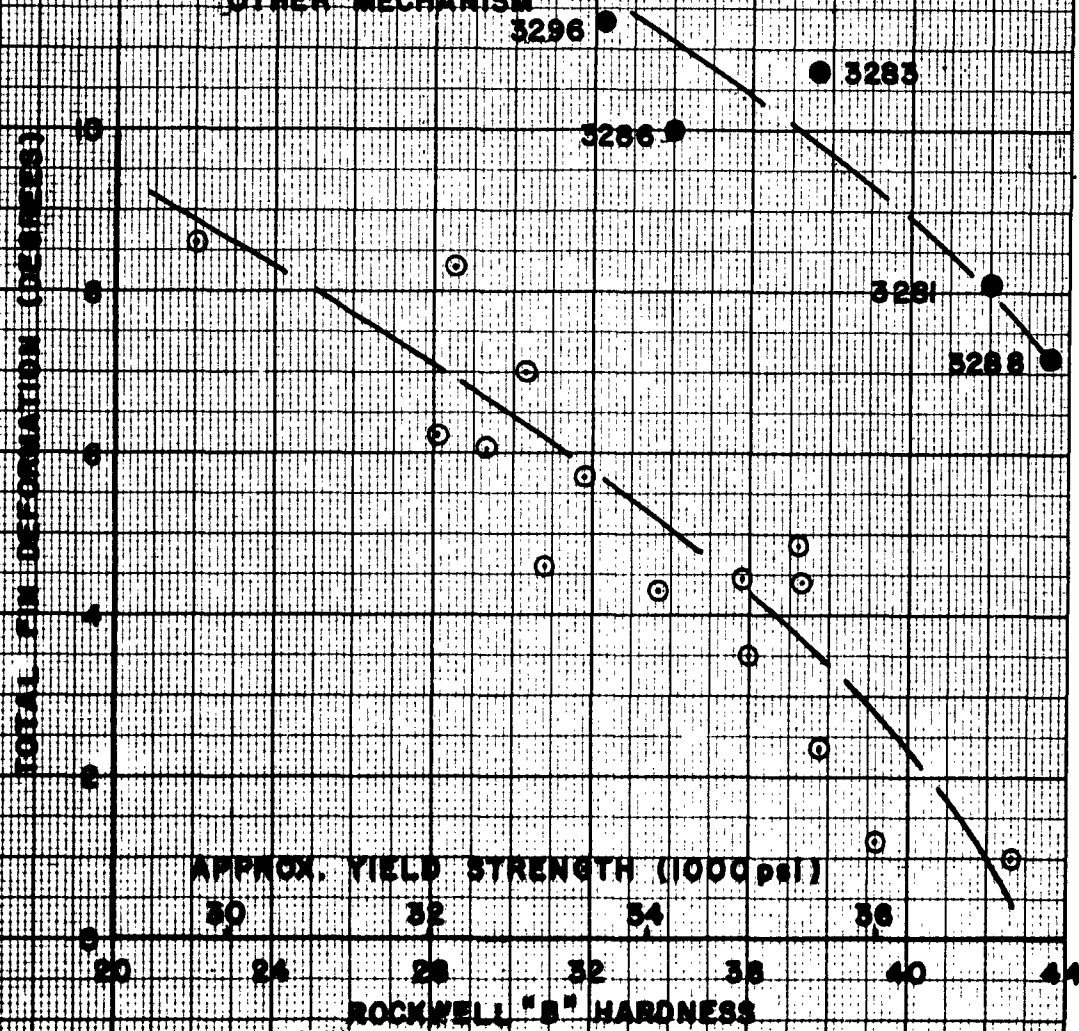


FIGURE 5

90 mm TI08E40

COMPARISON OF ASYMMETRY FROM
MICROFLASH MEASUREMENTS WITH
ASYMMETRY FROM YAW FIT



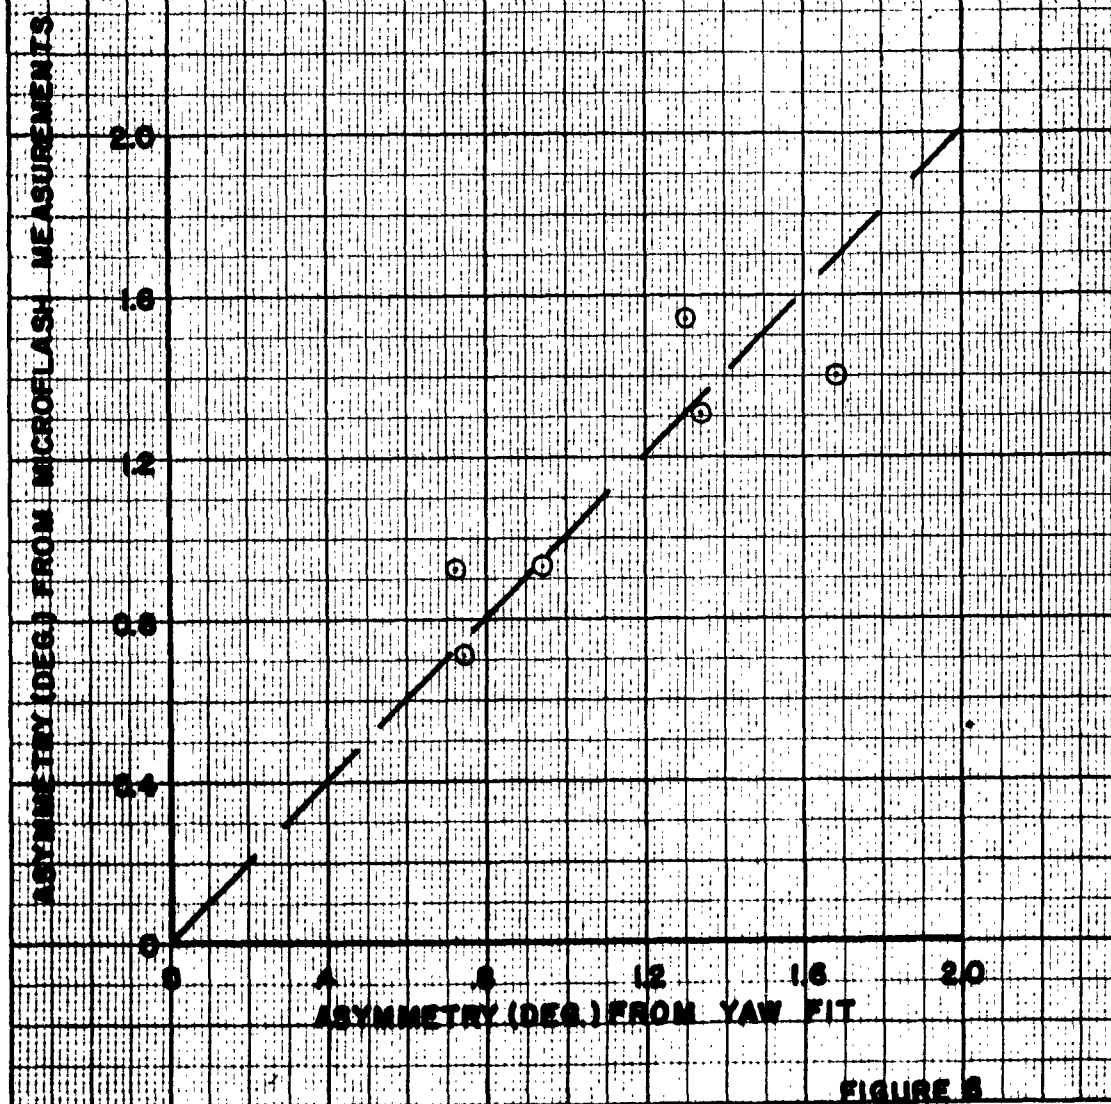


FIGURE 3

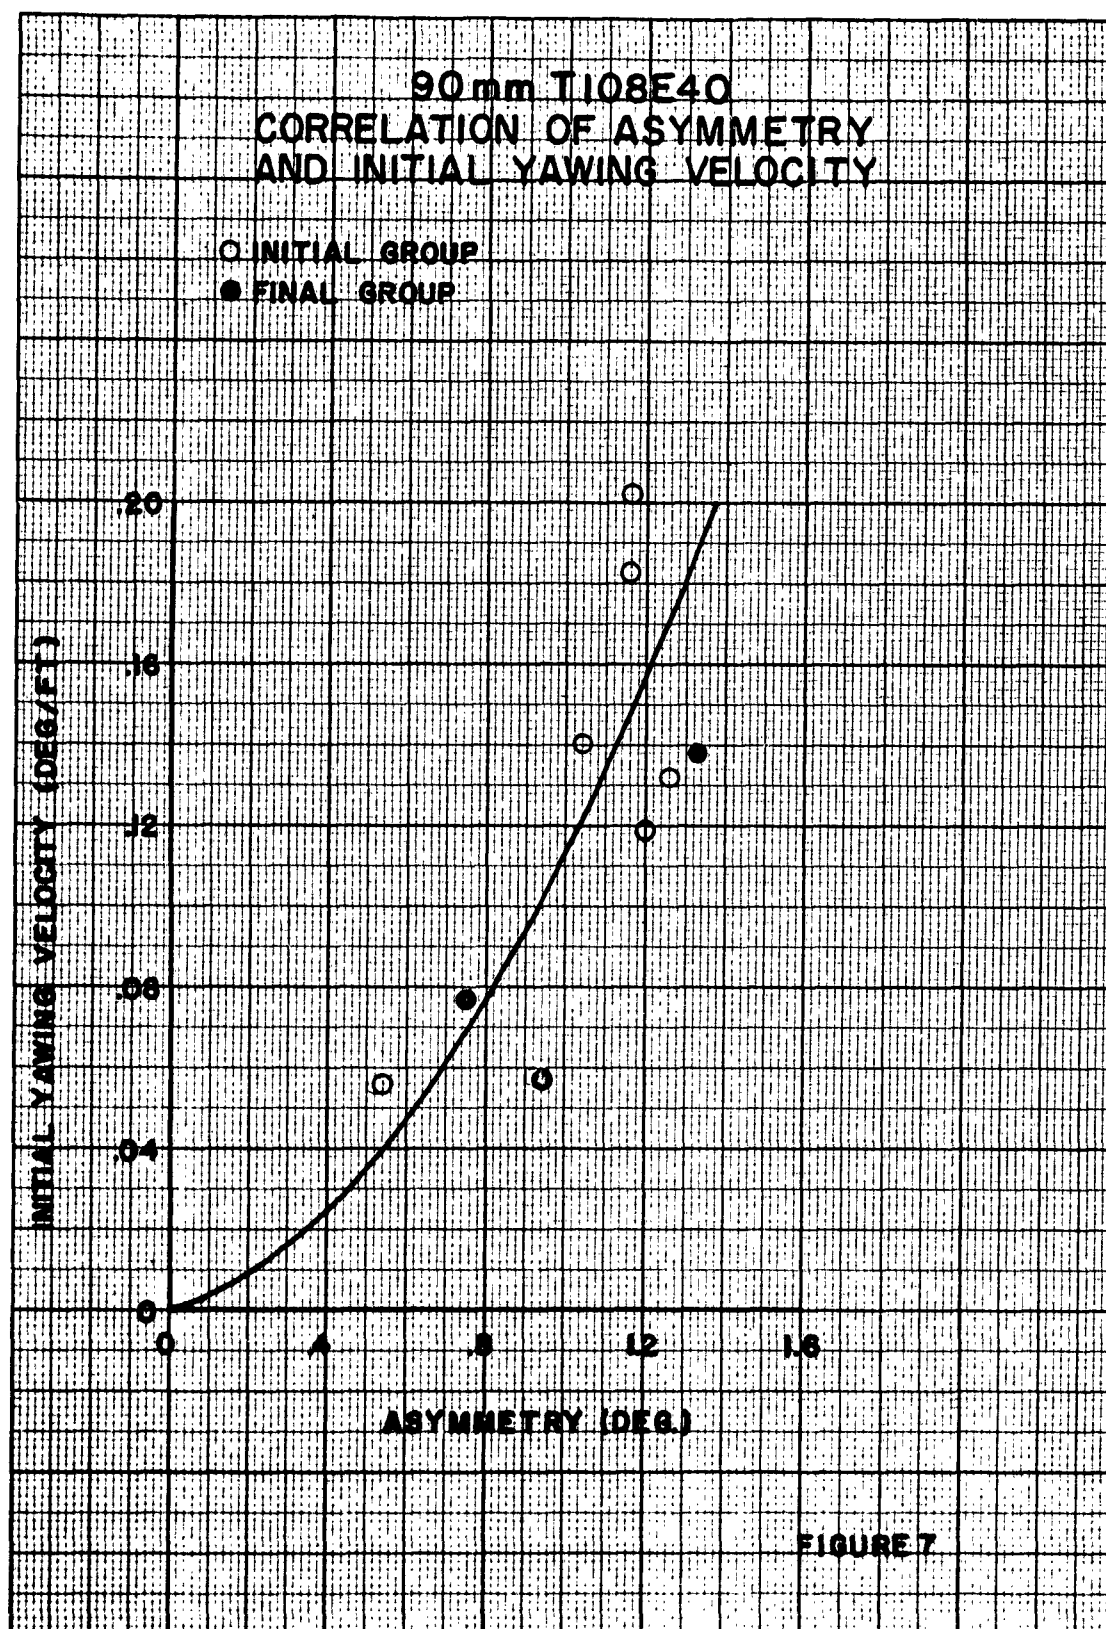

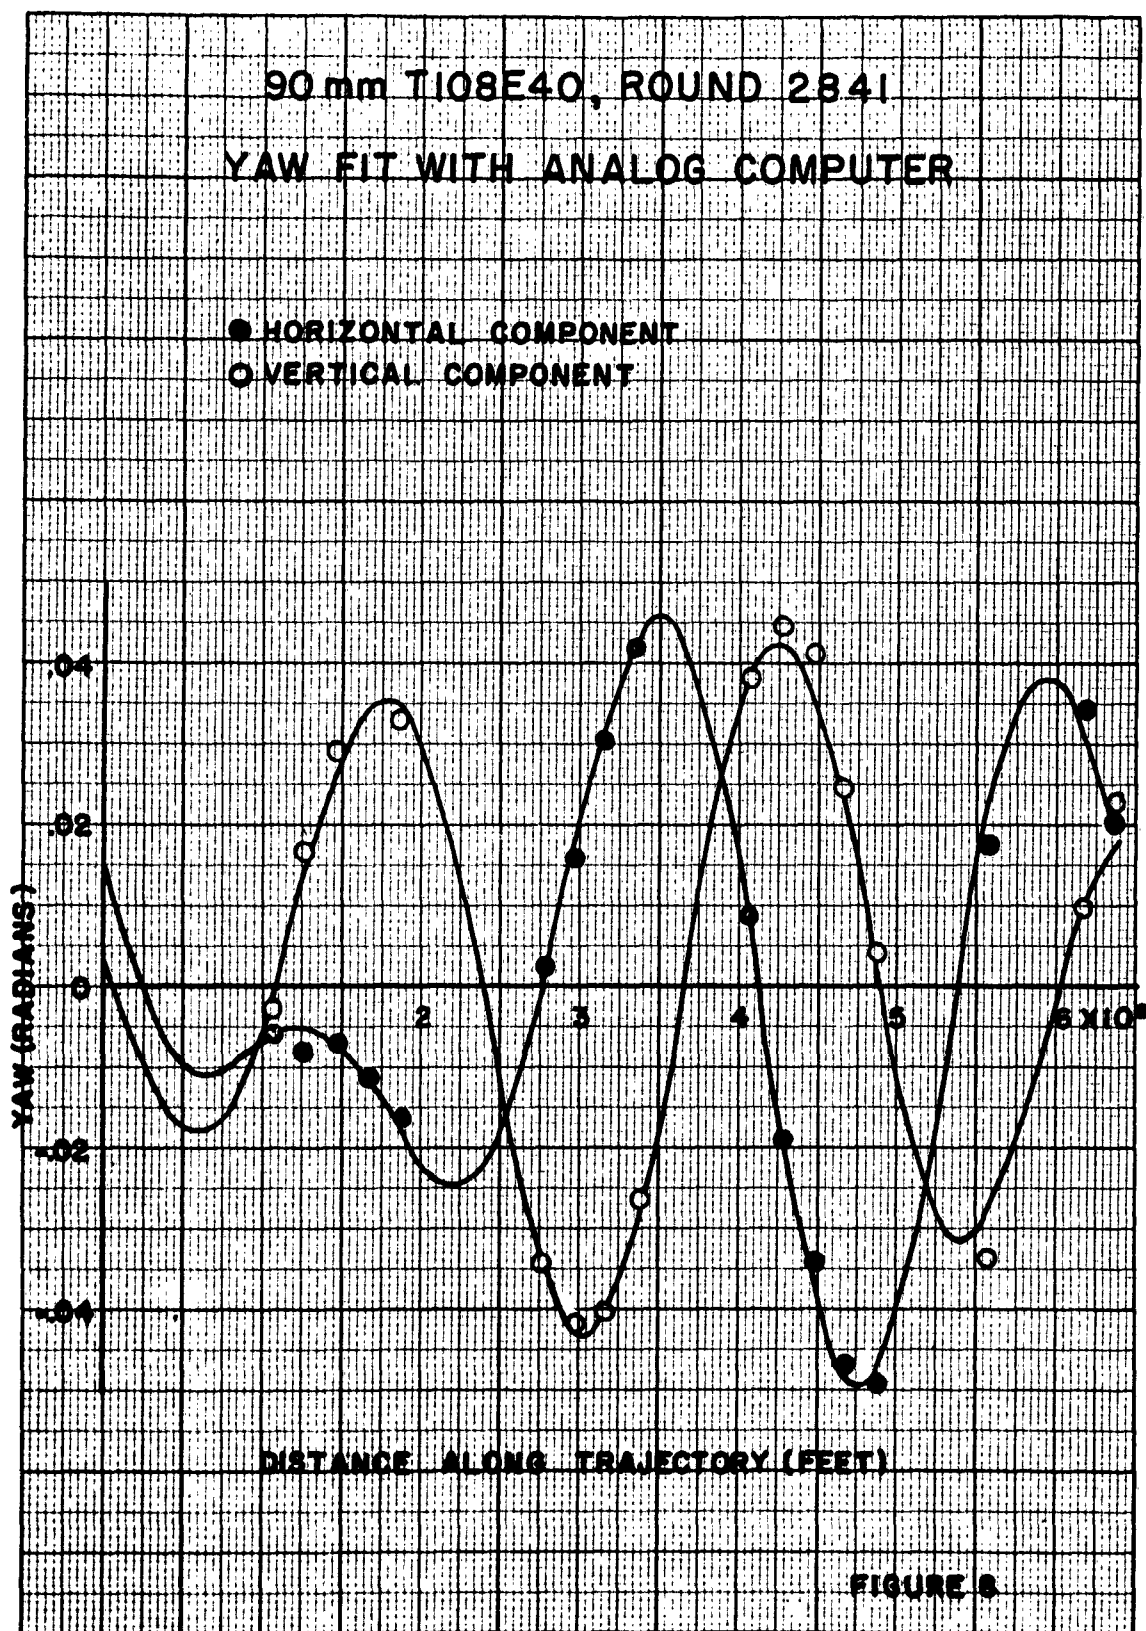

COMPARISON OF OBSERVED JUMP AND AERODYNAMIC JUMP CALCULATED FROM YAW FIT FOR INITIAL GROUP

● OBSERVED
○ CALCULATED


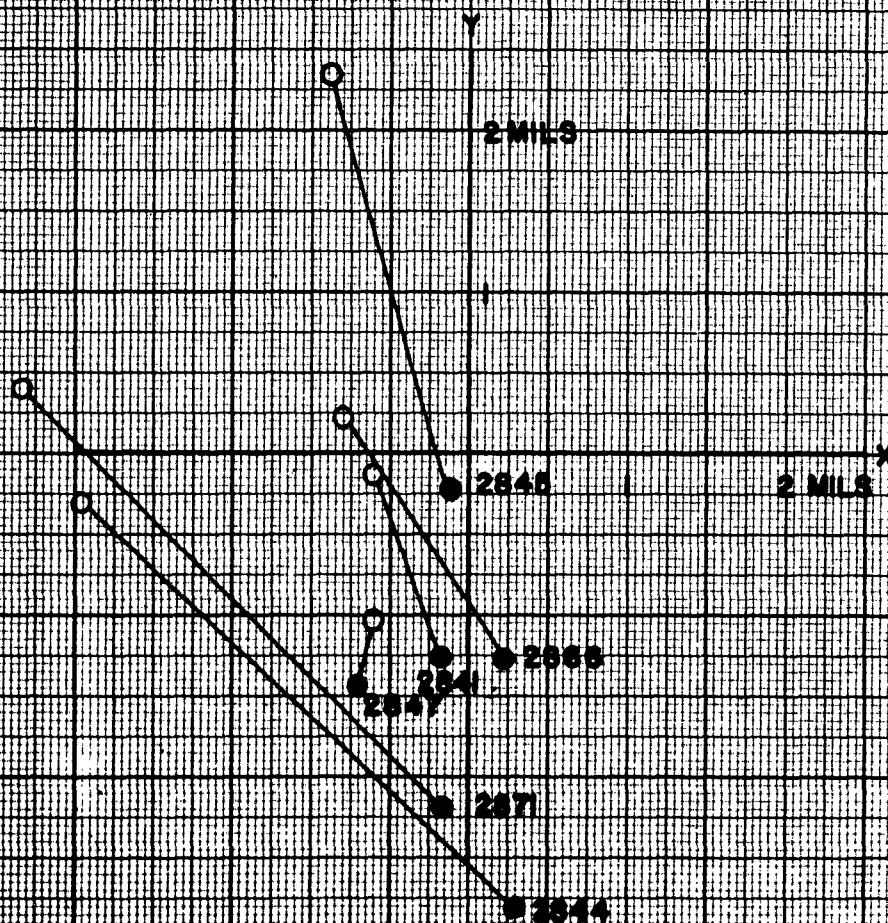


FIGURE 9

COMPARISON OF OBSERVED JUMP AND AERODYNAMIC JUMP CALCULATED FROM YAW FIT FOR FINAL GROUP


● OBSERVED
○ CALCULATED

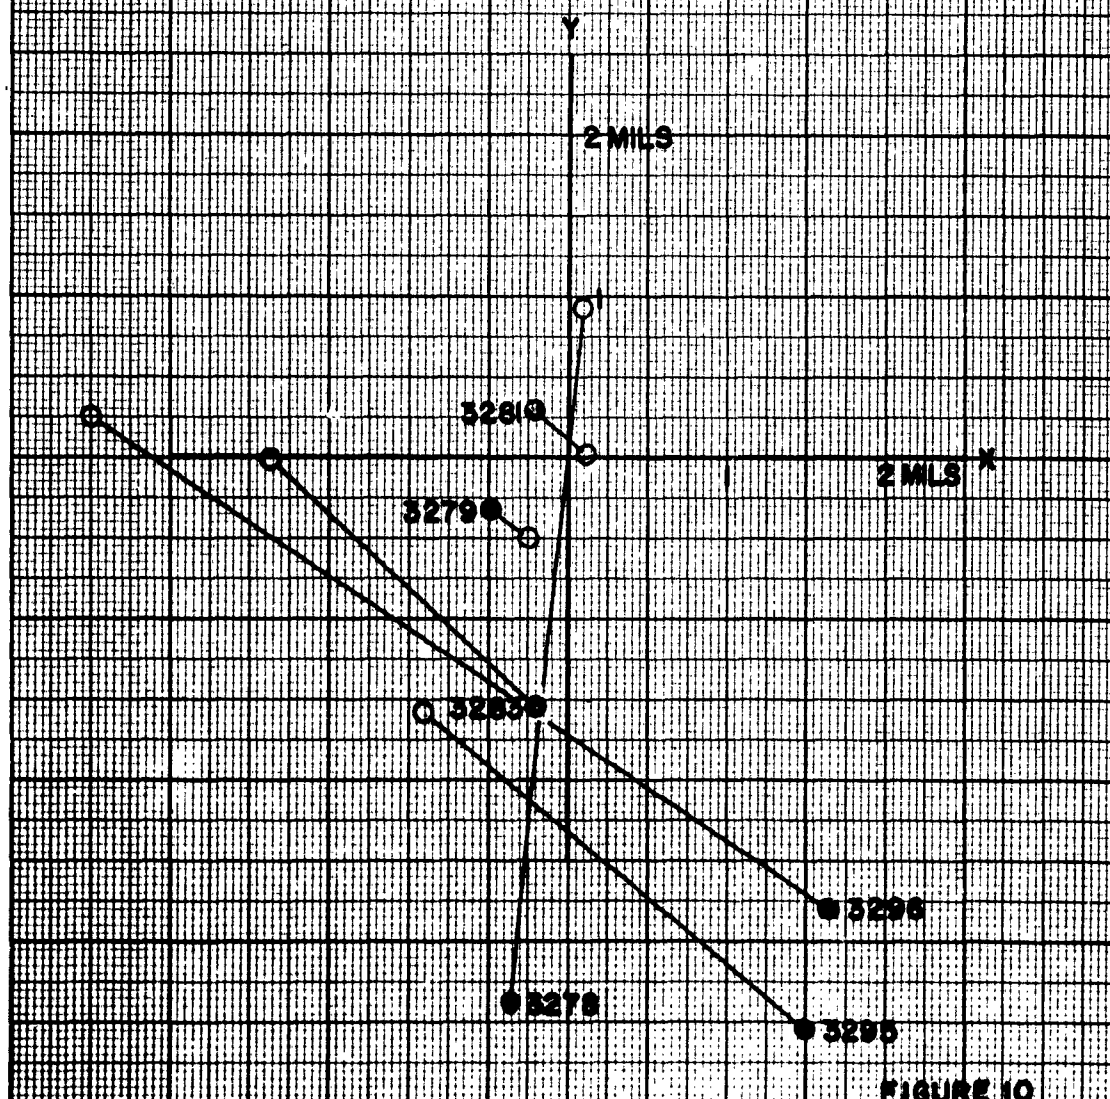

90mm T108E40 DISPERSION AT TWO TARGETS-20 RDS

ROUNDS 3278 TO 3297, M.V. = 2800 fps, T119E1 GUN

SYMBOL	RANGE	P.E. IN MILS	
		H.	V.
○	280 YDS.	58	86
●	1000 YDS.	64	87

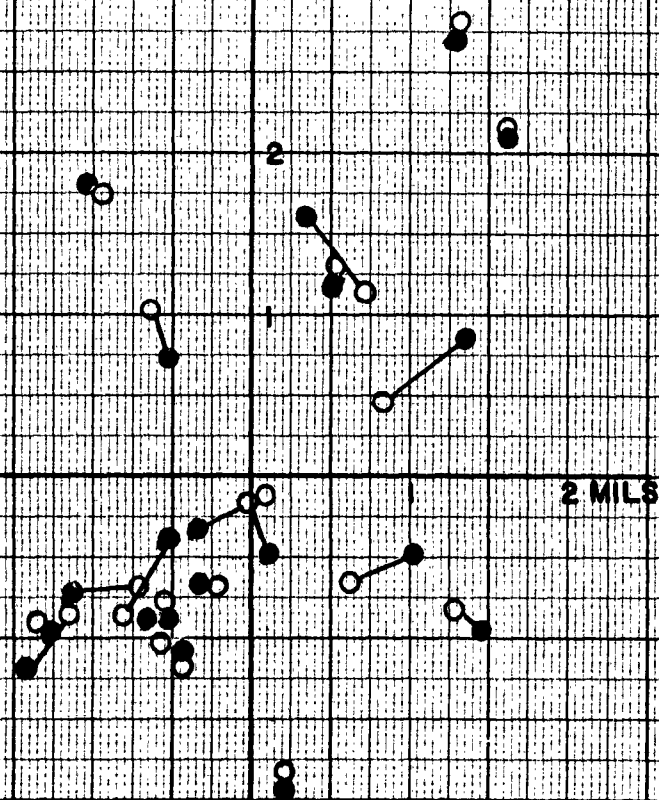

NOTE:

MAXIMUM SWERVE DIAMETER
OBSERVED WAS APPROX. 5 IN.,
WHICH IS 0.50 MIL AT 280 YDS.
AND 0.15 MIL AT 1000 YDS.

FIGURE 11

90 mm T108E40
COMPUTED EFFECT OF 1/3 INCREASE
IN DRAG ON IMPACT AT SEVERAL
RANGES

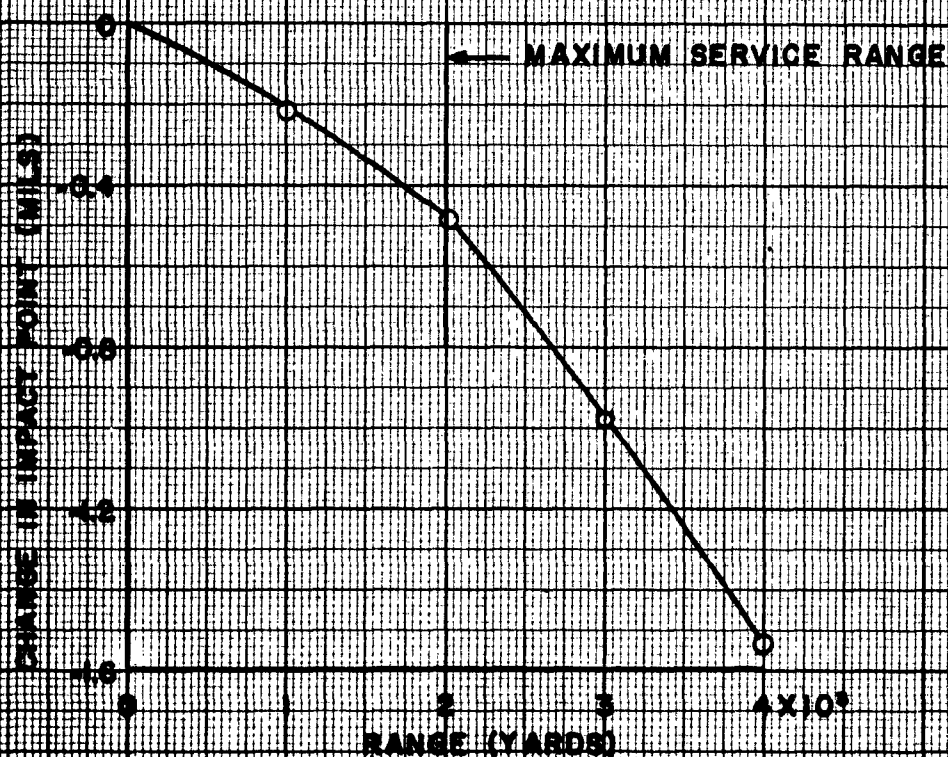


FIGURE 12

90 mm T108E40, ROUND 2866

POLAR YAW PLOT EXHIBITING RESONANCE

NOTE:

POINTS SHOW YAW FROM 100 TO 780 FT. CAMERA
AT 1800 FT. SHOWED THAT YAW MAXIMUM WAS
STILL APPROXIMATELY 8°.

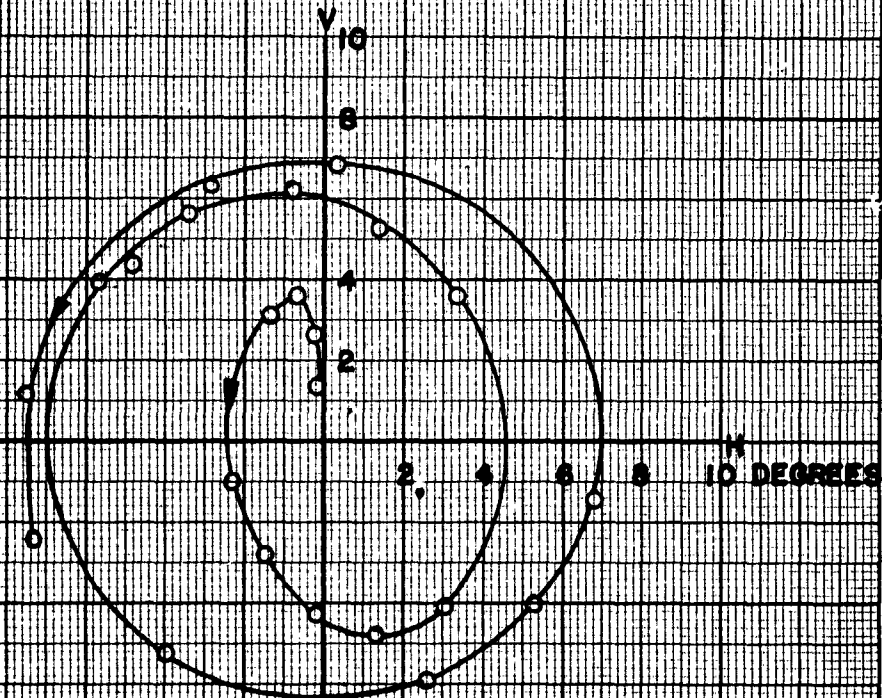
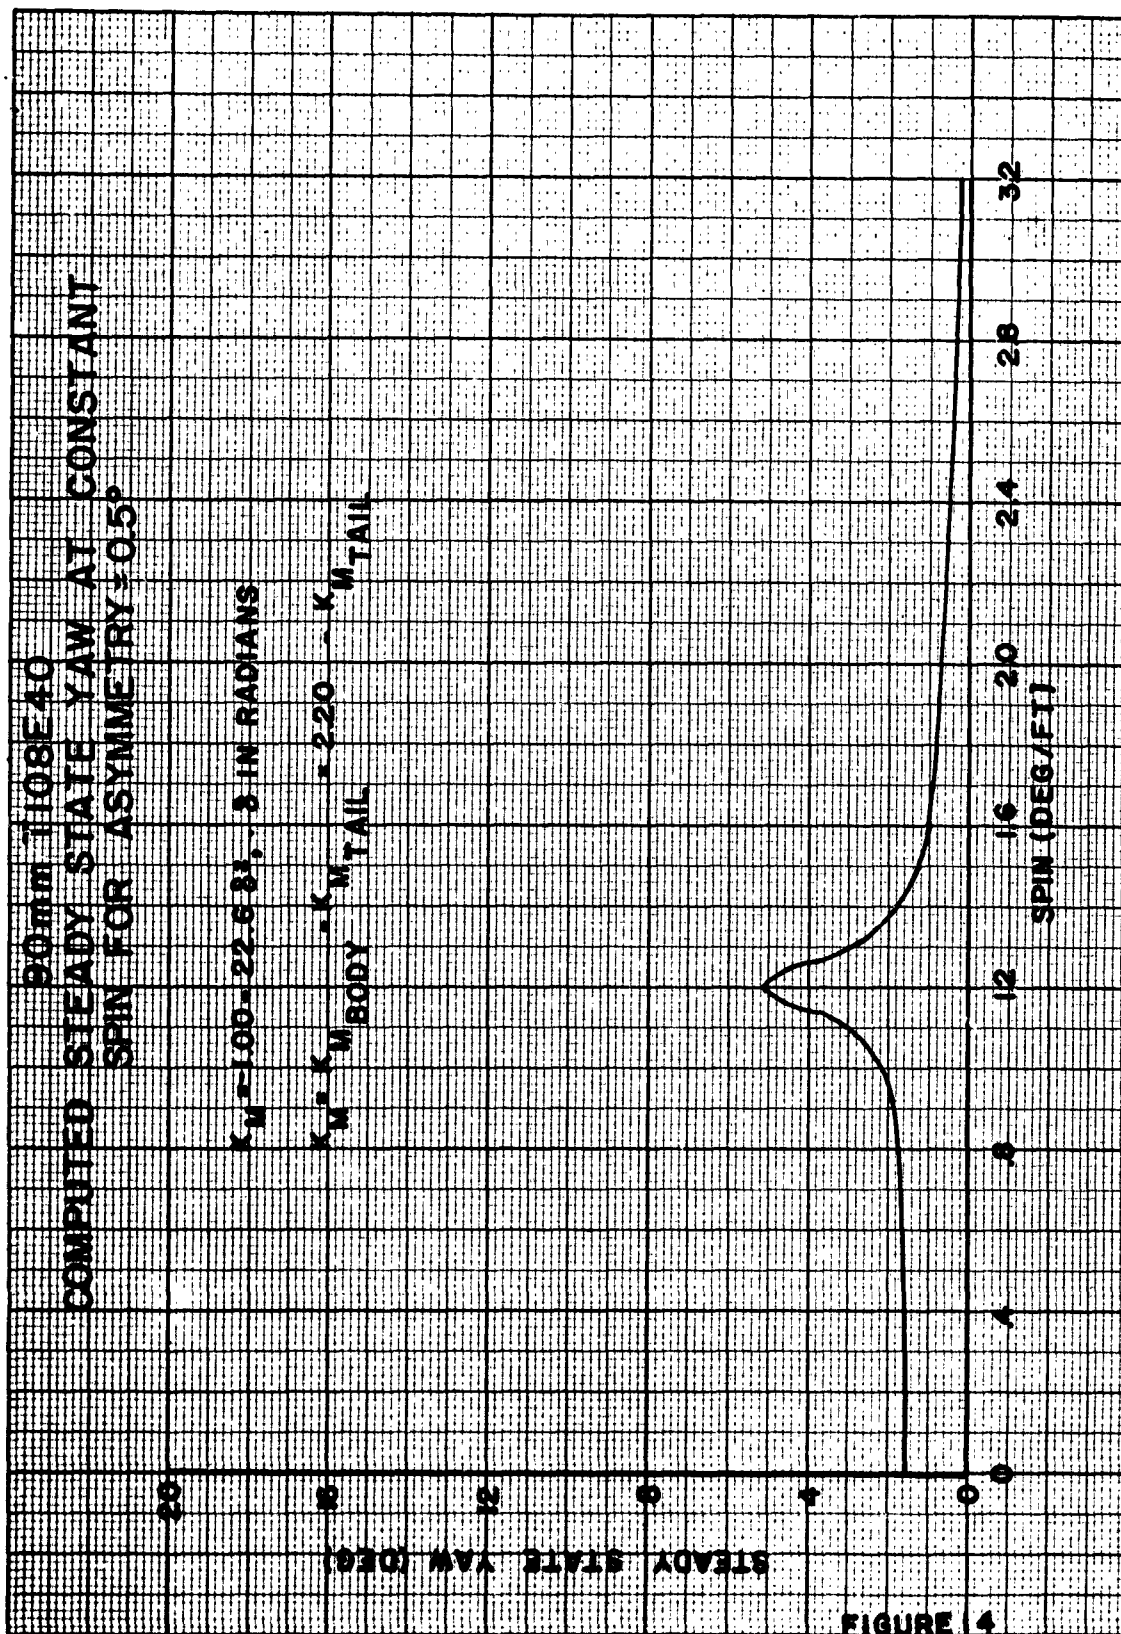


FIGURE 13



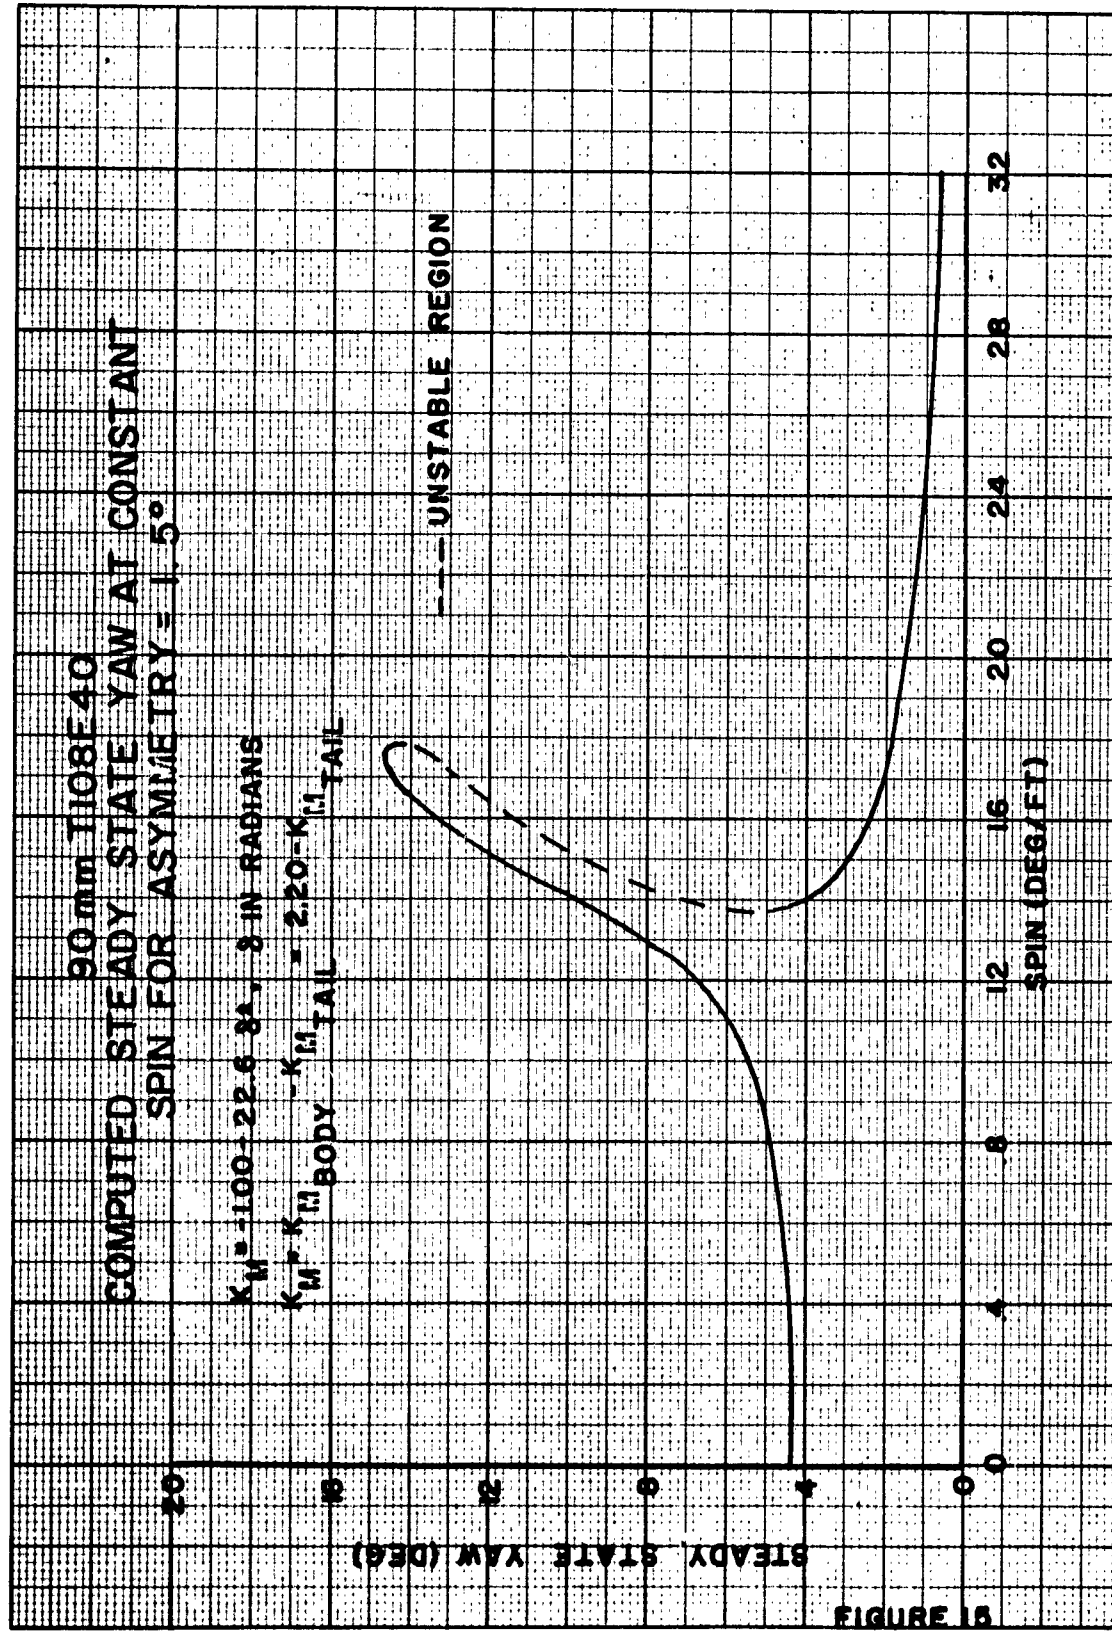


FIGURE 15

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
	Chief of Ordnance Department of the Army Washington 25, D. C. Attn: ORDTB - Bal Sec	1	Commanding Officer and Director David W. Taylor Model Basin Washington 7, D. C. Attn: Aerodynamics Lab.
10	British Joint Services Mission 1800 K Street, N.W. Washington 6, D. C. Attn: Mr. John Izzard, Reports Officer	1	Commander Naval Air Development Center Johnsville, Pennsylvania
4	Canadian Army Staff 2450 Massachusetts Ave. Washington 8, D. C.	2	Commander Naval Ord. Test Station China Lake, California Attn: Technical Library
3	Chief, Bureau of Ord. Department of the Navy Washington 25, D. C. Attn: Re3	1	Commanding Officer U. S. Naval Air Rocket Test Station Lake Denmark Dover, New Jersey
2	Commander Naval Proving Ground Dahlgren, Virginia	1	Commander Arnold Engineering Development Center Tullahoma, Tennessee Attn: Deputy Chief of Staff, R&D
2	Commander Naval Ord. Laboratory White Oak Silver Spring, Maryland Attn: Mr. Nestingen Dr. May	3	Director National Advisory Committee for Aeronautics 1512 H Street, N. W. Washington 25, D. C.
1	Superintendent Naval Postgraduate School Monterey, California	3	National Advisory Committee for Aeronautics Langley Memorial Aeronautical Laboratory Langley Field, Virginia Attn: Mr. J. Bird Mr. C. E. Brown Dr. Adolf Busemann
2	Commander Naval Air Missile Test Center Point Mugu, California		

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
1	National Advisory Committee for Aeronautics Lewis Flight Propulsion Lab. Cleveland Airport Cleveland, Ohio Attn: F. K. Moore	1	Commanding Officer Chemical Corps Chemical and Radiological Lab. Army Chemical Center, Md.
5	Director Armed Services Technical Information Agency Documents Service Center Knott Building Dayton 2, Ohio Attn: DSC - SD	1	Director, Operations Research Office Department of the Army 7100 Connecticut Avenue Chevy Chase, Maryland
1	Chief, Armed Forces Special Weapons Project Washington 25, D. C. Attn: Capt. Bert F. Brown, USN	2	Armour Research Foundation Illinois Institute of Technology Technology Center Chicago 16, Illinois Attn: Mr. W. Casier Dr. A. Wundheiler
2	Commanding General Redstone Arsenal Huntsville, Alabama Attn: Technical Library	2	Applied Physics Lab. 8621 Georgia Avenue Silver Spring, Md. Attn: Mr. George L. Seielstad
3	Commanding General Picatinny Arsenal Dover, New Jersey Attn: Samuel Feltman, Ammunition Labs.	1	Cornell Aeronautical Lab., Inc. 4455 Genesee St. Buffalo, New York Attn: Miss Elma T. Evans Librarian
2	Commanding General Frankford Arsenal Philadelphia 37, Pa. Attn: Reports Group	1	Consolidated Vultee Aircraft Corp. Ordnance Aerophysics Lab. Daingerfield, Texas Attn: Mr. J. E. Arnold
2	Commanding General Ord. Ammunition Command Joliet, Illinois	1	United Aircraft Corp. Research Department East Hartford 8, Connecticut Attn: Mr. Robert C. Sale
2	Director, JPL Ord Corps Installation 4800 Oak Grove Drive Pasadena, California Attn: Mr. Irl E. Newlan Reports Group	1	University of Southern California Engineering Center Los Angeles 7, California Attn: Mr. H. R. Saffell, Director

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>
1	University of Michigan Willor Run Research Center Willow Run Airport Ypsilanti, Michigan Attn: Mr. J. E. Corey