

AD-A091 696

PRINCETON UNIV NJ DEPT OF ELECTRICAL ENGINEERING AND--ETC F/6 12/1
FLOATING POINT ERROR BOUND IN THE PRIME FACTOR FFT.(U)
APR 80 D C MUNSON, B LIU

AFOSR-76-3083

UNCLASSIFIED

AFOSR-TR-80-1129

NL

[]
AD
A091-960



END
DATE
FILMED
12-80
DTIC

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

1. REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM	
1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER	
18 AFOSR-TR-80-1129	AD A091696		
4. TITLE (and Subtitle)		5. TYPE OF REPORT & PERIOD COVERED	
Floating Point Error Bound in the Prime Factor FFT.		9 Interim rept.	
7. AUTHOR(s)		6. PERFORMING ORG. REPORT NUMBER	
10 David C. Munson, Jr. Bede/Liu			
9. PERFORMING ORGANIZATION NAME AND ADDRESS		8. CONTRACT OR GRANT NUMBER(s)	
Dept. of Electrical Eng. & Computer Science Princeton University Princeton, New Jersey 08544		AFOSR-76-3083	
11. CONTROLLING OFFICE NAME AND ADDRESS		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS	
Air Force Office of Scientific Research/NM Bolling AFB, Washington, DC 20332		61102F 16 2304 A6 17 A6	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE	
		11 Apr 21 1980	
		13. NUMBER OF PAGES	
		4	
		15. SECURITY CLASS. (of this report)	
		Unclassified	
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report)			
Approved for public release; distribution unlimited.			
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)			
18. SUPPLEMENTARY NOTES			
IEEE International Conference on Acoustics, Speech and Signal Processing, Denver Colo., April 9-11, 1980			
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)			
FFT, floating point roundoff error, prime factor FFT algorithm and error band			
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)			
The prime factor FFT (PR FFT), developed by Kolba and Parks, makes use of recent computational complexity results by Winograd to compute the DFT with a fewer number of multiplications than that required by the FFT. Patterson and McClellan have derived an expression for the MSE in the PR FFT assuming finite precision fixed point arithmetic. In this paper we derive a bound on the MSE in the PR FFT assuming floating point arithmetic. In the course of the derivation an expression for the actual MSE is also presented, but is seen to be too complicated to be of practical use.			

AD A091696

DDC FILE COPY

UNCLASSIFIED

400734

NOV 13 1980

FLOATING POINT ERROR BOUND IN THE PRIME FACTOR FFT*

David C. Munson, Jr.
Coordinated Science Laboratory
and Department of Electrical Engineering
University of Illinois
Urbana, IL 61801

Bade Liu
Department of Electrical Engineering
and Computer Science
Princeton University
Princeton, NJ 08544

ABSTRACT

The prime factor FFT (PF FFT), developed by Kolba and Parks, makes use of recent computational complexity results by Winograd to compute the DFT with a fewer number of multiplications than that required by the FFT. Patterson and McClellan have derived an expression for the MSE in the PF FFT assuming finite precision fixed point arithmetic. In this paper we derive a bound on the MSE in the PF FFT assuming floating point arithmetic. In the course of the derivation an expression for the actual MSE is also presented, but is seen to be too complicated to be of practical use.

I. INTRODUCTION

Fairly recently a new class of algorithms has emerged for computing the DFT with a fewer number of multiplications than that required by the FFT. The first of these algorithms was developed by Winograd [1,2] and makes use of his formulation for performing convolution with the minimum number of multiplications [3]. This algorithm has been termed the Winograd Fourier transform algorithm (WFTA) [4]. An unnested version of the WFTA has been proposed by Kolba and Parks and termed the prime factor FFT (PF FFT) [5].

It is of interest to investigate the effects of finite register length in these new algorithms. Patterson and McClellan have derived expressions for the average MSE in both the WFTA and PF FFT, assuming a statistical error model and fixed point arithmetic [6]. In this paper we restrict attention to the PF FFT and derive an expression for the MSE assuming floating point arithmetic. The resulting expression is quite cumbersome, but a bound on the MSE is also derived which is relatively easy to compute.

II. PRELIMINARIES

A. PF FFT Algorithm

A one dimensional Winograd type DFT algorithm can be represented in matrix notation as

$$\underline{Y} = CDA \underline{x} \quad (1)$$

*This research was sponsored through Princeton University by the Air Force Office of Scientific Research, USAF under Grant AFOSR-75-3083 and through the University of Illinois by the Joint Services Electronics Program.

where $\underline{x}$ is the input vector and $\underline{Y}$ is the DFT output. The rectangular matrices A and C correspond to the input and output stages of the algorithm and contain only 0 and ± 1 entries. The matrix D is diagonal and contains the only multiplications in the algorithm. As an example, the 3 point DFT may be written as [5]

$$\begin{bmatrix} Y_1 \\ Y_2 \\ Y_3 \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 \\ 1 & 1 & 1 \\ 1 & 1 & -1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 \\ 0 & \frac{3}{2} & 0 \\ 0 & 0 & -\frac{\sqrt{3}}{2} \end{bmatrix} \begin{bmatrix} 1 & 1 & 1 \\ 0 & 1 & 1 \\ 0 & 1 & -1 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} \quad (2)$$

In this particular example A and C are square, but this is not generally the case.

An M -dimensional PF FFT is a cascade of M modules, each consisting of several of the computations given by (1). The PF FFT may be written as

$$\underline{X} = [C_M D_M A_M \dots C_1 D_1 A_1] \underline{x} \quad (3)$$

where " $\otimes$ " denotes a Kronecker product, and $\underline{x}$ and $\underline{X}$ are the DFT input and output respectively. It is assumed that the dimension of $C D A$ is N_m and that

the dimension of $\underline{x}$ is N with $N = \prod_{m=1}^M N_m$ and the N_m relatively prime. Thus to compute the DFT according to (3), only N_m point DFT's are required.

Fig. 1 gives a pictorial representation of (3) for $M=2$ modules. Each plane in the figure is a computation as given by (1). To date, algorithms have been published for only four mutually prime sequence lengths N_m . Hence, $M=4$ is the maximum number of modules.

B. Characterization of Floating Point Errors

We shall be concerned with binary machines using floating point arithmetic with a double precision accumulator. Thus, each machine number may be expressed as $(\text{sign}) \cdot a \cdot 2^b$ where the mantissa 'a' is a fraction between $\frac{1}{2}$ and 1 and the exponent 'b' is an integer. It shall be assumed that 8 bits are used for the mantissa and that enough bits are allotted to the exponent to prevent overflow.

If we let $fl(\cdot)$ denote the machine number resulting from a real floating point operation, then it is well known that [7] for most machines

Presented at the IEEE International Conference on Acoustics, Speech, and Signal Processing, Denver, Colorado, April 9-11, 1980, published in the Proceedings of the Conference.

80 11 06 108

Approved for public release;
distribution unlimited.

$$\begin{aligned} fl(x+y) &= (x+y)(1+\delta_1) \\ fl(x \cdot y) &= (x \cdot y)(1+\delta_2) \end{aligned} \quad (4)$$

where the errors δ_1 and δ_2 satisfy $-2^{-B}/2 < \delta_i \leq 2^{-B}/2$ for rounding and $-2^{-B} < \delta_i \leq 0$ for truncation.

The errors δ_1 and δ_2 are typically modelled as random variables, independent of x and y and uniformly distributed on their range [7]. The bound to be derived in the next section will require knowledge of only the mean squared values of the δ_i , which can be easily computed. For example, assuming rounding we have for real addition and multiplication

$$E\{\delta_i^2\} = \frac{2^{-2B}}{12}$$

For the remainder of this paper we shall assume rounding arithmetic.

The PF FFT is composed of many short one dimensional DFT's, each implemented as in (1). In the next section we shall require an expression for the error vector at the output of a single one dimensional DFT. Let $\underline{y}$ and $\underline{Y}$ be the respective input and desired output of a single N_m point DFT. Then

$$\underline{Y} = C_m D_m A_m \underline{y}^R + j C_m D_m A_m \underline{y}^I \quad (5)$$

where $\underline{y}^R$ and $\underline{y}^I$ are the real and imaginary parts of $\underline{y}$ respectively. Denote the actual machine output by $\underline{\hat{Y}}$. Then the error vector at the DFT output, $\underline{y}(m) = \underline{\hat{Y}} - \underline{Y}$, may be written as

$$\underline{y}(m) = Q(m) \underline{y}^R + j \bar{Q}(m) \underline{y}^I + [G(m) \underline{y}^R + j \bar{G}(m) \underline{y}^I] \quad (6)$$

where $Q(m)$ is an error matrix associated with a single N_m point DFT of a real input array. The error matrix $Q(m)$ may be obtained as follows. The actual output $\underline{\hat{Y}}$, resulting from a real input array, is computed by substituting $fl(\cdot)$ for each multiplication and addition occurring in (1). The i th substitution is made with an error source δ_i where it is assumed the $\{\delta_i\}$ are uncorrelated. If desired, $d_{kk}(1+\delta_i)$ may be substituted for the diagonal elements d_{kk} in D , so that the error due to storage of the multiplier coefficients is also accounted for. All second order effects involving terms of the form $\delta_i \delta_j$ are dropped from $\underline{\hat{Y}}$. The output $\underline{Y}$ is then subtracted, giving $\underline{y}(m)$ to first order. Each element of $\underline{y}(m)$ is a linear combination of the y_i^R with coefficients (the entries in $Q(m)$) given by linear combinations of the δ_i . The matrix $\bar{Q}(m)$ is the error matrix associated with an N_m point DFT of a purely imaginary array. $\bar{Q}(m)$ has the same form as $Q(m)$, however the elements in these two matrices are assumed to be uncorrelated since they arise from different multiplications. The last term in (6) is due to adding the DFT of $\underline{y}^R$ to the DFT of $j \underline{y}^I$ in (5). Both $G(m)$ and $\bar{G}(m)$ are diagonal matrices with each element having variance $2^{-2B}/12$. A fact which will be neglected is that the first

element in both $G(m)$ and $\bar{G}(m)$ is actually zero. This follows since the component of $\underline{Y}_1$ due to $\underline{y}^R$ is purely real and the component of $\underline{Y}_1$ due to $j \underline{y}^I$ is purely imaginary so that no error occurs in adding these two components.

III. FLOATING POINT ERROR BOUND

It is desired to bound the average MSE (over all outputs) at the PF FFT output. This error results from computational errors which originate within each module in (3) and then propagate to the output. It is expedient to consider the effects of the errors from each module separately.

It is somewhat difficult to picture the PF FFT for $M \geq 2$. However, each portion of the computation, from the m th module to the output, may still be represented in a manner similar to Fig. 1. Fig. 2 illustrates a particular stage $S_k(m)$, which is the transformation from a portion of the m th module input to the PF FFT output. The PF FFT contains $N_1 \cdots N_{m-1}$ of these stages in parallel. Hence, the index k runs from 1 to $N_1 \cdots N_{m-1}$ and each stage computes only part of the PF FFT output.

Consider the k th N_m point DFT in stage $S_k(m)$. Let the error at the j th output of this DFT, due to errors originating within this DFT, be defined as

$$\begin{aligned} j &= 1, \dots, N_m \\ k &= 1, \dots, (N_{m+1} \cdots N_M) \\ e_{jk}^l(m) &= 1, \dots, (N_1 \cdots N_{m-1}) \\ m &= 1, \dots, M \end{aligned}$$

Then let

$$\begin{aligned} r &= 1, \dots, (N_{m+1} \cdots N_M) \\ s &= 1, \dots, N_m \\ e_{rs}^l(m) &= 1, \dots, (N_1 \cdots N_{m-1}) \\ m &= 1, \dots, M \end{aligned}$$

be the r th output of the s th ($N_{m+1} \cdots N_M$) point DFT in $S_k(m)$ due to the $e_{jk}^l(m)$.

We shall first compute

$$\frac{1}{N} \sum_l \sum_r \sum_s E |e_{rs}^l(m)|^2$$

which is the average MSE at the PF FFT output due to errors originating within the m th module. For fixed l and s it follows from Parseval that

$$\sum_r E |e_{rs}^l(m)|^2 = (N_{m+1} \cdots N_M) \sum_r E |e_{sr}^l(m)|^2$$

Therefore

$$\frac{1}{N} \sum_l \sum_r \sum_s E |e_{rs}^l(m)|^2 = (N_{m+1} \cdots N_M) \sigma^2(m) \quad (7)$$

$$\text{where } \sigma^2(m) \triangleq \frac{1}{N} \sum_l \sum_r \sum_s E |e_{sr}^l(m)|^2 \quad (8)$$

is the average MSE at the output of the mth module due to errors originating within that module.

An expression for $\sigma^2(m)$ is now required in terms of the algorithm parameters. To investigate the errors occurring within the mth module, (3) is rewritten using a standard Kronecker product identity giving

$$\underline{x} = [(C_{M M} D_{M M} A_{M M}) \times \dots \times (C_{m+1 m+1} D_{m+1 m+1} A_{m+1 m+1}) \times I_m \times \dots \times I_1] \cdot [I_M \times \dots \times I_{m+1} \times (C_{m m} D_{m m} A_{m m}) \times I_{m-1} \times \dots \times I_1] \cdot [I_M \times \dots \times I_m \times (C_{m-1 m-1} D_{m-1 m-1} A_{m-1 m-1}) \times \dots \times (C_1 D_1 A_1)] \underline{x} \quad (9)$$

Similarly $\underline{x}$ may be written as a product of M matrices times $\underline{x}$ where the ith matrix represents the transformation performed by the ith module. In (9) we have broken the computation around the mth module. The output $\underline{x}(m)$ of this module may be written as

$$\underline{x}(m) = [I_M \times \dots \times I_{m+1} \times (C_{m m} D_{m m} A_{m m}) \times I_{m-1} \times \dots \times I_1] \underline{x}(m-1) \quad (10)$$

where $\underline{x}(m-1)$ is the input to the mth module given by $\underline{x}(m-1) = [I_M \times \dots \times I_m \times (C_{m-1 m-1} D_{m-1 m-1} A_{m-1 m-1}) \times \dots \times (C_1 D_1 A_1)] \underline{x}$.

It is apparent from (6) and (10) that the error $\underline{\epsilon}(m)$ in $\underline{x}(m)$ may be expressed as

$$\underline{\epsilon}(m) = P(m) \underline{x}(m-1) + j \bar{P}(m) \underline{x}^I(m-1) + F(m) \underline{x}^R(m) + j \bar{F}(m) \underline{x}^I(m) \quad (11)$$

where

$$P(m) = [I_M \times \dots \times I_{m+1} \times Q(m) \times I_{m-1} \times \dots \times I_1]^{ss} \quad (12)$$

$$F(m) = [I_M \times \dots \times I_{m+1} \times G(m) \times I_{m-1} \times \dots \times I_1]^{ss}$$

Here $\cdot^{ss}$ indicates that each time $Q(m)$ or $G(m)$ is repeated in the Kronecker product, its elements are superscripted relating them to their respective $C_{m m} D_{m m} A_{m m}$ implementation. Without this additional

superscript, the δ_i arising from one implementation of $C_{m m} D_{m m} A_{m m}$ would be assumed to be identical to those arising from another implementation. However, since the inputs to the various implementations are different, we shall in fact assume these errors to be uncorrelated.

From the definition of $\underline{\epsilon}(m)$, the quantity $\sigma^2(m)$, given by (8) may be written as

$$\sigma^2(m) = \frac{1}{N} E \{ \underline{\epsilon}^*(m) \underline{\epsilon}(m) \}$$

where "*" denotes complex conjugate transpose. Substituting from (11) gives

$$\sigma^2(m) = \frac{1}{N} E \{ \underline{x}^{R*}(m-1) P^*(m) P(m) \underline{x}^R(m-1) + \underline{x}^{I*}(m-1) \bar{P}^*(m) \bar{P}(m) \underline{x}^I(m-1) + \underline{x}^{R*}(m) F^*(m) F(m) \underline{x}^R(m) - \underline{x}^{I*}(m) \bar{F}^*(m) \bar{F}(m) \underline{x}^I(m) \} \quad (13)$$

where all cross terms are zero and have been omitted since $P(m)$, $\bar{P}(m)$, $F(m)$, and $\bar{F}(m)$ are all uncorrelated and zero-mean. The last two terms in (13)

may be further simplified since

$$E \{ \underline{x}^{R*}(m) F^*(m) F(m) \underline{x}^R(m) \} = E \{ \underline{x}^{R*}(m) E \{ F^*(m) F(m) \} \underline{x}^R(m) \} \\ = E \{ \underline{x}^{R*}(m) \frac{2^{-2B}}{12} I \underline{x}^R(m) \} \\ = \frac{2^{-2B}}{12} E \{ \underline{x}^{R*}(m) \underline{x}^R(m) \}$$

The second equality follows because $F(m)$ is a diagonal matrix with each element having variance $2^{-2B}/12$. The last term in (13) is equal to a similar expression so that the sum of the last two terms is given by

$$\frac{2^{-2B}}{12} [E \{ \underline{x}^{R*}(m) \underline{x}^R(m) \} + E \{ \underline{x}^{I*}(m) \underline{x}^I(m) \}] = \frac{2^{-2B}}{12} E \{ \underline{x}^*(m) \underline{x}(m) \}$$

$\sigma^2(m)$ given by (13) can now be rewritten as

$$\sigma^2(m) = \frac{1}{N} E \{ \underline{x}^{R*}(m-1) P^*(m) P(m) \underline{x}^R(m-1) + \underline{x}^{I*}(m-1) \bar{P}^*(m) \bar{P}(m) \underline{x}^I(m-1) + \frac{2^{-2B}}{12} \underline{x}^*(m) \underline{x}(m) \} \quad (14)$$

So far, only errors originating within the mth module have been considered. We shall now formulate an expression for the total average MSE at the PF FFT output due to all modules. It may be seen from (11) and (12) that the error vector at the output of the mth module depends on $Q(m)$ and $G(m)$. However, $Q(m)$ and $G(m)$ are uncorrelated with $Q(i)$ and $G(i)$ for $i \neq m$ and hence $\underline{\epsilon}(m)$ is uncorrelated with $\underline{\epsilon}(i)$. The total average MSE at the PF FFT output is therefore the sum of the average MSE's due to each module. From (7) the total average MSE σ^2 is given by

$$\sigma^2 = \frac{1}{N} \sum_m \sum_l \sum_r \sum_s E \{ |e_{rs}^l(m)|^2 \} \\ = \left[\sum_{m=1}^{M-1} \sigma^2(m) + \sum_{i=m+1}^M N_i \right] + \sigma^2(M) \quad (15)$$

We may then substitute (14) for $\sigma^2(m)$, however the first two terms in this quantity will be difficult to compute. As an alternative we shall now derive a bound on $\sigma^2(m)$ which is much easier to compute than $\sigma^2(m)$ itself.

The first term in (14) may be bounded as follows. Letting $T = P^*(m) P(m)$ gives

$$\underline{x}^{R*}(m-1) P^*(m) P(m) \underline{x}^R(m-1) = \sum_k \underline{x}_k^R(m-1) \sum_l T_{kl} \underline{x}_l^R(m-1) \\ \leq \sum_k \sum_l |x_k^R(m-1)| |T_{kl}| |x_l^R(m-1)|$$

Accession For	
NTIS G3&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	Per Hq.
By _____	
Distribution/	
Availability Codes	
Avail and/or	
Special	

$$\begin{aligned}
& \leq \sum_k \sum_l |x_k^R(m-1)| \sqrt{e_{kk}} \sqrt{e_{ll}} |x_l^R(m-1)| \\
& = \left(\sum_k |x_k^R(m-1)| \sqrt{e_{kk}} \right)^2 \\
& \leq \sum_k |x_k^R(m-1)|^2 \sum_l e_{ll} \\
& = \sum_k |x_k^R(m-1)|^2 \sum_l \sum_n |p_{ln}(m)|^2
\end{aligned}$$

where the second inequality follows since T is non-negative definite, and the last inequality follows by Cauchy-Schwartz. The second term in (14) can be bounded in an identical fashion giving

$$\begin{aligned}
\sigma^2(m) & \leq \frac{1}{N} E \left[\sum_k |x_k^R(m-1)|^2 \sum_l \sum_n |p_{ln}(m)|^2 \right. \\
& \quad + \left. \sum_k |x_k^I(m-1)|^2 \sum_l \sum_n |\bar{p}_{ln}(m)|^2 \right] \\
& \quad + \frac{2^{-2B}}{12} \sum_n |x_n(m)|^2. \quad (16)
\end{aligned}$$

Consider $\sum_l \sum_n |p_{ln}(m)|^2$ in (16). It is apparent from (12) that the matrix $P(m)$ contains the elements of $Q(m)$ repeated N/N_m times, each time appropriately superscripted as mentioned before. All other entries in $P(m)$ are zeroes. Regardless of the superscripts we have that

$$\sum_{l=1}^N \sum_{n=1}^N |p_{ln}(m)|^2 = \frac{N}{N_m} \sum_{i=1}^N \sum_{j=1}^N E |q_{ij}(m)|^2 \quad (17)$$

Using (16), (17), and the fact that $E |q_{ij}(m)|^2 = E |q_{ij}(m)|^2$ gives

$$\begin{aligned}
\sigma^2(m) & \leq \frac{1}{N} E \left[\frac{N}{N_m} \sum_{n=1}^N |x_n(m-1)|^2 \sum_{k=1}^N \sum_{l=1}^N E |q_{kl}(m)|^2 \right. \\
& \quad + \left. \frac{2^{-2B}}{12} \sum_{n=1}^N |x_n(m)|^2 \right].
\end{aligned}$$

Now, if $x_n(m)$ is the n th output of the m th module it follows from Parseval that

$$\sum_{n=1}^N |x_n(m)|^2 = N_m \sum_{n=1}^N |x_n(m-1)|^2.$$

By induction then

$$\begin{aligned}
\sigma^2(m) & \leq \sum_{n=1}^N E |x_n|^2 \left[\frac{N_1 \dots N_{m-1}}{N_m} \sum_{k=1}^N \sum_{l=1}^N E |q_{kl}(m)|^2 \right. \\
& \quad + \left. \frac{N_1 \dots N_m}{N} \frac{2^{-2B}}{12} \right]
\end{aligned}$$

where $x_n = x_n(0)$ is the n th input to the PF FFT.

Finally, substituting this into (15) gives the desired bound

$$\sigma^2 \leq \sum_{n=1}^N E |x_n|^2 \left[\sum_{m=1}^M \left(\left(\frac{N}{N_m} \sum_{k=1}^N \sum_{l=1}^N E |q_{kl}(m)|^2 \right) + \frac{2^{-2B}}{12} \right) \right].$$

REFERENCES

- [1] S. Winograd, "On computing the discrete Fourier transform," *Proc. Nat. Acad. Sci. USA*, Vol. 73, pp. 1005-1006, April 1976.
- [2] S. Winograd, "On computing the discrete Fourier transform," *Math. of Computation*, Vol. 32, pp. 175-199, Jan. 1978.
- [3] S. Winograd, "Some bilinear forms whose multiplicative complexity depends on the field of constants," IBM T. J. Watson Res. Ctr., Yorktown Heights, NY, 10598, Res. Rep. RC5669, Oct. 10, 1975.
- [4] H. F. Silverman, "An introduction to programming the Winograd Fourier transform algorithm (WFTA)," *IEEE Trans. Acoust., Speech, Signal Processing*, Vol. ASSP-25, pp. 152-165, April 1977.
- [5] D. P. Kolba and T. W. Parks, "A prime factor FFT algorithm using high-speed convolution," *IEEE Trans. Acoust., Speech, Signal Processing*, Vol. ASSP-25, pp. 281-294, Aug. 1977.
- [6] R. W. Patterson and J. H. McClellan, "Fixed-point error analysis of Winograd Fourier transform algorithms," *IEEE Trans. Acoust., Speech, Signal Processing*, Vol. ASSP-26, pp. 447-455, Oct. 1978.
- [7] T. Kaneko and B. Liu, "Accumulation of round-off error in fast Fourier transforms," *J. Assoc. Comp. Mach.*, Vol. 17, pp. 637-654, Oct. 1970.

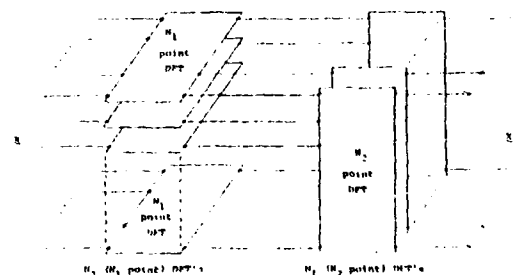


Fig. 1. Example PF FFT of length $N = N_1 N_2$.

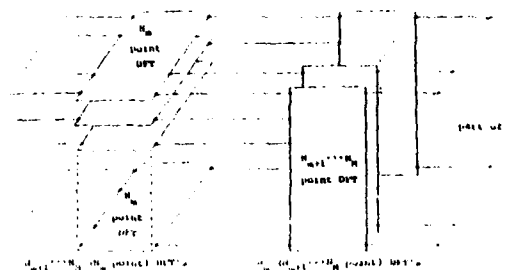


Fig. 2. Stage system for the computation of the PF FFT output from the m th module input to the PF FFT output.