

AD-A102 369 NEW JERSEY INST OF TECH NEWARK DEPT OF ELECTRICAL EN--ETC F/6 6/16
DYNAMICS OF TWO-DIMENSIONAL EYE-HEAD TRACKING.(U)
JUN 81 A U MEYER AFOSR-80-0114


UNCLASSIFIED

AFOSR-TR-81-0610

NL

1 OF 2

AD A
102 369

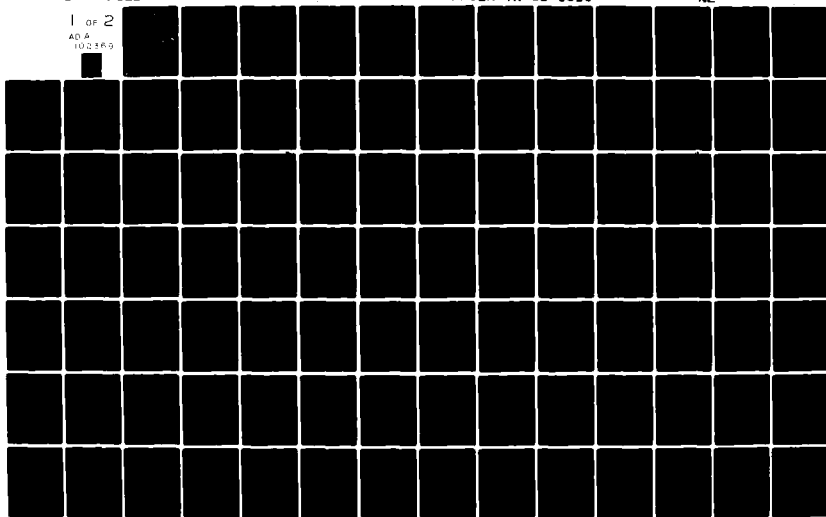

AFOSR-TR- 81 -0610

LEVEL

12

AD A102369

DYNAMICS OF TWO-DIMENSIONAL EYE-HEAD TRACKING

by

Andrew U. Meyer

ELECTRICAL ENGINEERING DEPARTMENT

New Jersey Institute of Technology
323 High Street
Newark, New Jersey 07102

June 1981

DTIC
ELECTE
AUG 3 1981
S
C

FINAL TECHNICAL REPORT
Grant AFOSR-80-0114

for

Air Force Office of Scientific Research
Bolling Air Force Base, D.C. 20332

DTIC FILE COPY

New 412462

Approved for public release;
distribution unlimited.

81 0 03 009

Grant verified per telecon. to Mr. Christiani,
AFOSR, 767-4922, 11 2-4-12

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM											
1. REPORT NUMBER 18) AFOSR-TR-81-0610	2. GOVT ACCESSION NO. AD-A702369	3. RECIPIENT'S CATALOG NUMBER											
4. TITLE (and Subtitle) Dynamics of Two-dimensional Eye-Head Tracking		5. TYPE OF REPORT & PERIOD COVERED 9) Final Report											
7. AUTHOR(s) Andrew U./Meyer		6. PERFORMING ORG. REPORT NUMBER											
9. PERFORMING ORGANIZATION NAME AND ADDRESS New Jersey Institute of Technology & The Foundation at NJIT 323 High Street, Newark, New Jersey 07102		8. CONTRACT OR GRANT NUMBER(s) AFOSR-80-0114											
11. CONTROLLING OFFICE NAME AND ADDRESS Air Force Office of Scientific Research/NL AFOSR - Building 410 Bolling AFB, D.C. 20332		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 6102F (16) (17) 2313/D9											
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) (11) 45 Jun 77 (12) 45 77		12. REPORT DATE June 15, 1981											
		13. NUMBER OF PAGES 125											
		15. SECURITY CLASS. (of this report) Unclassified											
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE											
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release, distribution unlimited													
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)													
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) <table border="0"> <tr> <td>Tracking, Manual</td> <td>Modelling, human dynamics</td> </tr> <tr> <td>Tracking, human</td> <td>Human engineering</td> </tr> <tr> <td>Tracking, eye-head</td> <td>Human operator modelling</td> </tr> <tr> <td>Electrooculography</td> <td>Manual Control</td> </tr> <tr> <td>Oculometer</td> <td>Describing function models</td> </tr> </table>				Tracking, Manual	Modelling, human dynamics	Tracking, human	Human engineering	Tracking, eye-head	Human operator modelling	Electrooculography	Manual Control	Oculometer	Describing function models
Tracking, Manual	Modelling, human dynamics												
Tracking, human	Human engineering												
Tracking, eye-head	Human operator modelling												
Electrooculography	Manual Control												
Oculometer	Describing function models												
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This research is concerned with two-dimensional target tracking, where eye and/or head motion is used for control. Particular attention has been devoted to a tracking method involving electrooculography (EOG) and to two tracking schemes using a Honey-well remote oculometer, one with and one without a visual feedback display. Each of these tracking methods involves eye-head coordination, but in different ways. During the Summer of 1979, experimental work was carried out at the tracking laboratory of the Aerospace Medical Research Laboratory at Wright-Patterson AFB. The tests, conducted with fifteen human subjects, involved tracking of targets in													

DD FORM 1 JAN 73 1473

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)
412460

20. (continued)

two-dimensional quasi-random (sum-of-sines) motion. All tests were conducted at three different target amplitude (envelope) levels, in order to study possible nonlinear effects. From the recorded data, the frequency response spectrum and a statistical evaluation of the tracking performance were obtained for each tracking run. These data, in turn, were averaged in appropriate groups. For each of the tracking methods, average frequency responses, in the describing function sense, are presented for each of three different levels of maximum target field sizes. The relevant overall dynamic properties of the three tracking methods are represented in the compact form of describing function models whose parameters were identified from the average frequency responses. In terms of these parameters, the three methods are compared and the effect of target field size discussed.

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM	
1. REPORT NUMBER AFOSR-TR- 81 -0610	2. DDT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER	
4. TITLE (and Subtitle) Dynamics of Two-dimensional Eye-Head Tracking		5. TYPE OF REPORT & PERIOD COVERED Final Report	
		6. PERFORMING ORG. REPORT NUMBER	
7. AUTHOR(s) Andrew U. Meyer		8. CONTRACT OR GRANT NUMBER(s) AFOSR-80-0114	
9. PERFORMING ORGANIZATION NAME AND ADDRESS New Jersey Institute of Technology & The Foundation at NJIT 323 High Street, Newark, New Jersey 07102		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 61102F 2313/D9	
11. CONTROLLING OFFICE NAME AND ADDRESS Air Force Office of Scientific Research/ML AFOSR - Building 410 Bolling AFB, D.C. 20332		12. REPORT DATE June 15, 1981	
		13. NUMBER OF PAGES 125	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) Unclassified	
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release, distribution unlimited			
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)			
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)			
Tracking, Manual		Modelling, human dynamics	
Tracking, human		Human engineering	
Tracking, eye-head		Human operator modelling	
Electrooculography		Manual Control	
Oculometer		Describing function models	
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)			
This research is concerned with two-dimensional target tracking, where eye and/or head motion is used for control. Particular attention has been devoted to a tracking method involving electrooculography (EOG) and to two tracking schemes using a Honey-well remote oculometer, one with and one without a visual feedback display. Each of these tracking methods involves eye-head coordination, but in different ways. During the Summer of 1979, experimental work was carried out at the tracking laboratory of the Aerospace Medical Research Laboratory at Wright-Patterson AFB. The tests, conducted with fifteen human subjects, involved tracking of targets in			

DD FORM 1 JAN 73 1473

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

20. (continued)

two-dimensional quasi-random (sum-of-sines) motion. All tests were conducted at three different target amplitude (envelope) levels, in order to study possible nonlinear effects. From the recorded data, the frequency response spectrum and a statistical evaluation of the tracking performance were obtained for each tracking run. These data, in turn, were averaged in appropriate groups. For each of the tracking methods, average frequency responses, in the describing function sense, are presented for each of three different levels of maximum target field sizes. The relevant overall dynamic properties of the three tracking methods are represented in the compact form of describing function models whose parameters were identified from the average frequency responses. In terms of these parameters, the three methods are compared and the effect of target field size discussed.

DYNAMICS OF TWO-DIMENSIONAL EYE-HEAD TRACKING

by

Andrew U. Meyer

ABSTRACT

This research is concerned with two-dimensional target tracking, where eye and/or head motion is used for control. Particular attention has been devoted to a tracking method involving electrooculography (EOG) and to two tracking schemes using a Honeywell remote oculometer, one with and one without a visual feedback display. Each of these tracking methods involves eye-head coordination, but in different ways. During the Summer of 1979, experimental work was carried out at the tracking laboratory of the Aerospace Medical Research Laboratory at Wright-Patterson AFB. The tests, conducted with fifteen human subjects, involved tracking of targets in two-dimensional quasi-random (sum-of-sines) motion. All tests were conducted at three different target amplitude (envelope) levels, in order to study possible nonlinear effects. From the recorded data, the frequency response spectrum and a statistical evaluation of the tracking performance were obtained for each tracking run. These data, in turn, were averaged in appropriate groups. For each of the tracking methods, average frequency responses, in the describing function sense, are presented for each of three different levels of maximum target field sizes. The relevant overall dynamic properties of the three tracking methods are represented in the compact form of describing function models whose parameters were identified from the averaged frequency responses. In terms of these parameters, the three methods are compared and the effect of targeted field size discussed.

AIR FORCE OFFICE OF SCIENTIFIC RESEARCH (AFSC)
NOTICE OF TRANSMITTAL TO DDC
This technical report has been reviewed and is
approved for public release IAW AFR 190-12 (7b).
Distribution is unlimited.
A. D. BLOSE
Technical Information Officer

ACKNOWLEDGEMENTS

The author wishes to express his gratitude to the Air Force Systems Command, Air Force Office of Scientific Research and the Southeastern Center of Electrical Engineering Education (SCEEE) for providing him the opportunity to spend the Summer of 1979 at the Aerospace Medical Research Laboratory (AMRL) at Wright-Patterson AFB, Ohio. The experimental work on which this project is based was carried out there under the auspices of the Crew Systems Effectiveness Branch of the Human Engineering Division, AMRL, Dr. Carroll N. Day, Chief and Mr. Maris M. Vickmanis, who directed this project and with whom the author had many relevant discussions.

Special acknowledgement belongs to the author's collaborators at the Tracking Laboratory. Messrs. Donald L. Monk, James L. Porterfield, Robert L. McMurphy and Dr. Christopher J. Arbak, who have given much of their time not only in advise and discussions relating to the project but in active collaborations. The author wishes to express his thanks to them, as well as to colleagues at other branches at AMRL, especially Dr. Daniel W. Repperger, for their help and advise.

At New Jersey Institute of Technology, the author was ably assisted by Mr. Stanley Kalinowski, who did the computer evaluations, including the parameter identification.

Accession For	☒
NTIS GRA&I	☐
DTIC TAB	☐
Unannounced	☐
Justification	
By	
Distribution/	
Availability Codes	
Avail and/or	
Dist	Special

A

1. INTRODUCTION

Increasing demands on pilots for vehicle control and other functions have made it desirable to supplement the use of hands and feet for manual control by other means, especially for secondary tasks. Utilization of eye and head movement for this purpose has been considered for some time.¹⁻⁷ Potential applications may include not only navigational tasks and fire control, but also the selection of information displays or function switches.

In head pursuit tracking systems,¹⁻³ control is exerted from signals derived from head position sensors. Visual display of the positions of both target and controlled device enables the operator to reduce their difference by corrective head movement.

Target tracking by eye movement is also possible but practical only if the head is not constrained. The Honeywell Remote Oculometer,⁴ based on corneal reflection, measures line-of-sight within one degree accuracy, permitting the head to be located anywhere within one cubic foot of a specified location. Thus, the tracking dynamics involve both eye and head motion. The accuracy of ± 1 degree makes it possible to track without the need for visual feedback. Thus, the operator can track by simply looking at the target, relieving him from the task of conscious error correction. On the other hand, in its present state, the oculometer is rather sensitive in its operation. If operated without visual feedback, extensive calibration will be required.

A setup in the tracking laboratory of the Aerospace Medical Research Laboratory (AMRL) at Wright Patterson Air Force Base (WPAFB) incorporates the above tracking instrumentation. Displays of target and visual feedback are provided in the form of red spots, projected to a large cloth screen from two low-power lasers via pairs of x-y galvanometer-mirrors. The subject sits in a chair approximately 3 meters

away from the screen, which provides a visual field of approximately $\pm 20^\circ$ each in vertical and horizontal direction. In addition to computing equipment which is part of the tracking instruments, the laboratory features a PDP 11/34 minicomputer with associated A/D and D/A channels. The setup also contains analog computer equipment, signal generators, both deterministic and random, as well as relevant measuring equipment, which can all be appropriately connected, if and when needed, on a patch panel.

The PDP 11/34 minicomputer can be used both for target signal generation and for data analysis, for which programs have been developed by and for AMRL. Target motion can be provided from programs that calculate and generate quasi-random signals in the form of sum-of-sine waves,^{8,9} for given specifications. During a tracking run, the computer provides the signals driving the galvanometers for both target and visual feedback spots and receives the signals from the tracking instruments (e.g., oculometer). All signals, for both azimuth and elevation, are stored on disk for further analysis.

Data analysis capability includes programs for statistical evaluation and for computation of the frequency response of the subject's tracking performance. The statistical evaluation provides information on the portions of time during a run during which the tracking error remained within certain bounds; it also computes the 50% CEP (circular error probability), which defines the radius about the target within which the tracking error remained within 50% of the run-time. The frequency response analysis provides not only gain and phase spectra (in the describing function sense), but also prints out the spectra of correlated and remnant powers for target, control (response) and error signals.

The facility has been used in experiments involving head tracking by helmet-mounted sight,^{2,3,5} as well as eye-head tracking using the Honeywell remote oculometer.^{4,5,6,7} For both methods, closed-loop gains have been reported that appear reasonably flat up to 1 Hz with half-power bandwidths around 1.5 Hz.^{2,5,6,7} These reports also show coherence functions* above 0.75 for frequencies up to 1.5 Hz, except for one report on single-axis eye tracking,⁶ where the coherence function lies between 0.5 and 0.82. High coherence function values (close to one) suggest linear behavior.

Of the above reports, one also deals with the effect of target angle size on (helmet) head tracking,² showing that an increase of target-angle envelope causes a large increase of closed-loop tracking gain. However, this effect appears to be limited to the gain-level itself, not its function of frequency nor the frequency responses of the closed-loop phase and of the coherence function (about 0.75) which all remain roughly the same. No explanation has been presented.

An increase of closed-loop gain with target-size suggests the possibility of nonlinear saturation in the feedback path of the tracking loop, perhaps in the human sensing mechanism. However, before attempting any such modelling, a thorough experimental investigation of the target size effect would be indicated (reference 2 presented preliminary data for helmet tracking on only 3 subjects). For eye-head tracking (using the remote oculometer) no previous data were available on the effect of target-level.

The results of the present project (see Sections 7 and 8) indicate a slight increase of closed-loop tracking gain with maximum target level for eye-head tracking using the oculometer. On the other hand, for another tracking scheme using electroculography (EOG) introduced in Section 3, a slight closed-loop gain decrease for increased target level was found. The present results also show that

*The coherence function, $\gamma^2 = \frac{|\text{cross power density between input and output}|^2}{(|\text{power-density of input}| |\text{power-density of output}|)}$ represents the proportion of input power contained in the output power. Its range is $0 \leq \gamma^2 \leq 1$.

an increased target-level will result in increased bandwidth for oculometer tracking and decreased bandwidth for EOG tracking.

2. SCOPE OF THE PROJECT

The objective of this research is to evaluate experimental data relevant for the development of a describing function model of eye-head tracking, including the effect of target-level. The data were obtained during the Summer of 1979 at the AMRL tracking laboratory.

Originally, this investigation was to concentrate on tracking with the Honeywell remote oculometer. However, due to unexpected delays and problems connected with a move of the tracking laboratory facility between buildings, that instrument did not become operational until August 8, 1979, near the end of the investigator's stay. When it became apparent that the oculometer could not be used in time to conduct a sufficient number of tracking experiments, the investigator proposed a different eye-head tracking method based upon electrooculography (EOG) and proceeded to conduct tracking tests on human subjects, using the target generating and data processing facility of the AMRL tracking laboratory. When the oculometer finally became operational, tracking tests were expanded to include both oculometer and EOG tracking.

The objective thus was to conduct tracking experiments with targets varying randomly in both horizontal and vertical direction, using different target angle envelopes in order to determine possible nonlinear behavior. The recorded data have been used to model both EOG tracking and oculometer tracking in terms of its describing function representation.

All oculometer tracking experiments were conducted with and without visual feedback, in order to compare performance of tracking by just looking at the target (without visual feedback) and tracking (with visual feedback) where the subject must consciously control the feedback image to align with the target image. EOG tracking is practical only with visual feedback.

3. EOG TRACKING

Electrooculography (EOG) is a method for measuring (both horizontal and vertical) eye orientation.^{9,10} Its chief advantage is its simplicity; other assets include its fast speed of response and the large angular range. On the negative side are problems with d-c drift of the EOG responses and inaccuracy.

It is not the intention here to claim EOG as a better alternative to existing transducer methods for tracking, but rather to examine some basic properties of EOG tracking. The EOG tracking scheme investigated in this research calls upon different tasks for the human operator than other methods. They involve eye-head coordination and EOG tracking tests may provide a tool for the study of their dynamics.

Since eye-position sensing by EOG is inherently inaccurate one may be tempted to dismiss EOG for use in target tracking. However, one should realize that the accuracy of any (eye-position) sensor will be of very little significance if its output is used to control the visual feedback display. It is the human operator who performs the measuring by perceptual means. This, of course, is true for any tracking scheme incorporating visual feedback including head-tracking. The sensor-inaccuracy will merely affect the open-loop gain with relatively little effect on the (closed-loop) tracking performance. Likewise, the drift of the EOG potential does not affect the tracking accuracy and should be tolerable as long as it stays within a reasonable range in the visual field. Though the drift was tolerable for the EOG tracking experiments performed in the laboratory, it is believed that it can be reduced by careful choice of electrodes; even if not, its effect can be reduced by electronic means.

Electrooculography is based upon an electrical d-c potential difference between the front (positive) and back (negative) of the eye. Electrodes placed

across an eye will pick up a d-c potential roughly proportional to the eye orientation angle, with a sensitivity of the order of 20 microvolt per degree.

In the tracking experiments conducted during this research, vertical orientation (elevation) was picked up from electrodes placed above and below one eye, whereas horizontal orientation (azimuth) was picked up by electrodes placed outside of both eyes. An electrode placed on an ear lap was connected to the ground. The vertical and horizontal electrode pairs were connected to d-c amplifiers which, in turn, drove the mirror-galvanometers to provide the feedback display spots.

Depending on the polarity of the feedback connection, two different modes of EOG tracking are possible, which shall be called (a) *eye control mode* and (b) *head control mode*, to emphasize the dominant motion involved.

(a) *Eye Control Mode*: Here, eye motion causes the feedback display spot to move in the same direction, when the head is fixed. However, when the eye line-of-sight is fixed, head motion will cause the display spot to move in the opposite direction. It will thus be natural for a human to try tracking by eye motion, while keeping the head as steady as possible, except for corrective control motion in the opposite direction.

(b) *Head Control Mode*: Here, the display spot is moved in the same direction as the head motion (when the eye line-of-sight is fixed), or in the direction opposite to eye motion (when the head is fixed). In this mode, it turns out to be natural to use head motion for tracking, unconsciously using small eye motion for corrective control.

It was found that the head control mode is easier to perform, at least for tracking tasks requiring freedom of head position. It was therefore decided to devote the experimental work in this project to the head control mode.

Furthermore, it was decided to perform the experimental series with an overall open-loop gain of one. The gain adjustment is performed as follows: The subject is

asked to keep his head in a fixed position and to alternate his eye fixation between two locations on the screen (12 degrees apart from each other), while the amplifier gain is adjusted such that the display spot controlled by the eye movement alternates over the same distance (though in opposite direction for the head-control mode). The subject is instructed not to pay attention to the display spot during the calibration procedure. It is also possible to bias the display such that it is away from the subject's view during calibration.

The same procedure can be used to obtain any other gain value. The unity gain chosen for this experimental series appears to be a reasonable compromise between "loose control" (for too low gain) and sensitivity to disturbances (for too much gain). However, more investigation will be required to determine the optimum choice of gain.

4. EXPERIMENTS CONDUCTED DURING THE SUMMER OF 1979

One hundred tracking runs were recorded for 15 subjects (9 female and 6 male) between the ages of 18 and 62, of which one subject was tested, in a preliminary series, for the effect of random target forcing functions of different break frequencies. Fourteen (14) subjects were tested for EOG tracking, each at three different target amplitude envelopes (6° , 9° and 12°). Of these, 6 subjects were also tested for tracking with the Honeywell remote oculometer, also at the same three target amplitude envelopes. The 48 oculometer runs were all conducted with and without feedback display (24 each).

In order for the subject to be able to distinguish the target spot from the feedback display spot, the latter was smaller (approximate diameters were 12 mm and 3 mm respectively; the screen was about 3 meters away from the subject). The target was driven in both azimuth and elevation by sum-of-sine functions (10 frequencies), simulating random motion.⁸ The frequency ranged between 0.1 and 3.0 Hertz, with a (6 dB) break frequency of 0.8 Hz in all runs for 12 subjects. Earlier EOG tracking runs on two subjects were performed with forcing functions of 1.0 Hz break

frequency; but it was found that 0.8 Hz would be more realistic. The specifications for the target forcing functions used in the experiments are presented in Table A-1, Appendix A.

EOG tracking, as described in Section 3, involves a certain amount of head-eye coordination and constitutes a somewhat more difficult task for the human operator than oculometer tracking (especially oculometer tracking without visual feedback). It therefore requires a certain amount of training. Among the 15 subjects, the time required to acquire a reasonable tracking skill varied between 10 and 30 minutes. Scheduling constraints did not permit any longer training periods which, perhaps, may have improved the tracking scores.

After the training period, each subject did seven tracking runs, each lasting 91 seconds. The first of these, considered a practice run, was performed at a target amplitude envelope of 6 degrees. The subsequent six runs consisted of two runs each with target amplitude envelopes of 6° , 9° and 12° , their sequence being permuted. Also permuted were three forcing functions with equal amplitude characteristics but different (randomly selected) phases (except for each initial [practice] run which used a forcing function differing from the others by its break frequency of 0.7 Hz). The record of the relevant EOG tracking runs is presented in Table A-2, Appendix A.

The tracking tests with the Honeywell remote oculometer were performed on six of the subjects. For each subject, eight oculometer runs were performed; four each without and with visual feedback. For each set of four runs, the first (practice) run had a target amplitude envelope of 6° , the other (regular) three runs were performed at 6° , 9° and 12° , the sequence being permuted, as was the (same) set of three target forcing functions used in the EOG experiments. The record of the relevant oculometer tracking runs is presented in Table A-3, Appendix A.

For the oculometer runs with visual feedback, an open-loop gain of one was used. achieved by calibrating the equipment such that the line-of-sight is aligned with the feedback spot (this is part of the normal oculometer calibration procedure).

5. ANALYSIS OF INDIVIDUAL TRACKING RUN DATA

The analysis of the individual tracking run data was done on the PDP 11/34 minicomputer at the AMRL Tracking Laboratory; namely (a) frequency response analysis, using program MODFRT and (b) statistical analysis, using program TR4.* These programs produced evaluations for each test run.

From each tracking run record, the frequency response program (MODFRT) computes spectra of correlated and remnant power for target, control (response) and the error (between target and control), each for both azimuth and elevation. It also provides gain and phase spectra, in the describing function sense. All spectral data are given for the same set of frequencies that generated the target motion by use of the sum-of-sine approach.

The data of interest in this study are the gain-phase spectra. In program MODFRT, the the gain and phase values are obtained from the power spectral data. Thus, for each frequency value, the reliability of the computed gain and phase must be assessed in terms of the correlated power (COR), as well as the ratio of the correlated power to remnant power (C/R). This was done by the classification presented in Table 5-1, which has been used to identify each data point in all of the individual frequency responses.

*For some of the tracking runs, the analysis was performed during the summer 1979, the remaining computations were performed during August 1980.

TABLE 5-1

RELIABILITY - LEVELS OF DATA POINTS IN GAIN - PHASE PLOTS

Marking on Plot	Conditions		Reliability	Weight
	$\frac{\text{Correlated Power}}{\text{Remnant Power}} = \frac{C}{R}$	Correlated Power = COR	Level	Assigned
○	$C/R > 6 \text{ dB}$	$COR > -12 \text{ dB}$	GOOD	0
□	$C/R > 6 \text{ dB}$	$COR < -12 \text{ dB}$	FAIR	1
△	$C/R < 6 \text{ dB}$	$COR > -12 \text{ dB}$	ACCEPTABLE	2
×	$C/R < 6 \text{ dB}$	$COR < -12 \text{ dB}$	POOR	3

The individual gain and phase versus frequency plots for the tracking runs on 11 (of the 15) subjects, thus marked, are presented in Appendix A. For each tracking run, frequency response plots are presented for both the closed-loop [Control (output) / Target (input)] and the open-loop [Control (output) / Error (Target - Control)].* Also shown with the plots for each run is the 50% CEP ("circular error probability") which defines the radius, in degrees, within which the tracking error remains within 50% of the run time. It is presented both in reference to the target and in reference to the centroid (of the error motion). These data had been computed by Program TR4 for each tracking run.

*Since the tracking schemes are not compensatory, the physical meaning of an "open-loop" transfer function is not clearly defined.

6. DATA EVALUATION

The results of the individual tracking runs have been classified and averaged in appropriate categories. All tracking runs for subjects 3 through 14 were performed with forcing functions of the same break frequencies of 0.8, Hertz (see Table A-1, Appendix A for forcing function specifications and Tables A-2 and A-3, Appendix A, for the record of the tracking runs for subjects 1-14). These tracking runs serve as the basis for analysis and model parameter estimation (see Section 7).

Excluded from averaging are the first runs in each series which were considered practice runs. Also excluded are the results of the tracking runs on Subjects 1 and 2 where the break frequency of the forcing function was 1.0 Hertz; these data are not considered reliable enough to warrant consideration for the establishment of models. The break frequency of 1.0 Hertz was evidently too high and subsequent tracking runs for Subjects 3 through 14 were performed with a forcing function break frequency of 0.8 Hertz. Nevertheless, the 12 EOG runs for Subjects 1 and 2 were averaged by themselves and the results are presented in Appendix C.

The results of the remaining 69 EOG and 36 oculometer tracking runs (on Subjects 3 to 14) were averaged in the following groups:

EOG TRACKING RUNS:

For 6 degrees max. target field: 24 runs on 12 subjects
" 9 " " " : 24 " " 12 "
" 12 " " " : 21 " " 12 "

OCULOMETER WITHOUT VISUAL FEEDBACK:

6 runs on 6 subjects, each for 6, 9 and 12 deg. max. target field.

OCULOMETER WITH VISUAL FEEDBACK:

6 runs on 6 subjects, each for 6, 9 and 12 deg. max. target field.

Within every given group, for each frequency, averages, standard deviations as well as maxima and minima were obtained for the gain and phase values. Also averaged were their "reliability levels" in terms of the "weights" defined in Table 5-1. These "weights" were then discretized again by the rule defined in Table 6-1 into "reliability levels" of the averaged frequency response plots.


TABLE 6-1

RULE FOR DETERMINING RELIABILITY LEVELS
FOR AVERAGED GAIN AND PHASE PLOTS

MARKING ON PLOT	RANGE OF AVERAGE WEIGHT (AW)			RELIABILITY LEVEL OF AV. GAIN/PHASE VALUES
○	0	AW	0.75	GOOD
□	0.75	AW	1.50	FAIR
△	1.50	AW	2.25	ACCEPTABLE
×	2.25	AW	3.00	POOR

Also obtained were the averages and standard deviations of the 50% CEP ("circular error probability") both with respect to the target and to a centroid (of the error motion).

As a summary of the relevant results, Figures 6-1 to 6-9 present the frequency response statistics including the average value and standard deviation for each frequency as well as the average values and standard deviations of the 50% CEP for all runs. The details of this effort are presented in Appendix B. both in tabular form and in terms of frequency response plots.

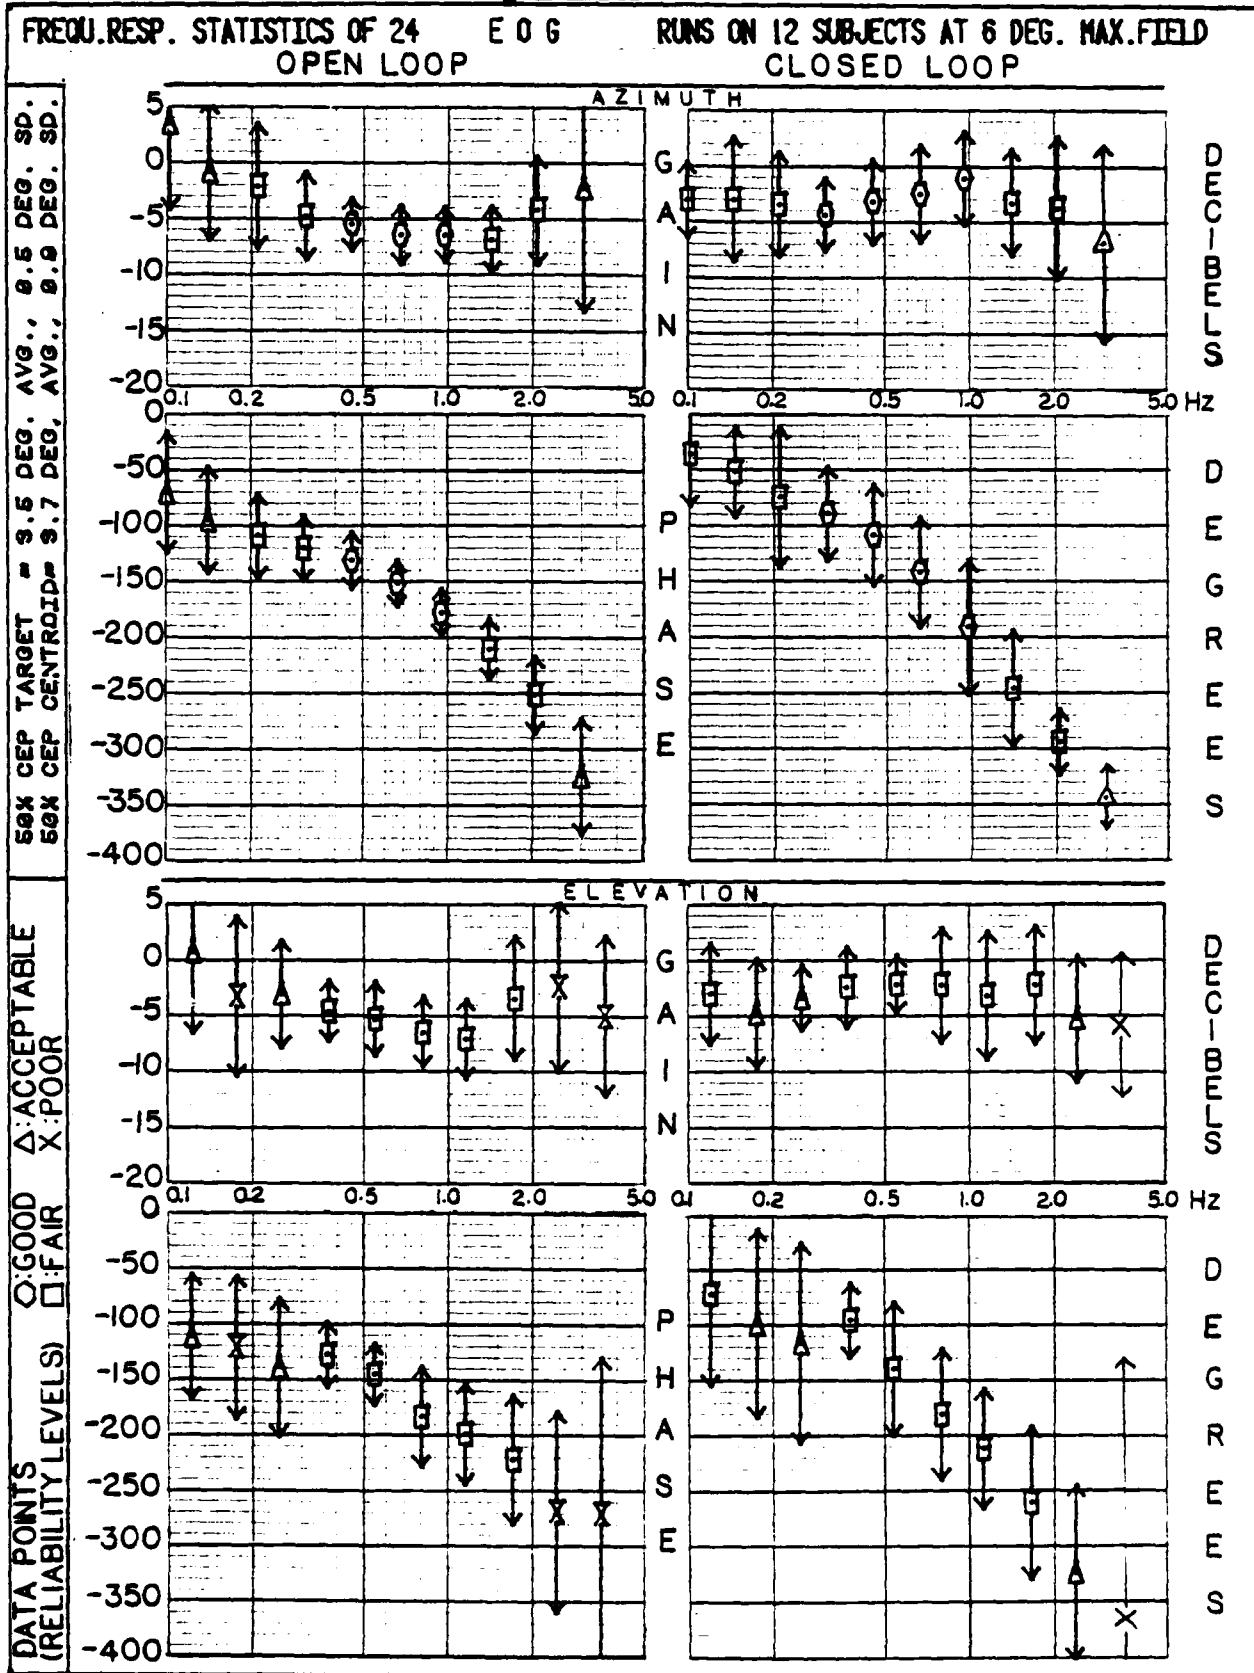

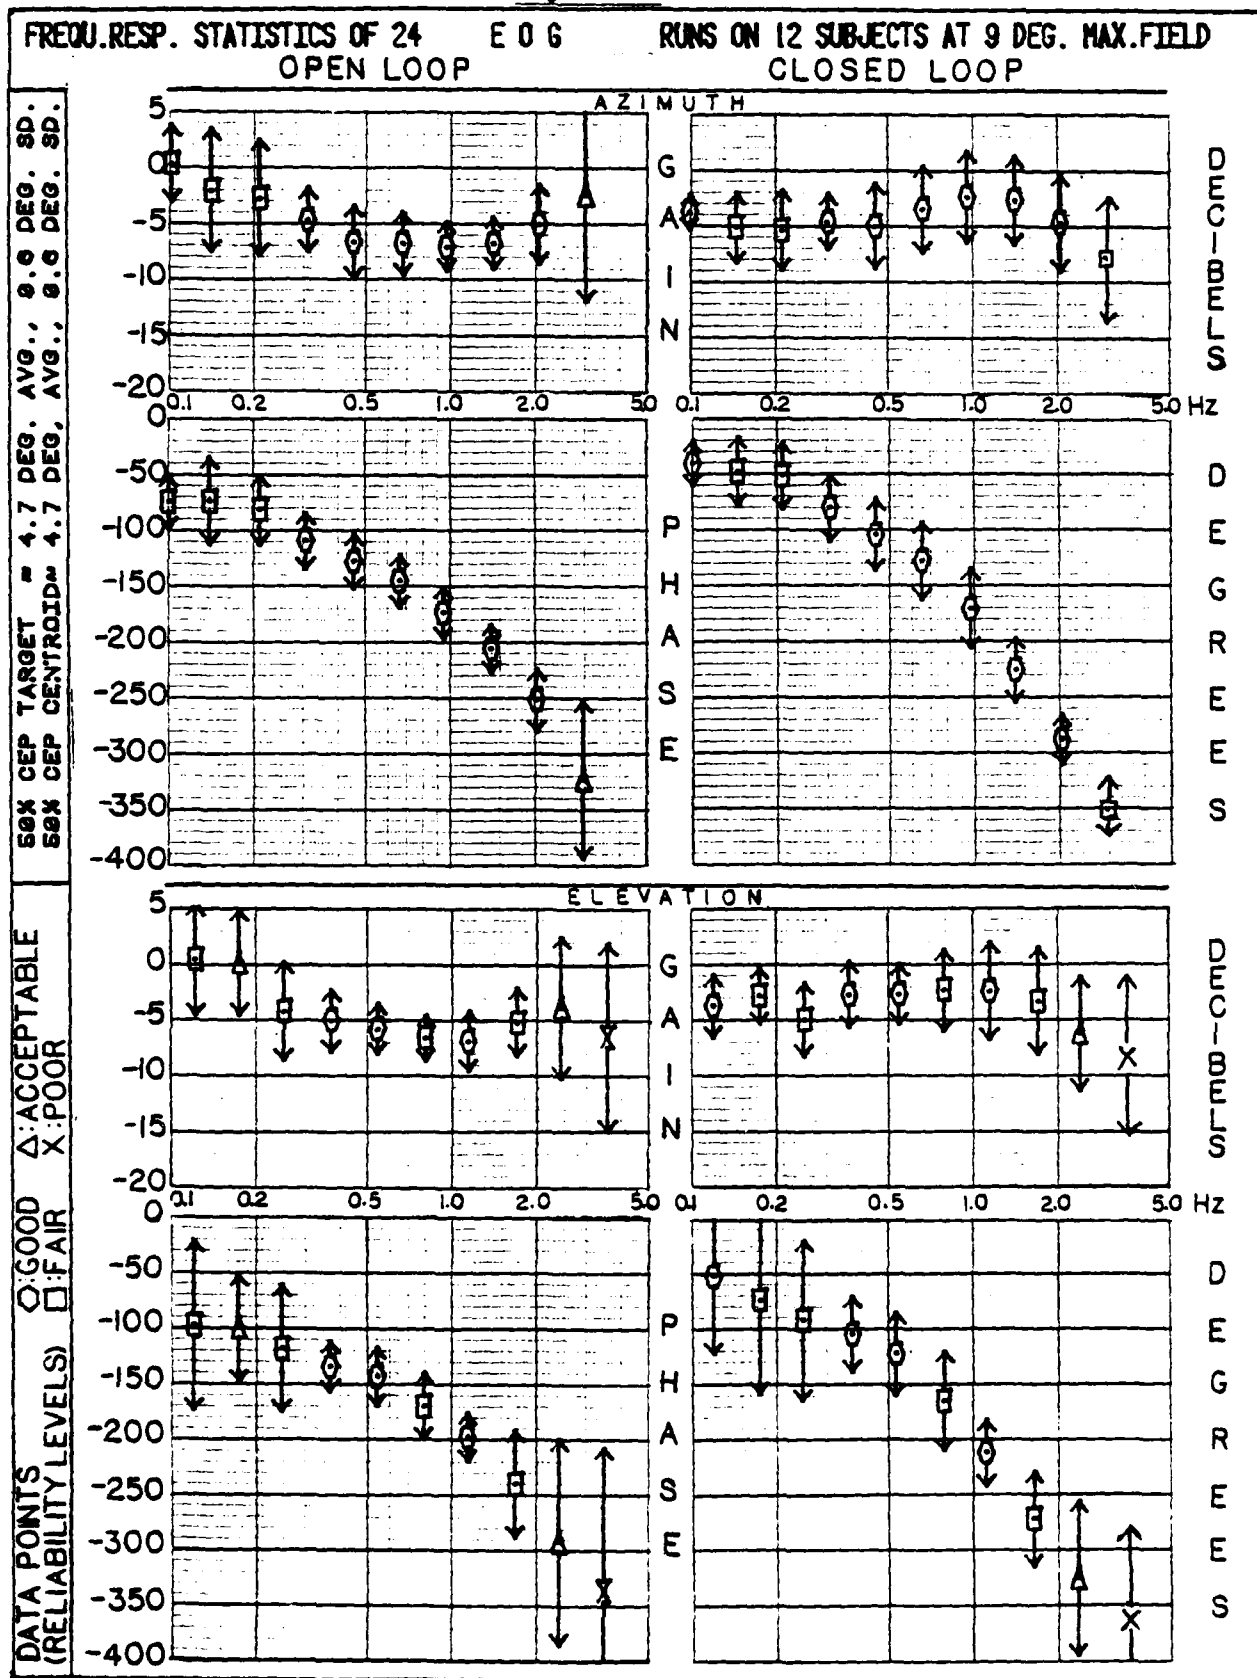


Figure 6-3



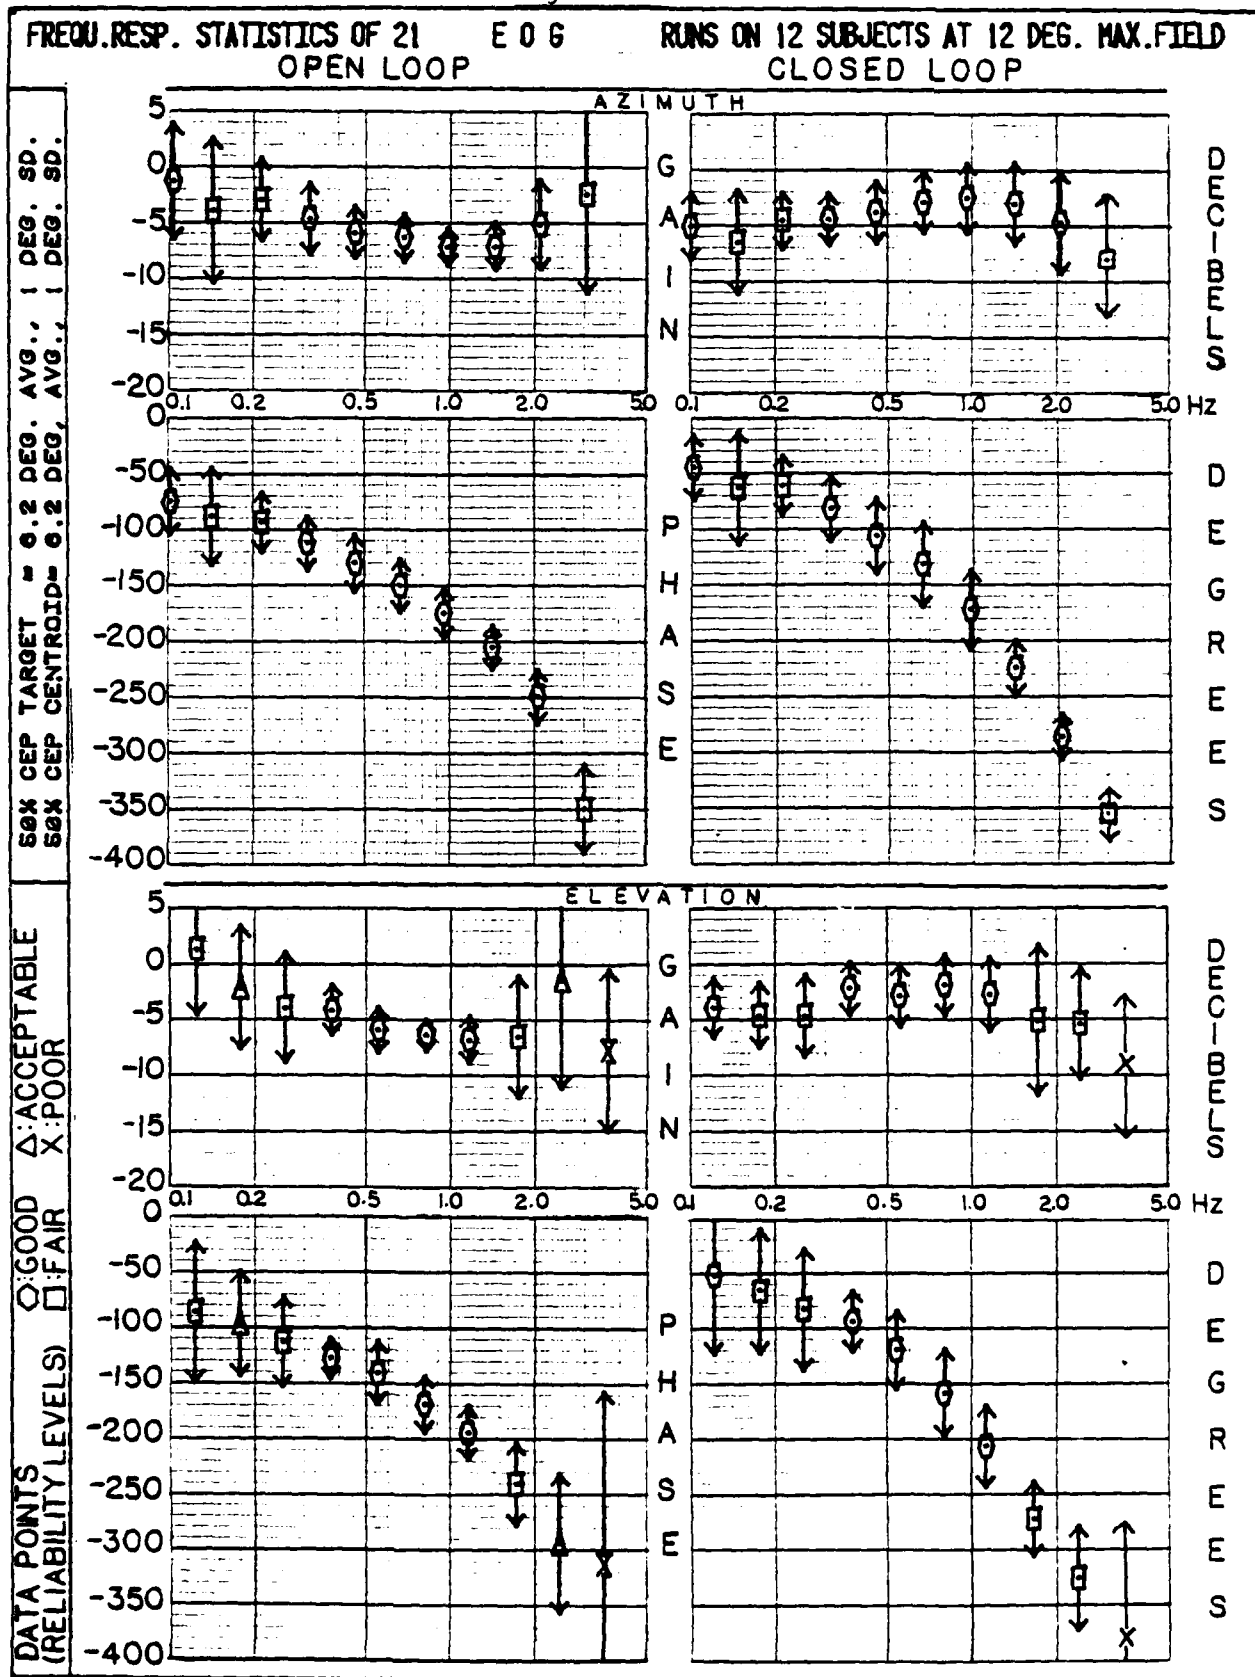


Figure 6-4

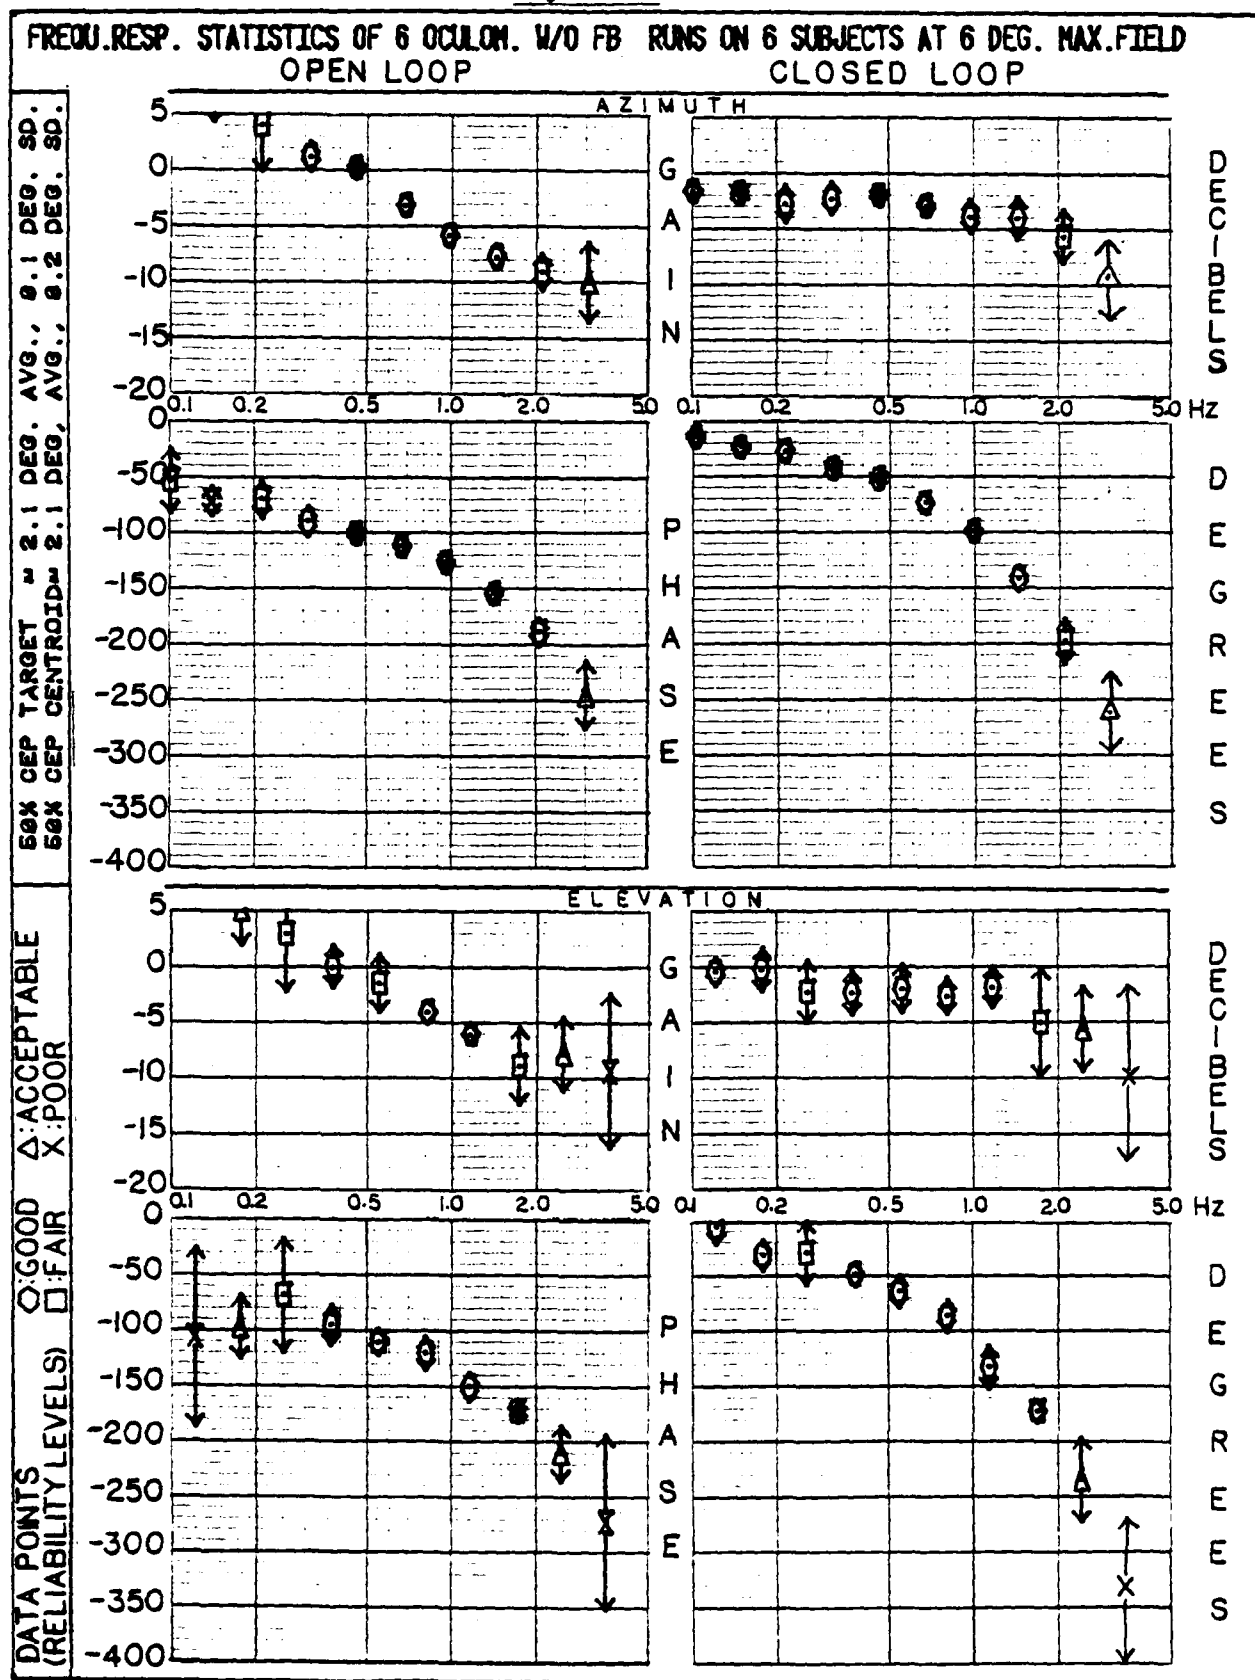

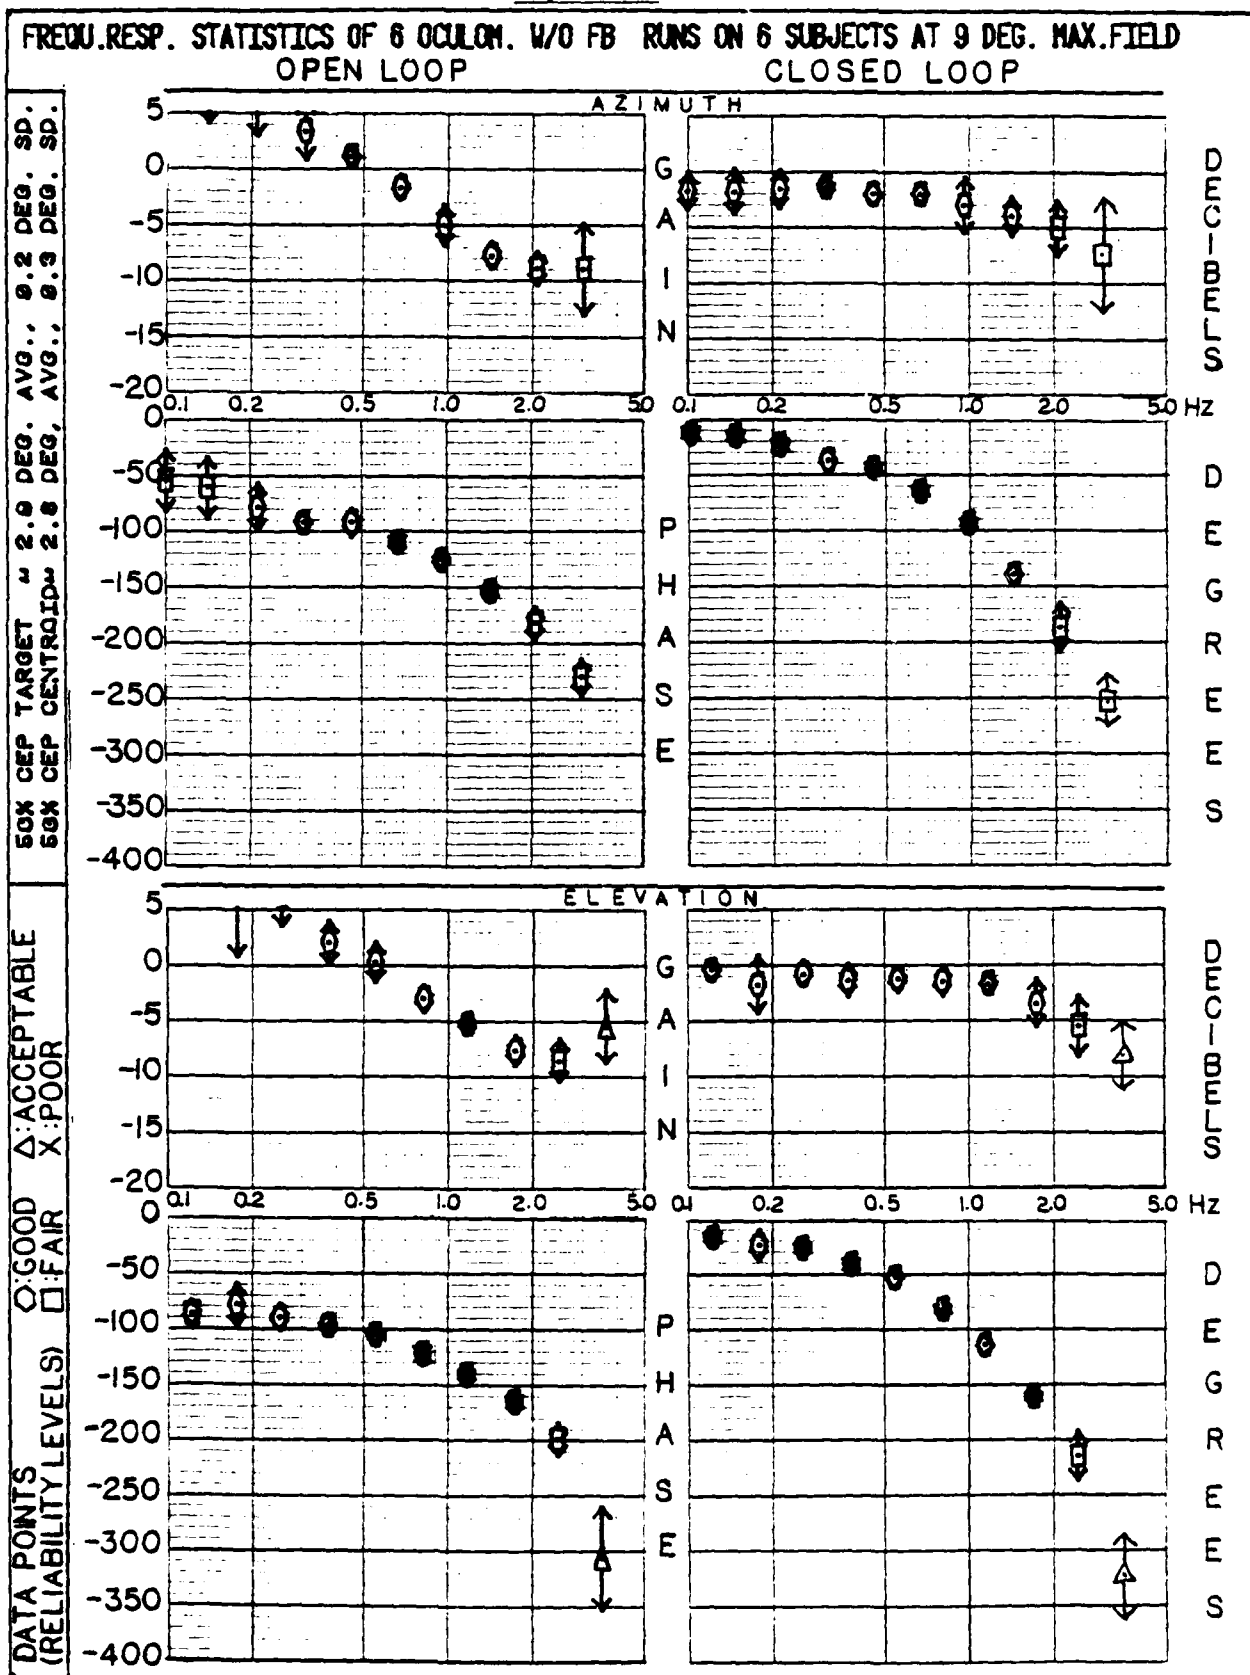

[illegible]

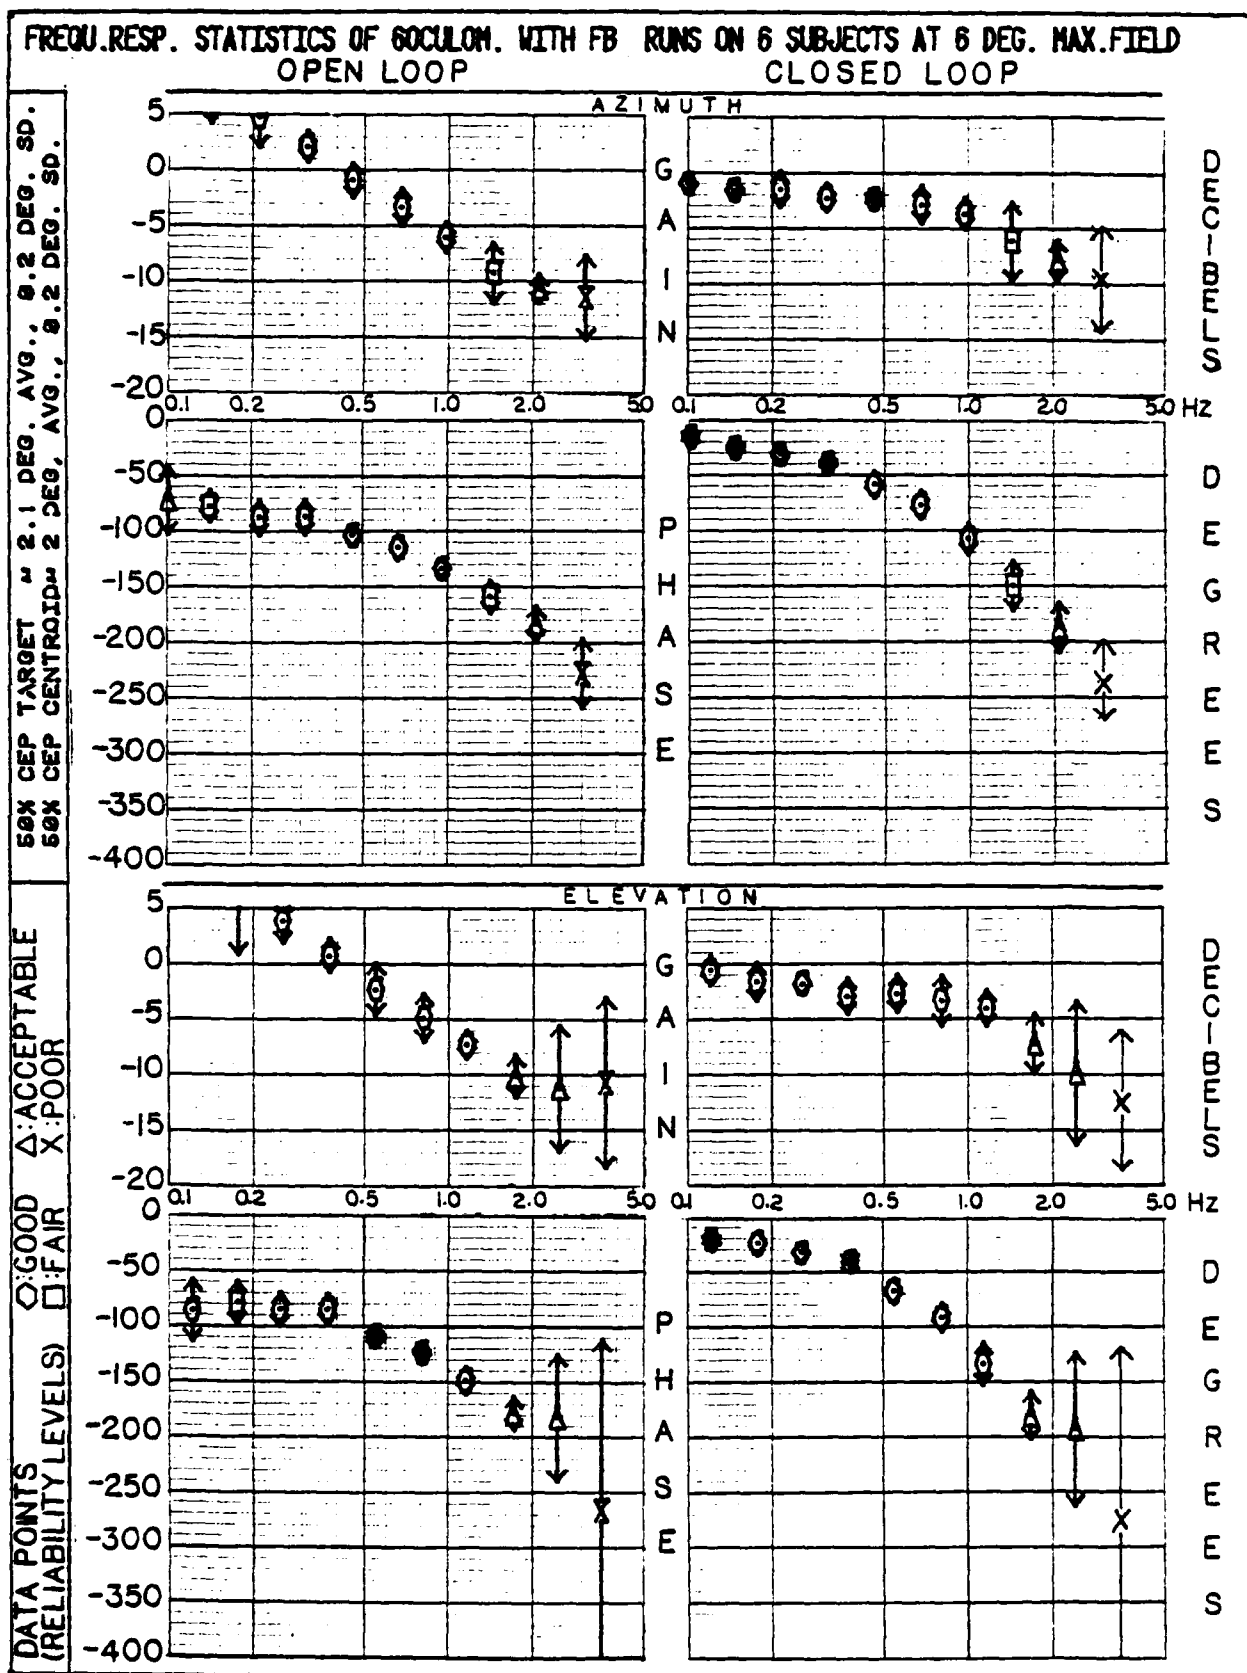


Figure 6-8

FREQ. RESP. STATISTICS OF 60CULOM. WITH FB RUNS ON 6 SUBJECTS AT 9 DEG. MAX. FIELD
OPEN LOOP CLOSED LOOP


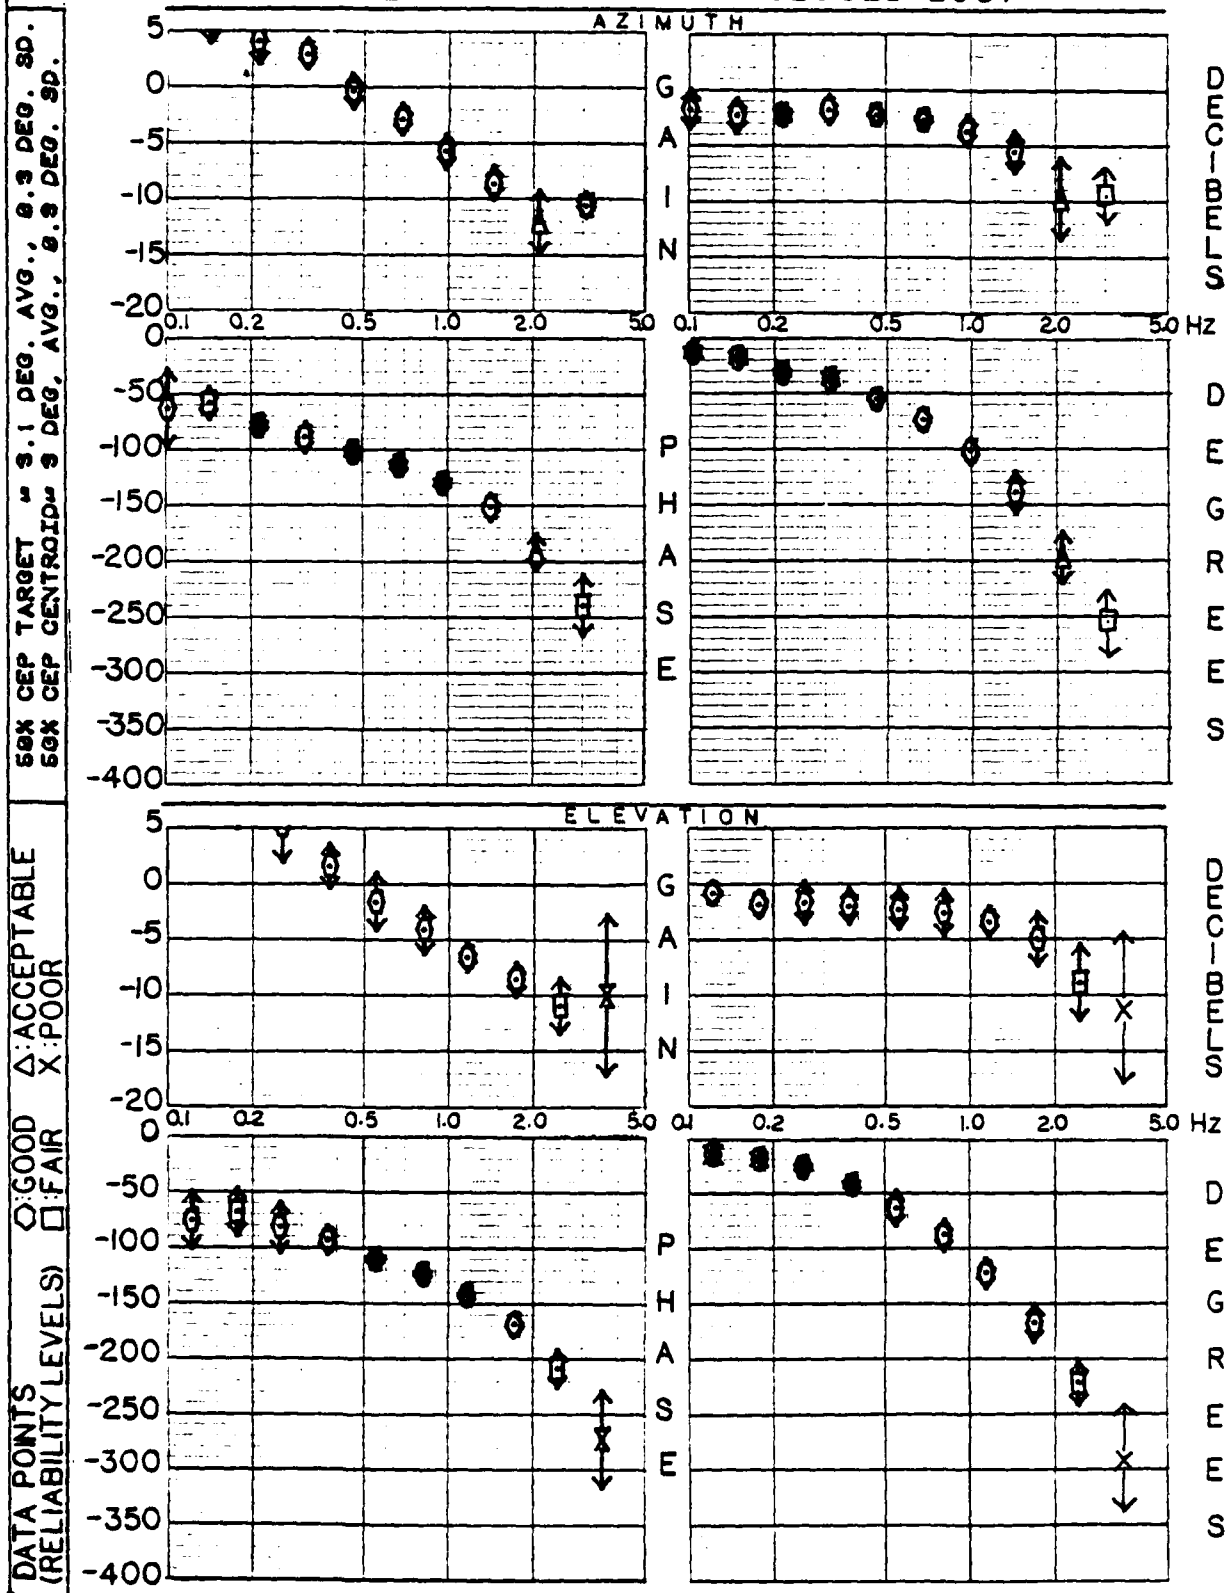


Figure 6-9

FREQ. RESP. STATISTICS OF 60CULOM. WITH FB RUNS ON 6 SUBJECTS AT 12 DEG. MAX. FIELD
OPEN LOOP CLOSED LOOP

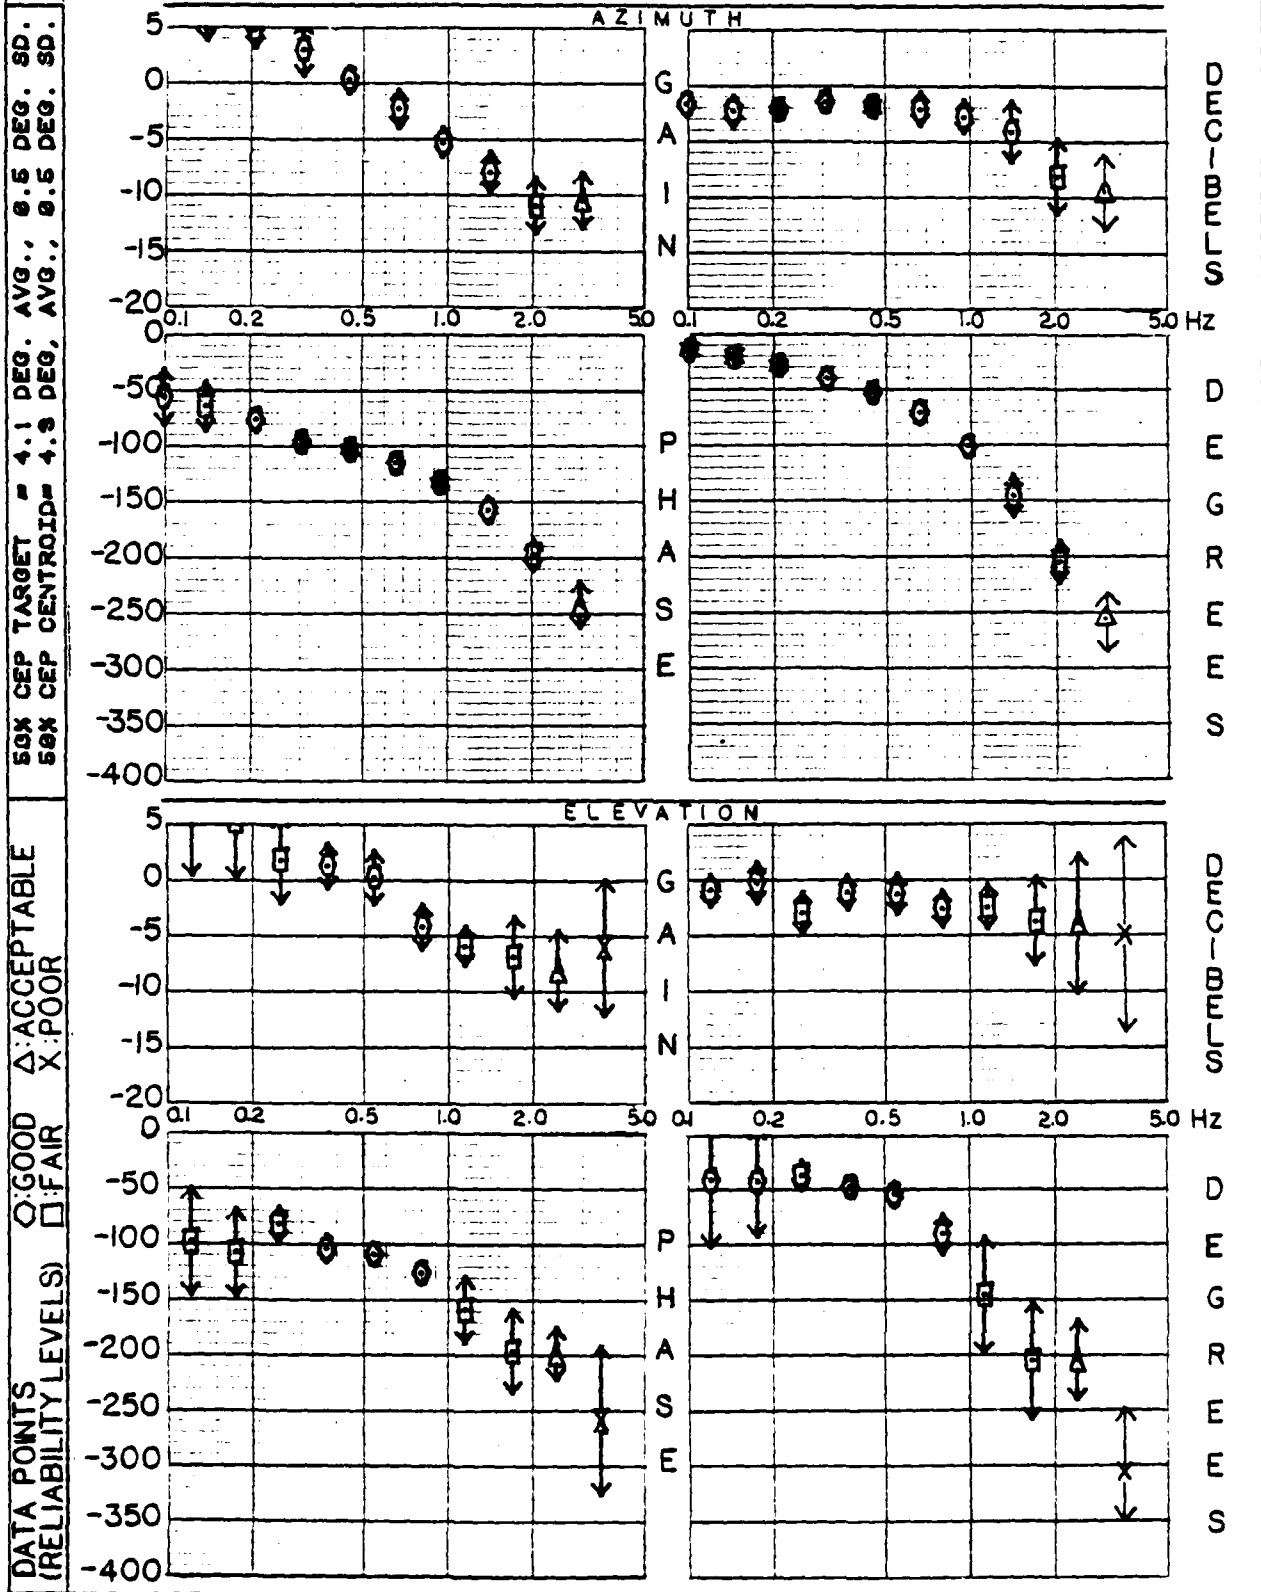

7. DESCRIBING FUNCTION MODELS

From examination of the closed-loop frequency response results presented in Figures 6-1 to 6-9, the following linear models for the (closed-loop) transfer function between target angle (input) and control angle (output) have been chosen:

$$G(s) = \frac{K(1 - s/A)e^{-sT}}{(1 + s/B)(1 + s/C)} \quad \text{for EOG tracking} \quad (7-1)$$

$$G(s) = \frac{K e^{-sT}}{(1 + s/A)} \quad \text{for oculometer tracking} \quad (7-2)$$

The parameter identification was performed from the averaged describing functions presented in Figures 6-1 to 6-9. They represent a total of 69 EOG runs and 36 oculometer runs on Subjects 3 through 14, all with forcing functions of 0.8 Hertz bandwidth, averaged in appropriate groups.

The results are presented in Tables 7-1 to 7-3. They are also presented in Figures 7-1(a) to 7-9(b) which show plots of the frequency responses of the models, together with the averaged measured frequency response points and their standard deviation ranges. Note that in all cases, the model response lies well within the standard deviation range of the measured data.

The parameter identification was carried out by means of a Gauss-Newton nonlinear least-square fit program. A two-step approach was used to first identify the parameters K, A, B, C (for the EOG model); or K, A (for the oculometer model) to fit the gain function and then to obtain the time-delay T from the phase function. The minimized root-mean-square difference between (average) measured and model data

are included in Tables 7-1 to 7-3, in a form suitable to serve as a measure of quality of the fit. They are presented, as " ϵ_{fit} ", both with respect to gain and phase.

TABLE 7-1:

SUMMARY OF MODEL PARAMETERS

$$E O G \text{ Closed Loop Tracking Model: } G(s) = \frac{(1 - s/A) K e^{-sT}}{(1 + s/B)(1 + s/C)}$$

Maximum Field (degrees)	AZIMUTH					ELEVATION					No. of Subjects	No. of Runs		
	K	A	B	C	T	K	A	B	C	T				
6	0.658	3.604	7.044	7.990	0.131	0.617	1.872	2.602	15.61	0.112	12	24		
9	0.553	3.384	8.033	7.634	0.134	0.598	1.746	2.542	11.90	0.102	12	24		
12	0.512	2.427	6.276	6.874	0.108	0.563	2.002	3.628	8.750	0.105	12	21		
Fit Based on	GAIN					PHASE					GAIN		PHASE	
2 fit for	6°	-25.34 dB			12.24°			-25.98 dB			13.51°			
	9°	-26.00 dB			7.95°			-26.00 dB			15.00°			
	12°	-30.47 dB			14.05°			-26.54 dB			15.26°			

$$\delta_{fit} = \left\{ \begin{array}{l} 20 \log \sqrt{\frac{1}{10} \sum_{i=1}^{10} [G_i - G_{i,model}(f_i, \text{Parameters})]^2} \quad [\text{decibels}] \\ \sqrt{\frac{1}{10} \sum_{i=1}^{10} [P_i - P_{i,model}(f_i, \text{Parameters})]^2} \quad [\text{degrees}] \end{array} \right.$$

Where: G_i and P_i are averaged gain and phase respectively; obtained from measured data at frequency f_i .

$G_{i,model}$ and $P_{i,model}$ are gain and phase of model for frequency f_i .

SUMMARY OF MODEL PARAMETERS

TABLE 7-2:

Oculometer Without Feedback Closed Loop Tracking Model: $G(s) = \frac{Ke^{-sT}}{(1 + s/A)}$

Maximum Field (degrees)	AZIMUTH			ELEVATION			No. of Subjects	No. of Runs
	K	A	T	K	A	T		
6	0.793	9.928	0.191	0.864	10.501	0.206	6	6
9	0.823	11.076	0.184	0.894	11.334	0.194	6	6
12	0.848	12.115	0.118	0.903	13.279	0.193	6	6
Fit Based on	GAIN			PHASE			GAIN	
							PHASE	
2 fit for *	6°	-29.03 dB	4.63°	-23.20 dB	6.74°			
	9°	-35.22 dB	3.43°	-28.38 dB	5.40°			
	12°	-34.78 dB	1.77°	-31.83 dB	2.01°			

$$\left\{ \begin{aligned} &20 \log \sqrt{\frac{1}{10} \sum_{i=1}^{10} [G_i - G_{i,model}(f_i, \text{Parameters})]^2} \quad [\text{decibels}] \\ &\sqrt{\frac{1}{10} \sum_{i=1}^{10} [P_i - P_{i,model}(f_i, \text{Parameters})]^2} \quad [\text{degrees}] \end{aligned} \right.$$

Where: G_i and P_i are averaged gain and phase respectively; obtained from measured data at frequency f_i .

$G_{i,model}$ and $P_{i,model}$ are gain and phase of model for frequency f_i .

SUMMARY OF MODEL PARAMETERS

TABLE 7-3:

Oculometer With Feedback Closed Loop Tracking Model: $G(s) = \frac{K e^{-sT}}{(1 + s/A)}$

Maximum Field (degrees)	AZIMUTH			ELEVATION			No. of Subjects	No. of Runs
	K	A	T	K	A	T		
6	0.856	6.832	0.166	0.847	6.705	0.161	6	6
9	0.820	7.381	0.175	0.848	8.527	0.177	6	6
12	0.843	8.617	0.186	0.853	17.606	0.208	6	6
Fit Based on	GAIN		PHASE		GAIN		PHASE	
	6°		6.24°		-27.46 dB		11.78°	
	9°		2.96°		-29.83 dB		4.56°	
	12°		4.26°		-22.70 dB		24.81°	


$$\delta_{fit}^* = \left\{ \begin{array}{l} 20 \log \sqrt{\frac{1}{10} \sum_{i=1}^{10} [G_i - G_{i,model}(f_i, Parameters)]^2} \quad [\text{decibels}] \\ \sqrt{\frac{1}{10} \sum_{i=1}^{10} [P_i - P_{i,model}(f_i, Parameters)]^2} \quad [\text{degrees}] \end{array} \right.$$

Where: G_i and P_i are averaged gain and phase respectively; obtained from measured data at frequency f_i .


$G_{i,model}$ and $P_{i,model}$ are gain and phase of model for frequency f_i .

Figure 7-1 (a)

E O G
AZIMUTH CLOSED LOOP
6 Deg. Maximum Field
For 12 Subjects, 24 Runs

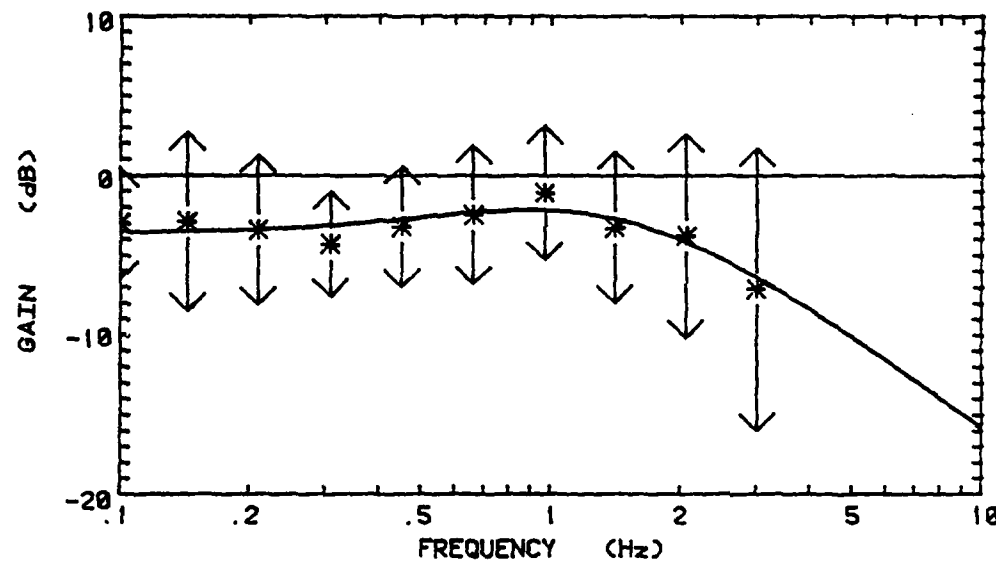

↑
=Standard
Deviation
↓
* =Averaged
Experimental
Data Points

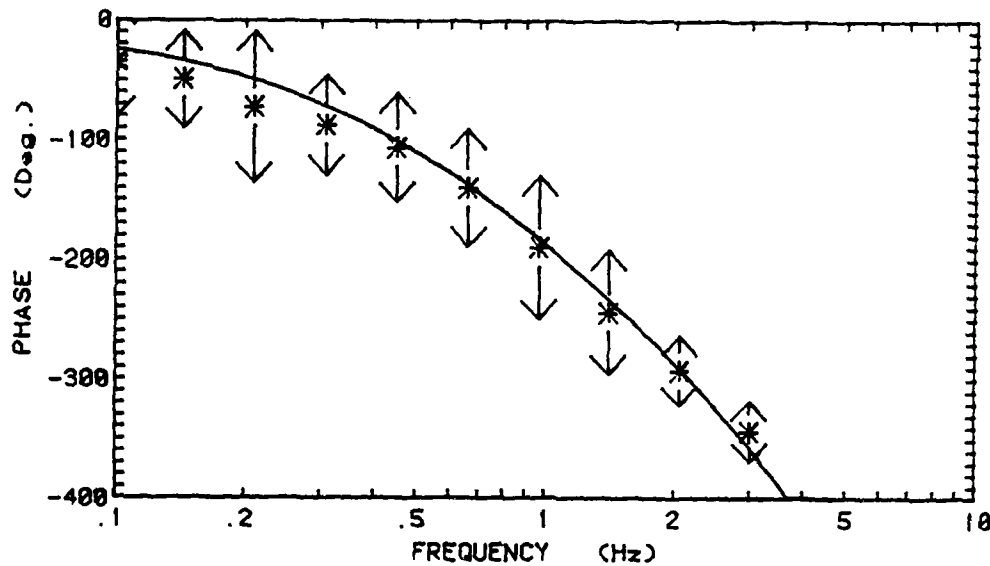

FUNCTION:


$$G(s) = \frac{(1 - s/A) K e^{-sT}}{(1 + s/B)(1 + s/C)}$$

PARAMETERS:


K = 0.658
A = (0.574)2π = 3.604
B = (0.121)2π = 0.761
C = (0.127)2π = 0.799
T = 0.131

Figure 7-1 (b)

E O G
ELEVATION CLOSED LOOP
6 Deg. Maximum Field
For 12 Subjects, 24 Runs

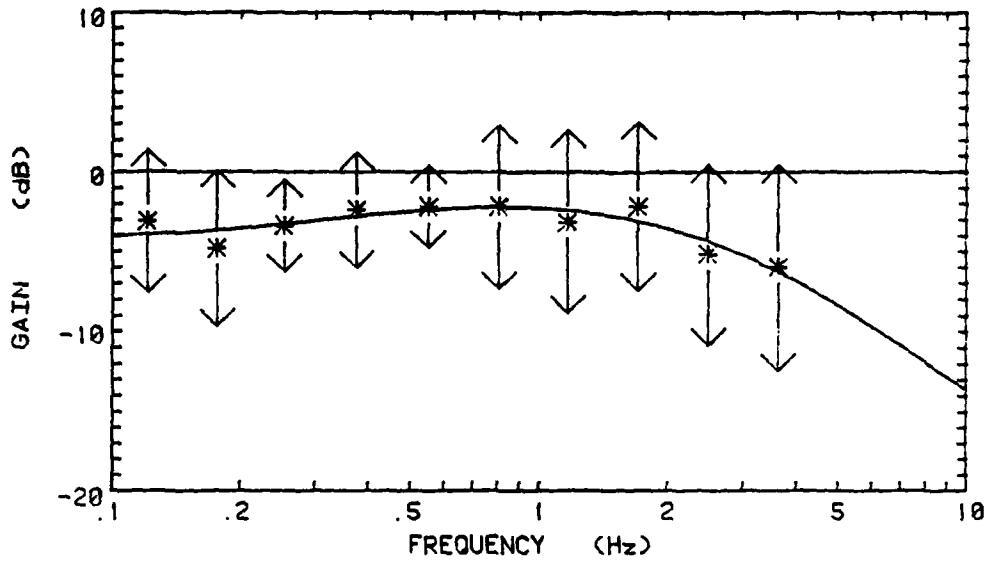

↑
=Standard
Deviation
* =Averaged
Experimental
Data Points

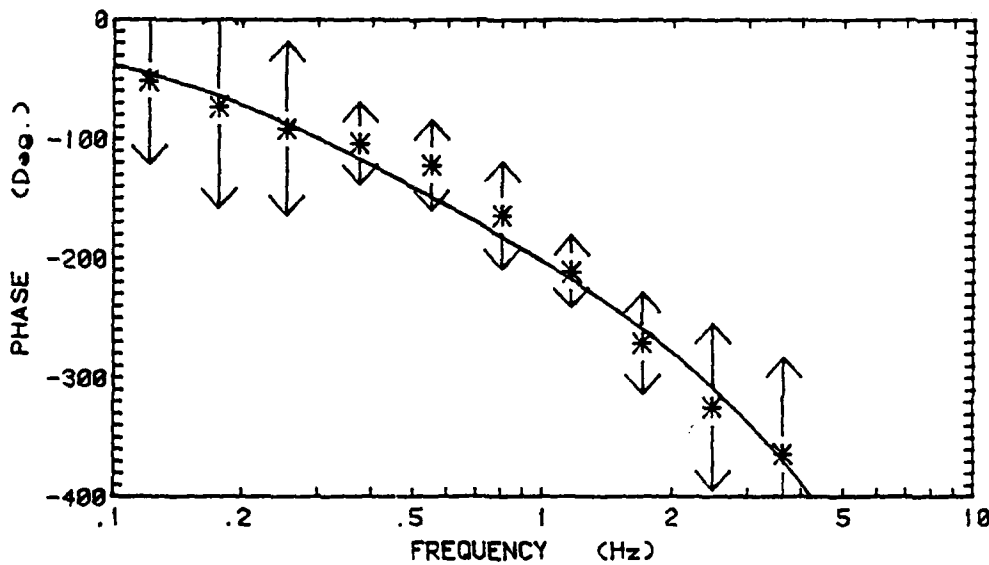

FUNCTION:


$$G(s) = \frac{(1 - s/A) K e^{-sT}}{(1 + s/B)(1 + s/C)}$$

PARAMETERS:

K= 0.617
A= (0.298)2π= 1.872
B= (0.414)2π= 2.602
C= (2.485)2π=15.614
T= 0.112


Figure 7-2 (a)

E O G
AZIMUTH CLOSED LOOP
9 Deg. Maximum Field
For 12 Subjects, 24 Runs

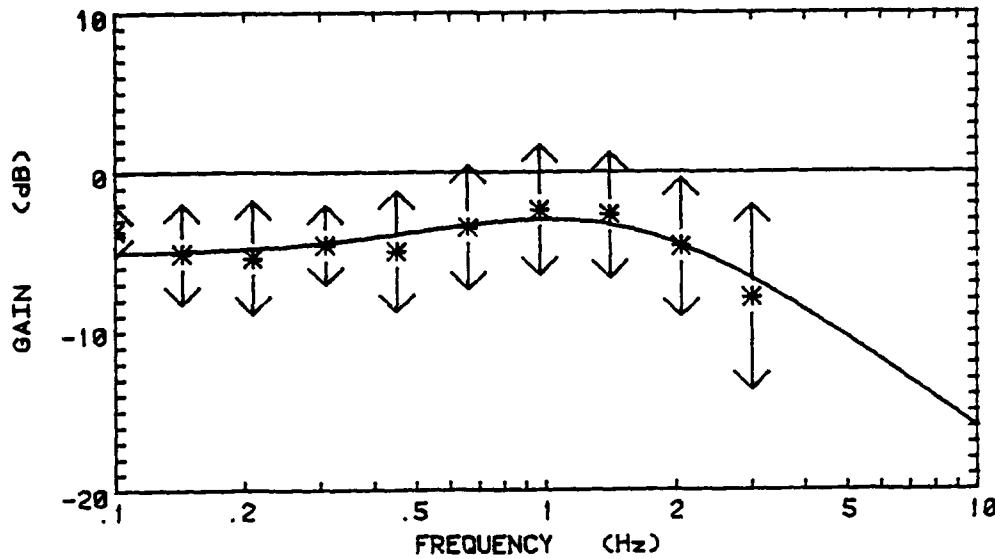

↑
= Standard
↓
Deviation

*
= Averaged
Experimental
Data Points

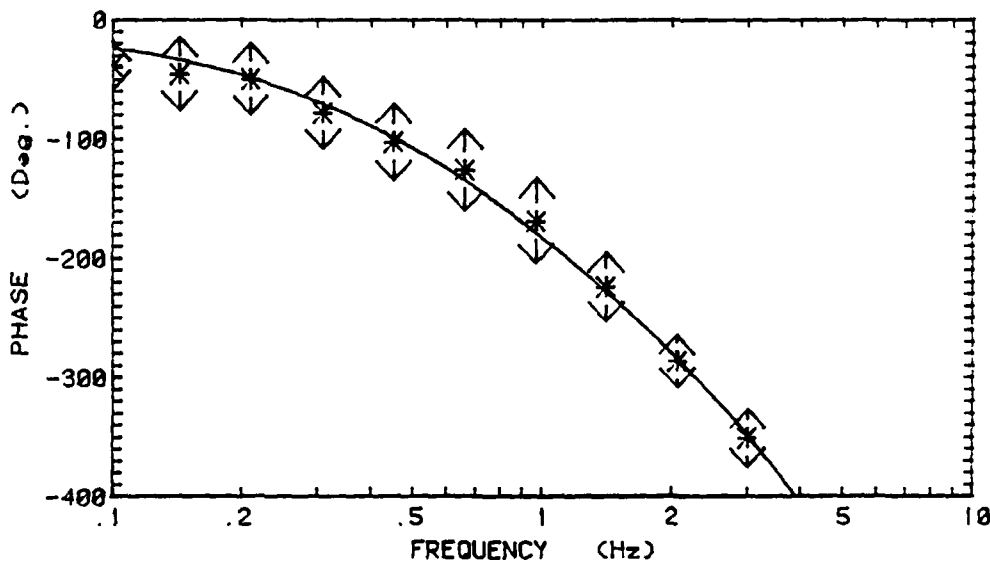

FUNCTION:


$$G(s) = \frac{(1 - s/A) K e^{-sT}}{(1 + s/B)(1 + s/C)}$$

PARAMETERS:

K = 0.553
A = (0.539)2π = 3.384
B = (1.279)2π = 8.033
C = (1.215)2π = 7.634
T = 0.124


Figure 7-2 (b)

E O G
ELEVATION CLOSED LOOP
9 Deg. Maximum Field
For 12 Subjects, 24 Runs

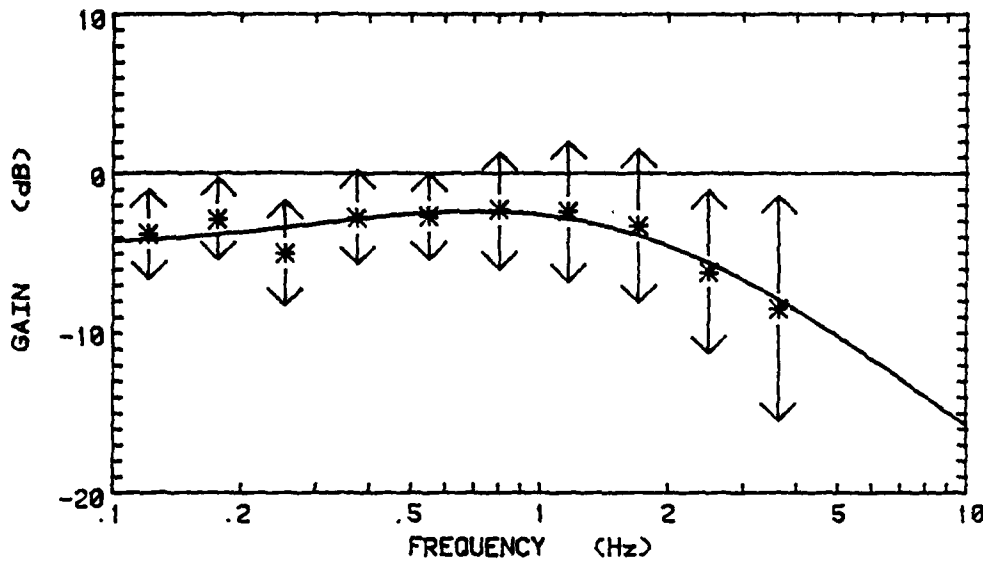

↑
=Standard
Deviation

* =Averaged
Experimental
Data Points

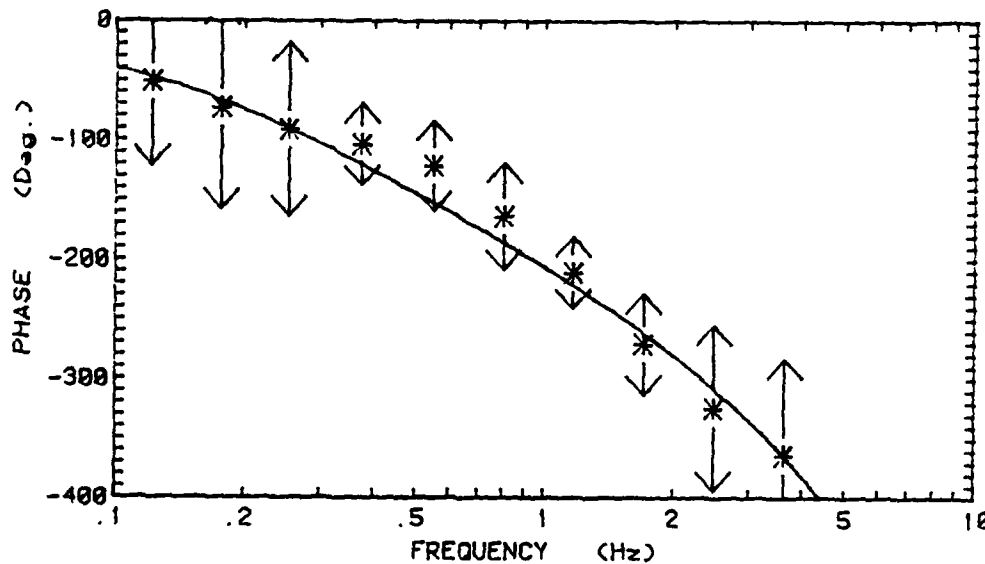

FUNCTION:


$$G(s) = \frac{(1 - s/A) K e^{-sT}}{(1 + s/B)(1 + s/C)}$$

PARAMETERS:


K = 0.598
A = (0.278)2T = 1.746
B = (0.405)2T = 2.542
C = (1.894)2T = 11.901
T = 0.102

Figure 7-3 (a)

E O G
AZIMUTH CLOSED LOOP
12 Deg. Maximum Field
For 12 Subjects, 21 Runs

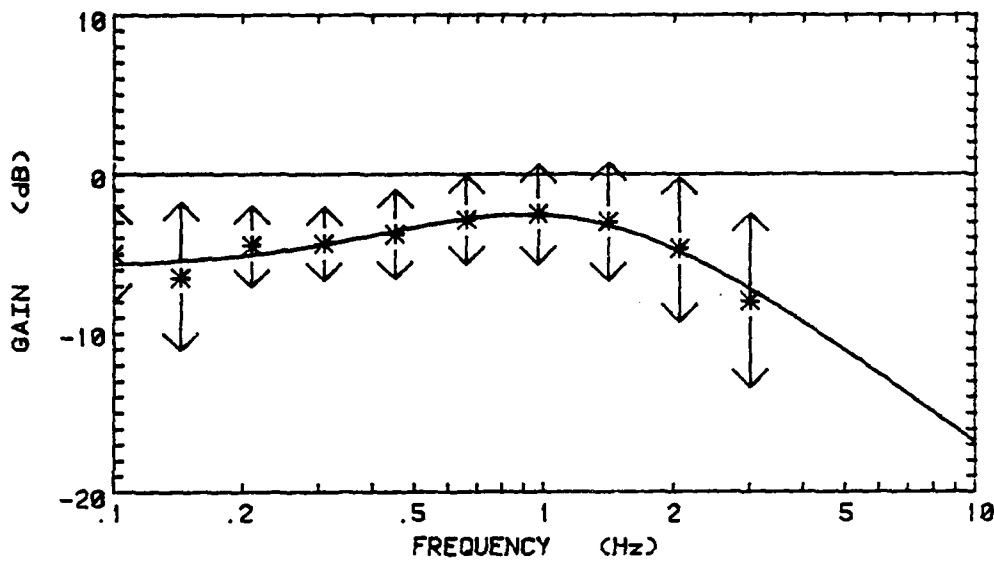

↑
=Standard
Deviation
* =Averaged
Experimental
Data Points

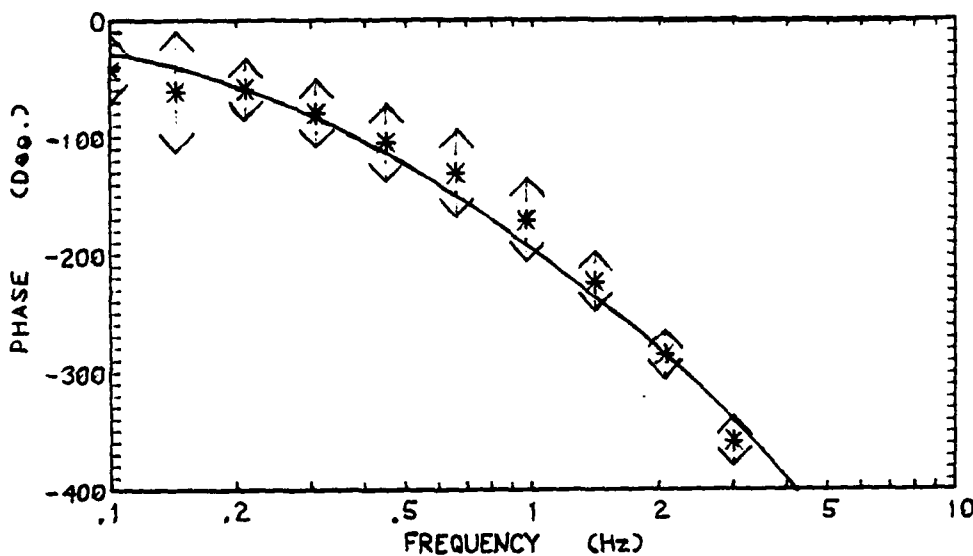


FUNCTION:

$$G(s) = \frac{(1 - s/A) K e^{-sT}}{(1 + s/B)(1 + s/C)}$$


PARAMETERS:

K = 0.512
A = (0.386)2π = 2.427
B = (0.999)2π = 6.276
C = (1.094)2π = 6.874
T = 0.108

Figure 7-3 (b)
E O G
ELEVATION CLOSED LOOP
12 Deg. Maximum Field
For 12 Subjects, 21 Runs

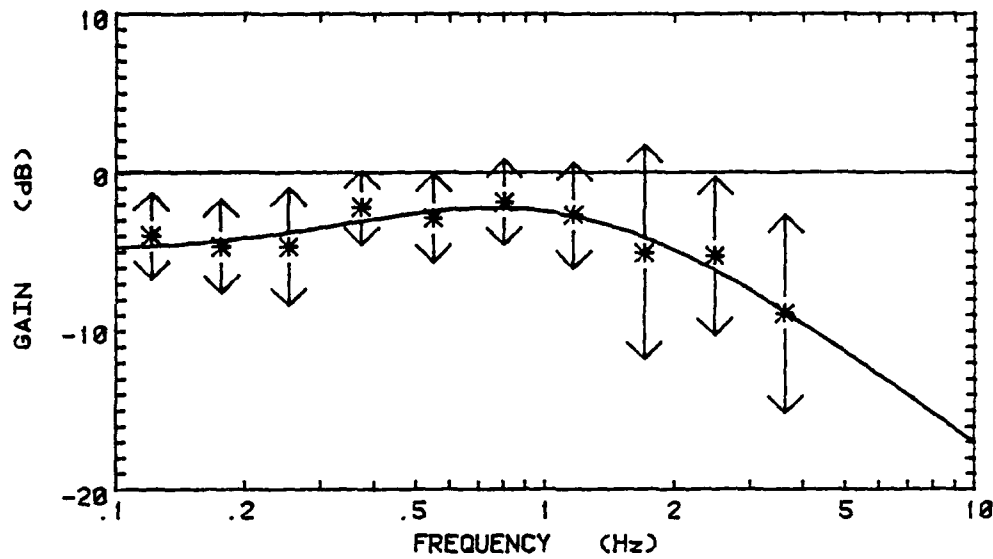

↑
= Standard
Deviation
* = Averaged
Experimental
Data Points

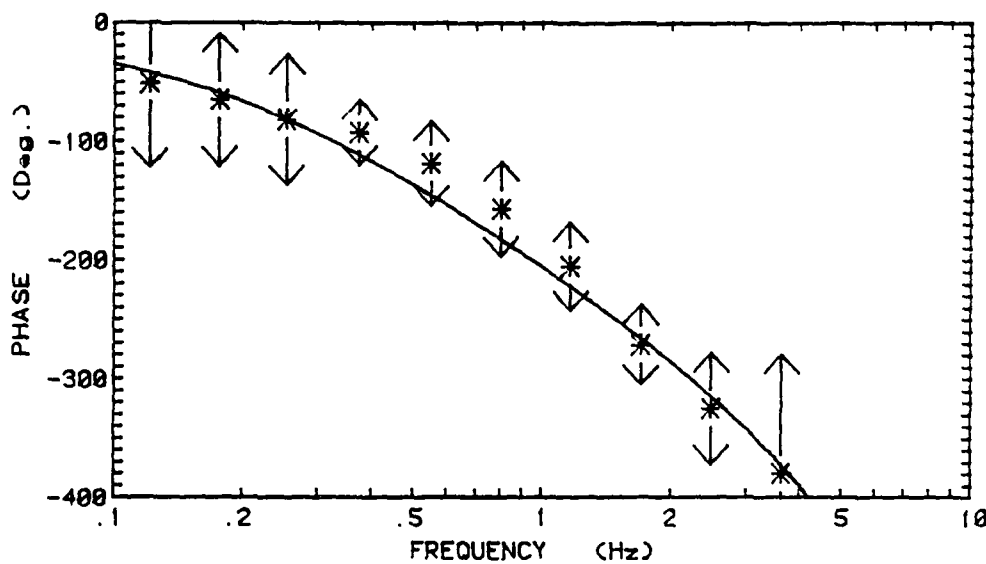

FUNCTION:


$$G(s) = \frac{(1 - s/A) K e^{-sT}}{(1 + s/B)(1 + s/C)}$$

PARAMETERS:

K = 0.563
A = (0.319)2π = 2.002
B = (0.577)2π = 3.628
C = (1.393)2π = 8.750
T = 0.105


Figure 7-4 (a)

OCCULOMETER WITHOUT FEEDBACK
AZIMUTH CLOSED LOOP
6 Deg. Maximum Field
For 6 Subjects, 6 Runs

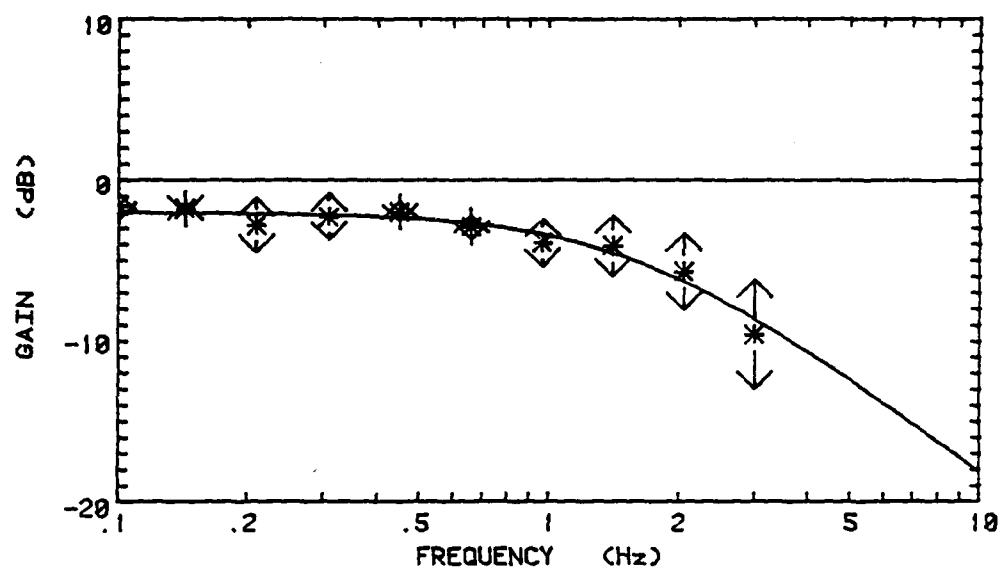

↑
= Standard
Deviation

* = Averaged
Experimental
Data Points

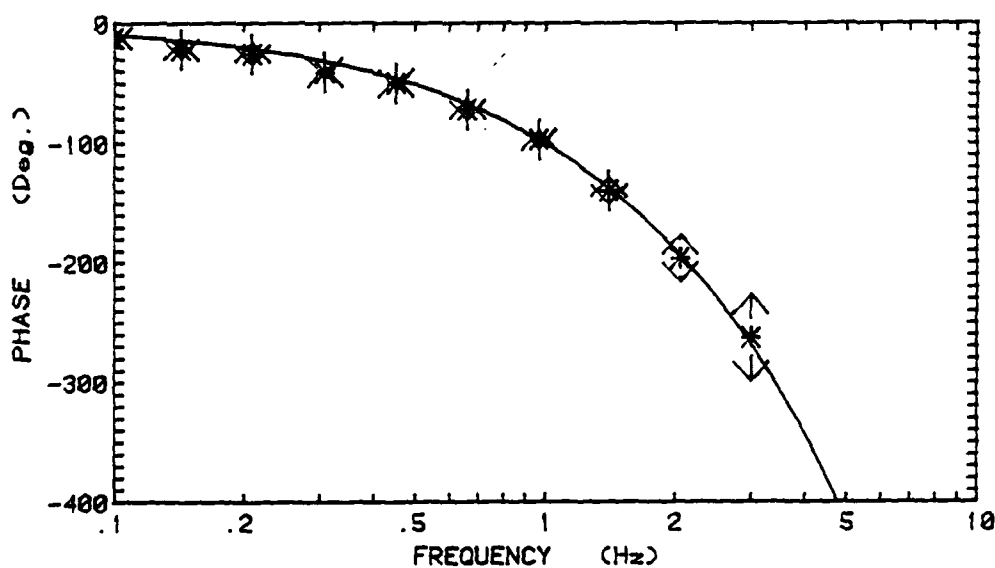


FUNCTION:

$$G(s) = \frac{K e^{-sT}}{(1 + s/A)}$$

PARAMETERS:

K = 0.793
A = (1.580)2π = 9.928
T = 0.191

Figure 7-4 (b)
 OCCULOMETER WITHOUT FEEDBACK
 ELEVATION CLOSED LOOP
 6 Deg. Maximum Field
 For 6 Subjects, 6 Runs

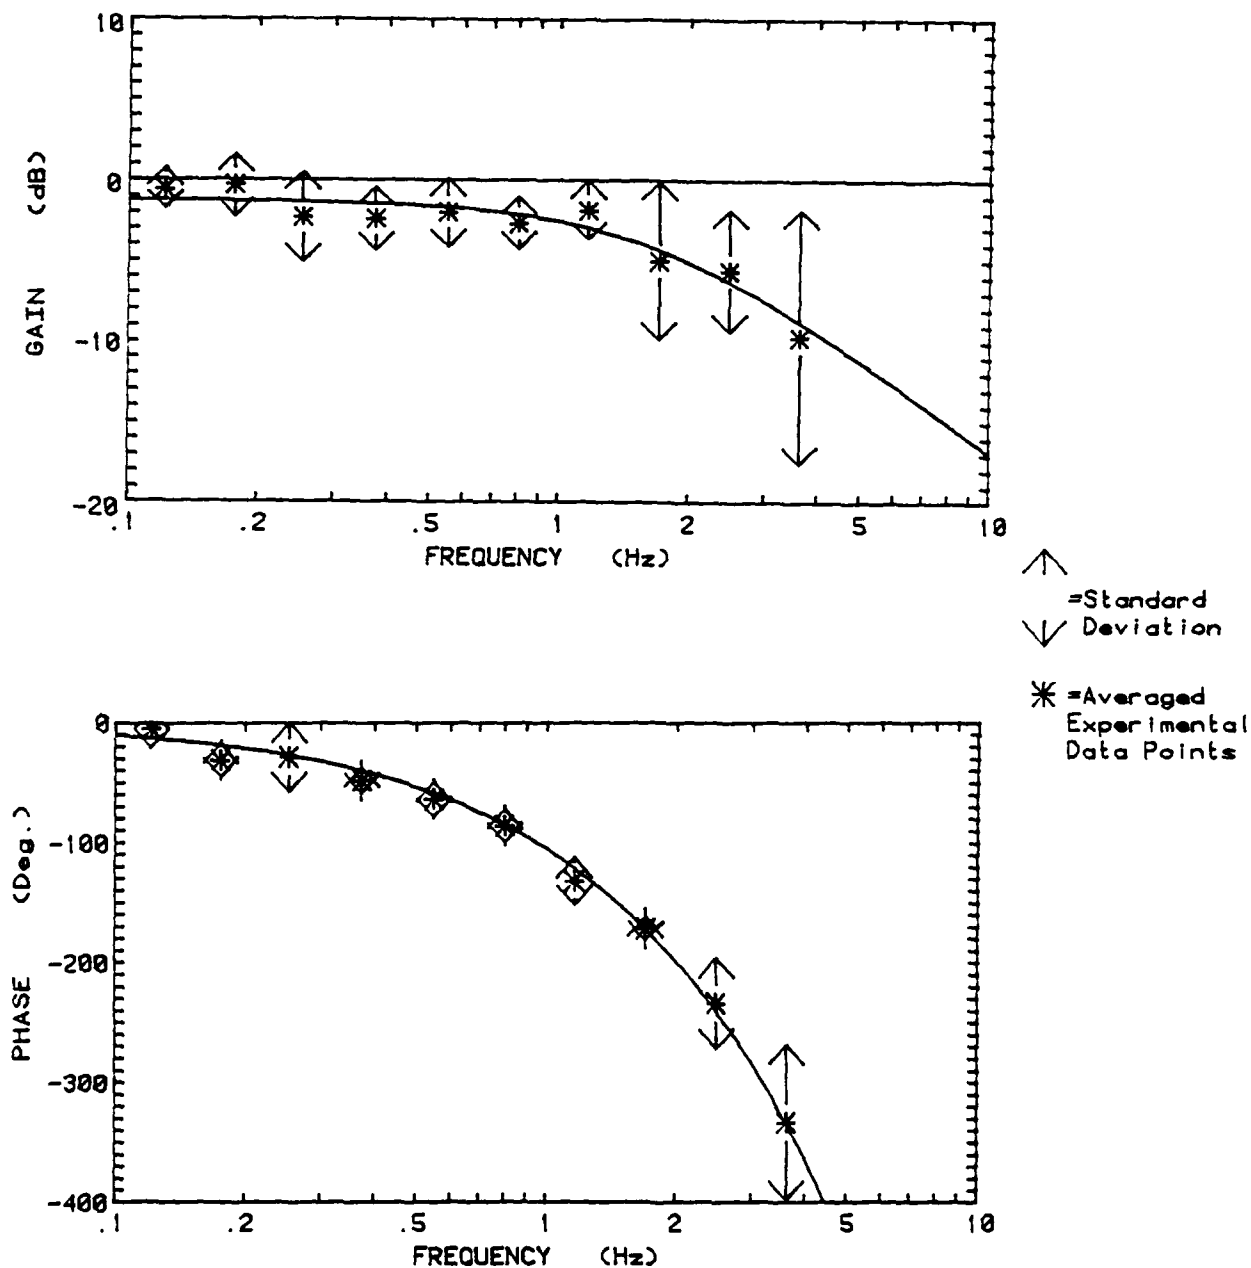

FUNCTION:


$$G(s) = \frac{K e^{-sT}}{(1 + s/A)}$$

PARAMETERS:

K = 0.864
 A = (1.671) 2π = 10.501
 T = 0.208


Figure 7-5 (a)

OCCULOMETER WITHOUT FEEDBACK
AZIMUTH CLOSED LOOP
9 Deg. Maximum Field
For 6 Subjects, 6 Runs

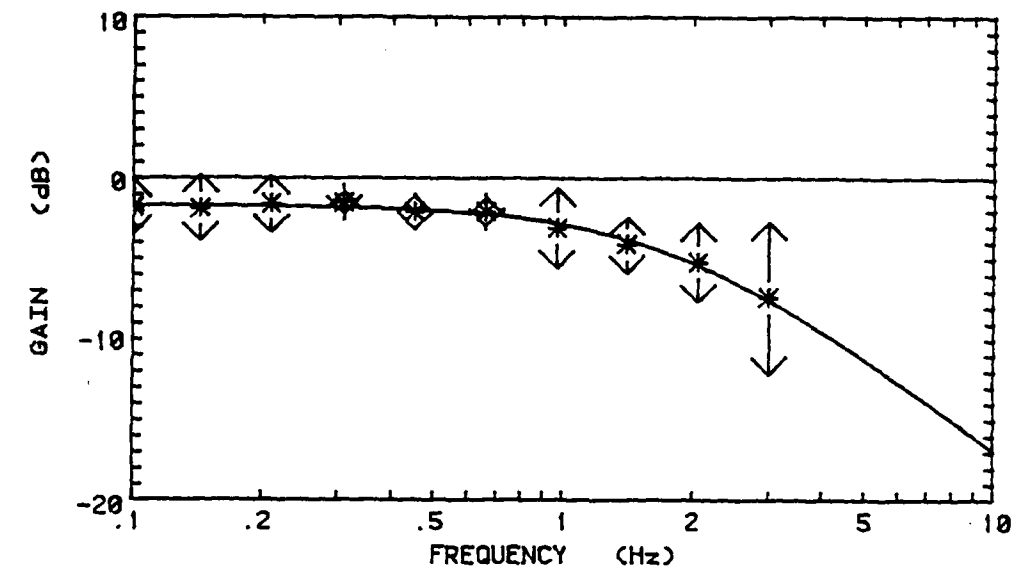

↑
=Standard
Deviation

* =Averaged
Experimental
Data Points

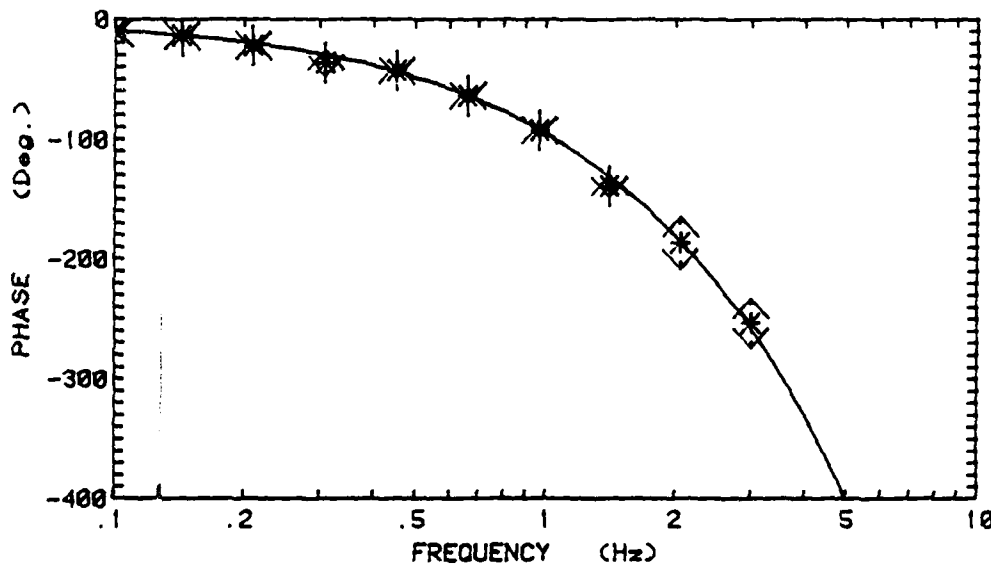

FUNCTION:


$$G(s) = \frac{K e^{-sT}}{(1 + s/A)}$$

PARAMETERS:


K = 0.823
A = (1.763)2T = 11.876
T = 0.184

Figure 7-5 (b)

OCCULOMETER WITHOUT FEEDBACK
ELEVATION CLOSED LOOP
9 Deg. Maximum Field
For 6 Subjects, 6 Runs

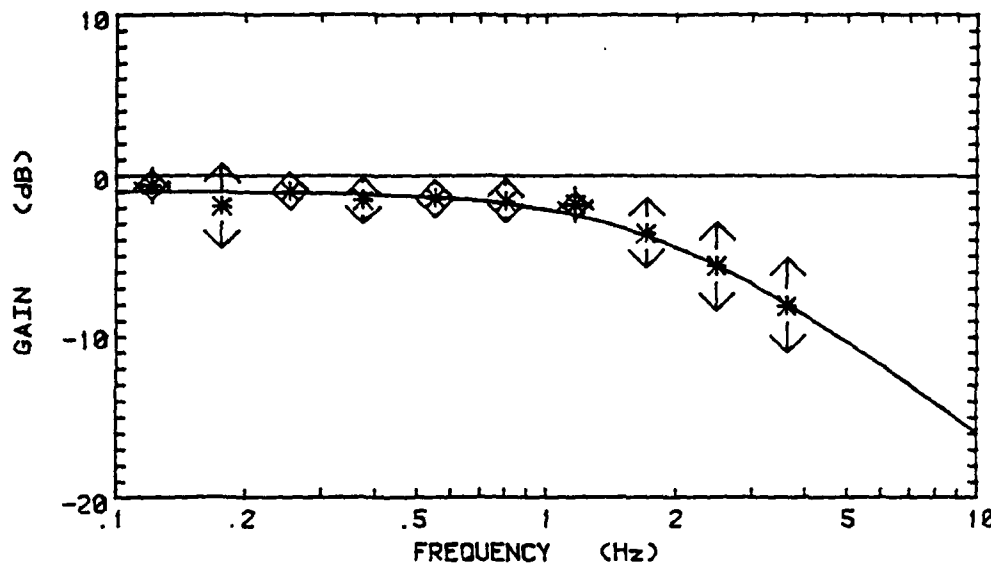

↑
=Standard
Deviation
* =Averaged
Experimental
Data Points

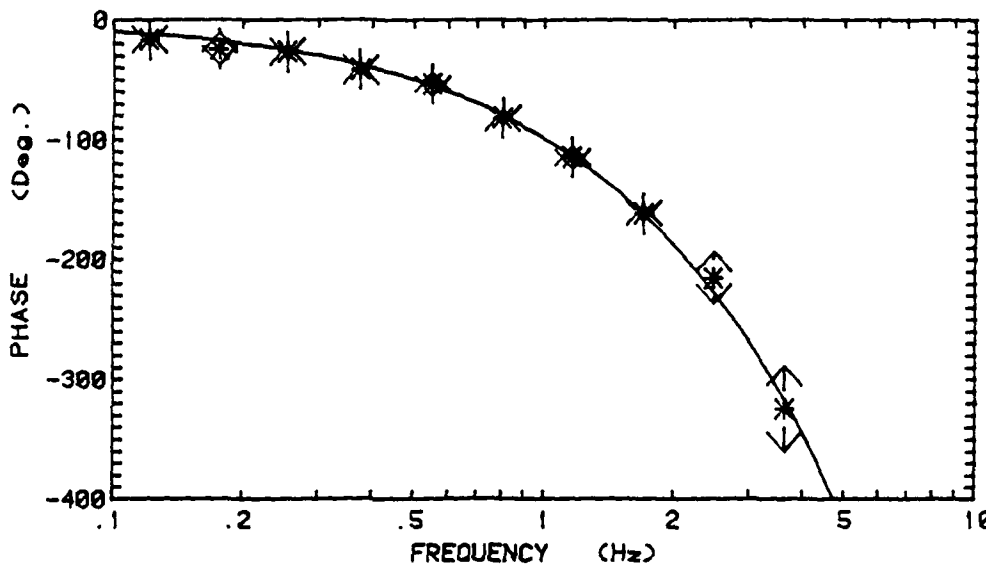

FUNCTION:

$$G(s) = \frac{K e^{-sT}}{(1 + s/A)}$$


PARAMETERS:

K = 0.894
A = (1.884)2π = 11.334
T = 0.194

-37-


Figure 7-6 (a)

OCCULOMETER WITHOUT FEEDBACK
AZIMUTH CLOSED LOOP
12 Deg. Maximum Field
For 6 Subjects, 6 Runs

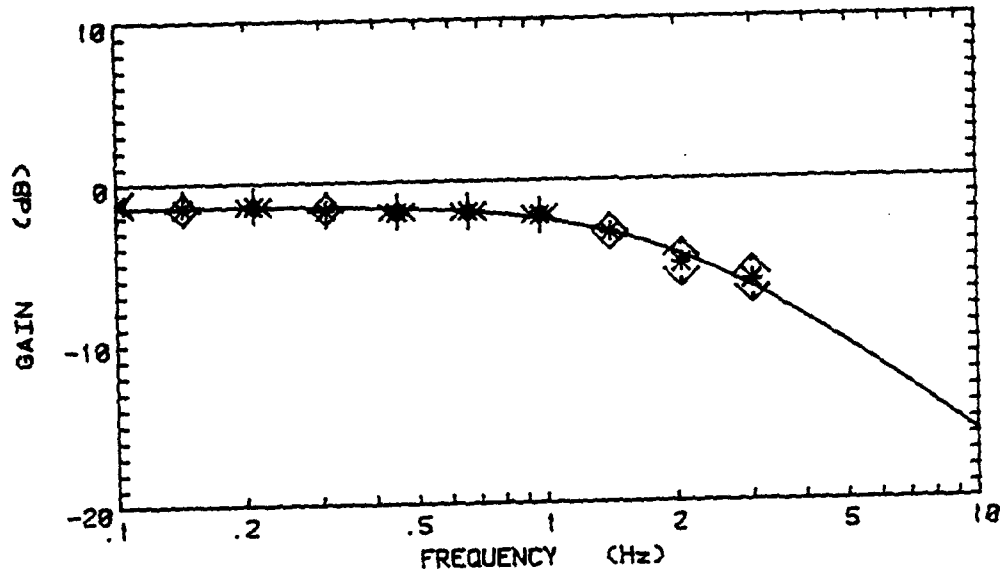

↑ = Standard Deviation
↓ = Standard Deviation

* = Averaged Experimental Data Points

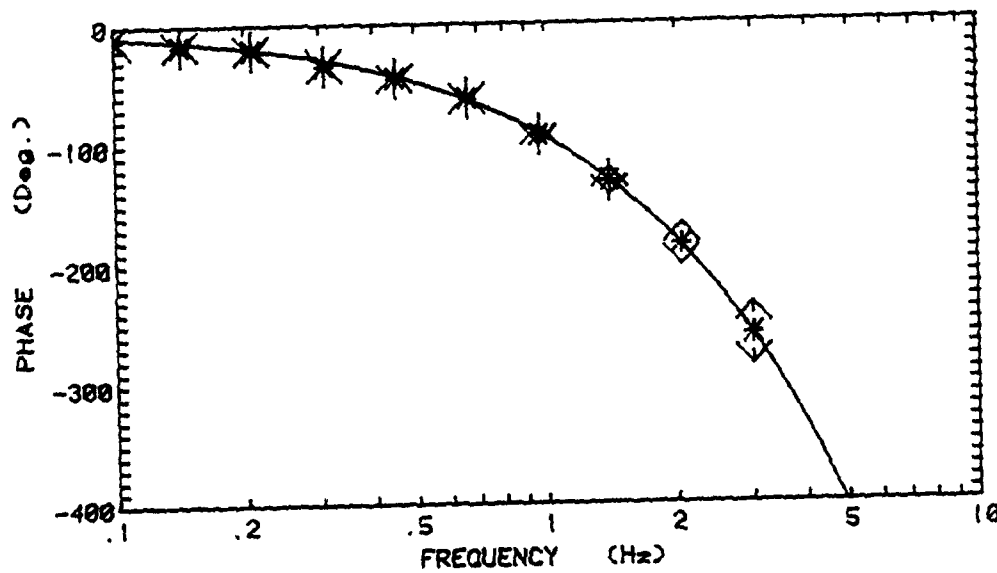

FUNCTION:


$$G(s) = \frac{K e^{-sT}}{(1 + s/A)}$$

PARAMETERS:

K = 0.848
A = (1.928)2π = 12.115
T = 0.188


Figure 7-6 (b)

OCCULOMETER WITHOUT FEEDBACK
ELEVATION CLOSED LOOP
12 Deg. Maximum Field
For 6 Subjects, 6 Runs

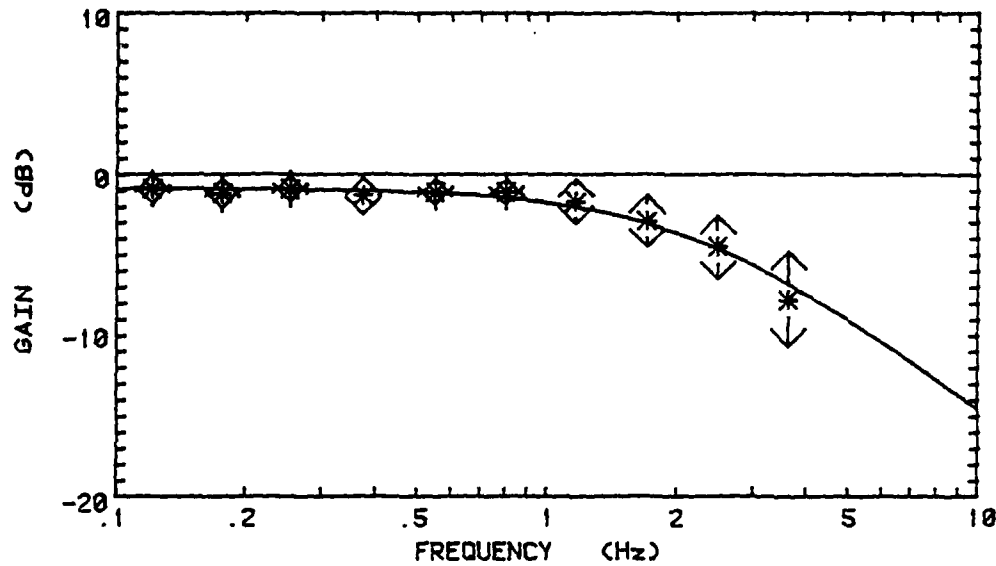

↑
=Standard
↓ Deviation

* =Averaged
Experimental
Data Points

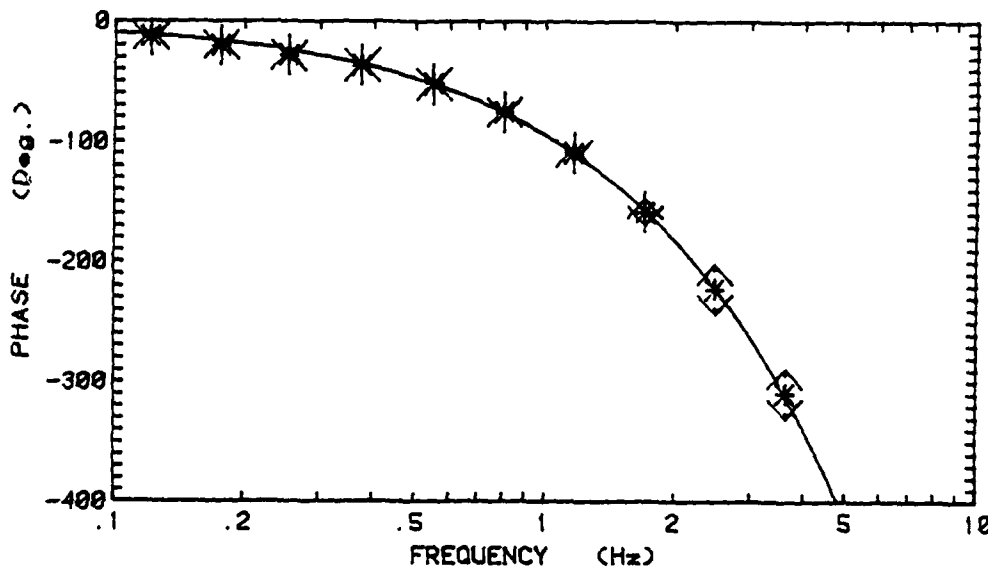


FUNCTION:

$$G(s) = \frac{K e^{-sT}}{(1 + s/A)}$$


PARAMETERS:

K = 3.903
A = (2.113)2π = 13.279
T = 0.193

Figure 7-7 (a)
 OCCULOMETER WITH FEEDBACK
 AZIMUTH CLOSED LOOP
 6 Deg. Maximum Field
 For 6 Subjects, 6 Runs

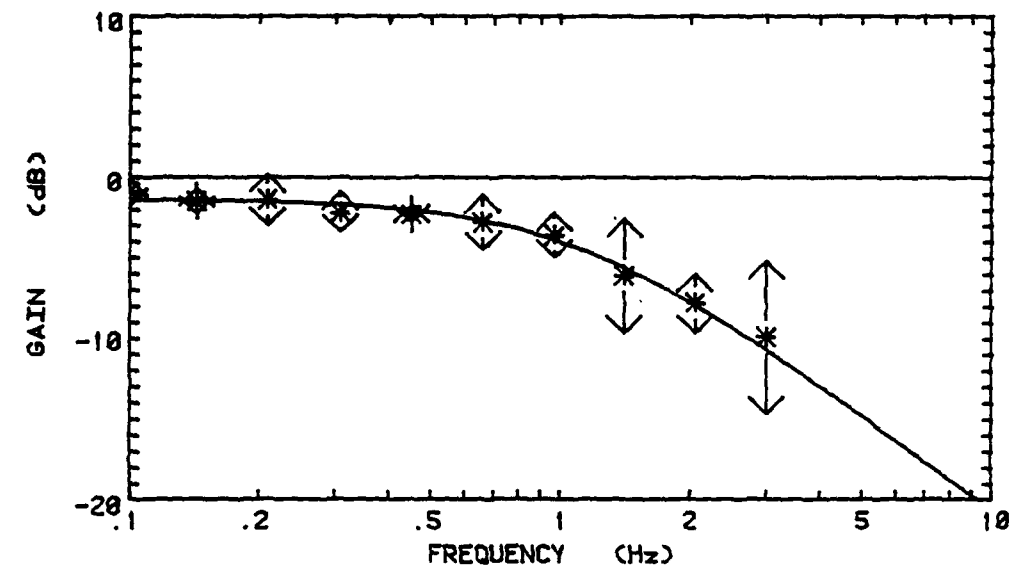

↑
 =Standard
 Deviation
 * =Averaged
 Experimental
 Data Points

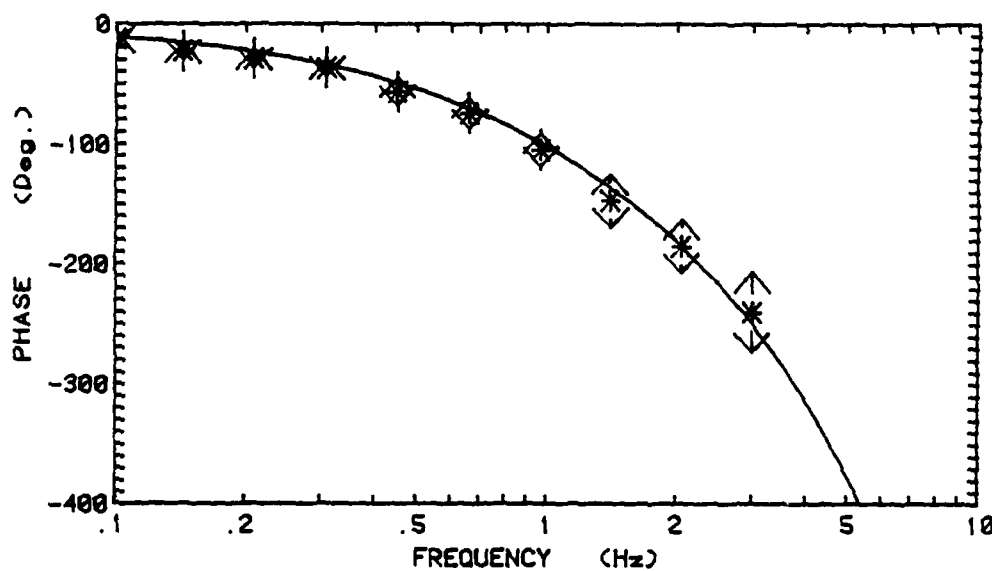

FUNCTION:


$$G(s) = \frac{K e^{-sT}}{(1 + s/A)}$$

PARAMETERS:

K = 0.856
 A = (1.087)2T = 6.832
 T = 0.168


Figure 7-7 (b)

OCCULOMETER WITH FEEDBACK
ELEVATION CLOSED LOOP
6 Deg. Maximum Field
For 6 Subjects, 6 Runs

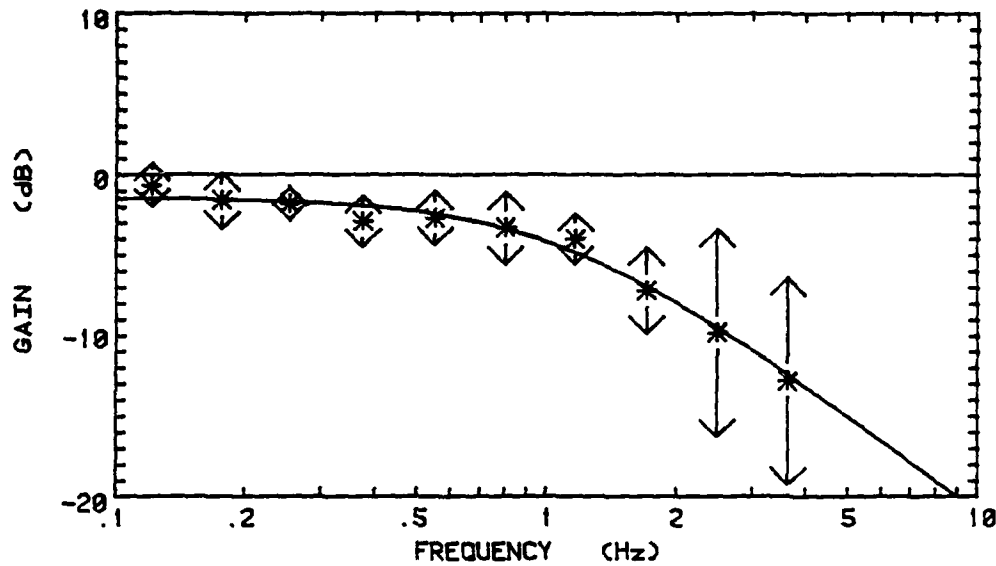

↑
=Standard
Deviation

* =Averaged
Experimental
Data Points

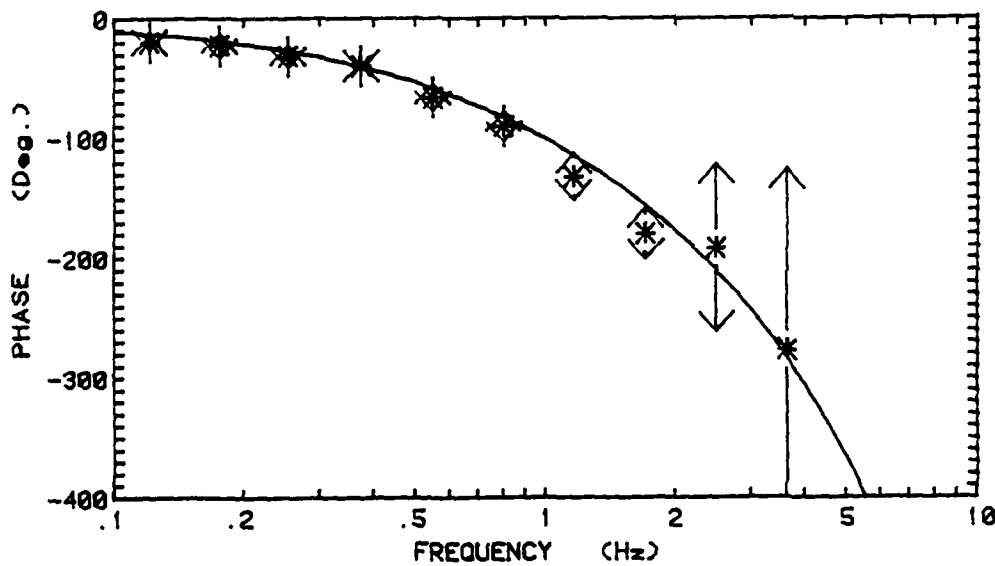


FUNCTION:

$$G(s) = \frac{K e^{-sT}}{(1 + s/A)}$$

PARAMETERS:

K = 0.847
A = (1.067)2π = 6.705
T = 0.101

Figure 7-8 (a)
 OCCULOMETER WITH FEEDBACK
 AZIMUTH CLOSED LOOP
 9 Deg. Maximum Field
 For 6 Subjects, 6 Runs

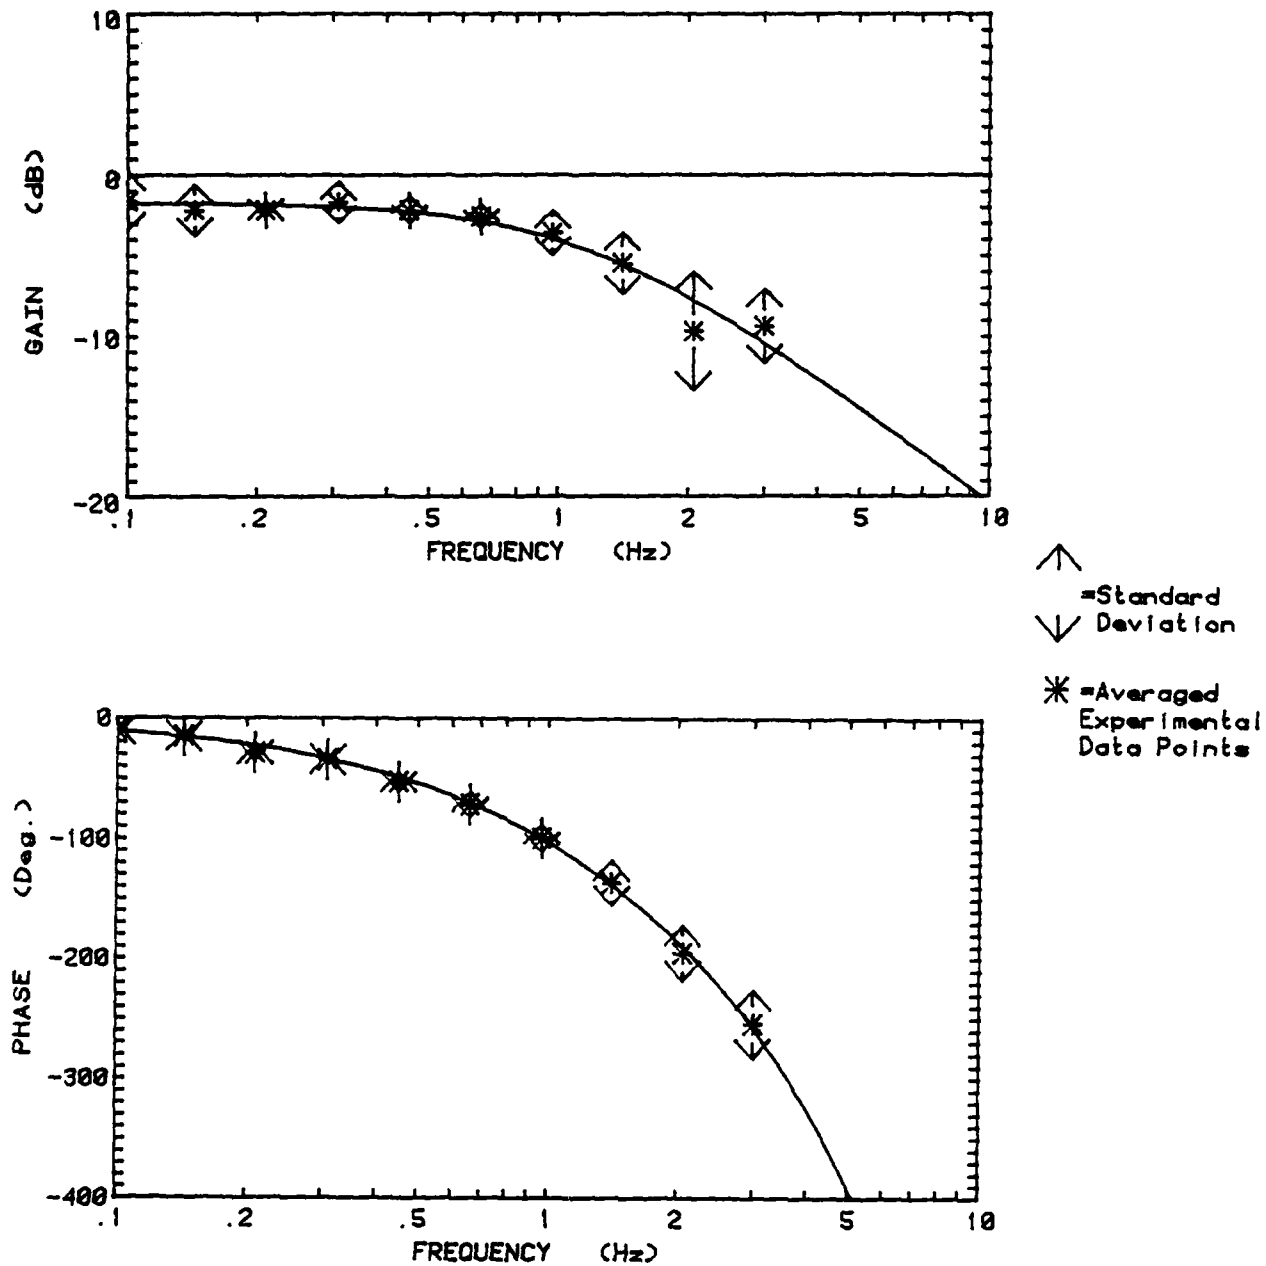


FUNCTION:

$$G(s) = \frac{K e^{-sT}}{(1 + s/A)}$$


PARAMETERS:

$$\begin{aligned} K &= 0.820 \\ A &= (1.175)2\pi = 7.381 \\ T &= 0.175 \end{aligned}$$

Figure 7-8 (b)
 OCCULOMETER WITH FEEDBACK
 ELEVATION CLOSED LOOP
 9 Deg. Maximum Field
 For 6 Subjects, 6 Runs

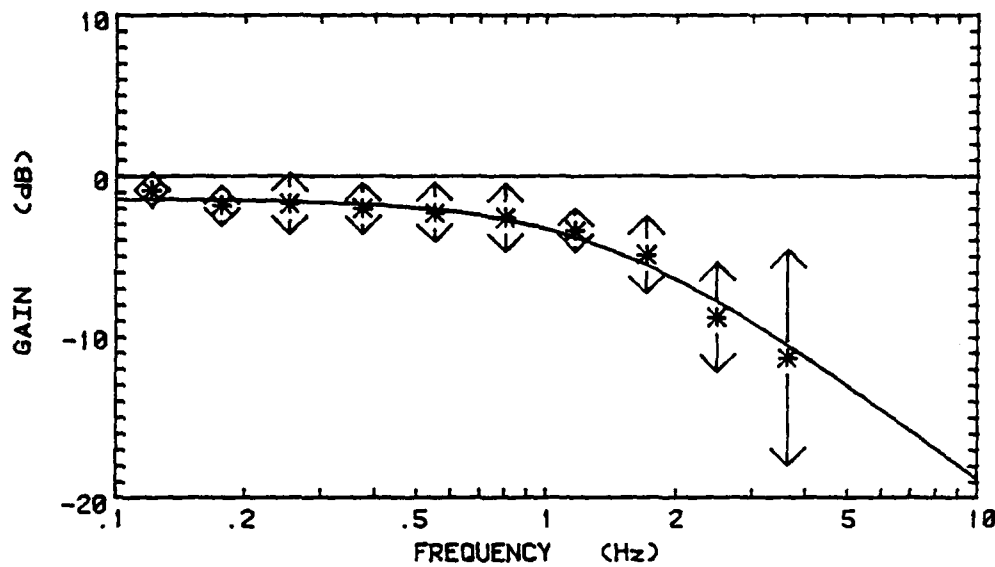

↑
 =Standard
 Deviation
 * =Averaged
 Experimental
 Data Points

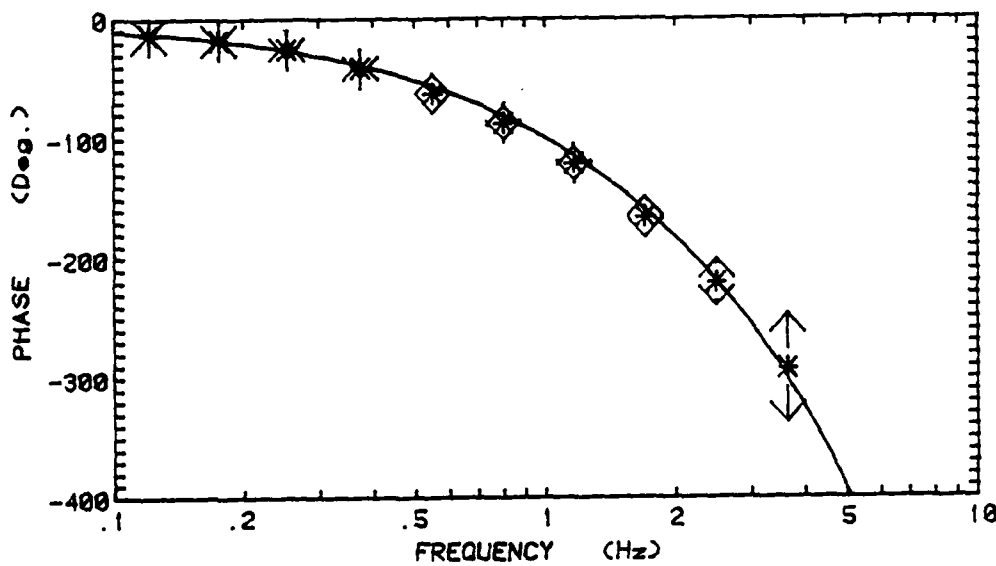

FUNCTION:


$$G(s) = \frac{K_0 e^{-sT}}{(1 + s/A)}$$

PARAMETERS:


$$\begin{aligned} K &= 0.848 \\ A &= (1.357)2\pi = 8.527 \\ T &= 0.177 \end{aligned}$$

Figure 7-9 (a)

OCCULOMETER WITH FEEDBACK
AZIMUTH CLOSED LOOP
12 Deg. Maximum Field
For 6 Subjects, 6 Runs

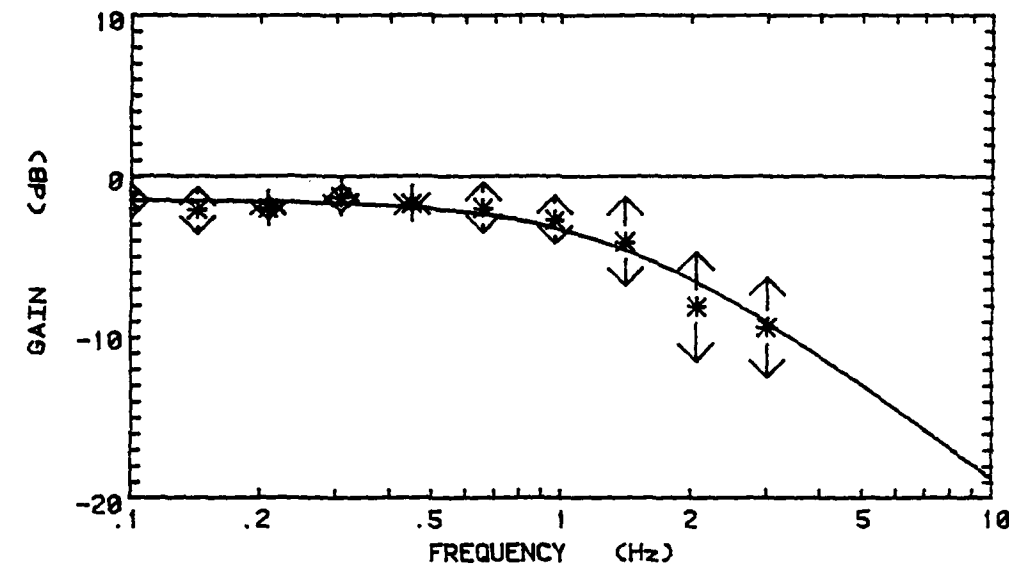

↑
=Standard
Deviation
* =Averaged
Experimental
Data Points

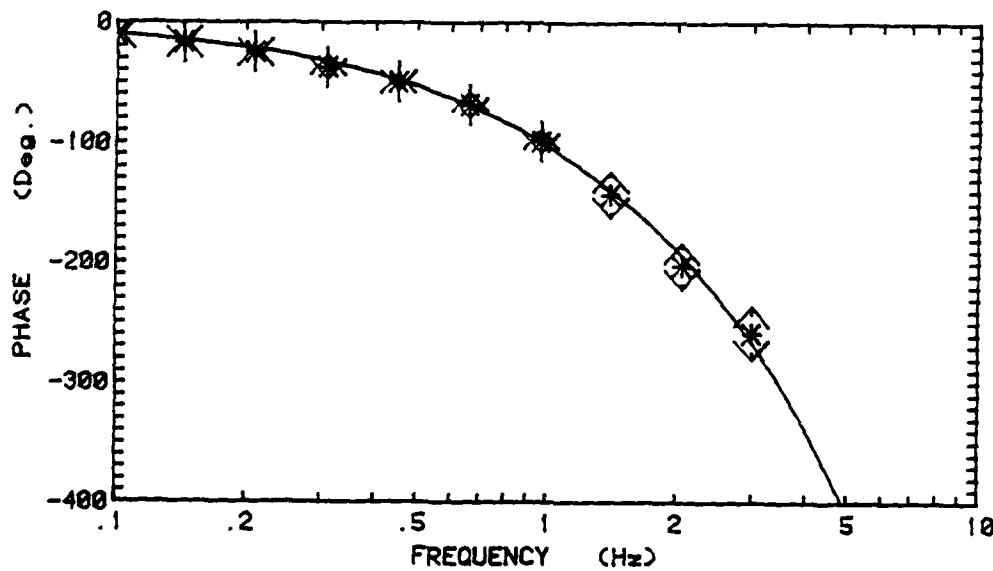

FUNCTION:


$$G(s) = \frac{K e^{-sT}}{(1 + s/A)}$$

PARAMETERS:


K = 0.843
A = (1.371)2π = 8.617
T = 0.186

Figure 7-9 (b)

OCCULOMETER WITH FEEDBACK
ELEVATION CLOSED LOOP
12 Deg. Maximum Field
For 6 Subjects, 6 Runs

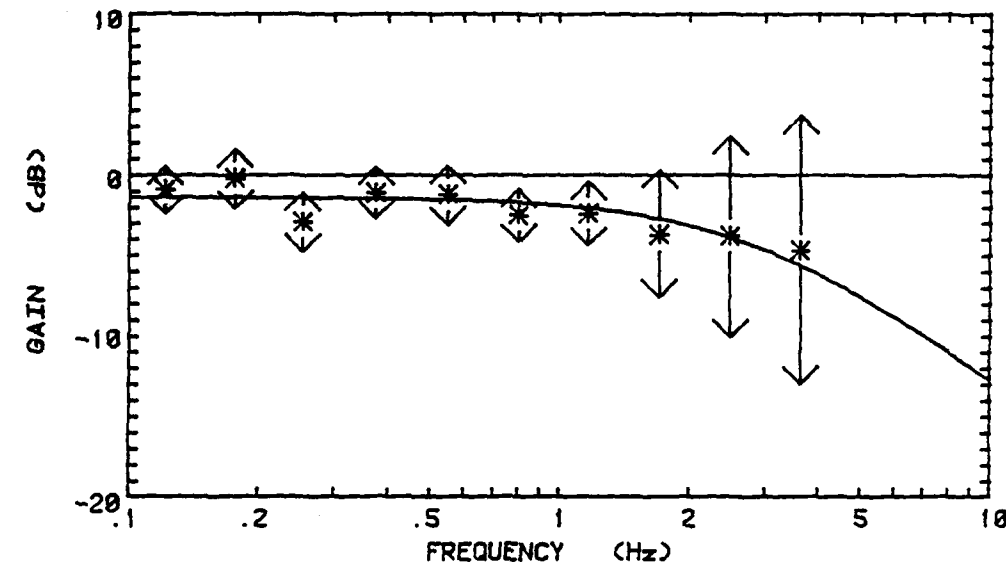

↑
=Standard
Deviation
↓
* =Averaged
Experimental
Data Points

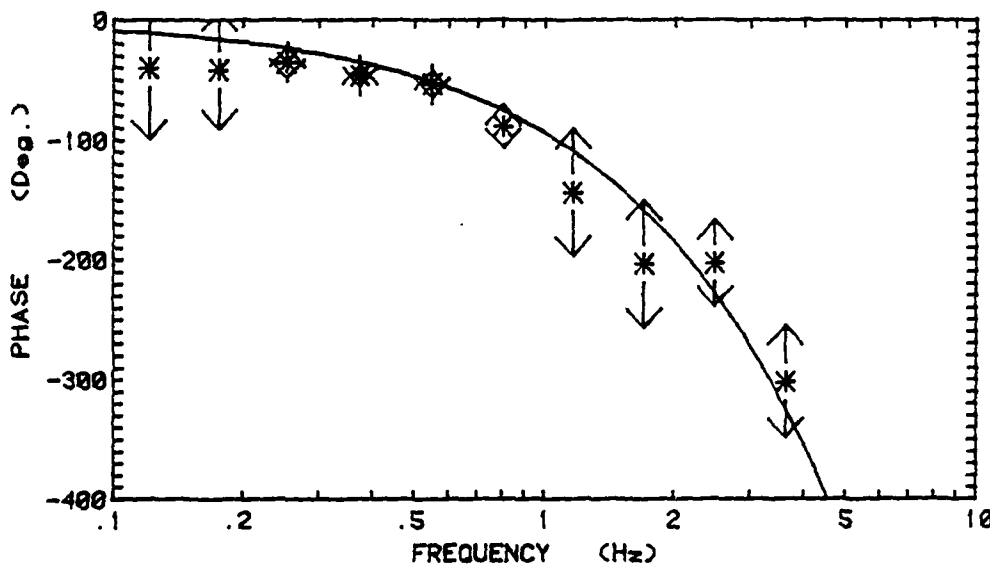

FUNCTION:

$$G(s) = \frac{K e^{-sT}}{(1 + s/A)}$$

PARAMETERS:

K = 0.853
A = (2.802)2π = 17.606
T = 0.208

8. DISCUSSION,

The describing function models for EOG and oculometer tracking presented in Section 7 are intended to describe, in compact form, the relevant overall dynamic properties of these tracking methods. Among the objectives of this project was the determination of the possible effect of maximum target field size on the (describing function) tracking model. Therefore, all the tests were performed at 6, 9 and 12 degrees maximum target field. From the parameter values of Tables 7-1 to 7-3, some relevant observations are summarized in Table 8-1.

For each of the three tracking schemes, Table 8-1 presents the percent changes of the model parameters as the result of maximum target field increase from 6 to 12 degrees. Such values are shown only when the increase or decrease is monotonic. For every case, the range is presented in terms of the percent maximum excursion from the average value, within which each parameter varies. Since the parameters may have different values for azimuth and elevation, the percent increases or decreases, as well as the percent excursions from average values had been obtained separately and then averaged between the two values for azimuth and elevation.

For EOG tracking, both gain K and bandwidth, in terms of model parameter C , decrease with increasing target field size. Typically, such an effect can be caused by an equivalent gain (describing function) in the open-loop that decreases with increasing input-signal strength. Indeed, this is true of the EOG sensing function whose characteristic exhibits saturation.

TABLE 8-1

EFFECT OF INCREASE IN MAXIMUM TARGET FIELD FROM 6 TO 12 DEGREES*

TRACKING METHOD	EOG	OCUL. W/O FB	OCUL. WITH FB
Low-Frequency Gain, K	15% decrease within 10%	6% increase within 3%	---- within 1.4%
Pole Relevant for BW:#	29% decrease within 19%	24% increase within 12%	95% increase within 37%
Transport Lag, T:	---- within 9.2%	22% decrease within 16%	21% increase within 10%
*Average between % change of average value for azimuth and that for elevation. Also shown is the range, in terms of the average between azimuth and elevation, of the % maximum excursion from the average value of the results for different target field sizes.			
#The pole relevant for the bandwidth is "C" for EOG and "A" for oculometer tracking, in eqs. (7-1) and (7-2) respectively.			

For oculometer tracking, the gain remains fairly constant while the bandwidth, in terms of model parameter A, increases with increasing target field size. The bandwidth increase reflects a slight open-loop gain-enhancement for larger target excursions (see Figures 6-4 to 6-9 for open-loop, as well as closed-loop frequency responses). Interestingly, the relative bandwidth increase (with target field size) for oculometer tracking with visual feedback display (95%) is larger than that for oculometer tracking without visual feedback display (24%). However, from the values in Tables 7-2 and 7-3 it can be seen that the average values of model parameter A are higher for oculometer tracking without visual feedback (FB) display than for that with visual FB display. For all three target field sizes (6, 9 and 12 degrees), the average values are:

For oculometer without visual feedback display:

Azimuth: A = 11.04

Elevation: A = 11.70

For oculometer with visual feedback display:

Azimuth: A = 7.61

Elevation: A = 10.95

Apparently, the somewhat greater bandwidth of oculometer tracking without visual FB is related to the absence of the additional task for the subject to align the control display with that of the target. On the other hand, the tracking accuracy depends on the calibration of the oculometer, whereas in oculometer tracking with visual FB display, the error sensing is done by perceptual means. All oculometer tests were performed after careful calibration (with an estimated accuracy of $\pm 1^\circ$).

The tracking accuracy is reflected in the 50% CEP ("circular error probability") which defines the radius about the target (or about a centroid of the error motion) within which the tracking response remained 50% of the run-time. Average values, standard deviations and ranges for the 50% CEP are presented in Figures 6-1 to 6-9, as well as in Tables B-1 to B-9, Figures B-1 to B-9, Appendix B. From these values, it is seen that the 50% CEP is fairly proportional with target field size. In other words, the ratio between 50% CEP (angle) and the maximum target angle is fairly constant. From the data obtained, the average 50% CEP ratio with respect to target angle is:

$$\frac{50\% \text{ CEP w.r. to Target (angle)}}{\text{Maximum Target Angle}} = \begin{cases} 0.541 \pm 8\% \text{ for EOG} \\ 0.330 \pm 7\% \text{ for oculometer w/o visual feedback} \\ 0.345 \pm 2\% \text{ for oculometer with visual feedback} \end{cases}$$

Oculometer tracking without visual feedback has the best tracking performance (in terms of the lowest CEP-ratio); however, as mentioned before, this is based on accurate oculometer calibration, which may not be as essential in oculometer tracking with visual feedback. It would appear that for oculometer tracking without visual

feedback, miscalibration (of the oculometer) will introduce a tracking bias but not affect the bandwidth, whereas in oculometer tracking with visual feedback, perceptual error-correction will reduce the tracking bias, but probably at the expense of reduced bandwidth. (see recommendation (b) in Section 9).

9. RECOMMENDATIONS FOR FURTHER STUDY

(a) Describing Function Models for Other Tracking Methods: In the present project, overall properties were established, in the compact form of describing function models, for three tracking methods. The experience gained in this project should serve useful in establishing describing function models for other tracking methods such as, for example, head (helmet) tracking.

(b) Accuracy Requirements for Tracking Methods with Feedback Display: This applies not only to the oculometer tracking with feedback display or EOG tracking studied in this project, but to wider class of tracking methods, such as helmet tracking. Since the actual error-sensing is performed by the human operator, instruments (such as oculometer, helmet sensor or EOG sensor) merely serve as control actuators. Errors in instrument sensitivity affect the open-loop gain but may have little effect on the steady-state tracking error. Moreover, human adaptation may possibly have a compensating effect on the open-loop gain itself. Likewise, any instrument output bias including drift may not directly affect the steady-state tracking error. It would be desirable to investigate how accuracy and dynamic performance, e.g. bandwidth, of tracking (with feedback display) are affected by changes in instrument gain, as well as by bias and drift. Such a project will provide data needed to establish specifications for sensing instruments to be used in practical tracking schemes.

The AMRL tracking laboratory is ideally equipped to produce the data for such a project. Gains and outputs of a reasonably accurate head (helmet) sensor and/or line-of-sight sensor (oculometer) can be modified by constant or random errors.

(c) Effect of Open Loop Gain in Tracking Methods with Feedback Display: Whereas Recommendation (b) above pertains to accuracy effects of instrument gain and bias, this recommended effort seeks to establish optimum open-loop gain for given tracking tasks. All experiments conducted in this project with EOG tracking and oculometer tracking with feedback display, involved unity open-loop gain. This choice appeared "reasonable" but may not necessarily result in optimal tracking performance.

(d) Model Study of Eye-Head Tracking: The tracking schemes considered in this research, including oculometer with and without feedback display, as well as EOG tracking, all involve human eye-head coordination, though each in different ways. For eye tracking itself (with fixed head position), several models have been proposed^{11,12,13,14}; however, they may serve, at best, as guides in the search for a model of eye-head tracking, which must include the dynamics of eye-head coordination^{15,16}. An important property desired of a model is the identifiability of its element from data of properly chosen tracking experiments.

(e) Reduction of Drift and its Effect in EOG Tracking: Though EOG tracking does not appear promising as a practical method it may be useful in research studies relevant to head-eye coordination. Even with presently available electrodes, drift may not be objectionable, as long as the subject can comfortably exert control. Electronic circuitry can be designed to compensate for drift or to automatically reset the d-c level when the drift exceeds a certain value. Another improvement can be obtained by a circuit that locks the feedback display in case of events such as blinking (such circuitry exists in the Honeywell remote oculometer). One of the problems of any tracking system involving feedback display is the temporary loss of the feedback display. This will cause the subject to go into searching motion. This happened during some of the experiments conducted during the summer, causing reduction of overall tracking performance. It is possible, however, to prevent this from happening by limiting the display such that it never leaves the boundaries of the visual field.

REFERENCES

1. Chouet, B. A., L. R. Young, "Tracking with Head Position Using an Electro-optical Monitor", IEEE-Transactions on Systems, Man and Cybernetics, vol. SMC-4 No. 2, March 1974, pp. 192-204.
2. Shirachi, D. K., D. L. Monk, J. H. Black, Jr., "Effects of Headgear and Visual Angle on Head Rotation Spectral Characteristics", Proc. 12th Annual Conference on Manual Control, May 1976, pp. 455-461; NASA TM X-73, 170.
3. Monk, D. L., J. L. Porterfield, J. P. Hornseth, R. L. McMurry, "Head Tracking at Large Angles from the Straight Ahead Position", Proc. 14th Annual Conf. on Manual Control, April, 1978.
4. Merchant, J., R. Morrisette, J. L. Porterfield, "Remote Measurement of Eye Motion over One Cubic Foot of Space", IEEE-Transaction on Biomedical Engineering, vol. BME-21 No. 4, July 1974, pp. 309-317.
5. Shirachi, D. K., J. H. Black, Jr., "Head-Eye Tracking in Two-Dimensional Pursuit Tasks", Proc. 11th Annual Conference on Manual Control, May 1975, pp. 204-216; NASA TM X-62, 464, 1975.
6. Hornseth, J., G. J. Stanley, Porterfield, P. Carson, "Eye Tracking: Horizontal vs. Vertical", Proc. 12th Annual Conference on Manual Control, May 1976, pp. 422-429; NASA TM X-73, 170.
7. Hornseth, J. P., D. L. Monk, J. L. Porterfield, R. L. McMurry, "Two Dimensional Eye Tracking: Sampling Rate of Forcing Function" Proc. 14th Annual Conf. on Manual Control, April 1978.
8. Levinson, W. H, "Techniques for Data Analysis and Input Waveform Generation for Manual Control Research", Technical Memorandum CSD-75-2, Bolt, Beranek and Newman, Inc., Cambridge, Ma., Revised May 8, 1975.
9. Kris, E. C., "A Technique for Electrically Recording Eye Position", Aero Medical Laboratory, Wright-Patterson AFB, Ohio, WADC Technical Report 58-660, December, 1958.
10. Barber, H. O., C. W., Stockwell, "Manual of Electronystamography"(book), C. B. Mosby Co., 1976, 207 pp.
11. Stark, L., G. Vossius, L. R. Young, "Predictive Control of Eye Tracking Movements", IRE-Transactions on Human Factors in Electronics, vol. HFE-3, September 1962, pp. 52-57.
12. Dallos, P. J., R. W. Jones, "Learning Behavior of the Eye Fixation Control System", IEEE-Transactions on Automatic Control, vol. AC-8, July 1963, pp. 218-227.
13. Young, L. R., L. Stark, "Variable Feedback Experiments Testing a Sampled Data Model for Eye Tracking Movements", IEEE-Transactions on Human Factors in Electronics, vol. HFE-4, September 1963, pp. 38-51.

14. Robinson, D. A., "Models of the Saccadic Eye Movement Control System", Kybernetik, vol. 14, 1973, pp. 71-83.
15. Sugie, N., M. Wakakuwa, "Visual Target Tracking with Active Head Rotation" IEEE-Transactions on Systems Science and Cybernetics, vol. SSC-6, April 1970, pp. 103-109.
16. Morasso, P., G. Sandini, V. Tagliasco, R. Zaccaria, "Control Strategies in the Eye-Head Coordination System", IEEE-Transactions on Systems, Man and Cybernetics, vol. SMC-7, No. 9, September 1977, 639-651.

APPENDIX A

INDIVIDUAL TRACKING RUN RESULTS

Presented in this appendix are the frequency response plots for the individual tracking runs on 11 (of the 15) subjects.* Also shown for each test run presented are the values of the 50% circular error probability (CEP - the radius within which the tracking error remains within 50% of the run time; both with reference to the target and to the centroid of the error motion.* Each plate represents a tracking run; for each azimuth and elevation, it shows the gain and phase versus frequency plots for

"Closed-Loop", meaning: $\frac{\text{Control (output)}}{\text{Target (output)}}$

"Open - Loop", meaning: $\frac{\text{Control (output)}}{\text{Error (Target minus Control)}}$

Table A-1 summarizes the relevant data on the target forcing function used for the tracking runs, whose results have been processed.

In total, 100 EOG tracking runs on 15 subjects and 48 oculometer runs (24 each with and without visual feedback display) on 6 (of the 15) subjects have been processed. For lack of space, this appendix shows individual frequency response plots for only 72 EOG tracking runs on 11 subjects and 24 oculometer tracking runs on 3 (of those 11) subjects. The remaining individual frequency response plots are quite similar but their data are, of course, incorporated in the computation of the average responses presented in the body of this report.

*The frequency response data and the 50% CEP values were computed on the PDP-11/34 minicomputer at the AMRL Tracking Laboratory, using programs "MODFRT" and "TR4" respectively.

TABLE A-1

SPECIFICATION OF FORCING FUNCTIONS USED IN THE TRACKING RUNS

FREQUENCIES(Hertz)		Sum-of-sines: 10 frequencies between (approx.) 0.1 Hertz and 3.0 Hertz as shown.
Azimuth	Elevation	
0.09888		For a set of runs on a subject three forcing functions were used which were identical in everything except for different (randomly selected) phases of their sine-wave components; they are designated by forcing function (FF) numbers 1, 2 and 3 and their sequence in any series of tracking runs was permuted as shown in Tables A-2 and A-3 for EOG and oculometer tracking respectively.
0.14282	0.12085	
0.20874	0.17578	
0.30762	0.25269	
0.45044	0.37354	
0.65918	0.54932	Break Frequencies (6 dB Power):
0.96680	0.80200	
1.40625	1.16455	Subject 0 (5 EOG runs): Different break frequencies: 0.7, 0.8, 0.9 and 1.0 Hertz (4 FF's; 0.8 Hz was used twice).
2.05444	1.70288	
2.99927	2.48291	Practice Runs (On All Subjects 1-14): 0.7 Hertz; One FF (FF number P).
	3.62549	
		Subjects 1 and 2: 1.0 Hertz; Three FF's (FF numbers 1,2,3).
		Subjects 3 Through 14: 0.8 Hertz; Three FF's (FF numbers 1,2,3).

The tracking runs on subject 0 represents test runs, using EOG tracking, all for 6 degree maximum target field but for different (6 dB power) break frequencies, namely 0.7, 0.8, 0.9 and 1.0 Hertz.

The tracking runs on Subjects 1 and 2 used forcing functions with a break frequency of 1.0 Hertz. However, it was found that the evaluated results may not be reliable. This may be seen by the markings of the data points in terms of the "reliability levels" defined in Table 5-1. It was therefore decided to lower the break frequency for all subsequent tracking runs to 0.8 Hertz for Subjects 3 through 14.

All data evaluations presented in Section 6 have been based on the tracking runs for Subjects 3 to 14, with a break frequency of 0.8 Hertz; namely 81 EOG runs on 12 subjects and 48 oculometer runs on 6 (of those 12) subjects.

For each subject, the first tracking run was performed with forcing function P (for practice), where the break frequency was 0.7 Hertz. This test run was performed with a maximum target field size of 6 degrees. The subsequent tracking runs were performed with maximum target field sizes of 6, 9 and 12 degrees, the sequence being permuted. Also permuted were the forcing functions which were the same except for the (randomly selected) phases (of the 10 different sine functions). The record of the tracking runs for subjects 1 to 14 is shown in Tables A-1 and A-2 for EOG and oculometer tracking respectively.

The average responses presented in the body of this report are based on the tracking runs on Subjects 3 through 14, for which the target forcing functions all had the same break frequency of 0.8 Hertz.

TABLE A-2
RECORD OF EOG RUNS

No.	Subject	(Age)	Sex	Date (1978)	Maximum Field / Forcing Function Number* For Run						
					8	1	2	3	4	5	6
1	NH	(28)	F	8/6	6°/P	12°/2	9°/3	6°/1	9°/3	12°/1	6°/2
2	DHF	(28)	F	8/7	6°/P	6°/2	6°/3	12°/1	6°/2	12°/3	9°/1
3	WSS	(67)	M	8/8	6°/P	9°/1	6°/3	12°/2	12°/2	6°/1	9°/3
4	TAC	(24)	M	8/9	6°/P	6°/1	9°/2	12°/3	9°/1	6°/2	(12°/3)**
5	MHP	(22)	F	8/9	6°/P	(12°/2)**	6°/1	9°/3	12°/1	9°/3	6°/2
6	AMK	(36)	M	8/10	6°/P	9°/3	12°/1	6°/2	6°/3	9°/2	(12°/1)**
7	WLG	(32)	M	8/12	6°/P	6°/3	12°/2	9°/1	12°/1	9°/2	6°/3
8	AMM	(19)	F	8/13	6°/P	6°/3	12°/2	9°/1	6°/3	12°/2	9°/1
9	LL	(35)	F	8/13	6°/P	6°/1	9°/3	12°/2	6°/2	9°/1	12°/3
10	CJA	(38)	M	8/14	6°/P	9°/2	6°/1	12°/3	9°/3	6°/1	12°/2
11	KRA	(18)	F	8/15	6°/P	12°/1	6°/2	9°/3	9°/1	12°/3	6°/2
12	DWR	(35)	M	8/15	6°/P	12°/3	9°/1	6°/2	12°/2	6°/3	9°/1
13	MRB	(25)	F	8/17	6°/P	6°/2	9°/3	12°/1	9°/3	12°/1	6°/2
14	AK	(21)	F	8/17	6°/P	9°/1	6°/3	12°/2	12°/2	6°/1	9°/3

*For example, 9°/3 means " 9 degrees max. field and forcing function (FF) number 3". See Table A-1 for specification of FF's and list of break frequencies of FF's.

**Records lost or damaged during processing (three runs as indicated).

TABLE A-3
RECORD OF OCULOMETER RUNS

No.	Subject (Age) Sex	Date (1979)	Maximum Field / Forcing Function Number*							
			For Runs Without Visual Feedback				For Runs With Visual Feedback			
			8	1	2	3	8	1	2	3
8	AMW (19) F	8/13	6°/P	9°/3	12°/2	6°/1	6°/P	12°/1	9°/2	6°/3
9	LL (35) F	8/13	6°/P	6°/3	12°/2	9°/1	6°/P	6°/3	12°/2	9°/1
10	CJA (30) M	8/14	6°/P	6°/1	9°/3	12°/2	6°/P	6°/2	9°/1	12°/3
11	KRH (18) F	8/15	6°/P	9°/2	6°/1	12°/3	6°/P	9°/3	6°/1	12°/2
12	DWR (35) M	8/15	6°/P	12°/1	6°/2	9°/3	6°/P	9°/1	12°/3	6°/2
13	MRB (25) F	8/17	6°/P	12°/3	9°/1	6°/2	6°/P	12°/2	6°/3	9°/1

*See footnote under Table A-2.

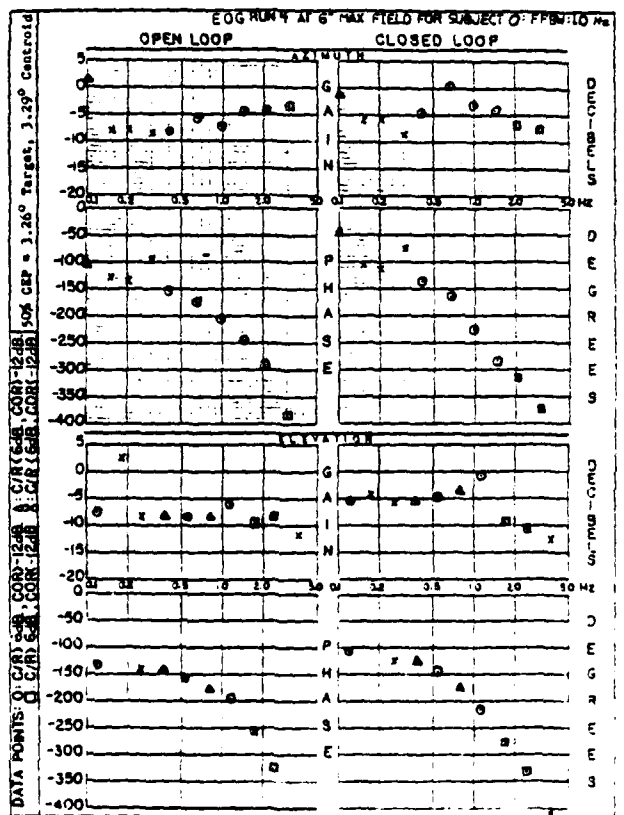


Figure A-1 (cont.)

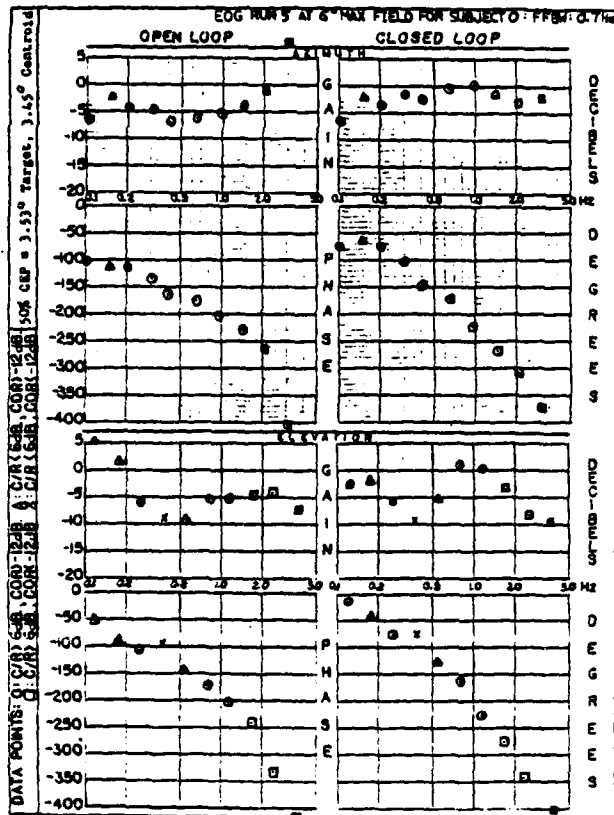


Figure A-2

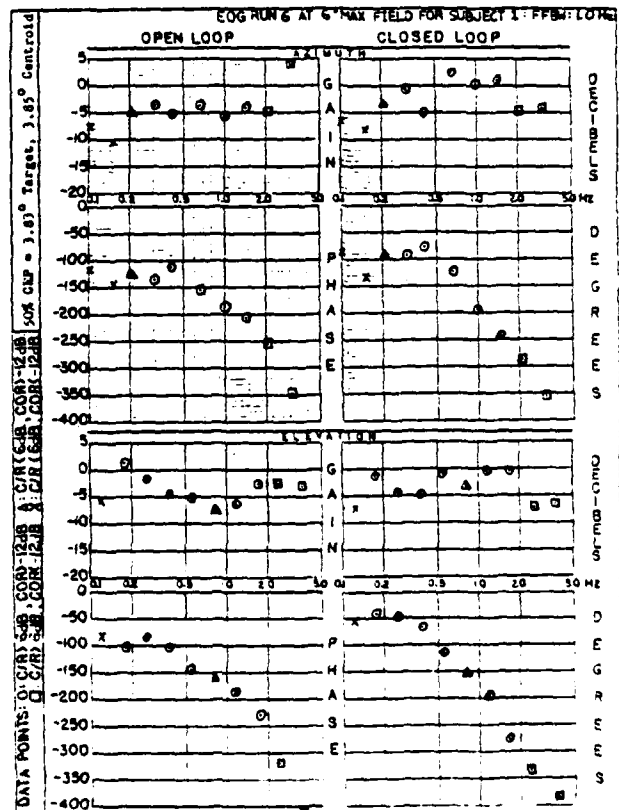
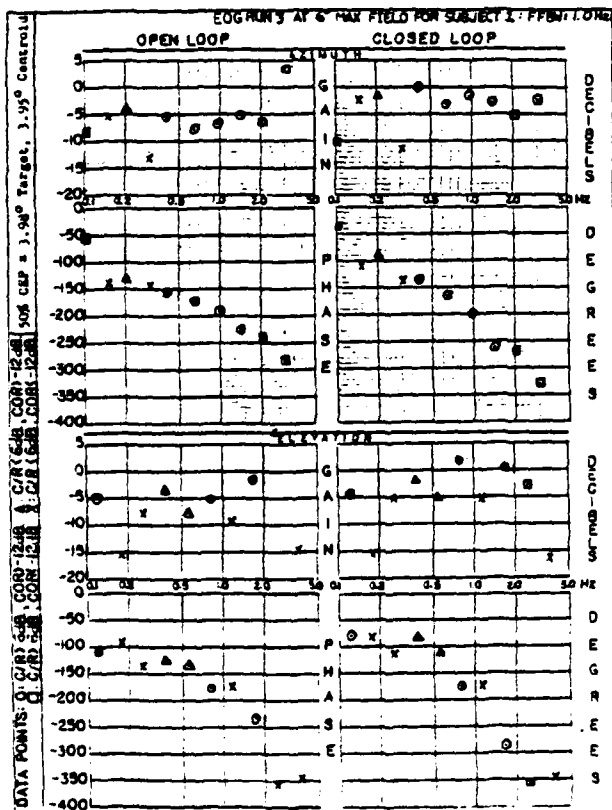
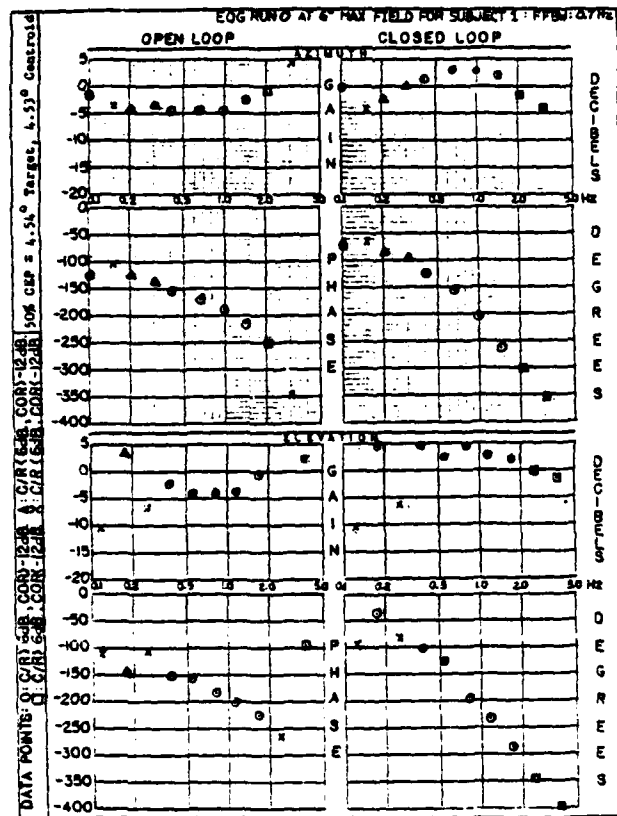


Figure A-2 (cont.)

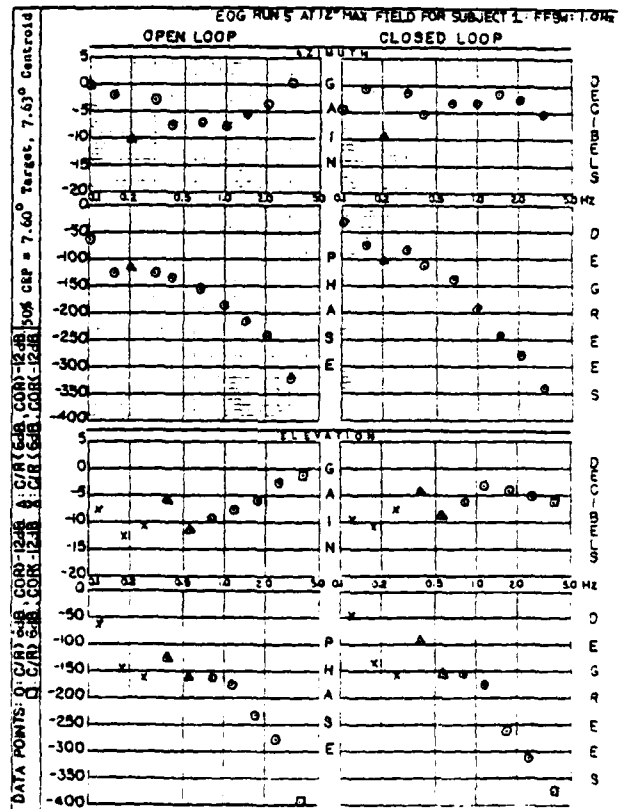
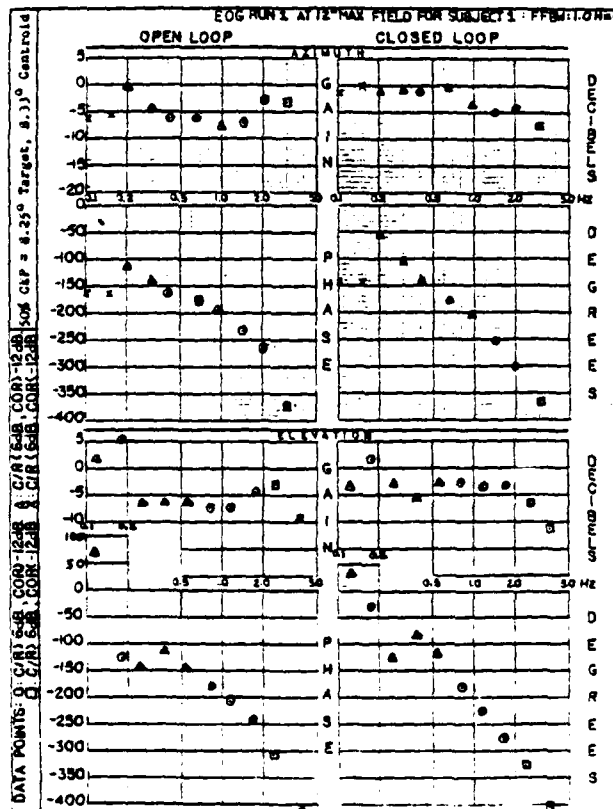
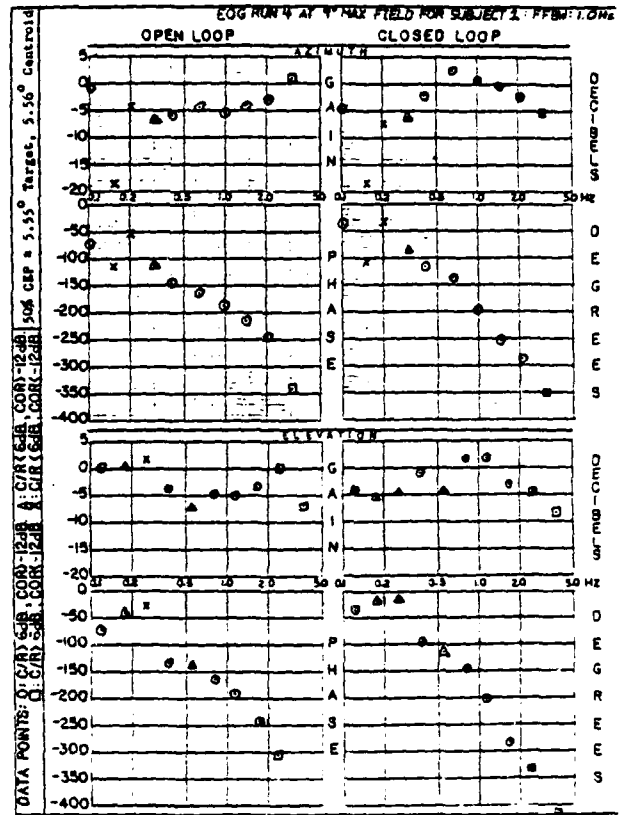
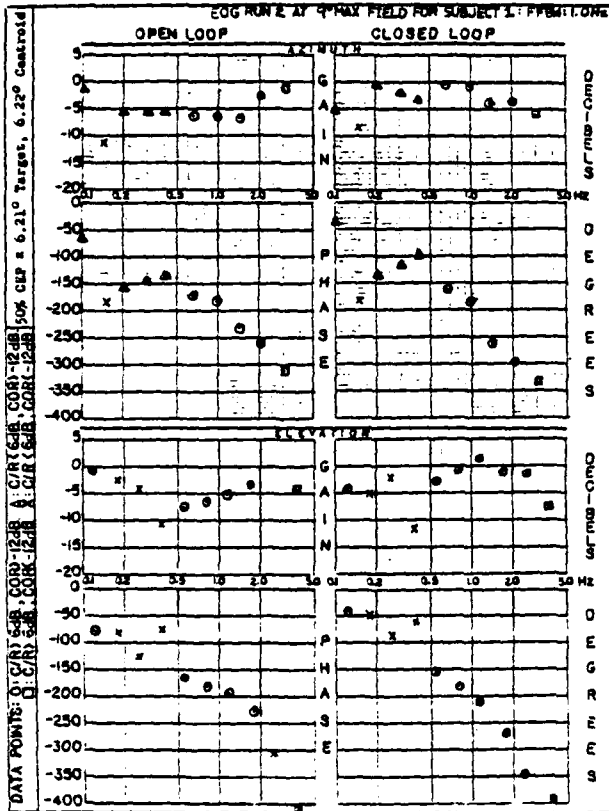
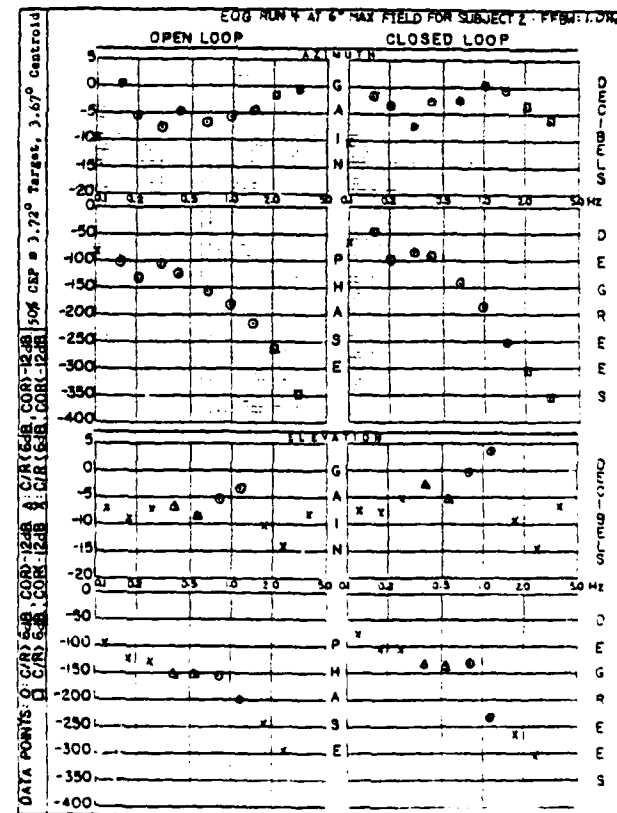
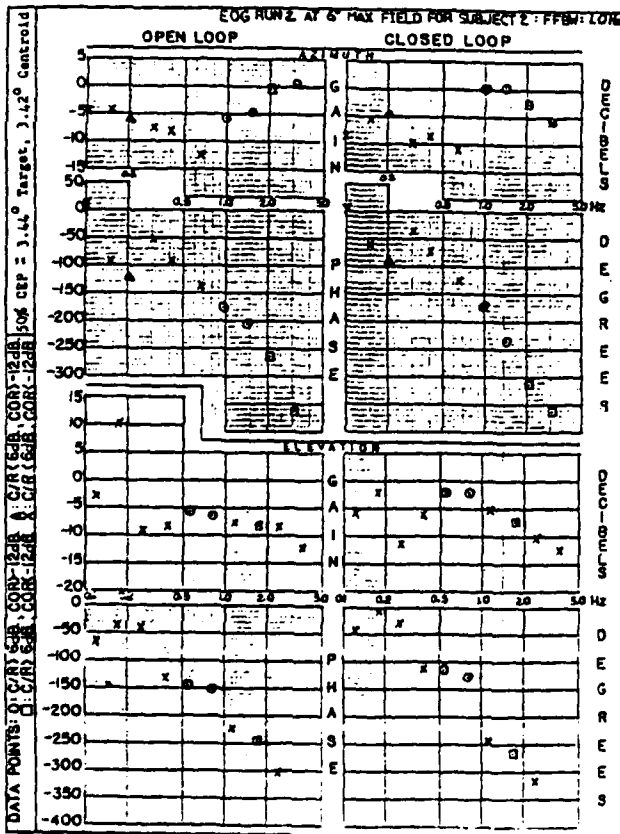
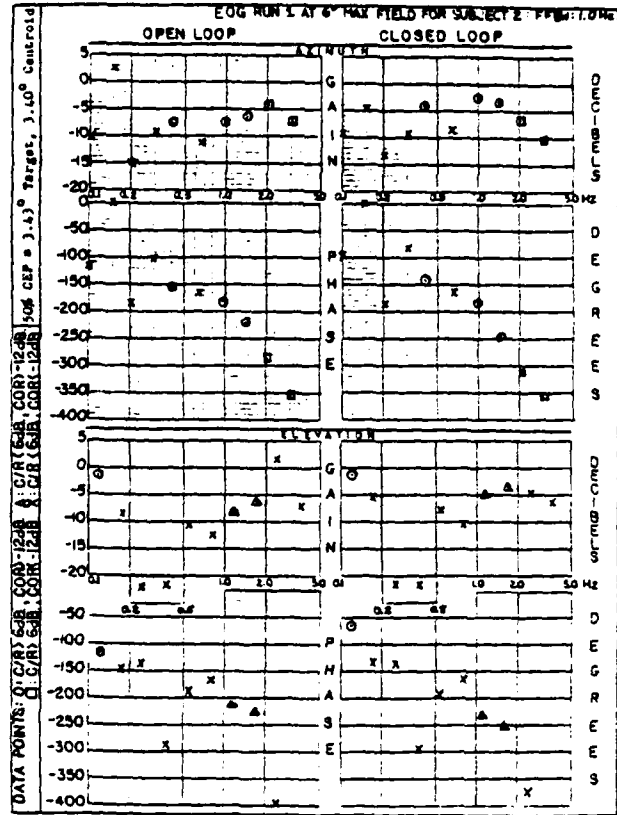
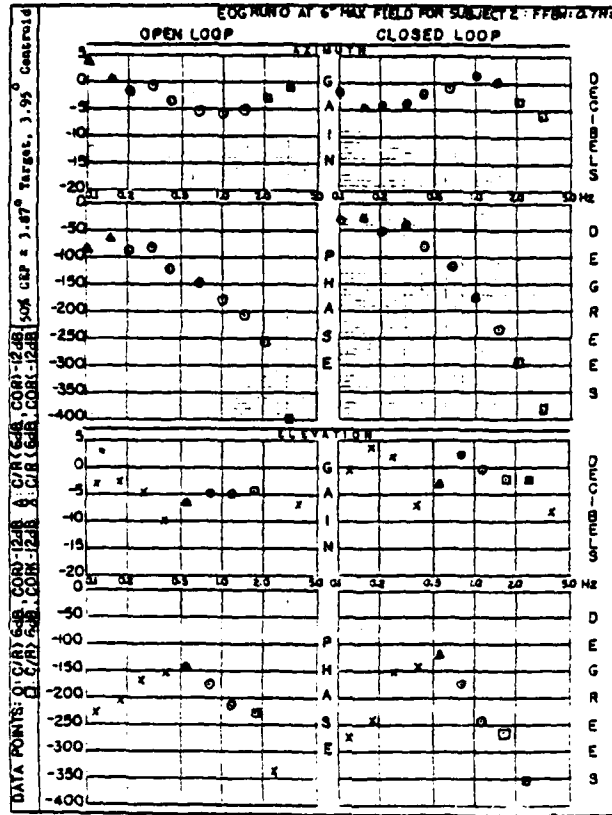
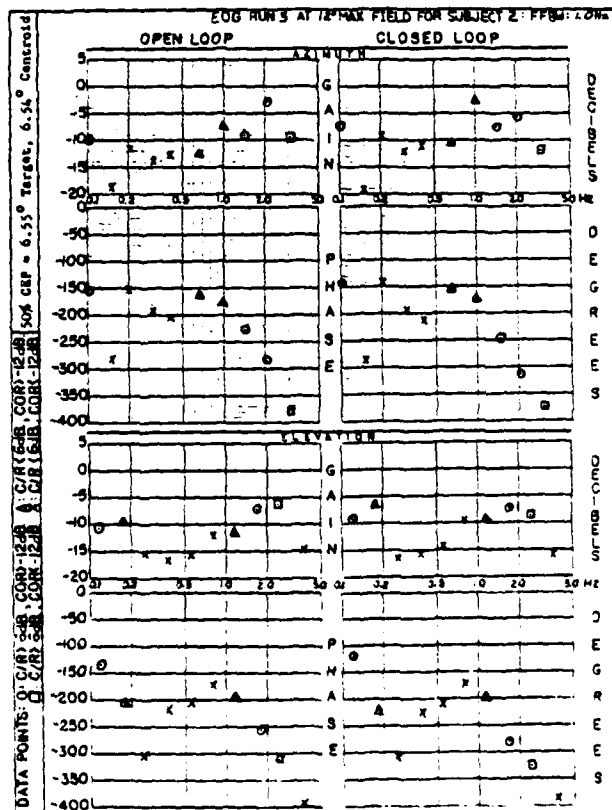
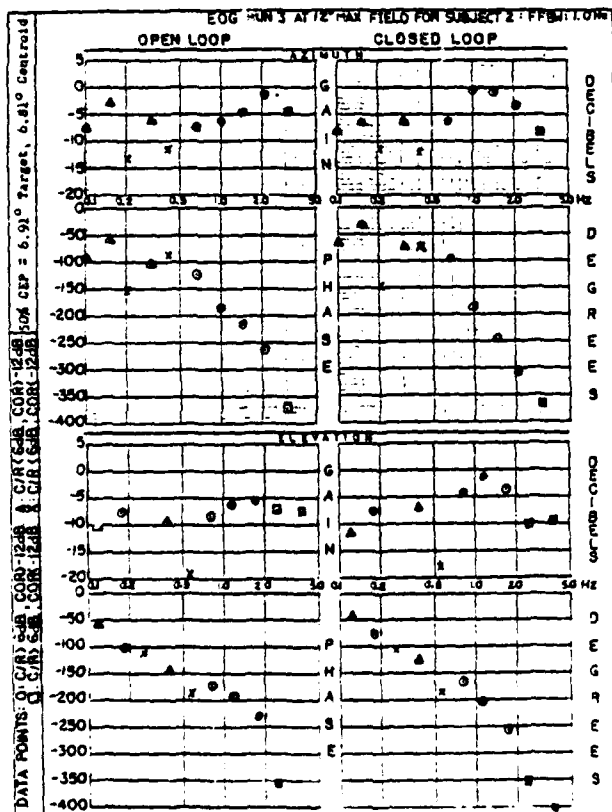
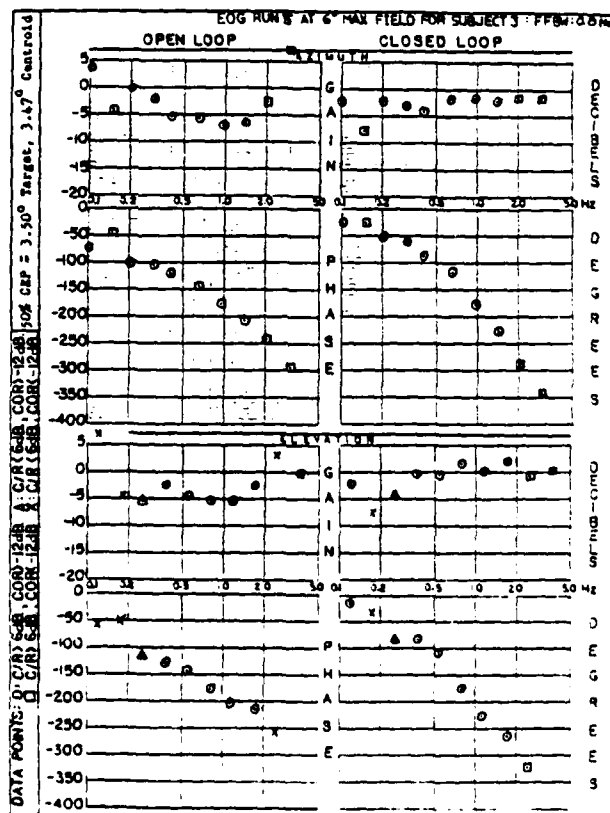
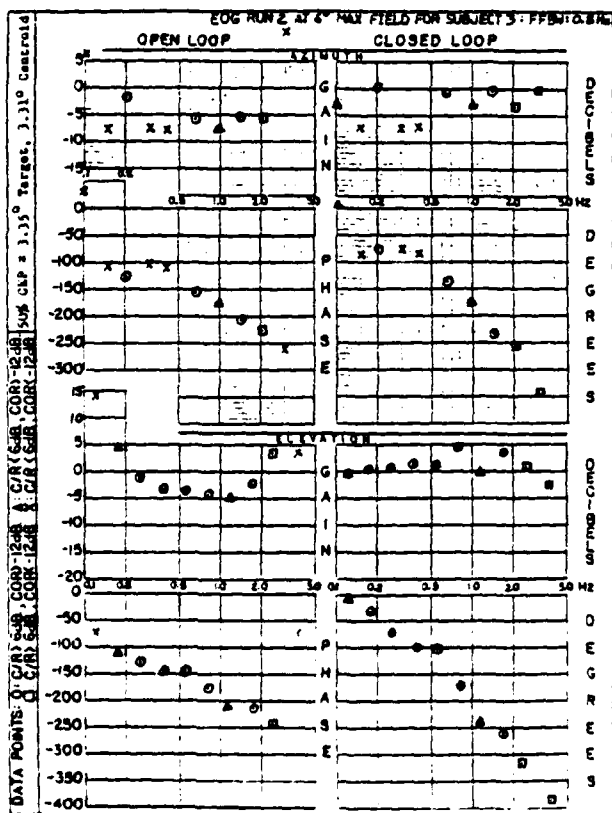


Figure A-3







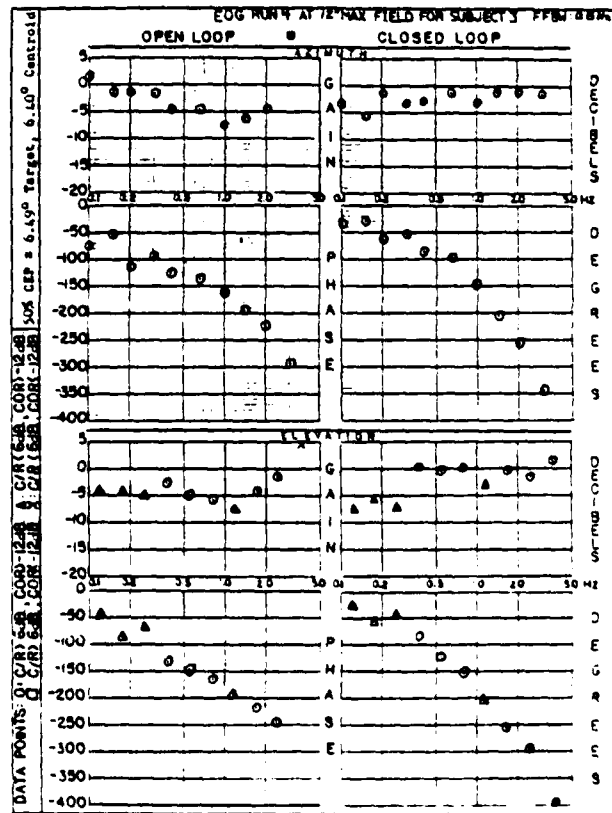
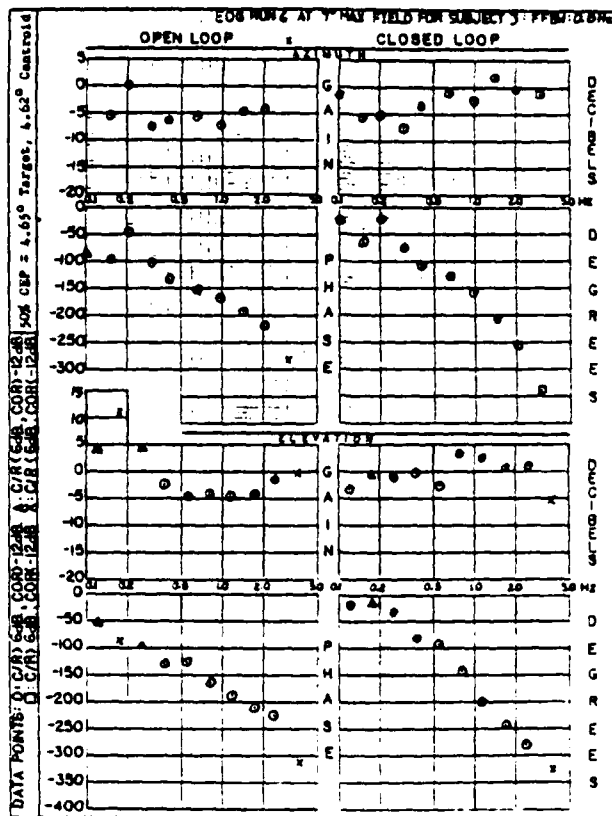
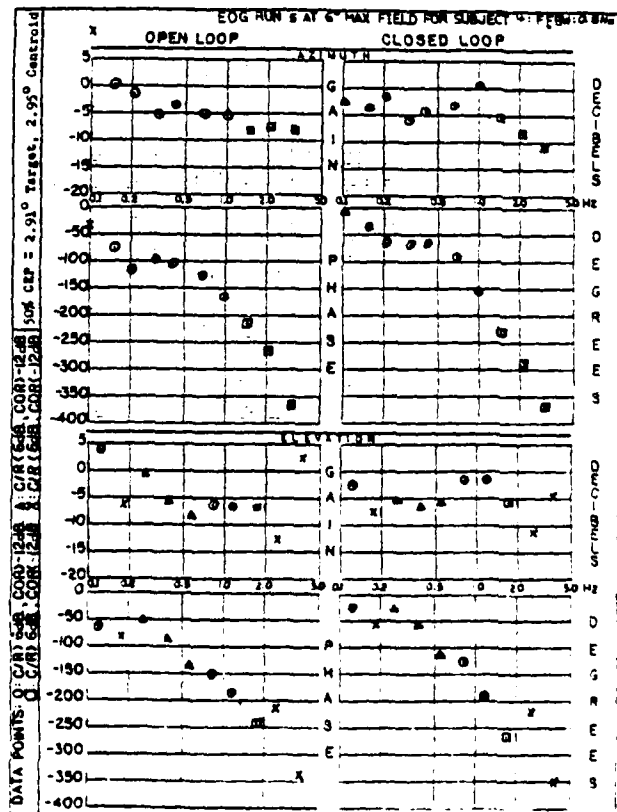
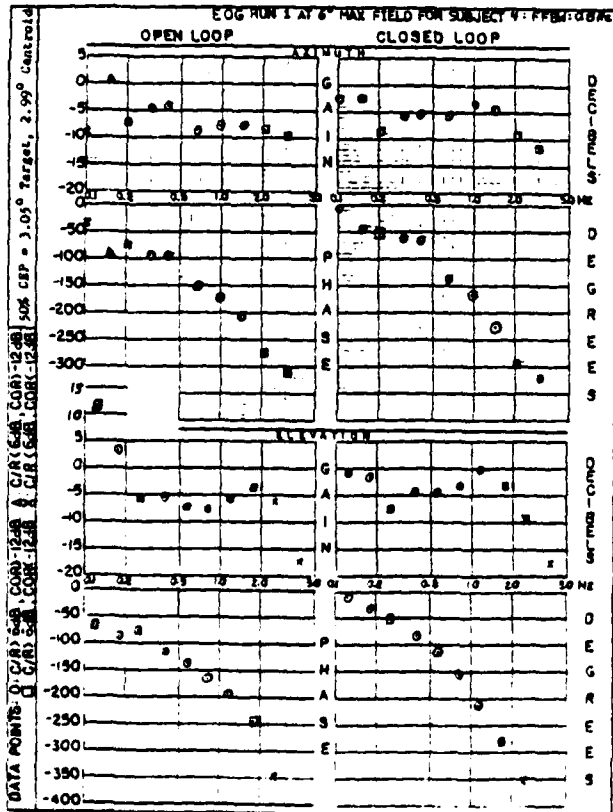
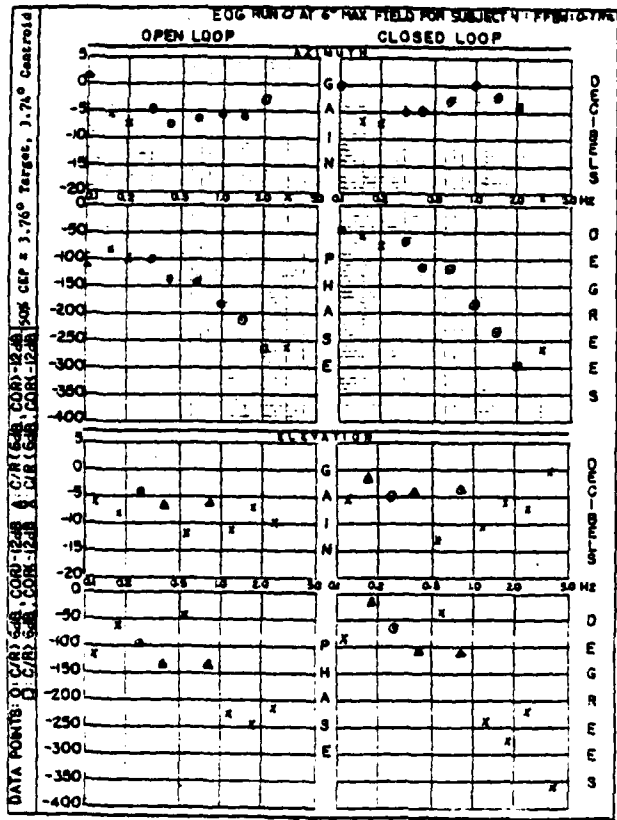


Figure A-5



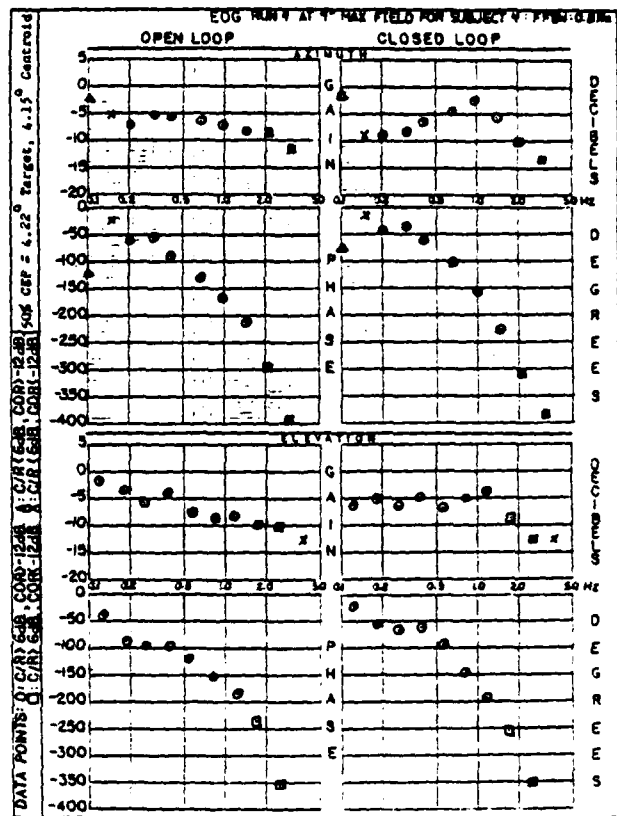


Figure A-6









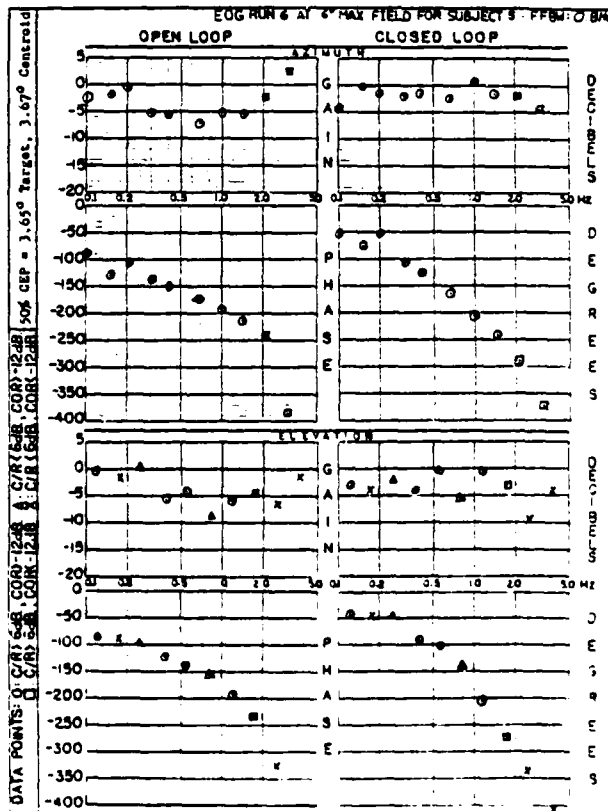





Figure A-6 (cont.)

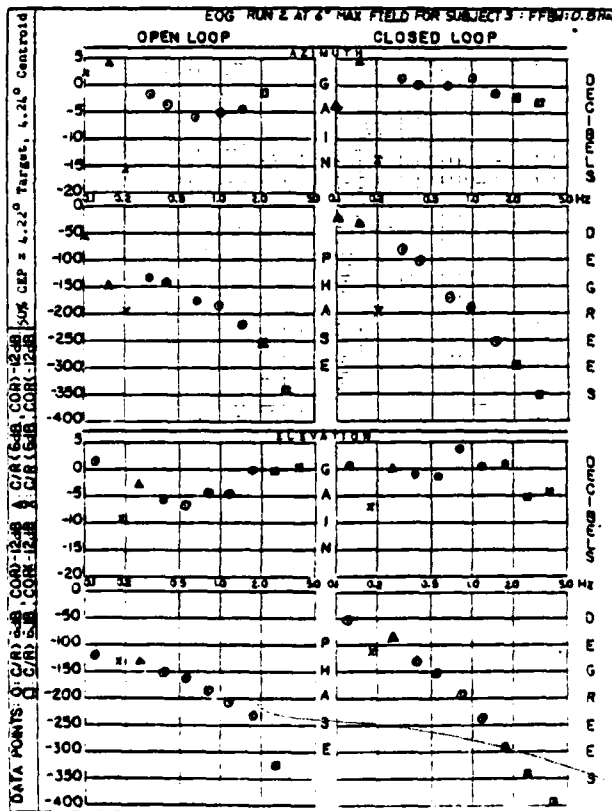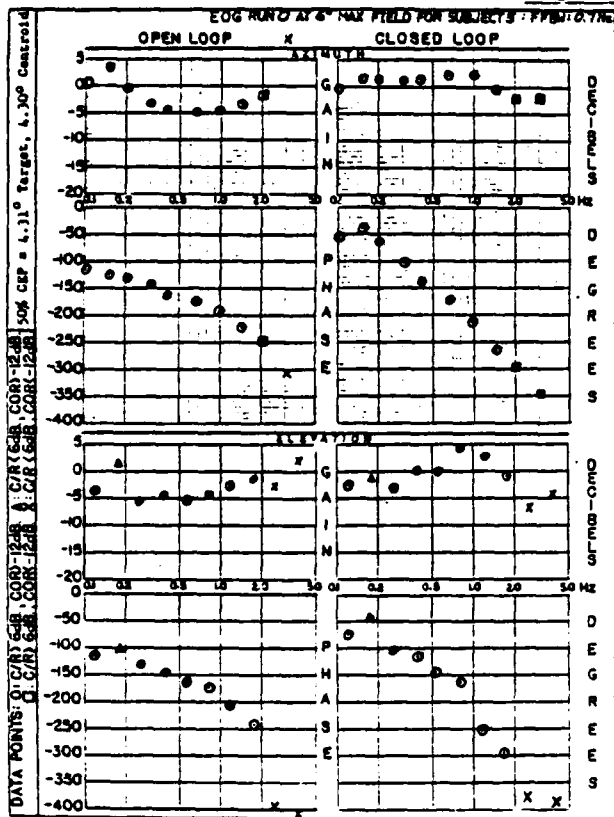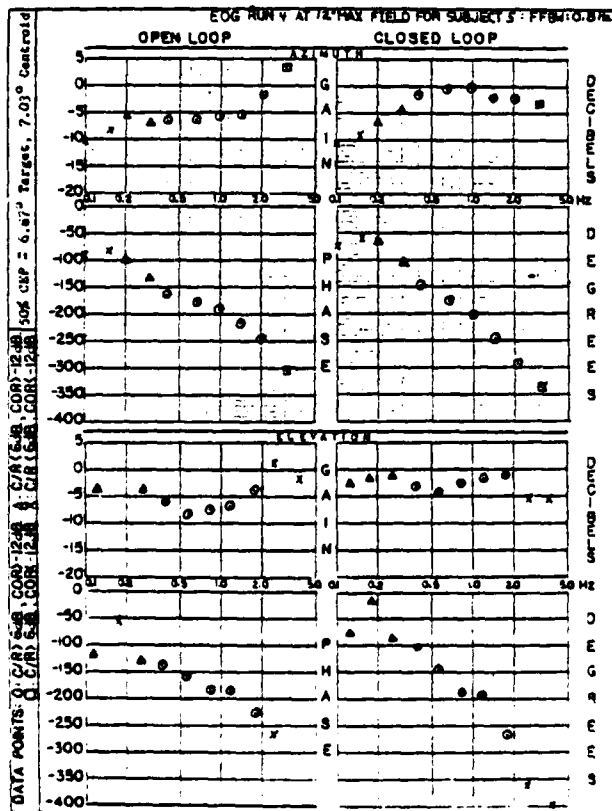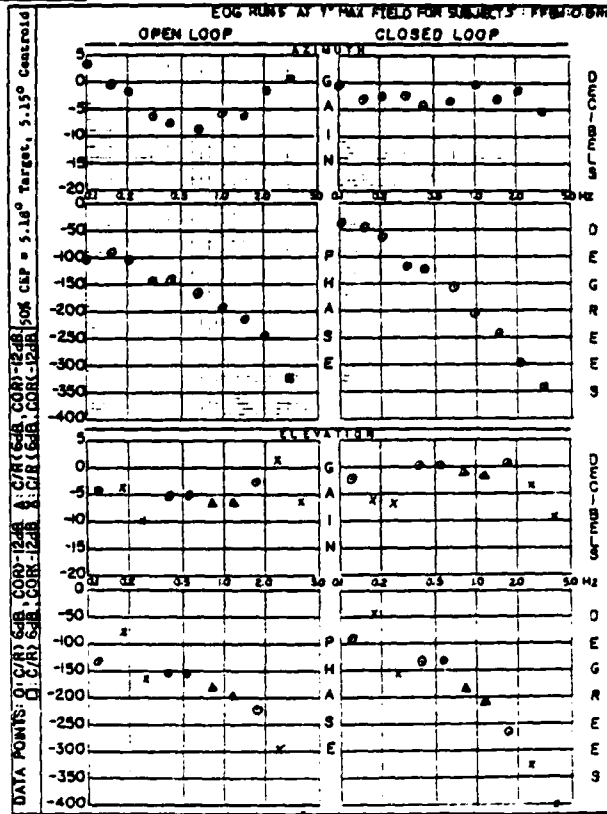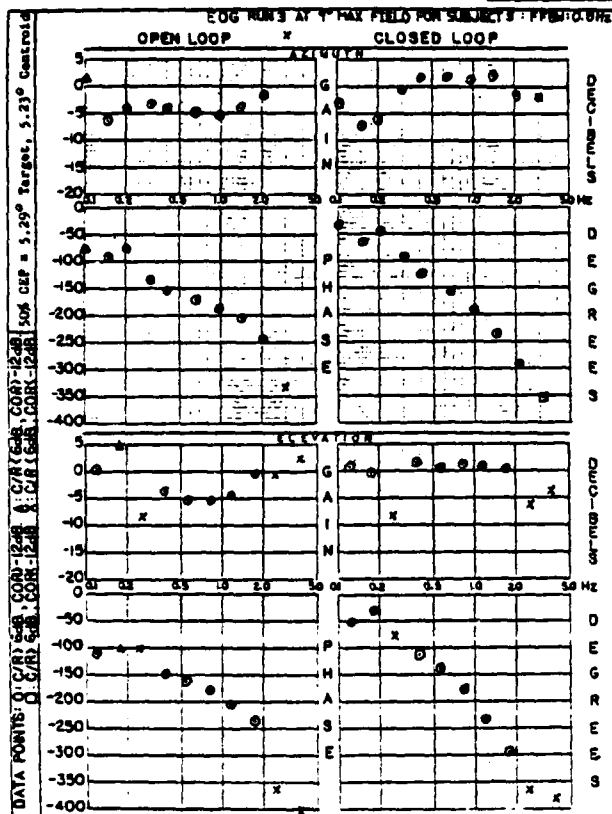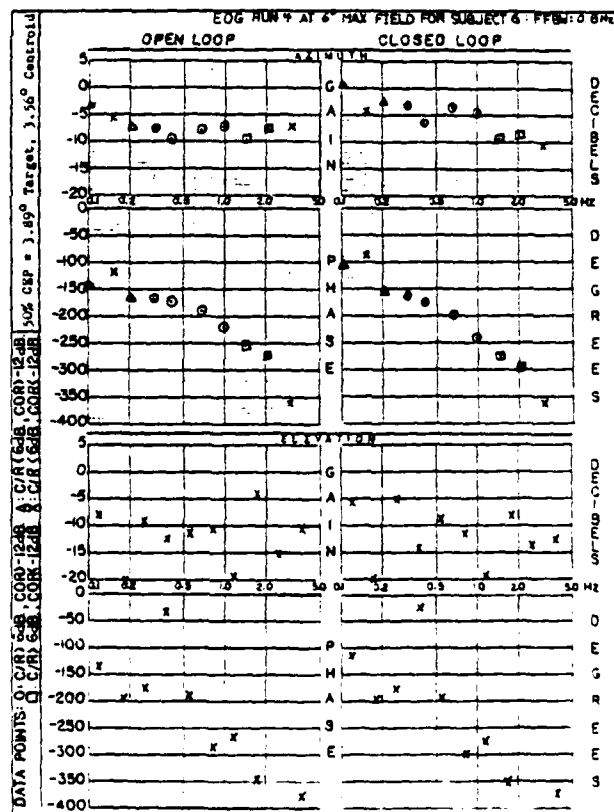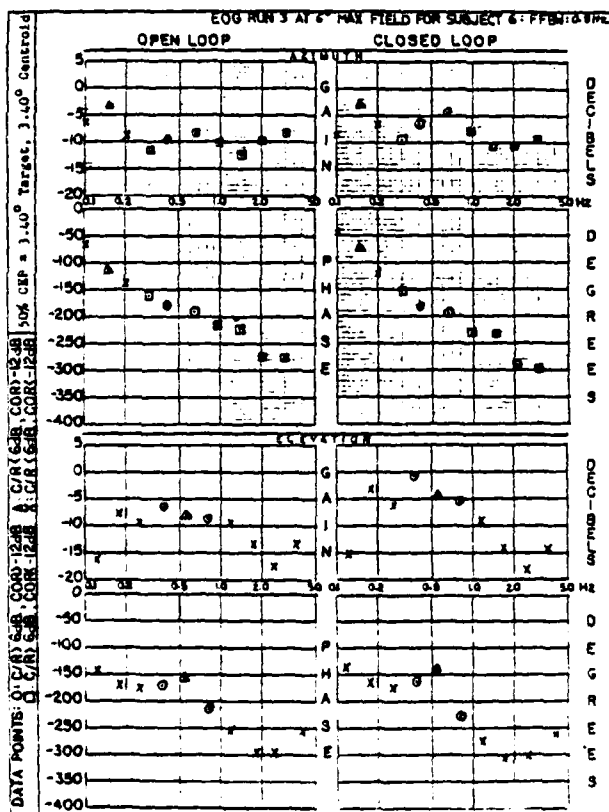




-69-
Figure A-7

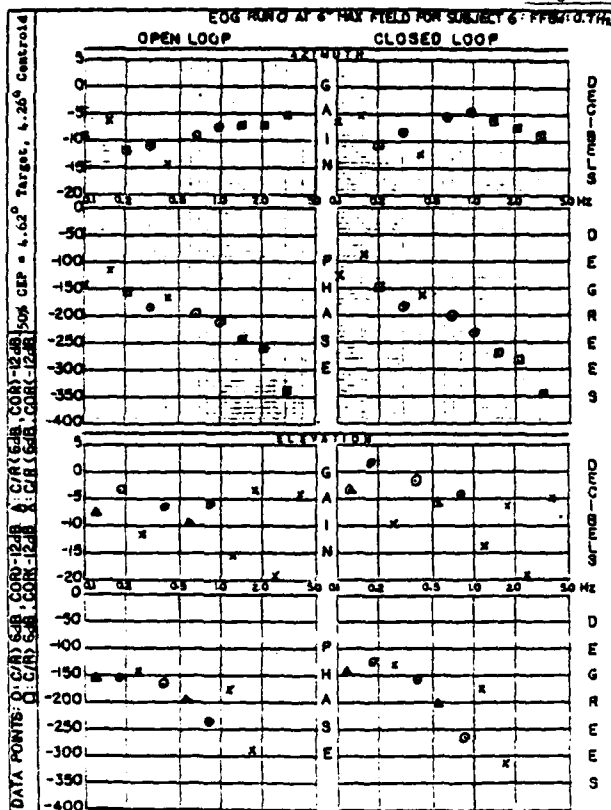





-70-
Figure A-7 (cont.)

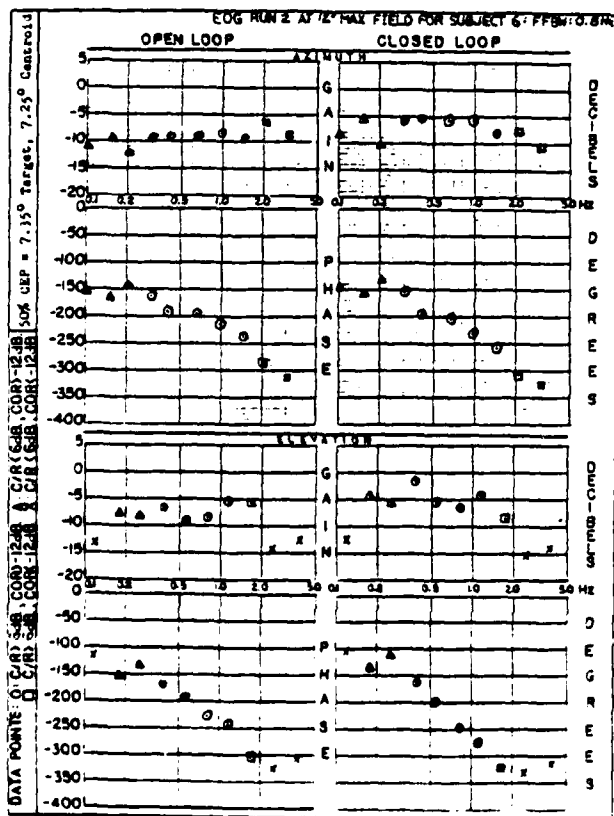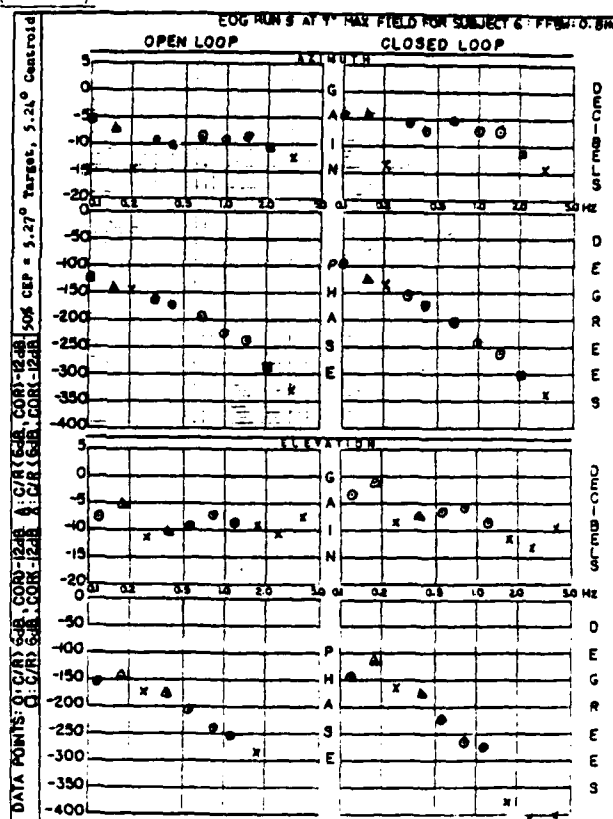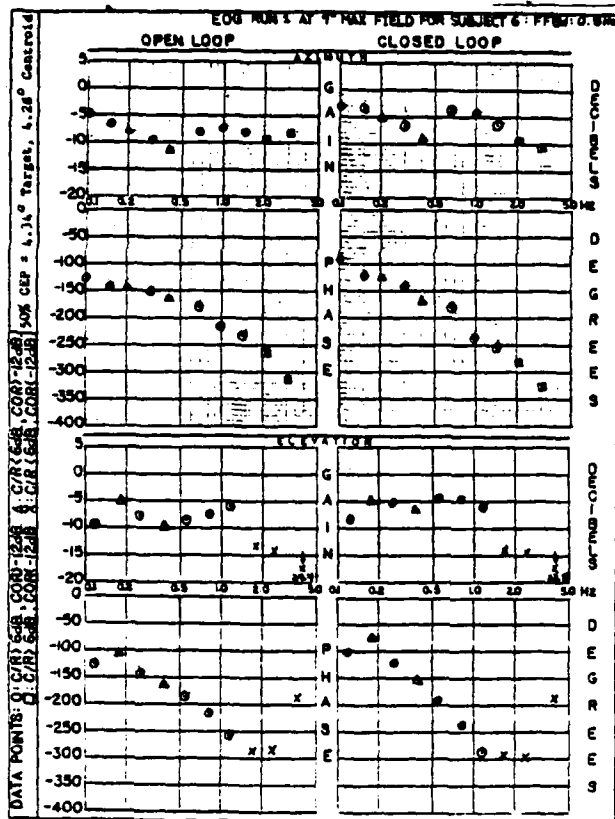

-71-
Figure A-8

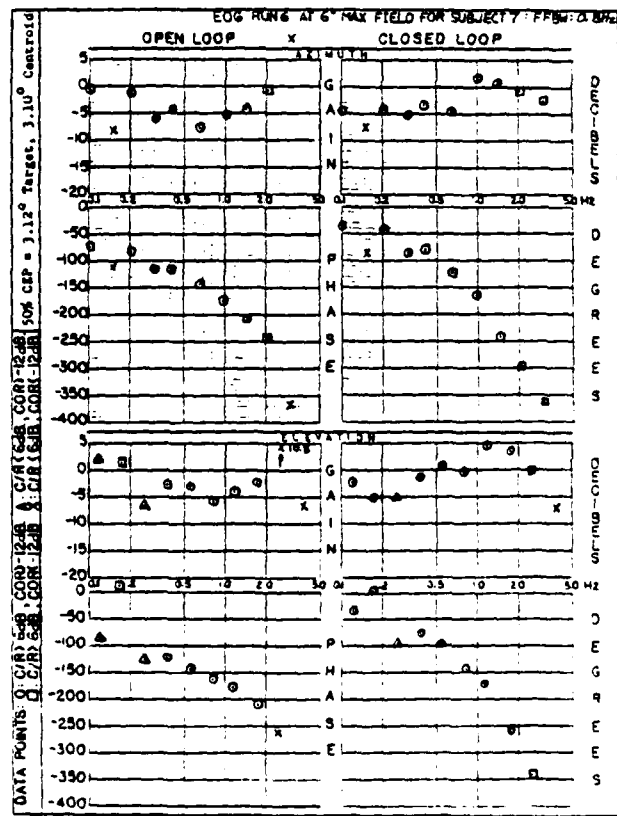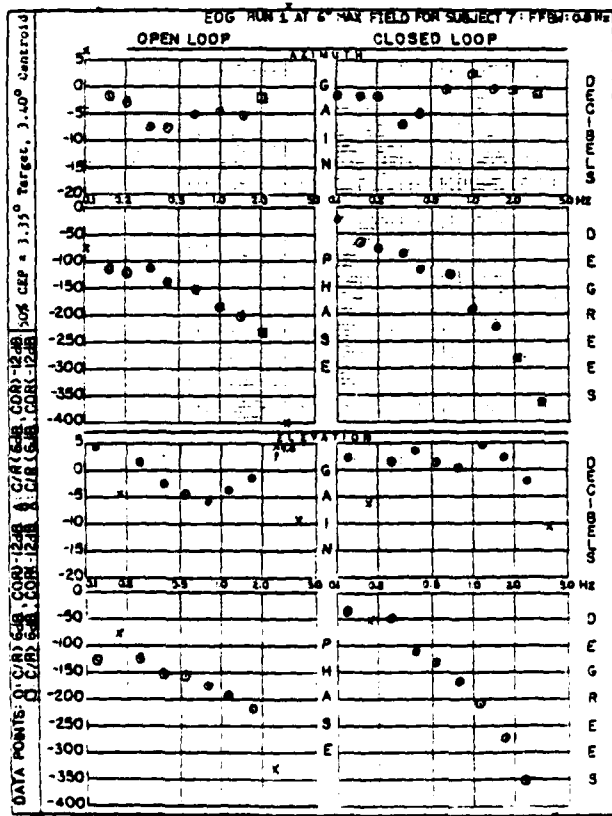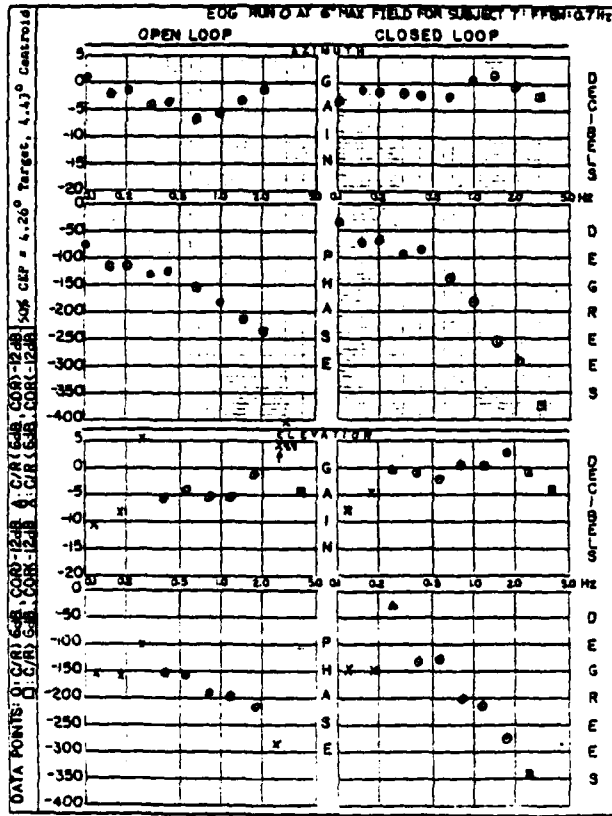

-72-
Figure A-6 (cont.)

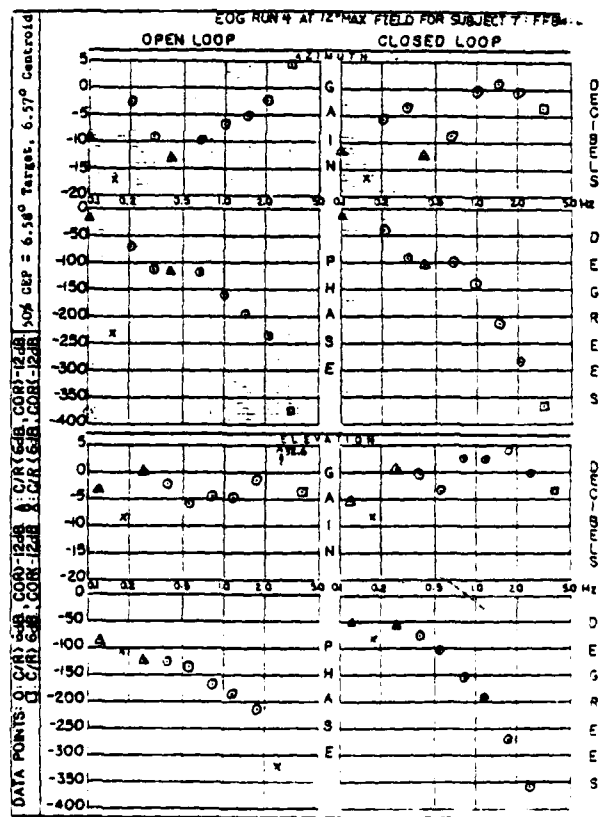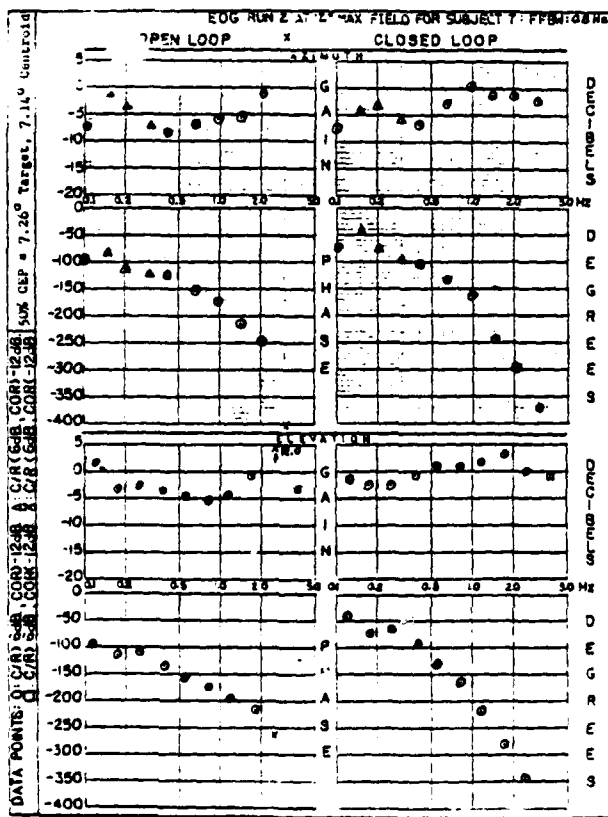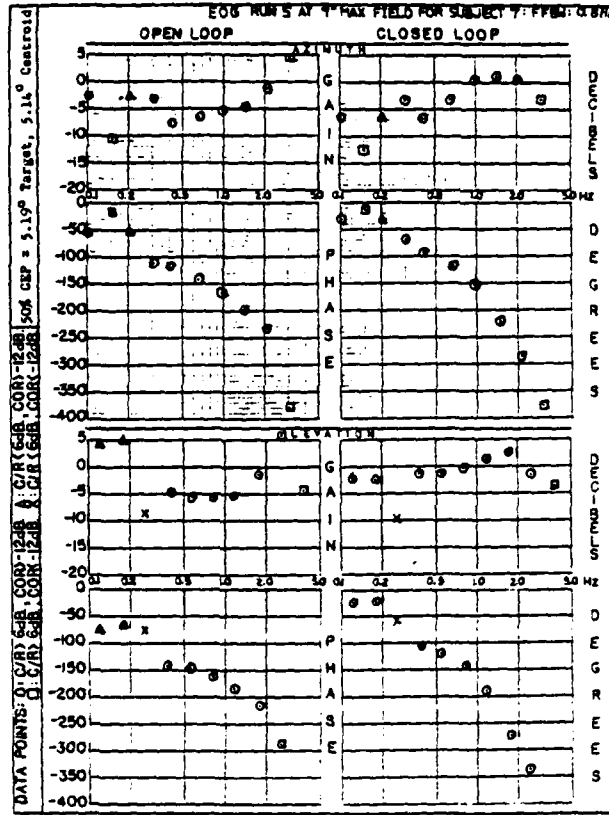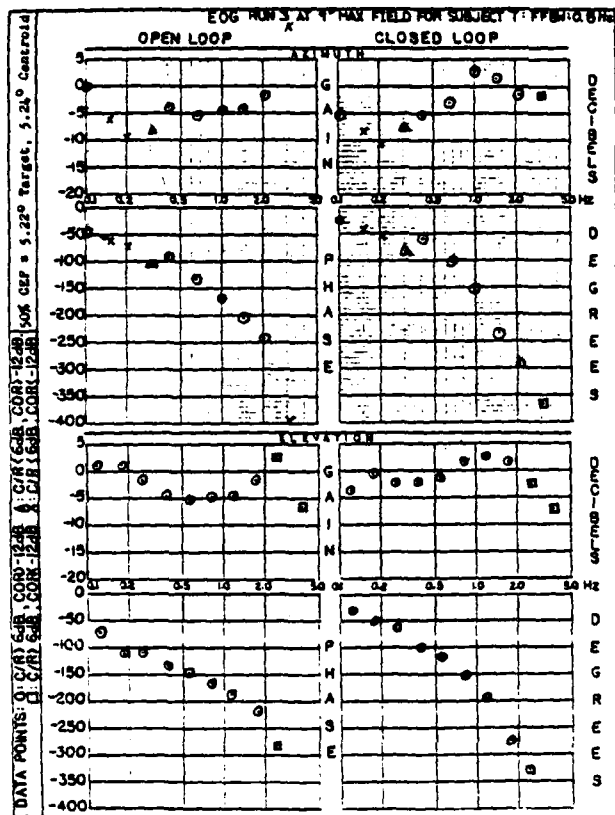











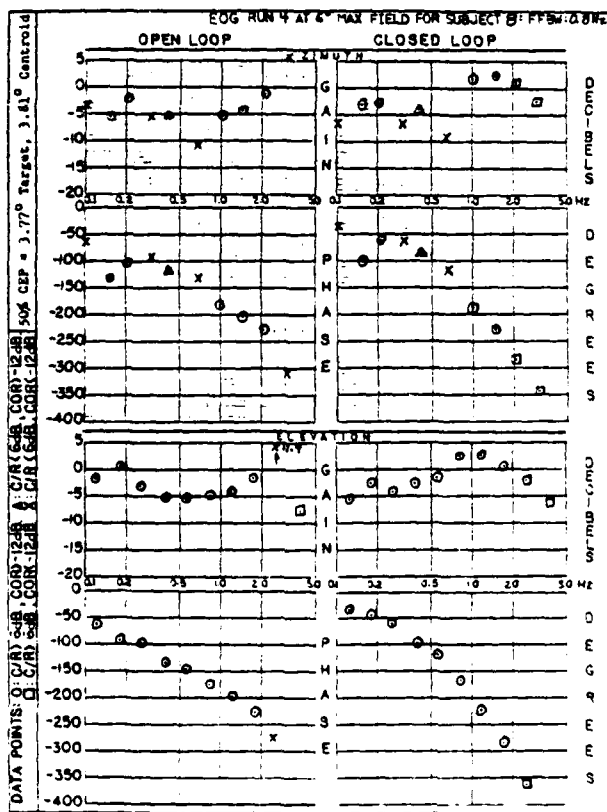






Figure A-9 (cont.)

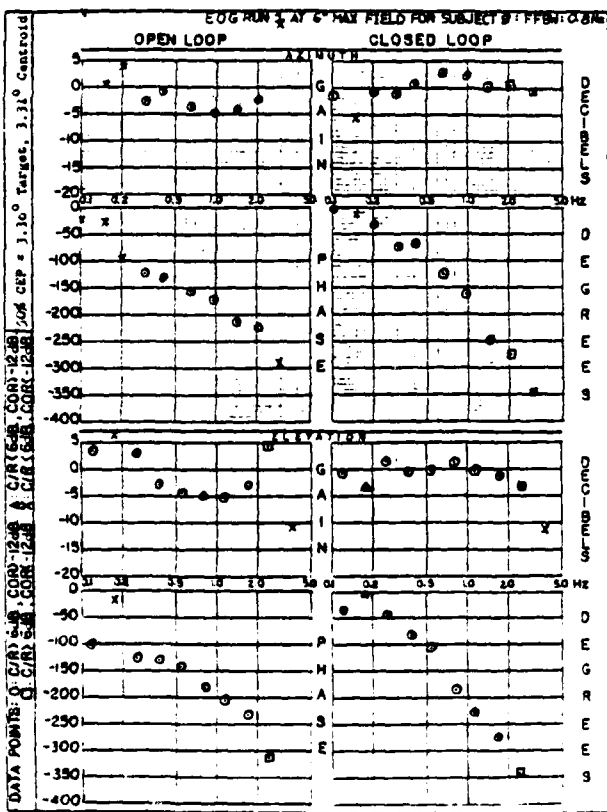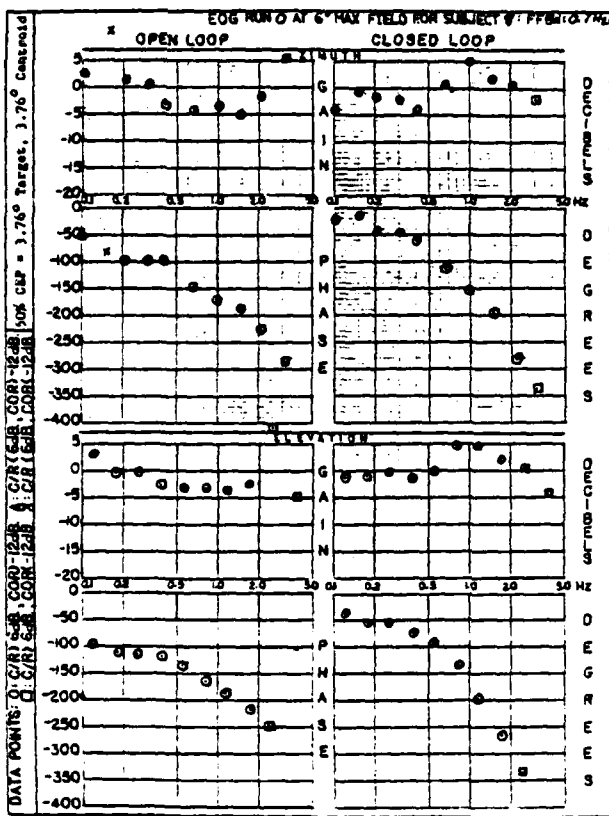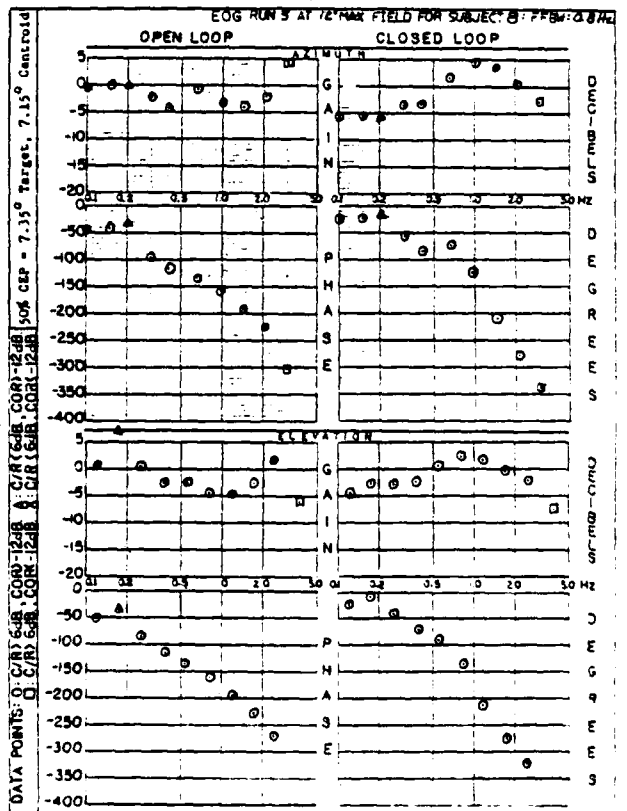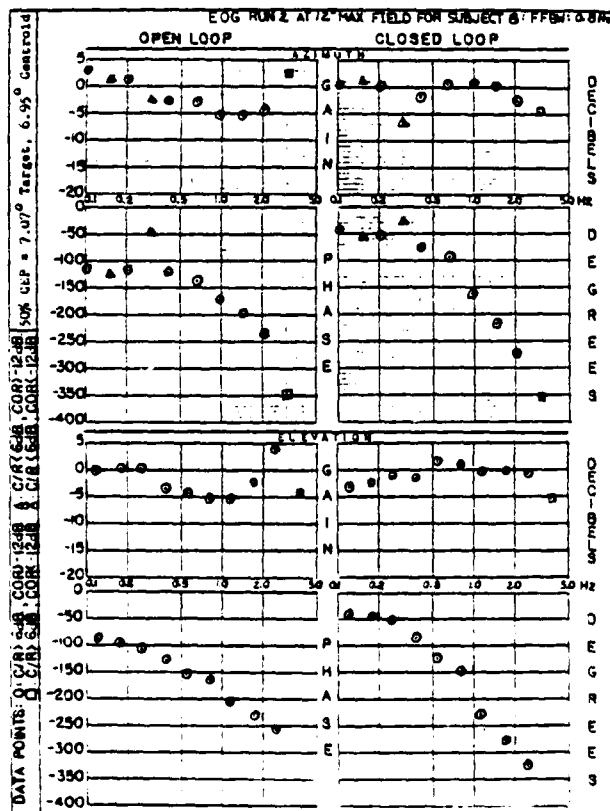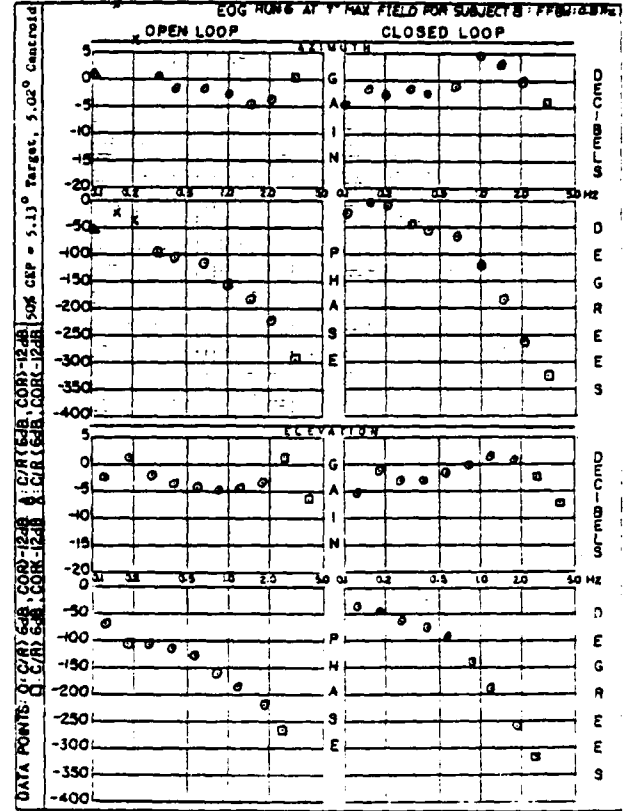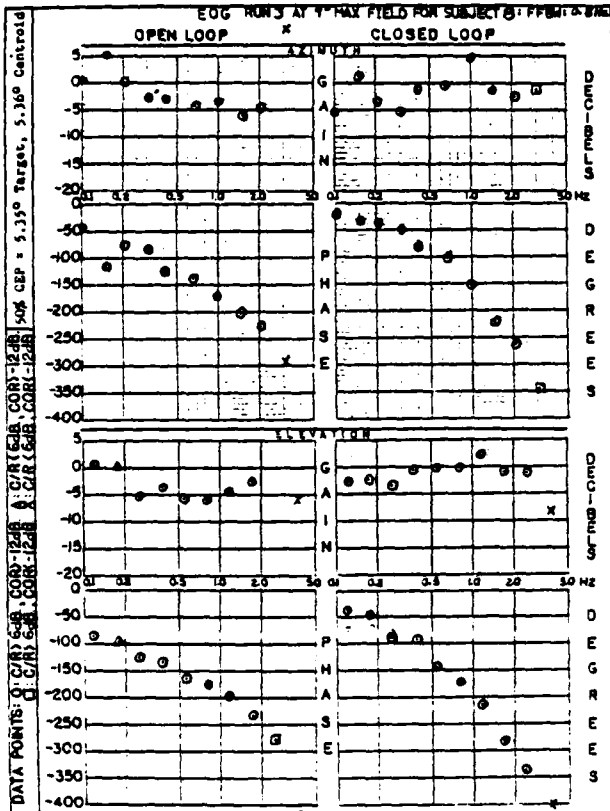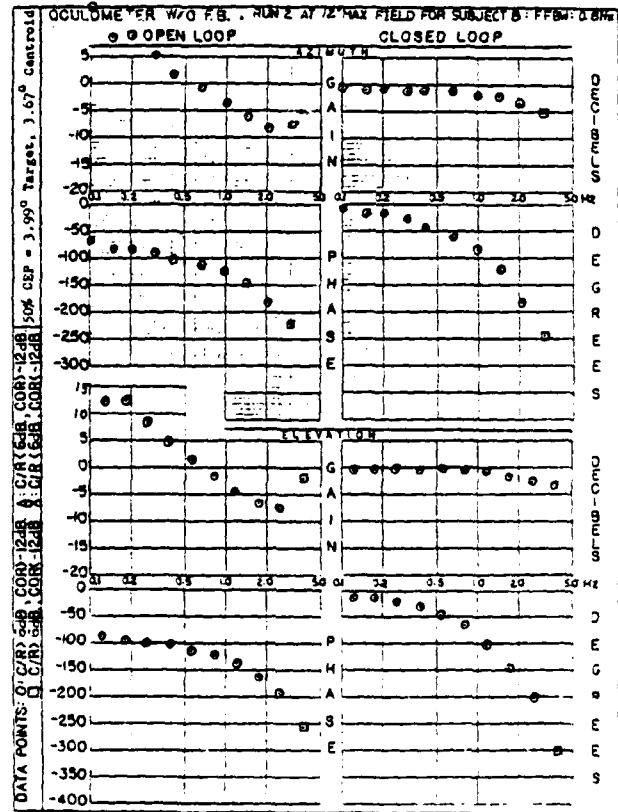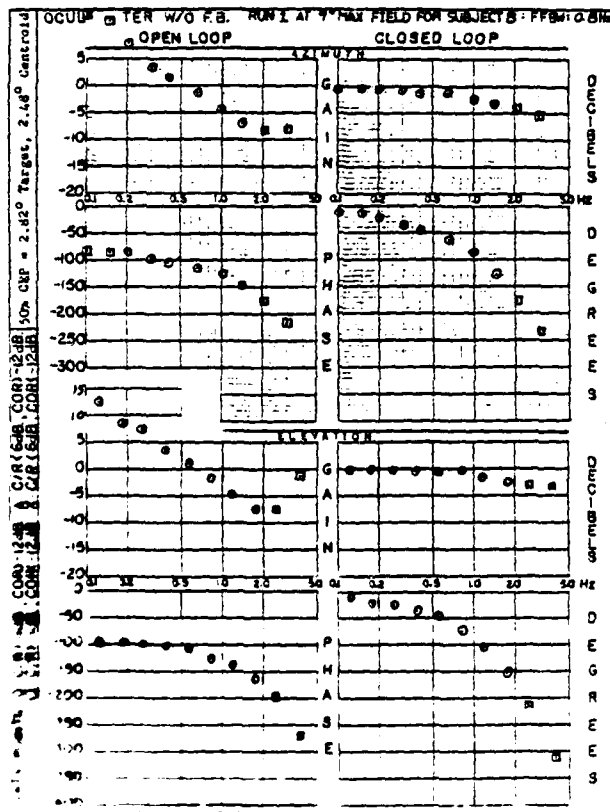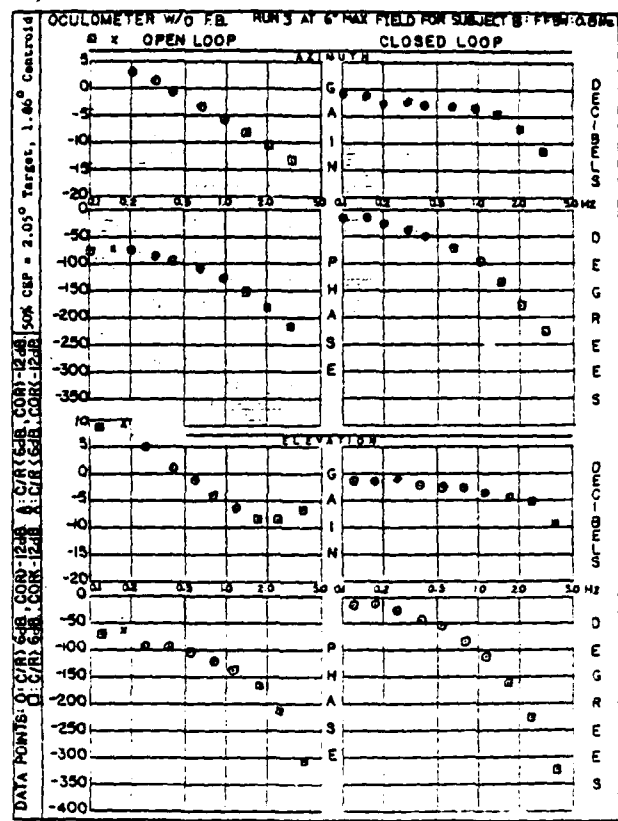

-75-
Figure A-10

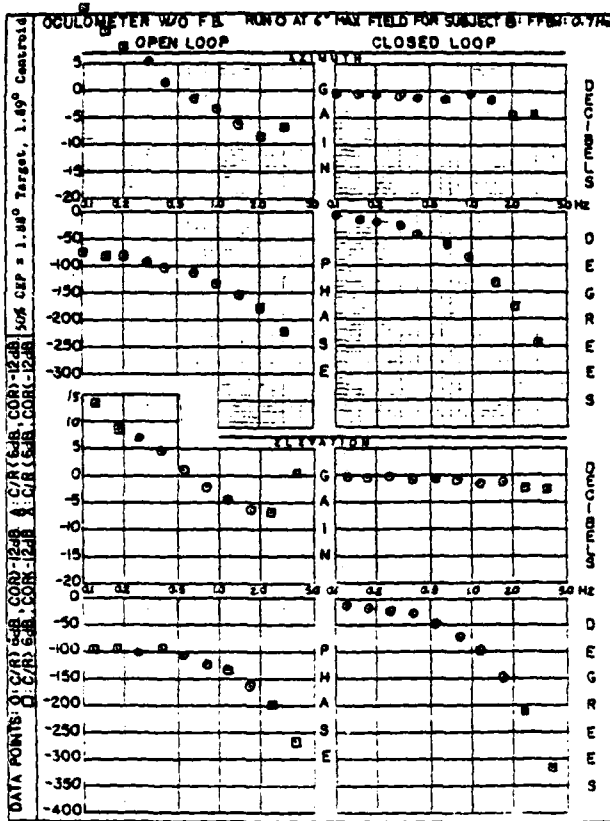

-76-
Figure A-11

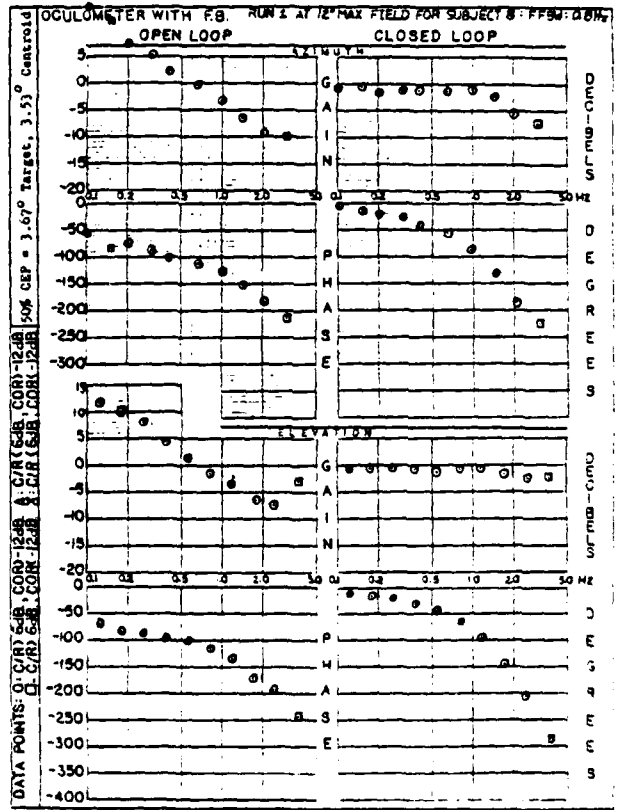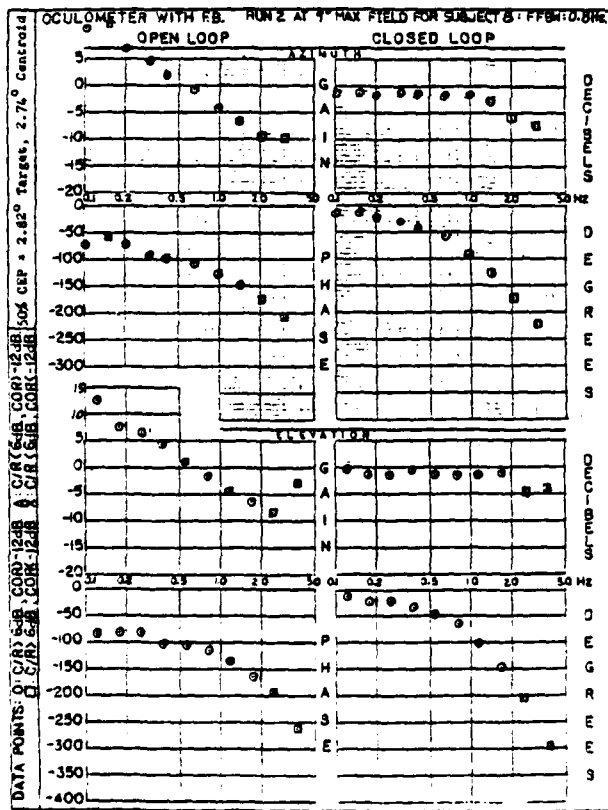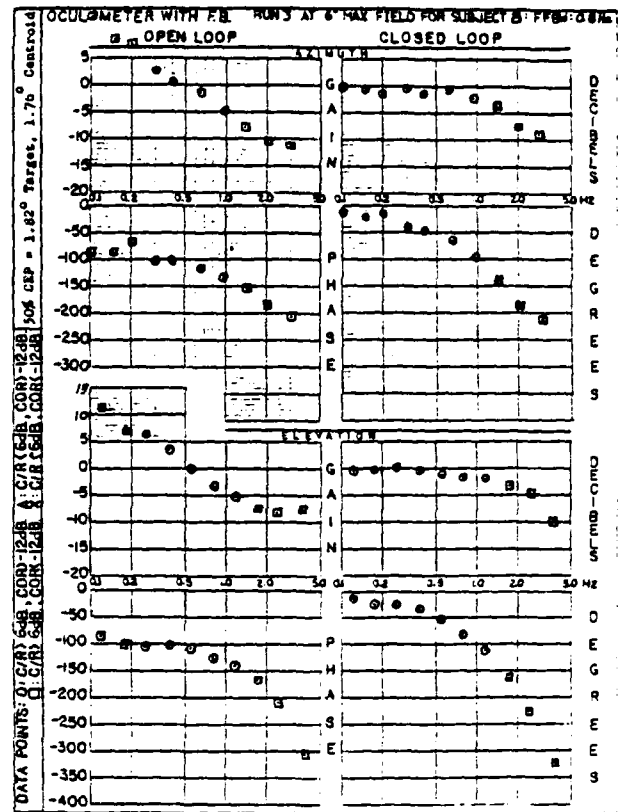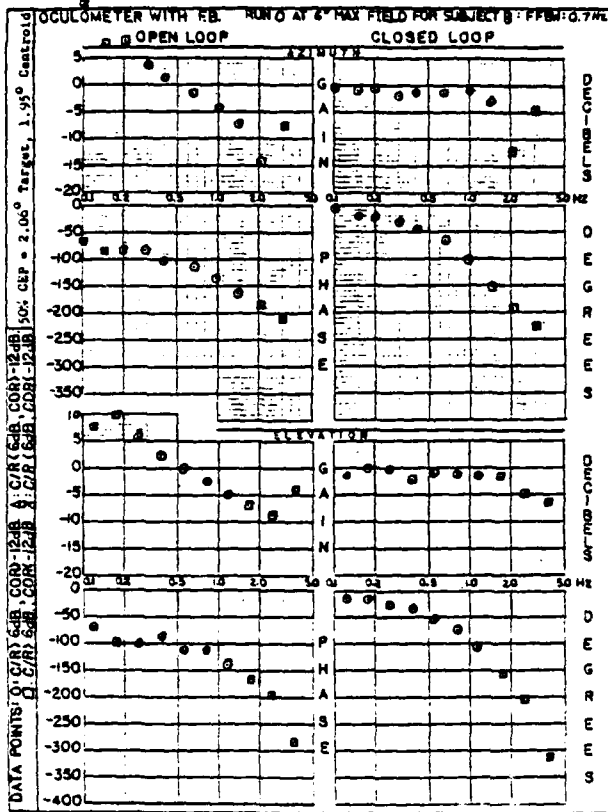

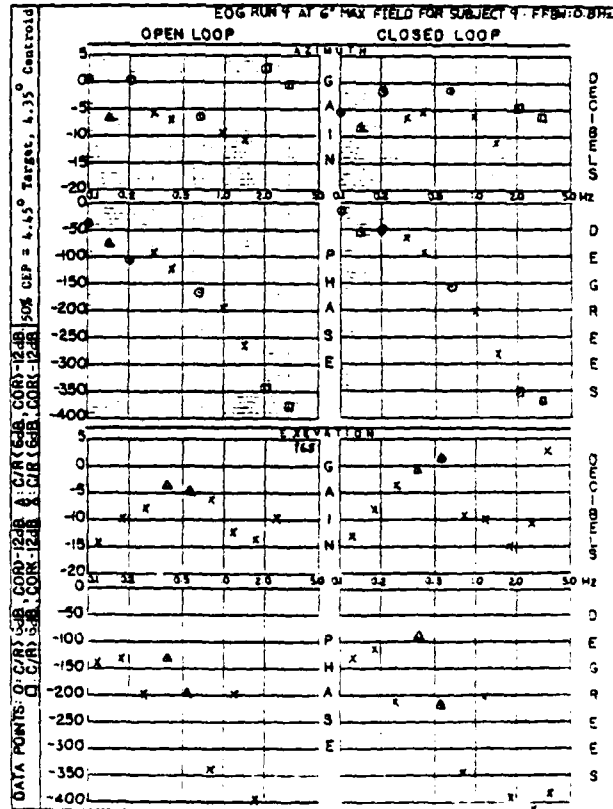
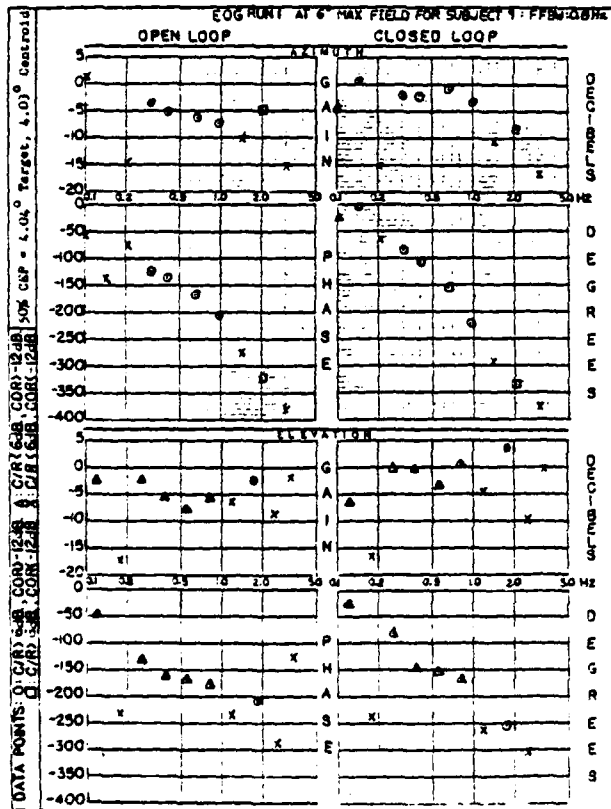


Figure A-12 (cont.)

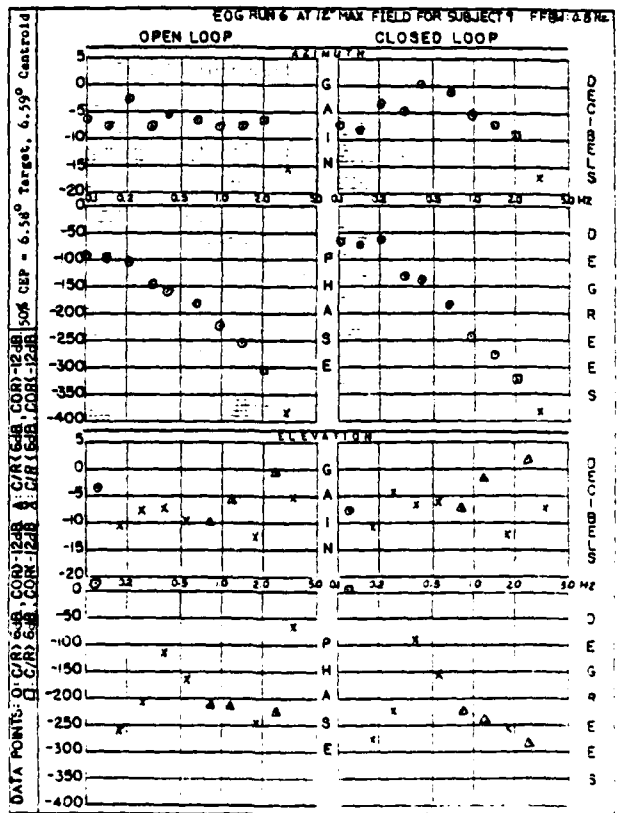
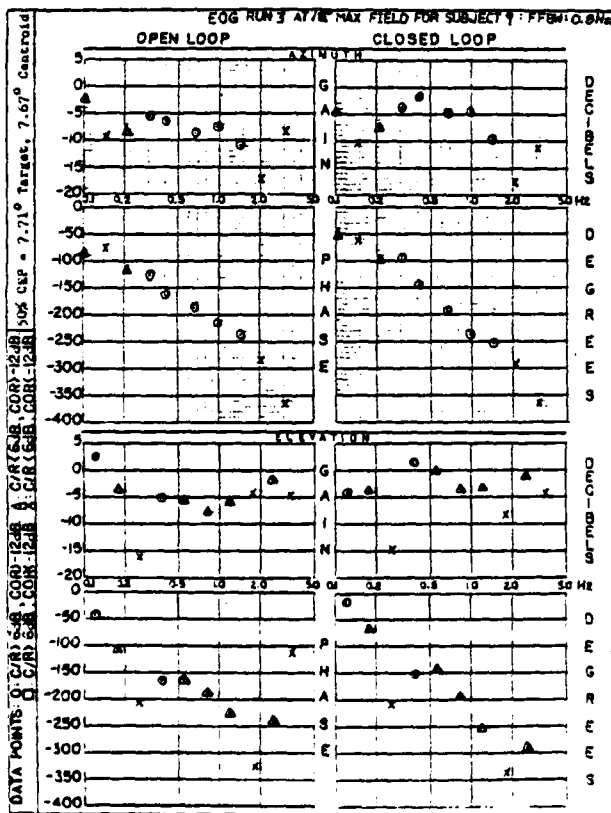
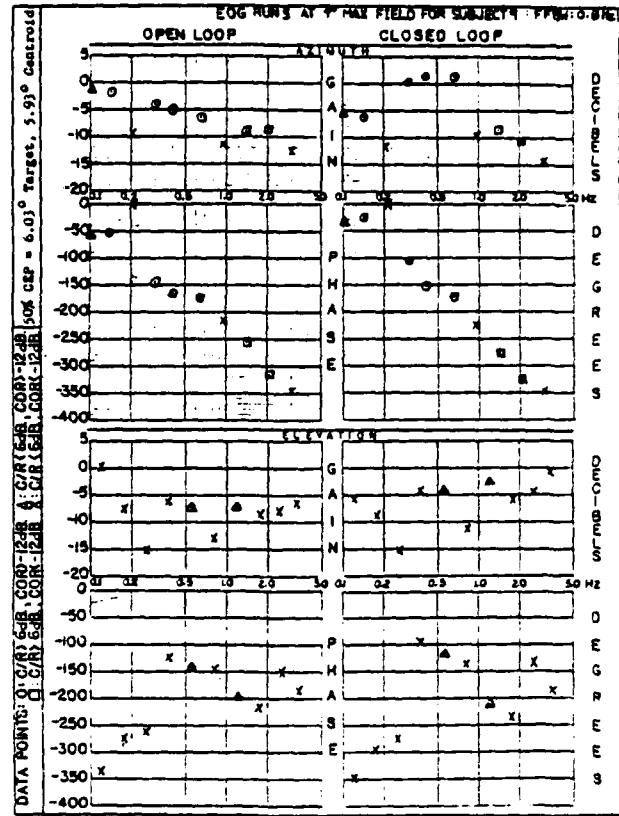
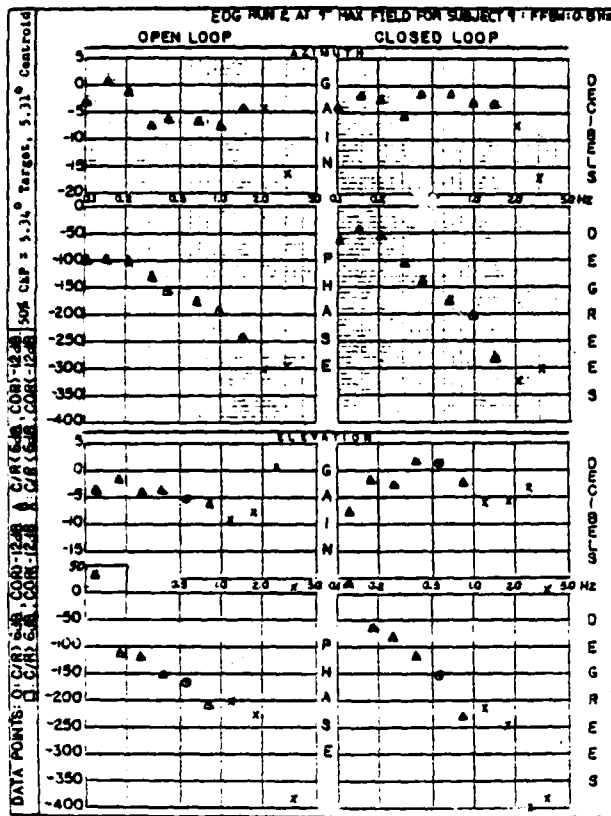
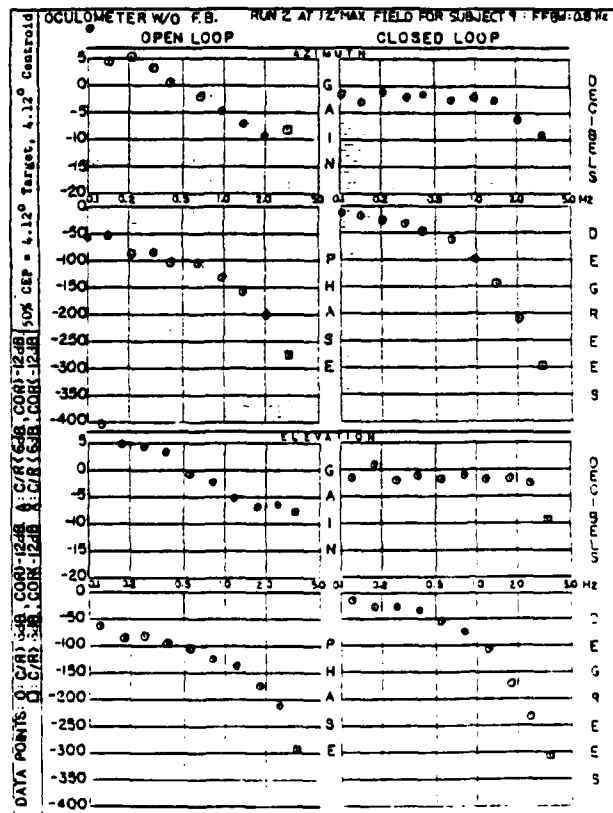
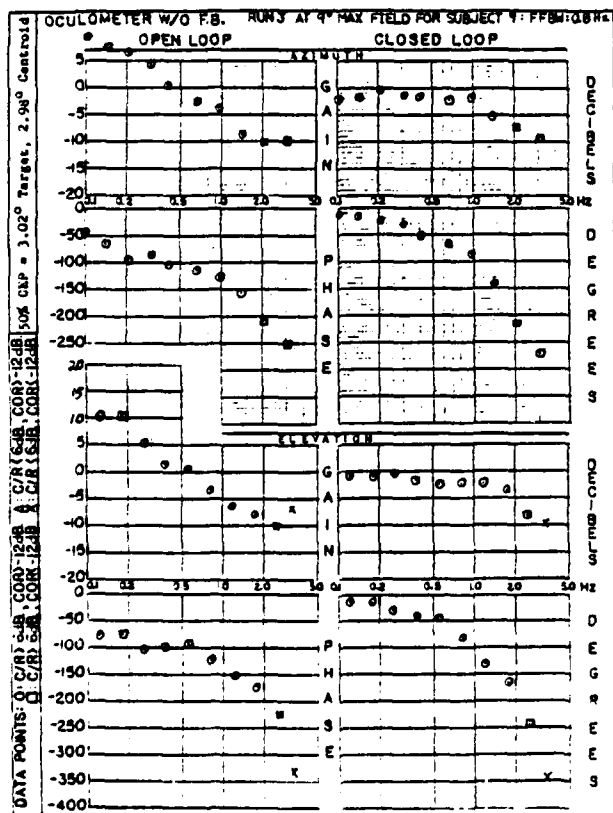
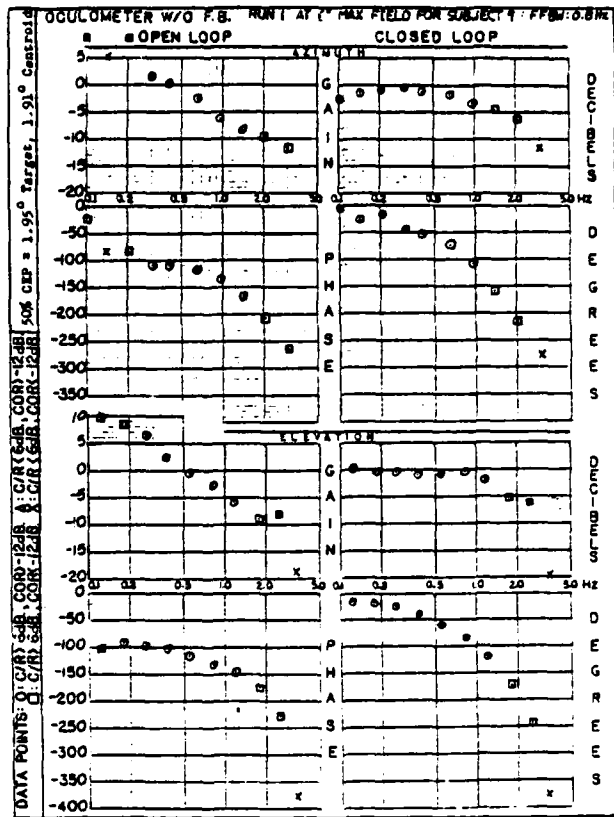
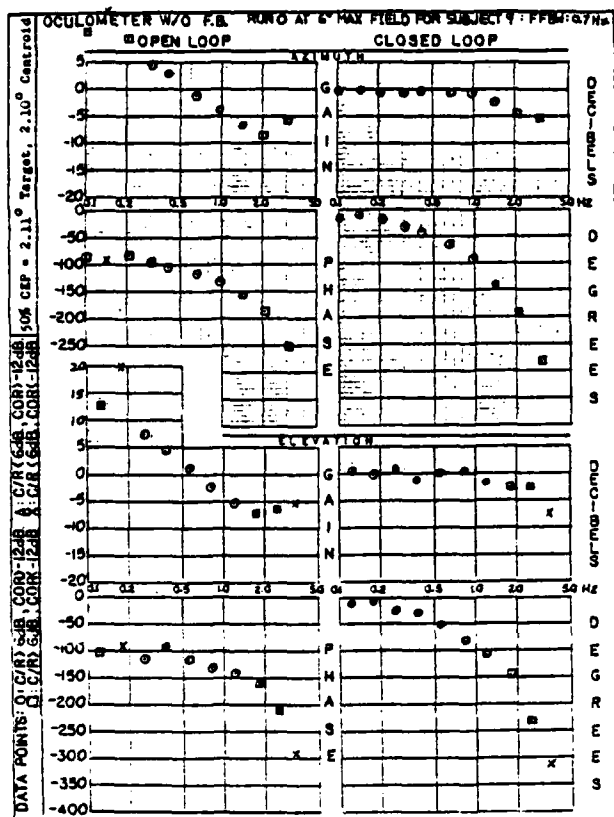
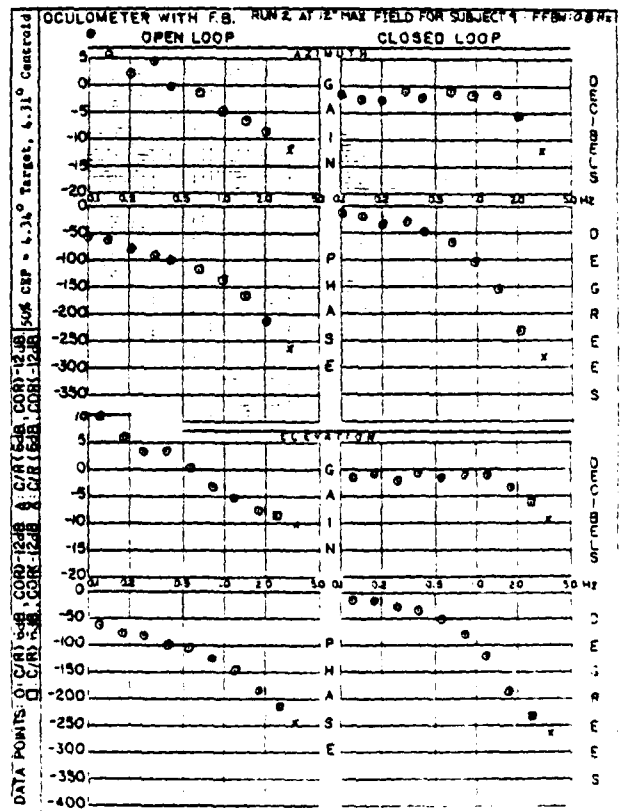
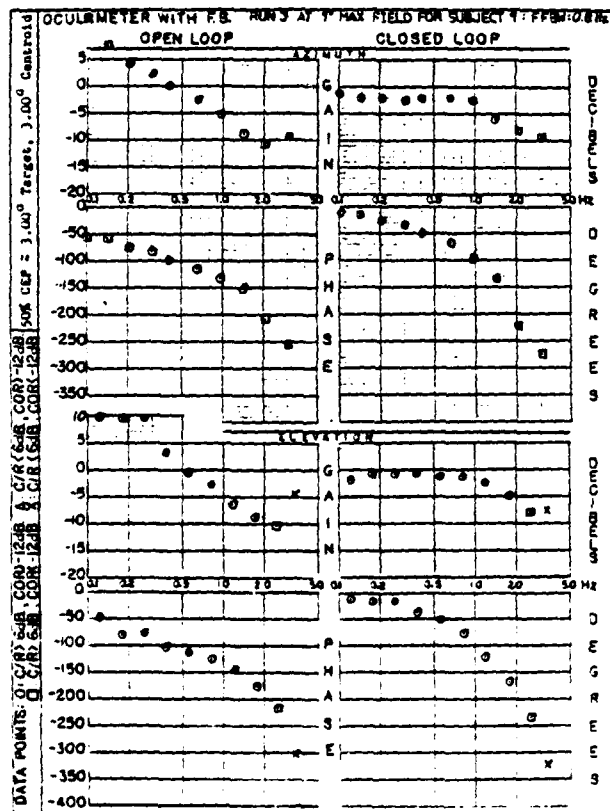
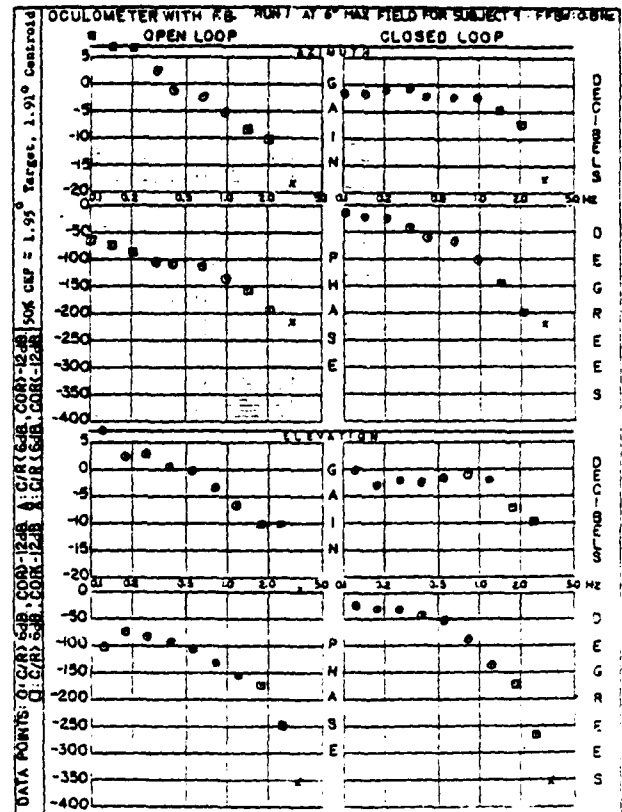
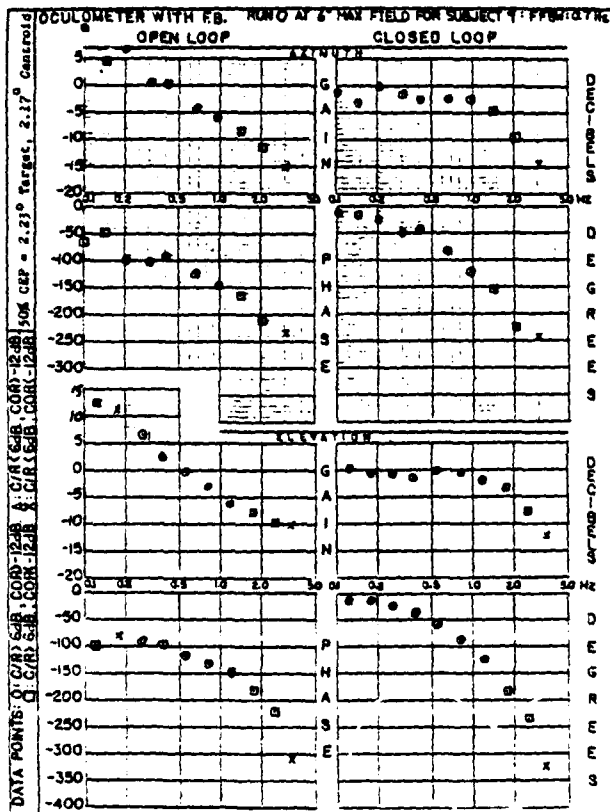


Figure A-13













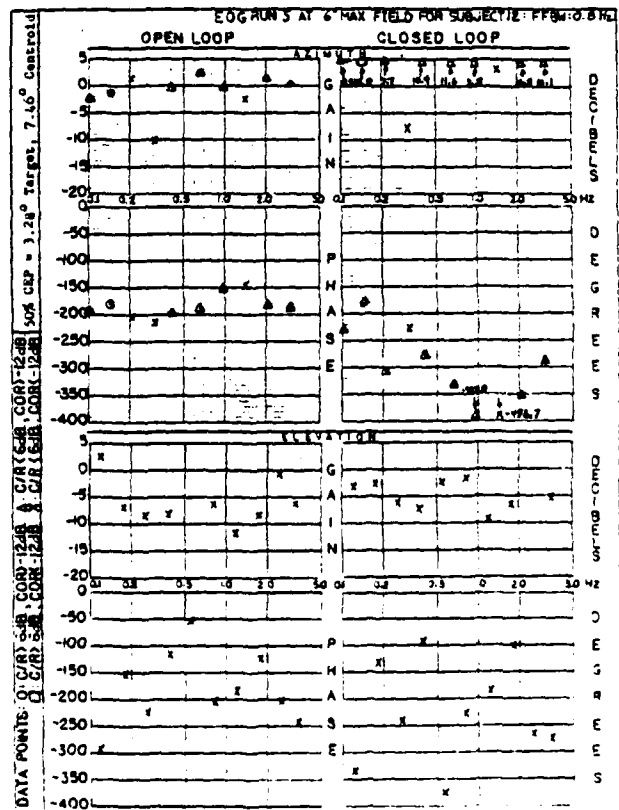


Figure A-15 (cont.)

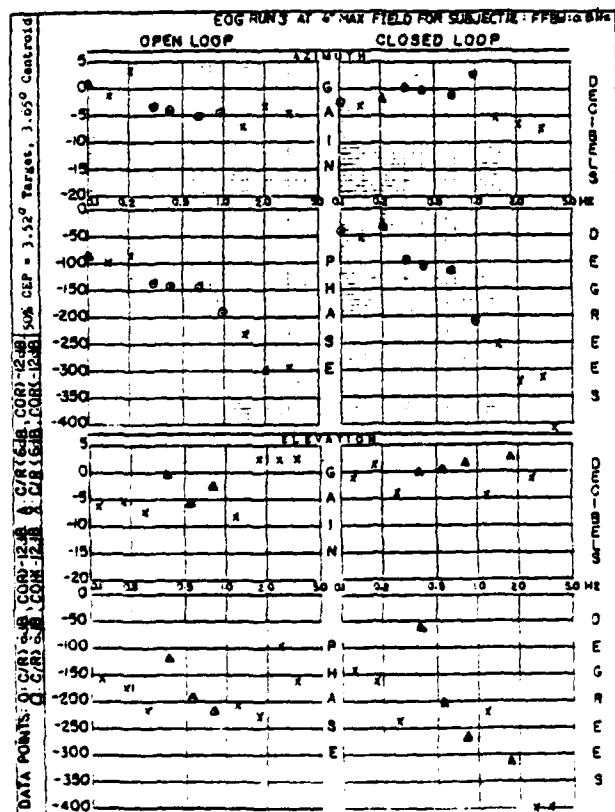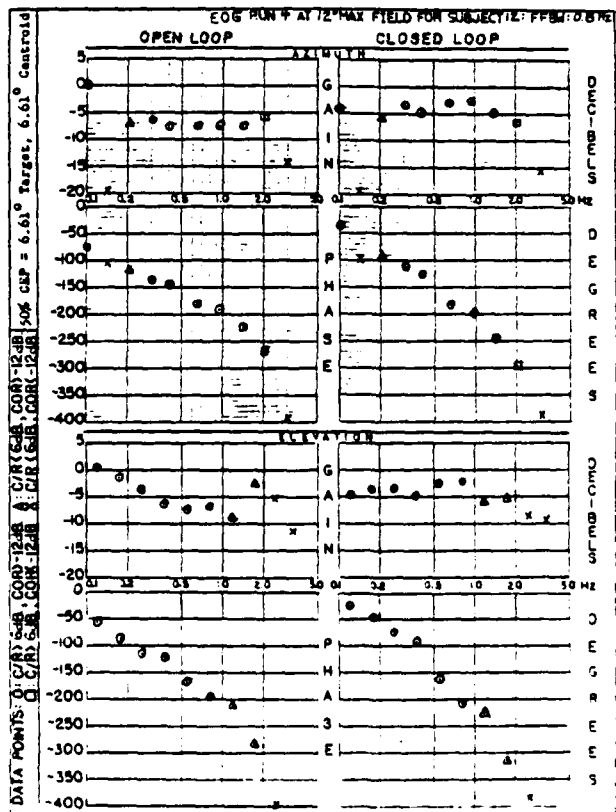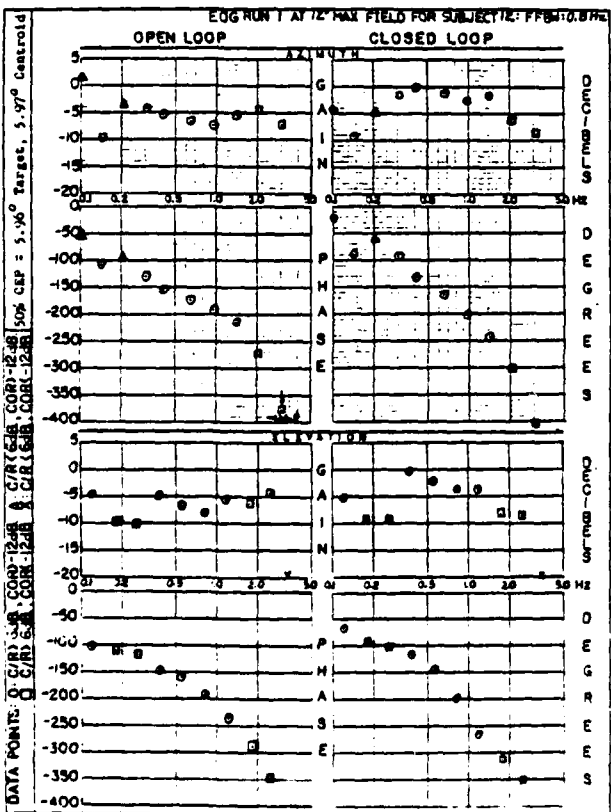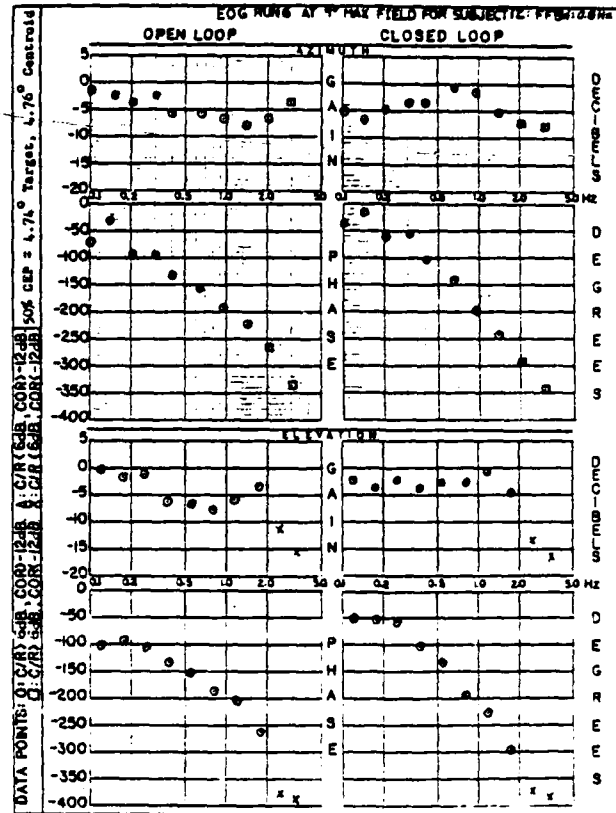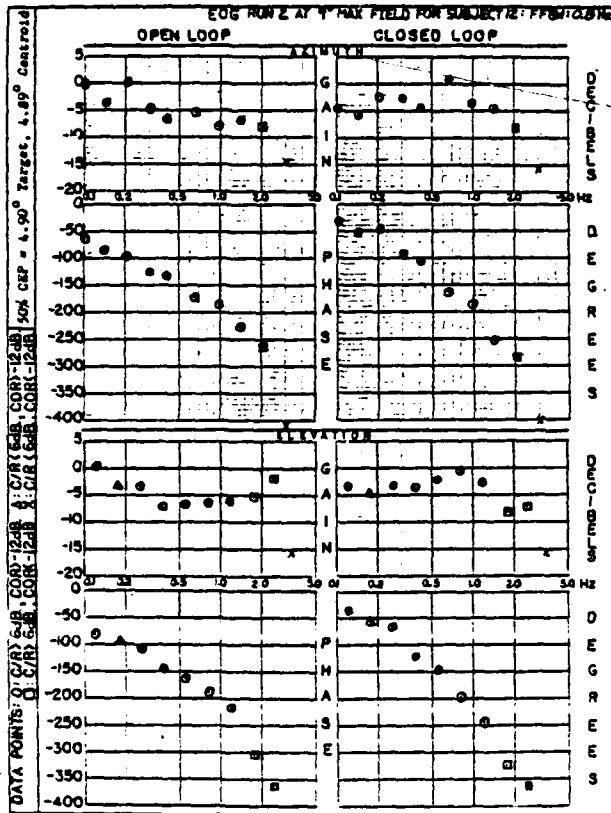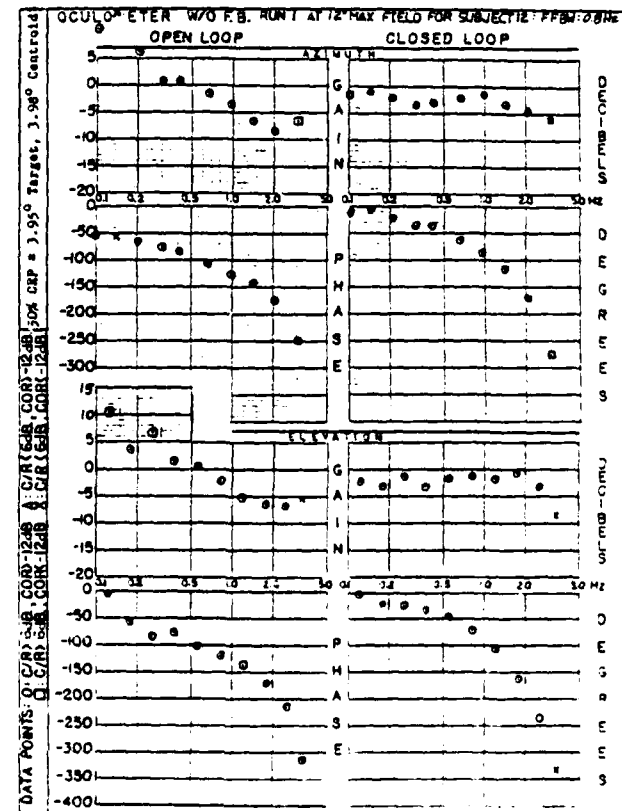

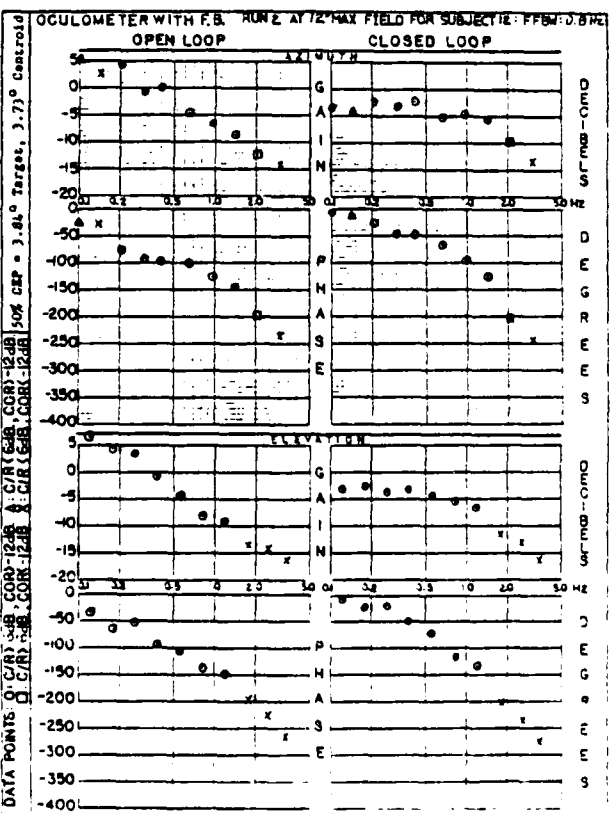

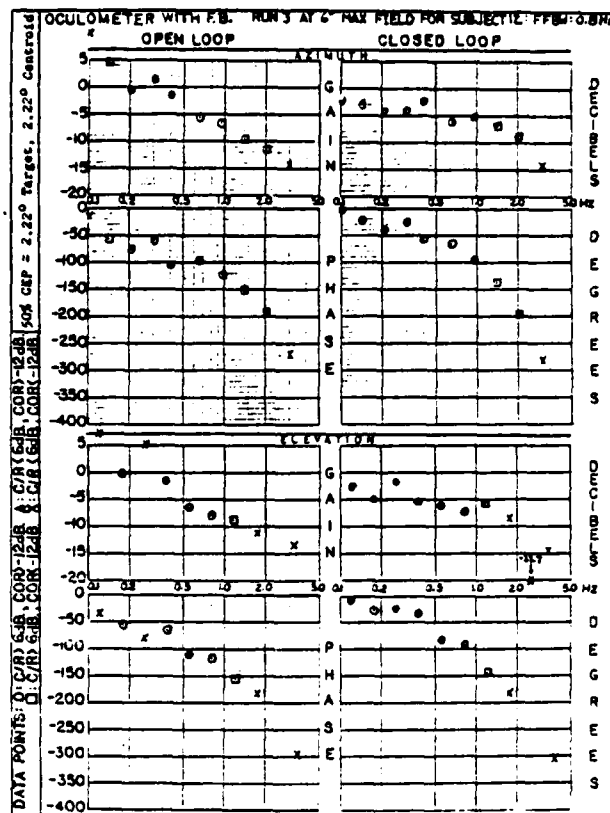

APPENDIX B

FREQUENCY RESPONSE STATISTICS FOR ALL RUNS
WITH BREAK FREQUENCY OF 0.8 HERTZ

Presented are the results of the data evaluation for 69 EOG and 36 oculometer tracking runs on subjects 3-14 as described and summarized in Section 6.

Tables B-1 to B-9 present average values, standard deviations, as well as maxima and minima of both gain and phase angle for each frequency. Each of these tables represents an appropriate group of tracking runs of those considered in Section 6. Also shown are the average values and standard deviations of the 50% CEP.

Figures B-1 to B-9 present the plots corresponding to Tables B-1 to B-9 respectively.

FREQUENCY RESPONSE STATISTICS FOR 24									
SUBJECT NO.:	3,	4,	5,	6,	7,	8,	9,	10,	11,13,14,
NUMBER OF RUNS:	24	24	24	24	24	24	24	24	24
50% CEP TARGET :	AVG. = 3.5 DEG, STD. DEV. = 0.5 DEG, RANGE: 2.4, . . 4.9 DEG								
50% CEP CENTROID:	AVG. = 3.7 DEG, STD. DEV. = 0.9 DEG, RANGE: 2.4, . . 7.5 DEG								

AVERAGE		STAND. DEV.	GAIN-VARIATION			PHASE-VARIATION								
FREQU. (HERTZ)	GAIN (DB)	PHASE (DEG)	GAIN (DB)	PHASE (DEG)	REL. LEV.	MIN (DB)	AV-SD (DB)	MAX (DB)	MIN (DEG)	AV-SD (DEG)	MAX (DEG)			
0.121	-3.1	-71.7	4.5	82.7	FAIR	-15.0	-7.6	1.4	4.2	FAIR	-332.5	-154.5	11.0	-3.2
0.176	-4.8	-97.5	4.9	85.4	ACPT	-19.9	-9.7	0.1	1.1	ACPT	-290.9	-183.0	-12.1	6.3
0.253	-3.4	-115.8	2.9	90.9	ACPT	-9.6	-6.3	-0.5	1.6	ACPT	-347.3	-206.7	-24.9	-24.7
0.374	-2.4	-94.6	3.7	33.8	FAIR	-14.1	-6.1	1.2	3.6	FAIR	-184.8	-128.4	-60.8	-26.4
0.549	-2.2	-138.6	2.6	60.7	FAIR	-8.8	-4.8	0.4	1.2	FAIR	-375.3	-199.2	-77.9	-73.7
0.802	-2.2	-179.9	5.1	59.3	FAIR	-16.3	-7.4	2.9	4.3	FAIR	-344.8	-239.2	-120.6	-80.0
1.165	-3.2	-211.2	5.7	54.5	FAIR	-19.4	-8.9	2.6	4.5	FAIR	-342.3	-265.7	-156.7	-53.9
1.703	-2.2	-259.5	5.3	69.0	FAIR	-15.1	-7.5	3.1	3.5	FAIR	-355.2	-328.6	-190.5	-31.9
2.483	-5.2	-322.7	5.7	78.9	ACPT	-18.1	-10.9	0.4	6.7	ACPT	-508.9	-401.6	-243.8	-58.1
3.626	-6.0	-367.2	6.5	103.6	POOR	-18.6	-12.5	0.4	8.4	POOR	-490.3	-470.8	-263.6	-26.5

AVERAGE		STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION					
FREQU.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	MIN	AV-SD	AV+SD	MAX	
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	LEV.	(DB)	(DB)	(DB)	(DEG)	(DEG)	(DEG)	(DEG)	
0.121	0.7	-111.5	7.3	56.3	ACPT	-16.1	-6.6	7.9	14.4	ACPT	-293.6	-167.9	-55.2
0.176	-3.3	-121.1	7.2	64.5	POOR	-20.7	-10.5	3.9	12.9	POOR	-243.8	-185.6	-56.6
0.253	-3.1	-139.6	4.8	61.9	ACPT	-9.6	-7.9	1.7	13.2	ACPT	-305.1	-201.6	-77.7
0.374	-4.7	-128.4	2.7	29.2	FAIR	-12.5	-7.4	-1.9	-0.2	FAIR	-183.2	-157.6	-99.2
0.549	-5.4	-146.3	3.3	28.0	FAIR	-11.4	-8.7	-2.0	7.6	FAIR	-197.9	-174.3	-118.4
0.802	-6.6	-184.8	3.1	44.9	FAIR	-17.4	-9.7	-3.4	-2.4	FAIR	-337.4	-229.7	-139.9
1.165	-7.2	-199.9	3.6	46.1	FAIR	-19.4	-10.8	-3.6	-3.8	FAIR	-331.4	-246.1	-153.8
1.703	-3.6	-224.1	5.5	58.2	FAIR	-13.8	-9.1	2.0	14.7	FAIR	-346.2	-282.3	-165.9
2.483	-2.5	-270.5	7.7	90.6	POOR	-17.5	-10.2	5.1	11.4	POOR	-514.1	-361.1	-180.0
3.626	-5.2	-272.9	7.2	140.5	POOR	-18.7	-12.4	2.0	7.0	POOR	-484.0	-413.4	-132.5

FREQUENCY RESPONSE STATISTICS FOR 24									
SUBJECT NO.:	3,	4,	5,	6,	7,	8,	9,	10,	11,13,14,
NUMBER OF RUNS:	24	24	24	24	24	24	24	24	24
50% CEP TARGET :	AVG. = 4.7 DEG, STD. DEV. = 0.6 DEG, RANGE: 3.3. . .6.0 DEG								
50% CEP CENTROID:	AVG. = 4.7 DEG, STD. DEV. = 0.6 DEG, RANGE: 3.4. . .5.9 DEG								

AVERAGE		STAND. DEV.	GAIN-VARIATION				PHASE-VARIATION							
FREQ. (HERTZ)	GAIN (DB)	PHASE (DEG)	GAIN (DB)	PHASE (DEG)	REL. LEV.	MIN (DB)	AV-SD (DB)	AV+SD (DB)	MAX (DB)	REL. LEV.	MIN (DEG)	AV-SD (DEG)	AV+SD (DEG)	MAX (DEG)
0.100	-3.7	-38.6	1.6	20.4	GOOD	-6.5	5.3	-2.1	-0.5	GOOD	-92.2	-59.0	-18.1	-16.0
0.143	-5.1	-45.5	3.1	30.9	FAIR	-12.7	-8.3	-2.0	1.1	FAIR	-123.7	-76.4	-14.6	-0.7
0.209	-5.4	-50.0	3.5	30.1	FAIR	-13.6	-8.9	-1.8	-0.6	FAIR	-138.3	-80.1	-19.9	2.3
0.308	-4.6	-78.3	2.5	30.4	GOOD	-9.6	-7.1	-2.1	0.2	GOOD	-153.6	-108.7	-47.9	-36.5
0.450	-5.0	-102.7	3.8	32.3	GOOD	-14.0	-8.8	-1.2	1.4	GOOD	-171.9	-135.0	-70.4	-59.2
0.659	-3.5	-126.2	3.9	34.6	GOOD	-16.1	-7.4	0.4	1.7	GOOD	-205.9	-160.8	-91.6	-68.1
0.967	-2.4	-169.1	4.1	36.0	GOOD	-9.7	-6.5	1.7	4.9	GOOD	-243.3	-205.1	-133.1	-105.2
1.406	-2.7	-224.5	3.9	29.3	GOOD	-10.9	-6.7	1.2	3.0	GOOD	-281.2	-253.8	-195.3	-164.5
2.055	-4.7	-286.8	4.4	22.3	GOOD	-11.7	-9.1	-0.4	0.3	GOOD	-329.2	-309.1	-264.5	-238.9
3.000	-7.9	-351.4	5.8	24.8	FAIR	-17.5	-13.7	-2.1	-0.9	FAIR	-402.6	-376.3	-326.6	-301.5

AVERAGE		STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION					
FREQU.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	MIN	AV-SD	AV+SD	MAX	
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	LEV.	(DB)	(DB)	(DB)	LEV.	(DEG)	(DEG)	(DEG)	
0.100	0.4	-75.6	3.4	24.0	FAIR	-5.8	-3.0	3.8	8.1	FAIR	-126.3	-99.6	-51.6
0.143	-2.0	-74.5	5.5	38.7	FAIR	-10.5	-7.5	3.5	14.1	FAIR	-144.8	-113.2	-35.7
0.209	-2.7	-82.7	5.2	31.0	FAIR	-14.9	-7.9	2.5	7.3	FAIR	-145.2	-113.7	-51.6
0.308	-4.7	-110.4	2.9	25.3	GOOD	-10.8	-7.6	-1.8	0.8	GOOD	-162.5	-135.7	-85.1
0.450	-6.7	-128.4	3.3	24.3	GOOD	-15.0	-10.0	-3.4	-1.5	GOOD	-174.4	-152.7	-104.1
0.659	-6.8	-146.5	2.9	23.5	GOOD	-17.1	-9.7	-4.0	-1.6	GOOD	-196.7	-170.0	-123.0
0.967	-7.1	-174.8	2.2	23.0	GOOD	-11.6	-9.3	-4.9	-2.8	GOOD	-225.1	-197.8	-151.7
1.406	-6.8	-206.7	2.3	21.6	GOOD	-13.0	-9.1	-4.5	-4.0	GOOD	-256.8	-228.3	-185.1
2.055	-5.1	-253.1	3.6	27.9	GOOD	-12.6	-8.7	-1.6	-1.2	GOOD	-318.2	-281.0	-225.1
3.000	-2.5	-324.3	9.6	70.3	ACFT	-16.6	-12.1	7.1	11.0	ACFT	-409.9	-394.6	-254.0

AD-A102 369 NEW JERSEY INST OF TECH NEWARK DEPT OF ELECTRICAL EN--ETC F/6 6/16
DYNAMICS OF TWO-DIMENSIONAL EYE-HEAD TRACKING. (U)
JUN 81 A U MEYER

UNCLASSIFIED

AFOSR-TR-81-0610

NL

2 of 2

811 A
102 564

END
DATE
FILMED
9-81
DTIC

Table B-2 (b)

FREQUENCY RESPONSE STATISTICS FOR 24									
SUBJECT NO.:	3,	4,	5,	6,	7,	8,	9,	10,	11,13,14,
NUMBER OF RUNS:	24	24	24	24	24	24	24	24	24
50% CEP TARGET :	AVG.= 4.7 DEG, STD. DEV.= 0.6 DEG, RANGE: 3.3. . .6.0 DEG								
50% CEP CENTROID:	AVG.= 4.7 DEG, STD. DEV.= 0.6 DEG, RANGE: 3.4. . .5.9 DEG								

ELEVATION CLOSED LOOP

AVERAGE			STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION				
FREQU.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	REL.	MIN	AV-SD	AV+SD	MAX
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	LEV.	(DB)	(DB)	(DB)	(DB)	LEV.	(DEG)	(DEG)	(DEG)
0.121	-3.8	-51.6	2.8	70.5	GOOD	-12.3	-6.6	-1.0	0.5	GOOD	-349.0	-122.1	18.8
0.176	-2.9	-73.3	2.6	85.3	FAIR	-8.7	-5.4	-0.3	2.6	FAIR	-382.9	-158.6	11.9
0.253	-5.0	-91.6	3.3	72.7	FAIR	-15.3	-8.3	-1.7	-0.7	FAIR	-312.6	-164.3	-18.9
0.374	-2.8	-104.0	3.0	34.2	GOOD	-10.7	-5.7	0.2	1.9	GOOD	-195.4	-138.2	-69.8
0.549	-2.7	-122.1	2.7	37.9	GOOD	-9.5	-5.4	-0.0	1.4	GOOD	-223.2	-160.0	-84.2
0.802	-2.3	-164.4	3.7	44.8	FAIR	-11.3	-6.0	1.3	3.3	FAIR	-266.1	-209.2	-119.6
1.165	-2.4	-211.4	4.4	30.0	GOOD	-16.7	-6.8	2.0	3.3	GOOD	-287.9	-241.5	-181.4
1.703	-3.3	-271.1	4.8	42.5	FAIR	-14.1	-8.1	1.5	4.6	FAIR	-377.1	-313.6	-228.6
2.483	-6.2	-324.7	5.1	69.8	ACPT	-14.6	-11.3	-1.1	1.5	ACPT	-412.9	-394.4	-254.9
3.626	-8.5	-364.1	7.0	81.0	POOR	-23.8	-15.5	-1.4	2.7	POOR	-454.7	-445.0	-283.1

ELEVATION OF OPEN LOOP

AVERAGE		STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION						
FREQU.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	MIN	AV-SD	AV+SD			
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	LEV.	(DB)	(DB)	(DB)	(DEG)	(DEG)	(DEG)			
						MAX					MAX			
						(DB)					(DEG)			
0.121	0.4	-97.9	5.0	76.5	FAIR	-10.8	-4.6	5.4	10.1	FAIR	-337.7	-174.4	-21.4	30.5
0.176	0.1	-100.4	4.8	48.2	ACPT	-7.8	-4.6	4.9	11.1	ACPT	-275.8	-148.7	-52.2	-9.8
0.253	-4.3	-119.0	4.4	56.6	FAIR	-15.4	-8.7	0.1	4.3	FAIR	-277.5	-175.6	-62.5	-28.8
0.374	-5.1	-135.5	2.8	22.6	GOOD	-12.8	-7.9	-2.4	-1.7	GOOD	-191.9	-158.1	-112.9	-97.4
0.549	-5.9	-144.9	2.3	26.2	GOOD	-10.2	-8.2	-3.6	0.8	GOOD	-209.8	-171.2	-118.7	-85.8
0.802	-6.7	-171.5	2.1	29.6	FAIR	-13.0	-8.8	-4.7	-4.1	FAIR	-239.9	-201.1	-141.9	-95.0
1.165	-7.0	-199.5	2.7	21.8	GOOD	-17.7	-9.7	-4.3	-4.0	GOOD	-259.3	-221.3	-177.6	-168.9
1.703	-5.4	-242.0	3.1	47.7	FAIR	-13.4	-8.4	-2.3	-0.7	FAIR	-383.1	-289.7	-194.3	-178.4
2.483	-4.0	-294.3	6.3	92.5	ACPT	-14.0	-10.4	2.3	6.9	ACPT	-441.7	-386.8	-201.8	-62.5
3.626	-6.7	-338.5	8.5	129.0	POOR	-24.4	-15.2	1.7	11.4	POOR	-546.2	-467.5	-209.5	-94.7

Table B-3 (a)

```

FREQUENCY RESPONSE STATISTICS FOR 21          E O G      RUNS AT 12 DEG MAX. FIELD
SUBJECT NO.: 3, 4, 5, 6, 7, 8, 9, 12, 10, 11, 13, 14,
NUMBER OF RUNS: 2+ 1+ 1+ 2+ 2+ 2+ 2+ 2+ 2+ 2+ 2+ 2+ 2+ 2+ 2+ 2+ 2+ 2+ 2+ 2+ 2+ 2+ 2+
                    50% CEP TARGET : AVG.= 6.2 DEG, STD. DEV.= 1.0 DEG, RANGE: 3.8. . . 7.7 DEG
                    50% CEP CENTROID: AVG.= 6.2 DEG, STD. DEV.= 1.0 DEG, RANGE: 3.7. . . 7.7 DEG

```

AZIMUTH CLOSED LOOP

AVERAGE			STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION					
FREQU. (HERTZ)	GAIN (DB)	PHASE (DEG)	GAIN (DB)	PHASE (DEG)	REL. LEV. (DB)	MIN (DB)	AU-SD (DB)	AV+SD (DB)	MAX (DB)	REL. LEV. (DEG)	MIN (DEG)	AU-SD (DEG)	AV+SD (DEG)	MAX (DEG)
0.100	-5.0	-42.6	3.0	29.4	GOOD	-11.9	-8.0	-2.0	0.4	GOOD	-146.9	-72.0	-13.3	-13.3
0.143	-6.5	-61.2	4.6	51.3	FAIR	-19.5	-11.1	-1.8	1.2	FAIR	-238.4	-112.5	-9.9	-12.2
0.209	-4.5	-58.6	2.5	26.4	FAIR	-10.3	-7.1	-2.0	0.1	FAIR	-131.7	-85.1	-32.2	-17.6
0.308	-4.4	-79.4	2.3	29.8	GOOD	-8.5	-6.7	-2.1	-0.6	GOOD	-153.7	-109.2	-49.6	-28.7
0.450	-3.8	-104.3	2.8	33.9	GOOD	-12.5	-6.6	-1.0	0.2	GOOD	-195.8	-138.3	-70.4	-56.1
0.659	-2.9	-130.3	2.8	38.1	GOOD	-8.8	-5.7	-0.1	2.8	GOOD	-203.1	-168.4	-92.2	-73.5
0.967	-2.5	-170.3	3.1	35.9	GOOD	-8.0	-5.7	0.6	4.1	GOOD	-241.9	-206.1	-134.4	-118.0
1.406	-3.0	-222.9	3.7	25.9	GOOD	-10.0	-6.7	0.7	3.8	GOOD	-279.3	-248.8	-197.0	-174.1
2.055	-4.7	-284.4	4.5	21.1	GOOD	-17.6	-9.3	-0.2	1.7	GOOD	-323.6	-305.5	-263.3	-237.2
3.000	-8.0	-358.6	5.4	21.6	FAIR	-17.0	-13.4	-2.5	-1.1	FAIR	-407.7	-380.2	-337.0	-324.3

AZIMUTH OPEN LOOP

AVERAGE		STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION						
FREQU.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	MAX	REL.	MIN	AV-SD	AV+SD	MAX
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	LEV.	(DB)	(DB)	(DB)	(DB)	LEV.	(DEG)	(DEG)	(DEG)	(DEG)
0.100	-1.2	-75.1	5.2	29.5	GOOD	-11.1	-6.4	4.0	6.2	GOOD	-155.7	-104.6	-45.6	-18.9
0.143	-3.8	-88.6	6.6	43.9	FAIR	-19.7	-10.4	2.7	6.4	FAIR	-231.6	-132.5	-44.8	-38.4
0.209	-2.9	-94.0	3.7	27.2	FAIR	-12.1	-6.6	0.8	3.9	FAIR	-142.4	-121.1	-66.8	-27.5
0.308	-4.6	-112.5	3.2	24.1	GOOD	-9.3	-7.8	-1.4	2.0	GOOD	-162.5	-136.6	-88.3	-48.7
0.450	-5.9	-131.0	2.3	25.6	GOOD	-13.1	-8.2	-3.5	-2.9	GOOD	-190.3	-156.6	-105.4	-88.3
0.659	-6.3	-150.7	2.1	23.6	GOOD	-9.8	-8.5	-4.2	-0.9	GOOD	-195.3	-174.3	-127.1	-113.3
0.967	-7.1	-175.2	1.7	22.2	GOOD	-10.9	-8.8	-5.4	-3.2	GOOD	-221.2	-197.4	-153.0	-136.3
1.406	-7.1	-206.0	2.2	19.7	GOOD	-12.4	-9.2	-4.9	-4.0	GOOD	-254.7	-225.7	-186.3	-175.8
2.055	-5.2	-250.2	4.0	24.1	GOOD	-17.2	-9.2	-1.2	-1.0	GOOD	-307.5	-274.3	-226.1	-221.5
3.000	-2.5	-350.9	8.9	39.5	FAIR	-15.8	-11.4	6.4	9.4	FAIR	-426.8	-390.4	-311.3	-278.5

Table B-3 (b)

FREQUENCY RESPONSE STATISTICS FOR 21										
SUBJECT NO.: 3, 4, 5, 6, 7, 8, 9, 12, 10, 11, 13, 14,										
NUMBER OF RUNS:		21	11	11	21	21	21	21	21	E D G
50% CEP TARGET		: AVG. = 6.2 DEG,		STD. DEV. = 1.0 DEG,		RANGE: 3.8,		. 7.7 DEG		
50% CEP CENTROID:		: AVG. = 6.2 DEG,		STD. DEV. = 1.0 DEG,		RANGE: 3.7,		. 7.7 DEG		

ELEVATION CLOSED LOOP

AVERAGE		STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION						
FREQ.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	MAX	REL.	MIN	AV-SD	AV+SD	MAX
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	LEV.	(DB)	(DB)	(DB)	(DB)	LEV.	(DEG)	(DEG)	(DEG)	(DEG)
0.121	-4.0	-51.2	2.7	71.2	GOOD	-12.4	-6.7	-1.3	-0.8	GOOD	-351.0	-122.5	20.0	-6.9
0.176	-4.7	-65.4	3.0	56.2	FAIR	-11.7	-7.6	-1.7	0.6	FAIR	-277.0	-121.6	-9.2	-10.6
0.253	-4.7	-81.9	3.7	55.3	FAIR	-14.8	-8.4	-1.0	0.5	FAIR	-221.6	-137.3	-26.6	-26.1
0.374	-2.2	-92.8	2.4	27.5	GOOD	-7.2	-4.6	0.1	1.5	GOOD	-163.2	-120.3	-65.3	-48.7
0.549	-2.9	-118.8	2.8	35.9	GOOD	-8.8	-5.7	-0.1	1.7	GOOD	-200.8	-154.7	-83.0	-40.1
0.802	-1.9	-157.3	2.7	39.9	GOOD	-7.1	-4.6	0.8	2.7	GOOD	-249.3	-197.2	-117.5	-93.5
1.165	-2.7	-205.5	3.3	37.2	GOOD	-10.0	-6.1	0.6	2.3	GOOD	-274.7	-242.7	-168.3	-132.2
1.703	-5.1	-271.4	6.8	33.9	FAIR	-25.5	-11.8	1.7	4.0	FAIR	-338.8	-305.3	-237.5	-190.1
2.483	-5.3	-324.9	5.0	47.5	FAIR	-17.6	-10.3	-0.3	1.9	FAIR	-412.2	-372.4	-277.4	-184.3
3.626	-8.9	-379.5	6.3	100.8	POOR	-22.6	-15.2	-2.7	1.1	POOR	-499.4	-480.3	-278.7	-130.2

ELEVATION OPEN LOOP

AVERAGE			STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION					
FREQU.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	MAX	REL.	MIN	AV-SD	AV+SD	MAX
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	LEV.	(DB)	(DB)	(DB)	(DB)	LEV.	(DEG)	(DEG)	(DEG)	(DEG)
0.121	1.3	-86.2	5.8	63.5	FAIR	-13.2	-4.6	7.1	16.0	FAIR	-345.1	-149.7	-22.7	-20.5
0.176	-2.2	-96.8	5.5	47.0	ACPT	-10.6	-7.7	3.4	8.8	ACPT	-260.0	-143.8	-49.8	-35.2
0.253	-4.0	-113.8	4.9	40.6	FAIR	-16.1	-8.9	1.0	4.2	FAIR	-205.9	-154.3	-73.2	-55.1
0.374	-4.2	-128.7	2.3	18.3	GOOD	-8.8	-6.5	-1.9	1.0	GOOD	-170.8	-147.0	-110.3	-102.5
0.549	-6.0	-142.2	2.1	28.1	GOOD	-9.5	-8.1	-4.0	-0.6	GOOD	-193.7	-170.2	-114.1	-58.0
0.802	-6.5	-170.2	1.4	25.1	GOOD	-9.7	-7.9	-5.1	-4.4	GOOD	-228.5	-195.3	-145.1	-125.0
1.165	-6.9	-196.1	2.1	24.1	GOOD	-12.4	-9.0	-4.8	-4.6	GOOD	-241.8	-220.2	-172.0	-148.1
1.703	-6.7	-243.0	5.5	37.0	FAIR	-25.5	-12.2	-1.2	-0.8	FAIR	-326.0	-280.0	-206.0	-186.1
2.483	-1.6	-296.0	9.7	62.6	ACPT	-16.8	-11.3	8.1	32.6	ACPT	-428.8	-358.6	-233.4	-182.6
3.626	-8.0	-315.2	7.3	155.1	POOR	-23.2	-15.3	-0.7	5.1	POOR	-509.5	-470.4	-160.1	-67.0

Figure B-1

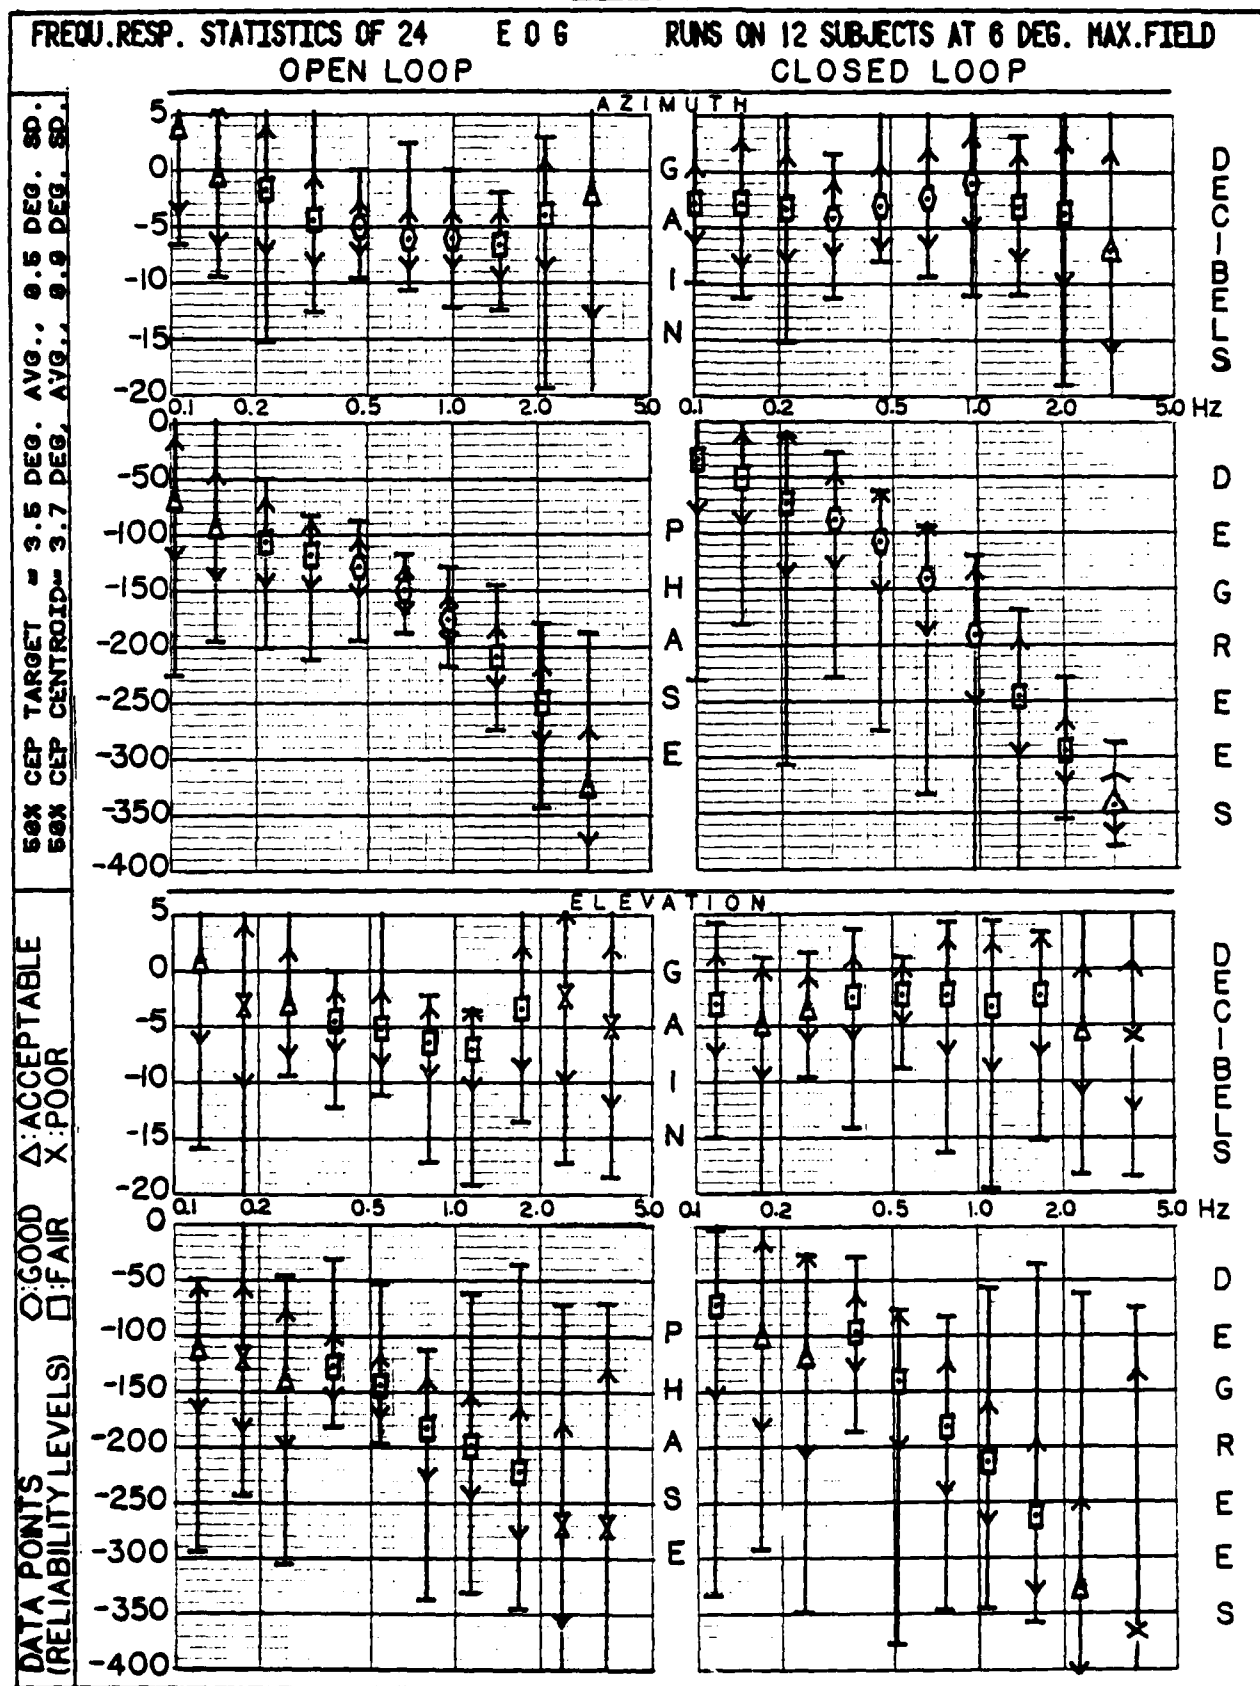
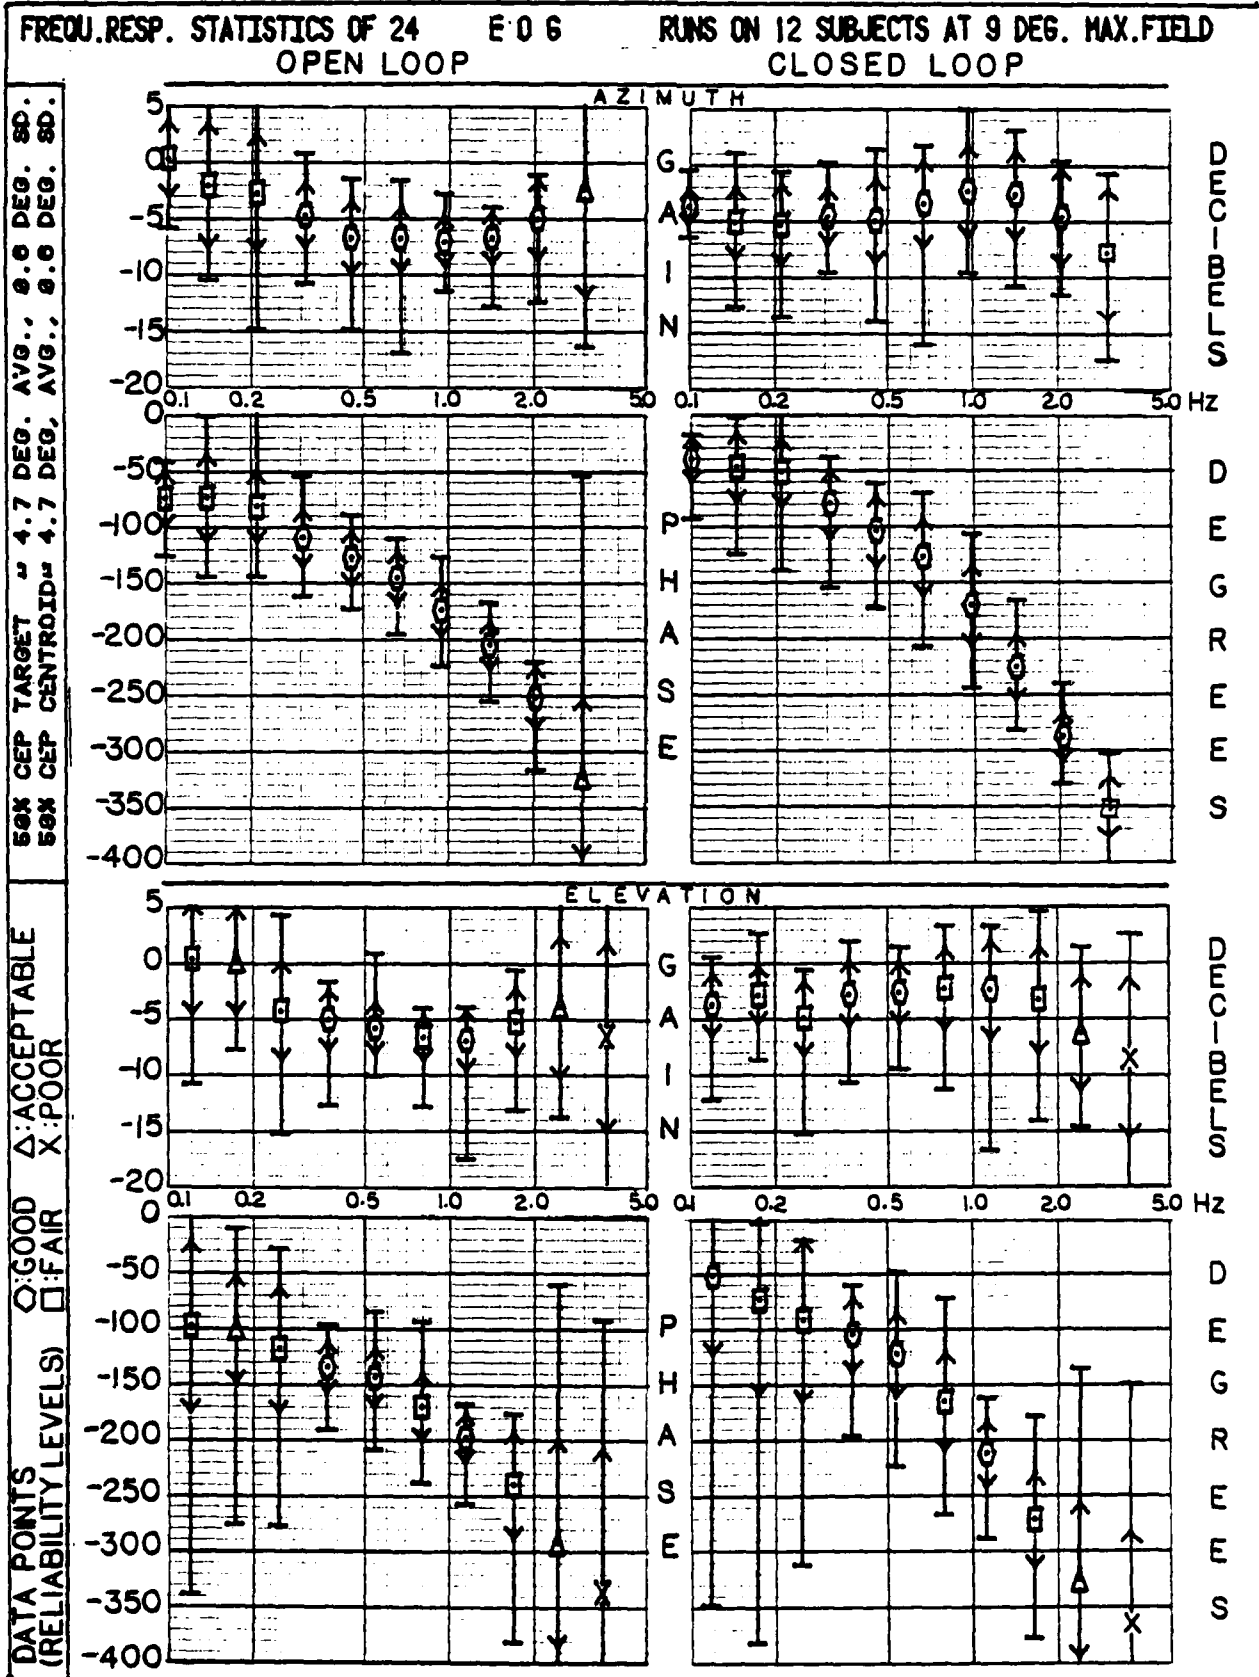


Figure B-2



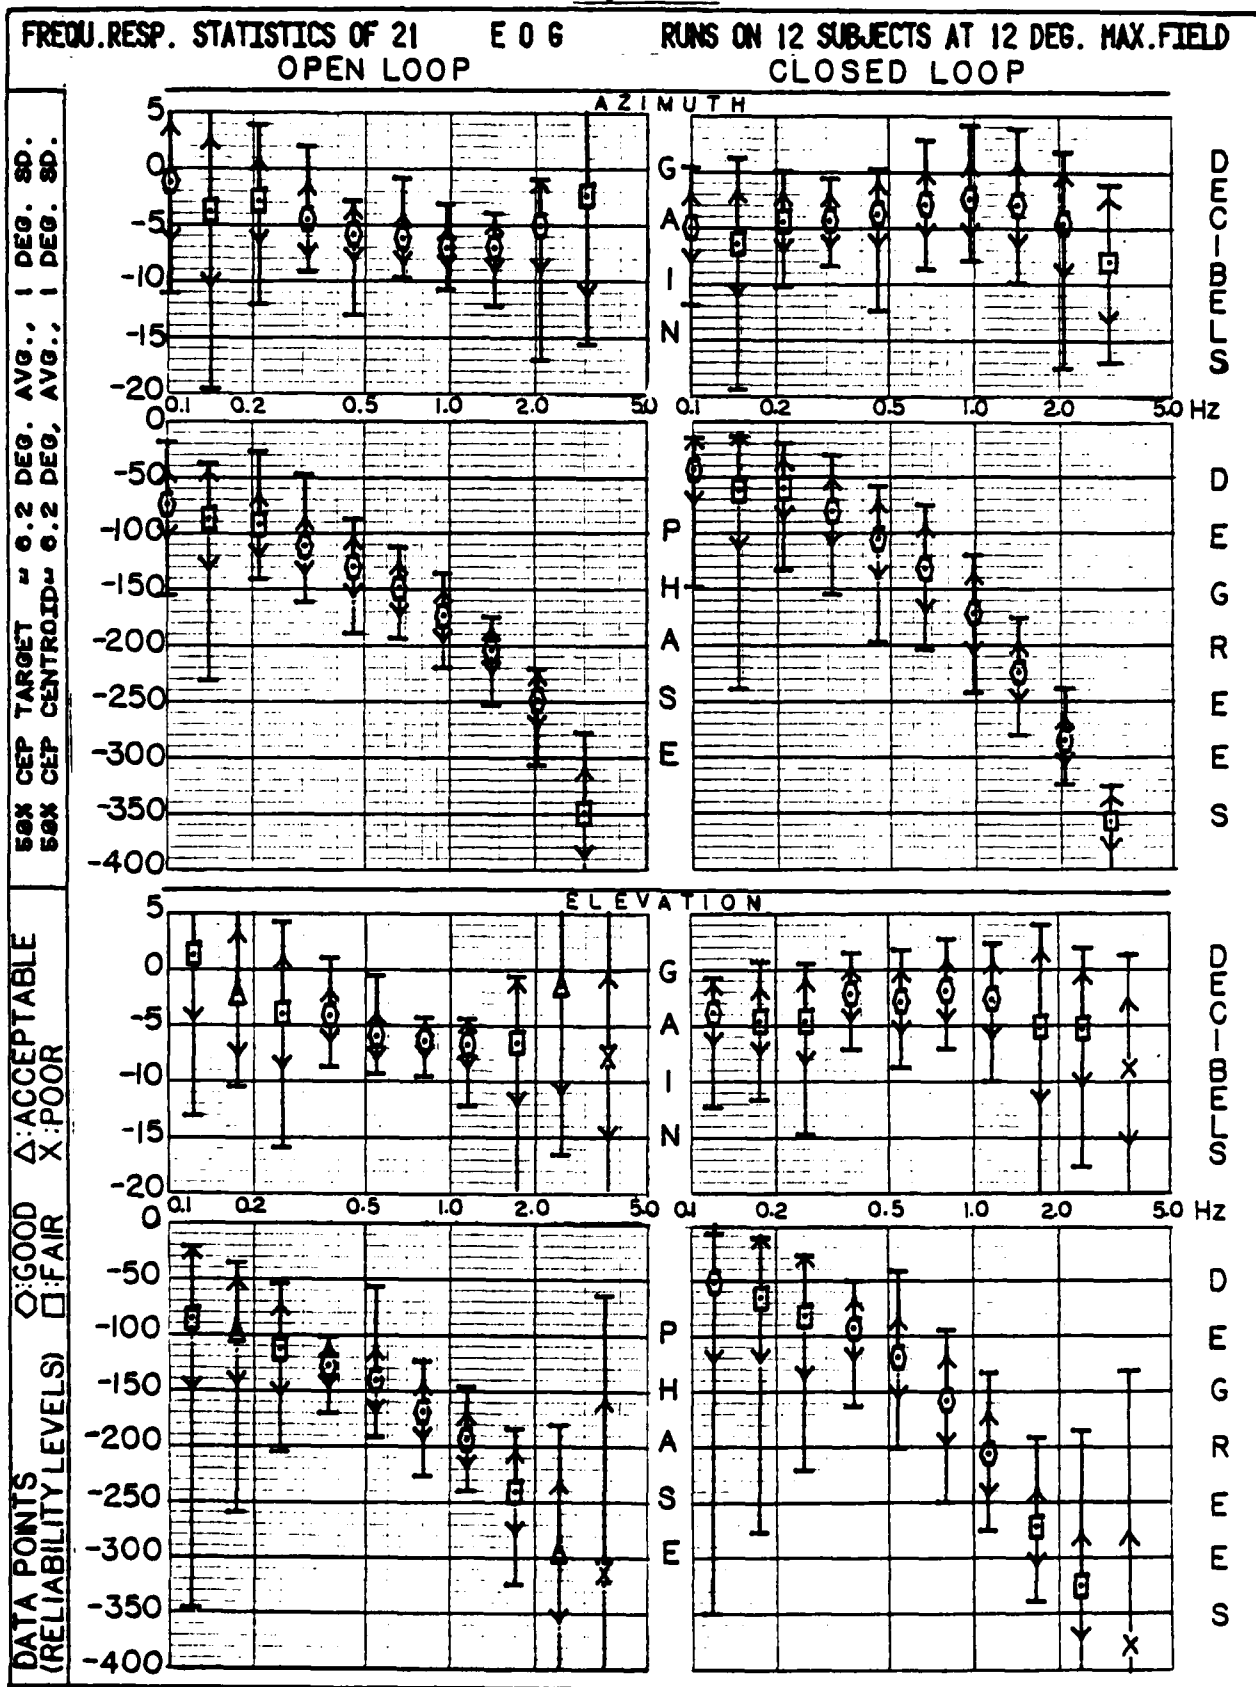


Table B-4 (a)

Table B-4 (b)

	FREQUENCY RESPONSE STATISTICS FOR	6	OCULOM.	W/O FB	RUNS AT	6 DEG MAX.	FIELD
SUBJECT NO.:	8,	9,12,10,11,13,					
NUMBER OF RUNS:	1+	1+ 1+ 1+ 1+	1+	1+	1+	1+	1+
50% CEP TARGET :	Avg.=	2.1 DEG,	STD. DEV.=	0.1 DEG,	RANGE:	1.9 .	.2.3 DEG
50% CEP CENTROID:	Avg.=	2.1 DEG,	STD. DEV.=	0.2 DEG,	RANGE:	1.9 .	.2.3 DEG
							6RUNS

ELEVATION CLOSED LOOP

AVERAGE		STAND. DEV.	GAIN-VARIATION			PHASE-VARIATION								
FREQU. (HERTZ)	GAIN (DB)	PHASE (DEG)	GAIN (DB)	PHASE REL. (DEG) LEV.	MIN (DB)	AV-SD (DB)	AV+SD (DB)	MAX (DB)	REL. LEV.	MIN (DEG)	AV-SD (DEG)	AV+SD (DEG)	MAX (DEG)	
0.121	-0.6	-5.0	1.2	16.1	GOOD	-2.1	-1.8	0.7	1.0	GOOD	-20.0	-21.0	11.1	25.7
0.176	-0.3	-31.1	2.0	14.0	GOOD	-3.9	-2.3	1.6	1.8	GOOD	-58.0	-45.1	-17.1	-14.8
0.253	-2.3	-28.8	2.8	28.9	FAIR	-7.8	-5.1	0.5	0.8	FAIR	-76.9	-57.6	0.1	14.0
0.374	-2.4	-48.1	2.0	10.8	GOOD	-5.1	-4.4	-0.4	0.5	GOOD	-63.3	-58.9	-37.3	-33.3
0.549	-2.0	-63.8	2.1	14.7	GOOD	-6.1	-4.2	0.1	0.7	GOOD	-91.1	-78.6	-49.1	-41.9
0.802	-2.7	-85.6	1.7	14.1	GOOD	-5.5	-4.3	-1.0	-0.4	GOOD	-104.5	-99.7	-71.6	-58.5
1.165	-1.9	-132.1	1.9	19.8	GOOD	-4.5	-3.7	-0.0	1.2	GOOD	-172.1	-151.8	-112.3	-113.7
1.703	-5.0	-171.5	4.9	10.0	FAIR	-15.1	-9.9	-0.1	0.2	FAIR	-186.4	-181.6	-161.5	-156.0
2.483	-5.6	-233.9	3.8	38.2	ACFT	-11.9	-9.4	-1.8	0.6	ACFT	-268.7	-272.1	-195.7	-153.7
3.626	-9.7	-333.4	7.9	65.1	POOR	-19.8	-17.6	-1.8	2.5	POOR	-437.5	-398.5	-268.2	-226.8

ELEVATION OPEN LOOP

AVERAGE		STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION					
FREQU.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	MAX	REL.	MIN	AV-SD	MAX	
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	LEV.	(DB)	(DB)	(DB)	LEV.	(DEG)	(DEG)	(DEG)	
0.121	10.5	-106.6	3.9	80.3	POOR	6.9	6.5	14.4	18.6	POOR	-245.4	-186.9	-26.3
0.176	5.1	-97.8	3.3	28.3	ACFT	0.4	1.9	8.4	9.5	ACFT	-125.7	-126.1	-69.4
0.253	2.9	-69.5	5.3	51.5	FAIR	-3.5	-2.4	8.2	11.9	FAIR	-132.0	-121.1	-18.0
0.374	-0.1	-96.4	2.0	17.9	GOOD	-3.8	-2.0	1.9	2.4	GOOD	-124.2	-114.3	-78.6
0.549	-1.6	-112.0	2.6	12.1	FAIR	-7.1	-4.2	1.0	0.9	FAIR	-125.8	-124.1	-100.0
0.802	-4.2	-122.6	1.0	14.9	GOOD	-5.8	-5.3	-3.2	-2.9	GOOD	-134.2	-137.6	-107.7
1.165	-6.2	-152.7	0.9	12.4	GOOD	-7.6	-7.1	-5.3	-4.9	GOOD	-175.8	-165.2	-140.3
1.703	-9.1	-175.1	3.5	5.5	FAIR	-16.5	-12.6	-5.6	-5.7	FAIR	-183.9	-180.6	-169.7
2.483	-8.0	-212.9	3.3	25.1	ACFT	-13.7	-11.3	-4.7	-3.3	ACFT	-234.9	-238.0	-187.7
3.626	-9.6	-275.3	7.0	78.8	POOR	-18.9	-16.5	-2.6	-0.9	POOR	-378.1	-354.0	-196.5

Table 8-5 (b)

FREQUENCY RESPONSE STATISTICS FOR 6 OCULOM. W/O FB RUNS AT 9 DEG MAX. FIELD												
SUBJECT NO.:	8,	9,	12,	10,	11,	13,						
NUMBER OF RUNS:	1+	1+	1+	1+	1+	1+	0+	0+	0+	0+	0+	0+=
50% CEP TARGET :	AVG. = 2.9 DEG, STD. DEV. = 0.2 DEG, RANGE: 2.6. . . 3.2 DEG											
50% CEP CENTROID:	AVG. = 2.8 DEG, STD. DEV. = 0.3 DEG, RANGE: 2.5. . . 3.2 DEG											

ELEVATION CLOSED LOOP

AVERAGE		STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION						
FREQ.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	MIN	AV-SD	AV+SD	MAX		
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	(DEG)	(DB)	(DB)	(DB)	(DEG)	(DEG)	(DEG)	(DEG)		
0.121	-0.6	-16.6	0.9	5.2	GOOD	-2.3	-1.5	0.3	0.4	GOOD	-25.5	-21.8	-11.3	-8.4
0.176	-1.9	-24.6	2.6	13.8	GOOD	-7.5	-4.5	0.7	0.1	GOOD	-53.5	-38.4	-10.8	-10.6
0.253	-1.0	-26.7	1.2	5.5	GOOD	-2.7	-2.1	0.2	0.5	GOOD	-32.5	-32.1	-21.2	-16.9
0.374	-1.5	-41.6	1.5	4.5	GOOD	-4.6	-3.0	-0.1	-0.3	GOOD	-49.2	-46.1	-37.1	-35.8
0.549	-1.4	-53.5	1.2	9.9	GOOD	-3.4	-2.6	-0.3	-0.2	GOOD	-72.4	-63.4	-43.7	-44.9
0.802	-1.6	-82.1	1.3	5.9	GOOD	-4.0	-2.9	-0.2	0.1	GOOD	-90.8	-88.0	-76.2	-75.0
1.165	-1.8	-114.9	0.9	9.4	GOOD	-2.9	-2.7	-1.0	-0.1	GOOD	-131.5	-124.3	-105.6	-105.3
1.703	-3.6	-161.4	2.2	6.1	GOOD	-6.6	-5.7	-1.4	-0.5	GOOD	-168.6	-167.5	-155.3	-153.4
2.483	-5.6	-215.4	2.8	21.8	FAIR	-8.3	-8.4	-2.9	-1.0	FAIR	-241.7	-237.2	-193.5	-176.1
3.626	-8.1	-324.5	3.0	36.0	ACPT	-12.8	-11.0	-5.1	-3.6	ACPT	-357.5	-360.5	-288.5	-253.0

ELEVATION OPEN LOOP

AVERAGE			STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION					
FREQ.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	MAX	REL.	MIN	AV-SD	AV+SD	MAX
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	(DEG)	(DB)	(DB)	(DB)	(DB)	(DB)	(DEG)	(DEG)	(DEG)	(DEG)
0.121	10.6	-87.8	3.5	11.5	FAIR	4.6	7.0	14.1	16.4	FAIR	-107.4	-99.3	-76.3	-72.4
0.176	6.2	-80.1	5.5	19.9	GOOD	-5.8	0.7	11.6	10.5	GOOD	-103.2	-100.0	-60.2	-41.6
0.253	6.0	-91.8	2.6	12.0	GOOD	2.7	3.4	8.6	9.9	GOOD	-109.0	-103.8	-79.8	-76.4
0.374	1.9	-98.9	1.9	8.2	GOOD	-2.2	-0.1	3.8	3.6	GOOD	-109.2	-107.0	-90.7	-85.0
0.549	0.1	-107.7	1.8	7.6	GOOD	-3.6	-1.7	1.9	2.1	GOOD	-118.9	-115.3	-100.2	-93.9
0.802	-3.2	-125.6	1.3	2.4	GOOD	-5.5	-4.5	-2.0	-1.9	GOOD	-129.1	-128.0	-123.2	-122.6
1.165	-5.5	-143.7	0.7	5.4	GOOD	-6.4	-6.2	-4.8	-4.2	GOOD	-152.4	-149.0	-138.3	-135.5
1.703	-7.9	-168.7	1.3	4.1	GOOD	-9.8	-9.3	-6.6	-6.2	GOOD	-173.6	-172.9	-164.6	-162.4
2.483	-8.9	-202.8	2.0	14.7	FAIR	-11.1	-10.8	-6.9	-5.4	FAIR	-225.7	-217.5	-188.0	-177.2
3.626	-5.8	-309.5	3.3	46.2	ACPT	-10.6	-9.1	-2.5	-1.1	ACPT	-355.9	-355.7	-263.3	-230.1

Table B-6 (2)

FREQUENCY RESPONSE STATISTICS FOR 6 OCULOM, W/O FB RUNS AT 12 DEG MAX. FIELD

SUBJECT NO.: 8, 9, 12, 10, 11, 13,

NUMBER OF RUNS: 1+ 1+ 1+ 1+ 1+ 1+ 1+ 0+ 0+ 0+ 0+ 0+ 0+ 0+ 0+ 0+ 0+= 6RUNS

50% CEP TARGET : AVG. = 3.8 DEG, STD. DEV. = 0.2 DEG, RANGE: 3.6. . . 4.1 DEG

50% CEP CENTROID: AVG.= 3.8 DEG, STD. DEV.= 0.2 DEG, RANGE: 3.6. . . 4.1 DEG

AZIMUTH CLOSED LOOP

AVERAGE			STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION					
FREQU. (HERTZ)	GAIN (DB)	PHASE (DEG)	GAIN (DB)	PHASE (DEG)	REL. LEV.	MIN (DB)	AV-SD (DB)	AV+SD (DB)	MAX (DB)	REL. LEV.	MIN (DEG)	AV-SD (DEG)	AV+SD (DEG)	MAX (DEG)
0.100	-1.2	-11.2	0.3	1.3	GOOD	-1.6	-1.5	-0.9	-0.8	GOOD	-13.0	-12.5	-9.9	-9.5
0.143	-1.5	-16.6	1.0	4.1	GOOD	-3.1	-2.5	-0.6	-0.4	GOOD	-21.4	-20.7	-12.5	-9.2
0.209	-1.4	-20.5	0.5	4.2	GOOD	-2.2	-2.0	-0.9	-0.8	GOOD	-28.1	-24.7	-16.3	-15.7
0.308	-1.7	-33.8	1.0	2.8	GOOD	-3.6	-2.6	-0.7	-0.8	GOOD	-37.3	-36.6	-31.1	-29.1
0.450	-1.9	-44.7	0.6	4.8	GOOD	-3.0	-2.5	-1.3	-1.1	GOOD	-53.6	-49.5	-39.9	-39.7
0.659	-1.9	-61.9	0.5	3.9	GOOD	-2.8	-2.5	-1.4	-1.3	GOOD	-70.1	-65.8	-58.1	-57.6
0.967	-2.2	-93.2	0.5	8.5	GOOD	-3.2	-2.7	-1.6	-1.6	GOOD	-108.8	-101.7	-84.7	-85.1
1.406	-3.3	-131.8	1.1	11.8	GOOD	-5.1	-4.4	-2.2	-1.8	GOOD	-145.1	-143.7	-120.0	-118.3
2.055	-5.2	-184.7	1.4	17.8	GOOD	-7.8	-6.7	-3.8	-3.7	GOOD	-210.6	-202.5	-166.9	-155.0
3.000	-6.3	-259.8	1.5	26.0	FAIR	-9.1	-7.8	-4.9	-5.0	FAIR	-297.2	-285.8	-233.8	-219.7

AZIMUTH OPEN LOOP

AVERAGE		STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION						
FREQU.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	MAX	REL.	MIN	AV-SD	AV+SD	MAX
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	LEV.	(DB)	(DB)	(DB)	(DB)	LEV.	(DEG)	(DEG)	(DEG)	(DEG)
0.100	11.8	-61.0	1.3	7.7	GOOD	10.5	10.5	13.1	14.0	GOOD	-74.2	-68.7	-53.3	-52.3
0.143	8.5	-67.7	2.6	17.3	FAIR	4.6	6.0	11.1	13.1	FAIR	-93.8	-85.1	-50.4	-46.0
0.209	7.3	-75.0	1.3	12.4	GOOD	5.4	6.0	8.6	8.9	GOOD	-88.8	-87.4	-62.6	-56.2
0.308	3.4	-89.9	1.3	8.1	GOOD	0.7	2.0	4.7	5.1	GOOD	-100.8	-98.1	-81.8	-76.1
0.450	1.1	-97.2	0.8	7.0	GOOD	-0.4	0.3	1.8	1.8	GOOD	-104.1	-104.3	-90.2	-84.5
0.659	-1.4	-110.5	0.7	2.8	GOOD	-2.6	-2.2	-0.7	-0.4	GOOD	-114.1	-113.3	-107.7	-105.6
0.967	-4.4	-130.0	0.8	4.4	GOOD	-6.0	-5.2	-3.6	-3.7	GOOD	-137.0	-134.4	-125.7	-124.7
1.406	-7.0	-151.1	0.8	7.6	GOOD	-8.6	-7.8	-6.2	-6.2	GOOD	-159.7	-158.7	-143.5	-141.2
2.055	-9.0	-183.1	0.9	11.6	GOOD	-10.7	-9.9	-8.0	-7.9	GOOD	-200.6	-194.8	-171.5	-163.8
3.000	-7.7	-237.8	1.0	22.9	FAIR	-9.2	-8.7	-6.6	-6.2	FAIR	-276.7	-260.8	-214.9	-205.6

Table B-6 (b)

FREQUENCY RESPONSE STATISTICS FOR 6 OCULOM. W/O FB RUNS AT 12 DEG MAX. FIELD
SUBJECT NO.: 8, 9, 12, 10, 11, 13,

	SUBJ	NO.	8	9	12	10	11	13
NUMBER OF RUNS:	1+	1+	1+	1+	1+	1+	1+	1+
Avg. CEP Target :	AVG.	=	3.8	DEG,	STD. DEV.=	0.2	DEG,	RANGE: 3.6 . . 4.1 DEG
50% CEP Centroid:	AVG.	=	3.8	DEG,	STD. DEV.=	0.2	DEG,	RANGE: 3.6 . . 4.1 DEG

ELEVATION CLOSED LOOP

AVERAGE			STAND. DEV.			GAIN-VARIATION			PHASE-VARIATION				
FREQU.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	MIN	AV-SD	AV+SD		
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	LEV.	(DB)	(DB)	(DB)	(DEG)	(DEG)	(DEG)		
0.121	-0.9	-13.0	0.9	5.6	GOOD	-2.2	-1.8	0.0	0.7	GOOD	-18.9	-7.4	-1.1
0.176	-1.2	-20.3	0.9	4.7	GOOD	-3.1	-2.1	-0.3	-0.2	GOOD	-29.0	-15.5	-13.7
0.253	-0.9	-28.8	0.8	4.0	GOOD	-2.0	-1.7	-0.1	0.4	GOOD	-33.7	-24.9	-22.1
0.374	-1.3	-36.8	1.2	2.7	GOOD	-3.1	-2.5	-0.2	0.4	GOOD	-40.2	-34.1	-32.6
0.549	-1.1	-52.0	0.8	3.1	GOOD	-2.1	-1.9	-0.3	-0.2	GOOD	-56.5	-49.0	-48.5
0.802	-1.1	-75.6	0.8	4.3	GOOD	-2.5	-1.9	-0.3	0.0	GOOD	-82.1	-79.9	-68.7
1.165	-1.7	-109.4	1.4	5.7	GOOD	-4.4	-3.1	-0.3	-0.1	GOOD	-117.8	-115.1	-103.1
1.703	-2.9	-158.4	1.6	11.4	GOOD	-5.6	-4.5	-1.3	-0.8	GOOD	-172.0	-169.8	-139.9
2.483	-4.5	-223.1	2.0	20.9	GOOD	-8.4	-6.5	-2.6	-2.6	GOOD	-245.5	-244.1	-188.5
3.626	-7.8	-309.7	2.9	21.1	ACFT	-12.0	-10.7	-4.8	-3.2	ACFT	-342.3	-330.8	-282.7

ELEVATION OPEN LOOP

AVERAGE			STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION					
FREQU.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	MAX	REL.	MIN	AV-SD	AV+SD	MAX
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	LEV.	(DB)	(DB)	(DB)	(DB)	LEV.	(DEG)	(DEG)	(DEG)	(DEG)
0.121	10.5	-70.8	1.3	33.4	6000	8.7	9.2	11.8	12.1	6000	-113.8	-104.2	-37.5	-5.0
0.176	7.9	-81.2	2.9	11.1	6000	3.9	5.1	10.8	12.3	6000	-91.6	-92.2	-70.1	-59.0
0.253	5.4	-94.2	1.6	9.3	6000	3.7	3.9	7.0	8.3	6000	-109.3	-103.5	-85.0	-81.1
0.374	2.9	-95.5	1.1	11.1	6000	1.6	1.8	4.0	4.8	6000	-113.4	-106.7	-84.4	-77.3
0.549	0.4	-108.6	0.7	5.6	6000	-0.7	-0.3	1.2	1.6	6000	-115.6	-114.2	-103.0	-101.2
0.802	-2.4	-123.0	0.6	4.0	6000	-3.4	-3.0	-1.8	-1.4	6000	-130.9	-127.0	-119.0	-118.4
1.165	-5.2	-140.6	0.7	5.8	6000	-6.6	-5.9	-4.5	-4.4	6000	-148.7	-146.4	-134.8	-130.4
1.703	-7.5	-167.1	0.9	7.6	6000	-8.8	-8.3	-6.6	-6.4	6000	-175.6	-174.7	-159.5	-153.4
2.483	-7.9	-206.9	1.6	13.1	6000	-11.2	-9.5	-6.3	-6.4	6000	-222.4	-220.0	-193.8	-186.2
3.626	-6.1	-287.6	3.0	29.3	ACFT	-11.5	-9.1	-3.2	-2.0	ACFT	-331.9	-316.9	-258.3	-250.1

Figure B-4



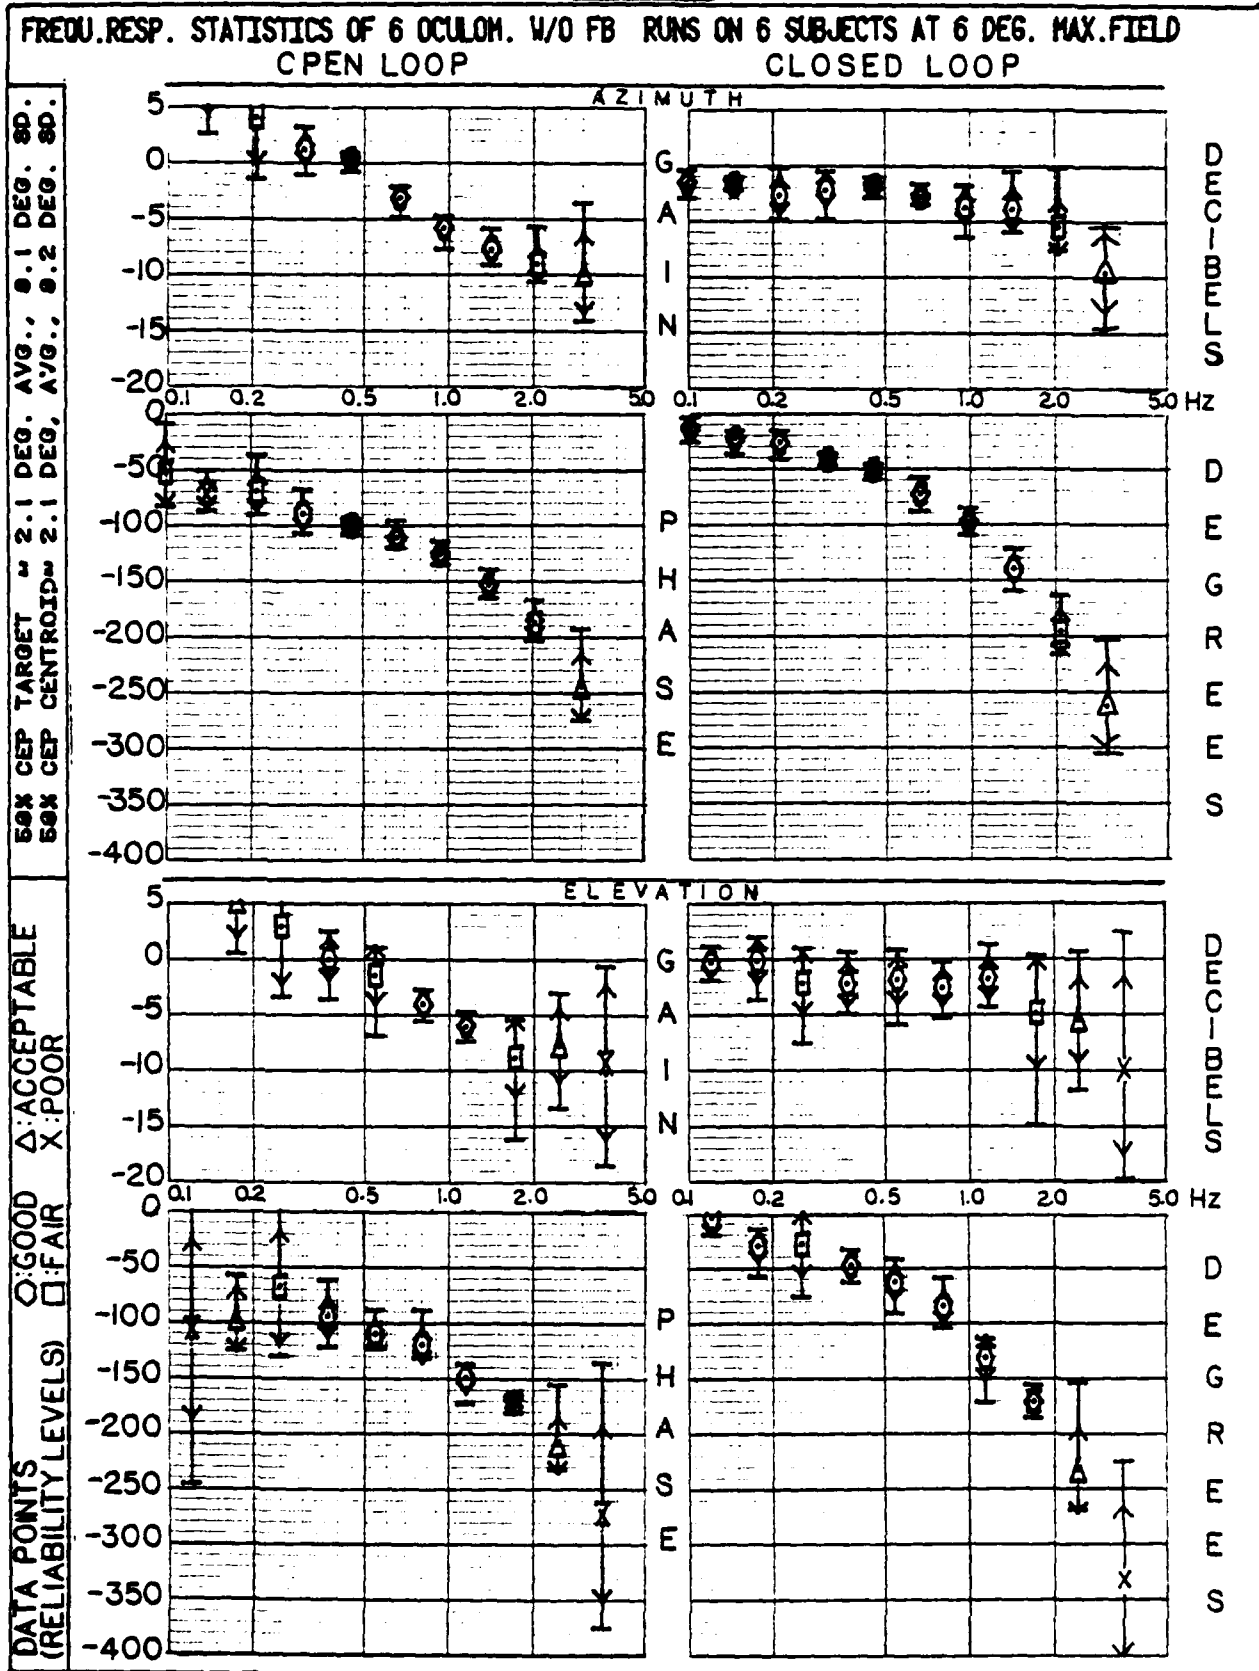


Figure B-5

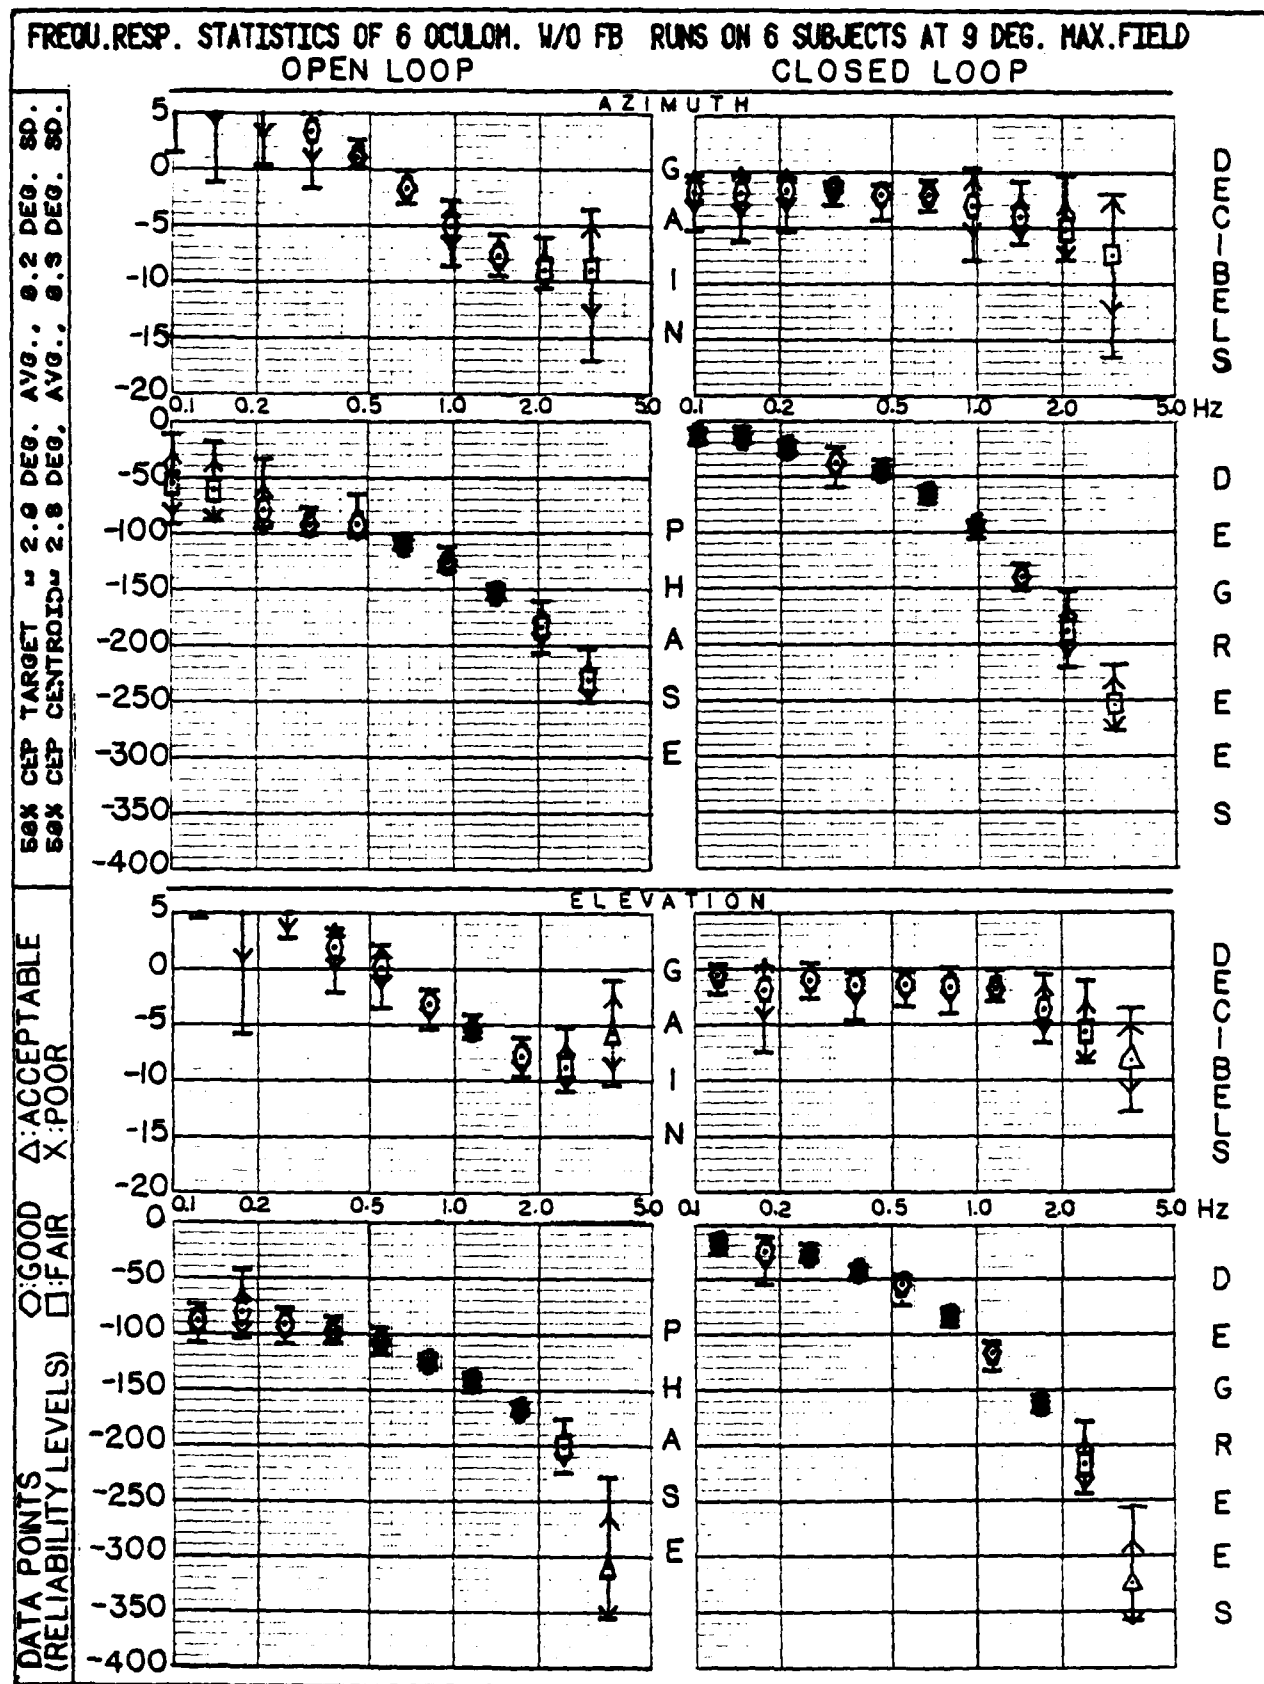

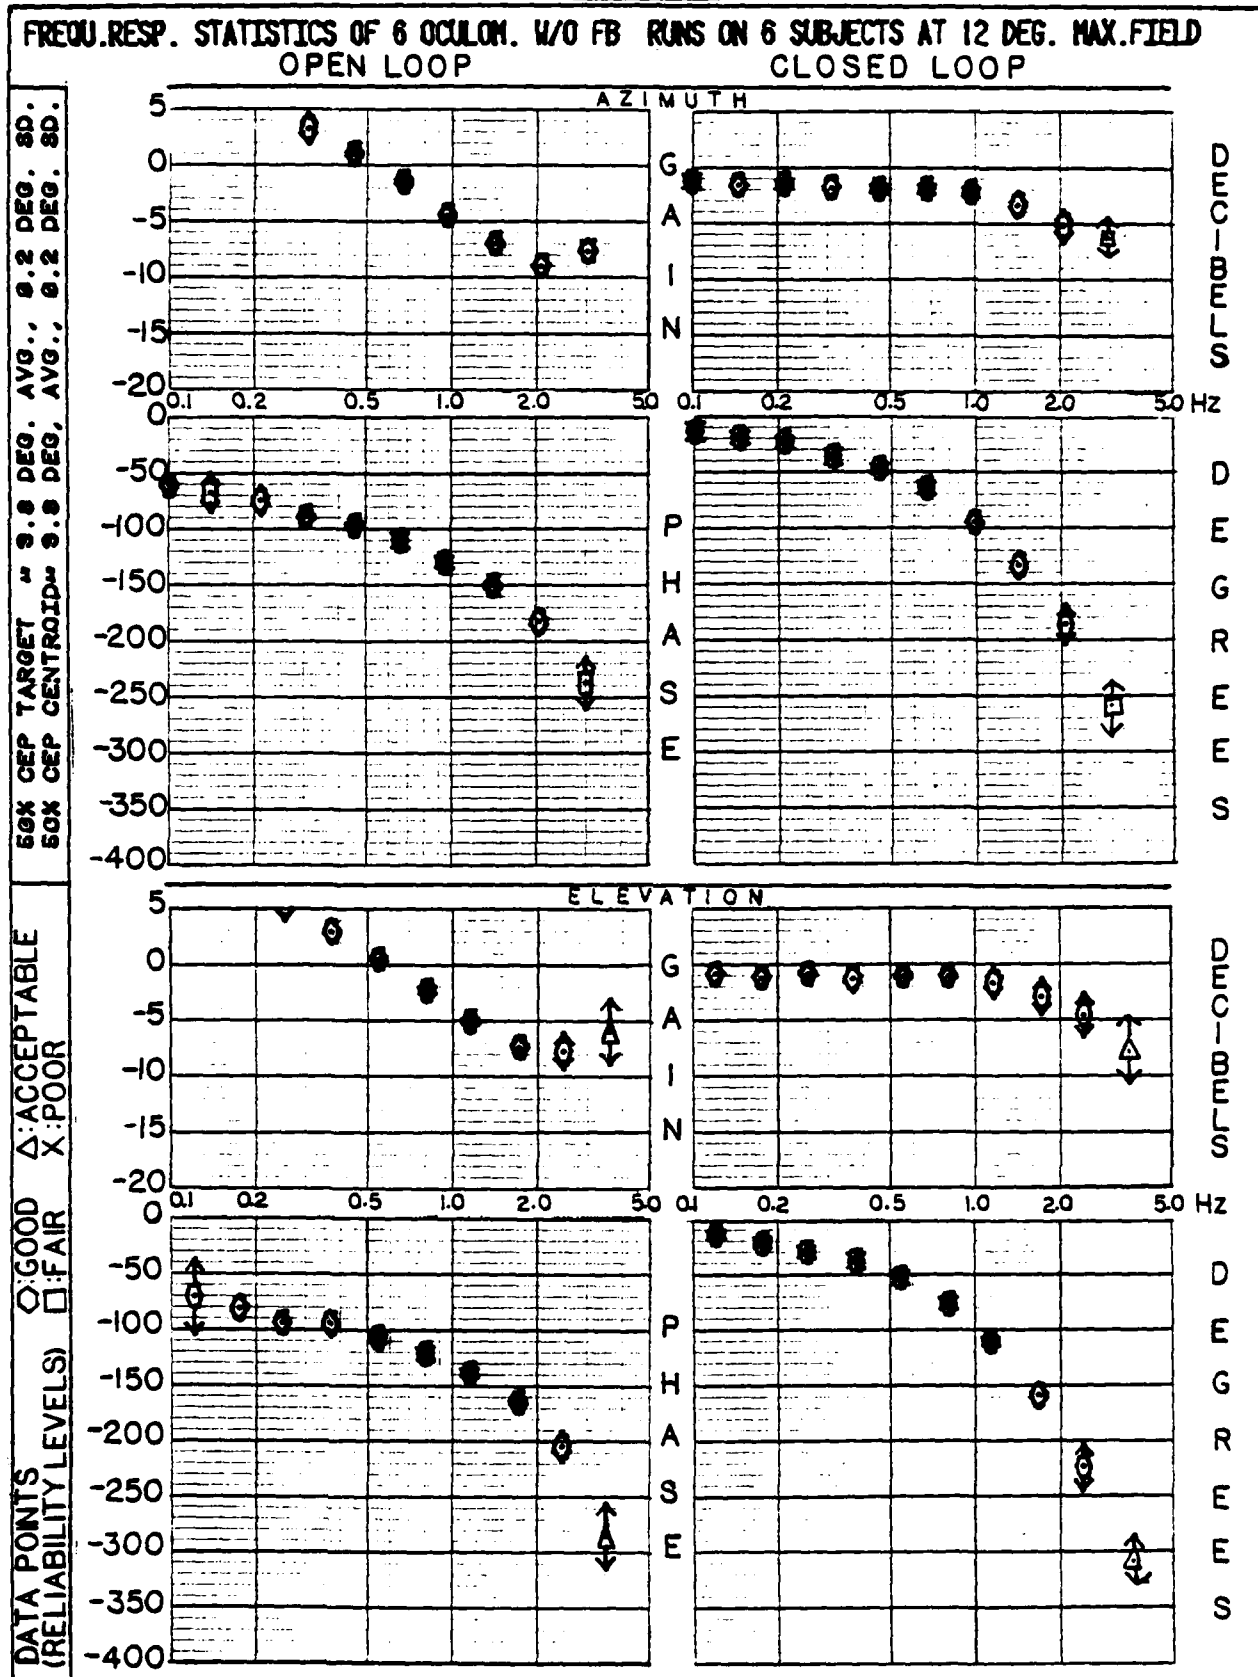

103

AZIMUTH CLOSED LOOP

AZIMUTH OPEN LOOP

AVERAGE			STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION							
FREQU. (HERTZ)	GAIN (DB)	PHASE (DEG)	GAIN (DB)	PHASE (DEG)	REL. (DEG)	LEV. (DEG)	MIN (DB)	AV-SD (DB)	AV+SD (DB)	MAX (DB)	REL. (DEG)	LEV. (DEG)	MIN (DEG)	AV-SD (DEG)	AV+SD (DEG)	MAX (DEG)
0.100	10.9	-72.1	2.1	30.1	ACPT	8.2	8.7	13.0	14.5	ACPT	-108.4	-102.3	-42.0	-11.5		
0.143	6.6	-77.7	2.4	14.2	FAIR	3.5	4.3	9.0	10.7	FAIR	-100.7	-91.9	-63.6	-58.7		
0.209	4.8	-88.2	2.8	15.7	GOOD	-0.8	2.1	7.6	7.6	GOOD	-114.4	-104.0	-72.5	-67.8		
0.308	2.2	-87.5	1.4	15.5	GOOD	-0.3	0.8	3.6	4.0	GOOD	-104.8	-103.0	-71.9	-60.1		
0.450	-0.8	-104.2	1.6	9.6	GOOD	-3.7	-2.4	0.7	0.8	GOOD	-117.8	-113.8	-94.6	-85.7		
0.659	-3.3	-115.2	1.7	11.3	GOOD	-5.7	-5.0	-1.6	-1.2	GOOD	-131.3	-126.5	-104.0	-97.4		
0.967	-6.0	-133.9	1.4	9.0	GOOD	-8.6	-7.4	-4.7	-4.7	GOOD	-145.5	-142.9	-124.9	-121.1		
1.406	-9.2	-159.4	2.8	14.9	FAIR	-15.2	-12.0	-6.5	-6.8	FAIR	-187.6	-174.3	-144.5	-138.7		
2.055	-10.7	-183.9	1.3	15.9	ACPT	-12.3	-12.0	-9.4	-8.2	ACPT	-205.0	-199.8	-168.0	-161.8		
3.000	-11.5	-228.3	3.8	30.8	POOR	-18.4	-15.3	-7.7	-7.1	POOR	-271.9	-259.1	-197.5	-199.6		

Table B-7 (b)

FREQUENCY RESPONSE STATISTICS FOR 6 OCULOM. WITH FB RUNS AT 6 DEG MAX. FIELD
SUBJECT NO.: 8, 9, 12, 10, 11, 13,
NUMBER OF RUNS: 1+ 1+ 1+ 1+ 1+ 1+ 1+ 1+ 1+ 1+ 1+ 1+ 1+ 1+ 1+ 1+ 1+ 1+
50% CEP TARGET : AVG.= 2.1 DEG, STD. DEV.= 0.2 DEG, RANGE: 1.8. . . 2.5 DEG
50% CEP CENTROID: AVG.= 2.0 DEG, STD. DEV.= 0.2 DEG, RANGE: 1.8. . . 2.2 DEG

6RUNS

ELEVATION CLOSED LOOP

AVERAGE			STAND. DEV.			GAIN-VARIATION			PHASE-VARIATION					
FREQU. (HERTZ)	GAIN (DB)	PHASE (DEG)	GAIN (DB)	PHASE (DEG)	REL. LEV.	MIN (DB)	AV-SD (DB)	AV+SD (DB)	MAX (DB)	REL. LEV.	MIN (DEG)	AV-SD (DEG)	AV+SD (DEG)	MAX (DEG)
0.121	-0.7	-20.0	1.4	6.2	GOOD	-2.7	-2.0	0.7	1.7	GOOD	-28.7	-26.2	-13.8	-10.0
0.176	-1.6	-22.9	1.8	10.7	GOOD	-5.0	-3.4	0.1	-0.2	GOOD	-34.6	-33.7	-12.2	-4.5
0.253	-1.8	-31.8	1.0	9.0	GOOD	-3.3	-2.8	-0.8	0.1	GOOD	-50.9	-40.8	-22.8	-23.3
0.374	-2.9	-39.7	1.6	3.6	GOOD	-5.5	-4.5	-1.3	-0.8	GOOD	-45.1	-43.3	-36.1	-35.9
0.549	-2.7	-66.2	1.7	11.5	GOOD	-6.2	-4.4	-1.0	-1.3	GOOD	-83.6	-77.8	-54.7	-52.9
0.802	-3.3	-90.2	2.3	12.8	GOOD	-7.1	-5.6	-1.1	-1.0	GOOD	-115.1	-103.0	-77.4	-73.6
1.165	-4.0	-132.4	1.6	19.4	GOOD	-5.8	-5.6	-2.4	-2.0	GOOD	-159.2	-151.7	-113.0	-103.5
1.703	-7.2	-179.2	2.7	21.6	ACPT	-10.8	-9.9	-4.5	-3.3	ACPT	-207.8	-200.8	-157.7	-147.2
2.483	-9.8	-191.7	6.5	70.1	ACPT	-23.7	-16.3	-3.4	-4.8	ACPT	-264.6	-261.8	-121.6	-87.4
3.626	-12.8	-276.7	6.4	150.7	POOR	-24.0	-19.3	-6.4	-5.7	POOR	-391.3	-427.4	-126.0	52.5

ELEVATION OPEN LOOP

AVERAGE			STAND. DEV.			GAIN-VARIATION			PHASE-VARIATION					
FREQU.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	MAX	REL.	MIN	AV-SD	AV+SD	MAX
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	LEV.	(DB)	(DB)	(DB)	(DB)	LEV.	(DEG)	(DEG)	(DEG)	(DEG)
0.121	7.9	-85.7	2.0	27.6	GOOD	4.7	5.9	9.9	11.4	GOOD	-127.0	-113.4	-58.1	-34.2
0.176	7.6	-79.0	6.7	19.0	FAIR	-0.2	0.8	14.3	19.5	FAIR	-100.7	-98.0	-59.9	-52.8
0.253	3.8	-85.8	2.0	15.2	GOOD	0.0	1.8	5.8	6.1	GOOD	-105.4	-101.0	-70.6	-58.9
0.374	0.7	-86.1	1.6	13.8	GOOD	-1.7	-0.8	2.3	3.5	GOOD	-102.3	-99.9	-72.3	-64.8
0.549	-2.4	-110.7	2.3	5.5	GOOD	-6.7	-4.7	-0.0	0.0	GOOD	-121.7	-116.2	-105.3	-105.2
0.802	-5.0	-125.3	2.2	7.4	GOOD	-8.0	-7.1	-2.8	-3.1	GOOD	-136.1	-132.7	-117.9	-115.8
1.165	-7.4	-150.6	1.3	12.4	GOOD	-9.1	-8.7	-6.1	-5.4	GOOD	-166.4	-163.1	-138.2	-128.6
1.703	-10.3	-180.8	1.9	15.0	ACPT	-12.8	-12.2	-8.4	-7.7	ACPT	-201.7	-195.8	-165.8	-159.6
2.483	-11.4	-185.1	5.7	57.2	ACPT	-23.9	-17.1	-5.7	-6.7	ACPT	-248.2	-242.2	-127.9	-106.3
3.626	-10.9	-268.5	7.7	154.2	POOR	-23.4	-18.6	-3.2	0.6	POOR	-396.3	-422.7	-114.3	62.2

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
84

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
84

AVERAGE			STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION					
FREQU.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	MAX	REL.	MIN	AV-SD	AV+SD	MAX
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	LEV.	(DB)	(DB)	(DB)	(DB)	LEV.	(DEG)	(DEG)	(DEG)	(DEG)
0.100	10.1	-63.1	4.6	35.1	GOOD	3.5	5.6	14.7	16.1	GOOD	-115.9	-98.2	-28.1	-3.4
0.143	8.0	-59.0	4.0	14.6	FAIR	-0.4	4.0	12.1	11.2	FAIR	-81.4	-73.6	-44.5	-39.6
0.209	4.2	-78.5	2.0	6.1	GOOD	0.9	2.1	6.2	7.0	GOOD	-90.1	-84.6	-72.3	-72.9
0.308	3.0	-89.7	1.3	13.9	GOOD	0.8	1.7	4.4	4.7	GOOD	-114.5	-103.6	-75.8	-72.6
0.450	-0.3	-102.6	1.6	5.6	GOOD	-2.8	-1.9	1.3	2.0	GOOD	-112.5	-108.2	-97.0	-95.4
0.659	-2.8	-114.3	1.4	6.3	GOOD	-4.9	-4.2	-1.4	-0.8	GOOD	-122.9	-120.5	-108.0	-106.6
0.967	-5.7	-130.3	1.5	6.2	GOOD	-8.7	-7.3	-4.2	-4.1	GOOD	-137.4	-136.6	-124.1	-118.2
1.406	-8.6	-151.7	1.5	12.5	GOOD	-11.3	-10.1	-7.0	-6.7	GOOD	-171.9	-164.2	-139.2	-134.7
2.055	-12.1	-192.1	2.9	16.8	ACF1	-16.8	-14.9	-9.2	-8.9	ACPT	-209.9	-208.9	-175.3	-165.1
3.000	-10.6	-239.8	1.2	27.3	FAIR	-12.7	-11.7	-9.4	-9.3	FAIR	-282.0	-267.1	-212.5	-201.1

SUBJECT NO.: 8, 9, 12, 10, 11, 13,

```
NUMBER OF RUNS: 1+ 1+ 1+ 1+ 1+ 1+ 0+ 0+ 0+ 0+ 0+ 0+ 0+ 0+ 0+ 0+= 6RUNS  
50% CEP TARGET : AVG.= 3.1 DEG, STD. DEV.= 0.3 DEG, RANGE: 2.7 . . 3.6 DEG  
50% CEP CENTROID: AVG.= 3.0 DEG, STD. DEV.= 0.3 DEG, RANGE: 2.7 . . 3.5 DEG
```

ELEVATION CLOSED LOOP

[illegible]

ELEVATION OPEN LOOP

AVERAGE		STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION			
FREQU.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	MIN	AV-SD	AV+SD
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	LEV.	(DB)	(DB)	(DB)	(DEG)	(DEG)	(DEG)
0.121	10.5	-75.6	1.2	26.0	GOOD	9.0	9.3	11.7	12.6	GOOD	-125.8
0.176	7.1	-68.1	2.0	21.8	FAIR	4.0	5.0	9.1	9.7	FAIR	-94.7
0.253	5.2	-82.4	3.2	22.5	GOOD	-0.2	1.9	8.4	9.6	GOOD	-124.0
0.374	1.5	-94.2	2.0	12.7	GOOD	-1.0	-0.5	3.5	4.3	GOOD	-113.6
0.549	-1.7	-111.5	2.7	7.2	GOOD	-7.3	-4.3	1.0	1.0	GOOD	-122.0
0.802	-4.2	-125.4	2.2	7.8	GOOD	-8.2	-6.4	-2.1	-1.7	GOOD	-136.3
1.165	-6.7	-144.8	1.3	7.4	GOOD	-8.9	-8.0	-5.4	-4.6	GOOD	-152.4
1.703	-8.7	-171.2	1.6	10.9	GOOD	-11.6	-10.3	-7.2	-6.3	GOOD	-180.9
2.483	-11.1	-210.9	2.5	16.8	FAIR	-15.6	-13.6	-8.6	-8.6	FAIR	-233.2
3.626	-10.2	-274.6	7.3	43.8	POOR	-24.4	-17.4	-2.9	-3.0	POOR	-330.7

FREQUENCY RESPONSE STATISTICS FOR 6 OCULOM. WITH FB RUNS AT 12 DEG MAX. FIELD NO.: 8, 9, 12, 10, 11, 13,

SUBJECT NO.: 8, 9, 12, 10, 11, 13,

NUMBER OF RUNS: 1+ 1+ 1+ 1+ 1+ 1+ 1+ 0+ 0+ 0+ 0+ 0+ 0+ 0+ 0+ 0+ 0+= 6RUNS

50% CEP TARGET ; AVG. = 4.1 DEG, STD. DEV. = 0.5 DEG, RANGE: 3.5. . 4.8 DEG

50% CEP CENTROID: AVG. = 4.3 DEG, STD. DEV. = 0.5 DEG, RANGE: 3.5. . . 4.8 DEG

AZIMUTH CLOSED LOOP

AVERAGE			STAND. DEV.		GAIN-VARIATION			PHASE-VARIATION						
FREQ.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	MIN	AV-SD	AV+SD			
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	LEV.	(DB)	(DB)	(DB)	(DEG)	(DEG)	(DEG)			
0.100	-1.5	-10.9	1.1	4.3	GOOD	-3.6	-2.6	-0.4	-0.2	GOOD	-18.7	-15.2	-6.5	-5.0
0.143	-2.1	-17.1	1.5	3.7	GOOD	-4.4	-3.6	-0.7	-0.5	GOOD	-22.3	-20.7	-13.4	-12.4
0.209	-2.0	-25.5	0.7	5.1	GOOD	-2.7	-2.7	-1.3	-0.8	GOOD	-34.1	-30.6	-20.5	-18.0
0.308	-1.3	-37.3	0.8	10.1	GOOD	-3.1	-2.2	-0.5	-0.6	GOOD	-52.3	-47.5	-27.2	-27.4
0.450	-1.7	-49.6	0.4	7.2	GOOD	-2.4	-2.2	-1.3	-1.1	GOOD	-63.2	-56.8	-42.4	-41.3
0.659	-2.0	-68.4	1.5	10.6	GOOD	-5.3	-3.5	-0.4	-1.0	GOOD	-88.4	-79.0	-57.8	-56.3
0.967	-2.7	-98.9	1.5	9.8	GOOD	-4.9	-4.2	-1.2	-1.1	GOOD	-112.5	-108.7	-89.1	-85.8
1.406	-4.1	-143.2	2.8	19.0	GOOD	-9.5	-6.8	-1.3	-1.5	GOOD	-177.3	-162.2	-124.2	-120.8
2.055	-8.1	-202.6	3.4	18.9	FAIR	-14.0	-11.5	-4.7	-3.9	FAIR	-231.6	-221.6	-183.7	-174.5
3.000	-9.4	-258.4	3.1	22.3	ACFT	-13.3	-12.5	-6.3	-5.5	ACPT	-280.3	-280.7	-236.1	-226.9

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
84

AVERAGE			STAND. DEV.			GAIN-VARIATION			PHASE-VARIATION					
FREQU. (HERTZ)	GAIN (DB)	PHASE (DEG)	GAIN (DB)	PHASE (DEG)	REL. LEV.	MIN (DB)	AV-SD (DB)	AV+SD (DB)	MAX (DB)	REL. LEV.	MIN (DEG)	AV-SD (DEG)	AV+SD (DEG)	MAX (DEG)
0.100	10.6	-54.9	2.8	25.1	GOOD	5.3	7.7	13.4	14.0	GOOD	-95.3	-80.0	-29.9	-24.1
0.143	6.8	-63.5	2.8	22.4	FAIR	2.9	4.0	9.6	11.7	FAIR	-90.0	-85.9	-41.1	-29.8
0.209	5.0	-75.9	1.7	10.4	GOOD	2.2	3.4	6.7	7.0	GOOD	-91.4	-86.4	-65.5	-56.2
0.308	3.2	-95.7	2.5	7.5	GOOD	-0.8	0.8	5.7	5.9	GOOD	-112.1	-103.2	-88.2	-89.6
0.450	0.5	-102.7	1.2	5.2	GOOD	-1.4	-0.8	1.7	2.3	GOOD	-112.8	-107.9	-97.5	-97.8
0.659	-2.1	-115.2	1.8	8.4	GOOD	-4.8	-3.9	-0.4	-0.1	GOOD	-126.9	-123.6	-106.8	-100.5
0.967	-5.2	-132.3	1.4	5.3	GOOD	-7.2	-6.5	-3.8	-3.3	GOOD	-138.1	-137.6	-127.0	-125.4
1.406	-7.8	-157.0	1.9	11.9	GOOD	-11.7	-9.7	-6.0	-6.3	GOOD	-178.4	-168.9	-145.1	-145.3
2.055	-10.9	-197.0	2.5	13.7	FAIR	-15.3	-13.4	-8.4	-8.2	FAIR	-214.7	-210.7	-183.3	-176.6
3.000	-10.4	-241.8	2.5	20.9	ACFT	-14.1	-12.9	-7.9	-6.5	ACFT	-265.9	-262.7	-220.9	-213.5

Table B-9 (b)

[illegible]

ELEVATION CLOSED LOOP

AVERAGE			STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION					
FREQU. (HERTZ)	GAIN (DB)	PHASE (DEG)	GAIN (DB)	PHASE (DEG)	REL. LEV.	MIN (DB)	AV-SD (DB)	MAX (DB)	REL. LEV.	MIN (DEG)	AV-SD (DEG)	MAX (DEG)		
0.121	-0.9	-40.3	1.5	60.1	GOOD	-3.1	-2.4	0.5	1.1	GOOD	-174.6	-100.4	19.8	-9.8
0.176	-0.2	-41.8	1.9	49.5	GOOD	-2.8	-2.1	1.6	3.1	GOOD	-151.9	-91.4	7.7	-11.2
0.253	-2.9	-35.8	1.9	13.3	FAIR	-6.4	-4.8	-1.1	-0.7	FAIR	-58.3	-49.2	-22.5	-20.5
0.374	-1.1	-46.4	1.6	9.2	GOOD	-3.2	-2.7	0.5	1.0	GOOD	-59.1	-55.6	-37.3	-32.9
0.549	-1.2	-53.3	1.8	11.8	GOOD	-4.4	-3.1	0.6	1.8	GOOD	-72.2	-65.1	-41.5	-38.0
0.802	-2.5	-89.1	1.6	18.2	GOOD	-5.6	-4.2	-0.9	-0.9	GOOD	-117.1	-107.3	-70.8	-68.0
1.165	-2.4	-144.3	2.0	53.1	FAIR	-6.5	-4.4	-0.4	-0.7	FAIR	-259.9	-197.4	-91.2	-96.9
1.703	-3.7	-203.7	4.0	53.4	FAIR	-11.7	-7.6	0.3	1.3	FAIR	-314.6	-257.2	-150.3	-145.2
2.483	-3.8	-203.2	6.3	36.2	ACFT	-13.0	-10.1	2.4	4.3	ACFT	-238.6	-239.4	-167.0	-148.5
3.626	-4.7	-301.9	8.3	47.2	POOR	-16.4	-13.0	3.7	9.5	POOR	-386.9	-349.1	-254.8	-256.8

ELEVATION OPEN LOOP

AVERAGE			STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION					
FREQU.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	REL.	MIN	AV-SD	AV+SD	MAX	
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	LEV.	(DB)	(DB)	(DB)	LEV.	(DEG)	(DEG)	(DEG)	(DEG)	
0.121	7.2	-96.5	6.6	48.0	FAIR	-7.1	0.5	13.8	11.8	FAIR	-177.0	-144.5	-48.5	-30.9
0.176	5.4	-107.0	5.2	39.5	FAIR	-5.2	0.2	10.6	10.0	FAIR	-166.9	-146.6	-67.5	-65.8
0.253	1.9	-82.0	4.0	16.1	FAIR	-3.9	-2.0	5.9	8.0	FAIR	-98.9	-98.1	-65.8	-52.0
0.374	1.4	-104.5	2.0	12.6	GOOD	-0.9	-0.7	3.4	4.4	GOOD	-122.5	-117.1	-91.9	-92.1
0.549	0.3	-109.8	2.4	10.4	GOOD	-4.3	-2.2	2.7	2.8	GOOD	-127.0	-120.1	-99.4	-96.6
0.802	-4.2	-126.6	2.1	10.5	GOOD	-8.1	-6.3	-2.2	-1.4	GOOD	-140.8	-137.1	-116.1	-109.8
1.165	-5.9	-159.7	1.8	29.4	FAIR	-9.2	-7.7	-4.1	-3.8	FAIR	-224.6	-189.1	-130.3	-136.5
1.703	-6.9	-197.5	3.7	37.4	FAIR	-13.6	-10.6	-3.3	-1.3	FAIR	-276.9	-235.0	-160.1	-160.9
2.483	-8.2	-199.9	3.6	23.4	ACFT	-14.2	-11.8	-4.6	-4.0	ACFT	-225.1	-223.3	-176.5	-167.4
3.626	-6.1	-260.1	6.1	66.8	POOR	-16.3	-12.3	-0.0	3.3	POOR	-398.9	-326.9	-193.3	-188.3

FREQ. RESP. STATISTICS OF 60CULOM. WITH FB RUNS ON 6 SUBJECTS AT 6 DEG. MAX. FIELD
OPEN LOOP CLOSED LOOP

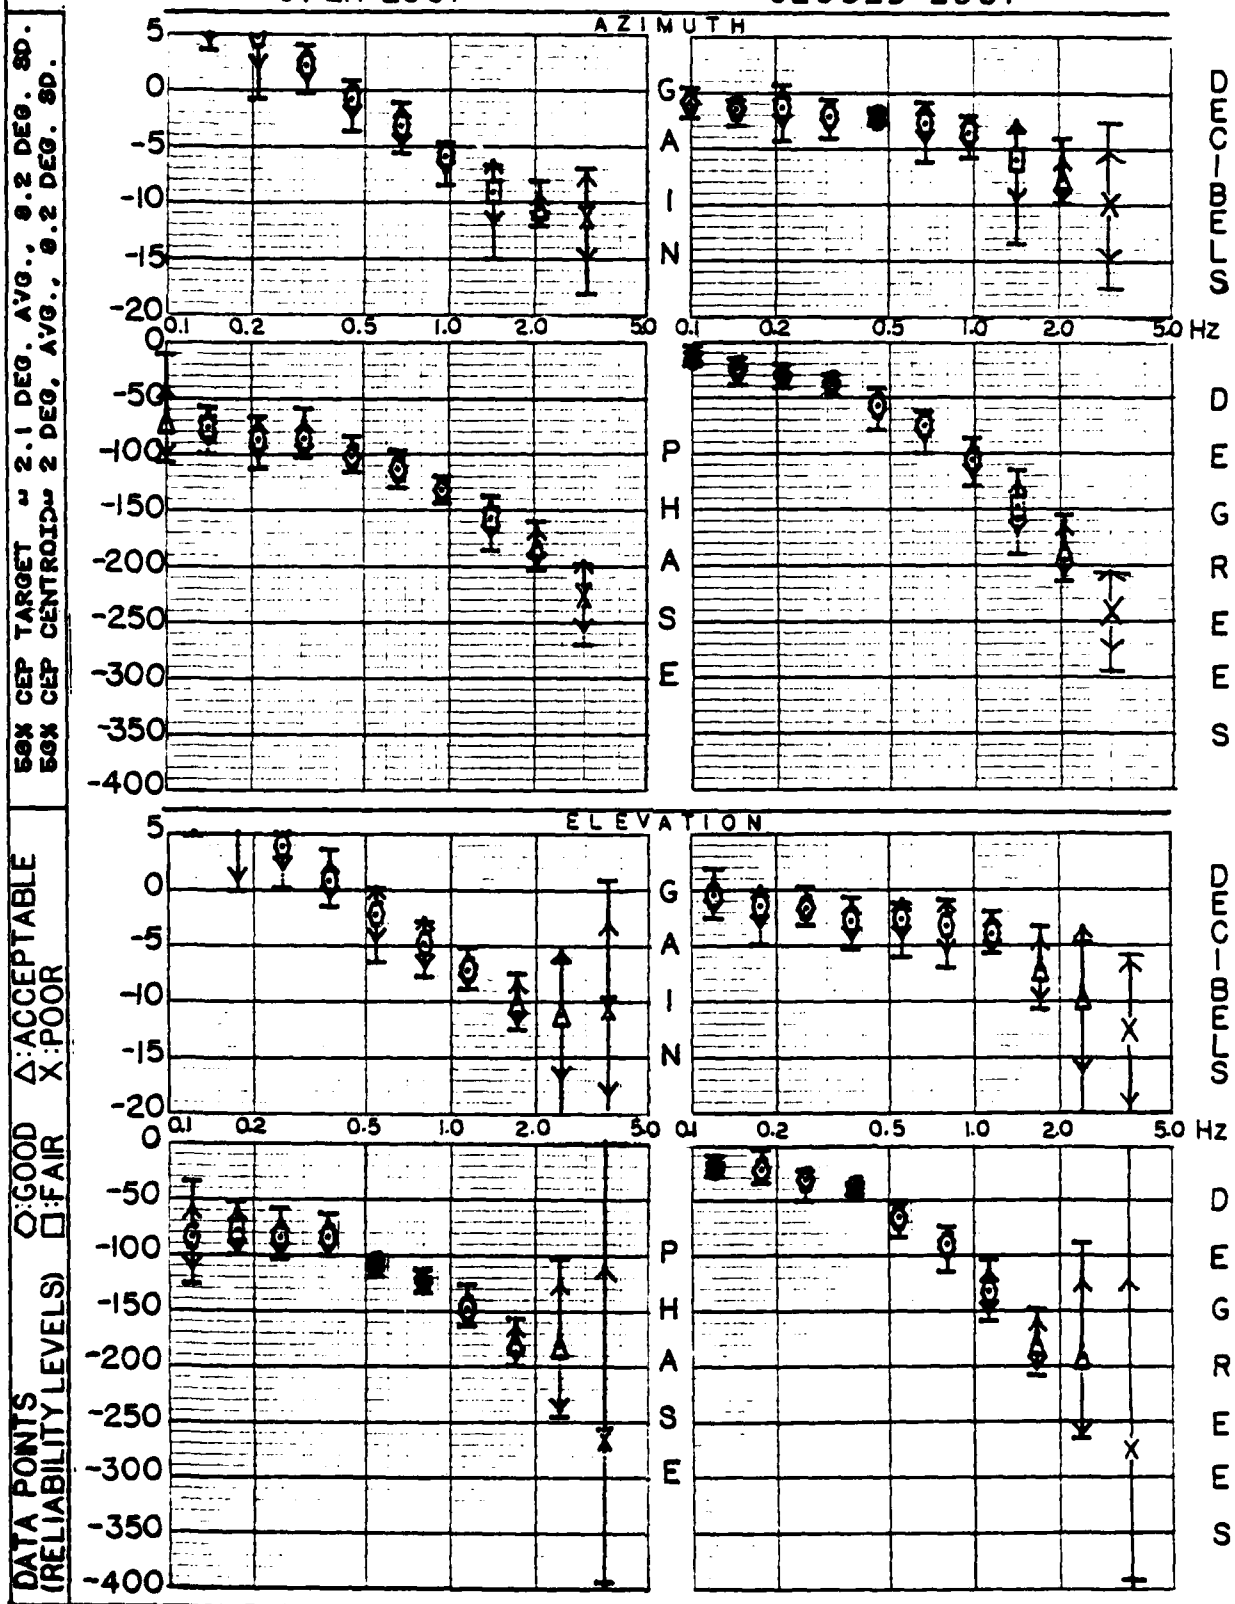


Figure B-8

FREQ. RESP. STATISTICS OF 60CULOM. WITH FB RUNS ON 6 SUBJECTS AT 9 DEG. MAX. FIELD
OPEN LOOP CLOSED LOOP


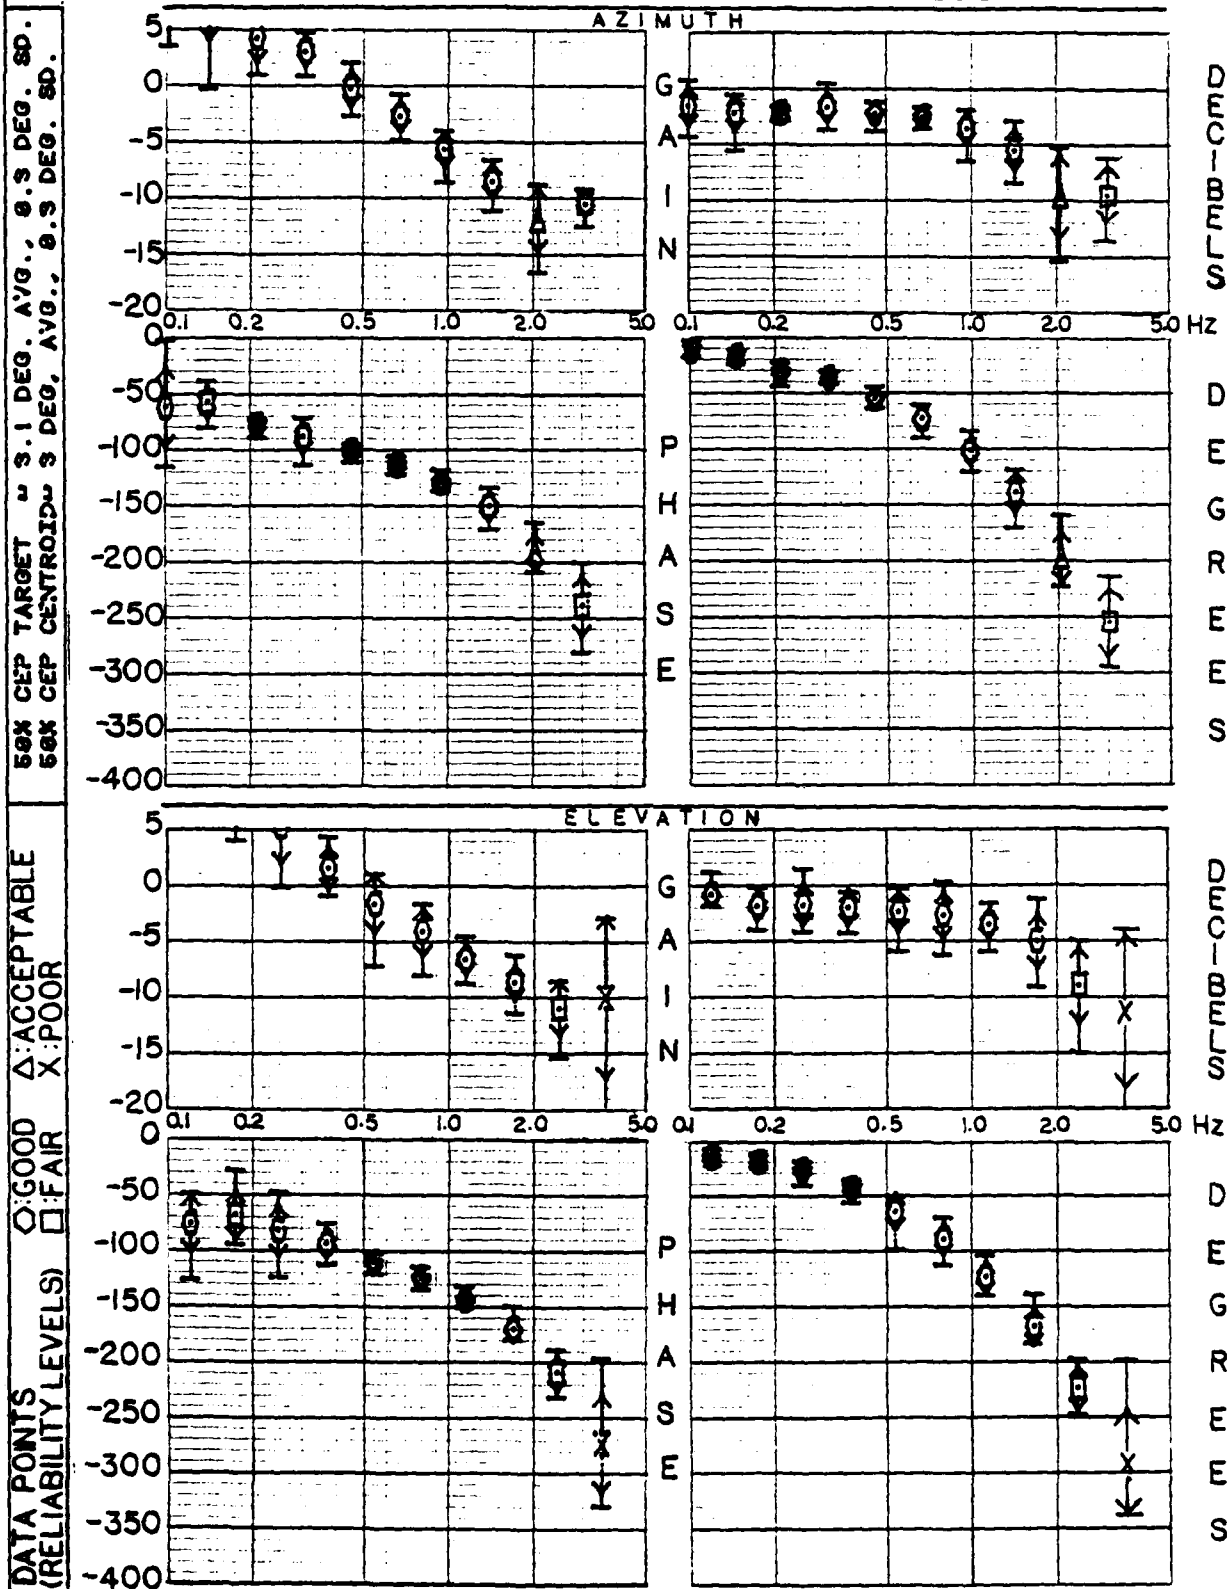


Figure B-9

FREQ. RESP. STATISTICS OF 60CULOM. WITH FB RUNS ON 6 SUBJECTS AT 12 DEG. MAX. FIELD
OPEN LOOP CLOSED LOOP

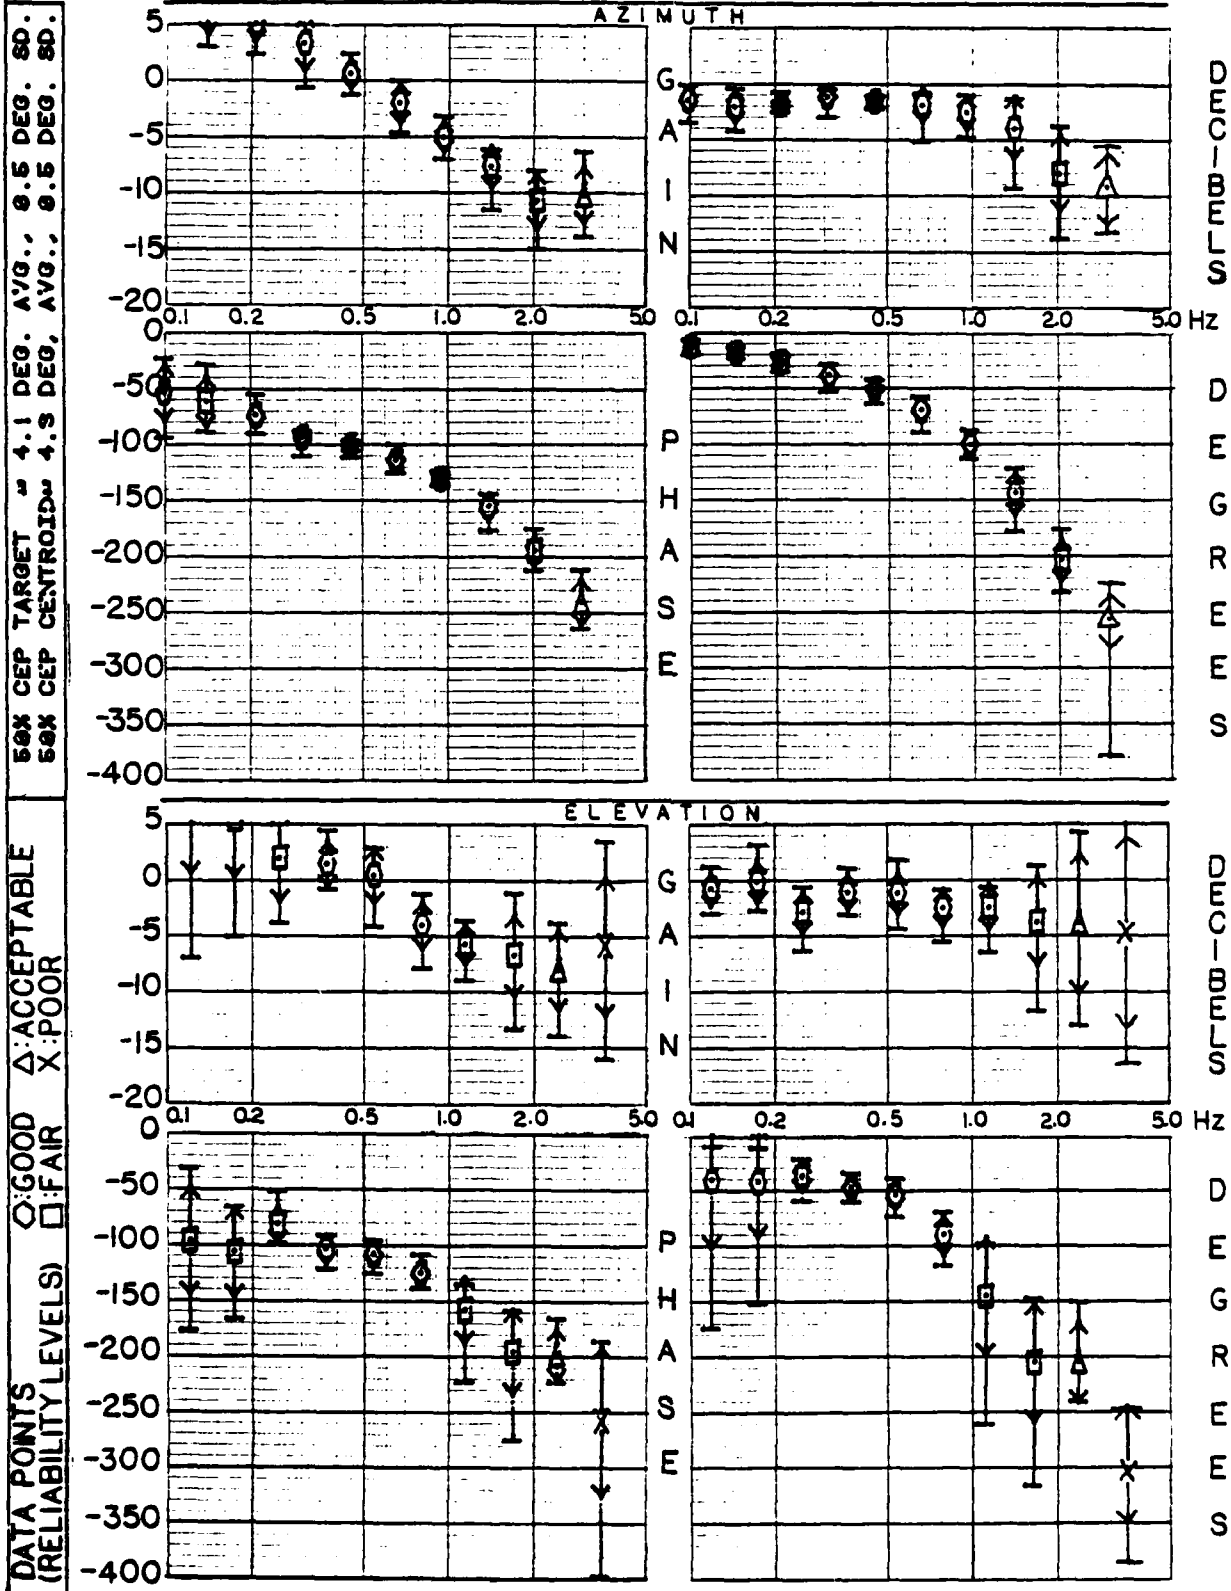

APPENDIX C

AVERAGED RESULTS OF 12 EOG TRACKING RUNS

WITH BREAK FREQUENCY OF 1.0 HERTZ

For Subjects 1 and 2, 12 EOG tracking runs were performed with a target forcing function of 1.0 Hz break frequency. As can be noted from the individual tracking results for Subjects 1 and 2 (in Appendix A), these data are not considered reliable (see markings on the plots in terms of reliability levels). The break frequency of 1.0 Hz was evidently too high and was therefore lowered for the subsequent tracking runs. Nevertheless, the results of these 12 EOG tracking runs were averaged in groups of 5, 3 and 4 tracking runs for maximum target angles of 6, 9 and 12 degrees respectively.

The results are shown in Tables C-1 to C-3 and Figures C-1 to C-3 respectively.

Table C-1 (a)

FREQUENCY RESPONSE STATISTICS FOR 5 E 0 G RUNS AT 6 DEG MAX. FIELD
SUBJECT NO.: 1, 2,

NUMBER OF RUNS:	2+	3	+ 0 + 0 + 0 + 0 + 0 + 0 + 0 + 0 + 0 + 0 + 0 + 0 =
50% CEP TARGET :	Avg.	=	3.7 DEG, STD. DEV.= 0.2 DEG, RANGE: 3.4 . , 4.0 DEG
50% CEP CENTROID:	Avg.	=	3.7 DEG, STD. DEV.= 0.2 DEG, RANGE: 3.4 . , 3.9 DEG

AZIMUTH CLOSED LOOP

AVERAGE			STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION					
FREQU.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	REL.	MIN	AV-SD	AV+SD	MAX	
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	LEV.	(DB)	(DB)	(DB)	(DB)	LEV.	(DEG)	(DEG)	(DEG)	
0.100	-9.2	-57.4	1.4	37.7	POOR	-10.7	-10.6	-7.8	-6.8	POOR	-98.3	-95.1	-19.6	6.1
0.143	-4.6	-70.5	2.4	47.3	POOR	-8.3	-7.0	-2.2	-1.7	POOR	-133.1	-117.8	-23.1	1.2
0.209	-5.3	-112.4	4.2	37.6	ACPT	-13.4	-9.5	-1.1	-1.7	ACPT	-187.3	-150.0	-74.7	-90.9
0.308	-7.7	-87.4	3.8	32.1	ACPT	-11.6	-11.5	-3.9	-0.7	ACPT	-138.2	-119.5	-55.3	-37.3
0.450	-4.1	-104.2	2.8	29.7	GOOD	-8.5	-6.9	-1.3	0.0	GOOD	-141.6	-133.9	-74.5	-71.3
0.659	-4.6	-143.3	4.7	17.4	FAIR	-11.0	-9.3	0.1	2.3	FAIR	-165.8	-160.7	-125.9	-122.5
0.967	-0.8	-187.7	1.4	9.7	GOOD	-2.9	-2.1	0.6	0.6	GOOD	-200.8	-197.4	-178.0	-172.6
1.406	-1.2	-248.2	1.8	8.2	GOOD	-3.4	-2.9	0.6	1.0	GOOD	-260.9	-256.4	-240.0	-236.2
2.055	-4.7	-298.3	1.3	16.9	FAIR	-6.7	-6.0	-3.4	-2.9	FAIR	-314.8	-315.1	-281.4	-270.0
3.000	-5.9	-352.2	2.6	11.1	FAIR	-10.4	-8.5	-3.2	-2.6	FAIR	-361.9	-363.3	-341.0	-330.5

AZIMUTH OPEN LOOP

AVERAGE		STAND. DEV.	GAIN-VARIATION				PHASE-VARIATION							
FREQU.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	MIN	AV-SD	AV+SD			
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	LEV.	(DB)	(DB)	(DB)	(DEG)	(DEG)	(DEG)			
0.100	-8.2	-71.3	2.0	46.5	F00R	-10.2	-10.2	-6.2	-4.7	F00R	-116.1	-117.9	-24.8	9.7
0.143	-3.5	-109.1	4.6	159.8	F00R	-10.5	-8.1	1.1	2.7	F00R	-357.1	-268.9	50.8	145.7
0.209	-7.2	-138.8	4.0	23.9	ACPT	-15.1	-11.2	-3.2	-4.0	ACPT	-186.0	-162.7	-115.0	-120.8
0.308	-8.3	-108.9	3.1	32.8	ACPT	-13.2	-11.4	-5.3	-3.7	ACPT	-146.5	-141.7	-76.2	-51.9
0.450	-6.3	-129.1	1.4	25.5	G00D	-8.1	-7.7	-5.0	-4.9	G00D	-158.8	-154.5	-103.6	-93.3
0.659	-8.4	-157.6	3.1	11.5	FAIR	-12.5	-11.5	-5.3	-3.8	FAIR	-171.6	-169.0	-146.1	-137.9
0.967	-6.4	-184.1	0.7	5.1	G00D	-7.6	-7.1	-5.7	-5.7	G00D	-191.5	-189.2	-179.0	-176.3
1.406	-5.0	-217.1	0.8	7.8	G00D	-6.4	-5.8	-4.2	-4.1	G00D	-228.7	-224.9	-209.4	-207.4
2.055	-3.5	-263.5	2.1	15.6	FAIR	-6.4	-5.6	-1.3	-0.3	FAIR	-288.7	-279.1	-247.9	-241.3
3.000	-0.0	-340.8	4.0	28.7	FAIR	-7.3	-4.1	4.0	4.1	FAIR	-363.9	-369.5	-312.1	-284.5

Table C-1 (b)

FREQUENCY RESPONSE STATISTICS FOR										5	E	D	6	RUNS AT		6	DEG	MAX.	FIELD		
SUBJECT NO.: 1, 2,																					
NUMBER OF RUNS: 2+										0+	0+	0+	0+	0+	0+	0+	0+	0+	0+	0+	0+
50% CEP TARGET :										AVG.= 3.7 DEG,		STD.	DEV.= 0.2 DEG,	RANGE: 3.4 . .		4.0 DEG		5RUNS			
50% CEP CENTROID:										AVG.= 3.7 DEG,		STD.	DEV.= 0.2 DEG,	RANGE: 3.4 . .		3.9 DEG					

ELEVATION CLOSED LOOP

AVERAGE			STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION			
FREQU. (HERTZ)	GAIN (DB)	PHASE (DEG)	GAIN (DB)	PHASE (DEG)	REL. (LEV.)	MIN (DB)	AV-SD (DB)	MAX (DB)	REL. (LEV.)	MIN (DEG)	AV-SD (DEG)	MAX (DEG)
0.121	-5.3	-62.3	2.2	13.3	ACFT	-7.4	-7.5	-3.1	-1.4	ACFT	-79.4	-49.0
0.176	-6.4	-74.2	5.1	43.4	POOR	-15.5	-11.5	-1.3	-1.3	POOR	-132.2	-30.8
0.253	-9.5	-86.9	6.5	40.5	POOR	-21.5	-16.0	-3.0	-4.2	POOR	-136.6	-46.3
0.374	-7.5	-137.9	7.4	80.9	ACFT	-21.9	-14.9	-0.2	-1.8	ACFT	-293.6	-57.0
0.549	-4.2	-135.4	2.4	30.0	FAIR	-7.7	-6.6	-1.8	-1.0	FAIR	-192.8	-105.4
0.802	-2.9	-151.0	4.2	18.6	FAIR	-10.5	-7.1	1.3	1.9	FAIR	-175.8	-132.4
1.165	-2.4	-215.5	3.7	27.5	ACFT	-5.3	-6.1	1.2	3.9	ACFT	-244.8	-187.9
1.703	-4.1	-268.8	3.6	11.5	FAIR	-9.2	-7.7	-0.5	0.1	FAIR	-285.4	-257.3
2.483	-8.0	-339.3	4.2	25.7	ACFT	-14.8	-12.2	-3.8	-3.0	ACFT	-376.1	-313.7
3.626	-9.8	-416.2	3.9	41.1	POOR	-16.2	-13.7	-5.9	-6.5	POOR	-456.3	-375.1

ELEVATION OF OPEN LOOP:

AVERAGE			STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION					
FREQU.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	MAX	REL.	MIN	AV-SD	AV+SD	MAX
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	LEV.	(DB)	(DB)	(DB)	(DB)	LEV.	(DEG)	(DEG)	(DEG)	(DEG)
0.121	-4.4	-94.8	2.0	18.0	ACFT	-7.0	-6.4	-2.4	-1.4	ACFT	-115.5	-112.8	-76.8	-68.6
0.176	-4.3	-100.8	9.0	36.6	POOR	-15.4	-13.3	4.7	10.0	POOR	-148.2	-137.4	-64.2	-39.0
0.253	-9.5	-106.5	6.7	38.1	POOR	-22.0	-16.3	-2.8	-1.6	POOR	-139.7	-144.6	-68.5	-40.8
0.374	-9.0	-160.3	6.6	66.4	ACFT	-21.7	-15.6	-2.4	-3.5	ACFT	-289.2	-226.7	-93.9	-102.5
0.549	-7.5	-153.7	2.0	18.4	FAIR	-10.6	-9.4	-5.5	-5.1	FAIR	-189.0	-172.1	-135.3	-136.6
0.802	-7.4	-163.4	2.8	9.9	FAIR	-12.7	-10.2	-4.7	-5.1	FAIR	-178.2	-173.4	-153.5	-150.1
1.165	-6.9	-199.9	2.0	17.4	ACFT	-9.1	-8.9	-4.9	-3.3	ACFT	-223.1	-217.3	-182.6	-174.7
1.703	-5.8	-235.3	3.2	8.3	FAIR	-10.1	-8.9	-2.6	-1.6	FAIR	-245.6	-243.5	-227.0	-224.1
2.483	-3.2	-334.6	7.5	37.1	POOR	-14.0	-10.7	4.3	7.6	POOR	-395.7	-371.7	-297.5	-296.0
3.626	-9.1	-360.4	4.1	128.1	POOR	-14.8	-13.2	-5.0	-3.0	POOR	-473.0	-488.5	-232.3	-119.5

Table C-2 (a)

[illegible]

AZIMUTH CLOSED LOOP

AVERAGE		STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION						
FREQU.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	MAX	REL.	MIN	AV-SD	AV+SD	MAX
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	LEV.	(DB)	(DB)	(DB)	(DB)	LEV.	(DEG)	(DEG)	(DEG)	(DEG)
0.100	-8.8	-79.4	5.4	58.4	ACPT	-16.4	-14.2	-3.4	-4.8	ACPT	-162.0	-137.8	-20.9	-38.0
0.143	-12.7	-154.6	4.2	33.7	POOR	-18.4	-16.9	-8.5	-8.5	POOR	-182.7	-188.3	-121.0	-107.3
0.209	-8.3	-98.7	6.6	46.6	POOR	-16.7	-14.8	-1.7	-0.7	POOR	-135.8	-145.3	-52.0	-32.9
0.308	-6.1	-127.1	3.3	39.3	ACPT	-10.2	-9.5	-2.8	-2.0	ACPT	-180.3	-166.4	-87.8	-86.6
0.450	-7.7	-129.8	7.2	30.4	ACPT	-17.8	-14.9	-0.5	-2.1	ACPT	-171.2	-160.1	-99.4	-99.2
0.659	-2.7	-141.1	5.6	15.6	FAIR	-10.4	-8.3	2.8	2.7	FAIR	-161.0	-156.8	-125.5	-122.8
0.967	-2.6	-193.2	3.6	4.9	GOOD	-7.6	-6.2	1.0	0.7	GOOD	-196.7	-198.0	-188.3	-186.3
1.406	-2.8	-257.1	1.9	4.1	GOOD	-4.3	-4.7	-1.0	-0.2	GOOD	-262.8	-261.1	-253.0	-254.0
2.055	-6.1	-302.0	4.1	11.5	GOOD	-11.9	-10.2	-1.9	-2.6	GOOD	-317.2	-313.5	-290.5	-289.4
3.000	-7.7	-346.8	2.8	9.1	FAIR	-11.6	-10.5	-4.9	-5.4	FAIR	-354.9	-355.9	-337.7	-334.1

AZIMUTH OPEN LOOP

AVERAGE		STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION						
FREQU.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	MAX	REL.	MIN	AV-SD	AV+SD	MAX
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	(DEG)	(DB)	(DB)	(DB)	(DB)	(LEV.)	(DEG)	(DEG)	(DEG)	(DEG)
0.100	-6.7	-101.6	7.7	44.4	ACPT	-17.6	-14.4	1.0	-1.0	ACPT	-164.4	-146.0	-57.1	-68.9
0.143	-14.4	-156.9	3.1	30.7	POOR	-18.7	-17.6	-11.3	-11.3	POOR	-181.9	-187.6	-126.2	-113.6
0.209	-9.1	-114.4	6.0	44.6	POOR	-17.5	-15.1	-3.1	-4.1	POOR	-157.0	-159.0	-69.8	-52.8
0.308	-8.3	-145.5	3.0	27.4	ACPT	-12.5	-11.3	-5.3	-5.6	ACPT	-180.3	-172.9	-118.2	-113.4
0.450	-10.1	-149.4	6.2	17.2	ACPT	-18.9	-16.3	-3.9	-5.5	ACPT	-172.2	-166.6	-132.3	-130.7
0.659	-7.5	-156.1	3.2	15.1	FAIR	-11.9	-10.7	-4.2	-4.3	FAIR	-170.2	-171.2	-141.0	-135.1
0.967	-7.5	-187.7	2.1	3.5	GOOD	-10.5	-9.7	-5.4	-5.6	GOOD	-191.8	-191.1	-184.2	-183.3
1.406	-5.6	-226.0	1.0	6.3	GOOD	-6.6	-6.6	-4.6	-4.2	GOOD	-232.7	-232.2	-219.7	-217.6
2.055	-5.3	-270.4	3.5	25.2	GOOD	-10.2	-8.8	-1.8	-2.7	GOOD	-305.2	-295.6	-245.2	-246.6
3.000	-3.1	-335.8	4.3	17.2	FAIR	-9.0	-7.4	1.1	1.0	FAIR	-353.1	-353.0	-318.6	-312.3

Table C-2 (b)

SUBJECT NO.: 1, 2,

FREQUENCY RESPONSE STATISTICS FOR 3 E O G RUNS AT 9 DEG MAX. FIELD

NUMBER OF RUNS: 2+ 1+ 0+ 0+ 0+ 0+ 0+ 0+ 0+ 0+ 0+ 0+ 0+ 0+ 0+ 0+= 3RUNS
50% CEP TARGET : AVG.= 5.8 DEG, STD. DEV.= 0.3 DEG, RANGE: 5.5 . .6.2 DEG
50% CEP CENTROID: AVG.= 5.7 DEG, STD. DEV.= 0.3 DEG, RANGE: 5.4 . .6.2 DEG

ELEVATION CLOSED LOOP

AVERAGE			STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION					
FREQU. (HERTZ)	GAIN (DB)	PHASE (DEG)	GAIN (DB)	PHASE (DEG)	REL. LEV.	MIN (DB)	AV-SD (DB)	AV+SD (DB)	MAX (DB)	REL. LEV.	MIN (DEG)	AV-SD (DEG)	AV+SD (DEG)	MAX (DEG)
0.121	-2.3	-132.3	2.6	132.5	GOOD	-4.2	-4.9	0.3	1.4	GOOD	-319.7	-264.8	0.2	-35.9
0.176	-4.5	-84.4	0.9	73.1	POOR	-5.2	-5.4	-3.6	-3.2	POOR	-186.4	-157.5	-11.3	-19.2
0.253	-4.3	-86.0	1.5	55.0	POOR	-6.0	-5.8	-2.8	-2.3	POOR	-152.1	-140.9	-31.0	-17.5
0.374	-7.1	-119.4	4.5	58.1	ACPT	-11.7	-11.6	-2.6	-1.0	ACPT	-199.5	-177.5	-61.3	-63.5
0.549	-5.2	-106.6	2.3	44.1	ACPT	-8.3	-7.5	-2.9	-3.0	ACPT	-156.0	-150.7	-62.5	-49.0
0.802	-3.1	-129.5	4.8	51.6	FAIR	-9.7	-7.9	1.7	1.5	FAIR	-182.9	-181.1	-77.9	-59.7
1.165	-3.8	-196.1	7.6	16.0	FAIR	-14.5	-11.4	3.8	1.9	FAIR	-211.7	-212.2	-180.1	-174.1
1.703	-3.5	-265.9	2.1	16.4	GOOD	-6.3	-5.6	-1.3	-1.1	GOOD	-283.3	-282.3	-249.6	-244.0
2.483	-5.3	-354.7	3.3	20.8	FAIR	-9.5	-8.6	-2.0	-1.5	FAIR	-382.9	-375.6	-333.9	-333.2
3.626	-8.9	-416.0	1.4	20.0	ACPT	-10.8	-10.3	-7.6	-7.6	ACPT	-440.3	-435.9	-396.0	-391.4

ELEVATION OF OPEN LOOP

AVERAGE		STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION						
FREQU.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	MIN	AV-SD	AV+SD			
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	LEV.	(DB)	(DB)	(DB)	(DEG)	(DEG)	(DEG)			
0.121	1.0	-129.4	1.9	76.3	GOOD	-0.7	0.9	2.9	3.7	GOOD	-237.3	-205.8	-53.1	-72.1
0.176	-3.3	-101.5	3.5	60.5	POOR	-7.8	-6.7	0.2	0.6	POOR	-183.8	-162.1	-41.0	-39.9
0.253	-3.9	-109.1	4.6	51.3	POOR	-9.3	-8.4	0.7	1.9	POOR	-161.4	-160.4	-57.8	-39.4
0.374	-8.7	-135.8	3.4	47.3	ACPT	-11.2	-12.0	-5.3	-3.9	ACPT	-194.2	-183.1	-88.4	-78.3
0.549	-7.0	-124.9	0.5	40.2	ACPT	-7.5	-7.5	-6.5	-6.4	ACPT	-165.9	-165.1	-84.6	-70.2
0.802	-6.7	-141.5	1.5	45.1	FAIR	-8.6	-8.2	-5.2	-4.9	FAIR	-181.5	-186.6	-96.4	-78.5
1.165	-8.7	-186.6	5.2	8.4	FAIR	-16.0	-13.9	-3.5	-5.0	FAIR	-194.7	-195.0	-178.2	-175.0
1.703	-5.3	-232.3	2.3	8.4	GOOD	-8.5	-7.6	-3.0	-3.6	GOOD	-243.9	-240.7	-223.9	-224.2
2.483	1.5	-334.1	7.1	42.0	POOR	-6.5	-5.6	8.5	10.7	POOR	-393.5	-376.1	-292.1	-303.3
3.626	-7.3	-434.9	2.7	19.2	ACPT	-10.8	-10.0	-4.6	-4.2	ACPT	-456.8	-454.1	-415.8	-410.1

Table C-3 (a)

	FREQUENCY RESPONSE STATISTICS FOR						4	E	O	6	RUNS AT 12 DEG MAX. FIELD		
SUBJECT NO.:	1,	2,											
NUMBER OF RUNS:	2+	2+	0+	0+	0+	0+	0+	0+	0+	0+	0+	0+	0+=
50% CEP TARGET :			AVG.= 7.3 DEG,		STD. DEV.= 0.7 DEG,	RANGE: 6.6.	.	.8.3 DEG					
50% CEP CENTROID:			AVG.= 7.3 DEG,		STD. DEV.= 0.7 DEG,	RANGE: 6.5.	.	.8.3 DEG					

AZIMUTH CLOSED LOOP

AVERAGE			STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION					
FREQU.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	MIN	AV-SD	AV+SD	MAX		
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	(DEG)	(DB)	(DB)	(DB)	(DEG)	(DEG)	(DEG)	(DEG)		
0.100	-5.3	-96.7	2.7	48.5	FAIR	-8.1	-8.0	-2.6	-1.2	FAIR	-143.5	-145.2	-48.2	-31.7
0.143	-6.6	-134.3	7.7	97.9	ACFT	-19.1	-14.3	1.1	-0.1	ACFT	-288.9	-232.2	-36.4	-30.1
0.209	-7.9	-111.5	4.0	36.3	POOR	-11.5	-11.9	-3.9	-1.1	POOR	-147.6	-147.9	-75.2	-57.0
0.308	-5.2	-114.3	4.5	48.5	ACFT	-12.1	-9.7	-0.7	-1.0	ACFT	-195.5	-162.8	-65.8	-74.3
0.450	-7.4	-136.2	4.4	50.6	FAIR	-12.1	-11.8	-3.0	-1.2	FAIR	-212.6	-186.9	-85.6	-74.8
0.659	-5.1	-142.7	3.7	29.8	GOOD	-10.5	-8.8	-1.3	-0.5	GOOD	-179.0	-172.5	-112.9	-97.6
0.967	-2.6	-190.8	1.1	10.2	FAIR	-3.7	-3.7	-1.6	-0.9	FAIR	-205.6	-201.0	-180.6	-176.9
1.406	-3.8	-249.3	2.6	4.7	GOOD	-7.5	-6.4	-1.2	-1.0	GOOD	-256.8	-254.0	-244.6	-243.8
2.055	-4.1	-301.3	1.1	12.7	GOOD	-5.7	-5.1	-3.0	-2.9	GOOD	-314.9	-314.0	-288.7	-280.9
3.000	-8.4	-362.5	2.4	13.0	GOOD	-12.0	-10.8	-6.0	-5.4	GOOD	-373.7	-375.5	-349.5	-340.4

AZIMUTH OPEN LOOP

	AVERAGE	STAND.	DEV.	GAIN-VARIATION	PHASE-VARIATION	
FREQU. (HERTZ)	GAIN (DB)	PHASE (DEG)	GAIN (DB)	PHASE (DEG) REL. LEV.	MIN (DB) (DEG) MAX (DB) (LEV.) AV+SD (DB) AV-SD (DEG) (DEG)	MAX (DEG) MAX (DEG)
:0.100	-5.9	-40.0	3.6	117.7 FAIR	-10.0 -9.6 -2.3	-0.1 FAIR -160.4 -157.7 77.7 154.3
:0.143	-7.3	-155.1	6.7	83.8 ACFT	-18.8 -14.1 -0.6	-2.0 ACFT -282.7 -238.9 -71.4 -50.8
:0.209	-8.8	-133.7	5.1	18.9 POOR	-13.3 -14.0 -3.7	-0.2 POOR -154.2 -152.6 -114.8 -112.1
:0.308	-6.9	-140.2	4.2	33.1 ACFT	-14.0 -11.2 -2.7	-2.9 ACFT -192.4 -173.4 -107.1 -102.2
:0.450	-9.6	-147.8	2.8	42.2 FAIR	-12.9 -12.4 -6.8	-6.2 FAIR -205.6 -190.0 -105.6 -89.2
:0.659	-8.4	-154.5	2.5	20.8 GOOD	-12.7 -10.9 -5.9	-6.3 GOOD -179.5 -175.4 -133.7 -122.0
:0.967	-7.4	-186.3	0.6	6.2 FAIR	-7.8 -8.0 -6.8	-6.4 FAIR -195.5 -192.5 -180.2 -178.2
:1.406	-6.7	-223.2	1.7	7.3 GOOD	-9.3 -8.4 -5.0	-4.9 GOOD -231.0 -230.5 -215.9 -215.5
:2.055	-2.8	-264.1	0.9	15.1 GOOD	-3.9 -3.7 -1.9	-1.4 GOOD -284.6 -279.2 -249.0 -241.9
:3.000	-4.3	-361.2	3.5	23.6 GOOD	-9.6 -7.8 -0.8	0.1 GOOD -378.2 -384.8 -337.7 -320.6

Table C-3 (b)


FREQUENCY	RESPONSE	STATISTICS FOR	4	E	O	G	RUNS AT 12 DEG MAX.	FIELD
SUBJECT NO.:	1,	2,						
NUMBER OF RUNS:	2+	2+	0+	0+	0+	0+	0+	0+ =
50% CEP TARGET :	Avg.	= 7.3 DEG,	STD.	DEV.	= 0.7 DEG,	RANGE:	6.6.	. .8.3 DEG
50% CEP CENTROID:	Avg.	= 7.3 DEG,	STD.	DEV.	= 0.7 DEG,	RANGE:	6.5.	. .8.3 DEG

ELEVATION CLOSED LOOP

AVERAGE			STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION					
FREQU.	GAIN	PHASE	GAIN	PHASE	REL.	MIN	AV-SD	AV+SD	MAX	REL.	MIN	AV-SD	AV+SD	MAX
(HERTZ)	(DB)	(DEG)	(DB)	(DEG)	(DEG)	(DB)	(DB)	(DB)	(DB)	(DEG)	(DEG)	(DEG)	(DEG)	(DEG)
0.121	-8.4	-45.3	3.1	53.4	ACPT	-11.7	-11.5	-5.4	-3.4	ACPT	-120.0	-98.7	8.1	31.0
0.176	-5.8	-116.6	4.7	71.0	FAIR	-10.8	-10.5	-1.1	1.9	FAIR	-221.4	-187.6	-45.6	-30.8
0.253	-12.1	-174.7	7.0	79.7	POOR	-20.9	-19.1	-5.1	-3.0	POOR	-309.3	-254.4	-95.0	-107.8
0.374	-8.1	-133.2	4.5	55.7	ACPT	-15.6	-12.6	-3.6	-4.1	ACPT	-225.8	-188.9	-77.5	-83.7
0.549	-10.9	-168.8	5.8	33.2	POOR	-18.0	-16.8	-5.1	-2.7	POOR	-210.0	-202.0	-135.6	-122.2
0.802	-5.6	-169.1	2.6	9.1	GOOD	-9.5	-8.2	-3.1	-2.5	GOOD	-181.0	-178.2	-160.0	-155.6
1.165	-4.2	-201.6	3.0	17.4	GOOD	-9.2	-7.2	-1.2	-1.1	GOOD	-225.2	-218.9	-184.2	-176.5
1.703	-4.5	-270.2	1.5	9.1	GOOD	-7.1	-6.0	-3.0	-3.2	GOOD	-281.2	-279.3	-261.1	-260.3
2.483	-7.8	-331.1	1.9	16.3	GOOD	-10.3	-9.7	-5.9	-5.3	GOOD	-356.9	-347.4	-314.8	-311.8
3.626	-10.8	-393.1	3.5	11.1	FAIR	-16.0	-14.3	-7.3	-6.3	FAIR	-404.3	-404.3	-382.0	-376.6

ELEVATION OPEN LOOP

AVERAGE			STAND. DEV.		GAIN-VARIATION				PHASE-VARIATION					
FREQU. (HERTZ)	GAIN (DB)	PHASE (DEG)	GAIN (DB)	PHASE (DEG)	REL. LEV.	MIN (DB)	AV-SD (DB)	AV+SD (DB)	MAX (DB)	REL. LEV.	MIN (DEG)	AV-SD (DEG)	AV+SD (DEG)	MAX (DEG)
0.121	-6.7	-46.6	5.1	73.9	ACPT	-10.8	-11.8	-1.7	1.8	ACPT	-134.5	-120.5	27.3	70.3
0.176	-6.0	-145.7	7.0	39.4	FAIR	-12.5	-13.0	1.0	5.8	FAIR	-208.5	-185.2	-106.3	-101.7
0.253	-13.5	-181.3	5.4	72.1	POOR	-21.1	-19.0	-8.1	-6.6	POOR	-302.0	-253.4	-109.3	-112.5
0.374	-9.5	-150.3	4.3	41.4	ACPT	-16.6	-13.8	-5.3	-5.9	ACPT	-219.7	-191.8	-108.9	-112.5
0.549	-13.1	-175.0	4.7	22.7	POOR	-19.0	-17.8	-8.4	-6.4	POOR	-205.3	-197.8	-152.3	-146.2
0.802	-9.3	-172.6	1.7	6.0	GOOD	-12.0	-11.0	-7.5	-7.3	GOOD	-180.6	-178.7	-166.6	-163.6
1.165	-8.3	-193.3	2.0	10.4	GOOD	-11.7	-10.3	-6.2	-6.4	GOOD	-207.3	-203.7	-182.9	-178.0
1.703	-5.9	-239.6	1.0	10.0	GOOD	-7.2	-6.9	-4.9	-4.4	GOOD	-255.8	-249.7	-229.6	-230.2
2.483	-4.8	-313.3	1.9	27.3	GOOD	-7.2	-6.7	-2.9	-2.8	GOOD	-355.6	-340.6	-286.0	-279.2
3.626	-8.2	-405.6	4.9	12.9	FAIR	-14.8	-13.1	-3.4	-1.1	FAIR	-421.1	-418.5	-392.6	-391.1

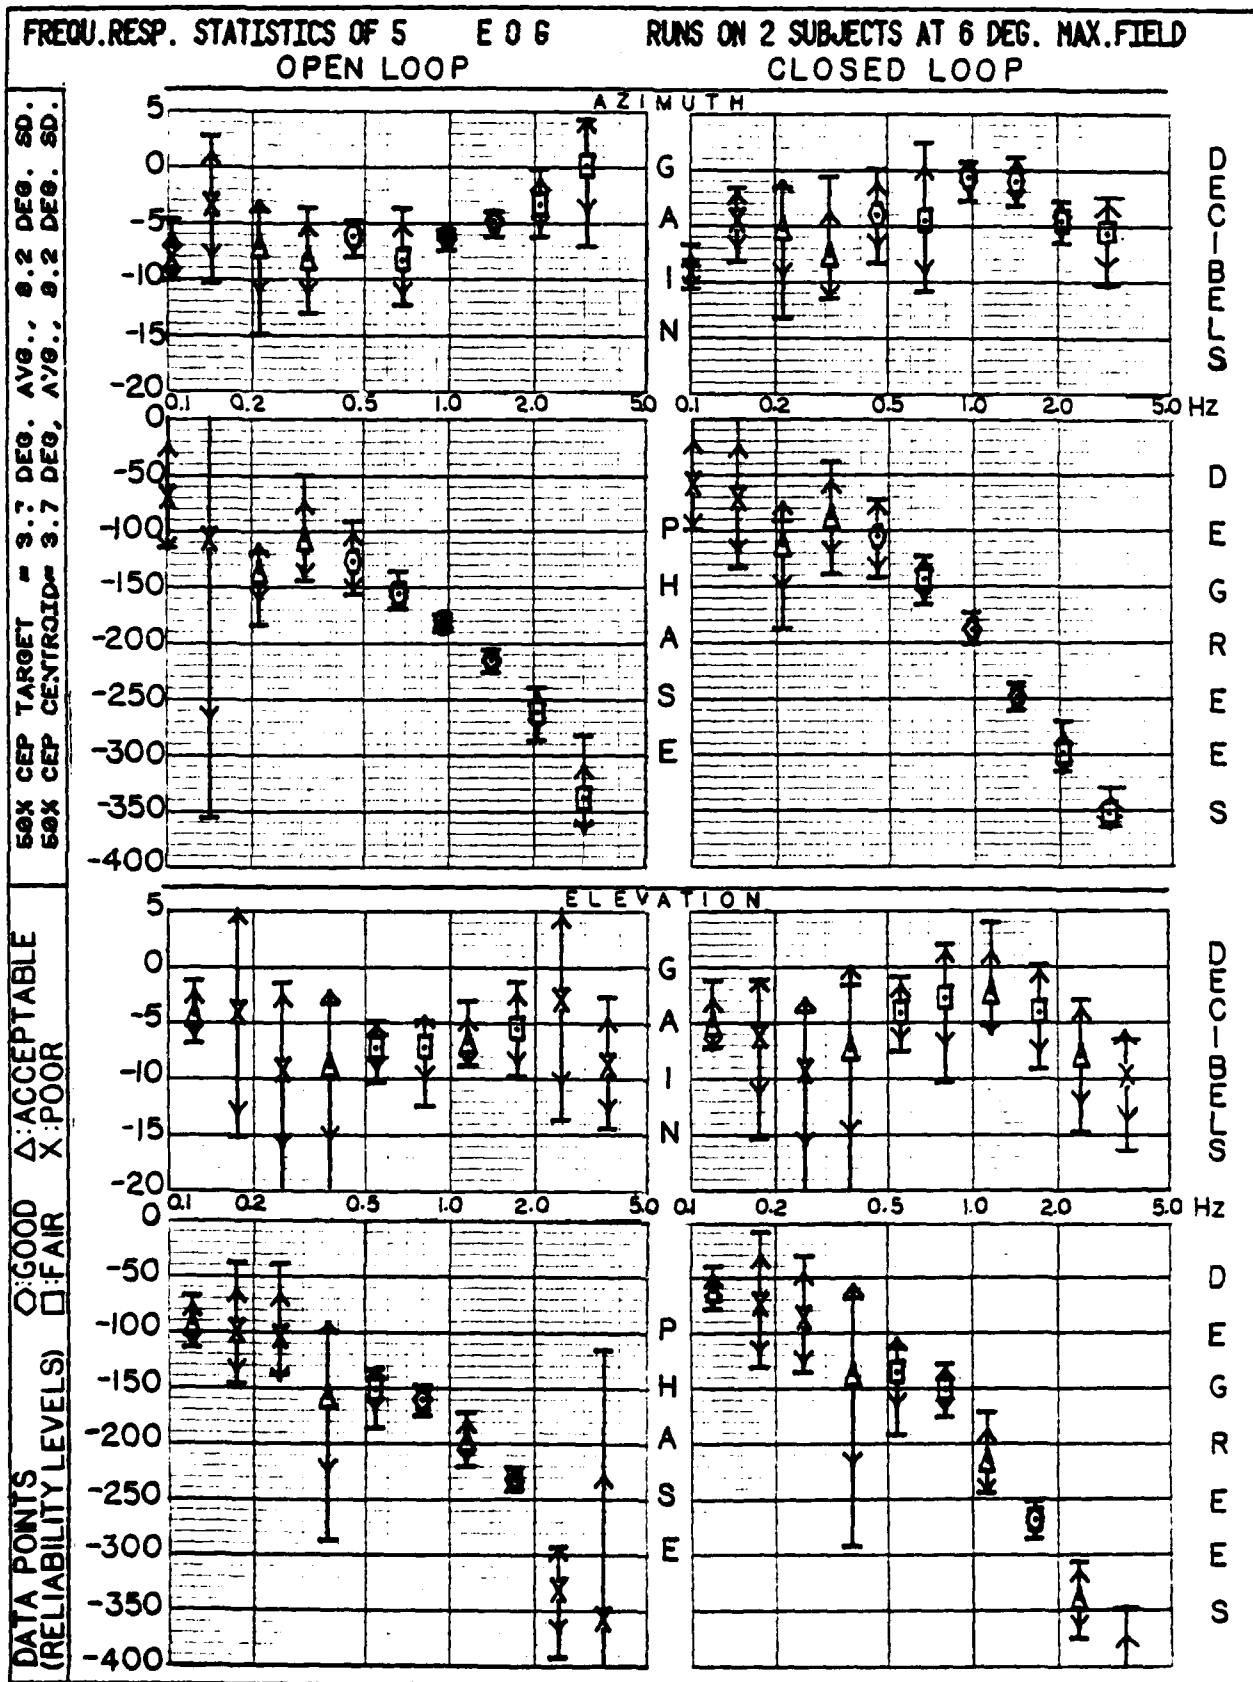


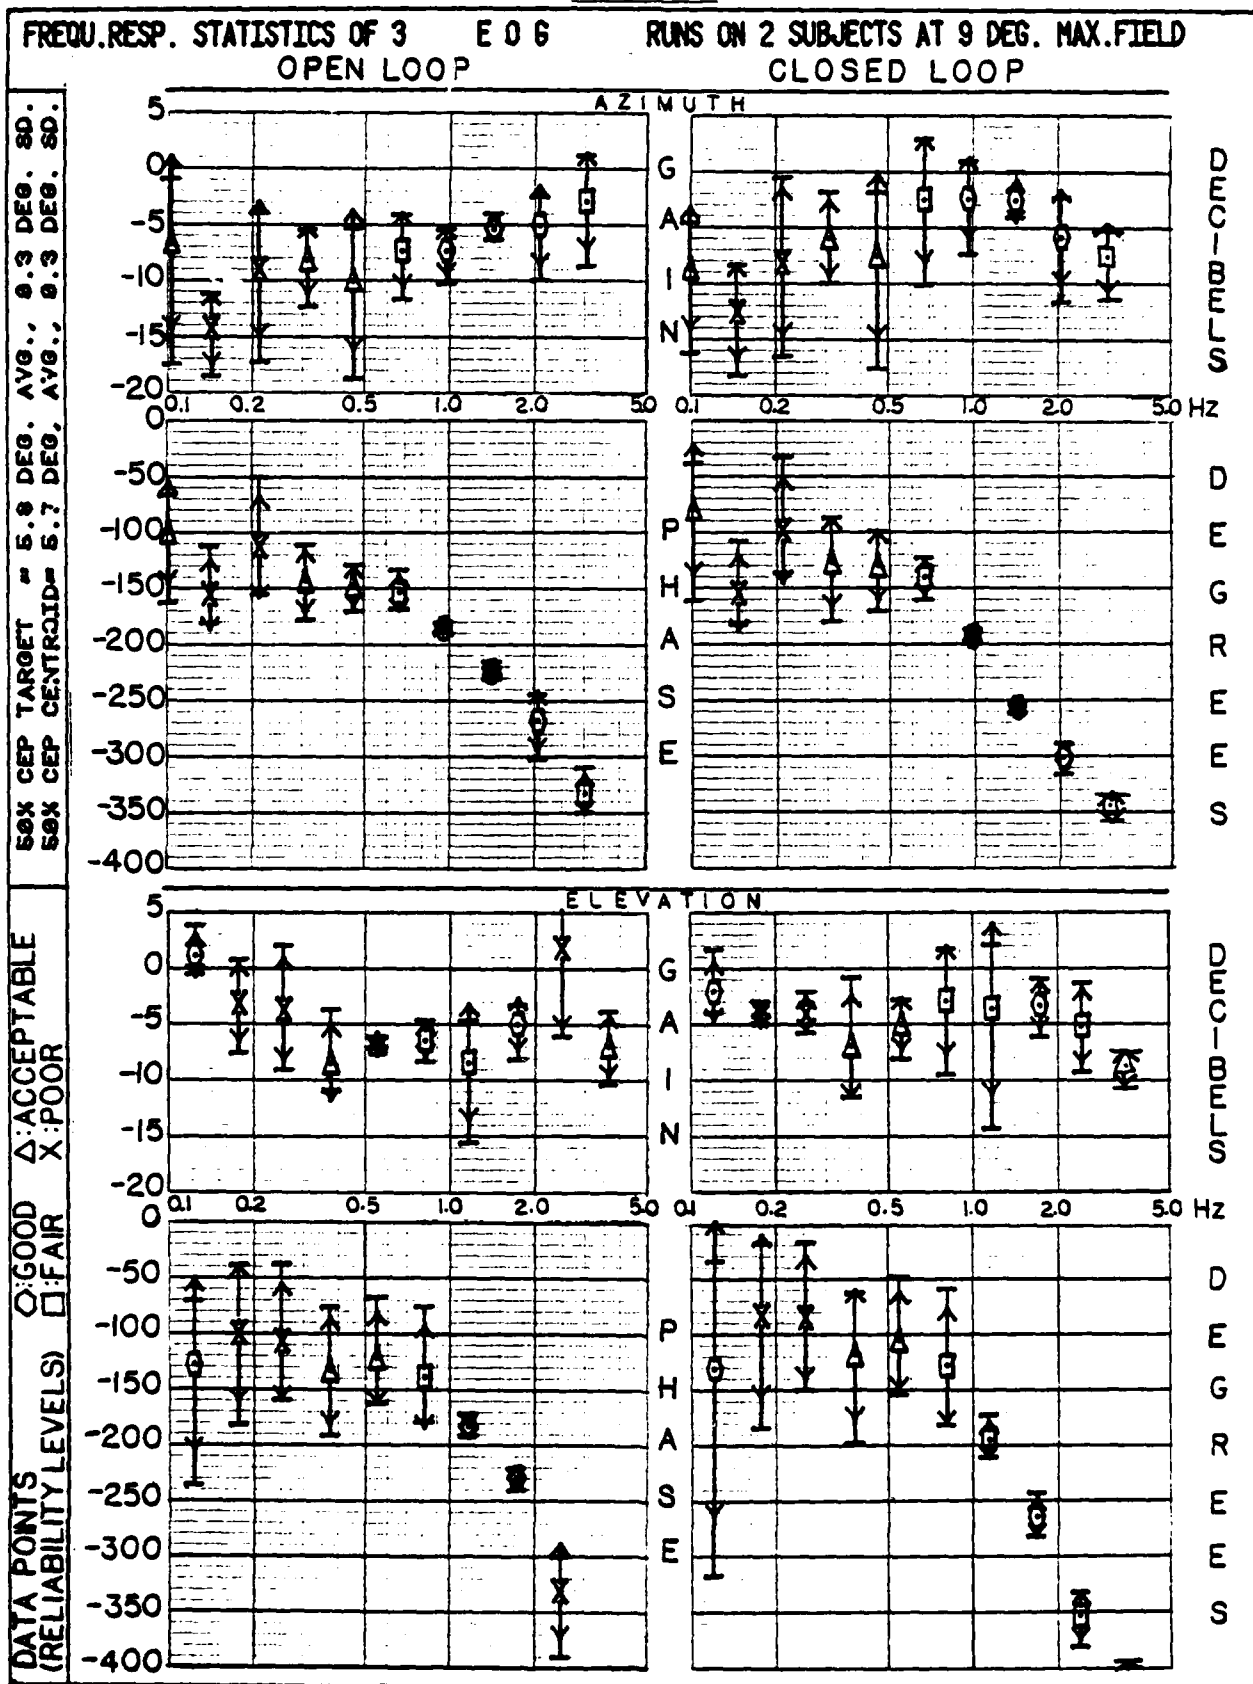


Figure C-3

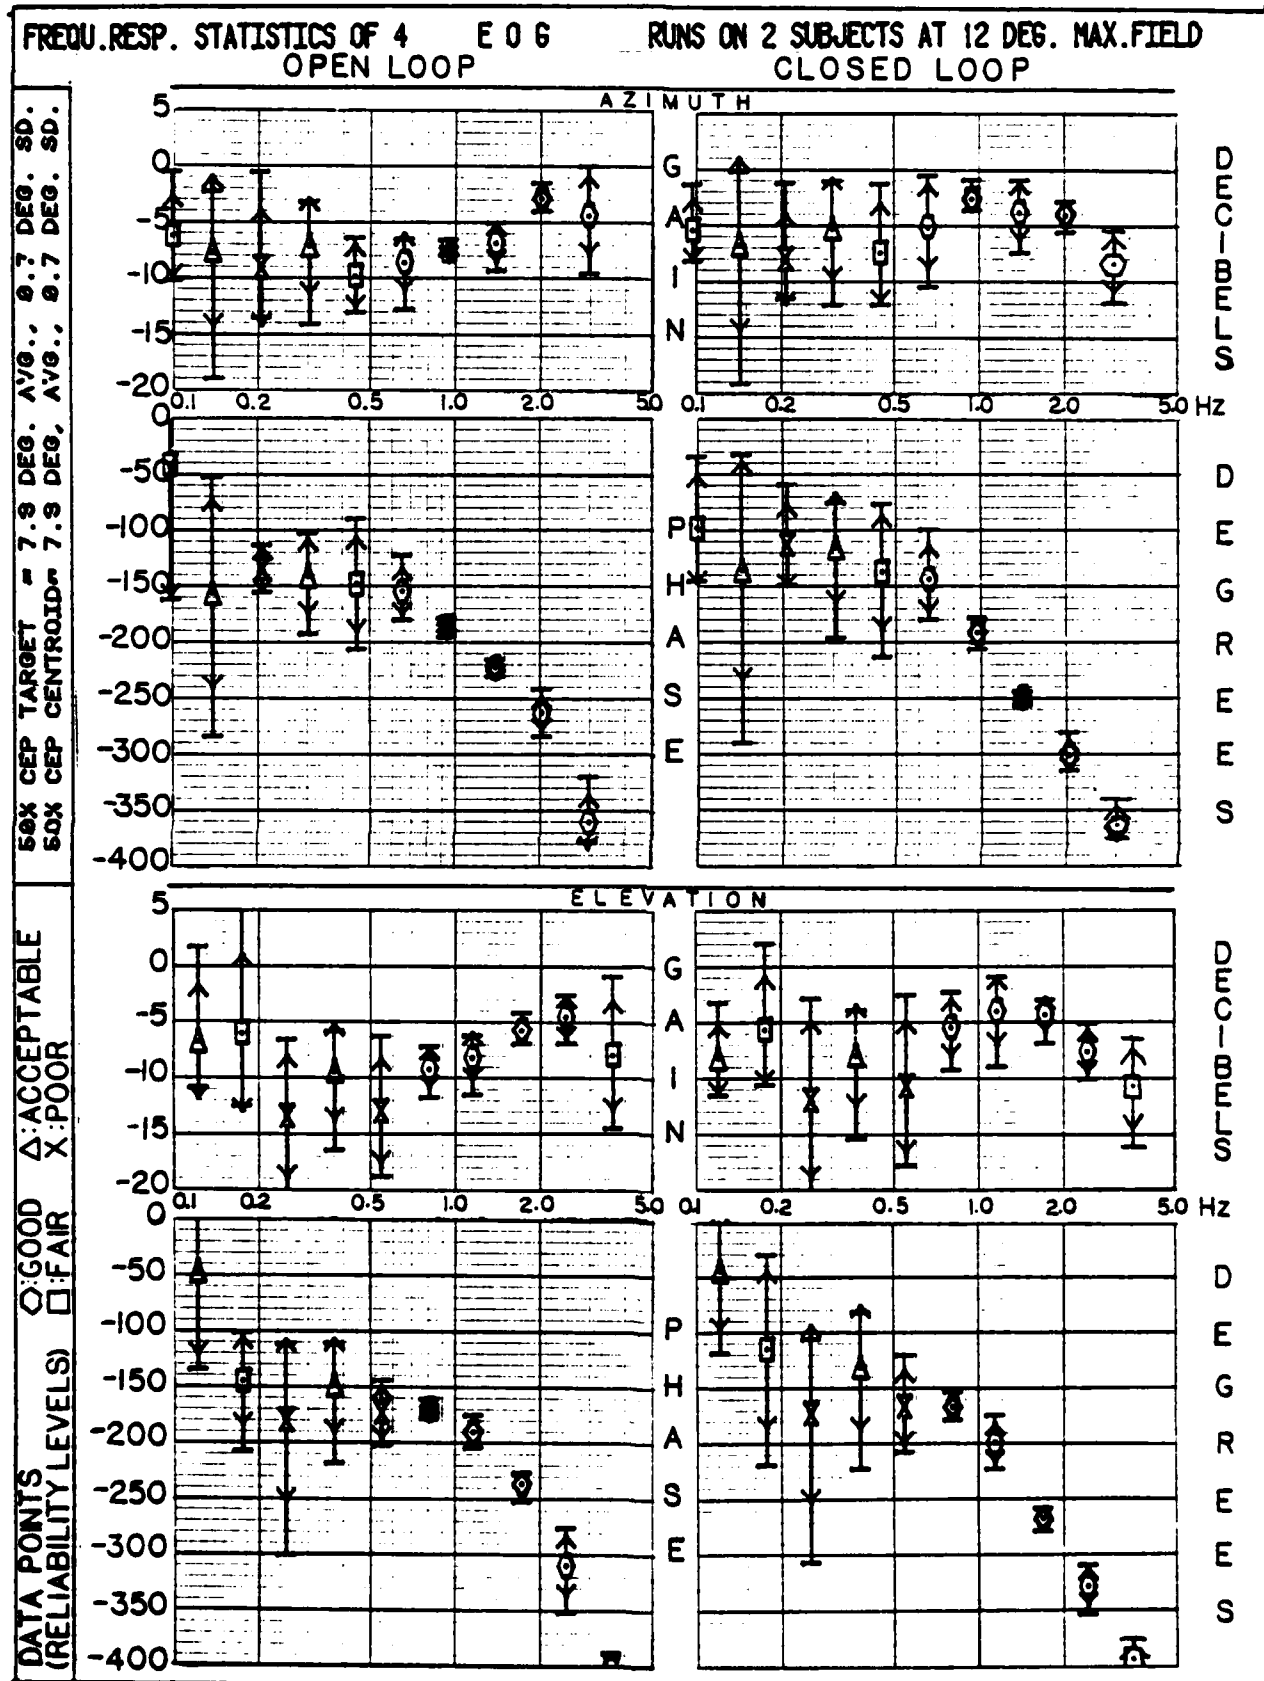

DATE
FILMED
-8