

UNCLASSIFIED

AD NUMBER

AD093198

CLASSIFICATION CHANGES

TO: unclassified

FROM: confidential

LIMITATION CHANGES

TO:
Approved for public release, distribution unlimited

FROM:
Controlling Organization: British Embassy,
3100 Massachusetts Avenue, NW, Washington,
DC 20008.

AUTHORITY

DSTL, HO 195//9/177, 5 Aug 2008; DSTL, HO
195//9/177, 5 Aug 2008

THIS PAGE IS UNCLASSIFIED

**Best
Available
Copy**

W W

NOTICE: THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE NATIONAL DEFENSE OF THE UNITED STATES WITHIN THE MEANING OF THE ESPIONAGE LAWS, TITLE 18, U.S.C., SECTIONS 793 and 794. THE TRANSMISSION OR THE REVELATION OF ITS CONTENTS IN ANY MANNER TO AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW.

Table 1

Penetration of micro-fragment gun
projectile into red deal (5 rings/in.)

Velocity of fragment (ft./sec.)	Penetration (mm.)
1350	16.7
1600	21.7
1750	24.2

Many of the usual formulae for the penetration of projectiles, such as that of Poncelet, give the penetration as proportional to the "shape-factor", M/A , of the projectile, M being the mass and A the projected area of the projectile. It has therefore been assumed that the penetration of bomb-fragments, moving with the same velocity, into a target of given resistance per unit area, is also proportion to the "shape-factor" of the fragments. A sphere has a "shape-factor" of $3.28 M^{0.55}$ in milligram-millimetre units; while that for the actual bomb fragments was found to be $2.0 M^{0.22}$; and on this theory the penetration of a sphere weighing 55 milligrams should be 2.6 times as great as the penetration of a bomb-fragment of equal mass.

The bomb-penetration tests showed that a fragment weighing 55 milligrams penetrated something of the order of 10 mm., and the considerations of shape outlined above show that a sphere of the same velocity and mass would penetrate about 26 mm. The estimated velocity of a sphere giving this penetration is about 1900 ft./sec. and similarly the estimated velocity of a fragment penetrating 13 mm. into the timber is about 2250 ft./sec. The penetration of actual bomb fragments weighing 55 milligrams is, however, rather uncertain, and until further data are available, it is impossible to form a very accurate estimate of the velocity by this method, but the conclusion is that bomb-fragments of similar size to the standard ball have a maximum velocity of about 2000 ft./sec. at 50 ft. from the bomb.

Further evidence, though of slight value, has recently been obtained from a few experiments performed in collaboration with Professor Zuckermann. Standard micro-gun projectiles were fired at a velocity of 2000 ft./sec. at fleshy tissue. The damage caused was much in excess of that expected from experience of wounds caused by bomb-splinters of this size.

Effect of air resistance on the velocity of small particles

It is believed that initially velocities comparable with those of the blast wave will be imparted to most fragments, irrespective of size. From the measured velocity of the larger fragments, which will not be greatly affected by air resistance at the distance of measurement, and from photographs of exploding charges, this is believed to be of the order of 5000 to 10,000 ft./sec. The effect of air-resistance has therefore been examined to see whether this will account for the low velocities of small fragments observed at 50 ft. from the bomb.

Aerodynamic resistance at supersonic speeds is given by the equation:-

$$R = C_D A \rho v^2 \quad (1)$$

where R is the resistance to motion,
 A is the projected area of the fragment, normal to the
direction of motion,
 ρ is the density of air,
 v is the velocity of the fragment
and C_D is a constant, called the ballistic coefficient.

If M is the mass of the fragment and a its deceleration, then

$$M a = R = C_D A \rho v^2$$

$$\therefore \frac{dv}{dt} = \frac{C_D A \rho v^2}{M}$$

$$\text{Now } dt = \frac{ds}{v}$$

$$\therefore M dv = C_D A \rho v^2 \frac{ds}{v}$$

$$\text{or } \int \frac{v_0}{v} = \frac{C_D A}{M} \rho s. \quad (2)$$

where s is the distance travelled,
and v_0 is the initial velocity.

Recently Frosser and Young* have determined the coefficient C_D for small models of various shapes by placing them in a wind-tunnel and measuring the drag. Using their values for C_D , the velocity-distance curves for a number of models of different shapes have been calculated and these are shown in Fig. 2. The effect of the shape is clearly shown. At 21 ft. the velocity of the star-shaped model is half its initial velocity and at 50 ft. it has dropped to one-fifth of its initial velocity. On the other hand, the velocity of a sphere that presents the same area to the air is still three-quarters of its initial velocity at 50 ft. (Curves 12 and 2 of Fig. 2). It is reasonable to assume that a smaller and more irregular fragment would be retarded more quickly. Thus assuming an initial velocity of from 5000 to 10,000 ft./sec., the fragments have a speed of only 1000 to 2000 ft./sec. when 50 ft. from the bomb.

This estimate agrees fairly well with the order of velocities deduced from the experimental work. If it be assumed that within a radius of 50 ft. from a bomb the danger from large splinters is high, therefore outside this radius many small targets will be hit only by smaller fragments, it would follow that body armour capable of withstanding small fragments moving with a velocity of 2000 ft./sec. would be of value. Incidentally on account of the "shape factor", the 53-milligram ball projected at 2000 ft./sec. in the laboratory tests is equivalent in its penetration to a considerably heavier bomb-fragment striking at this speed.

* Frosser and Young: Report on the air resistance at supersonic speeds of various shaped models: R.C. 125.

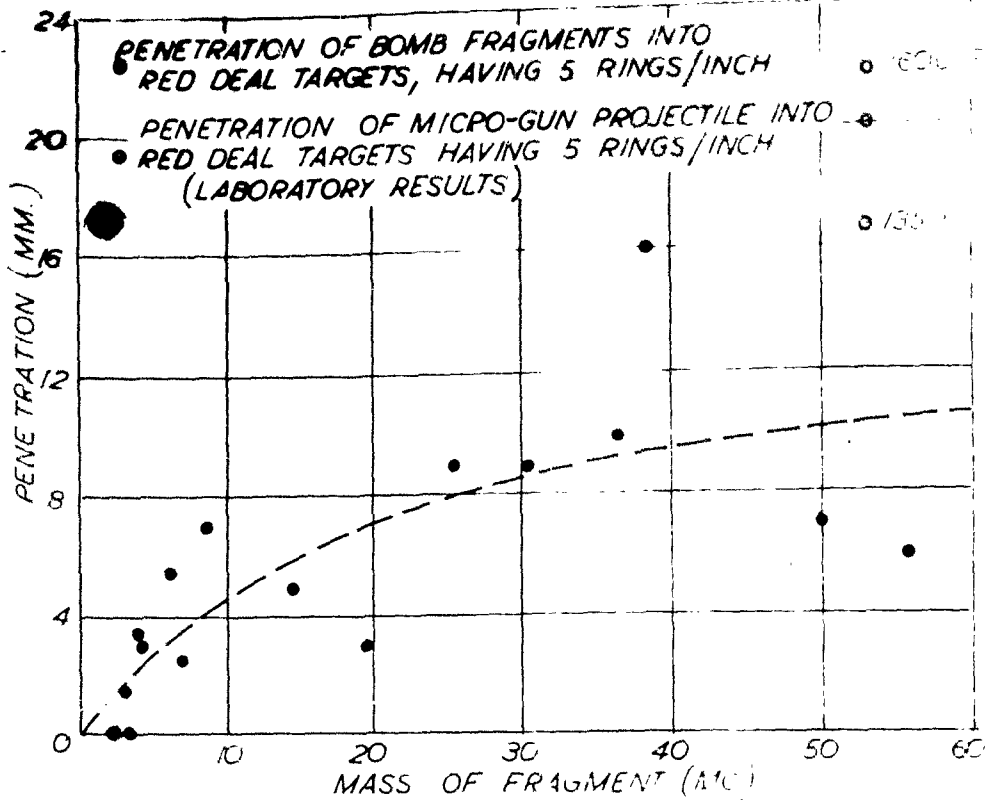


FIG 1. RELATION BETWEEN MASS OF FRAGMENTS AND PENETRATION INTO RED DEAL TARGETS 50 FT. FROM A GERMAN 250 KG. BOMB

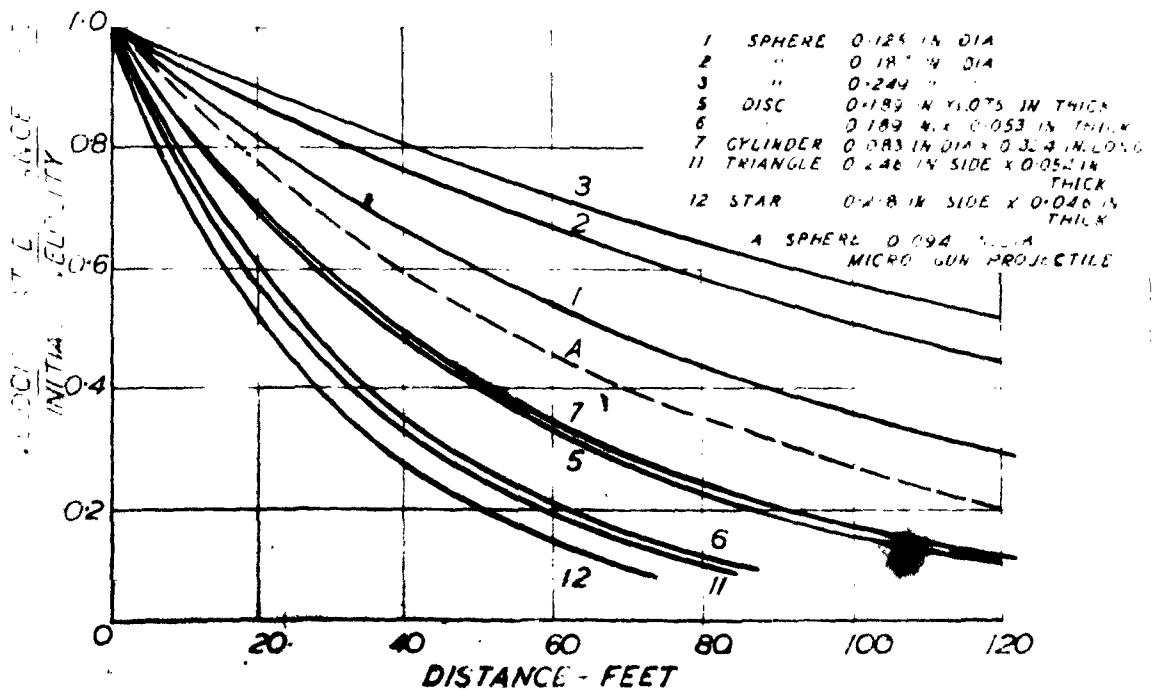


FIG 2. RELATION BETWEEN VELOCITY OF SMALL STEEL FRAGMENTS AND DISTANCE TRAVELLED FOR FRAGMENTS OF DIFFERENT SHAPES



*Information Centre
Knowledge Services*
[dstl] *Porton Down*
Salisbury
Wiltshire
SP4 6JQ
22060-6218
Tel: 01980-613753
Fax 01980-613970

Defense Technical Information Center (DTIC)
8725 John J. Kingman Road, Suit 0944
Fort Belvoir, VA 22060-6218
U.S.A.

AD#: AD093198

Date of Search: 5 August 2008

Record Summary: HO 195/9/177

Title: The velocity of small bomb fragments, (ARP/135/NSB), by N.S. Billington, (December 1940). (Rotaprinted).

Availability Open Document, Open Description, Normal Closure before FOI Act: 30 years

Former reference (Department) NA

Held by The National Archives, Kew

This document is now available at the National Archives, Kew, Surrey, United Kingdom.

DTIC has checked the National Archives Catalogue website (<http://www.nationalarchives.gov.uk>) and found the document is available and releasable to the public.

Access to UK public records is governed by statute, namely the Public Records Act, 1958, and the Public Records Act, 1967.

The document has been released under the 30 year rule.

(The vast majority of records selected for permanent preservation are made available to the public when they are 30 years old. This is commonly referred to as the 30 year rule and was established by the Public Records Act of 1967).

This document may be treated as UNLIMITED.