

# UNCLASSIFIED

|                                                    |                                                                                                                                                                                                                                 |
|----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AD NUMBER                                          |                                                                                                                                                                                                                                 |
| AD093244                                           |                                                                                                                                                                                                                                 |
| CLASSIFICATION CHANGES                             |                                                                                                                                                                                                                                 |
| TO:                                                | unclassified                                                                                                                                                                                                                    |
| FROM:                                              | confidential                                                                                                                                                                                                                    |
| LIMITATION CHANGES                                 |                                                                                                                                                                                                                                 |
| TO:                                                | Approved for public release, distribution unlimited                                                                                                                                                                             |
| FROM:                                              | Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; MAR 1956. Other requests shall be referred to Department of the Army, Attn: Public Affairs Office, Washington, DC 20310. |
| AUTHORITY                                          |                                                                                                                                                                                                                                 |
| ARRADCOM ltr, 4 Sep 1981; ARRADCOM ltr, 4 Sep 1981 |                                                                                                                                                                                                                                 |

THIS PAGE IS UNCLASSIFIED

# CONFIDENTIAL

# AD 93244

## Armed Services Technical Information Agency

Reproduced by

**DOCUMENT SERVICE CENTER**

**KNOTT BUILDING, DAYTON, 2, OHIO**

This document is the property of the United States Government. It is furnished for the duration of the contract and shall be returned when no longer required, or upon recall by ASTIA to the following address: Armed Services Technical Information Agency, Document Service Center, Knott Building, Dayton 2, Ohio.

**NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.**

# CONFIDENTIAL

65244  
56  
**CONFIDENTIAL**

**SECOND**

**PROGRESS REPORT**

**OF**

**FC**

**THE FIRESTONE TIRE & RUBBER COMPANY**

**ON**

**RECOILLESS RIFLES, ACCESSORIES AND AMMUNITION**

**UNDER**

**Contract No. DA - 33 - 019 - ORD - 2037**

**Ordinance Project No. TS4 - 4020**

**Department of Army Project No. 5802 - 09 - 010**  
4018

"This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18 U. S. C., Sections 793 and 794. The transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law."

**COPY No. 52**

**THE FIRESTONE TIRE & RUBBER COMPANY**

**Defense Research Division**

**Akron, Ohio**

**MARCH 1956**

**MAY 15 1956**

**56AA 20623**

**CONFIDENTIAL**

**NOTICE: THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE  
NATIONAL DEFENSE OF THE UNITED STATES WITHIN THE MEANING  
OF THE ESPIONAGE LAWS, TITLE 18, U.S.C., SECTIONS 793 and 794.  
THE TRANSMISSION OR THE REVELATION OF ITS CONTENTS IN  
ANY MANNER TO AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW.**

**CONFIDENTIAL**

**SECOND  
PROGRESS REPORT  
OF  
THE FIRESTONE TIRE & RUBBER CO.  
ON  
RECOILLESS RIFLES, ACCESSORIES AND AMMUNITION**

**Contract No.  
DA-33-019-ORD-2037**

**ORDNANCE PROJECT Nos. TS4-4020  
TS4-4018**

**THE FIRESTONE TIRE & RUBBER CO.  
Defense Research Division  
Akron, Ohio**

**MARCH, 1956**

**CONFIDENTIAL**

**MAY 15 1956**

**56AA 20623**

## **I N D E X**

|                                             | <b>Page</b> |
|---------------------------------------------|-------------|
| I. Summary .....                            | 1           |
| II. Abstract .....                          | 3           |
| III. Pat Ammunition And Weapon .....        | 4           |
| IV. T119 Projectile .....                   | 21          |
| V. T335 Projectile .....                    | 26          |
| VI. Penetration Studies .....               | 27          |
| VII. Terminal Ballistic Effectiveness ..... | 33          |

# CONFIDENTIAL

## SUMMARY OF WORK ACCOMPLISHED TO START OF CURRENT REPORT PERIOD

This report constitutes the second monthly progress report of The Firestone Tire & Rubber Company, Defense Research Division, on Contract DA-33-019-ORD-2037. It was explained in the First Progress Report for February, 1956, that this contract covers activities in two general fields: (1) those pertaining to a 90mm, Light Weight, Shoulder-Fired Rifle and Ammunition, known as the PAT System, and (2) those activities carried over from previous Contract DA-33-019-ORD-1202 pertaining to the Battalion Anti-Tank Weapon and Ammunition, known as the BAT System.

This Summary presents a brief status report of work done on each of these two phases under Contract DA-33-019-ORD-2037 to the beginning of this current report period.

**PAT AMMUNITION AND WEAPON** - The following statements summarize the previous activities on this phase of the total contract.

1. Drawings of T249E8 cartridge assembly were revised for ease of manufacture and were designated T249E8 modification 1 (Mod. 1).

2. Two modifications of the carriage design have been made and designated T249E8 Mod. 2A and T249E8 Mod. 2B.

3. Procurement was started for:

- 100 T249E8 Mod. 1 Shell
- 1000 Primer Assemblies
- 150 Propellant Containers
- 25 T249E8 Mod. 2A Shell
- 25 T249E8 Mod. 2B Shell
- Extrusions for 1000 fin assemblies.
- Forgings for 1000 projectile bodies.

4. Forgings for one test rifle and one prototype rifle were received from Frankford Arsenal.

5. Tests were conducted to determine the permissible thickness of Mylar for the central tube of the cartridge container.

6. A program for penetration studies with the PAT round was planned and presented in the First Progress Report.

# CONFIDENTIAL

BAT WEAPON AND AMMUNITION - The following statements present the status of the various portions of the BAT assignment.

## Weapon Systems

The 90mm T215 No. 3 rifle was proof accepted.

## Folding Fin Ammunition

Spin and obturation tests were conducted with the 106mm T119 E11 (M344) projectile and the 90mm T335 projectile, using nylon obturating bands.

## Fixed Fin Ammunition

An accuracy program with ten, 90mm T334E2F projectiles at 1000 yards, was conducted. The Probable Errors of dispersion were .45 mil vertically and .41 mil horizontally.

Spin tests with T334S4 test slugs equipped with type No. 8 nylon obturators showed an average spin rate of 20.5 rps.

A program has been prepared for further accuracy testing of the 106mm T171 projectile.

## Penetration Studies

Rotary-extruded liners with 90 degree angular distortion were tested in 105mm test bodies for spin compensation. The optimum spin rate was 20 rps.

## Fuzes

Tests of the T267E14 fuze gave unsatisfactory functioning. No further work is scheduled.

## Terminal Ballistic Effectiveness

A future program was proposed and presented in the First Progress Report on this contract.



# CONFIDENTIAL

## ABSTRACT OF CURRENT PROGRESS REPORT

The activities of The Firestone Tire & Rubber Company, Defense Research Division, on Contract DA-33-019-ORD-2037 during this report period have been concerned with (1) the PAT ammunition and rifle, and (2) the BAT weapon and ammunition.

PAT AMMUNITION AND WEAPONS - The activities under this phase of the contract have pertained to (1) preparation of drawings, revisions of drawings for manufacturing ease; redesign of certain components, and (2) procurement, manufacture and assembly of components and preparations for tests.

Drawings are presented of the primer assembly, rounds containing T249-E8 Mod. 1, Mod. 2A and Mod. 2B projectiles; Metal Parts & Live Loading drawings of T249E8 Mod. 1, Mod. 2A, and Mod. 2B; details and assembly drawing of a shipping container.

Photographs are presented illustrating the T249E8 Mod. 1 cartridge, the test cartridge and the test rifle.

Components for cartridges, projectiles and rifles for tests planned and programmed in the First Progress Report are in various stages of manufacture and procurement. The status of each of these components is given in this report.

BAT WEAPONS AND AMMUNITION - The activities have been concerned during this report period with (1) test firing the 106mm T119E16 folding fin projectile, (2) test firing the 90mm T335 folding fin projectile and (3) penetration studies to investigate the effect of ogive and nose assemblies on penetration.

T119 Projectile - Fifteen T119E16 projectiles have been fired in a test to develop an improved nylon obturator. The largest band diameter tested (4.248 in.) gave good obturation and an acceptable muzzle spin of approximately 15 rps. The results indicate that even larger band diameters may be used.

T335 Projectile - Nine 90mm T335E11 projectiles have been fired at a 2000-yard target. Accuracy testing at this range has been deferred until weather is more favorable. A future program is given.

Penetration Studies - PAT Projects - Tests were conducted to determine the effect of ogive ALX-178-6 and nose assembly ALX-178 on penetration. The three items compared were: (1) test assembly DRC506 and nose rings DRB-23-1056, (2) test assembly DRC506 with ogive DRA-29-1842, and (3) test assembly DRC506 with ogive DRA-29-1842 and nose assembly LX 178-8, -9 and -15. The ogive alone produced only slight reduction in penetration. The ogive and nose assembly combined produce a reduction of 1.6 in. The nose assembly alone apparently produces 1.2 in. of reduction in

## CONFIDENTIAL

penetration. Spin rates of 18 rps at 900 fps reduces penetration by approximately 3/4 in. As a result of tests it is estimated that the test assembly should produce about 12.5 in. penetration into homogeneous armor.

BAT Projects - Thirty 120mm test assemblies were manufactured and sent to Ravenna Arsenal for Comp B loading.

A future program is presented.

Terminal Ballistic Effectiveness - A future program is reported.

CONFIDENTIAL

PAT AMMUNITION AND WEAPON

PAT AMMUNITION

**Cartridges**

Cartridge assembly drawings for rounds containing the 90mm T249E8 Mod 1, Mod 2A and Mod 2B projectiles are shown in Figs. 1, 2 and 3, respectively. A picture of the T249E8 Mod 1 cartridge is shown in Fig. 4. The test cartridge is pictured in Fig. 5.

**Primer**

Eleven hundred primer assemblies (DRC 29-1244), less igniter charges, have been received. Two hundred assemblies have been shipped to the Ravenna Arsenal for loading. The 150 lbs. of Grade A1 black powder requisitioned from Frankford Arsenal for use as igniter charges have not

arrived, but five pounds of this grade of black powder have been obtained locally for loading primers.

One hundred S-78 electric squibs to initiate the primer charges for interim testing have been procured from duPont deNemours, Wilmington, Delaware. The dimensions and characteristics of the S-78 squib are shown in Table I.

The squib will be placed one third of the distance forward in the primer. The lead wires will be threaded through the diaphragm of the primer end plug and through the connector (DRA29-1854) shown in Fig. 6. All firings currently planned at the Erie Ordnance Depot will employ this interim ignition system.


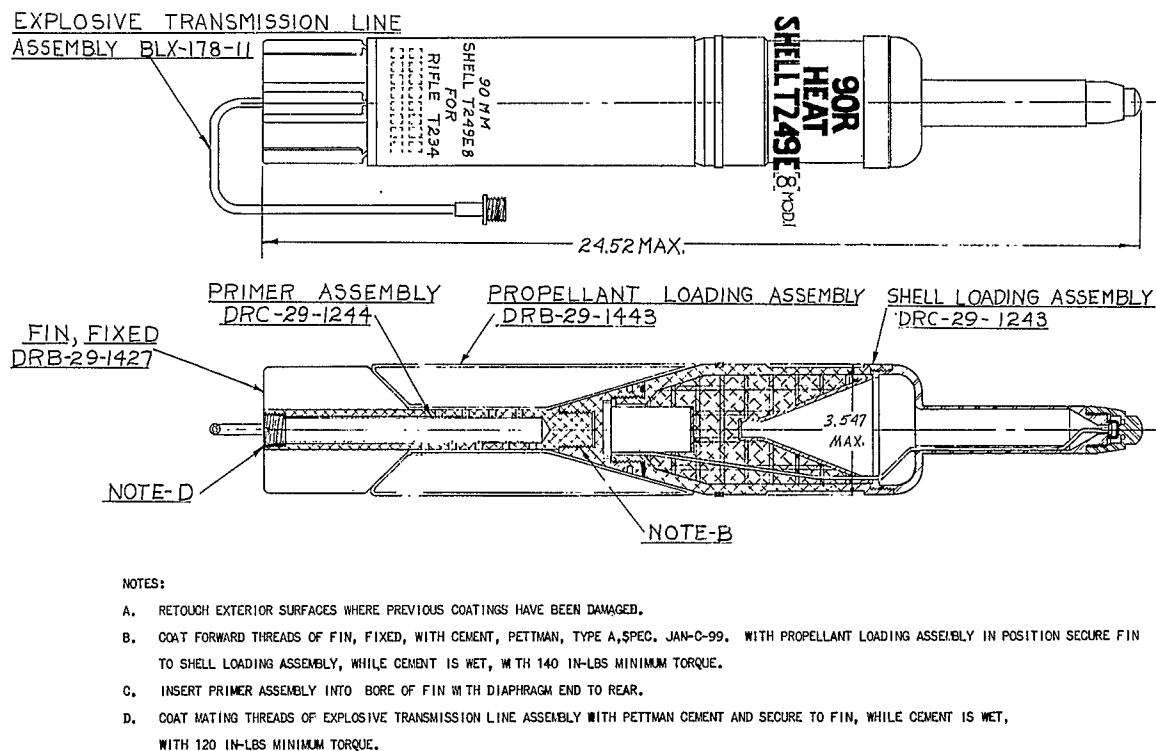


Fig. 1. 90 mm., T249E8 Mod. 1 Projectile.  
Firestone Dwg. No. DRC-29-1253-1.


CONFIDENTIAL

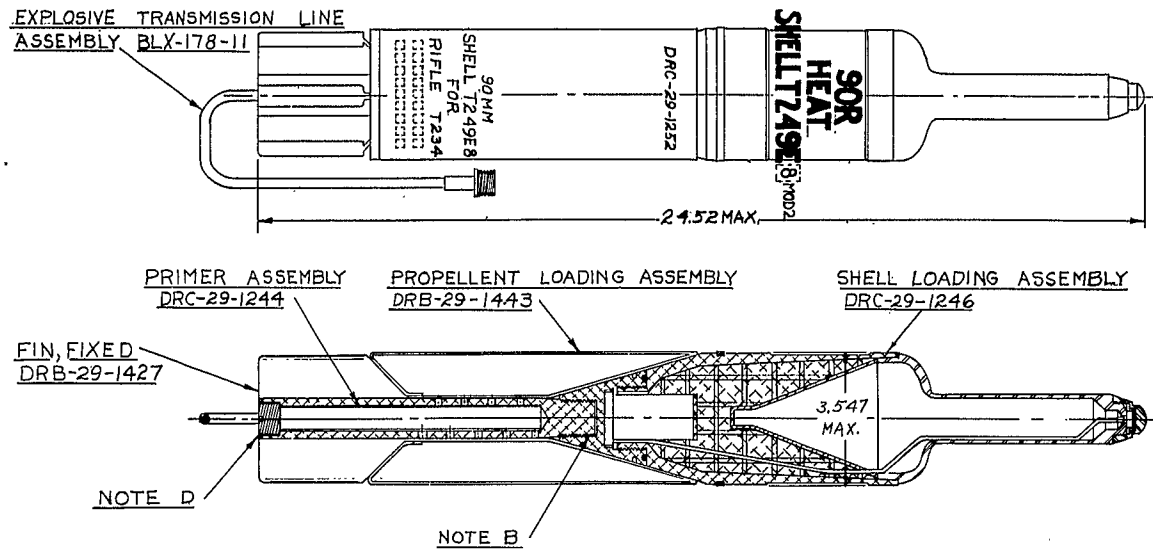

NOTES:

- A. RETOUCH EXTERIOR SURFACES WHERE PREVIOUS COATINGS HAVE BEEN DAMAGED.
- B. COAT FORWARD THREADS OF FIN, FIXED, WITH CEMENT, PETTMAN, TYPE A. SPEC. JAN-C-99. WITH PROPELLANT LOADING ASSEMBLY IN POSITION SECURE FIN TO SHELL LOADING ASSEMBLY, WHILE CEMENT IS WET, WITH 140 IN-LBS MINIMUM TORQUE.
- C. INSERT PRIMER ASSEMBLY INTO BORE OF FIN WITH DIAPHRAGM END TO THE REAR.
- D. COAT MATING THREADS OF EXPLOSIVE TRANSMISSION LINE ASSEMBLY WITH PETTMAN CEMENT AND SECURE TO FIN, WHILE CEMENT IS WET, WITH 120 IN-LBS MINIMUM TORQUE.

Fig. 2. 90 mm., T249E8 Mod. 2A Projectile.  
Firestone Dwg. No. DRC-29-1254-1.

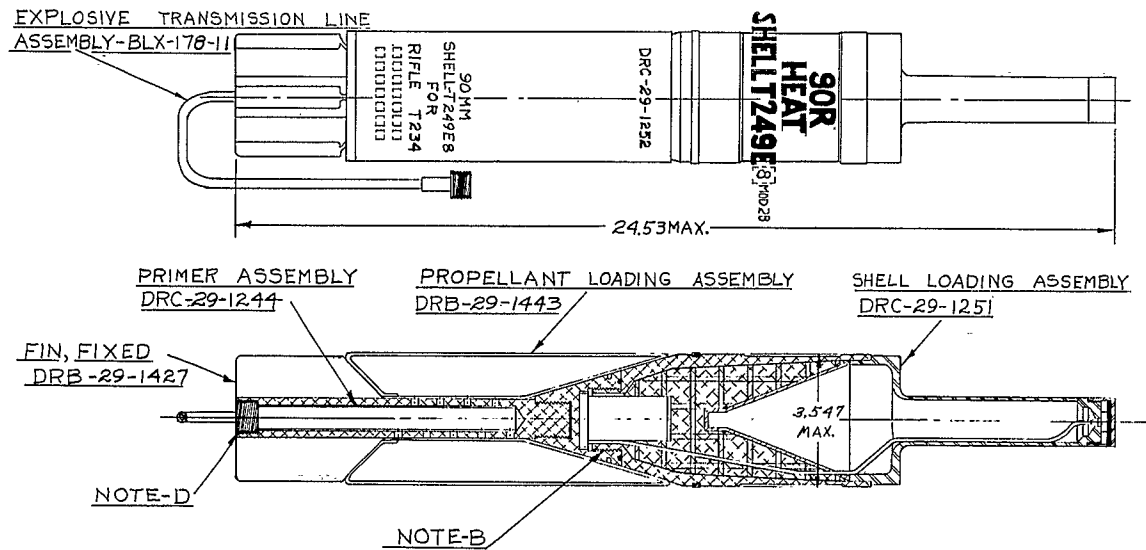

NOTES:

- A. RETOUCH EXTERIOR SURFACES WHERE PREVIOUS COATING HAVE BEEN DAMAGED.
- B. COAT FORWARD THREADS OF FIN, FIXED, WITH CEMENT, PETTMAN, TYPE A. SPEC. JAN-C-99. WITH PROPELLANT LOADING ASSEMBLY IN POSITION, SECURE FIN TO SHELL LOADING ASSEMBLY, WHILE CEMENT IS WET, WITH 140 IN-LBS MINIMUM TORQUE.
- C. INSERT PRIMER ASSEMBLY INTO BORE OF FIN WITH DIAPHRAGM END TO THE REAR.
- D. COAT MATING THREADS OF EXPLOSIVE TRANSMISSION LINE ASSEMBLY WITH PETTMAN CEMENT AND SECURE TO FIN, WHILE CEMENT IS WET, WITH 120 IN-LBS MINIMUM TORQUE.

Fig. 3. 90 mm., T249E8 Mod. 2B Projectile.  
Firestone Dwg. No. DRC-29-1255-1.

CONFIDENTIAL

CONFIDENTIAL

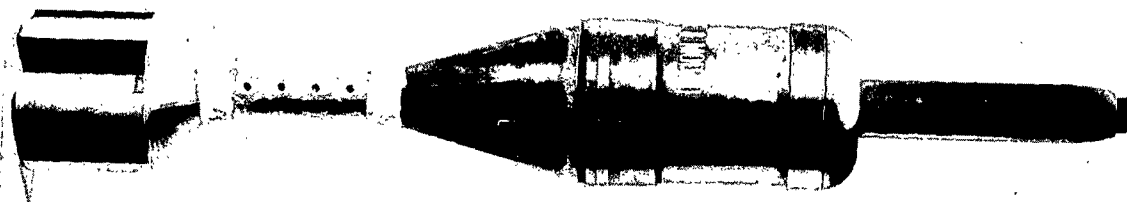


Fig. 4. T249E8 Mod. 1 Cartridge.

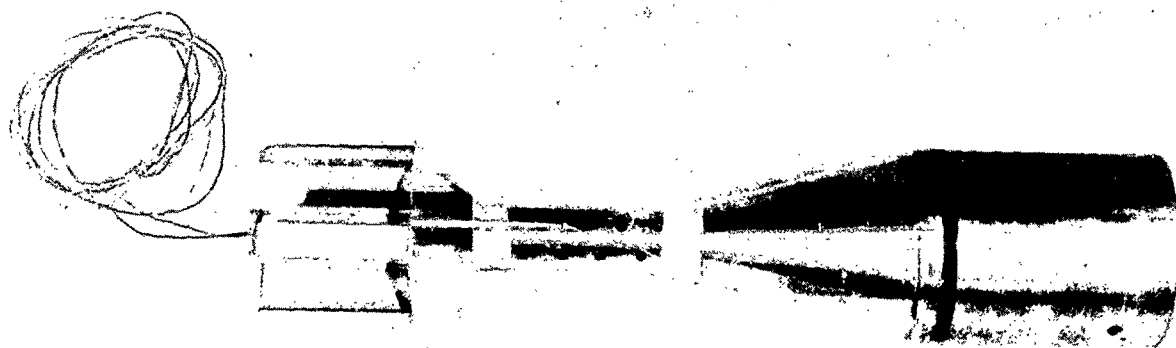


Fig. 5. Test Cartridge.


CONFIDENTIAL

# CONFIDENTIAL

**Table I**  
**Dimensions and Characteristics**  
*S-78E Electric Squibs*

|                      |                                                                                    |
|----------------------|------------------------------------------------------------------------------------|
| Shape                | Cylindrical                                                                        |
| Outside Diameter     | 0.269 + .002 In.                                                                   |
| Length               | 1.6875 In.                                                                         |
| Lead Wire Length     | 4 Ft.                                                                              |
| Wire Size            | 0.0375 In.                                                                         |
| Bridge Wire          | Nicrome (.80-.20), 0.125 In. Long<br>Bridge. 173 to 183 Ohms / Mil Ft.<br>at 68°F. |
| Explosive Mixture    | DuPont Ignition Mixture<br>50 - 25 - 25 (15 grains)                                |
| Firing Current       | 0.300 amps minimum                                                                 |
| Resistance of System | 2.45 ohms + 0.25 ohms                                                              |

1/8-14 UNF-2A L.H.

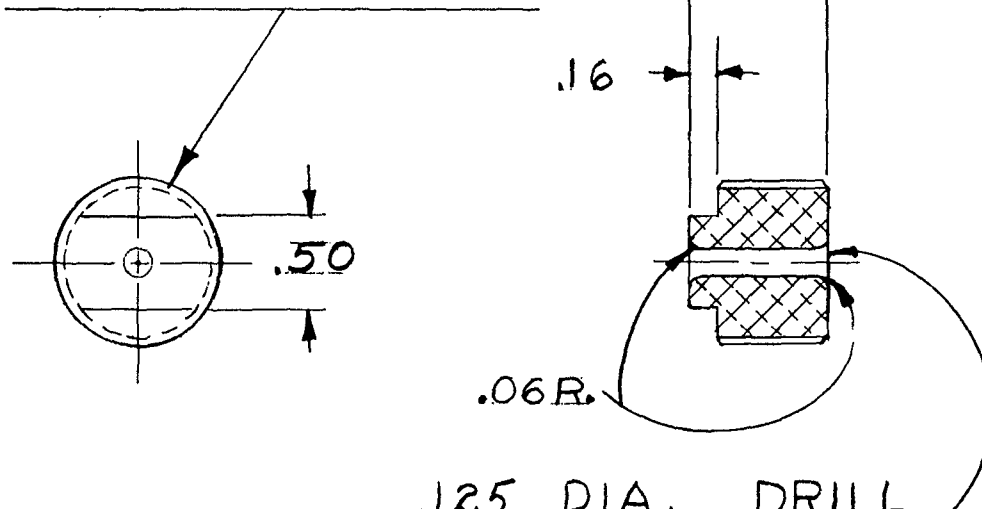

NOTE:

1. MACHINE FINISH <sup>125</sup>✓

Fig. 6. Connector.  
Firestone Dwg. No. DRA-29-1854.

# CONFIDENTIAL

## Projectile Studies

### T249E8 MOD PROJECTILES

Dummy base elements, which represent the base element of the T199E1 fuze requisitioned from Frankford Arsenal, have not arrived. One hundred and twenty-five dummy base elements have been ordered locally. Partial delivery has been accepted and the remainder will be delivered early in April.

Five of the 25 T249E8 Mod 1 Projectiles originally scheduled for live loading at Ravenna Arsenal, will be inert loaded for fuze evaluation tests to be conducted at the Erie Ordnance Depot. These projectiles will be assembled with battery units (75-2-502F2), tetryl pellets and M509 fuze base elements. The remaining 20 projectiles will be live loaded at Ravenna Arsenal as soon as T199E1 fuze base elements are received from Picatinny Arsenal. Inspection data for 20 cones which will be assembled into these projectiles are reported in Table II.

Thirty-one of the 75-2-502F2 battery units, which were available at Firestone, have been tested during the current report period. Three tests: electrical resistance, activity and impact, have been performed on each unit and the data are reported in Table III. Twenty-five of these units will be used in the above mentioned projectiles.

Seventy-five T249E8 Mod 1 projectiles have been inert loaded and will be shipped to Ravenna Arsenal for cartridge assembling and packaging.

Metal parts assembly drawings and live loading drawings for the T249E8 Mod 1, Mod 2A and M2B projectiles are presented in Figs. 7 through 12. Spikes for the Mod 2A projectiles were unacceptable dimensionally and all but five have been returned to the manufacturer. Five Mod 2A projectiles will be employed in a penetration program discussed in the Penetration Study of this report. Spikes for Mod 2B projectiles have not been received.

### PROOF PROJECTILES

Twenty-six proof projectiles (DRC 29-1239-1) have been manufactured and have been shipped to Erie Ordnance Depot. Propellant loading and primer insertion for the test cartridges will be performed there. These assemblies will be employed in rifle proof testing and recoil balancing programs.

### Propellant

Two hundred pounds of propellant for the T234 Recoilless Rifle have been requisitioned from Frankford Arsenal. The propellant type and web thickness will be specified by the Pitman-Dunn Laboratories.

**Table II**  
**Summary Inspection Data**  
**20 DRB29-1429 Cones**

|                                                                                                                                           | Wall Thickness (in.)   | Max. Wall Thickness Variation (in.) |           | Max. Wall Waviness (in.) |       | Concentricity - T.I.R. (in.) |            |                         | Cone Tip in Assembly |
|-------------------------------------------------------------------------------------------------------------------------------------------|------------------------|-------------------------------------|-----------|--------------------------|-------|------------------------------|------------|-------------------------|----------------------|
|                                                                                                                                           |                        | Transverse                          | Longitud. | O. D.                    | I. D. | Base Datum                   | Apex Datum | Spitback Tube in Ass'y. |                      |
| Specification                                                                                                                             | Max. .085<br>Min. .080 | .002                                | .006      | .006                     | .006  | .003                         | .003       | .003                    | Max.<br>.015         |
| Maximum                                                                                                                                   | .089                   | .006                                | .007      | .006                     | .001  | .009                         | .008       | .011                    | .010                 |
| Minimum                                                                                                                                   | .079                   | .001                                | .002      | .001                     | .001  | .002                         | .001       | .002                    | .003                 |
| Average                                                                                                                                   | .0835                  | .0030                               | .0034     | .0036                    | .001  | .0044                        | .0048      | .0061                   | .0069                |
| Std. Dev.                                                                                                                                 | .0011                  | .0022                               | .0014     | .0012                    | ----  | .0020                        | .0020      | .0022                   | .0020                |
| <b>Note:</b><br>Summary inspection data for cone numbers: 16, 17, 20, 24, 29, 36, 37, 38, 47, 49, 51, 55, 58, 64, 68, 72, 76, 81, 82, 91. |                        |                                     |           |                          |       |                              |            |                         |                      |

# CONFIDENTIAL

**Table III**  
**Test Data**  
**For 31 75-2-502F2 Battery Units**

| Lucky No. | Decibels At 200K.Cycles | Decibels $x_1$ | K. Cycles $x_1$ | Decibels $x_2$ | K. Cycles $x_2$ | Voltage For .0173 Lb.-Sec. Impact (volts) |
|-----------|-------------------------|----------------|-----------------|----------------|-----------------|-------------------------------------------|
| 1 ●       | 11.5                    | 12.0           | 221             | 11.4           | 228             | Cracked                                   |
| 2         | 11.5                    | 13.5           | 299             | 9.0            | 309             | 6.96                                      |
| 3         | 11.3                    | 13.0           | 286             | 9.0            | 292             | 4.25                                      |
| 4         | 11.5                    | 12.5           | 241             | 12.0           | 248             | 3.23                                      |
| 5         | 11.5                    | 12.25          | 229             | 12.0           | 235             | 5.78                                      |
| 6         | 11.1                    | 12.3           | 245             | 11.5           | 255             | 4.42                                      |
| 7         | 11.2                    | 12.2           | 232             | 11.3           | 237             | 8.67                                      |
| 8         | 12.0                    | 13.5           | 277             | 11.6           | 282             | 3.74                                      |
| 9         | 11.4                    | 12.7           | 246             | 11.0           | 251             | 4.08                                      |
| 10        | 11.2                    | 13.1           | 276             | 10.5           | 288             | 3.06                                      |
| 11        | 11.6                    | 13.5           | 275             | 9.5            | 281             | 3.40                                      |
| 12        | 11.0                    | 12.3           | 241             | 11.0           | 247             | 6.11                                      |
| 13        | 11.2                    | 13.1           | 277             | 10.0           | 282             | 3.06                                      |
| 14 ●      | 11.2                    |                | No Dip          |                |                 | 4.08                                      |
| 15        | 11.6                    | 13.5           | 281             | 8.4            | 284             | 4.76                                      |
| 16        | 11.3                    | 13.5           | 286             | 11.7           | 290             |                                           |
|           |                         | 13.0 *         | 294             | 8.8            | 297             | 2.89                                      |
| 17        | 11.4                    | 13.4           | 282             | 11.0           | 288             | 2.89                                      |
| 18        | 11.4                    | 12.6           | 255             | 11.1           | 260             | 5.95                                      |
| 19 ●      | 11.3                    |                | No Dip          |                |                 | 4.75                                      |
| 20        | 11.4                    | 13.0           | 298             | 10.7           | 305             | 3.74                                      |
| 21        | 11.6                    | 13.1 *         | 270             | 12.3           | 279             |                                           |
|           |                         | 12.9           | 285             | 11.9           | 288             | 4.42                                      |
| 22        | 11.4                    | 12.4 *         | 236             | 11.7           | 241             |                                           |
|           |                         | 12.5           | 256             | 12.0           | 261             | 5.10                                      |
| 23        | 11.3                    | 13.2           | 276             | 9.4            | 281             | 7.65                                      |
| 24        | 11.5                    | 13.6 *         | 277             | 9.7            | 286             |                                           |
|           |                         | 12.8           | 292             | 10.8           | 294             | 3.23                                      |
| 25        | 11.5                    | 13.1           | 265             | 10.8           | 277             | 3.06                                      |
| 26        | 11.3                    | 12.9           | 270             | 11.6           | 283             | 2.55                                      |
| 27        | 11.5                    | 12.6           | 237             | 11.0           | 239             | 3.57                                      |
| 28        | 11.5                    | 12.4           | 240             | 11.1           | 244             | 4.93                                      |
| 29        | 11.1                    | 13.8           | 287             | 6.6            | 293             | 4.25                                      |
| 30        | 11.3                    | 13.4           | 285             | 9.1            | 292             | 3.06                                      |
| 31        | 11.5                    | 13.3           | 287             | 10.5           | 295             | 2.72                                      |

**Notes:**


● Rejected

\* Double Dip

All units had measured resistance over  $20 \times 10^6$  ohms.



CONFIDENTIAL

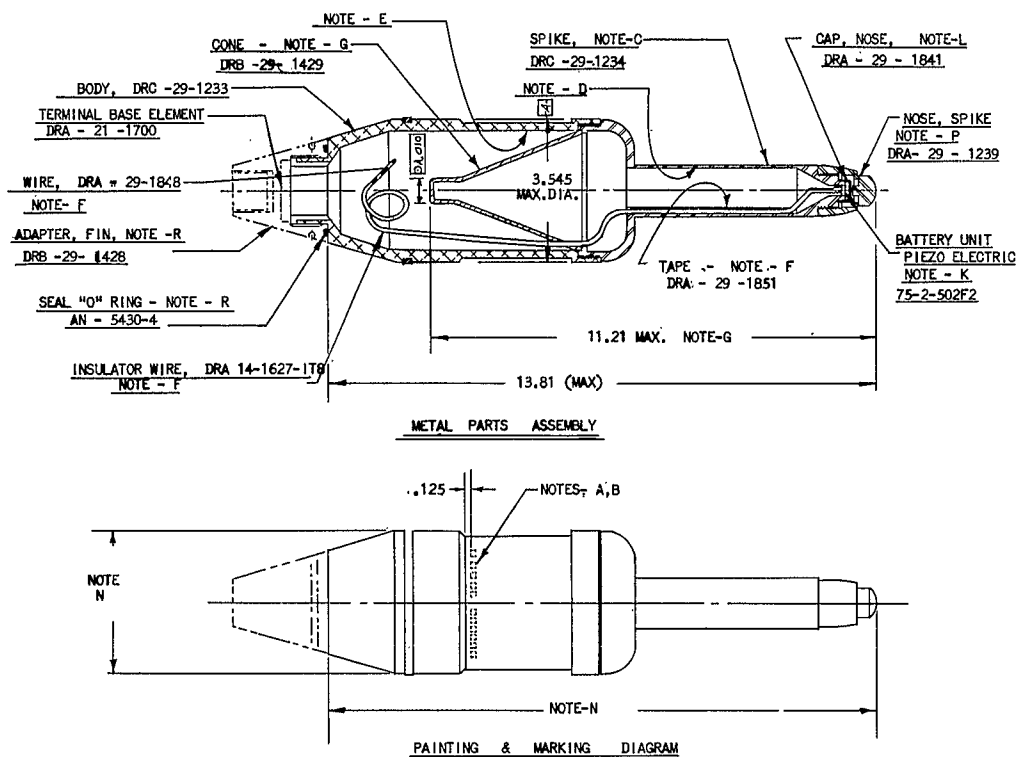


NOTES:



- A. STAMP "90MM T249E8 Mod. 1" AND PROJECTILE SERIAL NUMBER.
- B. LETTERS AND FIGURES TO BE .125 HIGH AND .01 DEEP.
- C. PREPARE OR CLEAN ALL SURFACES OF SPIKE IN ACCORDANCE WITH GRADE 1 APEC. PA-PD-191 BEFORE PAINTING.
- D. COAT INTERIOR SURFACE OF SPIKE, EXCEPT CONE SEAT, WITH GREEN NO.3412 ENAMEL BEFORE ASSEMBLY WITH BODY.
- E. COAT INTERIOR SURFACE OF BODY, EXCEPT THREADS, WITH ACID-PROOF BLACK PAINT, TYPE 1 OR 11, BEFORE ASSEMBLY.
- F. THREAD FUZE WIRE THRU INSULATOR AND CEMENT TO SPIKE USING TAPE AND RUBBER CEMENT, TYPE 3, SPEC MIL-C-5092.
- G. APPLY CEMENT, TYPE 3, TO CONE SEAT OF SPIKE, INSERT INSULATOR AND WIRE IN HOLE IN CONE, AND PRESS CONE INTO SPIKE.
- H. APPLY CEMENT, TYPE 3, TO JUNCTION OF INSULATOR AND CONE.
- K. CRIMP BATTERY UNIT TO FUZE WIRE AND SEAT BATTERY UNIT IN POSITION ON SPIKE.
- L. PLACE CAP, NOSE, OVER BATTERY UNIT AND CRIMP 360 TO SPIKE.
- M. COAT REAR THREADS OF SPIKE WITH PETTMAN CEMENT, TYPE A, SPEC. JAN-C-99, AND SECURE TO BODY WHILE WET WITH 235 IN-LBS MINIMUM TORQUE.
- N. COAT EXTERIOR SURFACES OF METAL PARTS EXCEPT THREADS WITH GREEN NO. 3412 ENAMEL, SPEC. MIL-E-10687.
- P. SECURE NOSE, SPIKE, TO SPIKE HAND TIGHT. DO NOT CEMENT THREADS.
- R. THESE PARTS TO BE SHIPPED SEPARATELY BY MANUFACTURER.

Fig. 7. Shell, HEAT, 90 mm., T249E8 Mod. 1 Metal Parts Assembly.  
Firestone Dwg. No. DRC-29-1242.


CONFIDENTIAL

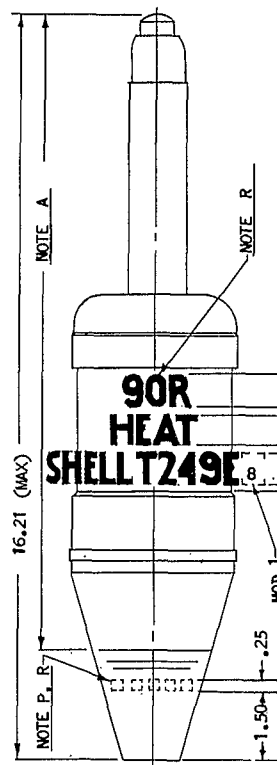

PAINTING AND MARKING DIAGRAM

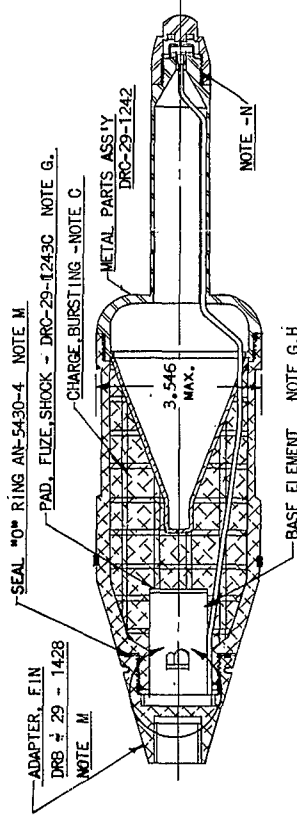


SHELL LOADING ASSEMBLY  
DRC-29-1243 A




PAD, FUZE, SHOCK DRC-29-1243C  
FELT, PRESSED NO. 104

NOTES:

- A. RETOUCH EXTERIOR SURFACES OF SHELL WHERE PREVIOUS COATING HAS BEEN DAMAGED WITH GREEN ENAMEL NO. 3412.
- B. GUIDE WIRE AND WIRE INSULATOR THRU SLOT IN REAR OF BODY AND INSERT POURING RISER, POUR COMP. B.
- C. REMOVE POURING RISER AFTER COMP. B HAS HARDENED.
- E. FACE OFF COMP. B, TO DEPTH SHOWN.
- F. X-RAY ASSEMBLY TO DETECT POSSIBLE DETRIMENTAL CAVITATION IN COMP. B, CAST.
- G. PLACE FUZE WIRE AND WIRE INSULATOR IN SLOT OF BODY. PLACE BASE ELEMENT SHOCK PAD DRC-29-1243 C IN BASE ELEMENT CAVITY. THE BASE ELEMENT INSULATION RESISTANCE MUST BE MEASURED AND RECORDED. PLACE BASE ELEMENT IN CAVITY.
- H. CUT WIRE AND INSULATOR 1.5 INCHES BEYOND BASE ELEMENT. BARE WIRE A DISTANCE OF 3/16 INCH FROM END. CRIMP SOLDERLESS TERMINAL TO BATED SECTION. REMOVE POST. ATTACH TERMINAL TO POST AND SCREW POST TO BASE ELEMENT.
- K. PERFORM FINAL ELECTRICAL TESTS.
- L. PLACE INSULATOR, FUZE DRC-29-1243 B, ON BASE ELEMENT.
- M. COAT REAR THREADS OF BODY WITH CEMENT, PETTMAN, TYPE A, SPEC. JAN. C-99 AND SECURE FIN ADAPTER, WITH "O" RING IN POSITION, TO ASSEMBLY WITH 180 IN-LBS. MINIMUM TORQUE.
- N. COAT SPIKE THREADS WITH PETTMAN CEMENT AND SECURE SPIKE NOSE TO SPIKE WHILE CEMENT IS WET WITH 144 IN-LBS. MINIMUM TORQUE.
- P. INSERT LOT NUMBER, MONTH AND YEAR LOADED. REQUIRED ONLY WHEN SHELL IS NOT FURTHER IDENTIFIED BY SEGREGATION.
- R. MARK WITH YELLOW NO. 3305 STENCIL INK.



INSULATOR, FUZE  
DRC-29-1243 B  
NOTE L




INSULATOR, FUZE DRC-29-1243 B  
FELT, PRESS NO. 104

TOP VIEW OF BASE ELEMENT.  
ADAPTER, FIN REMOVED TO SHOW FIN

Fig. 8. Shell, HEAT, 90 mm., T249E8 Mod. 1 Loading Assembly.  
Firestone Dwg. No. DRC-29-1243.

CONFIDENTIAL

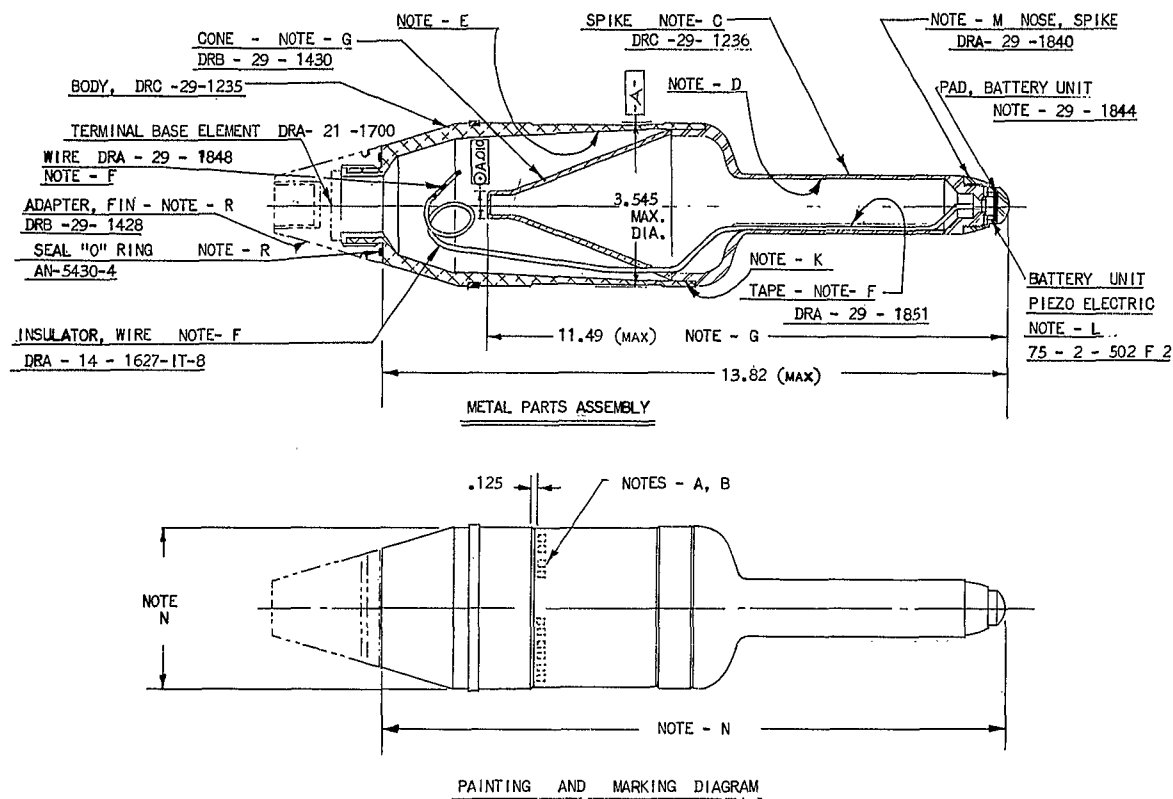


NOTES:

- A. STAMP " 90MM T249E8 MOD.2" AND PROJECTILE SERIAL NUMBER.
- B. LETTERS AND FIGURES TO BE .125 HIGH AND .01 DEEP.
- C. PREPARE OR CLEAN ALL SURFACES OF SPIKE IN ACCORDANCE WITH GRADE 1 SPEC. PA -PD -191 BEFORE PAINTING.
- D. COAT INTERIOR SURFACE OF SPIKE, EXCEPT CONE SEAT, WITH GREEN NO.3412 ENAMEL BEFORE ASSEMBLY WITH BODY.
- E. COAT INTERIOR SURFACE OF BODY, EXCEPT PART TO BE CEMENTED UNDER NOTE K, WITH ACID-PROOF BLACK PAINT, TYPE TOR11 BEFORE ASSEMBLY.
- F. THREAD FUZE WIRE THRU INSULATOR AND CEMENT TO SPIKE USING TAPE AND RUBBER CEMENT, TYPE3, SPEC MIL-C-5092.
- G. APPLY CEMENT, TYPE 3, TO CONE SEAT OF SPIKE, INSERT INSULATOR AND WIRE IN HOLE IN CONE, AND CRIMP FLANGE OF SPIKE OVER CONE-360 °
- H. APPLY CEMENT, TYPE 3, TO JUNCTION OF INSULATOR AND CONE.
- K. CEMENT SPIKE INTO BODY IN ACCORDANCE WITH PROCEDURE ON DRAWING DRA -10-1530.
- L. CRIMP BATTERY UNIT TO FUZE WIRE AND SEAT BATTERY UNIT IN POSITION ON SPIKE.
- M. PLACE PAD, BATTERY UNIT, ON BATTERY UNIT AND SECURE NOSE, SPIKE, TO SPIKE HAND TIGHT. DO NOT CEMENT THREADS.
- N. COAT EXTERIOR SURFACES OF METAL PARTS EXCEPT THREADS WITH GREEN NO. 3412 ENAMEL, SPEC. MIL -E - 16687.
- R. THESE PARTS TO BE SHIPPED SEPARATELY BY MANUFACTURER.

Fig. 9. Shell, HEAT, 90 mm., T249E8 Mod. 2 Metal Parts Assembly.  
Firestone Dwg. No. DRC-29-1245-1.



CONFIDENTIAL

CONFIDENTIAL

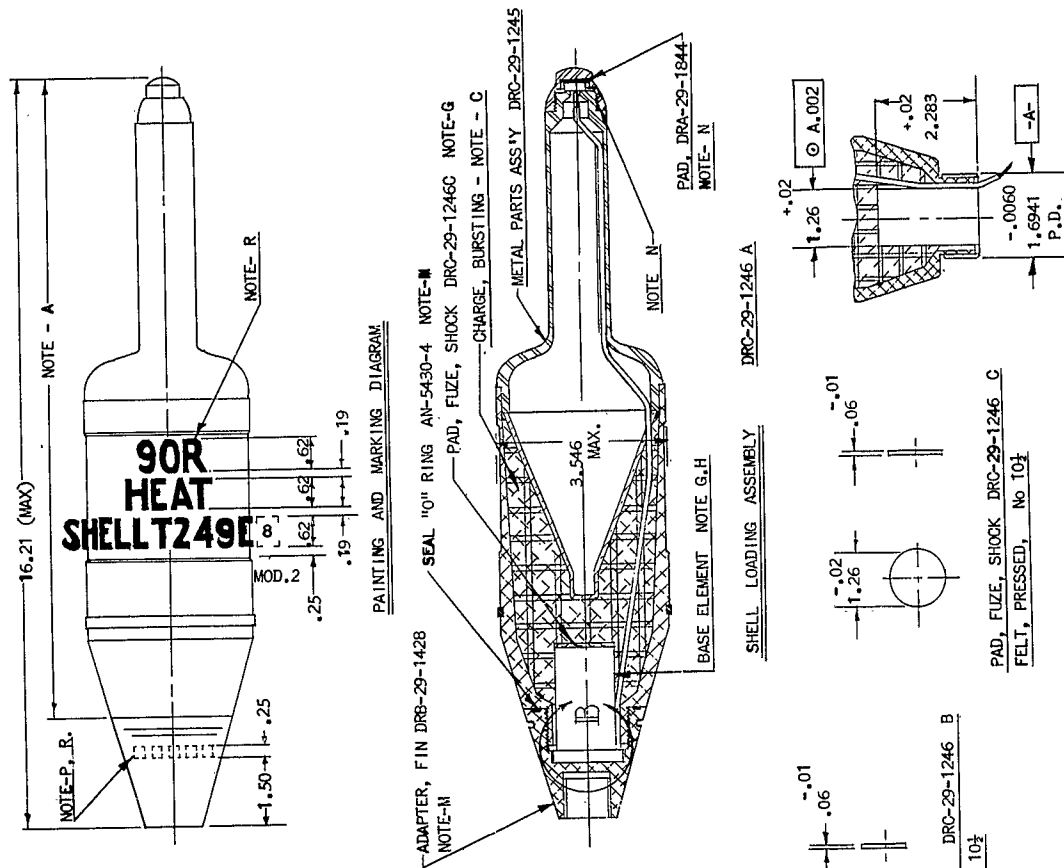


NOTES:

- A. RETOUCH EXTERIOR SURFACES OF SHELL WHERE PREVIOUS COATING HAS BEEN DAMAGED WITH GREEN ENAMEL NO. 3412.
- B. GUIDE WIRE AND WIRE INSULATOR THRU SLOT IN REAR OF BODY AND INSERT POURING RISER.
- C. POUR COMP. B.
- D. REMOVE POURING RISER AFTER COMP. B. HAS HARDENED.
- E. FACE OFF COMP. B TO DEPTH SHOWN.
- F. X-RAY ASSEMBLY TO DETECT POSSIBLE DETRIMENTAL CAVITATION IN COMP. B CAST.
- G. PLACE FUZE WIRE AND WIRE INSULATOR IN SLOT OF BODY. PLACE BASE ELEMENT SHOCK PAD DRC-29-1246 C IN BASE ELEMENT CAVITY. THE BASE ELEMENT INSULATION RESISTANCE MUST BE MEASURED AND RECORDED. PLACE BASE ELEMENT IN CAVITY.
- H. CUT WIRE AND INSULATOR 1.5 INCHES BEYOND BASE ELEMENT. BARE WIRE A DISTANCE OF 3/16 INCH FROM END. GRIMP SOLDERLESS TERMINAL TO BARED SECTION. REMOVE POST. ATTACH TERMINAL TO POST AND SCREW POST TO BASE ELEMENT.
- K. PERFORM FINAL ELECTRICAL TESTS.
- L. PLACE INSULATOR, FUZE, DRC-29-1246 B ON BASE ELEMENT.
- M. COAT REAR THREADS OF BODY WITH CEMENT, PETTMAN, TYPE A, SPEC. JAN-C-99 AND SECURE FIN ADAPTER WITH "O" RING IN POSITION TO ASSEMBLY WITH 180 IN-LBS. MINIMUM TORQUE.
- N. COAT SPIKE THREADS WITH PETTMAN CEMENT. PLACE PAD ON BATTERY UNIT AND SECURE NOSE, SPIKE, TO SPIKE WHILE SPIKE IS WET WITH 144 IN-LBS. MINIMUM TORQUE.
- P. INSERT LOT NUMBER, MONTH AND YEAR LOADED. REQUIRED ONLY WHEN SHELL IS NOT FURTHER IDENTIFIED BY SEGREGATION.
- R. MARK WITH YELLOW NO. 3305 STENCIL INK.



SHELL LOADING ASSEMBLY DRC-29-1246 A





VIEW B

END VIEW OF BASE ELEMENT  
ADAPTER, FIN REMOVED TO SHOW WIRING

Fig. 10. Shell, HEAT, 90 mm., T249E8 Mod. 2 Loading Assembly.  
Firestone Dwg. No. DRC-29-1246.

CONFIDENTIAL

| LINE No | NAME OF PART       | No. USED COMPONENT | PIECE MARK       |
|---------|--------------------|--------------------|------------------|
| 1       | ADAPTER, FIN       | 1                  | DEB-29-1428      |
| 2       |                    |                    |                  |
| 3       | BATTERY UNIT ASS'Y | 1                  | 75-2-502-F2      |
| 4       | BODY               | 1                  | DEC-29-1235      |
| 5       |                    |                    |                  |
| 6       | CONE               | 1                  | DEB-29-1430      |
| 7       |                    |                    |                  |
| 8       | INSULATOR          | 1                  | DRA-14-1627 11-8 |
| 9       |                    |                    |                  |
| 10      | CAP, SPIKE         | 1                  | DRA-29-1840      |
| 11      |                    |                    |                  |
| 12      | PAD, BATTERY UNIT  | 1                  | DRA-29-1852      |
| 13      |                    |                    |                  |
| 14      |                    |                    |                  |
| 15      |                    |                    |                  |
| 16      | SEAL "O" RING      | 1                  | AN-5430-4        |
| 17      | SPIKE              | 1                  | DRC-29-1240      |
| 18      |                    |                    |                  |
| 19      | TAPE               | 1                  | DRA-29-1851      |
| 20      | TERMINAL, BASE EL. | 1                  | DRA-21-1700      |
| 21      |                    |                    |                  |
| 22      | WIRE               | 1                  | DEA-29-1848      |

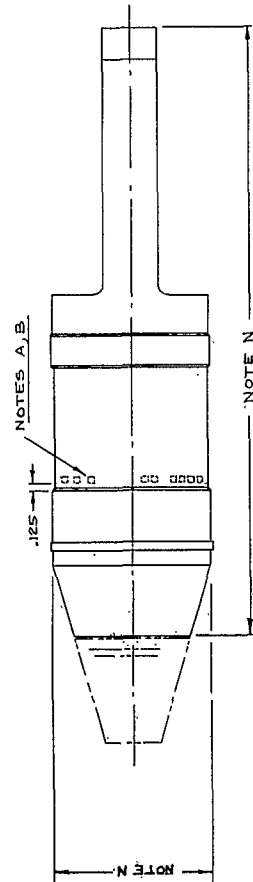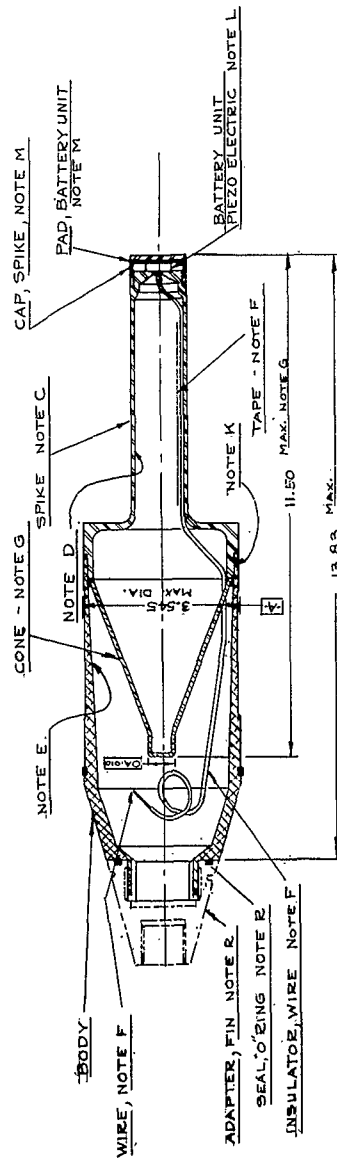

- NOTES:
- STAMP "90MM T249E8 Mod. 2B" AND PROJECTILE SERIAL NUMBER.
  - LETTERS AND FIGURES TO BE .125" HIGH AND .01" DEEP.
  - PREPARE OR CLEAN ALL SURFACES OF SPIKE IN ACCORDANCE WITH GRADE 1, SPEC. PA-PD-191, BEFORE PAINTING.
  - COAT INTERIOR SURFACES OF SPIKE WITH GREEN NO. 3412 ENAMEL BEFORE ASSEMBLY WITH BODY.
  - COAT INTERIOR SURFACES OF BODY EXCEPT PART TO BE CEMENTED UNDER NOTE K WITH ACID PROOF BLACK PAINT, TYPE 1 OR 2 BEFORE ASSEMBLY.
  - TO PREPARE WIRE: TRIM INSULATOR AND CEMENT TO SPIKE USING TAPE AND RUBBER CEMENT, TYPE 3, SPEC. MIL-C-5092.
  - APPLY CEMENT, TYPE 3, TO CONE SEAT OF SPIKE, INSERT INSULATOR AND WIRE IN HOLE IN CONE, AND CRIMP FLANGE OF SPIKE OVER CONE 360°.
  - APPLY CEMENT, TYPE 3, TO JUNCTION OF INSULATOR AND CONE.
  - CEMENT SPIKE INTO BODY IN ACCORDANCE WITH PROCEDURE ON DRAWING DRA-10-1530.
  - CRIMP BATTERY UNIT TO FUZE WIRE AND SEAT BATTERY UNIT IN POSITION ON SPIKE.
  - PLACE PAD, BATTERY UNIT, ON BATTERY UNIT AND SECURE CAP, SPIKE TO SPIKE HAND TIGHT, DO NOT CEMENT THREADS.
  - COAT EXTERIOR SURFACES OF METAL PARTS EXCEPT THREADS WITH GREEN NO. 3412 ENAMEL, SPEC. MIL-E-10681.
  - THESE PARTS TO BE SHIPPED SEPARATELY BY MANUFACTURER.

Fig. 11. Shell, HEAT, 90 mm., T249E8 Mod. 2B Metal Parts Assembly.  
Firestone Dwg. No. DRC-29-1250.



Fig. 12. Shell, HEAT, 90 mm., T249E8 Mod. 2B Loading Assembly.  
Firestone Dwg. No. DRC-29-1251.

**C O N F I D E N T I A L**

Prior to the receipt of the above propellant, test cartridges fired at Erie Ordnance Depot will contain propelling charges of propellants available at that installation.

## Propellant Container


An interim Mylar propellant container design has been selected. The container drawing (DRC29-1257) is reproduced in Fig. 13. The propellant loading assembly (DRB29-1443) is shown in Fig. 14.

One hundred and fifty containers have been ordered and a partial delivery of 29 has been accepted. The remainder will

be delivered early in April. Ninety-five containers will be shipped to Ravenna Arsenal and the remaining 55 to Erie Ordnance Depot.

## Cartridge Containers

The detail and assembly drawings of the interim shipping container which will accomodate three T249E8 type cartridges are shown in Figs. 15 and 16, respectively. This design represents the Picatinny Arsenal design with an increase in length. Fifty containers have been ordered. This number will provide packaging for T249 E8 Mod 1 and Mod 2 cartridges.

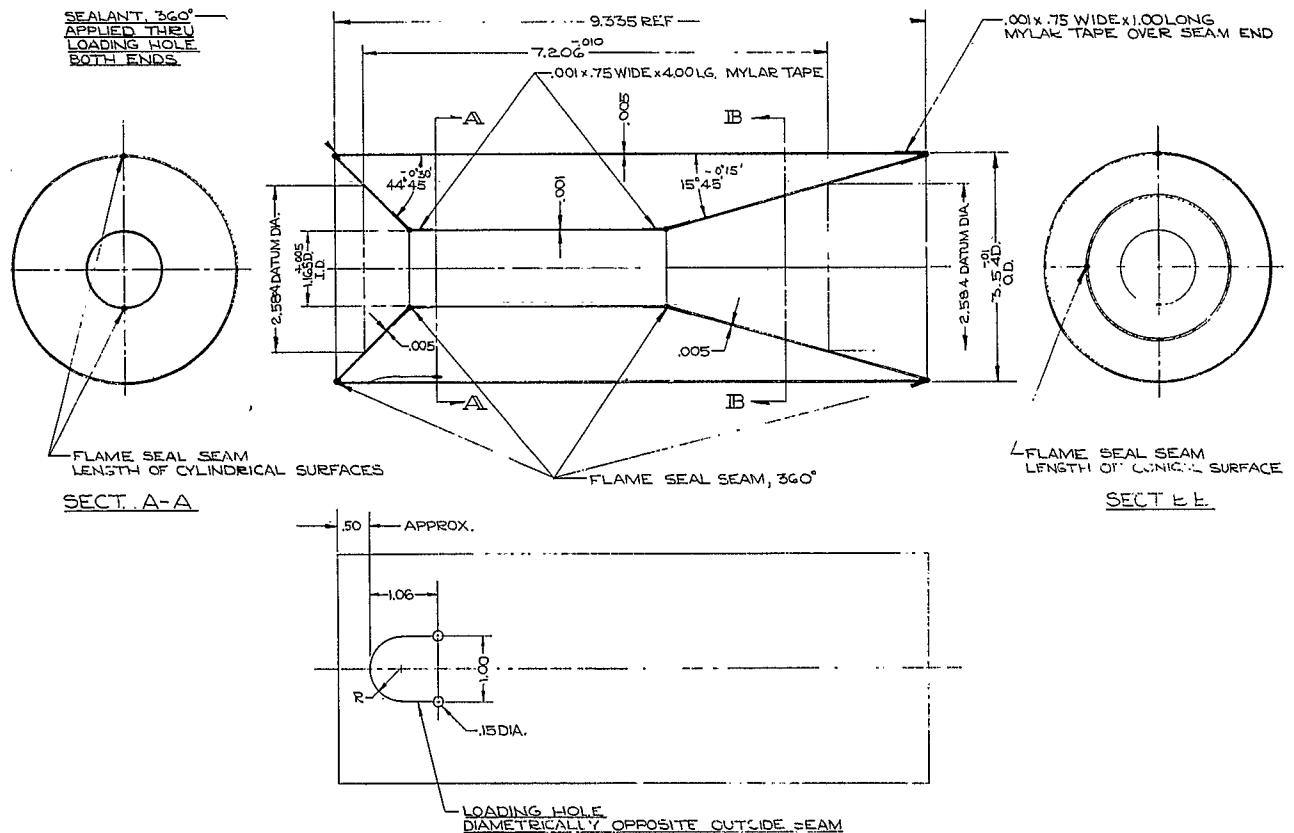

**Fig. 13. Mylar Propellant Container.**  
Firestone Dwg. No. DRC-29-1257.

CONFIDENTIAL

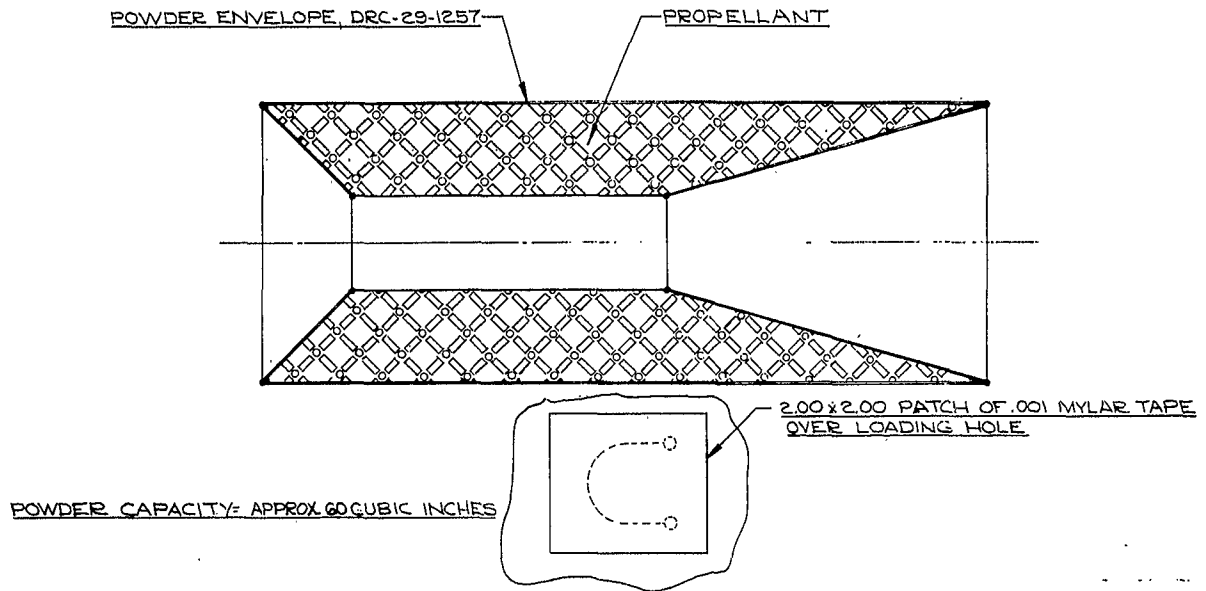


Fig. 14. Propellant Loading Assembly.  
Firestone Dwg. No. DRB-29-1443.


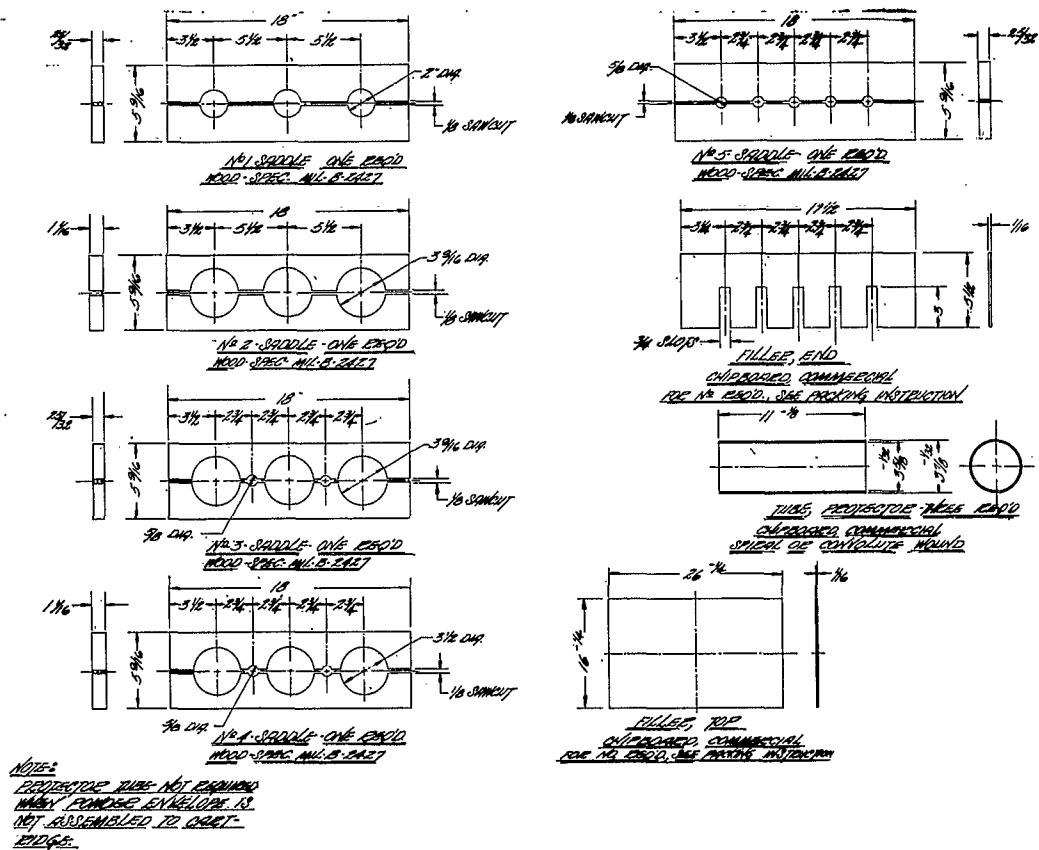


Fig. 15. Detail Drawing for Cartridge Container.  
Firestone Dwg. No. DRC-29-1256.

CONFIDENTIAL



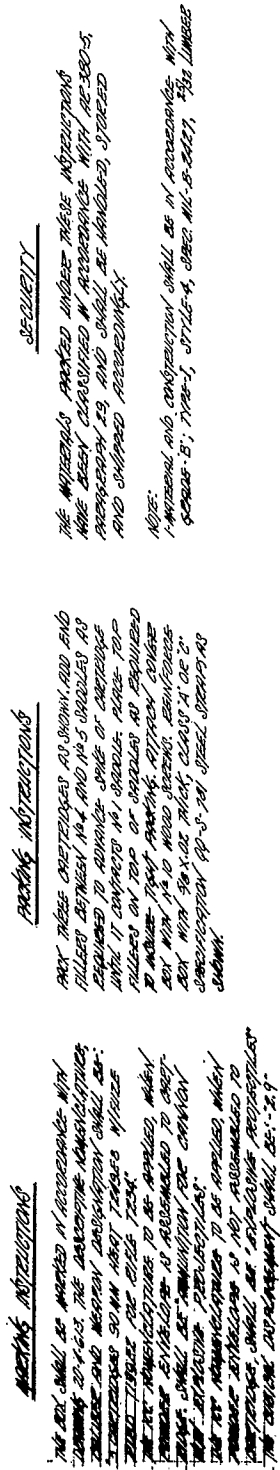

**Fig. 16. Assembly Drawing for Cartridge Container.**  
Firestone Dwg. No. DRD-29-771.

# CONFIDENTIAL

## PAT RIFLES

The manufacture of the test rifle has been completed during the report period. The rifle was shipped to the Erie Ordnance Depot on March 15. Proof acceptance and recoil balancing tests will be conducted when the test cartridges have been assembled and loaded. A picture of the test rifle is shown in Fig. 17. Inspection data for the test rifle will be reported in a future progress report.

Manufacture of the 90mm T234 prototype recoilless rifle has begun. The rifle is 50% completed. Frankford Arsenal will supply the prototype venturi and finalized drawings for the venturi sleeve and spring. Completion of the rifle in April, as scheduled, is contingent upon the receipt of the above items.



Fig. 17. The Test Rifle.

# CONFIDENTIAL

## Future Program

1. Perform shaped charge evaluation tests.
2. Evaluate performances of primers and propellant containers.
3. Expedite delivery of Mod 2A and Mod 2B spike noses, dummy base elements, propellant containers and shipping containers.
4. Conduct fuze evaluation tests using five T249E8 Mod 1 projectiles.
5. Prepare 95 T249E8 Mod 1 cartridges for shipment as directed by Frankford Arsenal.
6. Perform comparative tests of T249 E8 Mod 2A and Mod 2B projectiles.
7. Manufacture 900 T249E8 type projectiles.
8. Assemble 26 test cartridges for rifle interior ballistic evaluations.
9. Proof test rifle.
10. Manufacture prototype rifle.
11. Proof prototype rifle.

# CONFIDENTIAL

## T119 PROJECTILE 105 MM. FOLDING FIN BAT

### Obturation and Spin Study

It has been demonstrated by tests described in previous reports that improving the obturation of the T119E11 (M344) projectile gives improved accuracy. The best accuracy results were obtained with a gilding metal obturator from a smooth bore tube. Some tests were fired with slip nylon obturators from a rifled tube; and the accuracies obtained, though good, were not as good as those obtained with the gilding metal obturator. Fastax pictures of the muzzle blast show the gilding metal band to give better obturation than the nylon band, and the better obturation appears to be associated with better accuracy.

Test results for T119E11 type projectiles with gilding metal or with nylon bands are reported in the Thirty-Fourth, Forty-Third, Forty-Fourth, Forty-Ninth, Fiftieth, Fifty-Fourth and Fifty-Seventh Progress Reports.

The gilding metal obturator requires a special smooth bore tube. It was felt that the nylon band could be developed to give

better obturation, and this band could be fired from the standard M40 rifled tube. Previous designs with nylon band required a special body. A quantity of M344 components was obtained, and by a simple modification the existing body was grooved to accept a nylon band. Details of the body modification are shown in Figure 18. The fins were shortened by cutting two inches from the tip and one fin of each projectile was marked with a .04 in. dia. by .5 in. pin for yaw card spin measurements. The modified M344 projectiles were inert loaded and designated T119E16 (DRD755).

To evaluate the obturation and spin qualities of nylon bands having different outside diameters, 14 T119E16 projectiles were assembled as shown in Table IV. The rounds were fired through a series of five yaw cards. Fastax pictures were taken of nearly all rounds.

Table V gives the range data for this program and Table VI a summary of the results including a comment on the quality of obturation based on study of the Fastax

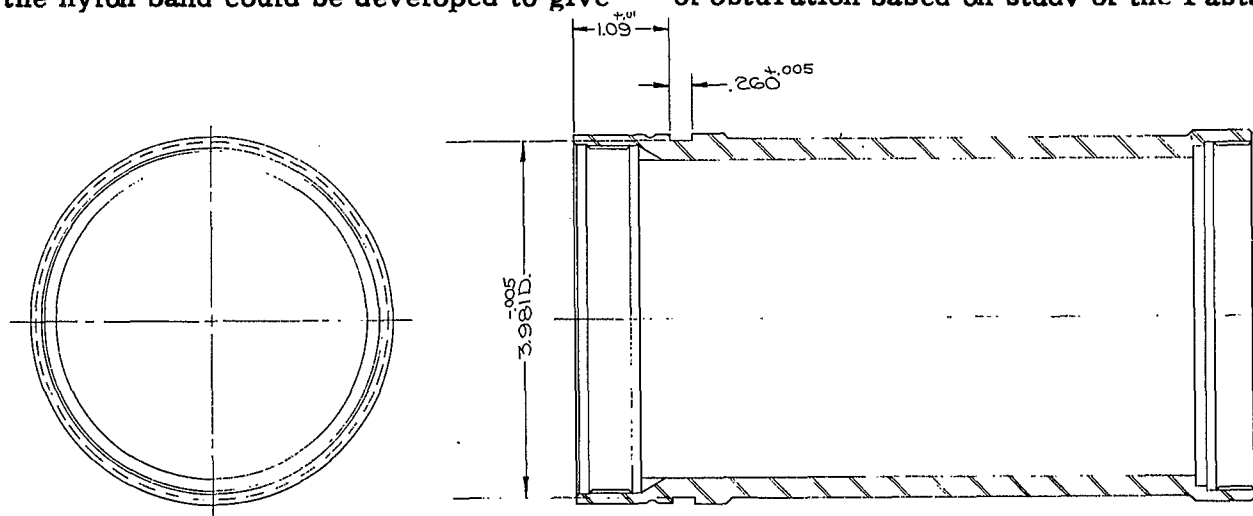


Fig. 18. Modified Body—106 mm., M344.  
Firestone Dwg. No. DRB-14-1412.

# CONFIDENTIAL

**Table IV**  
**Assembly Data**

| No. of Proj's. | Band Drawing Numbers | Band O.D. (in.) |
|----------------|----------------------|-----------------|
| 5              | DRA-14-1834 Item 2*  | 4.223           |
| 4              | DRA-14-1834 Item 3*  | 4.238           |
| 5              | DRA-14-1834 Item 4*  | 4.248           |
| * See Fig. 19. |                      |                 |

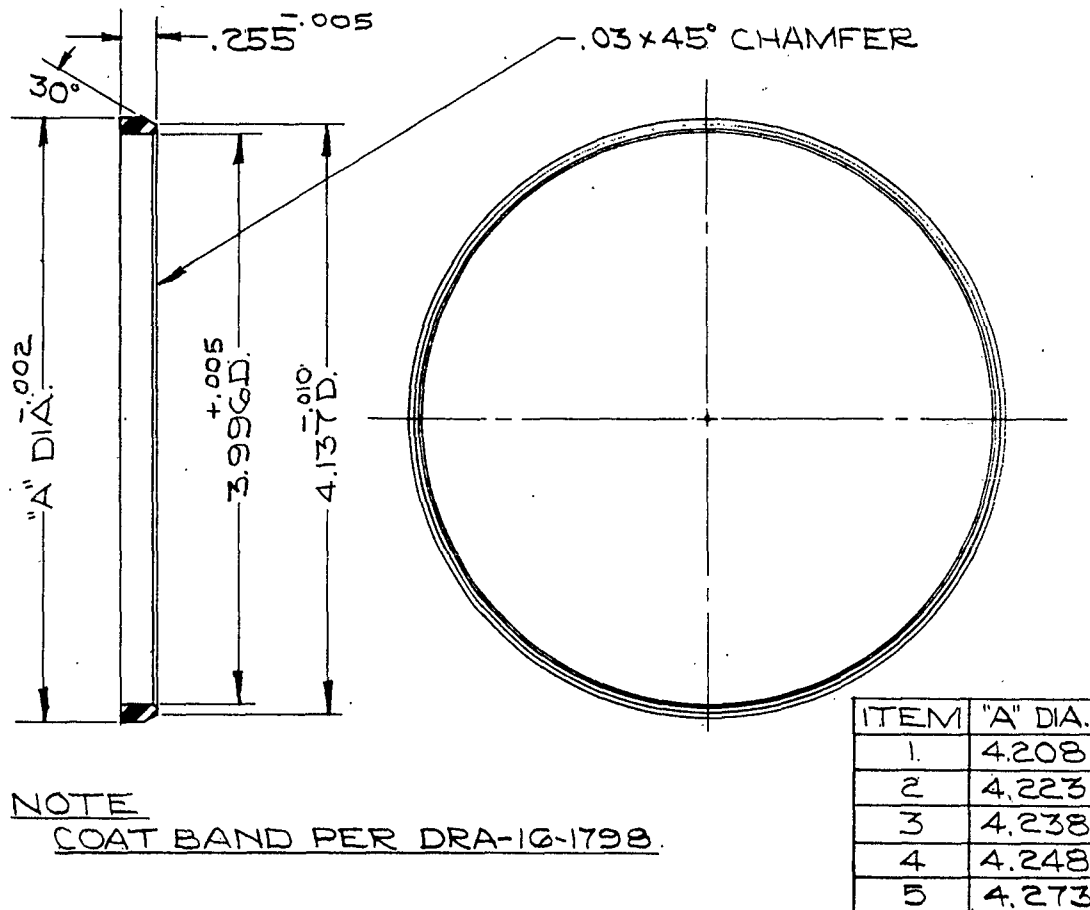


Fig. 19. Obturating Band.  
Firestone Dwg. No. DRA-14-1834.

pictures. Figs. 20 and 21 are muzzle blast photographs of the 4.238 in. and 4.248 in. equipped rounds, respectively.

From the spin data, a plot of roll angle vs range was made for each round, and the slope of this curve determined. This

was taken as the average roll rate (degrees per foot) and used in calculating an average spin rate. This spin rate is tabulated in Table VI appearing immediately below the tabulated spin values; it is not an average of the values preceding it in the column, but agrees closely with the average.



# CONFIDENTIAL

**Table VI**  
**Spin Data**  
**T119E16 Projectile With Different Diameter Nylon Bands**

| Round No.                                               | Card No. | $\phi$ (deg.) | $\Delta\phi$ (deg.) | $\Delta Z$ (ft.) | $\frac{\Delta\phi}{\Delta Z}$ deg./ft. | Velocity (fps) | Spin (rps)       | Obturation Comment                |
|---------------------------------------------------------|----------|---------------|---------------------|------------------|----------------------------------------|----------------|------------------|-----------------------------------|
| Band Number 2 - O.D. = 4.223 In.                        |          |               |                     |                  |                                        |                |                  |                                   |
| 10790                                                   | 1        | 264.0         |                     |                  |                                        | 1707           |                  | Fair                              |
|                                                         | 2        | 278.0         | 14.0                | 7.26             | 1.93                                   |                | 9.2              |                                   |
|                                                         | 3        | 302.5         | 24.5                | 11.85            | 2.07                                   |                | 9.8              |                                   |
|                                                         | 4        | 314.0         | 11.5                | 5.02             | 2.29                                   |                | 10.8             |                                   |
|                                                         | 5        | 353.5         | 39.5                | 16.68            | 2.37                                   |                | 11.2<br>10.3 (a) |                                   |
| 10791                                                   | 1        | 49.5          |                     |                  |                                        | 1692           |                  | Poor                              |
|                                                         | 2        | 62.0          | 12.5                | 7.26             | 1.72                                   |                | 8.1              |                                   |
|                                                         | 3        | 85.5          | 23.5                | 11.85            | 1.98                                   |                | 9.3              |                                   |
|                                                         | 4        | 98.5          | 13.0                | 5.02             | 2.59                                   |                | 12.2             |                                   |
|                                                         | 5        | 137.5         | 39.0                | 16.68            | 2.34                                   |                | 11.0<br>10.1 (a) |                                   |
| 10792                                                   | 1        | -----         |                     |                  |                                        | 1672           |                  | Poor                              |
|                                                         | 2        | 137.0         | -----               | 7.26             | -----                                  |                | ---              |                                   |
|                                                         | 3        | 168.0         | 31.0                | 11.85            | 2.62                                   |                | 12.2             |                                   |
|                                                         | 4        | 184.0         | 16.0                | 5.02             | 3.19                                   |                | 14.8             |                                   |
|                                                         | 5        | 233.5         | 49.5                | 16.68            | 2.97                                   |                | 13.8<br>13.3 (a) |                                   |
| 10793                                                   | 1        | 68.0          |                     |                  |                                        | 1672           |                  | Poor                              |
|                                                         | 2        | 85.5          | 17.5                | 6.88             | 2.54                                   |                | 11.8             |                                   |
|                                                         | 3        | 115.5         | 30.0                | 11.57            | 2.59                                   |                | 12.0             |                                   |
|                                                         | 4        | 129.5         | 14.0                | 5.35             | 2.62                                   |                | 12.2             |                                   |
|                                                         | 5        | 175.0         | 45.5                | 16.41            | 2.77                                   |                | 12.9<br>12.4 (a) |                                   |
| 10794                                                   | 1        | 357.5         |                     |                  |                                        | 1649           |                  | Poor                              |
|                                                         | 2        | 15.0          | 17.5                | 6.88             | 2.54                                   |                | 11.6             |                                   |
|                                                         | 3        | 42.0          | 27.0                | 11.57            | 2.33                                   |                | 10.7             |                                   |
|                                                         | 4        | 55.5          | 13.5                | 5.35             | 2.52                                   |                | 11.5             |                                   |
|                                                         | 5        | 99.5          | 44.0                | 16.41            | 2.68                                   |                | 12.3<br>11.6 (a) |                                   |
| Band Number 4 - O.D. = 4.238 In.                        |          |               |                     |                  |                                        |                |                  |                                   |
| 10795                                                   | 1        | 304.0         |                     |                  |                                        | 1675           |                  | Good                              |
|                                                         | 2        | 324.0         | 20.0                | 6.88             | 2.91                                   |                | 13.5             |                                   |
|                                                         | 3        | 355.0         | 31.0                | 11.57            | 2.68                                   |                | 12.5             |                                   |
|                                                         | 4        | 10.0          | 15.0                | 5.35             | 2.80                                   |                | 13.0             |                                   |
|                                                         | 5        | 60.5          | 50.5                | 16.41            | 3.08                                   |                | 14.3<br>13.5 (a) |                                   |
| 10796                                                   | 1        | 251.0         |                     |                  |                                        | 1676           |                  | Good                              |
|                                                         | 2        | 272.5         | 21.5                | 6.88             | 3.12                                   |                | 14.5             |                                   |
|                                                         | 3        | 306.5         | 34.0                | 11.57            | 2.94                                   |                | 13.7             |                                   |
|                                                         | 4        | 321.5         | 15.0                | 5.35             | 2.80                                   |                | 13.0             |                                   |
|                                                         | 5        | 21.0          | 59.5                | 16.41            | 3.62                                   |                | 16.9<br>15.0 (a) |                                   |
| 10797                                                   | 1        | 268.5         |                     |                  |                                        | 1660           |                  | Event obscured on Fastax pictures |
|                                                         | 2        | 290.0         | 21.5                | 6.88             | 3.12                                   |                | 14.4             |                                   |
|                                                         | 3        | 323.5         | 33.5                | 11.57            | 2.90                                   |                | 13.4             |                                   |
|                                                         | 4        | 340.5         | 17.0                | 5.35             | 3.18                                   |                | 14.7             |                                   |
|                                                         | 5        | 394.0         | 53.5                | 16.41            | 3.26                                   |                | 15.0<br>14.3 (a) |                                   |
| 10798                                                   | 1        | 341.0         |                     |                  |                                        | 1682           |                  | No picture                        |
|                                                         | 2        | 5.0           | 24.0                | 6.88             | 3.49                                   |                | 16.3             |                                   |
|                                                         | 3        | 43.0          | 38.0                | 11.57            | 3.28                                   |                | 15.3             |                                   |
|                                                         | 4        | 62.5          | 19.5                | 5.35             | 3.64                                   |                | 17.0             |                                   |
|                                                         | 5        | 121.0         | 58.5                | 16.41            | 3.56                                   |                | 16.6<br>16.2 (a) |                                   |
| Band Number 3 - O.D. = 4.248 In.                        |          |               |                     |                  |                                        |                |                  |                                   |
| 10799                                                   | 1        | 227.5         |                     |                  |                                        | 1673           |                  | No picture                        |
|                                                         | 2        | 248.0         | 20.5                | 6.88             | 2.98                                   |                | 13.8             |                                   |
|                                                         | 3        | 284.0         | 36.0                | 11.57            | 3.11                                   |                | 14.4             |                                   |
|                                                         | 4        | 301.5         | 17.5                | 5.35             | 3.27                                   |                | 15.2             |                                   |
|                                                         | 5        | 359.0         | 57.5                | 16.41            | 3.50                                   |                | 16.3<br>15.2 (a) |                                   |
| 10800                                                   | 1        | 100.0         |                     |                  |                                        | 1649           |                  | Event obscured on Fastax pictures |
|                                                         | 2        | 120.5         | 20.5                | 6.88             | 2.98                                   |                | 13.6             |                                   |
|                                                         | 3        | 150.0         | 29.5                | 11.57            | 2.55                                   |                | 11.7             |                                   |
|                                                         | 4        | 167.0         | 17.0                | 5.35             | 3.18                                   |                | 14.6             |                                   |
|                                                         | 5        | 221.5         | 54.5                | 16.41            | 3.32                                   |                | 15.2<br>13.9 (a) |                                   |
| 10801                                                   | 1        | 280.0         |                     |                  |                                        | 1667           |                  | Good                              |
|                                                         | 2        | 296.0         | 16.0                | 6.88             | 2.32                                   |                | 10.7             |                                   |
|                                                         | 3        | 323.0         | 27.0                | 11.57            | 2.33                                   |                | 10.8             |                                   |
|                                                         | 4        | 336.5         | 13.5                | 5.35             | 2.52                                   |                | 11.7             |                                   |
|                                                         | 5        | 20.0          | 43.5                | 16.41            | 2.65                                   |                | 12.3<br>11.4 (a) |                                   |
| 10802                                                   | 1        | 260.0         |                     |                  |                                        | 1663           |                  | Good                              |
|                                                         | 2        | 274.5         | 14.5                | 6.88             | 2.11                                   |                | 9.7              |                                   |
|                                                         | 3        | 301.5         | 27.0                | 11.57            | 2.33                                   |                | 10.8             |                                   |
|                                                         | 4        | 315.0         | 13.5                | 5.35             | 2.52                                   |                | 11.6             |                                   |
|                                                         | 5        | 357.0         | 42.0                | 16.41            | 2.56                                   |                | 11.8<br>11.1 (a) |                                   |
| 10803                                                   | 1        | -----         |                     |                  |                                        | 1670           |                  | Good                              |
|                                                         | 2        | 168.5         | -----               | 6.88             | -----                                  |                | ----             |                                   |
|                                                         | 3        | 194.5         | 26.0                | 11.57            | 2.25                                   |                | 10.4             |                                   |
|                                                         | 4        | 209.0         | 14.5                | 5.35             | 2.71                                   |                | 12.6             |                                   |
|                                                         | 5        | 250.0         | 41.0                | 16.41            | 2.50                                   |                | 11.6<br>11.3 (a) |                                   |
| Note:<br>(a) From slope of line through plotted values. |          |               |                     |                  |                                        |                |                  |                                   |

## CONFIDENTIAL

It appears that the smallest band of the three tested (4,233 in. O. D.) is not large enough to provide good obturation; both others appear adequate. All spin rates were under 20 rps and are, therefore, considered acceptable. Small values of

the infrequent yaw indicate good launching characteristics.

Additional rounds will be fired to determine if a larger band diameter gives improved obturation at an acceptable spin level.

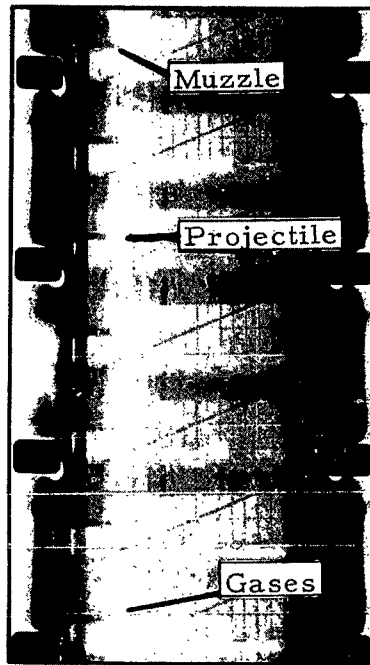


Fig. 20. Muzzle Blast Photographs.  
Round Using 4.238-In. Band.

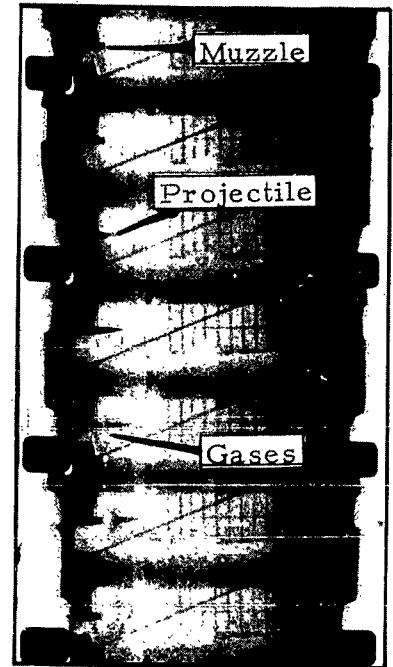


Fig. 21. Muzzle Blast Photographs.  
Round Using 4.248-In. Band.



# CONFIDENTIAL

## T335 PROJECTILE 90 MM. FOLDING FIN BAT

Nine T335E11 projectiles (spike nose) have been fired at the 2000-yard target. Firing was discontinued because of high

winds. The remaining rounds will be held for more favorable weather.

### Future Program

1. Eleven T335E11 projectiles (spike nose) are being held for the most favorable weather for 2000-yard accuracy test.

2. Twenty T335E12 projectiles (3-cal. ogive) are being assembled. These projectiles will be fired for accuracy at a range of 2000 yards to compare their accuracy with that of the spike-nose T335 E11 projectiles.

3. Additional nylon band designs will be tested for improved obturation. Four slugs are available for these tests.

# CONFIDENTIAL

## PENETRATION STUDIES

### PAT PENETRATION STUDIES


#### Effect Of Ogive And Nose Assembly

The penetration tests to determine the effect of ogive ALX-178-6 and nose assembly ALX-178-9 on penetration have been completed.

The tests were conducted with test assemblies DRC506 equipped with cones DRB707 and ogives and nose assemblies

which duplicate the corresponding parts of shell T249E8. The three items compared were test assembly DRC506 and nose rings DRB-23-1056, test assembly DRC506 with ogive DRA-29-1842, and test assembly DRC506 with ogive DRA-29-1842 and nose assembly LX 178-8, -9 and -15. The data are presented in Tables VII, VIII and IX. The assemblies tested are shown at the top of each table.

**Table VII**  
**Penetration Data**  
**Test Item 1 (Control)**

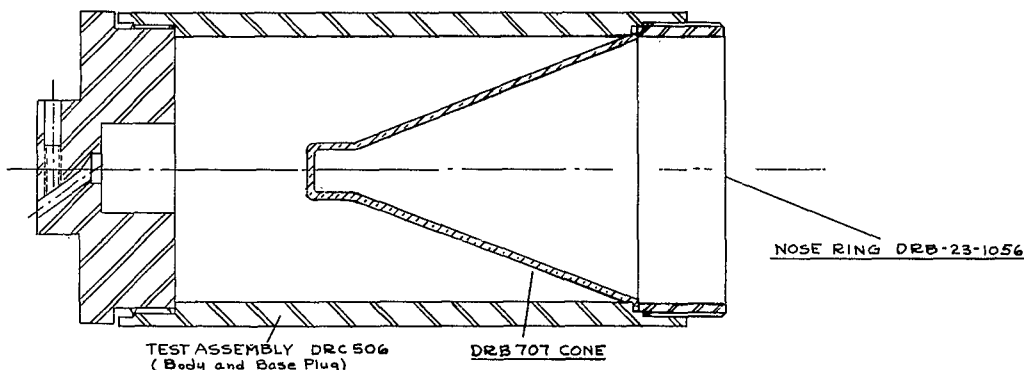

| Serial No. | Standoff (in.) | Rotation (rps) | Penetration (in.-M.S.) | Max.Spread (in.) | Std. Dev. (in.) |
|------------|----------------|----------------|------------------------|------------------|-----------------|
| K52        | 7.25           | 0              | 18.12                  |                  |                 |
| K53        | 7.25           | 0              | 17.44                  |                  |                 |
| K54        | 7.25           | 0              | 17.18                  |                  |                 |
| K55        | 7.25           | 0              | 16.44                  |                  |                 |
| K56        | 7.25           | 0              | 18.31                  | 1.75             | .54             |
| Ave.       | 7.25           | 0              | 17.50                  |                  |                 |

**Notes:**

1. DRB707 cones are machined from drawn DRB398 cones. Machine cut taken inside and outside.
2. All assemblies were loaded at Ravenna Arsenal, Comp. B, Lot No. 85 from Holston Lot 4-1197.
3. All tests were performed at Erie Ordnance Depot.


# CONFIDENTIAL

The DRB707 cones used in this test were made from DRB398 cold drawn cones that were available from stock. A light skin cut was made on the inside of the cone and then the cone was finish machined to dimension. The cone is shown in Fig. 22. The cone inspection data are summarized in Table X. The loading data are shown in Table XI. The results of the test are summarized in Table XII. From these data the following conclusions are derived:

(1) The ogive alone produces only a slight reduction in penetration i.e. (.5 inch).

(2) The ogive and nose assembly combined produce a reduction of 1.6 in. The nose assembly apparently produces 1.2 in. of the total reduction in penetration produced by the entire ogive and nose assembly.

**Table VIII**  
**Penetration Data**  
**Test Item 2**

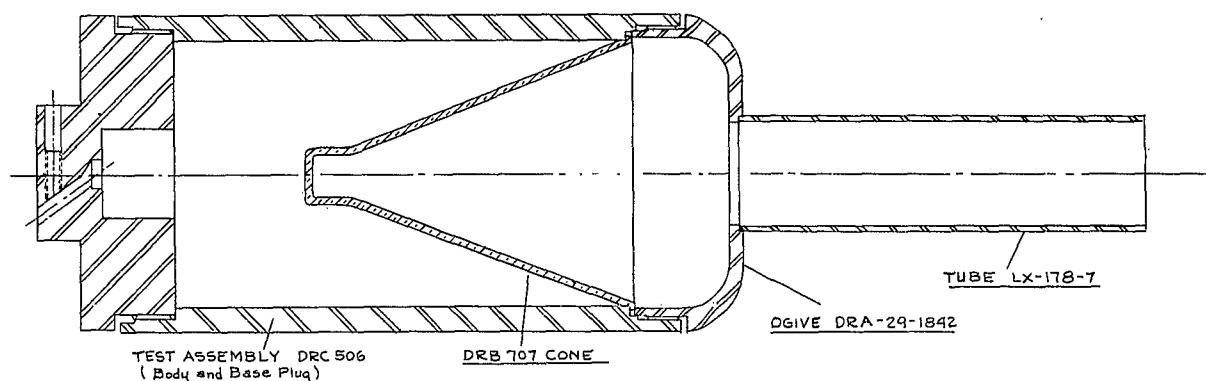

| Serial No. | Standoff (in.)        | Rotation (rps) | Penetration (in.-M.S.) | Max. Spread (in.) | Std. Dev. (in.) |
|------------|-----------------------|----------------|------------------------|-------------------|-----------------|
| K37        | Ogive + 1 9/16        | 0              | 16.31                  | 1.50              | .65             |
| K41        | Ogive + 1 9/16        | 0              | 17.50                  |                   |                 |
| K44        | Ogive + 1 9/16        | 0              | 17.81                  |                   |                 |
| K45        | Ogive + 1 9/16        | 0              | 16.44                  |                   |                 |
| K46        | <u>Ogive + 1 9/16</u> | <u>0</u>       | <u>17.19</u>           |                   |                 |
| Ave.       | Ogive + 1 9/16        | 0              | 17.05                  |                   |                 |
| K38        | Ogive + 1 9/16        | 18             | 16.31                  | 1.50              | .62             |
| K39        | Ogive + 1 9/16        | 18             | 15.87                  |                   |                 |
| K40        | Ogive + 1 9/16        | 18             | 15.44                  |                   |                 |
| K42        | Ogive + 1 9/16        | 18             | 16.94                  |                   |                 |
| K43        | <u>Ogive + 1 9/16</u> | <u>18</u>      | <u>16.75</u>           |                   |                 |
| Ave.       | Ogive + 1 9/16        | 18             | 16.26                  |                   |                 |

**Notes:**

1. DRB707 cones are machined from drawn DRB398 cones. Machine cut taken inside and outside.
2. All assemblies were loaded at Ravenna Arsenal, Comp. B, Lot No. 85 from Holston Lot 4-1197.
3. All tests were performed at Erie Ordnance Depot.

[illegible]

# CONFIDENTIAL

**Table X**  
**Summary Inspection Data**  
**Cone DRB707**

| Drawing Number<br>DRB707-1 | Wall Thickness<br>(in.) | Max. Wall Thickness<br>Variation (in.) |           | Max. Wall Waviness<br>(inch) |       | Concentricity - T.I.R.(in.) |               |                         |
|----------------------------|-------------------------|----------------------------------------|-----------|------------------------------|-------|-----------------------------|---------------|-------------------------|
|                            |                         | Transv.                                | Longitud. | O. D.                        | I. D. | Base<br>Datum               | Apex<br>Datum | Cone Tip<br>in Assembly |
|                            |                         |                                        |           |                              |       |                             |               |                         |
|                            | Max. .086               |                                        |           |                              |       |                             |               |                         |
| Specification              | Min. .084               | .001                                   | .003      | .003                         | .003  | .003                        | .003          | .015                    |
| Maximum                    | .087                    | .004                                   | .006      | .002                         | .001  | .011                        | .013          | .015                    |
| Minimum                    | .078                    | .000                                   | .001      | .001                         | .001  | .002                        | .002          | .004                    |
| Average                    | .0840                   | .0019                                  | .0029     | .0011                        | .001  | .0048                       | .0069         | .0080                   |
| Std. Dev.                  | .0019                   | .0012                                  | .0015     | .0002                        | .0000 | .0026                       | .0034         | .0029                   |

**Table XI**  
**Loading Data**  
**DRC506 Body; DRB707-1 Cone**

| Round<br>No. | X-Ray<br>No. | Proj. Loaded<br>Wt. (lbs.) | Empty Proj.<br>Wt. (lbs.) | H. E. Wt.<br>(lbs.) |
|--------------|--------------|----------------------------|---------------------------|---------------------|
| K37          | A1           | 7.60                       | 6.00                      | 1.60                |
| K38          | A2           | 7.64                       | 6.04                      | 1.60                |
| K39          | A3           | 7.60                       | 6.02                      | 1.58                |
| K40          | A4           | 7.58                       | 6.00                      | 1.58                |
| K41          | A5           | 7.58                       | 5.95                      | 1.60                |
| K42          | A6           | 7.62                       | 6.02                      | 1.60                |
| K43          | A7           | 7.58                       | 6.00                      | 1.58                |
| K44          | A8           | 7.58                       | 5.98                      | 1.60                |
| K45          | A9           | 7.62                       | 6.02                      | 1.60                |
| K46          | A10          | 7.58                       | 6.00                      | 1.58                |
| K47          | A11          | 7.88                       | 6.30                      | 1.58                |
| K48          | A12          | 7.88                       | 6.30                      | 1.58                |
| K49          | A13          | 7.90                       | 6.30                      | 1.60                |
| K50          | A14          | 7.88                       | 6.30                      | 1.58                |
| K51          | A15          | 7.86                       | 6.28                      | 1.58                |
| K52          | A16          | 6.90                       | 5.32                      | 1.58                |
| K53          | A17          | 6.90                       | 5.30                      | 1.60                |
| K54          | A18          | 6.90                       | 5.34                      | 1.56                |
| K55          | A19          | 6.90                       | 5.30                      | 1.60                |
| K56          | A20          | 6.88                       | 5.30                      | 1.58                |

**Notes:**

1. All X-ray results were satisfactory.
2. Comp. B temperature 186°; projectile temperature 76°; cool room temperature 76°; cooling time 50 min.
3. Date loaded March 6, 1956.

# CONFIDENTIAL

**Table XII**  
**Summary Penetration Data**  
**Types 1, 2 and 3**

| Type           | Standoff<br>(in.)                  | Rotation<br>(rps) | Penetration<br>(in. - M.S.) | Max. Spread<br>(in.) | Std. Dev.<br>(in.) |
|----------------|------------------------------------|-------------------|-----------------------------|----------------------|--------------------|
| 1<br>(Control) | 7.25                               | 0                 | 17.5                        | 1.75                 | .54                |
| 2              | 7.25<br>(Ogive + 1 9/16)           | 0                 | 17.05                       | 1.50                 | .65                |
| 2              | 7.25<br>(Ogive + 1 9/16)           | 18                | 16.26                       | 1.50                 | .62                |
| 3              | 7.25<br>(Ogive + Nose<br>Assembly) | 0                 | 15.86                       | 1.06                 | .45                |

(3) Eighteen rps, which is the spin rate expected at 900 fps, reduces the penetration by approximately 3/4 in.

On the basis of an 80% homogeneous armor to mild steel conversion factor,

and neglecting the difference between static and dynamic penetration, the test assembly should produce about 12.5 in. penetration into homogeneous armor. This figure is tested against homogeneous armor.

## BAT PENETRATION STUDIES

No penetration testing was conducted on BAT programs during the month of March.

Thirty 120mm test assemblies were made and delivered to Ravenna Arsenal for Comp B loading.

## FUTURE PROGRAM

### PAT Projects

Test I. Evaluation of new ogive and nose assembly

If it is shown that the ogive and nose assembly do reduce the penetration, fire five test assemblies DRC 506 with cones DRB707 equipped with

an ogive and nose assembly patterned after that of the T300 shell.

Test II. Selection of Cone

1. Cone to configuration of 5th stage draw of Eastern Tool drawing process (Sixty-Fourth Progress Report). This cone to have .086 in. to .090 in. wall,

## CONFIDENTIAL

effective diameter 3.3 in. Cone to be manufactured by draw process with a final coining operation for dimensional control. To be tested in T249E8 Mod. 2 body (Al). To be tested at 0 and 20 rps at built in standoff.

2. Cone to the same configuration as item 1, manufactured by shear forming for optimum performance at 15 - 20 rps.

To be tested in T249E8 Mod. 2 body (Al) at 0, 15, 30 and 45 rps with 5 samples taken at each spin rate to establish optimum spin rate and 5 samples to be fired at optimum spin rate.

3. Double angle, uniform wall thickness cones. This cone will be similar to DRB-16-1418 except the effective diameter will be approximately 3.3 in. in diameter, and the flange detail will be changed. These cones will be shear formed and annealed. To be tested in T249E8 Mod. 2 (Al) bodies at 0 and 20 rps at built in standoff.

4. Double angle, tapered wall cones. This cone will be similar to DRB1171

except that the effective diameter will be increased and the flange detail changed. These cones will be manufactured by shear forming with an anneal.

To be tested in the T249E8 body (Al) at 0 and 22 rps at built in standoff.

5. Single angle, 42° apex angle cones manufactured by shear forming and annealing. These cones will be similar to DRB707 except that the effective diameter will be increased to approximately 3.3 in. and the flange detail changed (DRB-29-1429). To be used as controls. To be tested in the T249E8 (Al) body at 0 and 20 rps and built in standoff.

### BAT Projects

#### 120mm Studies

A group of 30 shear formed 120mm cones have been manufactured and are being assembled into test assemblies for H. E. loading. These assemblies will be fired at various standoff distances to determine the comparative penetration effect.

**CONFIDENTIAL**

**TERMINAL BALLISTIC EFFECTIVENESS**

**BAT PROJECTS**

**Future Program**

1. Program 2 phase II (Test Program No. 320) of the present lethality program is in progress at Aberdeen Proving Ground. The program outlined in the Fiftieth Progress Report has been augmented to contain 125 shell; 75 shell M344 and 50 shell M344 modified by replacing the DRB398 cone with the DRC-23-916 Breidenbach sleeve type cones. Ten of the latter have the aluminum sleeve cemented to the basic copper cone and are crimped together. The test firing and fragment dispersion beyond the target counting will be continued to completion of the program.

2. The six groups of assemblies manufactured for the terminal ballistic (lethality) test to be conducted jointly by Frankford Arsenal (Pitman-Dunn Laboratories), Aberdeen Proving Ground (Ballistic Research Laboratory and Development Proof Services) and Firestone to assist the joint committee on BAT weapons in the selection of a caliber for continued development of the Ultimate BAT weapon are currently being tested. The six groups of shell are:

- (1) Shell, HEAT, T336E21, 120mm (Frankford Arsenal)
- (2) Shell, HEAT, M344, 106mm (Control)
- (3) Shell, HEAT, T194E4, 105mm (Firestone)
- (4) Shell, HEAT, T335E8, 90mm (Firestone)
- (5) Shell, HEAT, M344, Modified to have flanged cone.
- (6) Shell, HEAT, M344, modified to have Zamak cones.

The static penetration, dynamic penetration and ballistic lethality firings have been completed. Data reduction for these tests is in process. The fuel ignition tests are in process. The firings against tanks has not commenced. However, it is reported that tanks have been made available for this test.



# CONFIDENTIAL

## ENGINEERING AND SHOP HOURS

The following statement of hours expended is presented as required by paragraph (C, 1, d) under REPORTS, page 3, of Contract DA-33-019-ORD-2037. "A statement of the approximate number of (1) engineering and (2) shop hours expended in accomplishing the work performed during the report period".

### (1) Approximate number of Engineering Hours

|             |      |
|-------------|------|
| March, 1956 | 2000 |
|-------------|------|

### (2) Approximate number of Shop Hours

|             |      |
|-------------|------|
| March, 1956 | 2950 |
|-------------|------|

## DESTRUCTION OF TECHNICAL REPORTS

In accordance with letter dated 30 August 1954 from the Office, Chief of Ordnance (00/4U0-35696), the following policy has been established:

a. All Ordnance Corps Research and Development technical reports should be destroyed when no longer required for reference by the recipient.

b. Destruction of classified technical reports should be in accordance with AR 380-5.

CONFIDENTIAL

# CONFIDENTIAL

## DISTRIBUTION

| Number<br>of<br>Copies      | NUMBERS     | INSTALLATION<br>Office, Chief of Ordnance |
|-----------------------------|-------------|-------------------------------------------|
| 1                           | 1           | ORDTS                                     |
| 1                           | 2           | ORDTA                                     |
| 1                           | 3           | ORDTA-EM Fuze Section                     |
| 1                           | 4           | ORDTX-AP                                  |
| 1                           | 5           | ORDTB                                     |
| 1                           | 6           | ORDTU                                     |
| 1                           | 7           | ORDIM                                     |
| 1                           | 8           | ORDTS-RW                                  |
| 1                           | 9           | Diamond Ordnance Fuze Laboratory          |
| <b>Arsenals or Commands</b> |             |                                           |
| 10                          | 10-19 incl. | Frankford                                 |
| 2                           | 20-21       | Picatinny                                 |
| 1                           | 22          | Springfield Armory                        |
| 2                           | 23-24       | Redstone                                  |
| 1                           | 25          | Ordnance Weapons Command (Rock Island)    |
| <b>Ordnance Districts</b>   |             |                                           |
| 1                           | 26          | Cleveland                                 |
| <b>Proving Grounds</b>      |             |                                           |
| 2                           | 27-28       | Ballistic Research Laboratories           |
| 1                           | 29          | Development and Proof Services            |
| 1                           | 30          | Erie Ordnance Depot                       |
| <b>Contractors</b>          |             |                                           |
| 1                           | 31          | Olin Mathieson Chemical Corp.             |
| 1                           | 32          | National Forge & Ordnance Co.             |
| 1                           | 33          | Midwest Research Institute                |
| 2                           | 34-35       | Armour Research Foundation                |
| 1                           | 36          | Carnegie Institute of Technology          |
| 2                           | 37-38       | Arthur D. Little, Inc.                    |
| 1                           | 39          | The Budd Company                          |
| 1                           | 40          | Franklin Institute                        |
| 1                           | 41          | Chamberlain Corporation                   |
| 1                           | 42          | American Machine and Foundry Co.          |
| 1                           | 43          | Harvey Machine Company                    |
| <b>U. S. Navy</b>           |             |                                           |
| 1                           | 44          | Bureau of Navy Ordnance                   |
| 2                           | 45-46       | Naval Ordnance Laboratory,<br>White Oak   |
| 2                           | 47-48       | Naval Ordnance Test Station,<br>Inyokern  |
| 1                           | 49          | Naval Proving Ground, Dahlgren            |
| <b>Document Centers</b>     |             |                                           |
| 5                           | 50-54       | ASTIA, Dayton, Ohio                       |

# CONFIDENTIAL