

UNCLASSIFIED

AD NUMBER	
AD102038	
CLASSIFICATION CHANGES	
TO:	unclassified
FROM:	confidential
LIMITATION CHANGES	
TO:	Approved for public release, distribution unlimited
FROM:	Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; NOV 1955. Other requests shall be referred to Development and Proof Services, Aberdeen Proving Ground, MD.
AUTHORITY	
30 Nov 1967, DoDD 5200.10; APG D/A ltr, 19 Nov 1980	

THIS PAGE IS UNCLASSIFIED

CONFIDENTIAL

AD 102038

Armed Services Technical Information Agency

Reproduced by

DOCUMENT SERVICE CENTER

KNOTT BUILDING, DAYTON, 2, OHIO

This document is the property of the United States Government. It is furnished for the duration of the contract and shall be returned when no longer required, or upon recall by ASTIA to the following address: Armed Services Technical Information Agency, Document Service Center, Knott Building, Dayton 2, Ohio.

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

CONFIDENTIAL

10 No. 102038
ASTIA FILE COPY

DSC-SA

ORDBG-1327--24 Oct



ARMOR TEST REPORT AD-1215

Aberdeen Proving Ground
CONFIDENTIAL
MARYLAND

STUDY OF IGNITION OF GASOLINE BY STATICALLY

DETONATED 3.5" HEAT M28A2 ROCKET HEADS (U)
THIS DOCUMENT CONSISTS OF 22 PAGES

COPY 13 OF 22 COPIES, SERIES

D. A. PROJECT NO. 503-04-004

DEVELOPMENT AND PROOF SERVICES
Tenth

TB3-1224B

Report OCO Project No.
Regrading data cannot be predetermined

ARMY...OS...ABERDEEN PROVING GROUND, MD...415

**NOTICE: THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE
NATIONAL DEFENSE OF THE UNITED STATES WITHIN THE MEANING
OF THE ESPIONAGE LAWS, TITLE 18, U.S.C., SECTIONS 793 and 794.
THE TRANSMISSION OR THE REVELATION OF ITS CONTENTS IN
ANY MANNER TO AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW**

CONFIDENTIAL

CONFIDENTIAL

REFERENCE COPY

STUDY OF IGNITION OF GASOLINE BY STATICALLY

DETONATED 3.5" HEAT M28A2 ROCKET HEADS (U)

TENTH REPORT ON PROJECT TBS-1224B

ARMOR TEST REPORT AD-1215

THIS DOCUMENT CONSISTS OF ...24... PAGES
COPY...13... OF...22... COPIES, SERIES.....

Retain or destroy per AR 380-5 and SR 345-
215-5 or comparable AF or Navy Regulations.
DO NOT RETURN"

Regrading data cannot be predetermined

CONFIDENTIAL

-1-

55 A

56676

CONFIDENTIAL

DEVELOPMENT AND PROOF SERVICES
ABERDEEN PROVING GROUND
MARYLAND

Authority: BRL Memo
DA Priority: 1A

1 November 1955

STUDY OF IGNITION OF GASOLINE BY STATICALLY

DETONATED 3.5" HEAT M28A2 ROCKET HEADS (U)

TENTH REPORT ON PROJECT TB3-1224B

ARMOR TEST REPORT AD-1215

DATES OF TEST: 2 December 1954 Through 28 July 1955

OBJECT

To investigate the ignition of gasoline behind various thicknesses of armor plate by 3.5" HEAT, M28A2, rocket heads.

SUMMARY

Thirty-five, 3.5" HEAT, M28A2, rocket heads were detonated against gasoline behind three different thicknesses of armor plate. The frequency of fires for the two thinner armor plates (3/4" and 3") was 100%; for the third and thicker (9") 86%. One round was detonated against gasoline to obtain fastax film data.

CONCLUSION

Gasoline is readily ignited by the 3.5" HEAT, M28A2, rocket head even when it is protected by armor up to nine inches thick.

RECOMMENDATION

An intensive program should be initiated to investigate various means of suppressing fuel fires in armored vehicles subjected to HEAT attack.

REGRADE DATA CANNOT BE PREDETERMINED

CONFIDENTIAL

CONFIDENTIAL

SECRET

DISTRIBUTION FOR TENTH REPORT ON PROJECT TB5-1224B

<u>COPY NO.</u>		<u>APG COPY #</u>	<u>OF 18 COPIES</u>
	Chief of Ordnance Washington 25, D. C.		
3	ATTN: ORDEA	1 copy	
4	ORDTB	1 copy	
5	ORDTX-AR	1 copy	
	Commanding Officer Detroit Arsenal Center Line, Michigan		
6	ATTN: ORDMK-BGM	1 copy	
7	ORDMK-AM	1 copy	
	Commanding Officer Watertown Arsenal Watertown, Mass.		
8	ATTN: Armer Div.	1 copy	
	Commanding Officer Picatinny Arsenal Dover, New Jersey		
9	ATTN: Samuel Feltman Amm. Lab.	1 copy	
	Ballistic Research Lab. Aberdeen Proving Ground, Maryland		
10	ATTN: WSL, Tank Vul. Br.	1 copy	
11	TBL, Detonation Physics Br.	1 copy	
	Carnegie Institute of Technology Schenley Park, Pitts., Pa.		
	THRU: Pittsburgh Ordnance District Pittsburgh, Pa.		
12	ATTN: Dr. Pugh	1 copy	
	Armed Services Technical Information Agency Document Service Center Dayton 2, Ohio		
13		1 vellum copy	
	Canadian Army Staff 2450 Mass. Avenue Washington, D. C.		
14-15	THRU: OCO-ORDGU-SE	2 copies	
	COMARC Liaison Officer Aberdeen Proving Ground, Maryland		
16	ATTN: Col. Lewis	1 copy	
0, 1-2	Technical Library Branch Aberdeen Proving Ground, Maryland	Original & 2 copies	

CONFIDENTIAL

CONFIDENTIAL

DISTRIBUTION FOR TENTH REPORT ON PROJECT TB3-1224B

COPY NO.

	Chief of Ordnance	
	Department of the Army	
	Washington 25, D. C.	
17	ATTN: ORDTU	1 copy
18	ORDTT	1 copy
	British Joint Services Mission	
	1800 K Street, NW	
19 & 20	Washington 6, D. C.	2 copies
	A.D. Little, Inc	
	30 Memorial Drive	
	Cambridge, Mass.	
21	THRU: Boston Ordnance District	1 copy
	Library of Congress	
	Washington, D. C.	
22	ATTN: Dr. Brown	1 copy

CONFIDENTIAL

I INTRODUCTION

A. DISCUSSION

1. This test was devised to compare the frequency of ignition of diesel fuel and of gasoline when each fuel was attacked by 3.5" M28A2 HEAT rocket heads. In previous tests the diesel fuel had been attacked under "clean" conditions. Accordingly, the gasoline in this test was attacked under "clean" conditions. A "clean" condition is one in which there is no oil soaked dirt, wood, or other wick-like material in the vicinity of the target fuel can. A wick-like material increases the probability of a fire by increasing the surface area of the fluid so that it is more readily ignited.

2. Four test conditions were initially planned. The variable in these conditions was the thickness of armor plate to be fired through. The four test thicknesses were 3/4", 2", 3.1" and 9.1"; charges were detonated against the thickest and thinnest plates first. This was done to determine whether or not the other two thicknesses need be fired. A very high frequency of fires for both the 3/4" and 9" armor plates was assumed to indicate a similarly high frequency of fire for the intermediate thicknesses.

3. In addition to the above test conditions, Fastax films of a 3.5" HEAT rocket head jet entering and leaving a fuel can were obtained. Representative film strips and a discussion will be found in Appendix D.

II DESCRIPTION OF MATERIAL

A. The gasoline used in this program was winter grade of 85-90 octane rating.

B. The containers for the gasoline were discarded propellant cans, (Bax, Steel, M2, No. 16 US Standard gauge, Dwg. No. 76-4-55). The liquid capacity of these cans is approximately 16 gallons. Each can when attacked was 7/8ths full. A total of approximately 540 gallons of gasoline was used.

C. German Tiger tank Hulls and prototype fuel compartments fabricated locally (See fuel compartment drawing in Appendix C), were used as fuel target holders and armor protection.

D. Thirty-five, 3.5" HEAT, M28A2, rocket heads, Lot COP-4-95, were detonated. The heads were boosted with tetryl pellets and initiated electrically by means of Corps of Engineers Special Blasting Caps.

E. Camera-Fastax (10,000 frames/sec).

III DETAILS OF TEST

A. PROCEDURE

1. For this test, five German Tiger Tank Hulls which were fired on in a previous test, but still had enough armor surface for use in this test were available for use as targets. The hulls were especially suited for the test in that no interior components had been installed and the interiors were readily accessible

CONFIDENTIAL

CONFIDENTIAL

for the installation and removal of the fuel containers. The hulls also provided armor of 150mm thickness at 50° obliquity. This combination provided an effective thickness of 9.1" when the rocket heads were detonated parallel to the ground.

2. Fuel containers used were discarded propellant cans, which were available in suitable quantity. The containers were filled to 7/8ths capacity and were placed in the hull against the hull side or upper front plate. (See AFG Photographs B5603 through B5606, Appendix E.) The containers were held in place by a single back-up plate of 3/8" armor steel and were braced with angle irons or sections of pipe.

3. In the 3" phase of this test, the prototype fuel compartment was used. The front plate of the prototype is 3" thick sloped at 20° from the vertical. For safety reasons, these compartments were placed inside the Tiger Tank Hulls. All rocket heads were detonated with the prototypes in this position. The positioning and bracing of the target fuel cans was the same as in the 9" armor phase. A drawing of the prototype will be found in Appendix C.

4. For the 3/4" armor phase of this test, the side armor of the Tiger Tank Hulls was modified. The modification consisted of a rectangular hole or window cut in the side armor of the tiger tank hull, and angle iron brackets welded at the sides of this window. This makes it easy to use various sizes of armor plate as protection for the fuel cell. So the fuel cell in this phase was sandwiched between a 3/4" face plate and a 3/8" back-up plate. The face plate was wedged in the angle iron brackets with pieces of pipe and other metal objects. The fuel cell and the back-up-plate were braced in the usual manner.

5. The rocket heads were mounted on wooden holders, parallel to the ground, and aimed at the center of the target can. Initiation was accomplished with tetryl pellet boosters and Corps of Engineers Special Blasting caps.

6. The fuel temperatures were measured with a mercury in glass hand thermometer. Ambient temperatures were obtained from meteorological records. These temperatures along with a description of can damage, record of fires, date of fires, and armor thicknesses in each instance are found in table I, Appendix B.

7. Descriptions of the conditions for fastax film data and of the results are found in Appendix D.

B. RESULTS

1. The fire frequency for the 3/4" armor thickness phase was eleven fires in eleven tries. For the 9" armor thickness phase, it was twelve in fourteen. In one case in which fire did not occur, (through the 9" armor) the jet did not exit from the can; and in the other case, ice was found in the can after the rocket head had been fired. One additional rocket head failed to penetrate the 9" armor completely. This charge was discounted as a test round.

2. One of the prototype compartments was liquid tight, and held the gasoline inside after the jet had penetrated and dislodged the target can. All of the fires in this compartment were confined to the compartment. The flames still came through the top grille, however.

CONFIDENTIAL

CONFIDENTIAL

CONFIDENTIAL

3. The other prototype compartment was not liquid tight. Consequently it was engulfed in flames because of the leaking of the gasoline to the floor of the tiger hull.

IV CONCLUSIONS

Gasoline is readily ignited by 3.5" HEAT M28A2 Rocket Heads under the conditions of this test program, that is:

- A. In cold weather.
- B. Under clean conditions.
- C. When protected by steel armor up to 9 inches thick.

V RECOMMENDATION

An intensive program should be initiated to investigate various means of suppressing fuel fires in armored vehicles subjected to ballistic attack.

APPROVED:

Benjamin S. Goodwin
BENJAMIN S. GOODWIN
Assistant Director for
Engineering Testing
Dev. & Proof Services

G. S. Buczala
G. S. BUCZALA
Ordnance Engineer

H. L. Rosenberg
H. L. ROSENBERG
Chief, Terminal
Ballistics Division

CONFIDENTIAL

CONFIDENTIAL

100-112/1144

APPENDICES

APPENDIX A - Correspondence.

APPENDIX B - Round-By-Round Data - Table I.

APPENDIX C - Drawing: Prototype Fuel Compartment.

APPENDIX D - Fastax Film Data and Discussion.

APPENDIX E - Photographs.

appd 400-112/1144
Incl. to Ltr to, ACTIA, 11/11-2-55

CONFIDENTIAL

7

CONFIDENTIAL

CONFIDENTIAL

APPENDIX A

Correspondence

8

CONFIDENTIAL

C O P Y/htl

CONFIDENTIAL

THRU : Chief, Weapon Systems Laboratory
Director, Development and Proof Services

G. Beichler/ah/24271
16 November 1954

Director, Ballistic Research Laboratories

Vulnerability of Gasoline to the M28A2 3.5 Inch HEAT Round

1. There exists in the study of tank vulnerability a necessity to compare the vulnerability of gasoline (80/86 octane) to diesel fuel. To accomplish this a test procedure comparable to that reported in D&PS' forthcoming report, AD 1188, is necessary substituting gasoline in place of diesel fuel. It is desired that the following test be conducted:

- a. Attacking Projectile - 3.5 inch M28A2 HEAT projectiles statically fired.
- b. Target - 16 gallon gasoline filled powder cans placed behind the armor of clean German Tiger Tanks as shown in Figure 1.
- c. Conditions - All rounds are to enter the powder cans at the same fuel level.

Figure 1

Armor Powder can Back Plate
3.5 HEAT Metal Support Bar
Round

German Tiger Hull

2. Table 1 lists the proposed firings:

Table 1

<u>Number of Rounds</u>	<u>Armor Thickness</u>	<u>Obliquity</u>	<u>Location of Round</u>	<u>Fuel Level</u>
10	9.1"	20	Below Fuel Level	7/8 Full
10	3.1"	20	" " "	" "
10	2.0"	0	" " "	" "
10	3/4"	0	" " "	" "

All rounds will be furnished by the Tank Effectiveness Branch, WSL, BRL.

9

REF

SUBJECT: Vulnerability of Gasoline to the M28A2 3.5 Inch HEAT Round
16 November 1964

3. Complete photographic records of the damage after each round plus Fastex moving pictures of a few rounds are desired. Other data of primary interest consist of the classification of fires, i.e.,

- a. No fire
- b. ground fire
- c. small fire
- d. ordinary fire

as classified in AD 1168. It is desired that this data along with all other pertinent data on the effectiveness of individual rounds be forwarded to the Tank Vulnerability Section as it is collected.

4. Occasional meetings are desired between D&PS and BRL representatives to discuss problems that arise during the firings. Necessary changes to the firing procedures may be made with the approval of both D&PS and BRL representatives.

5. This program is classified 1A and is to be conducted under Project TBS-1224B, Work Order Number 962-002-00. All data pertaining to the results are to be classified "CONFIDENTIAL".

W. E. RAFFERT
Major, Ord Corps
Assistant to Director
Ballistic Research Laboratories

CONFIDENTIAL

APPENDIX B

Round-By-Round Data - Table I

CONFIDENTIAL

ROUND BY ROUND DATA - 3.5" HEAT vs Gasoline

<u>Date</u>	<u>Armor Thickness (inches)</u>	<u>Temperatures (°F)</u>		<u>Fire*</u>	<u>Damage to Can</u>
		<u>Air</u>	<u>Fuel</u>		
2 Dec	3/4	40	42	3	Top holding by 2 sides. Side seam split, bottom blown off.
3 Dec	3/4	34.2	40	3	Can burning on ground, bottom blown off, side seam split, lid blown off and top - one long seam ripped.
3 Dec	3/4	34.2	39	3	Bottom and top blown off, all seams split.
6 Dec	3/4	29.3	40	3	Top blown off, bottom held on by one edge, side seam split.
6 Dec	3/4	29.3	49	3	Bottom and top blown off, all seams split.
7 Dec	3/4	35	40	3	Bottom was blown off, one long edge on top was split.
7 Dec	3/4	35	38	3	Top blown off, can torn on top edge, and bottom two seams split.
22 Dec	3/4	30.9	30	3	Top and bottom blown off and all seams split.
22 Dec	3/4	30.9	30	3	Bottom holding by edge, side seam split and two edges were split on top end.

* 0 = No Fire.
 1 = Small Fire.
 2 = Moderate Fire.
 3 = Large Fire.

Date	Armor Thickness (inches)	Temperatures (°F)		Fire	Damage to Can
		Air	Fuel		
28 Dec	3/4	53	54	3	Top held on by 2 edges, bottom blown off, and side seams split.
28 Dec	3/4	53	55	3	Top held on by one edge, bottom blown off, and side seam split.
2 Dec	9	40	42	3	Jet blew top off, and bottom side seam split.
2 Dec	9	40	42	3	Top blown off, lid out of top, and plug out of bottom.
3 Dec	9	34.2	40	3	Top blown off, and side seam split.
3 Dec	9	34.2	40	0	Can in plate - jet did not exit from can.
6 Dec	9	29.3	31	3	Seam split, top still in place, lid blown out. No sign of jet exit from can.
6 Dec	9	29.3	31	3	Top held on by one edge, bottom held on by 2 edges, and side seam split.
7 Dec	9	35	39	3	Top blown off, and plug blown out of bottom.
7 Dec	9	35	39	3	Jet blew top off, and bottom seam split.

<u>Date</u>	<u>Armor Thickness (inches)</u>	<u>Temperatures (°F)</u>		<u>Fire</u>	<u>Damage to Can</u>
		<u>Air</u>	<u>Fuel</u>		
7 Dec	9	56	39	3	Top blown off, and plug blown out of bottom.
22 Dec	9	30.9	29	3	Top torn on two edges, and bottom torn on two long edges.
22 Dec	9	30.9	30	3	Top blown off, bottom holding on by about 4" of one edge, and side seam split.
22 Dec	9	30.9	30	0	Can out of place, gas on ground, and ice in bottom of can.
28 Dec	9	53	54	3	Top blown off, bottom holding by one side, and side seam split.
28 Dec	9	53	55	3	Top hanging on by one side, lid gone, and bottom blown off.

<u>Date</u>	<u>Armor Thickness (inches)</u>	<u>Temperatures (°F)</u>		<u>Fire</u>	<u>Damage to Can</u>
		<u>Air</u>	<u>Fuel</u>		
21 Jan	3	27.5	23	3	Bottom and top blown off, and side seam split.
21 Jan	3	27.5	23	3	Bottom swinging on one edge, and lid was blown off.
24 Jan	3	36	32	3	Bottom and top blown off, and small edge torn by jet and slug.
24 Jan	3	36	32	3	Top blown off, and lid blown off of top.
25 Jan	3	38.2	29	3	Top and bottom blown off, and side seam split.
25 Jan	3	38.2	29	3	Bottom torn on two edges, lid blown out of top, and side seam split.
26 Jan	3	40	35	3	Bottom and top blown off, and side seam split.
26 Jan	3	40	35	3	Top swinging on one edge, and lid blown out of top.
27 Jan	3	24.4	24	3	Top blown off, and side seam split.
27 Jan	3	24.4	24	3	Top blown off, lid out of top, and plug out of bottom.

CONFIDENTIAL

1


APPENDIX C

Drawing: Prototype Fuel Compartment

16


CONFIDENTIAL

CONFIDENTIAL

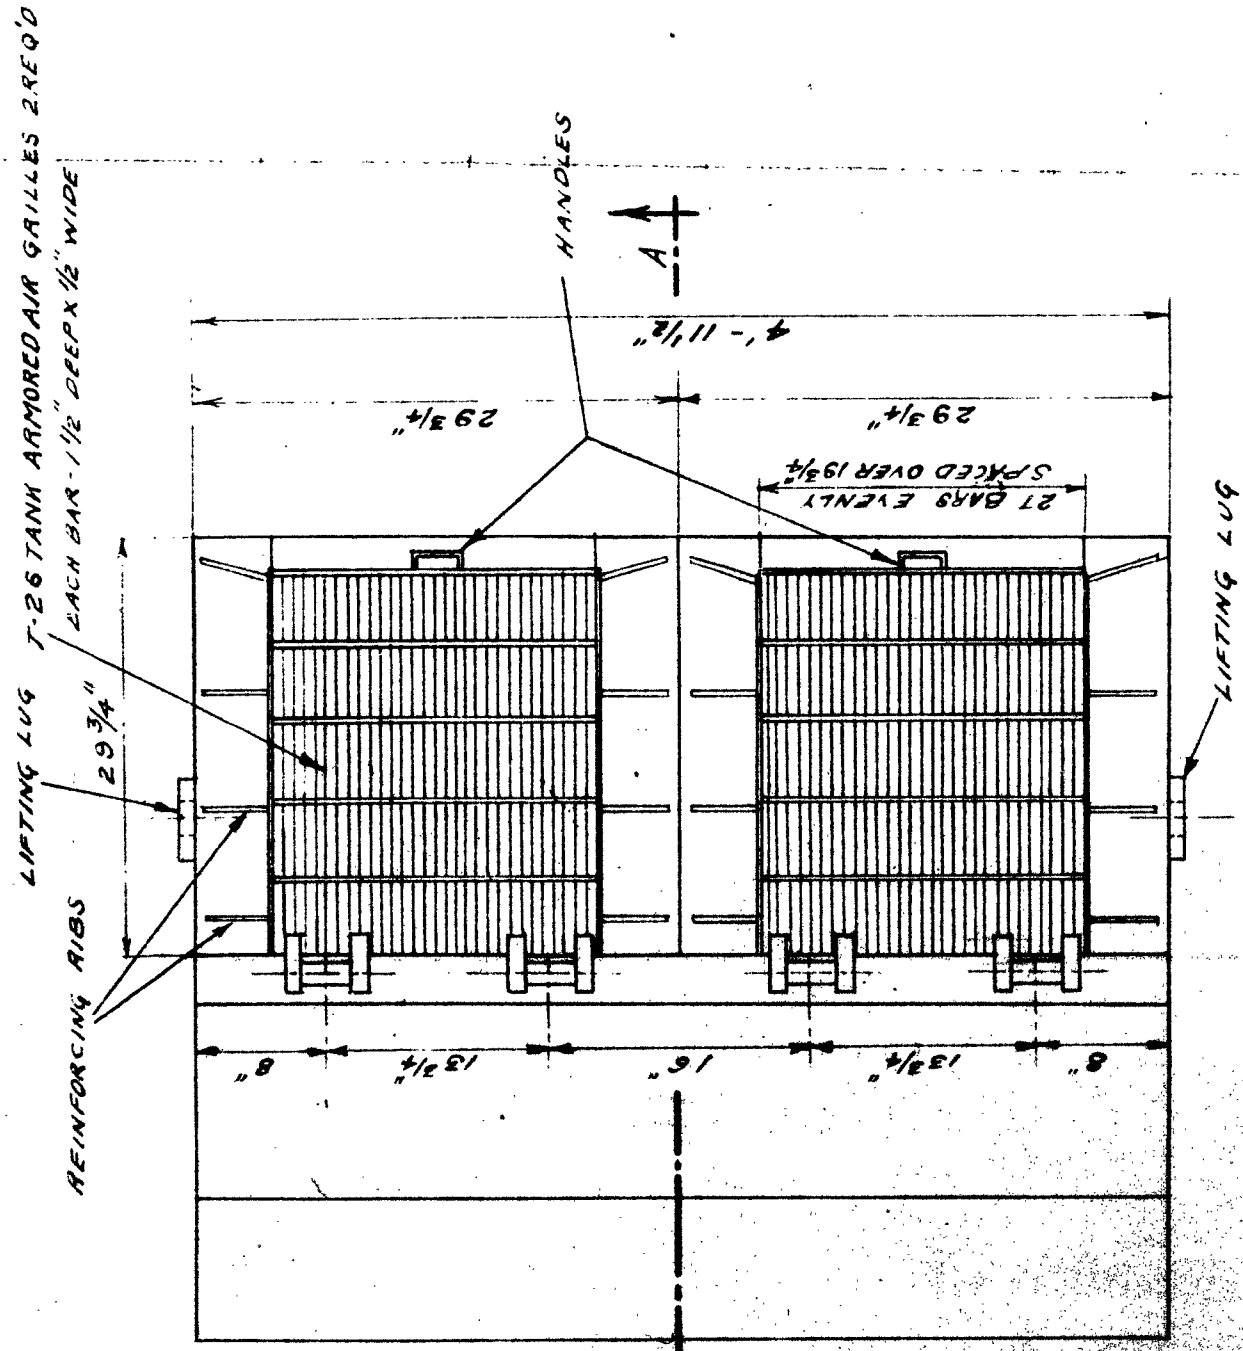

TOP VIEW OF BOX

CONFIDENTIAL

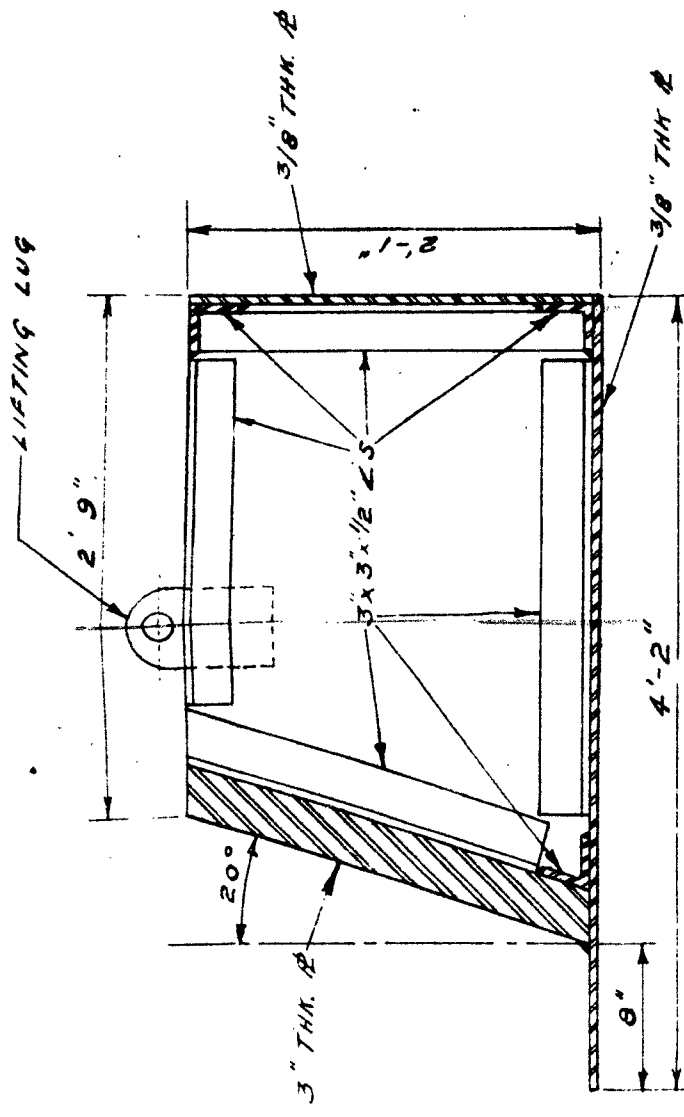

SECTION A-A
(SHOWN WITHOUT CO

(SHOWN WITHOUT COVER)

NOTES: BOX IS OF ALL WELDED CONSTRUCTION
ALL PLATE IS ROLLED HOMOGENEOUS ARMOR

PROTOTYPE TANK
FUEL COMPARTMENT

SCALE 3/32"=1"

DRAWN AT APG D.F.P.S. AFSA DIVISION ARMOR BRANCH	DRAWN BY W. SEWING DATE: 7 APRIL 1954 CHECKED BY J. HANNA DATE: 7 APRIL 1954
---	---

CONFIDENTIAL

CONFIDENTIAL

APPENDIX D

Fastax Film Data and Discussion

CONFIDENTIAL

CONFIDENTIAL

CONFIDENTIAL
FASTAX FILM DATA AND DISCUSSION

3.5" HEAT Rocket Head vs Gasoline

The rocket head was aimed parallel to the ground at an unprotected fuel container some 15 feet away. The fuel container was placed on top of a 50 gal. drum and a 3" piece of armor plate. This arrangement brought the center of the container just even with the rocket head position. Ten feet behind the fuel container a white backdrop of celotex was nailed to stakes in the ground. The camera was placed 35 feet from the side opposite the white celotex backdrop. It was synchronized to start by the same electric impulse that detonated the rocket head.

The rocket head was detonated from the inside of a nearby Tiger tank hull. This was done to protect the camera and other equipment from rocket head fragments.

APG Photograph B10140 is the positive print of a 3 strip portion of the Fastax film. The jet of the shaped charge was traveling at approximately 17000 ft/sec. The can with fluid inside slowed the jet to 5000 ft/sec. A large flash on the front of the fuel container resulted when the jet hit the container. This flash continued for quite a length of time (about .0065 sec) until masked by the burning gasoline vapors and fluid that exited through the jet entrance hole. The container began to bulge as the jet exited from the container. This bulging continued and reached its maximum in about 5.6 milliseconds. The relaxing of this bulge coincided with a loss of liquid and vapor through the entrance and exit holes. Fire resulted on the front of the can. In the final strip of film (APG Photo B10140) the fuel container is enveloped by fire (flame or flash) from the front and by smoke from the rear. For a comparison with similar photographs of 3.5" HEAT against diesel fuel, and water, see APG Report AD-1188, Photographs A92195 and A92192.

CONFIDENTIAL

CONFIDENTIAL



B10140 CONFIDENTIAL 8 ABERDEEN PROVING GROUND 8

4 May 1955

Project No. TB3-1224B. Rocket Heads, 3.5", HEAT, versus Gasoline. Round One. Positive prints of high speed motion picture strips (10 frames - 1 millisecond). Container 15' from armor and HEAT Round. LEFT: Note flash of impacting jet in fourth frame, exit of jet along with flash in bottom frame. CENTER: Flashing continues in top two frames, target can begins to bulge in bottom frames. RIGHT: This strip shows beginning of fire on front side of can.

CONFIDENTIAL

CONFIDENTIAL

APPENDIX E

Photographs: APG Numbers B5603 - B5606 (inc.)

CONFIDENTIAL

CONFIDENTIAL




B5603 CONFIDENTIAL 8 ABERDEEN PROVING GROUND 8 10 January 1955

Project No. TB3-1224B. Vulnerability of Gasoline to 3.5" HEAT.

Frontal slope, No. 3 tiger hull, showing round-in-place on wooden frame. Tip of gasoline can showing through machine gun port.

Gasoline can behind 9" of plate at obliquity used.

CONFIDENTIAL

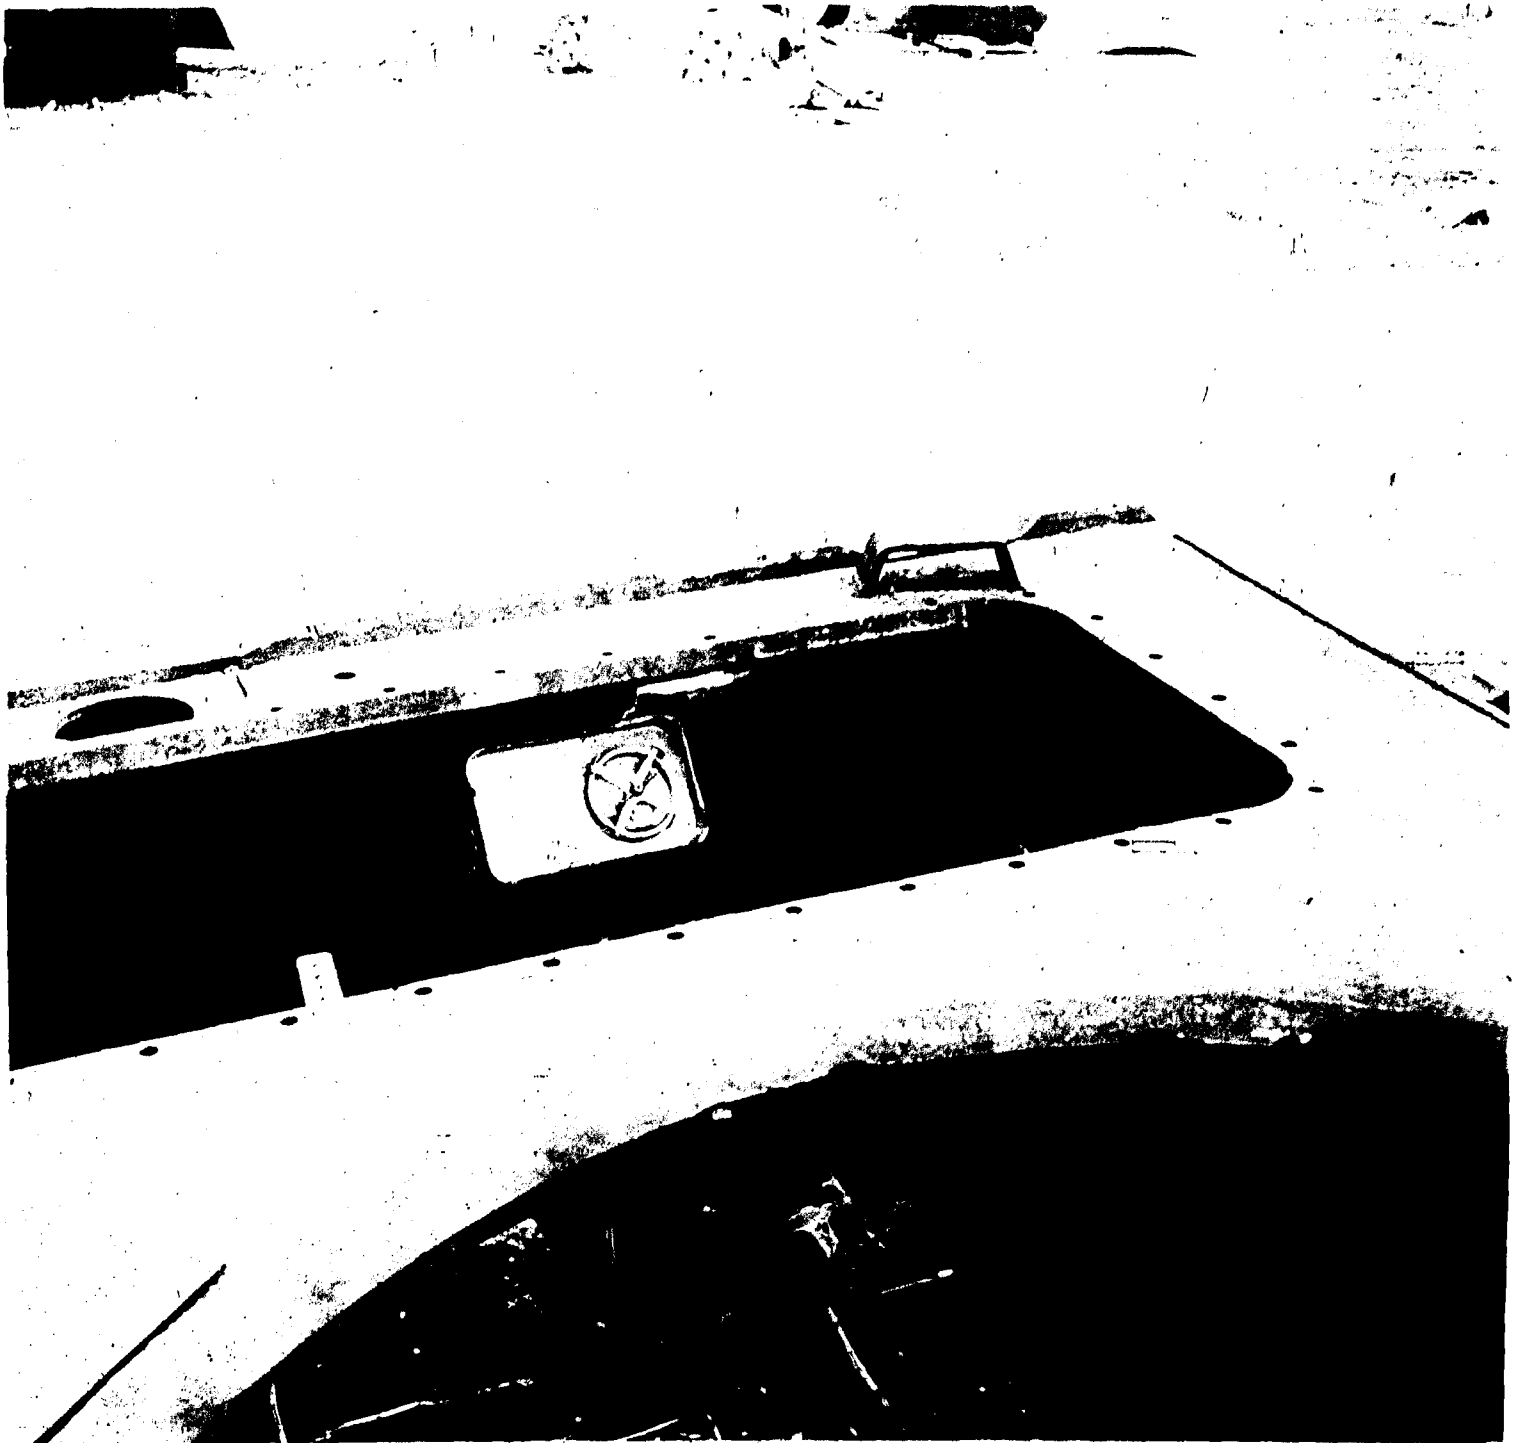

B5604 CONFIDENTIAL


8 ABERDEEN PROVING GROUND 8

10 January 1955

Project No. TB3-1224B. Vulnerability of Gasoline to 3.5" HEAT.

Inside back of frontal slope of No. 3 tiger hull, showing gasoline can held in place by back-up plate and pipe braces. The can is a used 105 lb. powder can.

CONFIDENTIAL

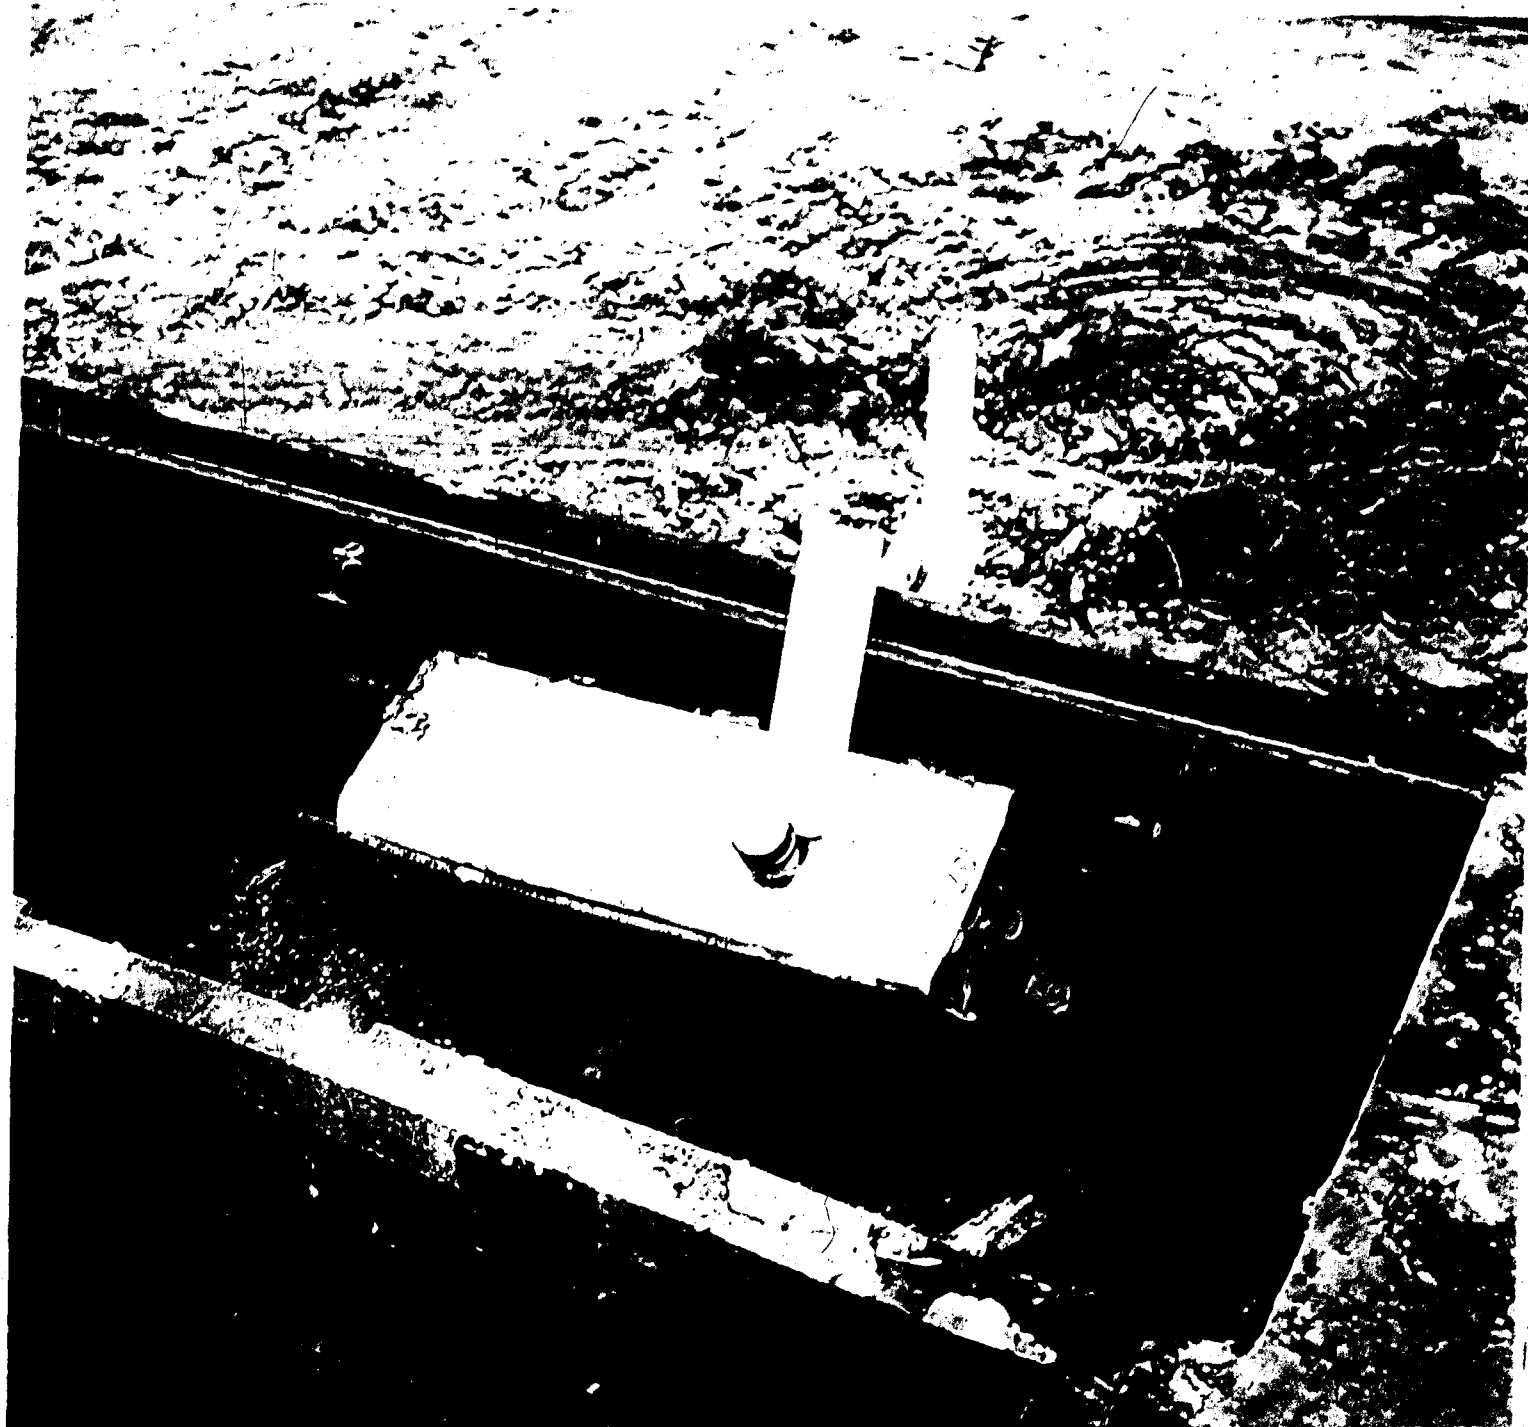


B5605 CONFIDENTIAL 8 ABERDEEN PROVING GROUND 8 10 January 1955

Project No. TB3-1224B. Vulnerability of Gasoline to 3.5" HEAT.

Back of left side of No. 2 tiger hull showing gasoline can in place behind 3/4" plate. NOTE: Brackets on ends of can are used to hold various sizes of armor plate.

CONFIDENTIAL

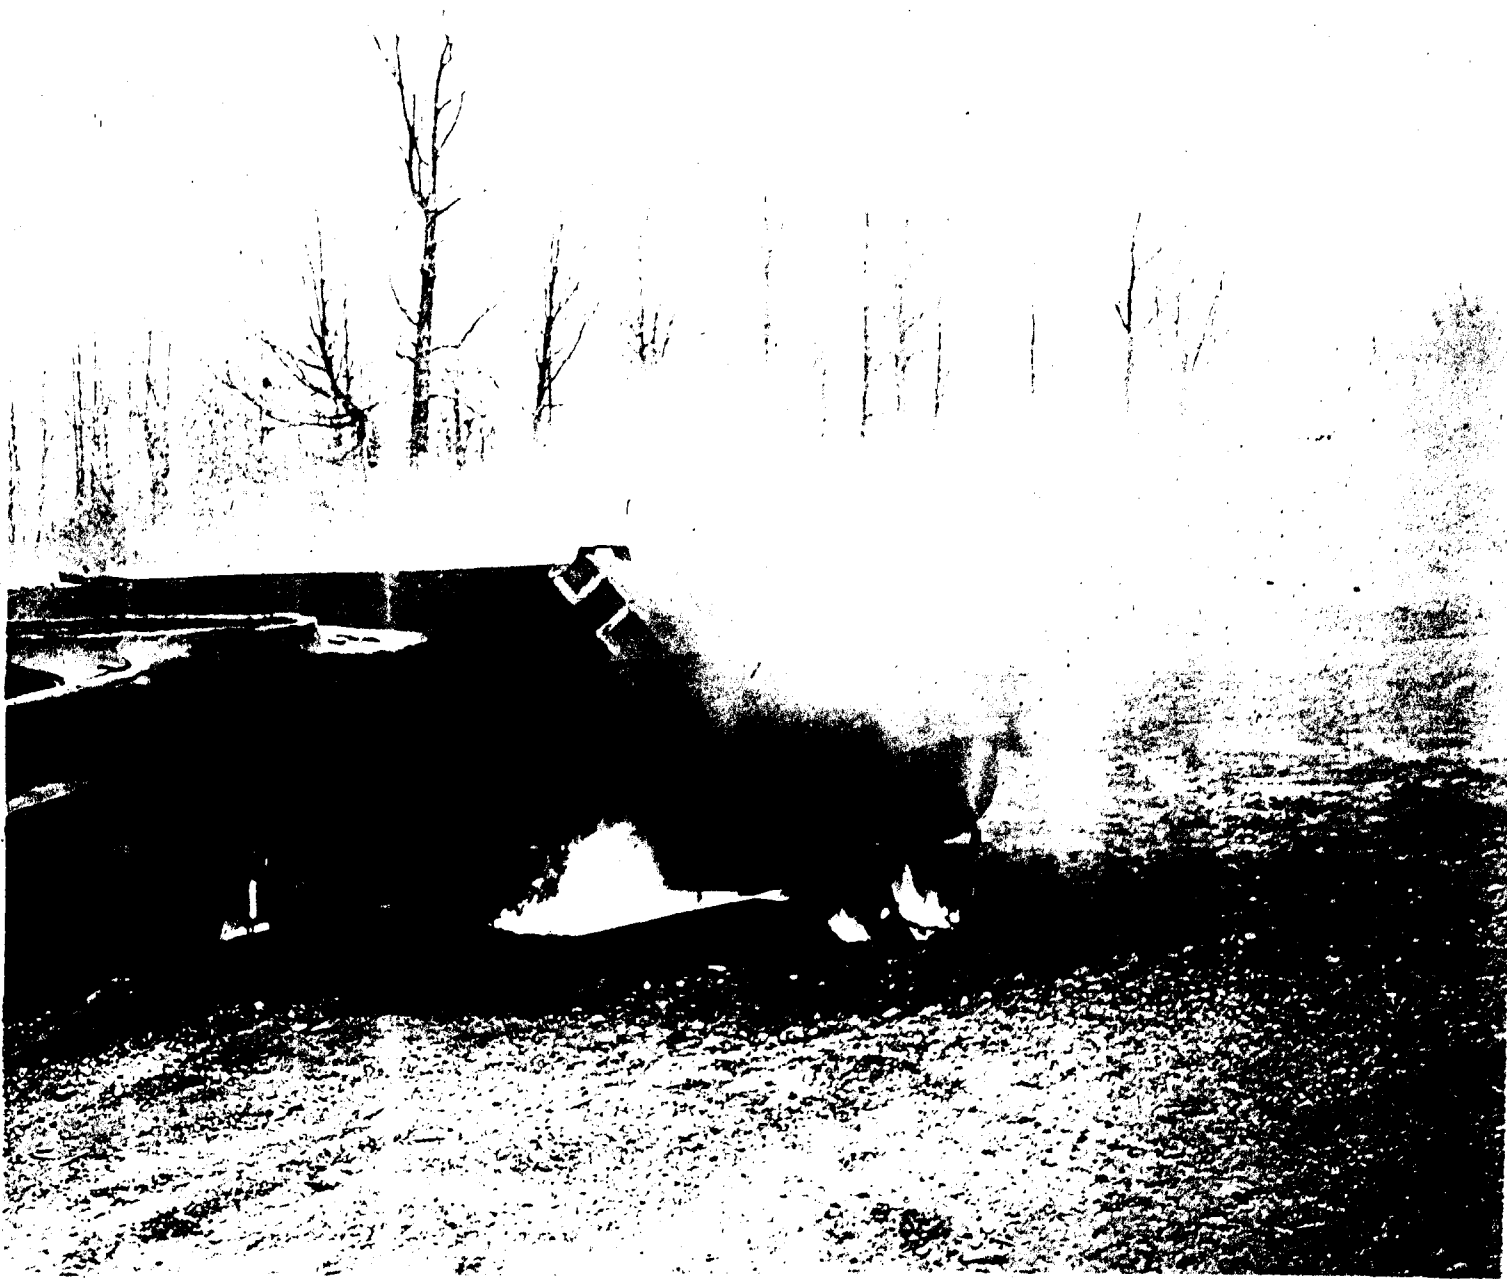

B5606 CONFIDENTIAL 8 ABERDEEN PROVING GROUND 8 10 January 1955

Project No. TB3-1224B. Vulnerability of Gasoline to 3.5" HEAT.
Picture shows fire in No. 3 tiger hull. Fire in and under hull.
Photograph was taken about 10 minutes after fire started.