

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER HDL-TM-84-8	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Pulsed-Power System Diagnostics: Electromagnetic Data Interpretation Along Pulse Lines		5. TYPE OF REPORT & PERIOD COVERED Technical Memorandum
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) George A. Huttlin		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Harry Diamond Laboratories 2800 Powder Mill Road Adelphi, MD 20783		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Program Ele: 62715H PRON: WJ4---42 OWJA9
11. CONTROLLING OFFICE NAME AND ADDRESS Defense Nuclear Agency Washington, DC 20305		12. REPORT DATE September 1984
		13. NUMBER OF PAGES 24
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES MIPR: 84-552 This work was sponsored by the Defense Nuclear Agency HDL Project: 201429 under DNA subtask G371MXGO, work unit 00002 "Aurora Operations."		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Transmission lines Pulsed power Voltage measurement Computer code Current measurement Network analysis		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The voltage and current at any position in a transmission-line pulser can be calculated from arbitrary voltage and current pulse shapes measured at one position in the pulse line. A simple closed-form method for doing this is discussed. This method is particularly amenable to a computer-driven transient-digitizer system. At the Harry Diamond Laboratories Aurora Facility this method is implemented in the PDP 11/60 program, VANDALS, and is used for the inter-comparison of sensors along the transmission path in the vacuum region of the pulser. For slowly varying pulses this method is seen to reduce to the addition of an inductive correction term to the measured voltage.		

DD FORM 1473 1 JAN 73 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

LIBRARY
RESEARCH REPORTS DIVISION
NAVAL POSTGRADUATE SCHOOL
MONTEREY, CALIFORNIA 93943

HDL-TM-84-8

September 1984

Pulsed-Power System Diagnostics: Electromagnetic Data Interpretation Along Pulse Lines

by George A. Huttlin



U.S. Army Electronics Research
and Development Command
Harry Diamond Laboratories
Adelphi, MD 20783-1197

This work was sponsored by the Defense Nuclear Agency
under DNA subtask G371MXGO, work unit 00002
"Aurora Operations."

Approved for public release; distribution unlimited.

CONTENTS

	<u>Page</u>
1. INTRODUCTION	5
2. ANALYSIS	5
3. RELATION TO OTHER DATA-CORRECTION FORMULAS	7
4. IMPLEMENTATION IN VANDALS PROGRAM AT AURORA	8
5. TEST OF THE TRANSLATION ALGORITHM	12
6. CONCLUDING REMARKS	12
APPENDIX A.--THE TRANSLATION CODING	13
DISTRIBUTION	19

FIGURES

1. Definition of the parameters	6
2. The Aurora sensor/load data-correlation circuit	9
3. Sample Aurora data	11
4. Sinusoidal test of code	12

1. INTRODUCTION

Two of the primary pieces of the diagnostic information in pulsed-power experiments are the voltage and the current provided by the pulser at the load. In many instances, particularly with voltages on vacuum devices, it is not possible to make measurements as close to the load as one would like. Often an inductive correction is used to relate the voltage sensed at one position to the actual voltage at the position of interest. However, such a correction is only an approximation with limited validity.

A better method to infer the voltage and current at some position from data measured at another position uses a transmission-line circuit and a transmission matrix approach. There are three requirements for the application of this method: first, the voltage and current must be sensed at a common position; second, the record of these data must include information before and after the time frame of interest by a time equal to the transit time from the sensors to the calculation position; and, third, the geometry connecting the calculation position with the data position must be characterized by a system of transmission lines.

One necessity for the practical implementation of this method is a computerized system for pulsed digitization and data processing. With the more widespread use of high-speed transient digitizers, this otherwise awkward (and therefore little-used) method is quite easy to implement.

2. ANALYSIS

For our purposes we consider that the region connecting the field sensors with the position of interest can be described by a sequence of lossless transmission lines each described by an impedance, Z_i , and a one-way transit time, T_i .

In each transmission line there can be a wave propagating to the right and to the left, and each wave has a frequency-independent speed. For the right-going wave of voltage, \vec{V} , the current at a given point in the line is given by \vec{V}/Z , while for the left-going wave, \overleftarrow{V} , the current is $-\overleftarrow{V}/Z$. Consequently, the total current, I , is given by $I = (\vec{V} - \overleftarrow{V})/Z$, whereas the total voltage is given by $V = \vec{V} + \overleftarrow{V}$. Combining the expressions, one can express the traveling waves in terms of I and V :

$$\vec{V} = \frac{1}{2}(V + ZI)$$

and (1)

$$\overleftarrow{V} = \frac{1}{2}(V - ZI) .$$

We assume we know as functions of time the voltage, V_i , and current, I_i , to the left of the i th transmission line (fig. 1). What we want to determine are the functions, V_{i+1} and I_{i+1} , which describe the voltage and current to the right of the transmission line.

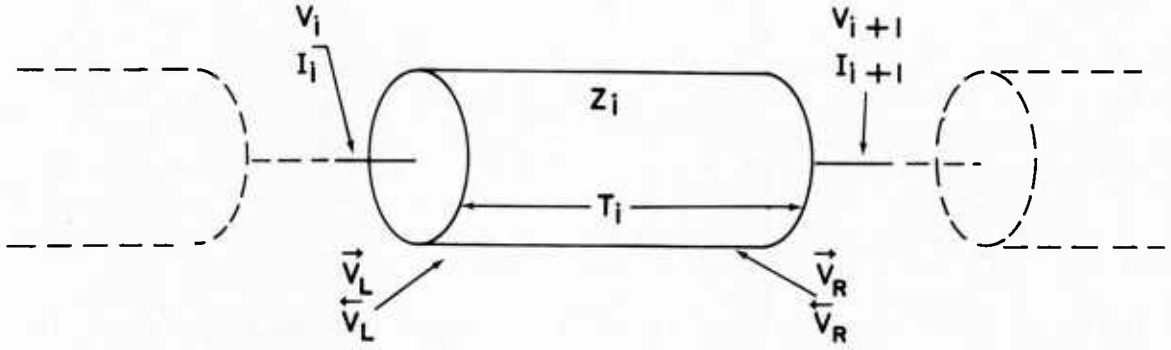


Figure 1. Definition of the parameters: V_i and I_i are the total voltage and current to the left of the i th transmission line; V_{i+1} and I_{i+1} are the total voltage and current to the right; \vec{V}_L and \overleftarrow{V}_L are, respectively, the right- and left-going voltage waves in the i th transmission line at its left end; and \vec{V}_R and \overleftarrow{V}_R are, respectively, the right- and left-going voltage waves in the same line at its right end.

At a given time, t , the voltage and current to the right of the transmission line are expressed by

$$V_{i+1}(t) = \vec{V}_R(t) + \overleftarrow{V}_R(t)$$

and

(2)

$$Z_i I_{i+1}(t) = \vec{V}_R(t) - \overleftarrow{V}_R(t) \quad ,$$

in which the subscript R identifies the traveling waves as they appear in the right end of the i th transmission line. These values, \vec{V}_R and \overleftarrow{V}_R , at time t are equal to the left-end values, \vec{V}_L and \overleftarrow{V}_L , at times offset by the transit time, T_i :

$$\begin{aligned} \vec{V}_R(t) &= \vec{V}_L(t - T_i) \quad , \\ \overleftarrow{V}_R(t) &= \overleftarrow{V}_L(t + T_i) \quad . \end{aligned} \quad (3)$$

Using equation (1), we can express the time-offset traveling voltages at the left side in terms of the total voltage and current measured there:

$$\vec{V}_L(t - T_i) = \frac{1}{2} V_i(t - T_i) + \frac{1}{2} Z_i I_i(t - T_i)$$

and

(4)

$$\overleftarrow{V}_L(t + T_i) = \frac{1}{2} V_i(t + T_i) - \frac{1}{2} Z_i I_i(t + T_i) \quad .$$

We now combine equations (4), (3), and (2) and obtain the expressions desired for $V_{i+1}(t)$ and $I_{i+1}(t)$ in terms of the known functions, V_i and I_i :

$$V_{i+1}(t) = \frac{1}{2} [V_i(t-T_i) + Z_i I_i(t-T_i) + V_i(t+T_i) - Z_i I_i(t+T_i)] , \quad (5a)$$

$$I_{i+1}(t) = \frac{1}{2} [V_i(t-T_i) + Z_i I_i(t-T_i) - V_i(t+T_i) + Z_i I_i(t+T_i)] / Z_i . \quad (5b)$$

Equations (5a) and (5b) embody the result of the transmission operation through one element of the circuit and are the equations used in the computer application of this method.

For geometries that can be described by a series of transmission lines of a variety of impedances, equations (5a) and (5b) can be used to step from one junction to the next until the voltage and current are derived for the position of interest. In carrying out this procedure neither V nor I nor the geometry need be specified to the left of the point at which V and I are measured or to the right of the position of interest. Consequently, derived data can be used directly to indicate the load characteristics.

According to equations (5a) and (5b), to derive V_{i+1} or I_{i+1} at a time, t , the given V_i and I_i must both be known at times $t + T_i$ and $t - T_i$. This requirement chains itself across a succession of transmission lines so that the derived data are less extensive than the measured data at each end of the trace by the sum of the individual T_i .

3. RELATION TO OTHER DATA-CORRECTION FORMULAS

The result contained in equations (5a) and (5b) should, with the proper assumptions, simplify giving the inductive correction term LI if certain simplifying assumptions can be made. To investigate what these assumptions might be, we write equation (5a), grouping together the voltage and current terms:

$$V_{i+1}(t) = \frac{1}{2} [V_i(t-T_i) + V_i(t+T_i)] - T_i Z_i [I_i(t+T_i) - I_i(t-T_i)] / (2T_i) . \quad (6)$$

The factor $T_i Z_i$ seen above is identically the inductance L_i of the i th transmission line. If the variation in time of V_i is approximately linear from $t - T_i$ to $t + T_i$, then $1/2 [V_i(t-T_i) + V_i(t+T_i)]$ approximates $V_i(t)$. Furthermore, if the same condition holds for I_i , then $[I_i(t+T_i) - I_i(t-T_i)] / (2T_i)$ approximates $\dot{I}_i(t)$. If both V_i and I_i are approximately linear over $t - T_i$ to $t + T_i$, we see that equation (6) reduces to

$$V_{i+1}(t) \approx V_i(t) - L_i \dot{I}_i(t) . \quad (7)$$

Consequently, if the assumption of linearity over a time, $2T_i$, can be made, the standard LI correction is valid using sensors of voltage and current at the same position.

Analogously, to the extent that V_i and I_i are linear from $t - T_i$ to $t + T_i$, equation (5b) reduces to

$$I_{i+1}(t) \approx I_i(t) - C_i \dot{V}_i(t) , \quad (8)$$

where C_i is the capacitance of the transmission line.

4. IMPLEMENTATION IN VANDALS PROGRAM AT AURORA

VANDALS is a program implemented on the Aurora¹ PDP 11/60 computer to process voltage and current data recorded with Tektronix 7912 transient digitizers and their associated software. Although VANDALS performs other tasks associated with digitized data-taking (e.g., baseline and sweep-speed adjustment; time alignment; integration of traces from capacitive voltage dividers and B-dot loops; and calculation of wave impedance, power, energy, and $IV^{*2.8}$), its main function is to implement the translation algorithm discussed above.

The relevant portion of the VANDALS subroutine that performs the translation appears in appendix A. The transmission-line circuit in VANDALS is a string of up to 30 transmission lines of arbitrary impedances, $Z(J)$, and transit times, $T(J)$. At Aurora this circuit (fig. 2) describes the region of the machine from the high-voltage end of the vacuum insulator stack to the field-emission load. The transit times of the circuit elements were chosen so that the various voltage and current monitors and the load are positioned at junctions in the circuit.

The voltage and current traces to be translated are contained in the arrays V1 and I1, each of which is dimensioned for 768 points. These data arrays are associated with any one (N) of the 31 positions between (or at the end of) transmission lines in the circuit. Things are set up so that position N is between lines N and N + 1. Position 30 is between line 30 and the non-existent line 31; position 0 is between line 1 and the nonexistent line 0. Each pass through the major DO loop (ends at statement 200) replaces the data in the arrays V1 and I1 with data appropriate to either position N + 1 or position N - 1. The formalism of the algorithm will permit translations in either direction in the circuit provided an adjustment is made in the sign of current terms in the statements corresponding to equations (5a) and (5b) above. This must be done because the definition of positive current implies a directionality in the circuit. The factor SIGN which takes the value +1 or -1, as appropriate, takes care of this.

As explained in the theory section above, to calculate a point for time t in a translation across a line, J , of length $T(J)$, data must exist in V1 and I1 corresponding to both $t + T(J)$ and $t - T(J)$. This means that, if in V1 and I1 the data cover the time span from t_1 to t_2 , the translated data (which are temporarily put in the scratch arrays V2 and I2) will cover the time span from

¹B. Bernstein and I. D. Smith, *Aurora, and Electron Accelerator*, IEEE Trans. Nucl. Sci., 20 (June 1973), 294.

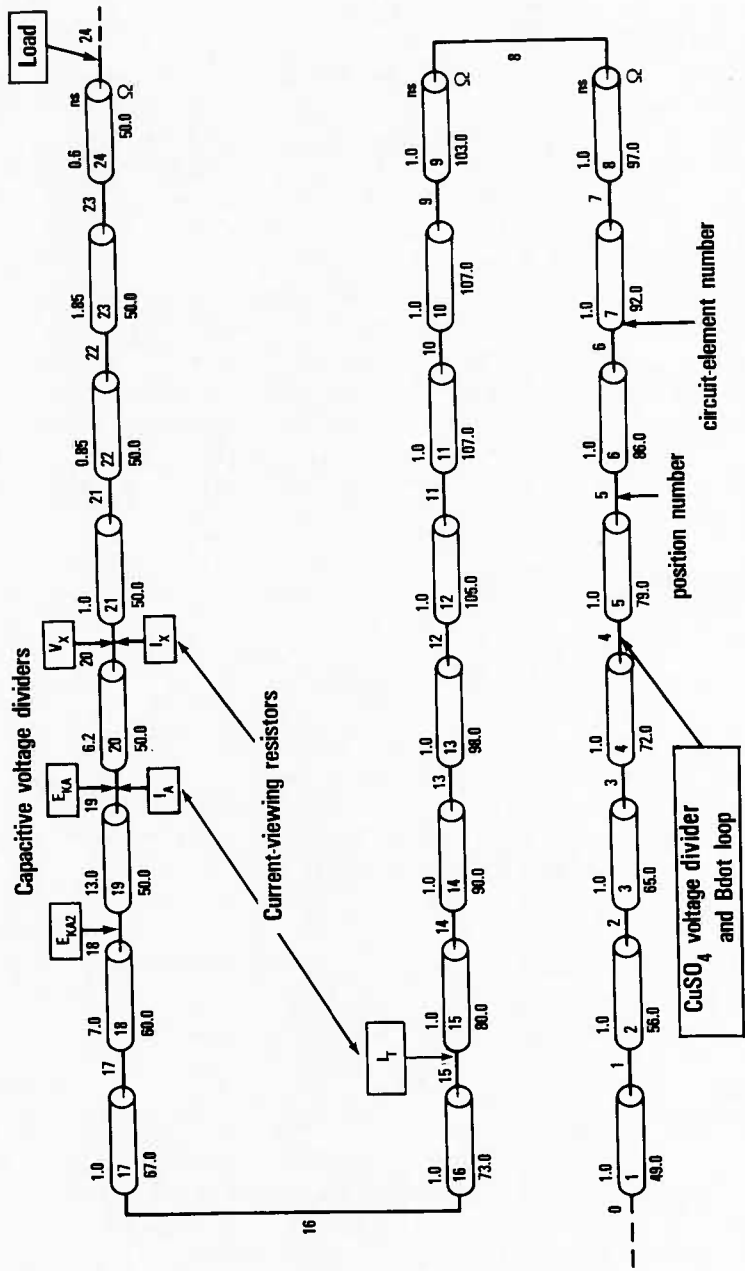


Figure 2. The Aurora sensor/load data-correlation circuit.

$t_1 + T(J)$ to $t_2 - T(J)$. Therefore, in successive translations the time span covered by the data will shrink. The program keeps track of this with the quantities $K1 = NMN$ and $K2 = NMX$, which are the respective numbers of the minimum and maximum bins of relevant data.

Since the program permits transit times of arbitrary values, an interpolation is done between points in $V1$ and $I1$ to get quantities $V1(t \pm T(J))$ and $I1(t \pm T(J))$ for use in the translation formulas. A graphical illustration of this interpolation procedure is commented into the listing (app A) in which all parameters of relevance are identified. For our purposes a linear interpolation has been found to be quite adequate; but, as a result of this interpolation, the data are smoothed in translation. This smoothing can be seen in the sample Aurora data of figure 3. Also shown in figure 3 is the shortening of the traces due to the algorithm. This shortening is at both ends, although one could reason that it need not be for times before the pulse, if we assume we know *a priori* what the current and voltage are before the time frame of the recorded data. As the original current trace can be seen here to end slightly before the voltage trace, in this example it is the extent of the original current data that governs the extent of data in subsequent calculations.

5. TEST OF THE TRANSLATION ALGORITHM



To test the coding of the basic translation algorithm, a simple sine-wave example is presented, with a very simple circuit.

Consider a $50\text{-}\Omega$ transmission line that is 100 ns long and is represented by a chain of twenty-five $50\text{-}\Omega$ transmission lines, each 4 ns long. At one end of this line some unspecified circuitry is attached. This circuitry results in a voltage of 50-V amplitude that is exactly in phase with the current of 1 A at this particular end of the transmission line. The voltage and current are sinusoids with a 250-ns period.



At the remote end we expect identical waveforms except that they are delayed by 100 ns. The load responsible for $V(t)$ and $I(t)$ must be a resistance of $50\ \Omega$ (or a further length of $50\text{-}\Omega$ cable terminated in $50\ \Omega$).

Figure 4(a) shows the given voltage and current. Figure 4(b) shows the voltage and current calculated for the other end of the 100-ns line. Note that, as expected, the traces are identical in shape to the given data but delayed by 100 ns. Also note that the traces are shorter by about 120 ns at each end. Theoretically, the data should be shortened by one transit time or 100 ns at each end. The extra 20 ns is due to a rounding effect: on each pass through one of the 25 transmission lines, the data are shortened by an integral number of data points. When the transit time is 4 ns and the 512 data points are 0.98 ns apart, 4.1 data points should be eliminated per transmission line at each end of the trace. To round 4.1 down to 4 data points would leave an irrelevant point at each end of each trace. Therefore, 5 data points are eliminated instead; $(5\text{ points}) \times (0.98\text{ ns/data point}) \times (25\text{ lines})$ accounts for 122 ns lost at each end of each trace. This effect has proven to be no problem with real data (fig. 3).



(a) sensor position

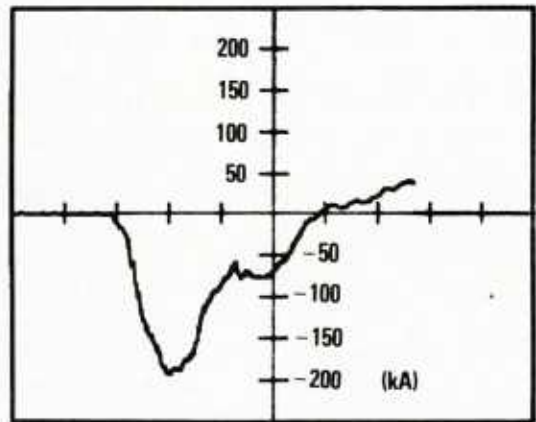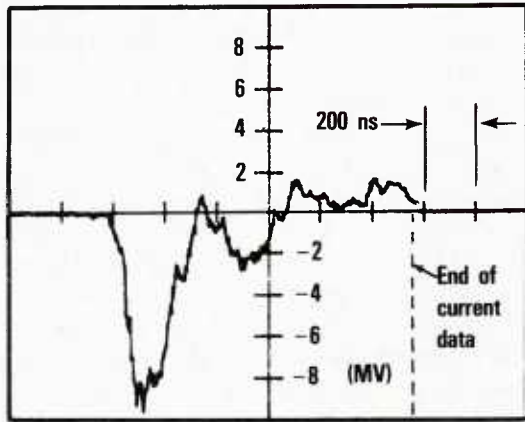

(b) load position

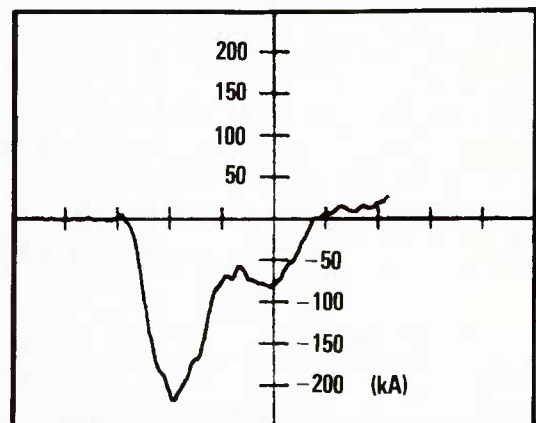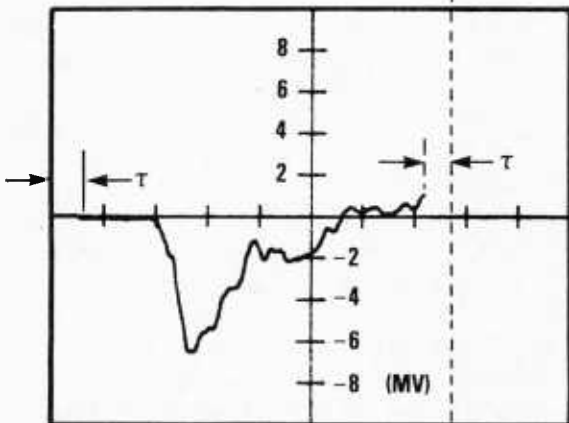

(c) sensor position

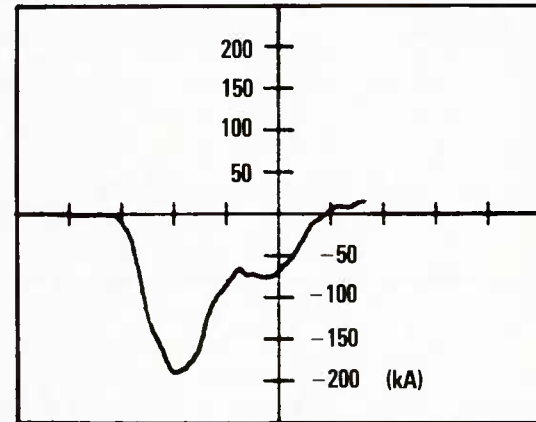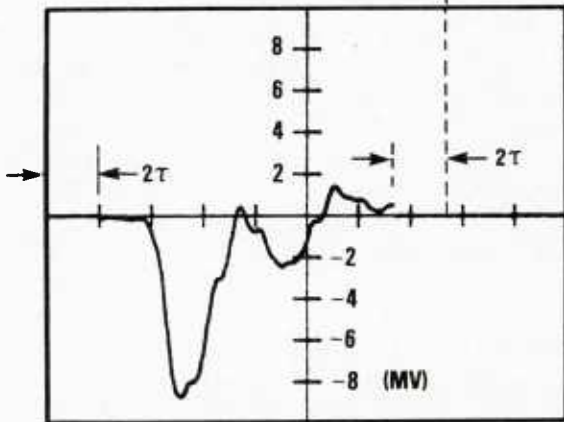

Voltage


Current

Figure 3. Sample Aurora data: (a) data provided by the sensors, (b) data calculated for the load position with the use of the data of 3(a), and (c) data calculated for the sensor position based on the calculated load-position data of 3(b). Ideally this would reproduce exactly the data in 3(a), but is smoothed due to interpolation.

6. CONCLUDING REMARKS

Legitimately, one can only make use of the equations (5a) and (5b) if V and I are known functions of time at some common position. However, if experience indicates that either V or I does not vary too much in position, one could rationalize applying this method to two traces from slightly different positions along a transmission line. The present method of analysis, which assumes that the two traces originate at the same position along a transmission line, results in a closed form (equations (5a) and (5b)) for translating the traces. One could envision converging infinite series replacements for equations (5a) and (5b) so that information for a third position could be unfolded rigorously from monitors at two different positions. An approach to this problem was taken by R. Richardson et al. of Maxwell Laboratories, Inc. in reference to work on their Blackjack 5 Machine.²

(a) original data

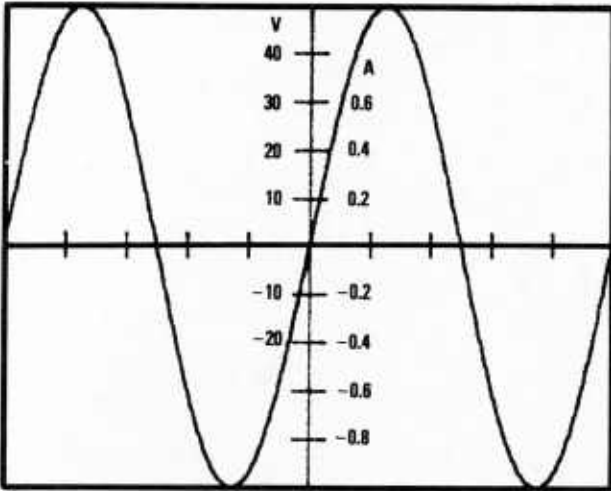

(b) after translation


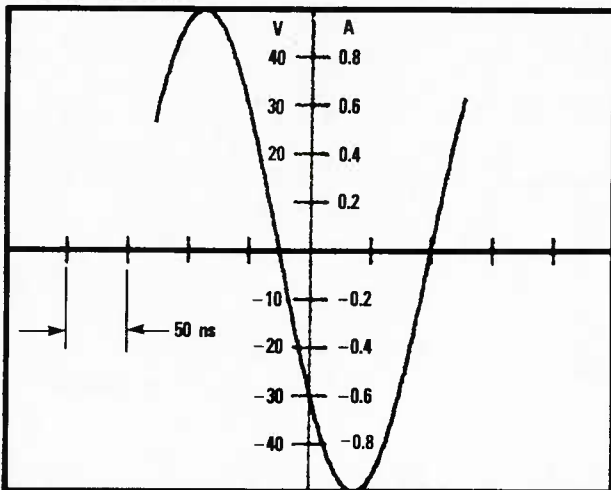


Figure 4. Sinusoidal test of code: (a) data simulated for "sensor" position and (b) data calculated (using VANDALS) 100 ns downstream of original data through twenty-five 4-ns transmission lines. The extra time missing at each end of the calculated data results from rounding up the fractional number of bins that should be removed from the data on each pass.

²R. Richardson, E. Chu, W. Clark, J. Shannon, and M. Wilkinson, Calibration of the Blackjack 5 Pulse Generator Output Power, National Bureau of Standards Special Publication 628, Measurement of Electrical Quantities in Pulse Power Systems, R. H. McKnight and R. E. Hebner, Jr., ed. (June 1982), 150.

APPENDIX A.--THE TRANSLATION CODING

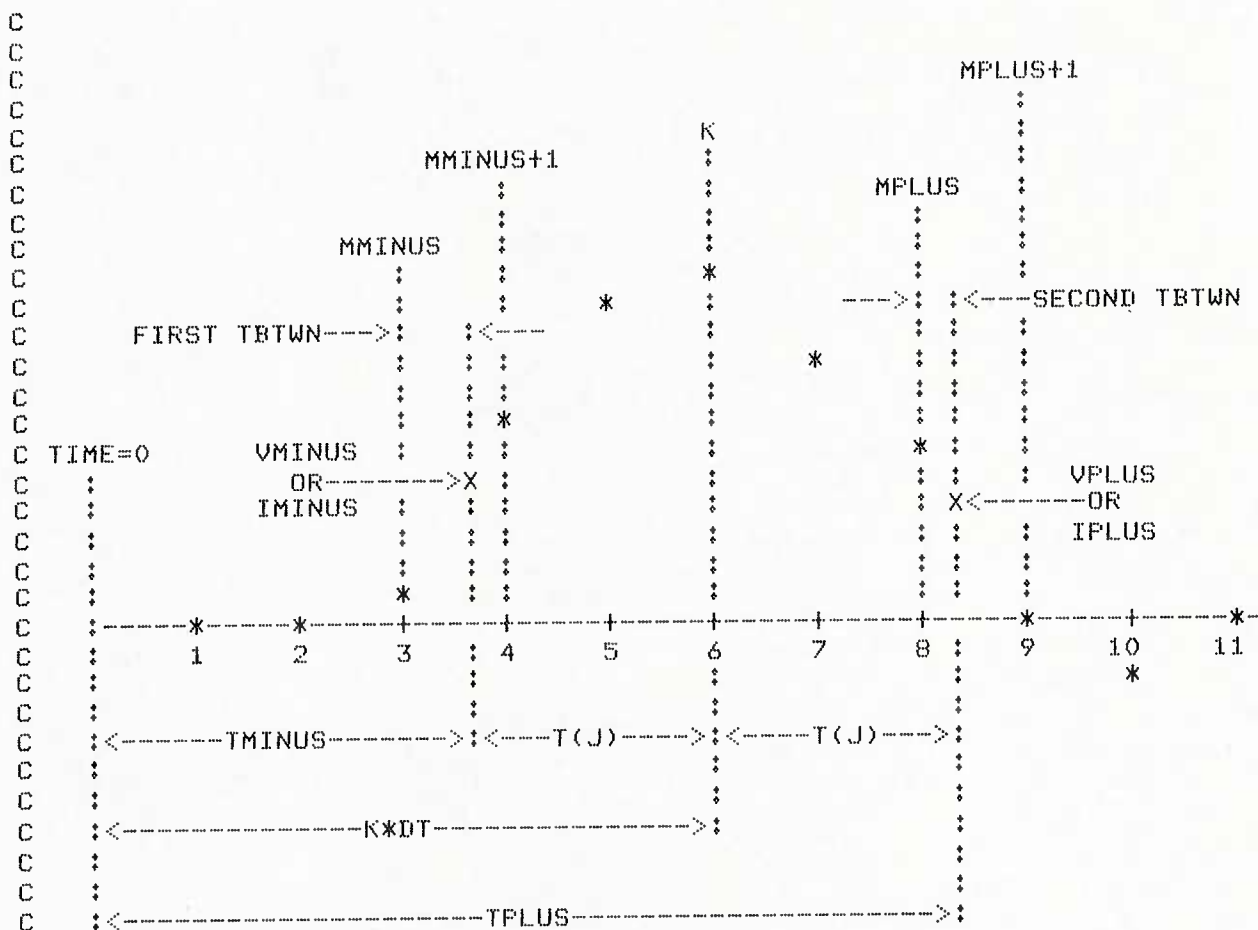

THE GRAPHIC EXAMPLE SHOWS EITHER A VOLTAGE OR CURRENT DATA ARRAY THAT IS TO CONTRIBUTE TO A DATA TRANSLATION. THE NUMBERS IDENTIFY THE BINS. EACH * IS A DATA POINT IN THAT ARRAY. THE SYMBOL X SHOWS THE LINEARLY INTERPOLATED VALUES USED IN THE ALGORITHM (STATEMENT 100 AND THE ONE JUST ABOVE IT) THAT ACCOMPLISHES THE TRANSLATION.

K1 AND K2 ARE THE RESPECTIVE SCRATCH EQUIVALENTS OF NMN AND NMX.

```
300 K1= NMN
    K2= NMX
```

THE SCRATCH ARRAYS V2 AND I2 ARE ZEROED.

```
DO 99 K= 1, 768
  V2(K)= 0.
  I2(K)= 0.
```

APPENDIX A

```

C
C POSITIVE CURRENT IS ASSUMED TO BE IN THE DIRECTION OF INCREASING
C VALUES FOR THE SUBSCRIPT J IN Z(J) AND T(J). SIGN IS A FACTOR + OR -1
C USED AS THE SIGN OF THE CURRENT TERMS IN THE TRANSLATION ALGORITHM.
C TO USE THE ALGORITHM FOR TRANSLATIONS IN THE DIRECTION OF INCREASING
C J, SIGN IS +1; TO USE THE ALGORITHM FOR TRANSLATIONS IN THE OTHER
C DIRECTION, SIGN IS -1.
C
      SIGN= 1.
      IF(N1 .GT. N2) SIGN= -1.
      IF (N1 .EQ. N2) GO TO 1000
      NUMBER= ABS(N2-N1)
C
C THE LOOP OVER CIRCUIT ELEMENTS BEGINS.
C
      DO 200 JJ=1, NUMBER
C
C J IS THE I.D. NUMBER OF THE ELEMENT BEING CALCULATED ACROSS.
C IMPLICIT HERE IS THAT TO THE RIGHT OF POSITION J IS ELEMENT J+1.
C
      J= JJ + N1
      IF(N1 .GT. N2) J=N1+1-JJ
C
C DT IS THE TIME PER BIN.
C THE IDENTIFIERS K1 AND K2 OF THE MINIMUM AND MAXIMUM BINS OF RELEVANT
C DATA ARE ADJUSTED BELOW. IF T1 (T2) IS THE TIME AT WHICH THE DATA
C BEGINS (ENDS) BEFORE TRANSLATION, T1+T (T2-T) IS THE TIME AT WHICH
C THE DATA BEGINS (ENDS) IN THE NEW TRANSLATED DATA ARRAY.
C
      K1= 1 + K1+T(J)/DT
      K2= K2-T(J)/DT
      IFLAG = 0
      IF (K2 .GT. K1) GO TO 10
      WRITE (5, 11)
11 FORMAT (' THE SPAN OF THE DATA IS TOO RESTRICTED FOR FURTHER',
1 ' TRANSLATION.')
      IFLAG = 1
      GO TO 1000
C
C K1 AND K2 ARE RESPECTIVELY THE LOWEST AND HIGHEST BINS OF RELEVANT
C DATA. THE LOOP OVER BINS IN THE CALCULATED DATA ARRAYS BEGINS HERE.
C
10 DO 100 K= K1,K2
      TMINUS= K*DT-T(J)
      MMINUS= TMINUS/DT
      TBTWN= TMINUS - MMINUS * DT
      VMINUS= V1(MMINUS)+TBTWN*(V1(MMINUS+1)-V1(MMINUS))/DT
      IMINUS= I1(MMINUS)+TBTWN*(I1(MMINUS+1)-I1(MMINUS))/DT
      TPLUS= K*DT+T(J)
      MPLUS= TPLUS/DT
      TBTWN= TPLUS-MPLUS*DT
      VPLUS= V1(MPLUS)+TBTWN*(V1(MPLUS+1)-V1(MPLUS))/DT
      IPLUS= I1(MPLUS)+TBTWN*(I1(MPLUS+1)-I1(MPLUS))/DT

```

```
C
C   THE NEXT TWO STATEMENTS DO THE ACTUAL TRANSLATION.
C
      V2(K)= .5*(VMINUS+SIGN*Z(J)*IMINUS+VPLUS-SIGN*Z(J)*IPLUS)
100 I2(K)= .5*(SIGN*VMINUS+Z(J)*IMINUS-SIGN*VPLUS+Z(J)*IPLUS)/Z(J)
C
C   THE TRANSLATED DATA IN THE SCRATCH ARRAYS ARE TRANSFERRED TO THE
C   ORIGINAL ARRAYS AND THE SCRATCH ARRAYS ARE ZEROED.
C
      DO 200 K=1, 768
        V1(K)=V2(K)
        V2(K)=0.
        I1(K)=I2(K)
200 I2(K)=0.
C
C   THE LOWEST AND HIGHEST RELEVANT DATA BINS (NMN AND NMX) ARE SHIFTED
C   SINCE DATA IS LOST AT EACH END OF THE TRACE BY AN AMOUNT CORRESPONDING
C   TO THE TRANSIT TIME OF THE TRANSLATION.
C
      NMX= K2
      NMN=K1
1000 RETURN
      END
```

DISTRIBUTION

ADMINISTRATOR
DEFENSE TECHNICAL INFORMATION CENTER
ATTN DTIC-DDA (12 COPIES)
CAMERON STATION, BUILDING 5
ALEXANDRIA, VA 22314

DIRECTOR
DEFENSE NUCLEAR AGENCY
ATTN DDST, M. ATKINS, DEP DIR
SCIENCE & TECHNOLOGY
ATTN TISI, SCIENTIFIC INFORMATION DIV
ATTN TITL, TECHNICAL LIBRARY DIV
(3 COPIES)
ATTN RAEE, EMP EFFECTS DIV
ATTN RAEV, CAPT T. SPONAUGLER
ATTN RAEV, J. FARBER
ATTN RAEV, M. FELLOWS
ATTN RAEV, H. SOO
WASHINGTON, DC 20305

CHAIRMAN
JOINT CHIEFS OF STAFF
ATTN J-3, ELECTRONIC WARFARE DIV
ATTN J-5, NUCLEAR DIV
WASHINGTON, DC 20301

DEFENSE ADVANCED RESEARCH PROJECTS AGENCY
ATTN R. L. GULLICKSON
1400 WILSON BLVD
ARLINGTON, VA 22209

DIRECTOR
DEFENSE COMMUNICATIONS ENGINEERING
CENTER
ATTN TECHNICAL LIBRARY
1860 WIEHLE AVE
RESTON, VA 22090

DIRECTOR
DEFENSE INTELLIGENCE AGENCY
ATTN DT-1, NUCLEAR & APPLIED
SCIENCES DIV
ATTN DT-2, WEAPONS & SYSTEMS DIV
ATTN DT-4, ELECTRONICS & COMMAND
& CONTROL DIV
WASHINGTON, DC 20301

COMMANDER
US ARMY ARMAMENT, MUNITIONS, &
CHEMICAL COMMAND
ATTN DRDAR-TDR, RESEARCH & TECHNOLOGY
DOVER, NJ 07801

ARDC, AMCCOM
ATTN GERALD R. FERRENTINO
ATTN HARRY L. MOORE, JR.
ATTN BRIAN NAGLE,
ATTN JOHN A. PAPPAS,
ATTN WARREN G. WILLIAMS, JR.

ARDC, AMCCOM (Cont'd)
ATTN DOUGLAS WITKOWSKI
ATTN ALEXANDER E. ZIELINSKI
PROP BR, ASD, LCWSL
DOVER, NJ 07801

COMMANDER/DIRECTOR
ATMOSPHERIC SCIENCES LABORATORY
US ARMY ERADCOM
ATTN DELAS-EO, ELECTRO-OPTICS DIV
WHITE SANDS MISSILE RANGE, NM 88002

DIRECTOR
APPLIED TECHNOLOGY LABORATORY
AVSCOM
ATTN DAVDL-ATL-TSD, TECH LIBRARY
FT EUSTIS, VA 23604

DIRECTOR
US ARMY BALLISTIC RESEARCH LABORATORY
ATTN DRDAR-BLB, ROBERT KREMENS
ATTN DRDAR-BLB, CLINTON HOLLANDSWORTH
ATTN DRDAR-TSB-S (STINFO)
ATTN KEITH JAMISON
ABERDEEN PROVING GROUND, MD 21005

COMMANDER/DIRECTOR
COMBAT SURVEILLANCE
& TARGET ACQUISITION LABORATORY
US ARMY ERADCOM
ATTN DELCS-R, DIR RADAR DIV
FT MONMOUTH, NJ 07703

COMMANDER
US ARMY COMPUTER SYSTEMS COMMAND
ATTN TECH LIB
FT BELVOIR, VA 22060

COMMANDER
US ARMY ELECTRONICS PROVING GROUND
FT HUACHUCA, AZ 85613

US ARMY ET/DL ERADCOM
ATTN DELET-PL EVANS AREA, JOSEPH TOMAINI
ATTN DELET-PL EVANS AREA, ROBERT YOUMANS
ATTN DELET-DD
ATTN DELET-B, STEPHEN LEVY
FT MONMOUTH, NJ 07703

COMMANDANT
US ARMY ENGINEER SCHOOL
ATTN LIBRARY
FT BELVOIR, VA 22060

COMMANDER
ERADCOM TECHNICAL SUPPORT ACTIVITY
ATTN DELSD-L
TECHNICAL LIBRARY DIRECTOR
FT MONMOUTH, NJ 07703

DISTRIBUTION (Cont'd)

DIRECTOR
US ARMY MATERIEL SYSTEMS ANALYSIS
ACTIVITY
ATTN DRXSY-MP
ABERDEEN PROVING GROUND, MD 21005

US ARMY MATERIAL TESTING INSTALLATION
ATTN STEAP-MT-R, DR. ABDUL HALIM KAZI
ABERDEEN PROVING GROUND, MD 20115

COMMANDER
US ARMY MISSILE & MUNITIONS CENTER
& SCHOOL
ATTN ATSK
ATTN ATSK-CTD-F
REDSTONE ARSENAL, AL 35809

COMMANDER
US ARMY MISSILE COMMAND
ATTN DRCPM-HEL, HIGH ENERGY LASER SYS
REDSTONE ARSENAL, AL 35809

DIRECTOR
US ARMY MISSILE LABORATORY
USAMICOM
ATTN DRSMI-RPT, TECHNICAL
INFORMATION DIV
ATTN DRSMI-RA, CHIEF, DARPA PROJECTS
OFFICE
ATTN DRSMI-RH, DIR, DIRECTED ENERGY
DIRECTORATE
REDSTONE ARSENAL, AL 35809

COMMANDER
US ARMY NATICK RES & DEV COMMAND
NATICK DEVELOPMENT CENTER
ATTN DRDNA-T, TECHNICAL LIBRARY
NATICK, MA 01760

COMMANDER
US ARMY RSCH & STD GP (EUR)
ATTN CHIEF, PHYSICS & MATH BRANCH
FPO NEW YORK 09510

US CHIEF ARMY RESEARCH OFFICE (DURHAM)
PO BOX 12211
ATTN DRXRO-EL, DIR ELECTRONICS DIV
ATTN DRXRO-MA, DIR MATHEMATICS DIV
ATTN DRXRO-PH, DIR PHYSICS DIV
ATTN DRXRO-EG, DIR ENGINEERING DIV
RESEARCH TRIANGLE PARK, NC 27709

US ARMY SATELLITE COMMUNICATIONS
AGENCY
CORADCOM
FT MONMOUTH, NJ 07703

COMMANDER
US ARMY SIGNAL CENTER
& FT GORDON
ATTN ATZHCE, DIR OF COMMUNICATIONS
& ELECTRONICS
FT GORDON, GA 30905

DIRECTOR
US ARMY SIGNALS WARFARE LABORATORY
VINT HILL FARMS STATION
ATTN DELSW-CE, COMMUNICATIONS/EW DIVISION
ATTN DELSW-EE, ELECTRONICS/EW DIVISION
ATTN DELSW-OS, OFFICE OF THE SCIENTIFIC
ADVISOR
WARRENTON, VA 22186-5000

COMMANDER
NAVAL AIR DEVELOPMENT CENTER
ATTN TECHNICAL LIBRARY
WARMINSTER, PA 18974

CHIEF OF NAVAL OPERATIONS
DEPT OF THE NAVY
ATTN DIR, COM & CONTR &
COMMUNICATIONS PROGRAMS
WASHINGTON, DC 20350

SUPERINTENDENT
NAVAL POSTGRADUATE SCHOOL
ATTN LIBRARY, CODE 2124
MONTEREY, CA 93940

CHIEF OF NAVAL RESEARCH
DEPT OF THE NAVY
ATTN ONR-420, PHYSICAL SCI DIV
ARLINGTON, VA 22217

OFFICE OF NAVAL RESEARCH
LONDON BRANCH OFFICE
BOX 39
ATTN DR. DAVID MOSHER
FPO NEW YORK, NY 09510

DIRECTOR
NAVAL RESEARCH LABORATORY
ATTN 2600, TECHNICAL INFO DIV
ATTN 4760, B. ROBSON
ATTN 4704, C. KAPETANAKOS
ATTN 4770, I. M. VITKOVITSKY
ATTN 4771, F. C. YOUNG
ATTN 4773, RON BOLLER
ATTN 4773, G. COOPERSTEIN (10 COPIES)
ATTN 4773, ROBERT MEGER
ATTN 4773, JOHN SHIPMAN
ATTN 4773, S. J. STEPHANAKIS
ATTN 6682, DR. NAGEL
ATTN 6682, R. NEGER
4555 OVERLOOK AVE, SW
WASHINGTON, DC 20375

DISTRIBUTION (Cont'd)

COMMANDER
NAVAL SURFACE WEAPONS CENTER
ATTN DX-21, LIBRARY DIV
ATTN F-12, EDWIN D. BALL
ATTN F-12, VICTOR H. GEHMAN
ATTN F-04, M. F. ROSE
ATTN DAVID FENNEMAN
ATTN R. J. GRIPSHOVER
DAHLGREN, VA 22448

COMMANDER
NAVAL SURFACE WEAPONS CENTER
ATTN E-43, TECHNICAL LIB
ATTN F-30, NUCLEAR EFFECTS DIV
ATTN F-34, EUGENE NOLTING
ATTN F-34, R. A. SMITH
ATTN F-34, VAN KENYON
ATTN F-34, F. J. SAZAMA
ATTN F-53, JOSEPH M. BUTNER
ATTN F-53, NICHOLAS PAPPAS
ATTN F-53, JESUS A. ROSARIO
ATTN F-55, EUGENE R. CARROLL
ATTN R-41, GARY A. GLASS
ATTN R-41, STANLEY H. STERN
WHITE OAK, MD 20910

COMMANDER
NAVAL TELECOMMUNICATIONS COMMAND HQ
ATTN TECHNICAL LIBRARY
4401 MASS AVE, NW
WASHINGTON, DC 20390

COMMANDER
NAVAL WEAPONS CENTER
ATTN 38, RESEARCH DEPT
ATTN 381, PHYSICS DIV
CHINA LAKE, CA 93555

AF AERO-PROPULSION LABORATORY
WRIGHT-PATTERSON AFB, OH 45433

COMMANDER
ARNOLD ENGINEERING DEVELOPMENT CENTER
ATTN DY, DIR TECHNOLOGY
ARNOLD AIR FORCE STATION, TN 37389

HQ, USAF/SAMI
WASHINGTON, DC 20330

DEPUTY CHIEF OF STAFF
RESEARCH & DEVELOPMENT
HEADQUARTERS, US AIR FORCE
ATTN AFRDQSM
WASHINGTON, DC 20330

SUPERINTENDENT
HQ, US AIR FORCE ACADEMY
ATTN TECH LIB
USAF ACADEMY, CO 80840

COMMANDER
AF ELECTRONIC SYSTEMS DIVISON
ATTN WO, DEP FOR CONTROL
& COMMUNICATIONS SYS
L. G. HANSCOM AFB, MA 01730

COMMANDER
HQ, ROME AIR DEVELOPMENT CENTER (AFSC)
ATTN LE, DEPUTY FOR ELECTRONIC TECH
ATTN LMT, TELECOMMUNICATIONS BR
GRIFFISS AFB, NY 13441

DIRECTOR
AF OFFICE OF SCIENTIFIC RESEARCH
BOLLING AFB
ATTN NE, DIR OF ELECTRONIC &
SOLID STATE SCI
WASHINGTON, DC 20332

AIR FORCE OFFICE OF SCIENTIFIC RESEARCH
PHYSICS DIRECTORATE
ATTN M. A. STROSCIO
BOLLING AFB, DC 20332

COMMANDER
HQ, AIR FORCE SYSTEMS COMMAND
ANDREWS AFB
ATTN TECHNICAL LIBRARY
WASHINGTON, DC 20334

HQ AFSC/INA
ATTN MAJOR DENNIS M. ZACK
ANDREWS AFB, DC 20334

AF WEAPONS LABORATORY, AFSC
ATTN LR, LASER DEV DIV
ATTN NTAP, 2ND LT BRUCE D. BRAY
ATTN NTYP, W. L. BAKER
KIRTLAND AFB, NM 87117

DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS
ATTN LIBRARY
ATTN HIGH VOLTAGE MEASUREMENTS
SECTION
ATTN ROBERT HEBNER
WASHINGTON, DC 20230

US DEPARTMENT OF ENERGY
DIVISION OF INERTIAL FUSION
ATTN S. L. KHALAS
ATTN R. L. SCHRIEVER
WASHINGTON, DC 20585

US DEPARTMENT OF ENERGY
OFFICE OF CLASSIFICATION
ATTN ROBERT T. DUFF
WASHINGTON, DC 20585

DISTRIBUTION (Cont'd)

US DEPARTMENT OF ENERGY
NEVADA OPERATIONS OFFICE
PO BOX 14100
ATTN REX PURCELL (2 COPIES)
LAS VEGAS, NV 89114

US DEPARTMENT OF ENERGY
PO BOX 62 (2 COPIES)
OAK RIDGE, TN 37830

ATOMIC WEAPONS RESEARCH ESTABLISHMENT
BUILDING H36
ATTN J. C. MARTIN
ALDERMASTON, READING RG 7 4PR
UNITED KINGDOM

ATOMIC ENERGY OF CANADA
ATTN DR. MARK DEJONG, ASSISTANT
RESEARCH OFFICER
CHALK RIVER NUCLEAR LABS
CHALK RIVER, ONTARIO
CANADA KOJ 1JO

AUSTIN RESEARCH ASSOCIATES
ATTN JOHN R. UGLAM
1901 RUTLAND DRIVE
AUSTIN, TX 78758

BDM CORP
ATTN TECHNICAL LIBRARY
7915 JONES BRANCH DRIVE
McLEAN, VA 22102

BOEING CO
PO BOX 3707
ATTN AEROSPACE LIBRARY
ATTN ANAHID YEREMIAN
ATTN JOHN ADAMSKI
SEATTLE, WA 98124

BROOKHAVEN NATIONAL LABORATORY
ATTN ROBERT LAMBIASE
BLDG 911A
UPTON, NY 11973

GENERAL ELECTRIC CO
PO BOX 527
ATTN ROBERT L. BERG
KING OF PRUSSIA, PA 19406

GENERAL ELECTRIC MEDICAL GROUP
PO BOX 414
ATTN DR. JOSHUA KOLAWOLE
MILWAUKEE, WI 53213

ION PHYSICS CORP
SOUTH BEDFORD ST
ATTN H. MILDE
BURLINGTON, MA 01803

JAYCOR, INC
ATTN J. GUILLORY
205 S WHITING STREET
ALEXANDRIA, VA 22304

KAMAN TEMPO
ATTN DASIAC
816 STATE STREET
PO DRAWER QQ
SANTA BARBARA, CA 93102

KMS FUSION, INC
ATTN ALEXANDER A. GLASS
3941 RESEARCH PARK DRIVE
PO BOX 1567
ANN ARBOR, MI 48106

LAWRENCE BERKELEY LABORATORY
ATTN D. KEEFE
BERKELEY, CA 94720

LAWRENCE LIVERMORE NATIONAL LABORATORY
ATTN M. DI CAPUA
ATTN DAVID TRIMBLE
PO BOX 808, L-526
LIVERMORE, CA 94550

LOS ALAMOS NATIONAL LABORATORY
ATTN M. GILLISPIE/THEO DIV
S. D. ROCKWOOD, ICF PROG MGR
DAD/IF M/S 527 (6 COPIES)
PO BOX 1663
LOS ALAMOS, NM 87545

MASSACHUSETTS INSTITUTE OF TECHNOLOGY
ATTN G. BEKEFI
CAMBRIDGE, MA 02139

MAXWELL LABORATORIES, INC
ATTN A. RICHARD MILLER
ATTN J. PEARLMAN
ATTN JOHN SHANNON
9244 BALBOA AVENUE
SAN DIEGO, CA 92123

MISSION RESEARCH CORP
ATTN C. LONGMIRE
735 STATE STREET
SANTA BARBARA, CA 93101

MISSION RESEARCH CORP
ATTN V. A. J. VAN LINT
5434 RUFFIN ROAD
SAN DIEGO, CA 92123

MISSION RESEARCH CORP
ATTN B. B. GODFREY
1720 RANDOLPH RD, SE
ALBUQUERQUE, NM 87106

DISTRIBUTION (Cont'd)

NATIONAL RESEARCH COUNCIL OF CANADA
DIV OF PHYSICS, BLDG M-36
ATTN RAYMOND PELLETIER
MONTREAL ROAD
OTTAWA, ONTARIO
CANADA K1A 0R6

ONTARIO HYDRO
RESEARCH DIVISION
ATTN MARIO NG
800 KIPLING AVENUE
TORONTO, ONTARIO
CANADA M5A 2Z8

PHYSICS INTERNATIONAL CO
ATTN M. DICAPUA
ATTN JUD HAMMON
ATTN GEORGE FRAZIER
ATTN A. J. TOEPFER
2700 MERCED STREET
SAN LEANDRO, CA 94577

PULSAR
ATTN B. BERNSTEIN
2949 WHIPPLE RD
UNION CITY, CA 94587

PULSE SCIENCES, INC
ATTN IAN SMITH
ATTN PHIL SPENCE
14796 WICKS BLVD
SAN LEANDRO, CA 94577

PULSE SCIENCES, INC
ATTN S. PUTNAM
1615 BROADWAY, SUITE 610
OAKLAND, CA 94612

R&D ASSOCIATES
SUITE 500
ATTN P. J. TURCHI
ARLINGTON, VA 22209

SACHS/FREEMAN ASSOCIATES, INC
ATTN MARK PRONKO
14300 GALLANT FOX LANE, SUITE 214
BOWIE, MD 20715

SANDIA NATIONAL LABORATORIES
PO BOX 5800
ATTN J. P. VAN DEVENDER
ATTN G. W. KUSWA/4240
ATTN G. ROHWEIN
ATTN DIV 5246
ALBUQUERQUE, NM 87185

SPIRE CORP
PO BOX D
ATTN R. LITTLE
BEDFORD, MA 01730

3M COMPANY
ATTN JOHN HUIZINGA, SPECIALIST
3M CITY, BLDG, 518-1
ST PAUL, MN 55144

AUBURN UNIVERSITY
OFFICE OF THE VICE PRESIDENT
FOR RESEARCH
ATTN DR. ANTHONY K. HYDER, JR.
AUBURN UNIVERSITY, AL 36849

UNIVERSITY OF CALIFORNIA
SCHOOL OF ENGINEERING
LOS ANGELES, CA 90024

CORNELL UNIVERSITY
LABORATORY OF PLASMA SCIENCE
ATTN J. A. NATION
ITHACA, NY 14850

DARTMOUTH COLLEGE
PHYSICS DEPARTMENT
ATTN J. E. WALSH
ATTN R. LEHMAN
HANOVER, NH 03755

UNIVERSITY OF MARYLAND
DEPT OF ELECT ENGINEERING
ENERGY RESEARCH BLDG
ATTN W. W. DESTLER
ATTN M. J. RHEE
ATTN VICTOR GRANATSTEIN
COLLEGE PARK, MD 20740

US MILITARY ACADEMY
DEPT OF PHYSICS
ATTN CAPT. LASCHE
WEST POINT, NY 10996

UNIV OF SOUTH CAROLINA
COLLEGE OF ENGINEERING
ATTN J. E. THOMPSON
ATTN T. S. SUDARSHAN
COLUMBIA, SC 29208

UNIVERSITY OF TEXAS AT ARLINGTON
DEPT OF ELECTRICAL ENGINEERING
ATTN DR. JAMES E. THOMPSON
ARLINGTON, TX 76019

UNIV OF TEXAS AT AUSTIN
CENTER FOR ELECTROMECHANICS
TAYLOR HALL 167
ATTN W. F. WELDON
AUSTIN, TX 78712

DISTRIBUTION (Cont'd)

TEXAS TECH UNIVERSITY
PO BOX 5404
NORTH COLLEGE STATION
ATTN M. KRISTIANSEN
LUBBOCK, TX 79417

COMMANDER WILLIAM TATE
7415 FOREST HUNT COURT
SPRINGFIELD, VA 22153

US ARMY ELECTRONICS RESEARCH
& DEVELOPMENT COMMAND
ATTN COMMANDER, DRDEL-CG
ATTN TECHNICAL DIRECTOR, DRDEL-CT
ATTN PUBLIC AFFAIRS OFFICE, DRDEL-IN

HARRY DIAMOND LABORATORIES
ATTN D/TSO/DIVISION DIRECTORS
ATTN RECORD COPY, 81200
ATTN HDL LIBRARY, 81100 (3 COPIES)
ATTN HDL LIBRARY, 81100 (WOODBIDGE)
ATTN TECHNICAL REPORTS BRANCH, 81300
ATTN LEGAL OFFICE, 97000
ATTN ZABLUDOWSKI, B., 47400 (GIDEP)
ATTN JOSEPH SILVERSTEIN, 13300
ATTN CHIEF, 21000
ATTN CHIEF, 21100
ATTN CHIEF, 21200
ATTN CHIEF, 21300
ATTN MICHAEL BUSHELL, 21300
ATTN GEORGE MERKEL, 21300
ATTN CHIEF, 21400
ATTN CHIEF, 21500
ATTN CHIEF, 22000
ATTN CHIEF, 22100
ATTN CHIEF, 22300
ATTN AIVARS LELIS, 22300
ATTN CHIEF 22800
ATTN JANIS KLEBERS, 22800
ATTN CHIEF, 22900
ATTN MARC LITZ, 22900 (3 COPIES)
ATTN ROBERT LAMB, 22900
ATTN DENIS WHITTAKER, 22900
ATTN KLAUS KERRIS, 22900
ATTN DAVID DAVIS, 22900
ATTN ALAN KEHS, 22900
ATTN ALAN BROMBORSKY, 22900
ATTN BRIAN RUTH, 22900
ATTN STEWART GRAYBILL, 22900
ATTN HOWARD BRANDT, 22900
ATTN JOSIP SOLN, 22900
ATTN CHIEF, 20240
ATTN CLIFFORD LANHAM, 00213
ATTN GEORGE HUTTLIN, 22900 (20 COPIES)

U214951

DEPARTMENT OF THE ARMY
Harry Diamond Laboratories
2800 Powder Mill Rd
Adelphi, MD 20783-1197

An Equal Opportunity Employer

FEDERAL
OCT 11 81
PENALTY FOR PRIVATE USE \$0.54
U.S. MAIL
M.D.

DEPARTMENT OF THE ARMY
HARRY DIAMOND LABORATORIES/81300
2800 POWDER MILL ROAD
ADELPHI, MD 20783-1197
OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE, \$ 300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD - 314

SUPERINTENDENT
NAVAL POSTGRADUATE SCHOOL
ATTN LIBRARY, CODE 2124
MONTEREY, CA 93940

0142

DA LABEL 18-1, 1 OCT. 74 RDD (AR 340-3)