


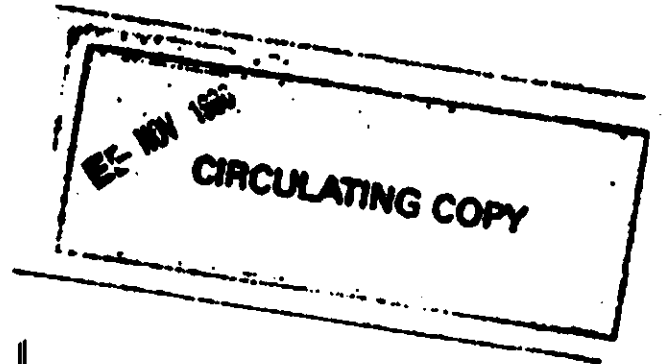

REPORT No. 986

JULY 1956

**Comparison Of
Fowler's Magnus Moment Coefficients
With Those Recently Obtained**

H. P. HITCHCOCK

**DEPARTMENT OF THE ARMY PROJECT No. 5B03-03-001
ORDNANCE RESEARCH AND DEVELOPMENT PROJECT No. TB3-0108**

BALLISTIC RESEARCH LABORATORIES



ABERDEEN PROVING GROUND, MARYLAND

Destroy when no longer
needed. DO NOT RETURN

BALLISTIC RESEARCH LABORATORIES

REPORT NO. 986

JULY 1956

COMPARISON OF FOWLER'S MAGNUS MOMENT COEFFICIENTS
WITH THOSE RECENTLY OBTAINED

H. P. HITCHCOCK

Department of the Army Project No. 5B03-03-001
Ordnance Research and Development Project No. TB3-0108

ABERDEEN PROVING GROUND, MARYLAND

BALLISTIC RESEARCH LABORATORIES

REPORT NO. 986

HPHitchcock/plg
Aberdeen Proving Ground, Md.
July 1956

COMPARISON OF FOWLER'S MAGNUS MOMENT COEFFICIENTS
WITH THOSE RECENTLY OBTAINED

ABSTRACT

Fowler, Gallop, Lock and Richmond found that most of the Magnus moment damping factors deduced from their yaw card firings made in 1919 were negative. Thinking these factors should be essentially positive, they ignored the Magnus moment damping factors completely, considering only the damping in pitch and that due to the crosswind force. Many recent experiments have shown that the Magnus moment coefficient derived from Fowler's^{*} data are of the same order of magnitude and sign as those derived from later tests.

* In the following, for the sake of brevity, the names of the other authors are frequently omitted.

This page Left Intentionally Blank

Fowler, Gallop, Lock and Richmond¹ deduced the damping of the yaw of 3-inch projectiles from the holes in cardboard screens. Specifically, the damping of the maximum and minimum yaw is related to the stability factor and the combinations $h + k$ and $h - k + 2\gamma$, where

h is the yawing moment damping factor,
 k the cross wind force damping factor,
 γ the Magnus moment damping factor.

These values are tabulated in Fowler's Table VII, page 383 (the rolling moment damping factor is negligible).

The cross wind force damping factor was also computed from the cross wind force coefficient, which was determined from the drag coefficient and the normal force coefficient obtained by firing shell with two different positions of the center of gravity. Hence, h and γ could be computed. Most of the resulting values of γ were negative. According to Fowler, "it is natural to expect γ to be small and positive, which does not fit in with the observations. Further experiments would be needed to throw light on all these points" (pp. 355 and 356). Consequently, h was computed on the assumption that $\gamma = 0$, and tabulated in Table VII.

Since 1920, many experiments have been conducted to determine the yawing motion of projectiles. They indicate that both positive and negative values of the Magnus moment occur; in fact, it is usually negative at supersonic velocities, but positive at subsonic velocities. A negative moment simply means that the center of the Magnus force is behind the center of gravity.

In order to compare the results of various tests, the Magnus moment coefficient has been tabulated (see Table I, II and III). The Magnus moment coefficient is computed by the relation

$$K_J = \gamma A / \rho d^4 v,$$

where

K_J is the Magnus moment coefficient (sometimes denoted K_T)
 A the axial moment of inertia,
 ρ the air density,
 d the caliber,
 v the velocity.

Table I gives the damping factors and Magnus moment coefficients based on Fowler's data, obtained from firings in January and February 1919. These pertain to a 3-inch shell with a standard blunt fuze or a long ogival plug. The following table gives the length of the fuze shell and the distance from the center of gravity to the base.

<u>Type</u>	<u>Head</u>	<u>Length</u>	<u>CG to Base</u>
		cal	cal
I	Std fuze	3.84	1.542
II	Std fuze	3.84	1.708
III	Std fuze	3.84	1.401
IV	Long plug	4.38	1.655

Table II gives the Magnus moment coefficients determined from yaw screen firings conducted from 1939 to 1946. The yaw screens consisted of photographic paper for the caliber .30, caliber 50 and 20-mm projectiles; thin cardboards for the 37-mm projectiles. In most cases, the yaw screen technique was unable to detect a minimum yaw different from 0. If the minimum yaw is 0,

$$h - K + 2\gamma = 0.$$

Then, since h is greater than K , γ is negative.

Table III gives the Magnus moment coefficient determined from firings in the spark ranges. Here, there was no interference with the motion of the projectile and the yaw could be measured more accurately than with yaw screens. At subsonic velocities, the coefficients are positive or 0 (for the 105-mm Shell M1, it is 0 when the maximum yaw is about 6° , but varies from 0.01 to 0.30 when the maximum yaw is less than 5.5°). At supersonic velocities, most of the coefficients are negative, except for the 75-mm Shell M334, which has a hemispherical base

Fowler does not give damping factors for shell fired at 900 feet per second, because the maximum yaw increased at this velocity.* At about 1090 feet per second, three of the four types of shell had positive Magnus moments. At supersonic velocities, all but one shell had negative Magnus moments. In general, the Magnus moment coefficients of the British shell have approximately the same magnitude and sign as the American shell.

I am grateful to Mr. C. L. Poor for suggesting this study.

H P. Hitchcock
H. P. HITCHCOCK

* Fowler had not apparently realized that, for shell of stability factor slightly greater than 1, the yaw might be negatively damped.

REFERENCES

1. Fowler, R. H., Gallop, E. G., Lock, C. N. H., and Richmond, H. W., The Aerodynamics of a Spinning Shell. Phil Trans. Royal Soc. London, A. 221: 295, 1920.
2. Hitchcock, H. P., Damping of Calibers .30 and .50 Bullets and 37-mm HE Shell. APG: BRL Report No. 357, Revised, October 1944.
3. Abbreviated Firing Tables for Gun, Machine, Trainer, Caliber .30 T9 Mounted in Aircraft in Horizontal Flight and Firing Caliber .30 Frangible T44 Projectile. APG: BRL FT O.30AC-U-2, 1945.
4. Hitchcock, H. P., Yaw and Drift of Caliber .50 Bullet, API, M8. APG: BRL Memorandum Report No. 256, 1943.
5. Hitchcock, H. P., Aerodynamics of Caliber .50 Incendiary Bullet M23. APG: BRL Memorandum Report No. 417, 1946.
6. Hitchcock, H. P., Aerodynamics of 20-mm Projectiles. APG: BRL Report No. 515, 1945.
7. Hitchcock, H. P., Yaw and Drift of 37-mm Armor-Piercing Shots. APG: BRL Report No. 438, 1943.
8. Boyer, E. D., Comparison of Aerodynamic Characteristics of 20-mm HEI T282E1 Shell with Fuze M505 and 20-mm HEI T282E1 Shell with Fuze T321. APG: BRL Technical Note No. 1055, 1955.
9. Roschke, E. J., The Drag and Stability Properties of the Hemispherical Base Shell, 75-mm, T50E2. APG: BRL Memorandum Report No. 927, 1955.
10. Roecker, E. T., The Aerodynamic Properties of the 105-mm HE Shell M1 in Subsonic and Transonic Flight. APG: BRL Memorandum Report No. 929, 1955.
11. Karpov, B. G., Skegas, K., and Hull, B., Aerodynamic Characteristics of the 175-mm T203 Shell and the 175-mm Square Base Shell with Fuze M51A5. APG: BRL Memorandum Report No. 956, 1955.
12. Schmidt, L. E., Aerodynamic Properties of 4.9-calibers Long, Square Based Shell at Transonic Speeds. APG: BRL Memorandum Report No. 824, 1954.
13. Schmidt, L. E., The Dynamic Properties of Pure Cones and Cone Cylinders. APG: BRL Memorandum Report No. 759, 1954.

TABLE I

MAGNUS MOMENT COEFFICIENTS

Based on Data in Fowler, Gallop, Lock and Richmond's

"The Aerodynamics of a Spinning Shell"

Shell forms are shown in figure 6, p. 309.

Shell Types are explained in Table III, p. 316.

Mean velocities are given in Table VI, p. 381.

Air densities are given in Table V, pp. 371 to 380.

The values of h and γ were calculated from the tabulated values of κ , $h + \kappa$, and $h - \kappa + 2\gamma$ in Table VII, p. 383.

Shell		Mean Velocity fps	Damping Factors (sec^{-1})			Magnus Moment Coefficient K_J
Type	Rounds		Cross Wind Force κ	Yawing Moment h	Magnus Moment γ	
I	22-24	1090	0.4	1.5	+0.25	+.09
	25,26	1283	0.3	2.1	-0.3	-.09
	27,28	1515	0.4	2.6	-0.85	-.23
	1-4	2114	0.7	1.5	-0.1	-.02
	19-21	2251	0.8	1.4	-0.4	-.07
II	17-19	1091	0.4	1.8	-0.1	-.04
	24	1259	0.2	0.7	+0.05	+.02
	5-7	1553	0.4	3.0	-1.1	-.31
	22,23	1546	0.4	2.9	-0.95	-.26
	1-4	1984	0.6	2.4	-0.6	-.13
III	17-19	1091	0.4	0.3	+0.1	+.04
	20,21	1262	0.2	2.9	-0.95	-.32
	22,23	1526	0.4	2.6	-0.95	-.26
	1-4	1994	0.6	3.6	-0.65	-.14
IV	13-15	1060	0.5	0.2	+0.85	+.33
	16-18	1502	0.5	2.6	-0.45	-.12
	24-26	2071	0.7	4.3	-1.35	-.27

TABLE II
MAGNUS MOMENT COEFFICIENTS
DETERMINED FROM YAW SCREEN FIRINGS

Projectile	Fuze	Reference	Length cal	Velocity fps	K _J
Cal .30 Bullet, Ball M1		2	4.44	2656	-.15
Cal .30 Bullet, Ball M2		2	3.75	2770	-.09
Cal .30 Bullet, Tracer M1		2	4.75	2734	-.22
Cal .30 Bullet, Frangible M22		3	3.75	1370	-.06
Cal .50 Bullet, Ball M1		2	4.77	2540	-.23
Cal .50 Bullet, AP M2		2	4.58	2655	-.10
Cal .50 Bullet, API M8		4	4.58	2830	-.14
Cal .50 Bullet, Inc M23		5	4.48	3460	-.04
20-mm Proj, Ball T4	None	6	4.12	2483	-.10
20-mm Proj, Ball T4	Tracer	6	4.12	2483	+.02
20-mm Shell, HEI Mk1	Percussion	6	4.09	2830	-.12
20-mm Shell, HE T23	PD M75	6	4.09	2800	-.005
37-mm Shot, APC M59	Tracer	7	3.14	3000	-.12
37-mm Shot, AP M80	Tracer	7	2.89	3100	-.26
37-mm Shell, HE M54	PD M56	2	4.02	2000	-.19

TABLE III
MAGNUS MOMENT COEFFICIENTS
DETERMINED BY SPARK PHOTOGRAPHY

Projectile	Fuze	Reference	Length cal	Mach No.	K _J
20-mm Shell, HEI T282E1	PD M505	8	3.82	0.50	+.10
				0.69	+.35
				1.00	+.10
				1.40	-.04
				2.00	-.05
				3.00	-.06
20-mm Shell, HEI T282E1	Time T 321	8	3.80	0.79	+.43
				1.43	-.005
				1.98	-.05
				3.04	-.06
75-mm Shell, HE M334 (T50E2)	VT T73E7B or T73E12	9 (curve 2)	4.93	0.91	+.30
				1.00	+.61
				1.07	+.62
				1.29	+.20
				1.71	+.10
105-mm Shell, HE M1	PD M51A5 or Dummy M73	10	4.70	0.50	.00
				0.80	.00
				0.95	-.22
				1.20	-.06
90-mm Model of 175-mm Shell, HE T203 (8° Boattail) T203 (Sq. Base) 105-mm Model Type B	PD M51A5	11	5.51	{ 1.0 to 2.6 }	-.09
		11	5.53		-.06
		12	4.935	0.73	+.15
				0.93	+.15
				1.05	.00
Cal .60 Cone		13	2.98	1.71	-.05
				2.45	-.03
				3.27	-.01
20-mm Cone-cylinder Type 11 CG to Base 2.05 Cal Type 21 CG to Base 1.65 Cal Type 25 CG to Base 1.65 Cal Type 22 CG to Base 1.71 Cal Type 23 CG to Base 1.72 Cal Type 31 CG to Base 1.20 Cal		13	5.12	0.87	+.11
				1.48	-.13
				0.81	+.24
				1.44	-.10
				1.83	-.03
				2.01	-.04
				2.71	+.01
				3.43	-.10
				3.47	-.08
				0.91	+.12
				1.28	-.08

This page Left Intentionally Blank

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
	Chief of Ordnance Department of the Army Washington 25, D. C. Attn: ORDTB - Bal Sec ORDTA ORDTS ORDTX-AR ORDTU	3	Director National Advisory Committee for Aeronautics 1512 H Street, N. W. Washington 25, D. C. Attn: Division Research Information
10	British Joint Services Mission 1800 K Street, N. W. Washington 6, D. C. Attn: Mr. John Izzard, Reports Officer	2	Director National Advisory Committee For Aeronautics Ames Laboratory Moffett Field, California Attn: Dr. A. C. Charters Mr. H. J. Allen
4	Canadian Army Staff 2450 Massachusetts Avenue Washington 8, D. C.	1	Chief of Staff U. S. Air Force The Pentagon Washington 25, D. C. Attn: DCS/D, AFDRD-AC-3
3	Chief, Bureau of Ordnance Department of the Navy Washington 25, D. C. Attn: ReO	1	Commanding Officer and Director David W. Taylor Model Basin Washington 7, D. C. Attn: Aerodynamics Laboratory
3	Commander Naval Ordnance Laboratory White Oak Silver Spring, Maryland	1	Chief, Armed Forces Special Weapons Proj ct P. O. Box 2610 Washington 25, D. C.
3	Commander Naval Ordnance Test Station China Lake, California Attn: Technical Library	5	Director Armed Services Technical Information Agency Documents Service Center Knott Building Dayton 2, Ohio Attn: DSC - SD
1	Superintendent Naval Postgraduate School Monterey, California		
1	Commander Naval Air Development Center Johnsville, Pennsylvania		
1	Commander Naval Air Missile Test Center Point Mugu, California	2	U. S. Atomic Energy Commission Sandia Corporation P. O. Box 5400 Albuquerque, New Mexico Attn: Mrs. Wynne K. Cox

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
1	Commanding General Redstone Arsenal Huntsville, Alabama	1	Firestone Tire and Rubber Co. Defense Research Division Akron, Ohio Attn: Dr. P. J. Gingo
3	Commanding General Picatinny Arsenal Dover, New Jersey Attn: Samuel Feltman Ammunition Labs.	1	Massachusetts Institute of Technology Department of Aeronautical Engineering Cambridge 39, Massachusetts Attn: Professor C. S. Draper
1	Commanding General Frankford Arsenal Philadelphia 37, Pennsylvania	1	Massachusetts Institute of Technology Department of Electrical Engineering Cambridge 39, Massachusetts Attn: Dr. Z. Kopal
1	Commanding Officer Camp Dietrick Frederick, Maryland	2	Massachusetts Institute of Technology Cambridge 39, Massachusetts Attn: Guided Missiles Library Room 22-001
1	Professor of Ordnance U. S. Military Academy West Point, New York	2	North American Aviation, Inc. 12214 Lakewood Boulevard Downey, California Attn: Aerophysics Library
1	Case Institute of Technology Department of Mechanical Engineering Cleveland, Ohio Attn: Professor G. Kuerti	1	Northrop Aircraft, Inc. Hawthorne, California
2	Applied Physics Laboratory Johns Hopkins University Silver Spring, Maryland	1	North Carolina State College Raleigh, North Carolina Attn: Professor J. W. Cell
2	Armour Research Foundation Illinois Institute of Technology Technology Center Chicago 16, Illinois Attn: Mr. W. Casler Dr. A. Wundheiler	1	Professor E. J. McShane Department of Mathematics University of Virginia Charlottesville, Virginia
1	Case Institute of Technology University Circle Cleveland, Ohio Attn: Dr. R. E. Bolz		

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
1	Professor J. W. Beams Chairman, Department of Physics University of Virginia Charlottesville, Virginia	1	Office, Asst. Secretary of Defense (R&D) Committee on Ordnance Washington 25, D. C.
1	Dr. J. L. Kelley Department of Mathematics University of California Berkeley, California		
1	Professor George F. Carrier Division of Applied Science Harvard University Cambridge 38, Massachusetts		
1	Professor Francis H. Clauser Department of Aeronautics Johns Hopkins University Baltimore 18, Maryland		
1	Professor F. W. Loomis Head, Department of Physics University of Illinois Urbana, Illinois		
1	Professor Clark B. Millikan Guggenheim Aeronautical Laboratory California Institute of Technology Pasadena 4, California		
1	Dr. Allen E. Puckett Hughes Aircraft Company Culver City, California		
1	Prof. N. F. Ramsey, Jr. Department of Physics Harvard University Cambridge 38, Massachusetts		
1	Dr. L. H. Thomas Watson Scientific Computing Laboratory 612 West 116th Street New York 27, New York		
1	Colonel H. U. Wagner 1822 Wyoming Avenue Washington 9, D. C.		