


AD-A249 793

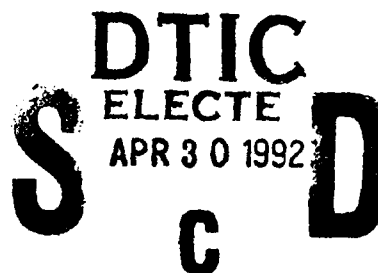

FINAL TECHNICAL REPORT

Research Agreement No. DAAL03-90-G-0232

Research Conducted by

Robert E. McIntosh, Principal Investigator

Department of Electrical and Computer Engineering

University of Massachusetts

for the

U.S. Army Research Office

Research Triangle Park, NC

November 1991

DISTRIBUTION STATEMENT A

Approved for public release;
Distribution Unlimited

92 4 27 562

DEFENSE TECHNICAL INFORMATION CENTER



9211327

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE November 1991	3. REPORT TYPE AND DATES COVERED Final Report		
4. TITLE AND SUBTITLE "Modification of 95 GHz Radar Source Module For Low Phase Noise Operation"		5. FUNDING NUMBERS DAAL03-90-G-0232		
6. AUTHOR(S) Robert E. McIntosh				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) ECE Department University of Massachusetts Amherst, MA 01003		8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Research Office 4300 S. Miami Blvd Research Triangle Park, NC 27709-2211		10. SPONSORING/MONITORING AGENCY REPORT NUMBER ARD 28584.1-GS-ED		
11. SUPPLEMENTARY NOTES The view, opinions and/or findings contained in this report are those of the author(s) and should not be construed as an official Dept. of the Army position, policy, or decision, unless so designated by other documentation.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited.		12b. DISTRIBUTION CODE		
13. ABSTRACT (Maximum 200 words) This report describes the results of a modification to the University of Massachusetts's 95 GHz polarimetric radar. This modification was done to reduce problems caused by phase noise originating from the radar's millimeter-wave oscillator				
14. SUBJECT TERMS Phase Noise Polarimeter Millimeter-wave Scattering matrix			15. NUMBER OF PAGES 9	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT UL	

1. Forward

The Microwave Remote Sensing Laboratory at the University of Massachusetts has developed a 95 GHz coherent polarimeter. This instrument measures a target's polarimetric scattering matrix. Such a measurement is susceptible to corruption from phase noise originating from the radar's millimeter-wave source. This report describes the effects of this problem, and also the steps taken to correct it.

Accession For

NTIS ORDAI ☒

DTIC TAB ☐

Unannounced ☐

Justification

By

Distribution/

Availability Codes

Avail and/or

Dist Special

A-1

Table of Contents

1. Forward	1
2. List of Appendices	2
3. Body of Report	2
A. Statement of Problem	2
B. Results	6
C. List of Publications/Theses	7
D. Participating Personnel	7
4. Bibliography	7
5. Appendices	7

2. List of Appendices

Not Applicable

3. Body of Report

A. Statement of Problem

Phase (or FM) noise is a short term phase variation of a signal. It can be modeled using a randomly varying vector on the tip of a carrier's phasor (Figure 1). One effect of this vector is to change the phase of the resultant sum vector. Rotation of the noise vector during the delay time between pulse transmission and reception adds a phase error to the measurement of the scattered field.

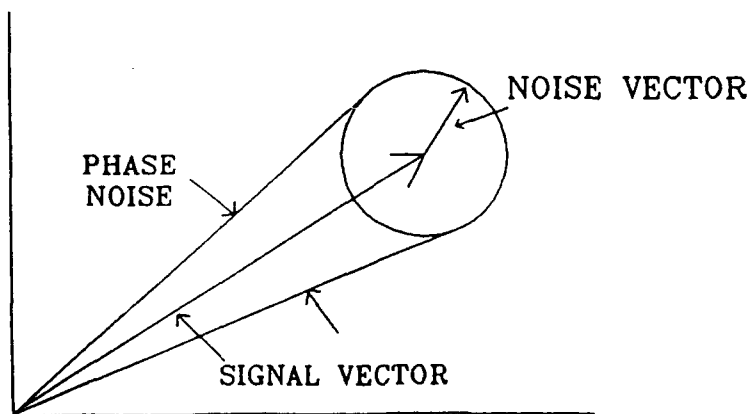


Figure 1
Vector model of phase noise

For a given range or time delay, higher levels of noise power far away from the carrier cause more phase noise than similar levels close to the carrier. This is because frequencies farther removed from the carrier allow for a faster rotation of the noise vector in Figure 1. Quantitatively, this relationship can be analyzed by modeling phase noise as FM sideband signals about a carrier frequency [Goldman, 1989]. The ratio of sideband power to carrier power of a FM signal is

$$\frac{P_{SB}}{P_{CAR}} \cong [J_1(\eta)]^2 \quad (1)$$

where

$$\begin{aligned} P_{SB} &\triangleq \text{sideband power} \\ P_{CAR} &\triangleq \text{carrier power} \\ J_1 &\triangleq \text{Bessel function of order 1} \\ \eta = \frac{f_d}{f_m} &\triangleq \text{modulation index} \\ f_d &\triangleq \text{frequency deviation from carrier} \\ f_m &\triangleq \text{frequency of modulation} \end{aligned}$$

By using a Taylor expansion for the Bessel function, (1) can be rewritten:

$$\frac{P_{SB}}{P_{CAR}} = \frac{\eta^2}{4} \quad (2a)$$

In logarithmic notation, this can be written

$$\mathcal{L} = 10 \log(\eta^2) - 6dB \quad (2b)$$

where $\mathcal{L}$ is the single sideband phase noise in a 1 Hz bandwidth in decibels below the carrier power (dBc/Hz).

The effect of a time delay upon the phase noise spectrum is also important. Analysis is accomplished with the use of a *delay function*, $K^2(f_m, \tau)$, which effectively modifies the

modulation index [1]:

$$\eta_{eff} = \eta \sqrt{K^2(f_m, \tau)} \quad (3)$$

where

$$K^2(f_m, \tau) = 2[1 - \cos(2\pi f_m \tau)]$$

$$\tau \triangleq \text{time delay, and}$$

$$f_m \triangleq \text{offset from carrier.}$$

The phase noise resulting from mixing a signal with a delayed version of itself can then be written as

$$\mathcal{L}_\tau = 10 \log \left[\frac{\eta^2}{4} K^2(f_m, \tau) \right] \quad (\text{dBc/Hz}) \quad (4)$$

The RMS phase noise is obtained by integrating this function from the carrier frequency, f_c , to the edge of the receiver's bandwidth, f_{BW} :

$$\phi_{RMS} = \int_{f_c}^{f_{BW}} \mathcal{L}_T(f_m, \tau) df_m \quad (5)$$

Phase noise affects some important measurements in the 95 GHz polarimeter. The scattering matrix, $[S]$, is measured with two transmit pulses with this radar. Reciprocity demands that the off-diagonal terms of $[S]$, S_{VH} and S_{HV} , be equivalent. However, phase noise of the measurements of S_{VH} and S_{HV} can corrupt this. Doppler measurements are also affected, since phase errors are interpreted as erratic movement of the target.

The most significant source of phase noise in the system is the millimeter-wave local oscillator. This consists of a Gunn diode oscillator that is locked to a stable 120 MHz reference oscillator by a phase locked loop, as shown in Figure 2. The bias voltage is applied to the Gunn oscillator by the lock box, which forces the oscillator to remain locked to a harmonic of the reference signal.

A plot of measured phase noise versus range for a stable corner reflector is shown in Figure 3. An RMS phase error of 6° at 200 meters is unacceptable for the type of measurements that this radar has to perform.

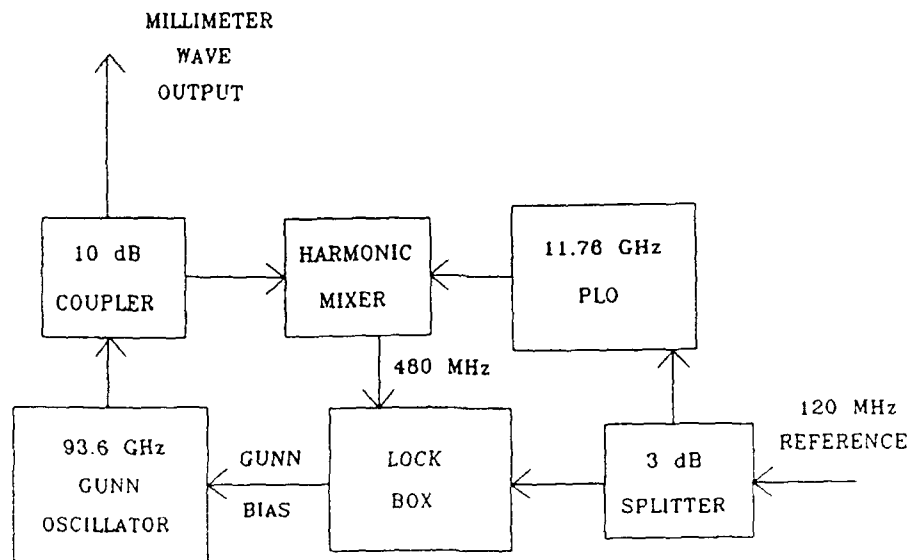


Figure 2
Millimeter-wave phase locked oscillator

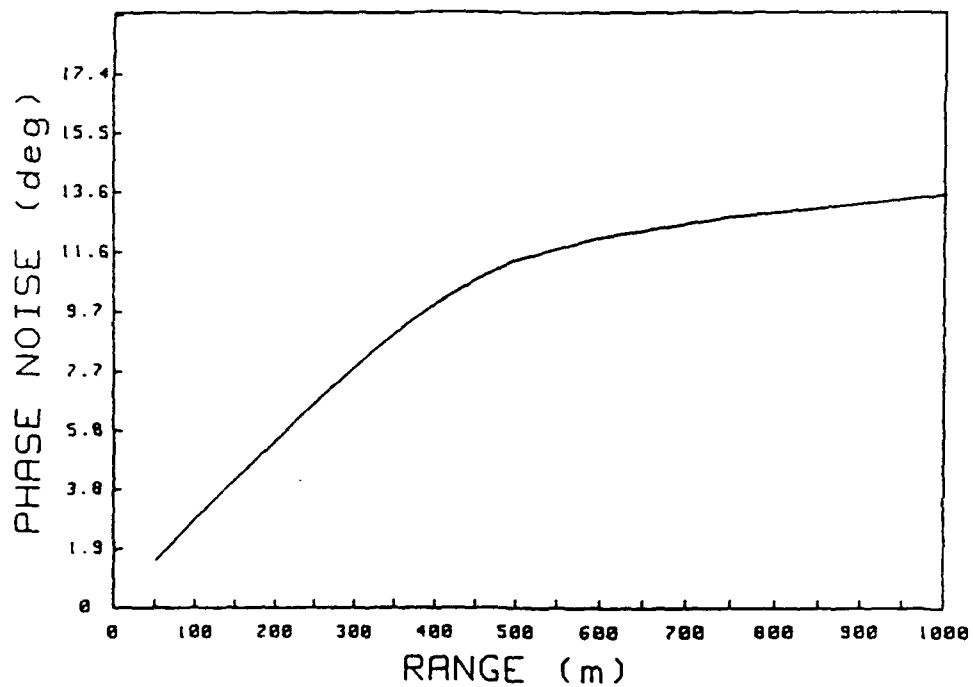


Figure 3
Phase noise versus range - original source

B. Results

After researching the options to reduce the rms phase noise of the MIRSL 95 GHz radar, we decided that acquisition of a source module from the Hughes Aircraft Company would greatly improve the situation. The Hughes source is similar in concept to the original millimeter-wave source, except that it has an analog phase lock loop circuit. It also has an integral VHF reference with lower phase noise. These features contribute to a better phase noise specification, and a decreased phase noise performance (Figure 4) when it is used as a radar source oscillator. Since this source does not operate at the frequency of 93.6 GHz of the two-antenna W-Band radar originally funded by the ARO, it was installed on a single antenna W-Band system being developed for the U.S. Department of Energy. This radar is currently undergoing engineering tests with field operation scheduled for January 1992. Unlike the existing polarimeter, it is a single antenna design. The ARO funded radar is currently operating with a multiplied source obtained from MIRSL's HP 8510B Network Analyzer. Polarimetric measurements of snow by both radars are planned for the 1991-92 winter season.

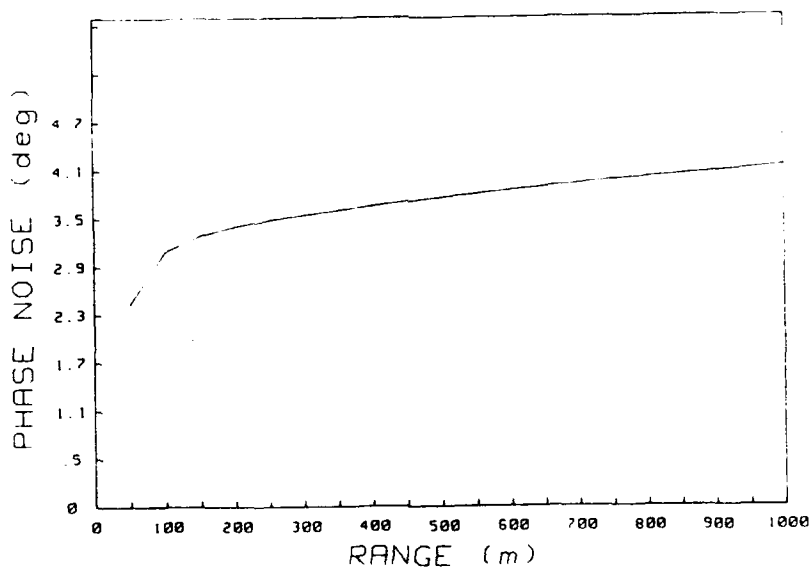


Figure 4

Phase noise versus range - Hughes source

C. List of Publications/Theses

Not Applicable

D. Participating Personnel

Philip Langlois

Paul Chang

4. Bibliography

- [1.] Goldman, S.J., 1989: Phase Noise Analysis in Radar Systems using Personal Computers, John Wiley & Sons, New York

5. Appendices

Not Applicable