

UNCLASSIFIED

AD NUMBER	
AD132676	
CLASSIFICATION CHANGES	
TO:	unclassified
FROM:	confidential
LIMITATION CHANGES	
TO:	Approved for public release, distribution unlimited
FROM:	Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; 09 MAY 1957. Other requests shall be referred to Naval Research Lab., Arlington, VA.
AUTHORITY	
NRL ltr, 13 Apr 1983; NRL ltr, 13 Apr 1983	

THIS PAGE IS UNCLASSIFIED

AD- 132676

SECURITY REMARKING REQUIREMENTS

DOD 5200.1-R, DEC 78

REVIEW ON 28 MAY 77

UNCLASSIFIED

AD 132 676

CLASSIFICATION CHANGED

TO: UNCLASSIFIED-

FROM: CONFIDENTIAL-

AUTHORITY:

NRL 17, 13 Apr 83



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

AD 132676

SECRET

CONFIDENTIAL

NRL Report 4924
Copy No.

HIGH RESOLUTION RADAR
PART I - PERISCOPE DETECTION IN SEA CLUTTER

[UNCLASSIFIED TITLE]

N. L. Davis

High Resolution Branch
Radar Division

May 9, 1957

CONFIDENTIAL



NAVAL RESEARCH LABORATORY
Washington, D.C.

Best Available Copy

JUN 13 1957

57AA

27340

UNCLASSIFIED

W. J. Allen
by direction

**Best
Available
Copy**

CONFIDENTIAL

ABSTRACT
[Confidential]

Experiments have been conducted with an 8-millimicrosecond pulse length X-band radar operating against snorkel and periscope targets. Five submarines were used for the measurements. The radar cross section of periscope was found to be between 10 and 100 square feet with occasional values above and below these values. Sea clutter was reduced by the system sufficiently to enable periscope detection under high sea conditions.

PROBLEM STATUS

This is an interim report; work on this problem is continuing.

AUTHORIZATION

NRL Problem R02-12,
Project NR 412-003
BuShips Problem S-1593
BuAer Problem EL-43001

Manuscript submitted March 20, 1957

CONFIDENTIAL

67AA

27340

CONFIDENTIAL

HIGH RESOLUTION RADAR
PART I - PERISCOPE DETECTION IN SEA CLUTTER
[Unclassified Title]

INTRODUCTION

Experiments with an 8-millimicrosecond pulse length, X-band radar were conducted to determine the effectiveness of a short pulse radar in detecting a submarine snorkel or periscope in the presence of sea clutter and to obtain radar cross-section information on such targets and on sea return.

RADAR SITE

These experiments were carried out at the Georgia Institute of Technology Test Site on the east coast of Florida at Boca Raton during the period August to December 1955. Available at this site was a 100-foot steel tower equipped with elevators so that an adjustable antenna height of 30 to 115 feet above the water could be obtained. The tower was located approximately 50 yards from the edge of the ocean. Radar experiments using submarines could be conducted from this site since the submarine could safely run submerged at a range of 1.5 miles.

Five submarines, each available to the project for a four-hour period on an "in transit" basis, were used.

5 October	USS BALAO
7 October	USS PICUDA
22 November	USS TRUMPET FISH
29 November	USS GUAVINA
8 December	USS SEA DOG

RADAR EQUIPMENT

An experimental high resolution radar system was designed and constructed at NRL. A ferrite circulator was used to provide about 30-db isolation between the transmitter and receiver and an X-band traveling-wave tube was used as a preamplifier. In addition to providing preamplification, the traveling-wave tube also served as a limiter to the leakage transmitter power and eliminated the danger of mixer crystal burnout.

The characteristics of the high resolution radar system are as follows:

Frequency	9375 Mc
Power Output (peak)	15 kw
Pulse Length	0.008 μ sec

CONFIDENTIAL

CONFIDENTIAL
NAVAL RESEARCH LABORATORY

Repetition Rate	1800 pps
Antenna	8-ft parabola
Preamplifier TWT	Huggins Model HA 4B
Noise Figure	25 db
First IF Amplifier TWT	Huggins HA 1B
Second IF Amplifier TWT	Huggins HA 2B
IF Bandpass	2500 to 2700 Mc
Video Bandpass	100 kc to 100 Mc
Presentation	Delayed A
Sweep Lengths	50, 100, 250 or 1000 yd

OCEANOGRAPHIC AND METEOROLOGICAL EQUIPMENT

Wave height was measured with a Beach Erosion Board ocean-type step-resistance wave gage. The steel piling on which the gage was mounted was located 400 yards from shore where the water depth was about 25 feet. A cable to the land from the piling furnished wave height information to a recorder and power for the wave gage and the necessary obstruction lights.

Wind speed and direction were recorded throughout the test interval by means of an AN/UMQ-5 system with the sensing unit located at the top of the tower.

CALIBRATION

A corner reflector was located on the beach to act as a reference whereby the variations in the radar system's performance could be observed. A check on the corner reflector's observations was obtained by comparing the corner echo with that from a sphere suspended from a helium balloon. In this manner a free space reference was made.

RESULTS

One of the primary objectives of these experiments was the detection of small targets under various sea conditions. As was readily observed using this radar, the amount of sea return from ranges of 3000 yards or more was extremely low even for the heaviest seas encountered (six to eight foot waves).

Both periscope and sea return data were recorded originally on film as an A scope deflection. For analysis, the average periscope signal amplitude was measured for each frame in a sample; sample lengths varied from one to seven minutes at five frames per second.

CONFIDENTIAL

CONFIDENTIAL

NAVAL RESEARCH LABORATORY

3

Due to the quantity of sea return data obtained, an automatic film reader was used to measure signal amplitude distribution. The reader gave an indication of the largest readable signal photographed in a given frame. Because single traces were not readable some lower value between average and time peak amplitude was read.

As was mentioned previously, obtaining sea return data at submarine range proved to be impossible. Consequently, it was necessary to make close-in measurements of the sea.

Values of radar area per unit area for sea return at close range (250 to 1000 yards) were measured without regard to angle of incidence, polarization, weather, etc. Using these values of unit radar area, a signal return from the sea at a range of 3250 yards was computed. It was assumed for these computations that the ocean surface was "area extensive."

Equivalent radar cross-section areas are shown in Table 1 to give a starting point for preliminary high resolution radar design.

Figure 1 shows the distribution of the radar return from the attack periscope exposed two feet, the distribution of the sea return echo, and a comparison of magnitudes of these two returns. The shaded area of the sea return (Fig. 1) includes computed values (range 3250 yards) for all of the sea return data analyzed for all conditions observed. The shaded area for the periscope curve indicates the spread of the data for five separate runs at different ranges normalized to a range of 3250 yards.

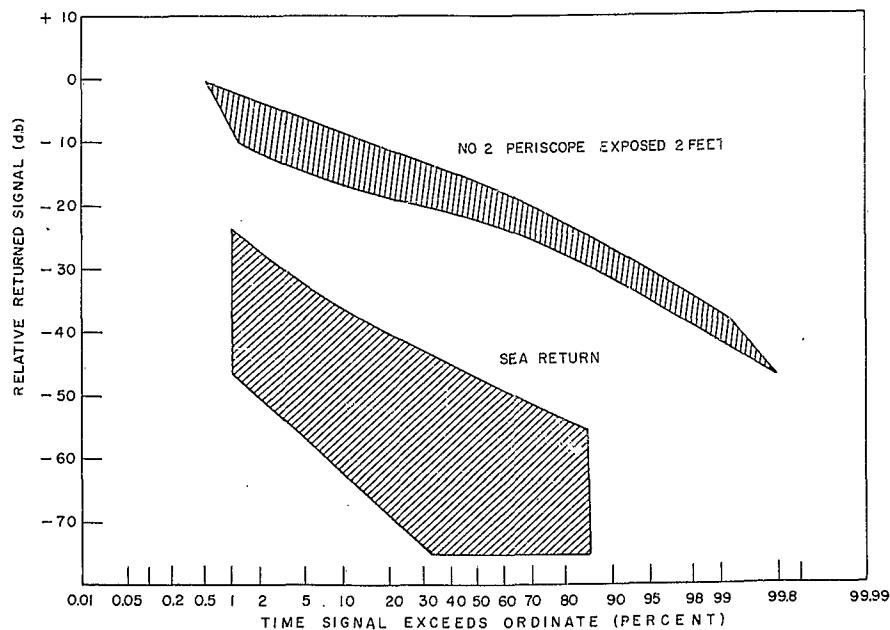


Fig. 1 - Amplitude distribution of radar return

CONFIDENTIAL

CONFIDENTIAL

TABLE 1
Experimental Data

Experimental Data							
Date	Target		Range of Target (yd)	Wind		Wave Height (ft)	Radar Cross Section (ft)
				Speed (knots)	Direction (deg)		
10/7/55	SS-382	Snorkle Depth	4850	17	110	5	1480
	PICUDA	"	6000	17	110	5	640
		"	3100	17	110	5	170
		"	3700	17	110	5	80
		"	3100	17	110	5	720
		"	3100	17	105	5	440
		"	4100	17	105	5	400
11/22/55	SS-425	No. 2 Per., 2 ft	6000	9	130	2.5	30
	TRUMPETFISH	No. 2 Per., 2 ft	3700	10	120	2.5	44
		No. 2 Per., 2 ft	3700	10	120	2.5	26
		No. 2 Per., 2 ft	3750	10	120	2.5	12
		No. 2 Per., 2 ft	3900	10	120	2.5	22
		No. 1 Per., 3 ft; Sn., 3 ft	4200	10	120	2.5	21
		No. 1 Per., 3 ft	5700	10	120	2.5	70
		Sn., 3 ft	5700	10	120	2.5	90
		No. 1 Per., 2 ft; Sn., 2 ft	7700	9	110	2.5	340
		No. 1 Per., 2 ft; Sn., 2 ft	7200	10	105	2.5	800
11/29/55	SS-362	No. 2 Per., 2 ft	3250	12	350	2	44
	GUAUVINA	No. 2 Per., 2 ft	4600	12	350	2	64
		No. 1 Per., 2 ft	4500	12	230	2	56
		No. 2 Per., 2 ft					
12/8/55	SS-401	No. 2 Per., 2 ft; Sn., 2 ft	3750	8	230	1	40
	SEA DOG	No. 2 Per., 2 ft; Sn., 2 ft	3850	8	230	1	212
		No. 2 Per., 2 ft; Sn., 2 ft	4000	8	230	1	540
		Sn., 2 ft	4300	8	230	1	48
		No. 2 Per., 2 ft	4300	8	230	1	34
		No. 2 Per., 2 ft; Sn., 2 ft	4050	8	230	1	720
		No. 2 Per., 2 ft; Sn., 2 ft	4900	8	230	1	160
		No. 2 Per., 2 ft; Sn., 2 ft	7300	8	230	1	220

CONFIDENTIAL

AL

CONFIDENTIAL

~~CONFIDENTIAL~~ NAVAL RESEARCH LABORATORY

The 10 to 30 db separation between these shaded areas indicates that with the high resolution radar used in these experiments most of the sea return could be eliminated by amplitude selection alone.

Interpretation of the results of these experiments should be made with the following items taken into consideration:

1. The total number of runs per ship, which varied between three and eight, was small considering the many variables involved.
2. The dynamic range recorded by the radar was about 25 db, which prevented the gathering of data from sea return and periscope simultaneously due to their difference in amplitude.
3. The sea return echo using the short-pulse radar was too low to make significant sea return measurements at the minimum operating range of the submarine.
4. Since the submarines were available on an "in transit" basis, little control of the time of arrival could be exercised. Therefore, the weather at the time of arrival governed the conditions of the submarine tests.

CONCLUSION

On the basis of the test conditions described, it is concluded that a short-pulse radar will detect small attack periscope targets in various sea states by virtue of the large reduction in the amplitude of sea clutter that results from using a short pulse.

RECOMMENDATION

It is recommended that a shipborne installation of a high resolution radar having resolution characteristics similar to the one described in this report be made to conduct tests on the detection of small targets under a variety of open-sea conditions.

ACKNOWLEDGMENTS

The author wishes to thank the many members of the High Resolution Branch of NRL for their contributions to this project. The contributions of J. R. Conlon and G. F. Myers were particularly valuable throughout the design, experimental, and data-reduction phases of this project.

CONFIDENTIAL

~~CONFIDENTIAL~~