

**Document And Report Documentation Page Submitted as
edoc_1075485607**

Report Documentation Page		<i>Form Approved</i> OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.			
1. REPORT DATE 10 MAR 2003	2. REPORT TYPE N/A	3. DATES COVERED -	
4. TITLE AND SUBTITLE Complementary Beam-Forming		5a. CONTRACT NUMBER	
		5b. GRANT NUMBER	
		5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)		5d. PROJECT NUMBER	
		5e. TASK NUMBER	
		5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Harvard University, 33 Oxford St., Rm MD-347, Cambridge, MA 02139 and vivato Research and Development, 12610 E. Mirabeau Pwky, Ste 900, Spokane, WA 99216		8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S)	
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited			
13. SUPPLEMENTARY NOTES Also see: ADM001520 , The original document contains color images.			
14. ABSTRACT			
15. SUBJECT TERMS			

16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES 29	19a. NAME OF RESPONSIBLE PERSON Patricia Mawby, EM 1438 PHONE:(703) 767-9038 EMAIL:pmawby@dtic.mil
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

Standard
Form 298
(Rev.
8-98)
Prescribed
by ANSI
Std
Z39-18

pwd: cannot determine current directory!

Complementary Beam-forming

Vahid Tarokh

Harvard University

33 Oxford Street Room MD-347

Cambridge, MA 02139

Yang-Seok Choi and Siavash M. Alamouti

Vivato Research and Development

12610 E. Mirabeau Parkway Suite 900

Spokane, WA 99216

March 10, 2003

20040317 146

Outline

- Motivation
- Smart Antenna Enhancements to IEEE 802.11 Systems
- Problems with Conventional Beam-Forming in CSMA Systems
- Complementary Beam-Forming (CBF)
- Analysis of CBF for Silent and Intended Users
- Examples

Motivation

- Current IEEE 802.11 wireless LANs support a maximum throughput of 54 Mbps.
- Such a throughput is only achievable in a radius of 4 meters (AT&T-Harvard Measurements and Models)
- At present, a "Wi-Fi revolution" is taking place.
- It is anticipated that the widespread deployment of Wi-Fi will change the entire wireless landscape in few years.

Motivation

- There will be an abundance of data hungry users in *hot spots*.
- WLAN providers will have to seek devices with increased throughputs and ranges
- This has forced an enormous body of industrial and research activities.

Smart Antennas Solution

- An enhancement that seems to provide an appealing solution is the use of antenna arrays at access points (AP) in conjunction with beam-forming.
- Such a solution is transparent to receivers and does not force any changes to current standards and receivers.
- In spite of these benefits, design of beam-forming enhancement to WLANs is not as trivial as said above as the combination of beam-forming and the CSMA protocol produces a host of new problems.

Beam-Forming and CSMA

- Consider a scenario where there are $m = 2$ transmit antennas and $k = 1$ intended users.
- Let the channel matrix to the desired user be given by (α, β) .
- A conventional beam-former then induces weights

$$w_1 = \frac{\bar{\alpha}}{|\alpha|^2 + |\beta|^2}$$

$$w_2 = \frac{\bar{\beta}}{|\alpha|^2 + |\beta|^2}$$

at the transmitter.

- If c_1 is the intended transmit signal at time 1 for user 1, then $w_1 c_1$ and $w_2 c_1$ are transmitted signals from antennas 1 and 2 respectively.

Beam-Forming and CSMA

- The intended user receives the signal

$$r_1 = w_1 c_1 + w_2 c_1 + n_1 = \sqrt{|\alpha|^2 + |\beta|^2} c_1 + n_1,$$

where n_1 is the noise.

- The signal to noise power ratio of the desired user improves by a factor of $10 \log_{10}(\sqrt{|\alpha|^2 + |\beta|^2})$ dB.
- This is not a free gain!

The Hidden Beam Problem

- Let an unintended user have channel matrix $(-\bar{\beta}, \bar{\alpha})$.
- Then the signal at this unintended user is given by

$$y_1 = -\bar{\beta}w_1c_1 + \bar{\alpha}w_2c_1 + \eta_1 = \eta_1,$$

where η_1 is the noise vector and the unintended user receives no signal.

- $\rightarrow$ With conventional beam-forming some users may have low signal components.
- This can cause a problem in a CSMA system.

The Hidden Beam Problem

- In CSMA, all users and the access point share the same channel for both up-link and down-link transmissions.
- Each user senses the channel and only transmits packets if it determines that the channel is not busy.
- A user with no adequate signal component may wrongly determine that the channel is idle (when busy) and start transmitting packets.
- This may cause unnecessary transmissions, subsequent back-offs, increased network latency and interference.
- Furthermore, the aforementioned undesired packet transmission has an energy penalty which adversely effects the battery life of the remote devices.
- This is called the *Hidden Beam Problem*.

The Hidden Beam Problem

- In lightly loaded systems (for instance with only one user), the hidden beam problem is not important.
- This “*Hidden Beam Problem*” is further exuberated if the system is more heavily loaded.
- This will be most likely the case both in hot spots or if the system range is increased.

Complementary Beam-Forming: Idea

- The main intuition behind complementary beam-forming is: Detection of busy period is easier than decoding of transmitted packet.
- This is built in the IEEE 802.11 WLAN standards.
- Each device listens to the channel during some time window and compares the energy collected in this window to a CCA (Clear Channel Assessment) threshold.
- Detect activity: if the collected energy $\geq$ the CCA threshold.
- Thus we will seek to construct a beam pattern which directs most of the transmitted power to the intended recipients while directing a small fraction of the total power to unintended users.

Complementary Beam-Forming: Idea

- The main intuition behind complementary beam-forming is: Detection of busy period is easier than decoding of transmitted packet.
- This is built in the IEEE 802.11 WLAN standards.
- Each device listens to the channel during some time window and compares the energy collected in this window to a CCA (Clear Channel Assessment) threshold.
- Detect activity: if the collected energy $\geq$ the CCA threshold.
- Our solution (CBF): Construct a beam pattern which directs most of the transmitted power to the intended recipients while directing a small fraction of the total power to unintended users.

Notation

- For any vector X , we let X^T and X^H respectively denote the transpose and Hermitian of X .
- For any matrix D , we let W_D denote the vector space spanned by the columns of D .
- Let the channel from transmit antenna l to the intended user j be given by $\alpha_{l,j}$.
- Let A_j denote the column vector $(\alpha_{1,j}, \alpha_{2,j}, \dots, \alpha_{m,j})^T$. We refer to the vector A_j as the *spatial signature of user j* .
- Let A denote the matrix whose j -th column is A_j .
- Let $R^t = (r_1^t, r_2^t, \dots, r_k^t)$ and $X^t = (x_1^t, x_2^t, \dots, x_m^t)$ respectively denote the vector of received signals at intended users $j = 1, 2, \dots, k$ and the vector of signals transmitted from

antennas $1, 2, \dots, m$ at time t .

- Let $C^t = (c_1^t, c_2^t, \dots, c_k^t)$, where c_j^t is the signal intended to the $j = 1, 2, \dots, k$ desired user at time t .
- For any square matrix A , let $Tr(A)$ denotes the trace (sum of diagonal elements of A).
- Let $N^t = (n_1^t, n_2^t, \dots, n_m^t)$ be the noise vector components at time t at the intended users.

Beam-Forming Matrix

- Then

$$R^t = X^t A + N^t, \quad (1)$$

- Noise components are assumed to be i.i.d. Gaussian.
- *No assumptions* on the statistics of the matrix A .
- $c_j^t, j = 1, 2, \dots, k, t = 1, 2, \dots, L$ are elements of a signal constellation with average signal $E[c_j^t] = 0$.
- The elements of the signal constellation are normalized so that their average power is $E[|c_j^t|^2] = 1$.
- In general $X^t = C^t \mathcal{B}$ where $\mathcal{B}$ is referred to as the *beam-forming matrix*.

ZF and Max-SINR Beam-Forming

- Then for a zero-forcing beam-former

$$\mathcal{B} = \frac{(A^H A)^{-1} A^H}{\sqrt{\text{Tr}((A^H A)^{-1})}}$$

and

- We present our technique for the zero-forcing beam-former here. Generalization to the maximum SINR case is obvious.
- We assume that the spatial signature matrix A is constant during the transmission of a packet.

Complementary Beam-Forming

- let W_A denote the vector space spanned by the columns of A .
- The subspace W_A is a k -dimensional subspace of the complex m -dimensional complex space
- Let $W_A^\perp$ be the orthogonal complement of W_A . $W_A^\perp$ has dimension $m - k$.
- Let $U_0, U_1, \dots, U_{m-k-1}$ form an orthonormal basis for $W_A^\perp$. (In other words, $U_0, U_1, \dots, U_{m-k-1}$ are mutually orthogonal m -dimensional column vectors of length one in $W_A^\perp$).
- Clearly, $U_j^H A_i = 0$ for $0 \leq j \leq m - k - 1$ and $1 \leq i \leq k$.

Complementary Beam-Forming

- The transmitter constructs matrices $Z_1, Z_2, \dots, Z_L$, where L is the length of down-link transmission period, such that:

- **A:** For all $1 \leq i \leq L$, the matrix Z_i is a $k \times m$ matrix whose rows are in the set $\{0, \pm U_0^H, \pm U_1^H, \dots, \pm U_{m-k-1}^H\}$,
- **B:** If L is even, then $Z_2 = -Z_1$,
 $Z_4 = -Z_3, \dots, Z_L = -Z_{L-1}$,
- **C:** If L is odd, then $Z_2 = -Z_1$,
 $Z_4 = -Z_3, \dots, Z_{L-1} = -Z_{L-2}, Z_L = 0$, and
- **D:** Each element

$$+U_0^H, -U_0^H, +U_1^H, -U_1^H, \dots, +U_{m-k-1}^H, -U_{m-k-1}^H$$

appears p times in the list of Lk rows of $Z_1, Z_2, \dots, Z_L$ for some positive integer p .

Complementary Beam-Forming

- Once $Z_1, Z_2, \dots, Z_L$ are constructed, at each time t , the transmitter chooses the beam-forming matrix

$$S^t = [((A^H A)^{-1} A^H / \sqrt{\text{Tr}((A^H A)^{-1})} + \frac{1}{\sqrt{k}} \epsilon Z_t], \quad (2)$$

where $\epsilon \geq 0$ is a fixed positive number.

- The choice of $\epsilon \geq 0$ governs the trade-off between the power pointed to the intended users and that pointed to unintended users.
- For $\epsilon = 0$, we recover the conventional beam-forming $\rightarrow$ Complementary beam-forming generalizes and includes conventional beam-forming as a special case.

Analysis of CBF

Intended Users

- **Theorem:** The intended users in complementary beam-forming when compared to the conventional method suffer a loss of at most $10 \log_{10}(1 + |\epsilon|^2)$.

Analysis of CBF

Silent Users

- **Theorem:** Let $\lambda_{\min}(A^H A)$ and $\lambda_{\max}(A^H A)$ respectively denote the minimum and maximum eigenvalues of $A^H A$. Then provided that

$$|\epsilon|^2 \leq \frac{(m-k)}{k} \frac{\lambda_{\min}(A^H A)}{\lambda_{\max}(A^H A)}, \quad (3)$$

$$p \geq \frac{m}{k} - 0.5, \quad (4)$$

complementary beam-forming guarantees a fraction

$|\epsilon|^2 \frac{\sum_{j=1}^m |b_j|^2}{m}$ of the transmitted power to an unintended receiver whose spatial signature is $B = (b_1, b_2, \dots, b_m)$.

Comment

- The condition $p \geq \frac{m}{k} - 0.5$ means that the transmitted packets must not be too short.
- The condition

$$|\epsilon|^2 \leq \frac{(m-k)}{k} \frac{\lambda_{\min}(A^H A)}{\lambda_{\max}(A^H A)},$$

$$p \geq \frac{m}{k} - 0.5,$$

is a natural one, because when $\lambda_{\min}(A^H A)/\lambda_{\max}(A^H A)$ is small. Then the matrix $A^H A$ is close to being singular. This means that even the intended users, do not receive significant signal powers

- In loaded systems, schedulers take care of this issue and choose the users for which the above ratio is larger than a threshold.

Example


- We consider the case when there are $m = 2$ transmit antennas and $k = 1$ intended receivers. Let $\epsilon = 0.1$.
- The above Theorems say that power of 20 dB below the transmitted power is guaranteed to silent users. The loss to the intended user is at most 0.044 dB.
- The beam-forming matrices S_1 and S_2 in this case are given by

$$S_1 = \frac{1}{\sqrt{|\alpha|^2 + |\beta|^2}}(\bar{\alpha} - \epsilon\beta, \bar{\beta} + \epsilon\alpha),$$

$$S_2 = \frac{1}{\sqrt{|\alpha|^2 + |\beta|^2}}(\bar{\alpha} + \epsilon\beta, \bar{\beta} - \epsilon\alpha),$$


with $S_{2l-1} = S_1$ and $S_{2l} = S_2$ for $l = 1, 2, \dots, \lfloor \frac{L}{2} \rfloor$, with $S_L = \frac{1}{\sqrt{|\alpha|^2 + |\beta|^2}}(\bar{\alpha}, \bar{\beta})$ when L is odd.

Time Domain CBF

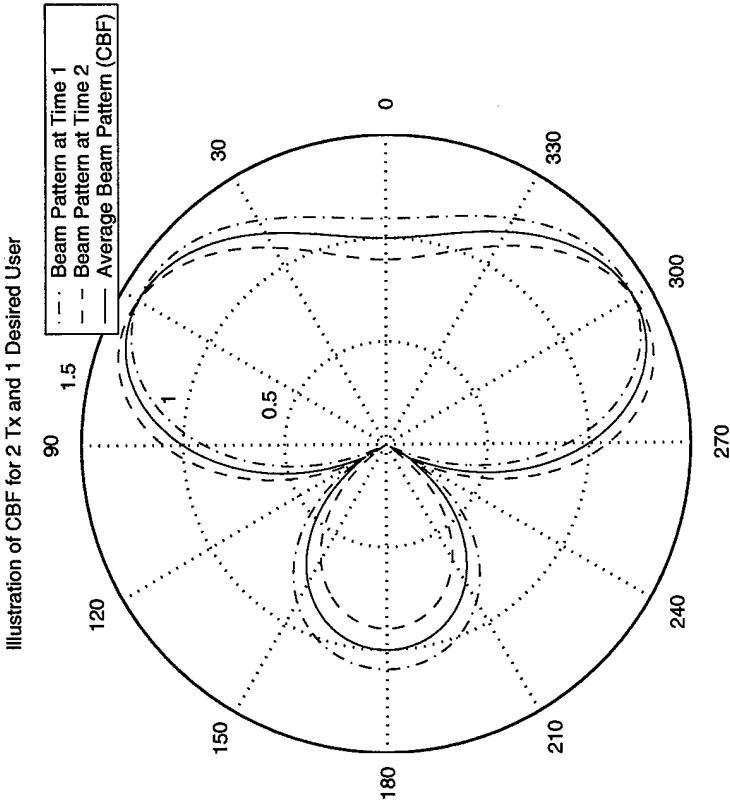


Time Domain CBF

Comparison of CBF With Conventional Beam-forming, 2 Tx, 1 Desired User

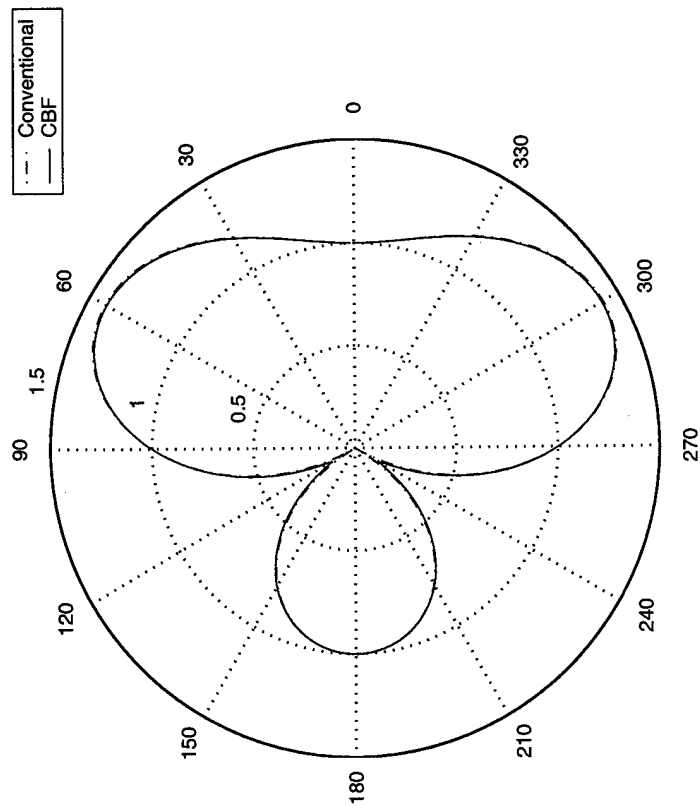


Time Domain CBF

Illustration of CBF for 2 Tx and 1 Desired User

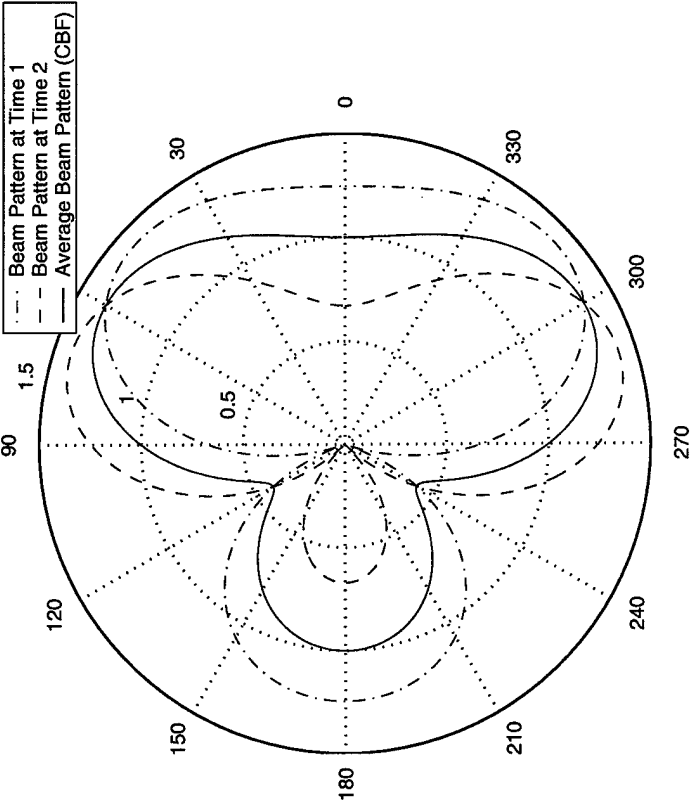

Time Domain CBF

Comparison of CBF With Conventional Beam-forming, 2 Tx, 1 Desired User

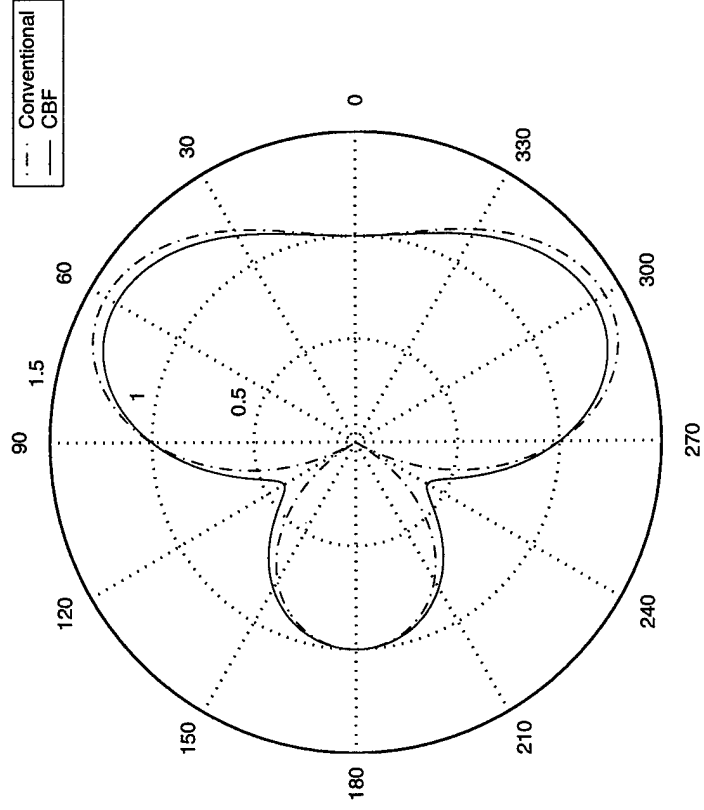

Other Issues

- Analysis show that the complexity of complementary beam-forming is approximately twice as much as that of the conventional beam-forming.
- It has been observed via simulations that using complementary beam-forming significantly enhance the performance of a heavily loaded smart antenna enhanced IEEE 802.11 system as compared to the case when conventional beam-forming is employed.

Conclusions

- Smart antennas are an appealing solution for increasing the range and throughput of IEEE 802.11 systems because they are backward compatible.
- Combining smart antennas and CSMA produce a host of new challenges.
- An example of these problems is the hidden beam problem.
- We proposed complementary beam-forming to address this problem.