

APPLICATION OF AN ITERATIVE METHOD FOR THE SOLUTION OF ELECTROMAGNETIC SCATTERING FROM WIRE ANTENNAS

Surendra Singh
Department of Electrical Engineering
The University of Tulsa
Tulsa, Oklahoma 74104
(918) 631-3273
email: surendra-singh@utulsa.edu

Manohar D. Deshpande
NASA Langley Research Center
Hampton, Virginia 23681

Abstract: In this paper we apply vector ϵ -algorithm to solve a system of linear equations arising in the method of moments solution of electromagnetic scattering from wire antennas. The method does not require the inversion of a matrix. Hence, it avoids the problems associated with matrix inversion of singular or ill-conditioned matrices.

Keywords: Method of moments, Singular matrix, system of linear equations

1. Introduction

This paper presents an iterative technique for solving the system of equations obtained in a method of moments solution. The method is based on vector ϵ -algorithm (VEA) [1]. The application of the method is illustrated by applying it to find the current induced on a wire excited by a normally incident plane wave. Matrix inversion is not required as the method is iterative. The solution process can be stopped when a pre-defined convergence criterion is met. This allows the user to specify the degree of accuracy in the solution. Some of the iterative techniques utilized so far include the conjugate gradient method [2] and the method of steepest descent [3]. VEA presents an alternative to solving a system of equations, especially when other methods fail due to ill-conditioned or a singular matrix [4].

2. Vector ϵ - Algorithm (VEA)

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 23 APR 2004		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE Application Of An Iterative Method For The Solution Of Electromagnetic Scattering From Wire Antennas				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Department of Electrical Engineering The University of Tulsa Tulsa, Oklahoma 74104				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES See also ADM001763, Annual Review of Progress in Applied Computational Electromagnetics (20th) Held in Syracuse, NY on 19-23 April 2004., The original document contains color images.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES 4	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

Consider the solution of the following system of linear equations:

$$AX = b \quad (1)$$

where A is a known $N \times N$ moment method matrix, $A = [a_{ij}]$; X is the unknown $N \times 1$ column vector, $X = (x_1, x_2, \dots, x_N)^T$, and b is known $N \times 1$ forcing function vector, $b = (b_1, b_2, \dots, b_N)^T$. In VEA, estimates of X , designated $\tilde{X}$, are obtained without the use of matrix inversion.

The starting vectors $\{\varepsilon_{-1}^{(0)}\}$ and $\{\varepsilon_0^{(q)}\}$, each of length N , are constructed from the initial values:

$$\{\varepsilon_{-1}^{(q)}\} = \{0\}, \quad q = 1, 2, \dots \quad (2)$$

$$\{\varepsilon_0^{(0)}\} = \{S^{(0)}\} = \{0\}$$

$$\{\varepsilon_0^{(q)}\} = \{S^{(q)}\}, \quad q = 1, 2, \dots \quad (3)$$

The vectors, $S^{(q)} = (s_1^{(q)}, s_2^{(q)}, \dots, s_N^{(q)})$, can be calculated using Gauss-Seidel relaxation [5]:

$$s_i^{(q)} = \left(b_i - \sum_{j=1}^{i-1} a_{ij} s_j^{(q)} - \sum_{j=i+1}^N a_{ij} s_j^{(q-1)} \right) / a_{ii}, \quad \begin{matrix} i = 1, 2, \dots, N \\ q = 1, 2, \dots \end{matrix} \quad (4)$$

Once we have at least two initial vectors $S^{(0)}$ and $S^{(1)}$, then the VEA can be started to obtain $(r+1)^{th}$ order iterates, which are given by:

$$\varepsilon_{r+1,i}^{(q)} = \varepsilon_{r-1,i}^{(q+1)} + \frac{1}{(\varepsilon_{r,i}^{(q+1)} - \varepsilon_{r,i}^{(q)})} \quad \begin{matrix} q = 0, 1, 2, \dots \\ i = 1, 2, \dots, N \end{matrix} \quad (5)$$

The value of index r in the above equation takes on values of 0, 1, 2, In (5), the even order vectors $\{\varepsilon_2^{(q)}\}, \{\varepsilon_4^{(q)}\}, \dots$ provide estimate of the solution vector X . The computations are stopped when the following condition is met:

$$\frac{\|A\tilde{X} - b\|_2}{\|b\|_2} \leq NC_f \quad (6)$$

where C_f is a pre-defined convergence factor.

3. Numerical Results

We show the application of VEA in solving the current induced on a thin wire scatterer. The integral equation for the induced current, given by Pocklington's equation, is solved using pulse expansion and triangular testing functions [6].

Fig.1 shows the current induced by a normally incident plane wave ($E_0 = 1$ V/m) on a wire scatterer of length $\ell = \lambda/2$, radius $a = \lambda/1000$, frequency $f = 300$ MHz and convergence factor $C_f = 0.01$. The number of pulse expansion functions, N , is 31. We have run the code for higher values of N and obtained results in agreement with those obtained from direct methods. Presently work is in progress to apply the algorithm to solve 2-dimensional (flat plate) and 3-dimensional (conducting sphere) scattering problems using triangular patches in the method of moments..

4. Conclusion

In this work, we have shown that vector ε -algorithm can be utilized to solve a system of linear equations obtained in a moment method solution of scattering problems. The results for the computation of current distribution on a thin wire scatterer show very good agreement with direct method (matrix inversion). Since this method is iterative, it does not require inversion of a matrix. This can be advantageous if one encounters a singular or ill-conditioned moment method matrix.

References

- [1] P. Wynn, "Accelerated techniques for iterated vector and matrix problems," *Math. Comput.*, vol. 16, pp. 301-322, 1962.
- [2] T. K. Sarkar and S. M. Rao, "The application of the conjugate gradient method for the solution of electromagnetic scattering from arbitrarily oriented wire antennas," *IEEE Trans. Antennas Propagat.*, vol. 32, pp. 398-403, April 1984.
- [3] T. K. Sarkar and S. M. Rao, "An iterative method for solving electrostatic problems," *IEEE Trans. Antennas Propagat.*, vol. 30, pp. 611-616, July 1982.
- [4] C. Brezinski and A. C. Rieu, "The solution of systems of equations using the ε -algorithm, and an application to boundary-value problems," *Math. Computation*, vol. 28, pp. 731-741, 1974.
- [5] G. Golub and C. F. Van Loan, *Matrix computations*, John Hopkins Univ. Press, pp. 354, 1983.
- [6] R. F. Harrington, R. Mittra and C. M. Butler, *Lecture notes for short course notes on Computational Methods in Electromagnetics*, St. Cloud, Florida, Nov. 10 - 14, 1980.

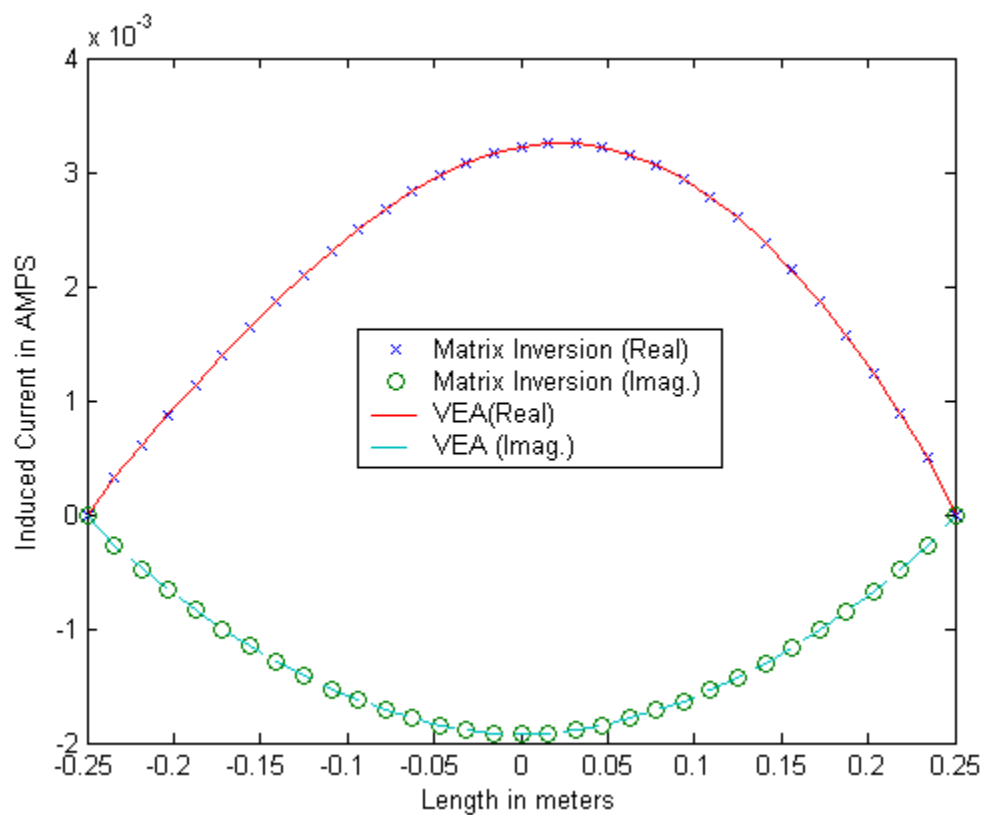


Figure 1: The current induced on a thin wire of length = $\lambda/2$, radius = $\lambda/1000$ and N = 31.