

KALMAN PLUS WEIGHTS: A TIME SCALE ALGORITHM*

Charles A. Greenhall
Jet Propulsion Laboratory, California Institute of Technology
4800 Oak Grove Drive, MS 298-100
Pasadena, CA 91109, USA
E-mail: Charles.Greenhall@jpl.nasa.gov

Abstract

KPW is a time scale algorithm that combines Kalman filtering with the basic time scale equation (BTSE). A single Kalman filter that estimates all clocks simultaneously is used to generate the BTSE frequency estimates, while the BTSE weights are inversely proportional to the white FM variances of the clocks. Results from simulated clock ensembles are compared to previous simulation results from other algorithms.

INTRODUCTION

The purpose of a time scale is to create a virtual clock from an ensemble of physical clocks whose differences from each other are measured at a sequence of dates (a date being the displayed time of a clock). The virtual clock is defined as an offset from one of the clocks, computed from the measurement data by some algorithm. We usually want the virtual clock to be quieter than any of the real clocks in both the short term and the long term.

One approach, which was tried in the early 1980s [1], is to run a Kalman filter on the clock difference measurements, the noise of each clock having previously been modeled by a stochastic linear system. The filter produces an estimate, unbiased and with minimum error variance, of the phase and frequency of each clock; moreover, if we offset the tick of each clock by its phase estimate, we arrive at a single point on the time axis (if the measurements are noiseless). It makes sense, then, to regard this point as the estimated origin of the ensemble, and to use the sequence of these values as a time scale. This time scale, which was realized as TA (NIST), was reported to follow the clock with the best long-term stability, regardless of its short-term stability [2]. My goals have been to reproduce this finding, understand it, and improve the method. I seem to have achieved the first and third goals, but not the second.

It turns out that a good time scale algorithm can be constructed by injecting *some* of the Kalman-filter information into the traditional “basic time scale equation” (BTSE), which requires frequency

*This work was performed by the Jet Propulsion Laboratory, California Institute of Technology, under a contract with the National Aeronautics and Space Administration.

Report Documentation Page

Form Approved
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE NOV 2001	2. REPORT TYPE	3. DATES COVERED 00-00-2001 to 00-00-2001			
4. TITLE AND SUBTITLE Kalman Plus Weights: A Time Scale Algorithm		5a. CONTRACT NUMBER			
		5b. GRANT NUMBER			
		5c. PROGRAM ELEMENT NUMBER			
6. AUTHOR(S)		5d. PROJECT NUMBER			
		5e. TASK NUMBER			
		5f. WORK UNIT NUMBER			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) California Institute of Technology, Jet Propulsion Laboratory, 4800 Oak Grove Dr, Pasadena, CA, 91109		8. PERFORMING ORGANIZATION REPORT NUMBER			
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S)			
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)			
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES See also ADM001482. 33rd Annual Precise Time and Time Interval (PTTI) Systems and Applications Meeting, 27-29 Nov 2001, Long Beach, CA					
14. ABSTRACT see report					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified	Same as Report (SAR)	10	

estimates and a set of weights. In brief, here is the new time scale algorithm, called “Kalman plus weights (KPW).”

1. Initialize the Kalman filter properly, and run it on the clock models and difference measurements.
2. Throw out the Kalman phase estimates.
3. Use the Kalman frequency estimates in the BTSE, whose weights are made inversely proportional to the white FM variances of the clocks.

After describing the algorithm in detail, I show results from simulations of clocks with independent white FM and random-walk FM (RWFm) components. Included are comparisons with previous simulation results for two other time scales that make heavy use of Kalman filtering: the Barnes-Allan “frequency Kalman” [3] and Stein’s KAS-2¹ [4].

TERMINOLOGY AND NOTATION

I shall try to introduce a consistent and suggestive notation in which to work. The ensemble has n clocks H_1, \dots, H_n . A *date* is the displayed time of a clock, determined by counting its oscillations. At date t , the following quantities are defined:

$h_i(t)$ = time coordinate (on some time scale) of H_i ’s tick when it shows date t ; not directly observable.

$h_0(t)$ = time coordinate of an ideal clock H_0 ; $h_0(t) = a + bt$ for some constants a, b . This is not an unattainable concept; an ideal clock can and will be defined by extrapolating the initial state of a physical clock; see the section on startup.

$h_e(t)$ = time scale or ensemble time, the time coordinate of a virtual clock H_e , to be determined by its computed offsets from the physical clocks.

$x_e(t) = h_e(t) - h_0(t)$, offset of H_e from H_0 , also called a time scale here.

$x_i(t) = h_i(t) - h_0(t)$, offset of H_i from H_0 .

$x_{ij}(t) = x_i(t) - x_j(t) = h_i(t) - h_j(t)$, clock difference measurements, taken at an increasing sequence of dates t_0, t_1, \dots . This study assumes noiseless measurements.

$x_{ie}(t) = x_i(t) - x_e(t) = h_i(t) - h_e(t)$, offset of H_i from H_e . The $x_{ie}(t)$ are to be computed as statistics of the measurements through date t , perhaps with some initial conditions. A time scale $x_e(t)$ is determined by $x_i(t)$ and $x_{ie}(t)$ for *some* i . When the measurements are noiseless, it usually turns out that *any* i can be used, that is, $x_i(t) - x_{ie}(t)$ gives the same value $x_e(t)$ for all i . An equivalent condition is

$$x_{ie}(t) - x_{je}(t) = x_{ij}(t), \quad i, j = 1, \dots, n. \quad (1)$$

If (1) is fulfilled, I shall say that the offsets $x_{ie}(t)$ are *consistent* with the measurements. This just means that the set of points $\{x_{ie}(t) : i = 1, \dots, n\}$ is a rigid translation of the set $\{x_i(t) : i = 1, \dots, n\}$.

¹A tradename of Timing Solutions Corporation

AVERAGE TIME SCALES

This category includes many of the time scales in actual use [5]. An average time scale is defined recursively at measurement date t from measurement date $t - \tau$ by an equation of form

$$x_e(t) = x_e(t - \tau) + \sum_{i=1}^n w_i(t) [x_i(t) - x_i(t - \tau) - \tau \hat{y}_i(t - \tau)]. \quad (2)$$

The weights $w_i(t)$ (which add to 1) and the frequency estimates $\hat{y}_i(t)$ depend on the measurements through date t . From (2) and the previous definitions, there follows the *basic time scale equation* (BTSE),

$$x_{je}(t) = \sum_{i=1}^n w_i(t) [x_{ji}(t) + x_{ie}(t - \tau) + \tau \hat{y}_i(t - \tau)], \quad j = 1, \dots, n, \quad (3)$$

a recursive equation for the offsets $x_{je}(t)$. This is the computation that is actually performed to obtain the offsets of the virtual clock from the physical clocks. These offsets are consistent with the measurements.

Average time scales usually calculate $\hat{y}_i(t)$ as an estimate of the frequency of H_i relative to the scale H_e as calculated through date t . In the present formulation, $\hat{y}_i(t)$ is an estimate of the frequency of H_i relative to H_0 , not H_e . This is the case for the Kalman-based estimate discussed below; the Kalman filter knows nothing about H_e .

CLOCK MODEL AND KALMAN FILTER

At this stage of development, I am using a two-state clock model: white FM plus RWFM. Jones and Tryon [1] showed how to integrate the differential-equation model to a stochastic difference-equation model for discrete measurement dates, which may be unequally spaced. For the i th clock, the equations taking the state $[x_i, y_i]$ from date $t - \tau$ to date t can be stated as

$$\begin{aligned} x_i(t) &= x_i(t - \tau) + \tau y_i(t - \tau) + w_{xi}(t, \tau) \\ y_i(t) &= y_i(t - \tau) + w_{yi}(t, \tau). \end{aligned} \quad (4)$$

The process noise vector $[w_{xi}(t, \tau), w_{yi}(t, \tau)]$ (uncorrelated over dates and clocks) has covariance matrix

$$Q_i(\tau) = q_{xi} \begin{bmatrix} \tau & 0 \\ 0 & 0 \end{bmatrix} + q_{yi} \begin{bmatrix} \tau^3/3 & \tau^2/2 \\ \tau^2/2 & \tau \end{bmatrix}, \quad (5)$$

in which the q 's, which we assume to be known, specify the white FM and RWFM noise levels. In terms of them, the Allan variance of the i th clock is

$$\sigma_{y_i}^2(\tau) = \frac{q_{x_i}}{\tau} + \frac{q_{y_i}\tau}{3}. \quad (6)$$

The overall state vector is $X(t) = [x_1(t), y_1(t), \dots, x_n(t), y_n(t)]$. In a standard way [6], which will not be repeated here, the Kalman filter uses the model (4)-(5) and the measurements $x_{ij}(t)$ to obtain a recursive estimate $\hat{X}(t) = [\hat{x}_1(t), \hat{y}_1(t), \dots, \hat{x}_n(t), \hat{y}_n(t)]$ and its error covariance matrix $\hat{P}(t)$ from the same quantities at date $t - \tau$.

It turns out that the Kalman phase estimates $\hat{x}_i(t)$ are consistent with the clock measurements in the sense that $\hat{x}_i(t) - \hat{x}_j(t) = x_{ij}(t)$; consequently, it makes sense to define a natural Kalman time scale by

$$x_{eK}(t) = x_i(t) - \hat{x}_i(t) \quad (7)$$

(the same for all i). It is this scale that was used for TA (NIST) and found wanting.

Startup

The Kalman filter must be initialized at a starting date t_1 by providing a state estimate $\hat{X}(t_1), \hat{P}(t_1)$. By taking care with this task, we can establish a reference for the ensemble and make the filter settle down quickly [7]. Let us take noiseless clock difference measurements $x_{ij}(t_0), x_{ij}(t_1)$, where $t_1 = t_0 + \tau$. Without loss of generality, we can assume that the $x_i(t_0)$ are known exactly. Some initial information about the random walk frequency states is needed, too. For this purpose, let us regard H_1 as a master clock whose initial frequency state, relative to some ideal clock H_0 , can be defined or estimated. Thus, let $\hat{y}_1(t_0)$ be some unbiased prior estimate of $y_1(t_0)$, with error variance p_1 . We can always set:

$$x_1(t_0) = 0, \quad y_1(t_0) = 0, \quad p_1 = 0. \quad (8)$$

The implication of (8) is that H_0 is *defined* as the noiseless extrapolation of the initial state of H_1 , which, though unknown, can still act as a reference. This convention will be called the *Master Clock 1 Startup*. This is not the same thing as using H_1 as a master clock during the run [8]; after startup, its state is estimated (relative to H_0) on a par with the states of the other clocks.

Here are the initialization equations, whose derivation is omitted:

$$\begin{aligned} \hat{y}_i(t_0) &= \hat{y}_1(t_0) + \frac{1}{\tau} [x_{i1}(t_1) - x_{i1}(t_0)], \quad i = 1, \dots, n \\ \hat{x}_i(t_1) &= x_i(t_0) + \tau \hat{y}_i(t_0), \quad \hat{y}_i(t_1) = \hat{y}_i(t_0), \quad i = 1, \dots, n. \end{aligned}$$

These give $\hat{X}(t_0)$ and $\hat{X}(t_1)$. For the Master Clock 1 Startup (assumed for simplicity), we have $\hat{P}(t_1) = A Q(\tau) A^T$, where $Q(\tau)$ is the overall process covariance matrix with diagonal blocks

Two Opposite Clocks

The simplest and most revealing example is two clocks that are as opposite as they can be: H_1 is pure white FM, while H_2 is pure RWFm. The results are shown in Fig. 1 (arbitrary scaling). The upper plot shows the phases of the true clocks and the KPW time scale H_e . The natural Kalman time scale (7) exhibits an extreme form of its well-known behavior: it is exactly equal to $x_1(t)$. This means that the Kalman phase estimate $\hat{x}_1(t)$ is identically zero; all of H_1 's white FM is thrown onto $\hat{x}_2(t)$.

The middle plot shows the total frequency (difference quotient of the phase) for the KPW scale H_e and the true clocks; the curves are offset for clarity. For H_2 , the total frequency is the same as the RWFm state $y_2(t)$. The two upper intertwined curves, which are $y_2(t)$ and its estimate $\hat{y}_2(t)$, show that the Kalman filter does an excellent job of estimating this frequency state.

In the lower plot, the straight lines are the theoretical Allan deviations of the true clocks; the dots are the measured Allan deviations. The KPW scale H_e is only moderately noisier than H_2 for short τ , and about the same as H_1 for long τ . All the weight is on H_2 ; this means that $x_e(t) = x_2(t) - x_{2,\text{RWF}}(t)$, with H_1 playing no role in the BTSE. Nevertheless, the long-term behavior of the scale seems to be governed by H_1 .

Eleven NIST Cs Clocks

This example comes from a study by Barnes and Allan [3] based on simulations of a set of cesium clocks whose q 's had previously been measured. Figure 2 shows the result of a simulation using the same q 's. The phases of all the true clocks and the total frequencies of three of them are shown. The crosses in the lower plot (data from Fig. 9 of [3]) show the Allan deviation of a time scale derived from the "frequency Kalman" filter, which uses pseudo-measurements of frequency differences. That scale dips a little lower than the KPW scale at $\tau = 10^5$ s. At $\tau = 10^4$ s, though, the measured KPW Allan deviation is 1.30×10^{-14} , close to the minimum value 1.27×10^{-14} that can be achieved by a weighted average of the white FM components of these clocks.

Eight Imaginary Clocks

This example reproduces a simulation that was carried out by Stein [4] on an imaginary eight-clock ensemble to demonstrate the KAS-2 time scale algorithm. The odd-numbered clocks all have the same q 's, as do the even-numbered clocks. Figure 3 shows the results of simulating this ensemble; the crosses in the lower plot show the KAS-2 stability from Stein's Fig. 1. For each τ , the measured KPW Allan deviation is less than 60% of the theoretical Allan deviation of the best clock for that τ .

CONCLUSIONS

The KPW time scale algorithm has been demonstrated in a simulation playpen with perfect knowledge of the stochastic clock models and their noise levels. Under these conditions, KPW seems to be competitive with other Kalman-based time scale algorithms. The natural Kalman time scale, which does not use the basic time scale equation, has again been shown to be noisy in the short

term because the Kalman filter attributes the white FM noises to the wrong clocks. I do not yet understand why this happens.

A related symptom is the unbounded growth of portions of the covariance matrix. This growth does not harm the frequency estimates, especially if the Kalman filter is mechanized by a square-root method. Nevertheless, as Weiss and Weissert wrote [2], "it is suggestive of an undesirable situation." In view of Brown's [8] work, it might be possible to reduce this matrix transparently.

The KPW algorithm might serve as the foundation of a time scale that gives real-time results. Of course, a practical time scale must provide for clock insertion and removal, outlier detection and rejection, jumps in phase and frequency, steering, adaptive estimation of the q 's, and so on. In addition, the clock and measurement models should be expanded to include random run FM, white PM, and measurement noise.

REFERENCES

- [1] R. H. Jones and P. V. Tryon, 1987, "*Continuous time series models for unequally spaced data applied to modeling atomic clocks*," **SIAM J. Sci. Stat. Comput.**, **8**, 71-81.
- [2] M. Weiss and T. Weissert, 1990, "*A new time scale algorithm: AT1 plus frequency variance*," in Proceedings of the 21st Annual Precise Time and Time Interval (PTTI) Applications and Planning Meeting, 28-30 November 1989, Redondo Beach, California, USA, pp. 343-357.
- [3] J. A. Barnes and D. W. Allan, 1985, "*Time scale stabilities based on time and frequency Kalman filters*," in Proceedings of the 39th Annual Frequency Control Symposium, 29-31 May 1985, Philadelphia, Pennsylvania, USA (IEEE Publication AD-A217404), pp. 107-112.
- [4] S. R. Stein, 1993, "*Advances in time-scale algorithms*," in Proceedings of the 24th Annual Precise Time and Time Interval (PTTI Applications and Planning Meeting, 1-3 December 1992, McLean, Virginia, USA (NASA Conference Publication 3218), pp. 289-302.
- [5] *Selection and Use of Precise Frequency and Time Systems*, International Telecommunication Union (Geneva), 1997, Chapter 6.
- [6] A. Gelb, ed., 1974, **Applied Optimal Estimation** (MIT Press, Cambridge, Massachusetts).
- [7] S. R. Stein and R. L. Filler, 1988, "*Kalman filter analysis for real time applications of clocks and oscillators*," in Proceedings of the 42nd Annual Frequency Control Symposium, 1-3 June 1988, Baltimore, Maryland, USA (IEEE Publication 88CH2588-2), pp. 447-452.
- [8] K. R. Brown Jr., 1991, "*The theory of the GPS Composite Clock*," in Proceedings of the ION GPS-91 Meeting, 10-13 September 1991, Albuquerque, New Mexico, USA (Institute of Navigation, Alexandria, Virginia), pp. 223-241.
- [9] G. J. Bierman, 1977, **Factorization Methods for Discrete Sequential Estimation** (Academic Press, New York).
- [10] M. S. Grewal and A. P. Andrews, 2001, **Kalman Filtering: Theory and Practice Using Matlab** (J. Wiley and Sons, New York).

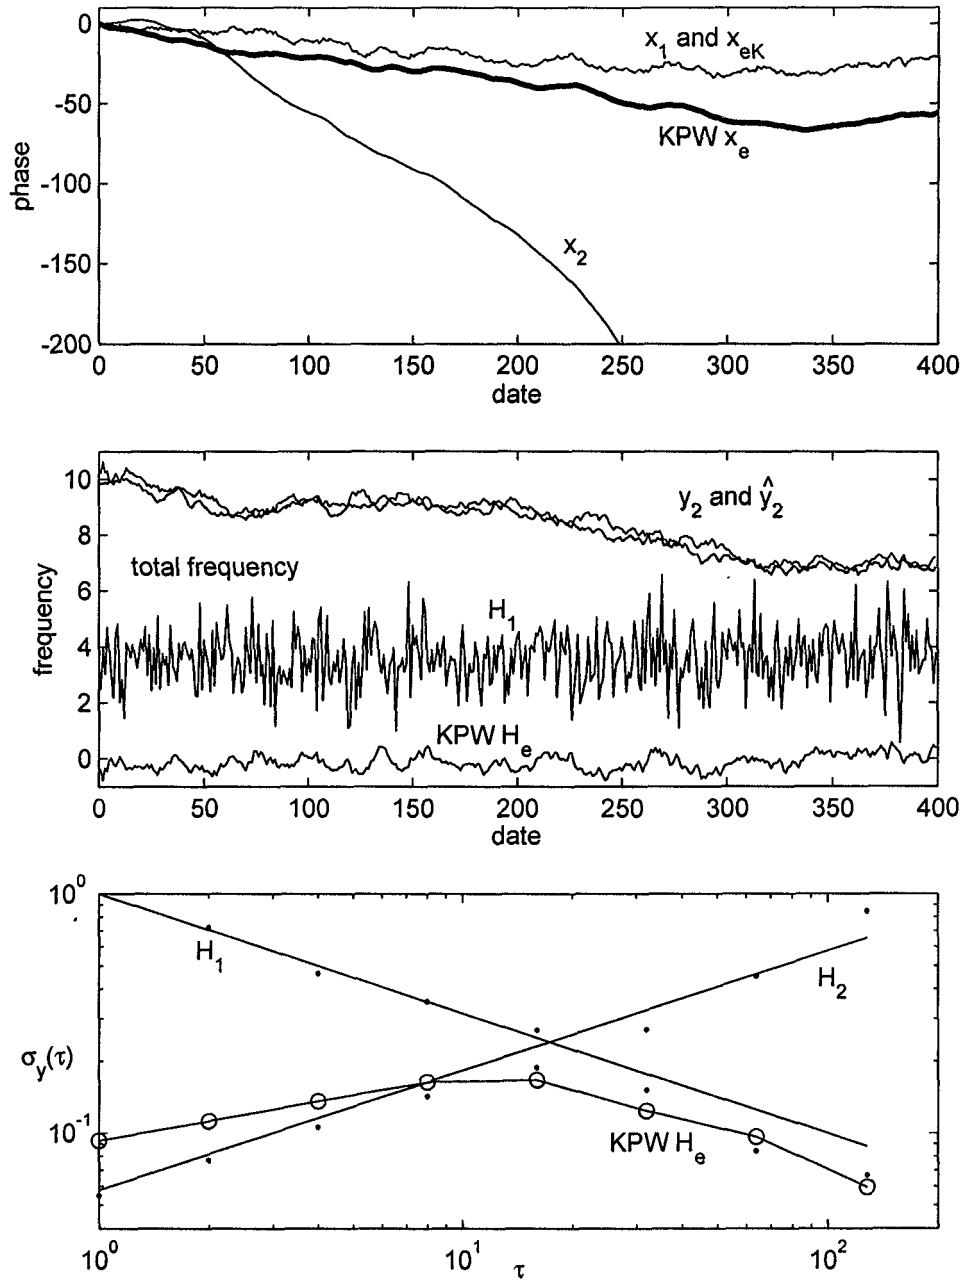


Fig. 1. Two opposite clocks. Clock 1 = white FM, clock 2 = RWFM

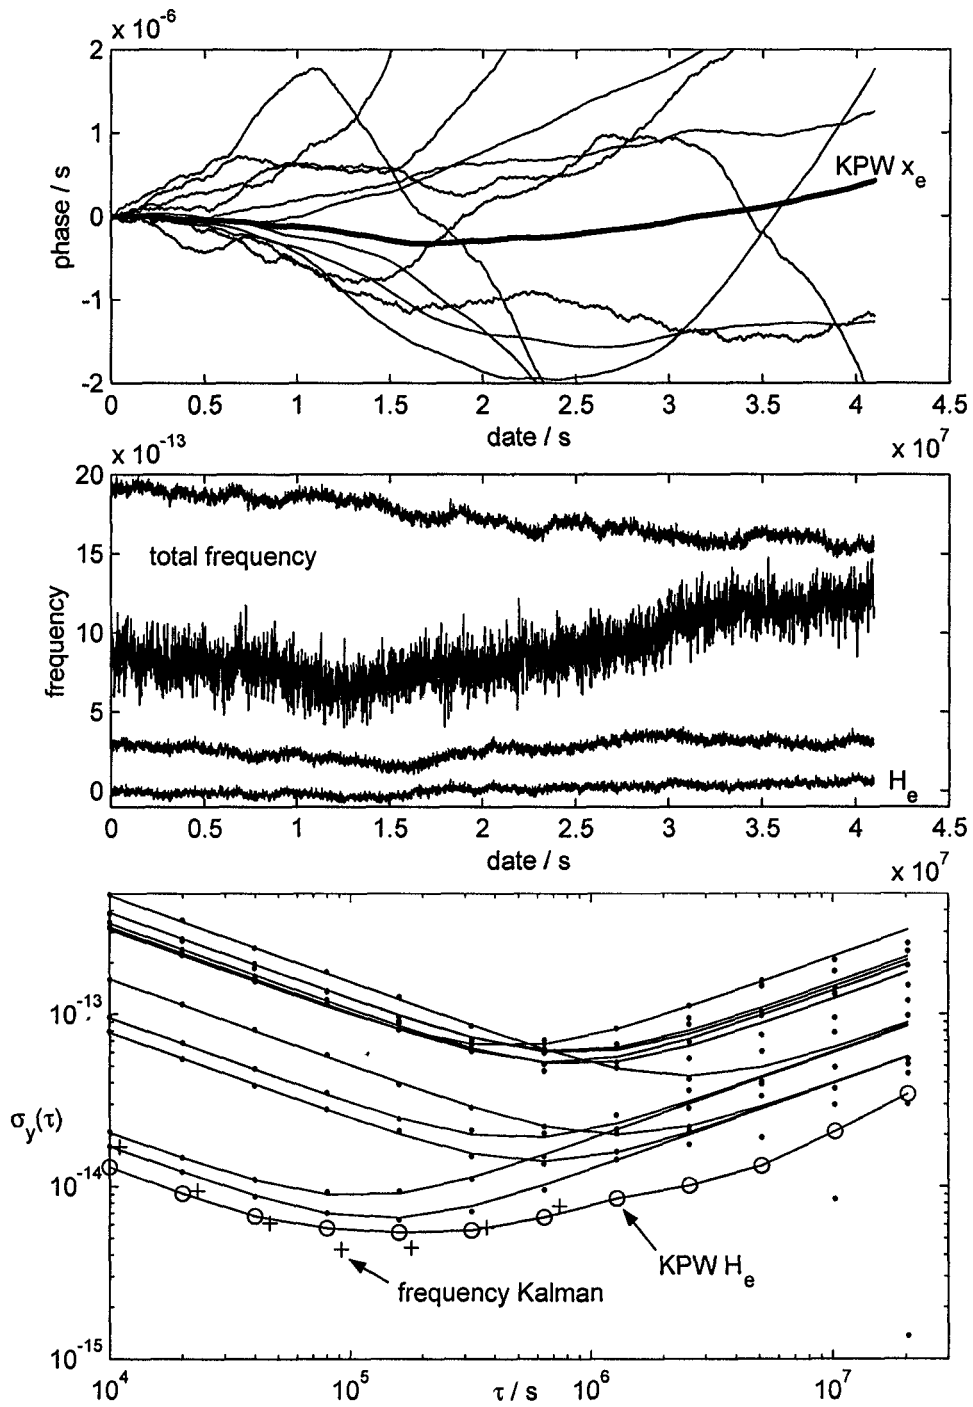


Fig. 2. Eleven simulated NIST Cs clocks

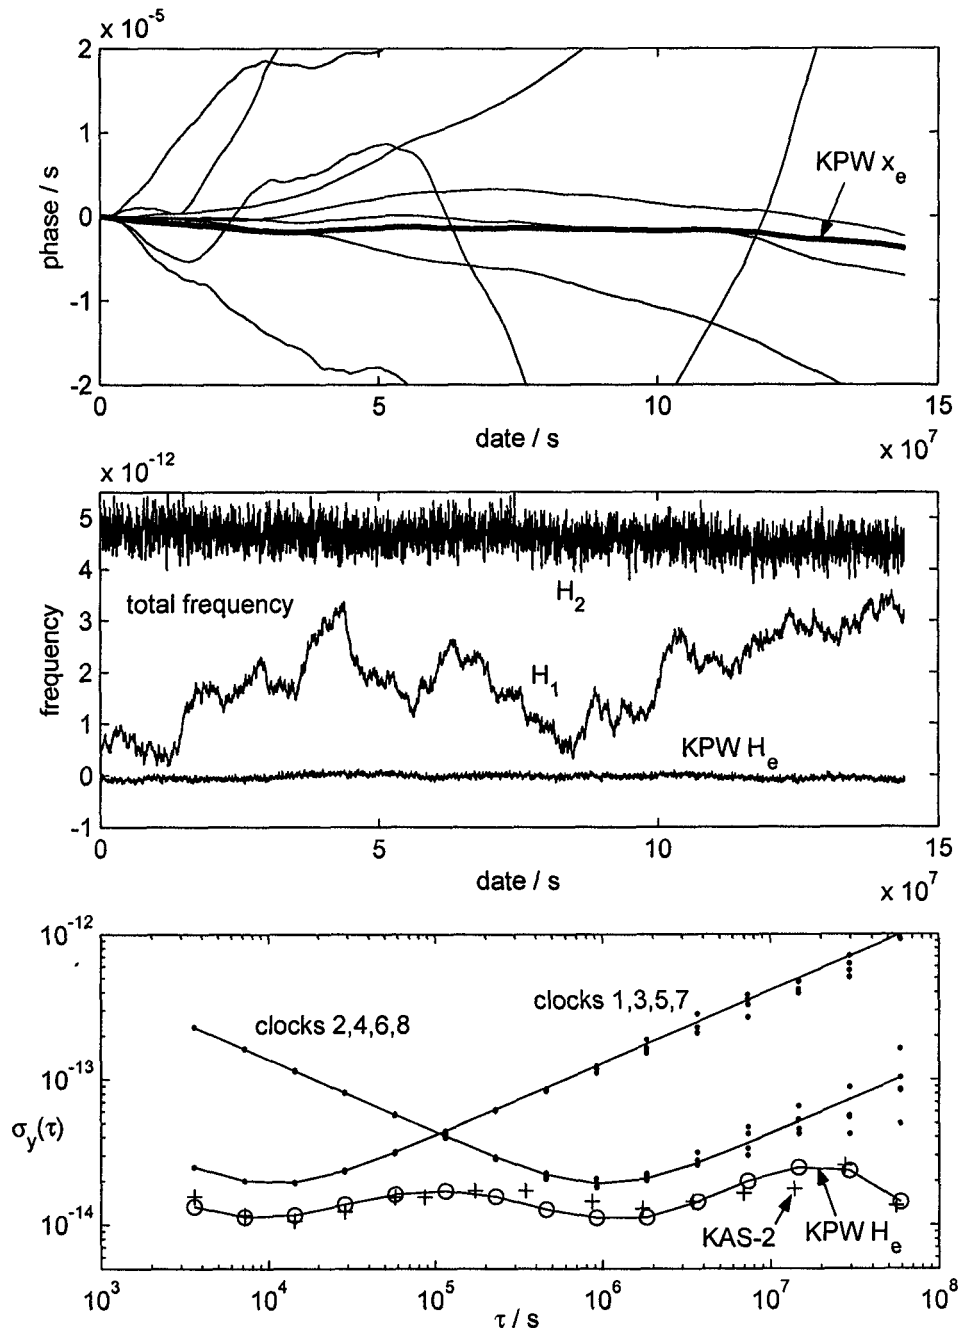


Fig. 3. KPW and KAS-2 on eight simulated clocks