



AFRL-RZ-WP-TP-2012-0125

**COUPLING LOSSES AND TRANSVERSE RESISTIVITY
OF MULTIFILAMENT YBCO COATED
SUPERCONDUCTORS (POSTPRINT)**

M. Polak, E. Usak, L. Jansak, and E. Demencik

Slovak Academy of Sciences

G.A. Levin and P.N. Barnes

**Mechanical Energy Conversion Branch
Energy/Power/Thermal Division**

D. Wehler and B. Moenter

University of Wuppertal

FEBRUARY 2012

Approved for public release; distribution unlimited.

See additional restrictions described on inside pages

STINFO COPY

© 2006 IOP Publishing Ltd.

**AIR FORCE RESEARCH LABORATORY
PROPULSION DIRECTORATE
WRIGHT-PATTERSON AIR FORCE BASE, OH 45433-7251
AIR FORCE MATERIEL COMMAND
UNITED STATES AIR FORCE**

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. **PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.**

1. REPORT DATE (DD-MM-YY) February 2012		2. REPORT TYPE Conference Paper Postprint		3. DATES COVERED (From - To) 01 January 2004 – 01 January 2006	
4. TITLE AND SUBTITLE COUPLING LOSSES AND TRANSVERSE RESISTIVITY OF MULTIFILAMENT YBCO COATED SUPERCONDUCTORS (POSTPRINT)				5a. CONTRACT NUMBER In-house	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER 62203F	
				5d. PROJECT NUMBER 3145	
6. AUTHOR(S) M. Polak, E. Usak, L. Jansak, and E. Demencik (Slovak Academy of Sciences) G.A. Levin and P. N. Barnes (AFRL/RZPG) D. Wehler and B. Moenter (University of Wuppertal)				5e. TASK NUMBER 32	
				5f. WORK UNIT NUMBER 314532ZE	
				8. PERFORMING ORGANIZATION REPORT NUMBER AFRL-RZ-WP-TP-2012-0125	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Mechanical Energy Conversion Branch (AFRL/RZPG) Slovak Academy of Sciences Energy/Power/Thermal Division Institute of Electrical Engineering Air Force Research Laboratory, Propulsion Directorate Bratislava, Slovakia Wright-Patterson Air Force Base, OH 45433-7251 ----- Air Force Materiel Command University of Wuppertal United States Air Force Germany					
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Air Force Research Laboratory Propulsion Directorate Wright-Patterson Air Force Base, OH 45433-7251 Air Force Materiel Command United States Air Force				10. SPONSORING/MONITORING AGENCY ACRONYM(S) AFRL/RZPG	
				11. SPONSORING/MONITORING AGENCY REPORT NUMBER(S) AFRL-RZ-WP-TP-2012-0125	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited.					
13. SUPPLEMENTARY NOTES Conference paper published in the proceedings of the 7 th European Conference on Applied Superconductivity in the <i>Journal of Physics: Conference Series</i> , Vol. 43, 2006. © 2006 IOP Publishing Ltd. The U.S. Government is joint author of the work and has the right to use, modify, reproduce, release, perform, display, or disclose the work. Work on this effort was completed in 2006. PA Case Number: AFRL/WS 06-0222; Clearance Date: 06 Dec 2006.					
14. ABSTRACT We studied the magnetization losses of four different types of filamentary YBCO coated conductors. A 10 mm wide YBCO coated conductor was subdivided into 20 filaments by laser ablation. We measured the frequency dependence of the total losses in the frequency range 0.1 Hz < f < 608 Hz. The coupling loss was obtained from the total by subtracting the hysteresis loss. The latter was measured at low frequencies since only hysteresis loss is nonnegligible at frequencies below 1 Hz. The transverse resistivity, ρ_{tr} , was determined from the coupling losses; it was assumed that the sample length is equal to half of the twist pitch. The values of ρ_{tr} deduced from the loss data were compared with those obtained by the four-point measurements with current flowing perpendicular to the filaments. Preliminary results indicate the existence of electrical contacts between the superconducting filaments and the substrate in some areas of the samples. This was also confirmed by the Hall probe mapping of the magnetic field in the vicinity of the tape. The measured transverse resistivity was close to the resistivity of the substrate (Hastelloy).					
15. SUBJECT TERMS magnetization, filamentary, hysteresis, perpendicular, magnetic field, coated conductor, subdivided, frequency, laser ablation					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT: SAR	18. NUMBER OF PAGES 10	19a. NAME OF RESPONSIBLE PERSON (Monitor) Timothy J. Haugan 19b. TELEPHONE NUMBER (Include Area Code) N/A
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			

Coupling losses and transverse resistivity of multifilament YBCO coated superconductors

M. Polak¹, E. Usak^{1,4}, L. Jansak¹, E. Demencik¹, G. A. Levin², P. N. Barnes², D. Wehler³, B. Moenter³

¹Institute of Electrical Engineering, Slovak Academy of Sciences, Bratislava, Slovakia, ²Air Force Research Laboratory, Wright-Patterson Air Force Base, USA, ³University of Wuppertal, Germany, ⁴Slovak Technical University, Faculty of Electrical Engineering and Information Technology, Bratislava, Slovakia

The corresponding author: M. Polak, elekpola@savba.sk

Abstract. We studied the magnetization losses of four different types of filamentary YBCO coated conductors. A 10 mm wide YBCO coated conductor was subdivided into 20 filaments by laser ablation. We measured the frequency dependence of the total losses in the frequency range $0.1 \text{ Hz} < f < 608 \text{ Hz}$. The coupling loss was obtained from the total by subtracting the hysteresis loss. The latter was measured at low frequencies since only hysteresis loss is non-negligible at frequencies below 1 Hz. The transverse resistivity, ρ_{tr} , was determined from the coupling losses; it was assumed that the sample length is equal to half of the twist pitch. The values of ρ_{tr} deduced from the loss data were compared with those obtained by the four-point measurements with current flowing perpendicular to the filaments. Preliminary results indicate the existence of electrical contacts between the superconducting filaments and the substrate in some areas of the samples. This was also confirmed by the Hall probe mapping of the magnetic field in the vicinity of the tape. The measured transverse resistivity was close to the resistivity of the substrate (Hastelloy).

1. Introduction

A sufficiently ac-tolerant YBCO coated conductor can enable the fully-superconducting version for motors and generators in which both the field and armature windings are superconducting [1]. To reduce hysteresis losses in tapes several millimetres wide, subdividing of the tape into narrow parallel stripes is necessary [2,3]. The resulting conductor is a multifilamentary tape with parallel thin strips (filaments) separated by narrow gaps. The striation can be done using various technologies such as photolithography and wet etching [4] or laser micromachining [5].

The striated (filamentary) tapes become vulnerable to localized defects. This problem can be solved either by covering the filaments by a sufficiently thick normal metal layer with low resistivity metal/YBCO boundary, or by making a network of superconducting bridges, which allow the current sharing between filaments [6]. As shown by Amemyia et al. [7], in filamentary tapes prepared by laser micromachining the total losses contain also a coupling loss component due to the presence of electrically conductive path between the filaments and the metallic substrate [5].

The goal of this work is to determine the frequency dependence of losses in 3 different types of filamentary tapes with multiply connected filaments, prepared from YBCO coated conductors. We

also compare the obtained results with the loss behavior of a non-striated tape and a sample prepared on LaAlO₃ substrate with electrically insulated filaments.

2. Loss components in a filamentary YBCO coated conductor

In samples of filamentary YBCO coated conductors the total losses have several components, as described in [8]. For tapes with relatively wide filaments the main loss components are the hysteresis losses, W_{hyst} , and the coupling losses, W_{coupl} . The hysteresis loss per unit length, P [W/m], in a tape consisting of N_f isolated filaments, can be calculated using the formula of Brandt and Indenbom [9], if we neglect the interaction between the filaments:

$$P = 2 f w_f I_{f,c} B_0 [2B_c / B_0 \ln \cosh(B_0/B_c) - \tanh(B_0/B_c)] N_f, \quad (1)$$

where f is the frequency, w_f is the half filament width, $I_{f,c}$ is the critical current in the filament [A/m]. $I_{f,c}$ is supposed to be constant, independent on the local flux density and on the local electric field. The consequence of this assumption is the independence of the per cycle hysteresis loss on the frequency. Herrmann et al.[10] measured the frequency independent hysteresis losses in 0.1 mm wide YBCO strips. However, numerous measurements of $E(I)$ curves in YBCO samples showed that the slope of these curves can be described by the equation $I = I_0(E/E_0)^n$, where n can have values about 30 [11]. The reduction of the filament width below $\sim 100 \mu\text{m}$ causes the reduction of $J_{f,c}$ and n [12]. The effect of the sample length is analyzed in [13].

3. Experimental

Sample W/1 has 7 filaments 0.5 mm wide on LaAlO₃ substrate, the width and length of the substrate are 4.8 mm and 40 mm. The striation was made by photolithography and wet etching. The following samples were prepared from coated conductor produced by the IBAD method on approximately 100 μm thick, 10 mm wide buffered Hastelloy substrate with a YBCO layer subsequently covered by a $\sim 3\mu\text{m}$ thick Ag layer. Laser micromachining was used to striate the samples. The samples are 100 mm long and were cut from 2 longer pieces of coated conductor. The samples B/0, B/1 and B/2 were cut from a tape with the nominal critical current before striation $I_c = 160$ A. The samples B/3 and B/4 were cut from a tape with I_c in the range from 120 A to 140 A. The sample B/0 is non striated and B/1 is fully striated with 20 filaments (without superconducting bridges). Samples B/2, B/3 and B/4 are also divided into 20 filaments (approximately 0.5 mm wide each) that are interconnected by superconducting bridges, as shown in Fig.1

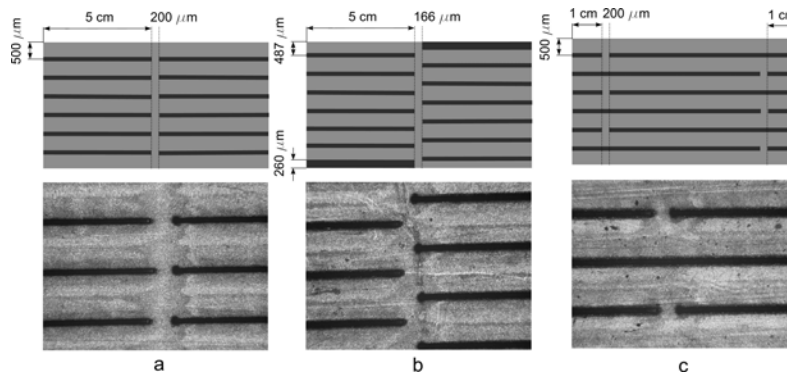


Figure 1. (a) – the sketch and microphotograph of sample B/2, (b) - sample B/3, and (c) -sample B/4.

The losses were measured in a copper dipole coil with the working space with diameter of 40 mm and the field/current constant of 0.97 mT/A at 77 K. At low frequencies (below 0.5 Hz) the losses were measured using pick-up coils and an analog integrator. Above 15 Hz we measured the time

dependence of the pick-up coil difference voltage and the losses were determined using the first harmonics obtained by Fourier analysis of the signal.

4. Results and discussion

Fig. 2 shows the measured dependence of the loss per cycle in samples W/1 and W/2. They are pure hysteresis losses. The increase of A_1 per the change of f by a factor of 10 is $\sim 14\%$ and $\sim 15\%$ for W/1 and W/2, respectively.

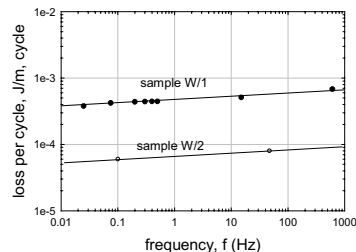


Figure 2. Loss per cycle A_1 vs. frequency for samples W/1 and W/2 at $B_m = 54$ mT

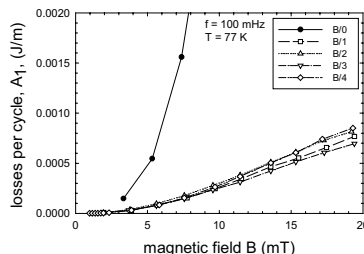


Figure 3. The hysteresis losses of samples B/0, B/1, B/2, B/3 and B/4 measured at low frequency (100 mHz) and 77 K

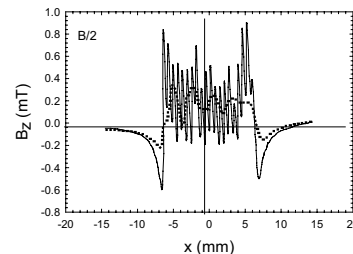


Figure 4. Magnetic field in the vicinity of sample B/2 carrying magnetization currents

In Fig.3 we plotted the loss per cycle, A_1 , measured at frequency 100 mHz, when coupling loss is negligible. As expected, the largest loss is in sample B/0, the difference of losses in the filamentary samples is relatively small. The smallest hysteresis loss at 20 mT ($\sim 7.2 \times 10^{-4}$ J/m) is in sample B/3, losses in sample B/4 are larger by about 25% than those of B/3 ($\sim 9 \times 10^{-4}$ J/m).

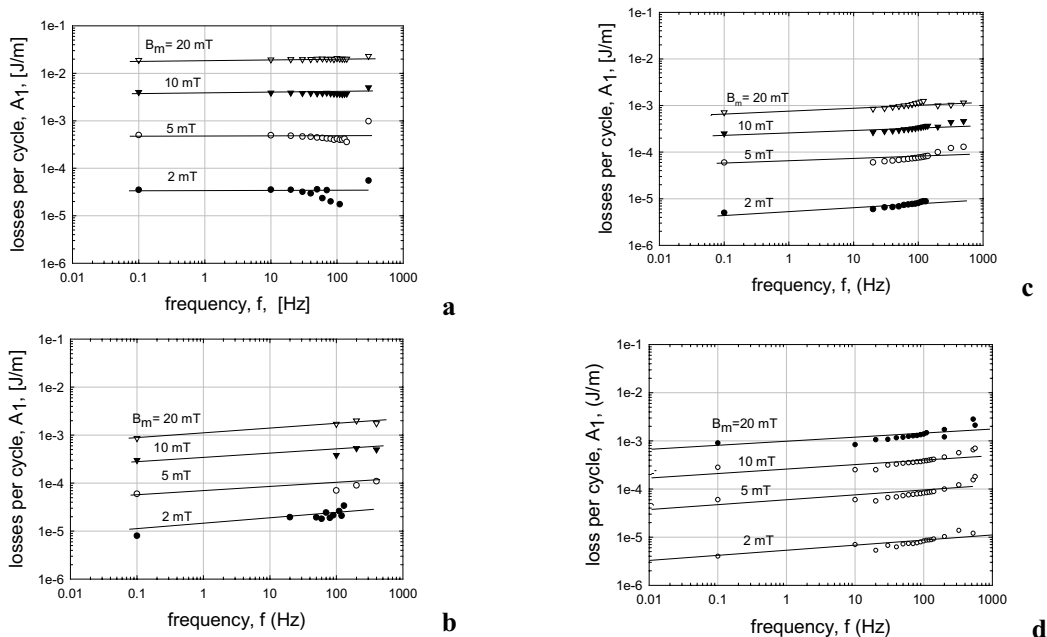


Figure 5. The dependence of losses per cycle on the frequency of the magnetic field at various field amplitudes: a- sample B/0, b – sample B/2, c- sample B/3, d – sample B/4

We mapped the magnetic field in the vicinity of all samples carrying magnetization currents. The measurements showed that the filament separation in some parts of samples B/2 and B/4 is not perfect, so that the effective sample width is a multiple of the filament width 0.5 mm (see Fig.4).

In Fig.5 a, b, c and d we show the losses per cycle of samples B/0, B/2, B/3 and B/4, as a function of the frequency changing from 0.1 Hz to 608 Hz. The largest loss increase has sample B/2 followed by B/4 and B/3. Sample B/0 showed very small increase of losses with increasing frequency (~5 % only). The hysteresis losses, A , are proportional to the critical current, I_c , which increases with increasing frequency, f , as it is controlled by the electric field $E \sim f$. According to the experiments with W/1 and W/2, the hysteresis losses in samples B/2, B/3 and B/4 at 500 Hz were determined by multiplying the losses determined at 0.5 Hz by the factor $3 \times 12\% = 1.36$ (the value 14 % per the decade of f measured at 54 mT was reduced due to smaller $B_m = 20$ mT to 12 %). The coupling losses at 500 Hz, W_{coupl} , were determined by subtracting the hysteresis losses determined at 500 Hz from the measured total losses. The transverse resistivity ρ_{tr} was calculated using the expression for the coupling losses per unit volume

$$W_{\text{coupl}} = (1/4\rho_{\text{tr}})(f B_m 2 L)^2 \quad (2)$$

where L is the sample length and f is frequency. The values of ρ_{tr} obtained for samples B/2, B/3 and B/4 are 2.5×10^{-6} , 1.05×10^{-5} , $3.17 \times 10^{-6} \Omega\text{m}$, respectively. As seen, the values of ρ_{tr} for B/2 and B/4 are close to the resistivity of the substrate ($\sim 1.3 \times 10^{-6} \Omega\text{m}$).

5. Conclusions

The per cycle losses measured in the filamentary YBCO samples with filaments 0.1 mm and 0.5 mm wide at frequencies from ~0.1 Hz up to ~500 Hz were not frequency independent. They increased with increasing frequency by 10 to 15 % per decade of the frequency. The total loss in our samples of filamentary YBCO coated conductors on Hastelloy substrate is affected by finite interfilamentary resistance. This translates into measurable frequency dependence of per cycle loss. Substantial coupling losses were found in all filamentary samples prepared from YBCO coated conductors.

Acknowledgements

The financial support from AFOSR, grant number FA8655-03-1-3082 is gratefully acknowledged. We also acknowledge the support of the Center of Excellence CENG, Slovak Academy of Sciences. M.P. thanks the Alexander von Humboldt Foundation for the support of the work.

References

- [1] P. N. Barnes, G. L. Rhoads, J. C. Tolliver, M. D. Sumption, K. W. Schmaeman, IEEE Trans. Mag. 41, 268 (2005)
- [2] W. J. Carr, C. E. Oberly, IEEE Trans. Appl. Supercond. 9, 1475 (1999)
- [3] C. B. Cobb, P. N. Barnes, T. J. Haugan, J. Tolliver, E. Lee, M. Sumption, E. Collings, and C. E. Oberly, Physica C, 382, 52 (2002).
- [4] M. Polak, L. Krempasky, S. Chromik, D. Wehler, and B. Moenter, Physica C 372-376 (2002) 1830-1834.
- [5] K. E. Hix, M. C. Rendina, J. L. Blackshire, G. A. Levin, cond-mat/0406311
- [6] G. A. Levin, P. N. Barnes, IEEE Trans. on Appl. Superc. 15 (2005) 2158
- [7] N. Amemyia, S. Kasai, K. Yoda, Z. Jiang, G. A. Levin, P. N. Barnes, C. E. Oberly, Supercond. Sci. Technol. 17 (2004) 1464-1471
- [8] Ch. E. Oberly, L. Long, G. L. Rhoads, W. J. Carr Jr., Cryogenics 41 (2001) 117-124
- [9] E. H. Brandt, M. Indenbom, Phys. Rev. B 48 (1993) 12893
- [10] J. Hermann, K.-H. Muller, N. Savvides, S. Gnanarajan, A. Thorley, A. Katsaros, Physica C 341-348 (2000) 2493-2494
- [11] U. Scoop, M. W. Rupich, C. Thieme, D. T. Verebelyi, W. Zhang, X. Li, T. Kodenkandath, N. Nguyen, E. Siegal, L. Civale, T. Holesinger, B. Maiorov, A. Goyal, M. Paranthaman, IEEE Trans. On Appl. Supec. 15 (2005) 2611
- [12] S.I. Kim, D. M. Feldmann, D. C. Larbalestier, D. T. Verebelyi, W. Zhang, C. Thieme, AFOSR HTS Coated Conductor Review, St. Petersburg, FL, January 19-21, 2004
- [13] S. Takacs, F. Gomory, Inst. Phys. Conf. Ser. No. 167 2000 IOP Publishing Ltd., 611-614