

High-frequency Radar Cross Section (RCS) Approximation of a Thin Dielectric Spherical Shell

by Geoffrey H. Goldman and Frank J. Crowne

ARL-TN-0490

July 2012

NOTICES

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

Army Research Laboratory

Adelphi, MD 20783-1197

ARL-TN-0490

July 2012

High-frequency Radar Cross Section (RCS) Approximation of a Thin Dielectric Spherical Shell

Geoffrey H. Goldman and Frank J. Crowne
Sensors and Electron Devices Directorate, ARL

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.				
1. REPORT DATE (DD-MM-YYYY) July 2012		2. REPORT TYPE		3. DATES COVERED (From - To)
4. TITLE AND SUBTITLE High-frequency Radar Cross Section (RCS) Approximation of a Thin Dielectric Spherical Shell		5a. CONTRACT NUMBER		
		5b. GRANT NUMBER		
		5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S) Geoffrey H. Goldman and Frank J. Crowne		5d. PROJECT NUMBER		
		5e. TASK NUMBER		
		5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: RDRL-SES-P 2800 Powder Mill Road Adelphi, MD 20783-1197		8. PERFORMING ORGANIZATION REPORT NUMBER ARL-TN-0490		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S)		
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited.				
13. SUPPLEMENTARY NOTES				
14. ABSTRACT The high-frequency radar cross section (RCS) of a thin-filmed dielectric sphere in the far-field was approximated using a model based on two thin parallel dielectric plates. The results were compared to a solution developed by Andreassen based upon simplified boundary conditions. The models were used to estimate the RCS of a balloon with a diameter of 1 m. There was good agreement between the two methods. The RCS of the balloon was much smaller than an identically sized conducting sphere.				
15. SUBJECT TERMS RCS, balloon, shell, sphere				
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES 14
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified		
				19b. TELEPHONE NUMBER (Include area code) (301) 394-0882

Contents

List of Figures	iv
List of Tables	iv
1. Introduction	1
2. Theory	1
3. Simulation	3
4. Conclusion	4
Appendix A. Matlab Code for the Two Plate Model	5
Appendix B. Mathematica Code for the Model Based on Andreasen	7
Distribution List	8

List of Figures

Figure 1. Simple model of a balloon being illuminated by electromagnetic radiation in the far-field.	1
Figure 2. RCS of a balloon with a diameter of 1 m.	4

List of Tables

Table 1. Parameters used to simulate the RCS of a balloon.	3
---	---

1. Introduction

There is interest in estimating the radar cross section (RCS) of a small balloon in the far-field. The balloon can be modeled as a thin dielectric spherical shell. Accurate approximations have been derived, but they are computationally complex.¹ A simpler solution is to model the balloon as two thin parallel dielectric plates. The reflection coefficients of the plates can be estimated using the Fresnel equations. The RCS can be calculated using algebra and the theory of superposition.

2. Theory

The high frequency RCS of a thin dielectric spherical shell in the far-field of a source is calculated using a simple model and classical results from electromagnetic theory. The spherical shell is modeled as two thin dielectric plates separated by the diameter of the sphere. A visualization of the model is shown in figure 1. The antenna transmits electromagnetic radiation towards the two plates and then receives the returned signal. The index of refraction of the air is n_1 and the index of refraction of the plates is n_2 . The inner radius of the sphere is r and the thickness of the dielectric wall is d .

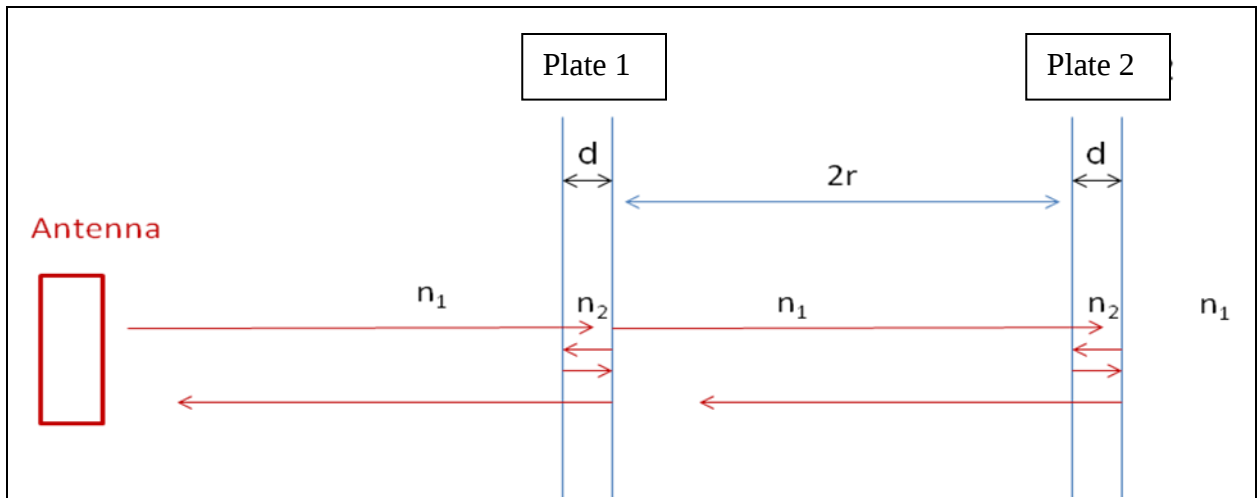


Figure 1. Simple model of a balloon being illuminated by electromagnetic radiation in the far-field.

¹Andreasen, M. G. Back-scattering Cross Section of a Thin, Dielectric, Spherical Shell. *IEEE Transactions on Antennas and Propagation* **1957**, 5 (3), 267–270.

The RCS of each plate can be estimated using the high-frequency RCS approximation of a conducting sphere given by Ruck.² All the preceding calculations are scaled to the RCS calculated using equation 1. The reflection coefficient at the walls can be calculated using the Fresnel equations. For an E-field parallel or perpendicular to the plane of incidence at an angle of 0°, the parallel and perpendicular reflection coefficients are given by

$$\sigma = 4\pi r^2 \quad (1)$$

$$\rho_{\parallel} = -\rho_{\perp} = \frac{n_2 - n_1}{n_2 + n_1} \quad (2)$$

The transmission coefficients for the parallel and perpendicular components of the E-field are given by Hecht and Zajac:³

$$t_{\parallel} = t_{\perp} = \frac{2n_1}{n_2 + n_1} \quad (3)$$

In a thin film, multiple reflections occur between the boundaries, which are summed together to produce an E-field given by

$$E_r(\omega, t) = E_0 e^{j\omega t} p \left(\frac{p(1 - e^{-j\omega 2d})}{1 - p^2 e^{-j\omega 2d}} \right) \quad (4)$$

where E_0 is the initial electric field at the boundary of the plate, ω is the frequency, t is time, and j is an imaginary number.⁴ Based upon the theory of superposition, the total electric field returned from the two films is

$$E_{tot}(\omega, t) = (E_{r1} + E_{r2} e^{-j\omega 4r}) e^{j\omega t} \quad (5)$$

Summing these two signals creates an interference pattern as a function of frequency. Since the signal reflected by the thin films is very small, multiple bounces between the wall 1 and wall 2 are ignored.

²Ruck G. T. et al. *Radar Cross Section Handbook - Volumes 1*; Plenum Press, New York, 1970.

³Hecht, E.; Zajac, A. *Optics*, Addison-Wesley, 1979, p. 75.

⁴Hecht, E.; Zajac, A. *Optics*, Addison-Wesley 1979, p. 304.

3. Simulation

The RCS of a balloon with a diameter of 1 m and a dielectric constant representing latex was calculated using equations 1–5 and results from a simulation based upon a paper by Andreasen.¹ The dielectric constant was assumed to be real and have no attenuation effects. Table 1 shows the values of the parameters used in the simulation. The code for the two plate model was written in Matlab and is listed in appendix A. The code for the model based upon Andreasen’s paper was written in Mathematica and is listed in appendix B.

Table 1. Parameters used to simulate the RCS of a balloon.

Parameter	Value
Dielectric constant of air	1
Dielectric constant of the balloon	2.5
Radius of balloon	0.5 m
Mass of balloon	0.05 Kg
Density of balloon material	940 Kg/m ³
Speed of light	3e8 m/s

Figure 2 shows the estimated RCS of the balloon as a function of frequency, where “2 plate” in legend denotes the two plate model and “Andreasen” denotes the results calculated using Andreasen’s method. The RCS calculated using the two models are in reasonable agreement and the frequency of the interference patterns matches closely. As the frequency is increased, the RCS trends higher. This is because the effective reflection coefficients for the two plates are smaller at lower frequencies. The multiple bounces in the dielectric film cancel better at lower frequencies. The RCS of a perfectly conducting sphere of the same size has a RCS of approximately -1 dBsm, which is much larger than the estimated RCS of the balloon.

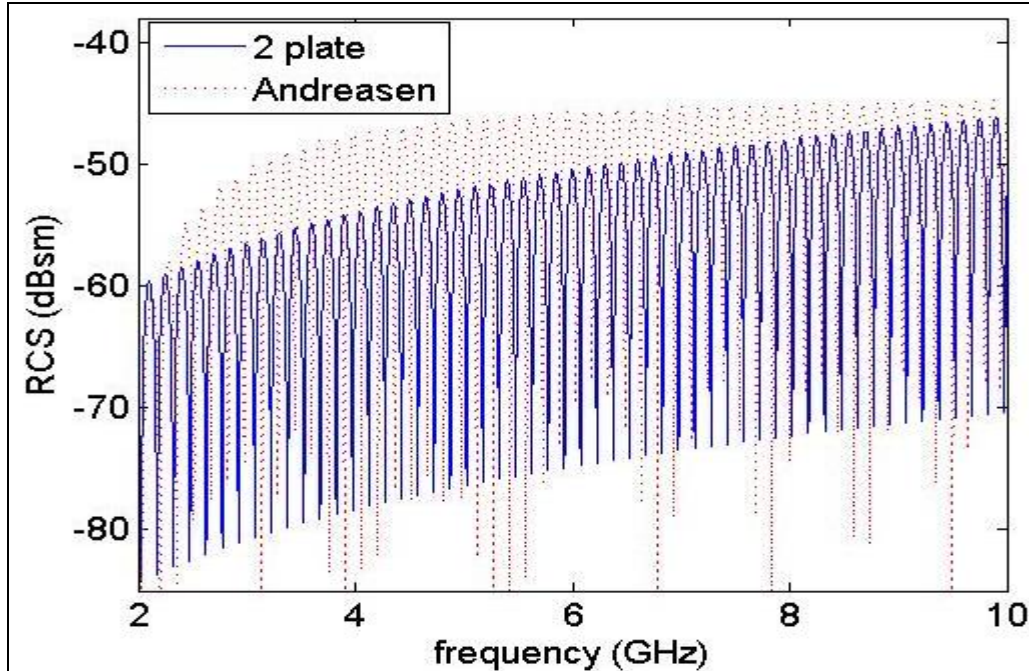


Figure 2. RCS of a balloon with a diameter of 1 m.

4. Conclusion

A model was developed to estimate the high-frequency RCS of a dielectric spherical shell. The model is based upon approximating the shell with two thin parallel dielectric plates. The model was used to estimate the RCS of a balloon with a 1-m diameter. The results were in reasonable agreement with a method developed by Andreasen. The RCS of a balloon with a 1-m diameter was determined to be much smaller than the RCS conducting sphere with the same dimensions for the frequencies of interest. For many scenarios, the RCS of a balloon can be considered negligible.

Appendix A. Matlab Code for the Two Plate Model

```
% matlab code to calculate the RCS of a balloon
% written by Geoffrey Goldman in September 2009
% modified August 2011

ep=2.5;      % epsilon for latex
nt=ep^0.5;   % latex index of refraction
ni=1;        % air
c=3e8;       % speed of light

mass=.05;    % kg
p=940;       % density
radius=0.5;  % radius of sphere (meters)

area=4*pi*radius^2; % approximate surface area of balloon

dr=mass/(p*area); % approximate width of balloon

radius=radius-dr; % radius of air sphere
area=4*pi*(radius+dr/2)^2; % surface area of balloon

dr=mass/(p*area); % width of balloon

r_par=(nt-ni)/(nt+ni); % 4.47, pg 75, E Hecht, A Zajac, Optics
r_per=-r_par;

t=2*ni/(ni + nt); % both par and perpen 4.48 pg 75 ,E Hecht, A Zajac, Optics

tp_par=2*nt/(ni + nt);
tp_per=2*nt/(ni + nt);

t_tp=1-r_par^2;

E0 = (pi*radius^2)^0.5;

freq_array=(2:0.0025:10)*1e9; % calculate at these frequencies
[temp,Nfreq]=size(freq_array);

ifreq=0;

for freq1=1:Nfreq

    freq=freq_array(ifreq);
    lambda_air=c/freq;
    lambda_balloon=c/(freq*nt);
    phase_term=exp(-j*4*pi*dr/lambda_balloon);

    E0r_par=E0*r_par*(1-phase_term)/(1-phase_term*r_par^2); % pg 305 , 9.29
    b, E Hecht, A Zajac, Optics
```

```

    E0r_per=E0*r_per*(1-phase_term)/(1-phase_term*r_per^2); % pg 305 , 9.29
    b, E Hecht, A Zajac, Optics

    E0t_par=E0*t_tp/(1-phase_term*r_par^2); % pg 305 , 9.29 b, E Hecht, A
    Zajac, Optics
    E0t_per=E0*t_tp/(1-phase_term*r_per^2); % pg 305 , 9.29 b, E Hecht, A
    Zajac, Optics

    E0r_par=E0r_par + E0t_par^2*(E0r_par/E0)*exp(-j*radius*8*pi/lambda_air);
    E0r_per=E0r_per + E0t_per^2*(E0r_per/E0)*exp(-j*radius*8*pi/lambda_air);

    rcs_par(ifreq)=abs(E0r_par)^2;
    rcs_per(ifreq)=abs(E0r_per)^2;
end

load 'jeff.txt' % load results from Andreasen model calculated by Frank
Crowne

figure
plot(freq_array/1e9,10*log10(rcs_par));
hold on
plot(jeff(:,1),jeff(:,2),'r')
% plot(freq_array,10*log10(rcs_per),'r');
% hold on
plot(freq_array/1e9,20*log10(E0*ones(1,Nfreq)),'m.-')
legend('model1','model2','conducting sphere')
ylabel('RCS (dBsm)')
xlabel('frequency (GHz)')
zoom on

f=figure
plot(freq_array/1e9,10*log10(rcs_par/E0^2));
hold on
plot(jeff(:,1),jeff(:,2),'r')
legend('2 plate','Andreasen')
ylab=ylabel('RCS (dBsm)')
xlab=xlabel('frequency (GHz)')

ca=get(f,'CurrentAxes')

set(gcf,'DefaultLineLineWidth',1.5);
set(xlab,'fontsize',14);
set(ylab,'fontsize',14);
set(ca,'fontsize',14);
axis([2 10 -80 -40])

```

Appendix B. Mathematica Code for the Model Based on Andreassen

Mathematica code to simulate the RCS of a balloon using a method developed by Andreassen

Written by Frank Crowne, 2011

```
(* derivatives of terms in series *)
D[x SphericalBesselJ[n,x], x]
1/2 (x SphericalBesselJ[?1+n,x] + SphericalBesselJ[n,x] ? x
SphericalBesselJ[1+n,x])
D[x SphericalHankelH2[n,x], x]
1/2 (x SphericalHankelH2[?1+n,x] + SphericalHankelH2[n,x] ? x
SphericalHankelH2[1+n,x])
(* assembling series terms *)
R[n_,x1_,s_]:=
(F1=1/2 (x1 SphericalBesselJ[?1+n,x1] + SphericalBesselJ[n,x1] ? x1
SphericalBesselJ[1+n,x1]);
G1=1/2 (x1 SphericalHankelH2[?1+n,x1] + SphericalHankelH2[n,x1] ?x1
SphericalHankelH2[1+n,x1]);
1/(1+I s F1 G1))
(* evaluate R[4,1.,.6] as a check *)
R[4,1.,.6]
0.435717-2.80521*10^-6 I
S[n_,x1_,s_]:=
( F1=x1 SphericalBesselJ[n,x1];
G1=x1 SphericalHankelH2[n,x1];
1/(1+I s F1 G1) )
(* complete n-th series term expressed as Mathematica function *)
SERTERM[n_,x1_,s_]:=
( F1=1/2 (x1 SphericalBesselJ[?1+n,x1] + SphericalBesselJ[n,x1] ? x1
SphericalBesselJ[1+n,x1]);
F2=x1 SphericalBesselJ[n,x1];
(?1)^n (2n+1) (F1^2 R[n, x1, s] ? F2^2 S[n, x1, s]) )
(* calculate series for RCS *)
RCS[x1_,s_]:= (s/x1)^2 Abs[Sum[SERTERM[n, x1, s],{n,10}]]^2
RCS[.3,5.]
0.00576843

Plot[ RCS[x1,.4],{x1,0.,5.}]
```

NO. OF COPIES	ORGANIZATION
1 ELEC	ADMNSTR DEFNS TECHL INFO CTR ATTN DTIC OCP 8725 JOHN J KINGMAN RD STE 0944 FT BELVOIR VA 22060-6218
1	US ARMY INFO SYS ENGRG CMND ATTN AMSEL IE TD A RIVERA FT HUACHUCA AZ 85613-5300
5	US ARMY RSRCH LAB ATTN IMNE ALC HRR MAIL & RECORDS MGMT ATTN RDRL CIO LL TECHL LIB ATTN RDRL CIO LT TECHL PUB ATTN RDRL SER E F CROWNE ATTN RDRL SES P G GOLDMAN ADELPHI MD 20783-1197