



**AFRL-RZ-WP-TP-2012-0020**

**PROPERTIES OF A YBCO PANCAKE COIL OPERATING  
WITH AC CURRENT AT FREQUENCIES UP TO 1000 HZ  
(POSTPRINT)**

**M. Polak, E. Demencik, L. Jansak, E. Usak, and P. Mozola**

**Slovak Academy of Sciences**

**C.L.H. Thieme and D. Aized**

**American Superconductor Corporation**

**G.A. Levin and P.N. Barnes**

**Mechanical Energy Conversion Branch**

**Energy/Power/Thermal Division**

**FEBRUARY 2012**

**Approved for public release; distribution unlimited.**

*See additional restrictions described on inside pages*

**STINFO COPY**

**© 2006 IEEE**

**AIR FORCE RESEARCH LABORATORY  
PROPULSION DIRECTORATE  
WRIGHT-PATTERSON AIR FORCE BASE, OH 45433-7251  
AIR FORCE MATERIEL COMMAND  
UNITED STATES AIR FORCE**

# REPORT DOCUMENTATION PAGE

Form Approved  
OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. **PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.**

<b>1. REPORT DATE (DD-MM-YY)</b> February 2012		<b>2. REPORT TYPE</b> Journal Article Postprint		<b>3. DATES COVERED (From - To)</b> 01 June 2004 – 01 June 2006	
<b>4. TITLE AND SUBTITLE</b> PROPERTIES OF A YBCO PANCAKE COIL OPERATING WITH AC CURRENT AT FREQUENCIES UP TO 1000 HZ (POSTPRINT)				<b>5a. CONTRACT NUMBER</b> In-house	
				<b>5b. GRANT NUMBER</b>	
				<b>5c. PROGRAM ELEMENT NUMBER</b> 62203F	
				<b>5d. PROJECT NUMBER</b> 3145	
<b>6. AUTHOR(S)</b> M. Polak, E. Demencik, L. Jansak, E. Usak, and P. Mozola (Slovak Academy of Sciences) C.L.H. Thieme and D. Aized (American Superconductor Corporation) G.A. Levin and P.N. Barnes (AFRL/RZPG)				<b>5e. TASK NUMBER</b> 04	
				<b>5f. WORK UNIT NUMBER</b> 314532ZE	
				<b>8. PERFORMING ORGANIZATION REPORT NUMBER</b> AFRL-RZ-WP-TP-2012-0020	
<b>7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)</b> Slovak Academy of Sciences Institute of Electrical Engineering 841 04 Bratislava, Slovakia ----- American Superconductor Corporation Westborough, MA 01581				Mechanical Energy Conversion Branch (AFRL/RZPG) Energy/Power/Thermal Division Air Force Research Laboratory, Propulsion Directorate Wright-Patterson Air Force Base, OH 45433-7251 Air Force Materiel Command, United States Air Force	
<b>9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)</b> Air Force Research Laboratory Propulsion Directorate Wright-Patterson Air Force Base, OH 45433-7251 Air Force Materiel Command United States Air Force				<b>10. SPONSORING/MONITORING AGENCY ACRONYM(S)</b> AFRL/RZPG	
				<b>11. SPONSORING/MONITORING AGENCY REPORT NUMBER(S)</b> AFRL-RZ-WP-TP-2012-0020	
<b>12. DISTRIBUTION/AVAILABILITY STATEMENT</b> Approved for public release; distribution unlimited.					
<b>13. SUPPLEMENTARY NOTES</b> Journal article published in <i>IEEE Transactions on Applied Superconductivity</i> , Vol. 16, No. 2, June 2006. © 2006 IEEE. The U.S. Government is joint author of the work and has the right to use, modify, reproduce, release, perform, display, or disclose the work. PA Case Number: AFRL/WS-06-0220; Clearance Date: 06 December 2006. This technical paper contains color.					
<b>14. ABSTRACT</b> A small pancake coil was wound using 1.2m long, 10 mm wide YBCO coated superconductor tape with impregnation by epoxy resin. The coil was immersed in liquid nitrogen and tested in several regimes. In the DC regime, we measured the I-V curve, the hysteresis of the magnetic field-current curve at liquid nitrogen temperature and the radial component of the coil field at the coil edges. The critical currents of a short sample at 77K were also measured and compared with those of the coil. The AC losses measured in the frequency range from 60 Hz to 1000 Hz are compared with those of a similar coil wound with copper tape. The coil heating due to AC losses was monitored. At 60 Hz, the losses of the YBCO coil were nearly two orders of magnitude lower than those in the Cu coil. With increasing frequency, this difference becomes smaller, but the YBCO coil still exhibited lower losses at 1000 Hz.					
<b>15. SUBJECT TERMS</b> losses, magnetic fields, superconducting magnets					
<b>16. SECURITY CLASSIFICATION OF:</b>			<b>17. LIMITATION OF ABSTRACT:</b> SAR	<b>18. NUMBER OF PAGES</b> 10	<b>19a. NAME OF RESPONSIBLE PERSON (Monitor)</b> Timothy Haugan <b>19b. TELEPHONE NUMBER (Include Area Code)</b> N/A
<b>a. REPORT</b> Unclassified	<b>b. ABSTRACT</b> Unclassified	<b>c. THIS PAGE</b> Unclassified			

# Properties of a YBCO Pancake Coil Operating With AC Current at Frequencies up to 1000 Hz

M. Polak, E. Demencik, L. Jansak, E. Usak, P. Mozola, C. L. H. Thieme, D. Aized, G. A. Levin, and P. N. Barnes

**Abstract**—A small pancake coil was wound using 1.2 m long, 10 mm wide YBCO coated superconductor tape with impregnation by epoxy resin. The coil was immersed in liquid nitrogen and tested in several regimes. In the DC regime, we measured the I-V curve, the hysteresis of the magnetic field-current curve at liquid nitrogen temperature and the radial component of the coil field at the coil edges. The critical currents of a short sample at 77 K were also measured and compared with those of the coil. The AC losses measured in the frequency range from 60 Hz to 1000 Hz are compared with those of a similar coil wound with copper tape. The coil heating due to AC losses was monitored. At 60 Hz, the losses of the YBCO coil were nearly two orders of magnitude lower than those in the Cu coil. With increasing frequency, this difference becomes smaller, but the YBCO coil still exhibited lower losses at 1000 Hz.

**Index Terms**—Losses, magnetic fields, superconducting magnets.

## I. INTRODUCTION

THE APPLICATION of YBCO coated conductors in AC devices is often considered, however, the main focus of industry is currently on the improvement of the DC conductor properties such as critical currents. These conductors have the shape of a flat tape several millimeters wide (typically 4 or 10 mm) with thickness of the order of 0.1 mm [1]. A stack of pancake type coils is preferred to make the application windings when using wide tapes. For coils made with Bi-2223/Ag tapes it was shown that the magnetic anisotropy strongly affects the distribution of the current density inside the tapes [2]. The critical current of the coil is also limited by the largest magnetic field component perpendicular to the tape plane [3]. Since the tape in the pancakes located at the ends of the coil is exposed to an inhomogeneous magnetic field, it is not a straightforward procedure to determine the critical current distribution [4], [5]. Similar problems will also appear in coils wound with YBCO coated conductors.

When conductor is placed in an AC environment, the direction of the magnetic field with respect to the wide face of the

Manuscript received September 20, 2005. This work was supported by AFOSR, Grant FA8655-03-1-3082. This work was also supported in part by the Center of Excellence CENG, Slovak Academy of Sciences. The work of M. Polak was supported by the Alexander von Humboldt Foundation.

M. Polak, E. Demencik, L. Jansak, E. Usak, and P. Mozola are with the Institute of Electrical Engineering, Slovak Academy of Sciences, 841 04 Bratislava, Slovakia (e-mail: elekpola@savba.sk).

C. L. H. Thieme and D. Aized are with the American Superconductor Corporation, Westborough, MA 01581 USA (e-mail: CThieme@amsuper.com).

G. A. Levin and P. N. Barnes are with the Air Force Research Laboratory, Wright-Patterson Air Force Base, OH 45433 USA (e-mail: paul.barnes@wpafb.af.mil).

Digital Object Identifier 10.1109/TASC.2006.870774

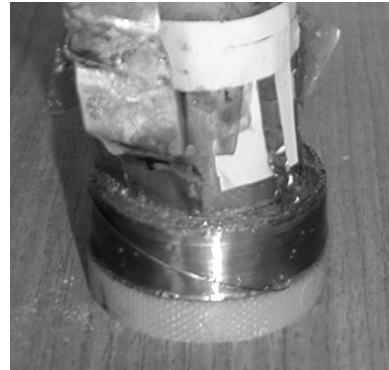


Fig. 1. A photograph of the YBCO coil.

tape plays an additional important role. According to Brandt and Indenbom [6], the hysteresis loss in YBCO with a transversely applied magnetic field is directly proportional to the tape width [7]–[9]. Amemiya *et al.* have shown that in the case of an arbitrary orientation of the magnetic field AC losses are proportional to the transverse component of the field [10]. As such, it is important to have information on the AC behavior of coils made of standard, nonstriated YBCO coated conductor. It is of particular interest to obtain AC loss data of a coil at a wide range of frequencies for a better understanding of the AC characteristics of the HTS winding [11]. In this work, we compare the AC behavior of a pancake coil wound with a YBCO coated conductor with that of a similar coil wound of copper tape. Both coils were cooled by liquid nitrogen.

## II. EXPERIMENTAL

### A. Description of YBCO Coil and Cu Coil

The YBCO coil was made using a 1.2m length of copper-stabilized YBCO coated conductor. It was co-wound with wet, epoxy-saturated fiberglass cloth on a G10 coil form, and had an inner and outer diameter of 25.8 mm and 33.8 mm, respectively, after completion. The total number of turns in the winding was 13. Fig. 1 is a photograph of the coil.

The conductor was made using a RABIT's architecture: Ni-5 at% W substrate with a sputtered  $Y_2O_3$  seed layer, a YSZ barrier layer, and a  $CeO_2$  cap layer [12], [13]. The substrate had a Curie temperature of  $\sim 60^\circ C$  and is ferromagnetic at 77 K [14], which may contribute to the coil's inductance. The 0.8  $\mu m$  YBCO layer was deposited using a TFA-based solution process and subsequently capped with a 3  $\mu m$  Ag layer to which a 50  $\mu m$  thick Cu foil was laminated. The copper coil was made using a  $\sim 110 \mu m$  thick, 1.26m long copper tape, 10 mm wide, with a resistivity of  $1.8 \times 10^{-7} \Omega cm$  at 77 K.

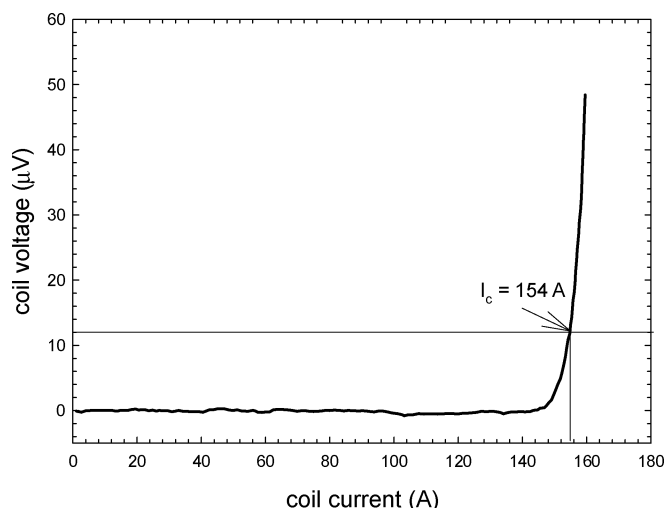


Fig. 2. I-V curve of the coil with a DC current, at 77 K.

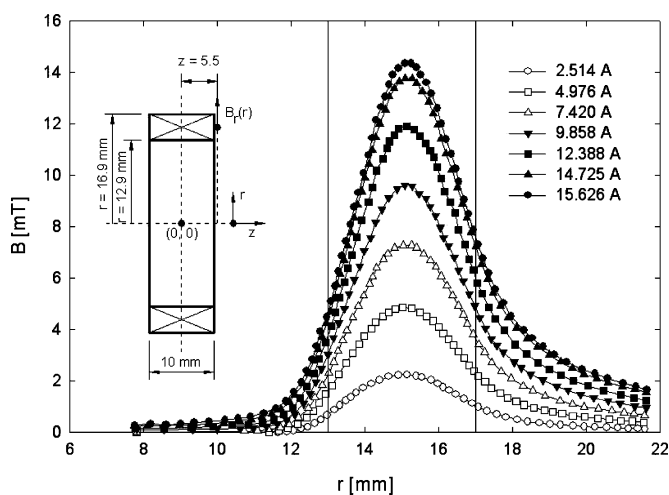


Fig. 3. The radial field component,  $B_r$  as a function of the radial position,  $r$ , measured at various current (rms) at 500 Hz.

The number of turns, the inner and outer coil diameter, and the insulation were the same as those of the YBCO coil. A NORMA Power Analyzer 4000D was used to measure the losses of the coil.

### III. RESULTS AND DISCUSSION

The DC critical current of the coil using a slowly increasing transport current was 154 A for which the coil voltage was  $12 \mu\text{V}$  (see Fig. 2). This corresponds to a mean electric field of  $0.1 \mu\text{V}/\text{cm}$  and to a mean winding current density of  $5000 \text{ A}/\text{cm}^2$ . Optimization of the engineering current density of the windings was not considered. At 154 A, the axial field at the coil center,  $B_z(r = 0)$ , is 80 mT and at the inner turn of the coil,  $B_z(r = 20 \text{ mm})$ , it is 145 mT calculated assuming a constant current density in the tape.

Using a small active area Hall probe we measured the radial field component,  $B_r(r)$ , close to the longitudinal edge of the coil ( $z = 5.5 \text{ mm}$ ). In Fig. 3 we show the typical set of  $B_r(r)$  curves measured at 500 Hz and various coil currents. The signal 2 proximations are not sufficient.

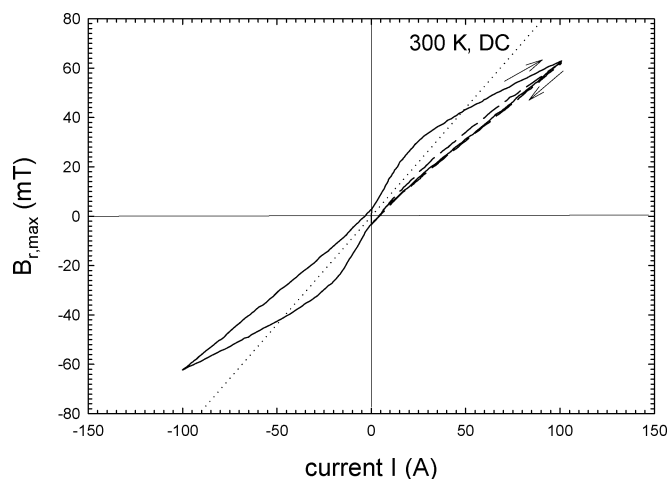


Fig. 4. Maximal values of the radial field component  $B_{r,\text{max}}$  ( $r = 15 \text{ mm}$ ) as a function of DC current: at room temperature (dotted line), at 77 K and a half cycle  $0 \rightarrow 100 \text{ A} \rightarrow 0$  (dashed line) and at 77 K and the full cycle  $0 \rightarrow 100 \text{ A} \rightarrow 0 \rightarrow -100 \text{ A} \rightarrow 0$  (full lines).

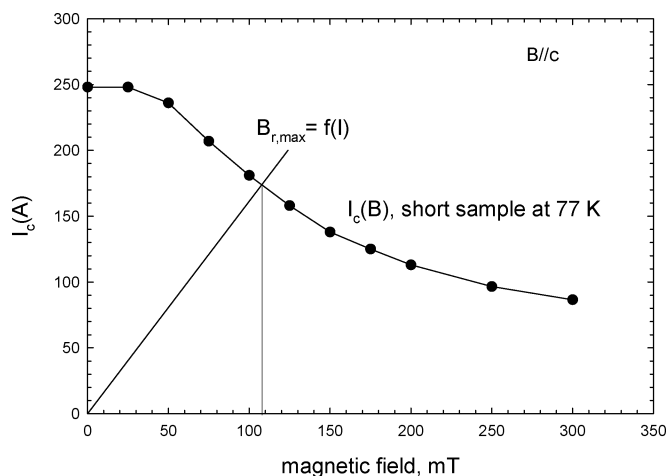


Fig. 5. The load line  $B_{r,\text{max}}(I)$  and  $I_c(B)$  curve of the YBCO tape used in the coil.

of  $B_r(t)$  was not perfectly sinusoidal. The values of  $B_r$  are its first harmonics. The radial component of the coil field measured at  $z = 5.5 \text{ mm}$  has a maximum,  $B_{r,\text{max}}$ , at  $r_m \cong 15 \text{ mm}$  (in the middle of the winding thickness). The measurements were repeated with the coil in the normal state (300 K) and at 77 K.  $B_{r,\text{max}}$  is plotted vs. coil current in Fig. 4. The values of  $B_{r,\text{max}}$  increase linearly with increasing current at 300 K, but at 77 K they have a hysteresis character. This behavior further indicates an inhomogeneous current distribution in the tape.

In Fig. 5, the  $B_{r,\text{max}}(I)$  load line represents the maximal radial magnetic field which is directly proportional to the current (the hysteresis seen in Fig. 4 is not taken into account). The  $I_c(B)$  curve represents the critical current of the YBCO conductor when exposed to a uniform external field  $B$  that is equal to  $B_{r,\text{max}}$ . Since the critical current of the coil (154 A) is smaller than the point of intersection of the two curves (173 A), the nonuniformity of the induced magnetic field acting on the tape is an effect that must be considered and that uniform field approximations are not sufficient.

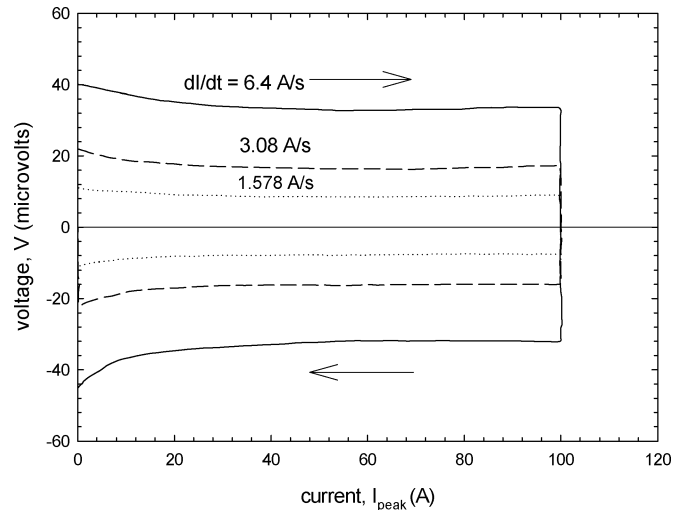


Fig. 6. Coil voltage measured vs. current for triangular current waves with  $dI/dt = 6.4 \text{ A/s}$  ( $\bullet$ ),  $3.08 \text{ A/s}$  ( $\circ$ ) and  $1.578 \text{ A/s}$  ( $\diamond$ ).

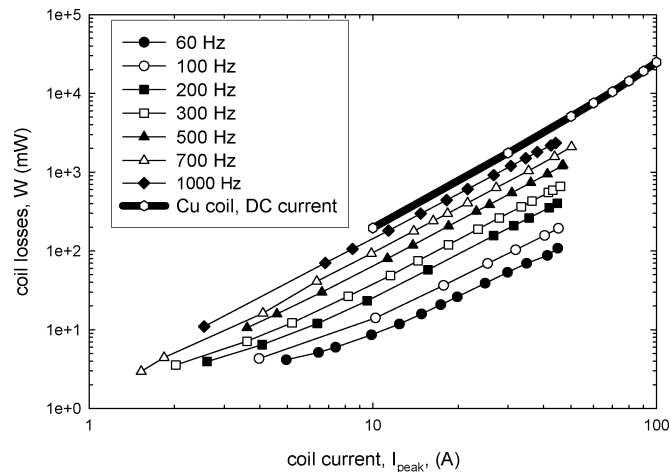


Fig. 7. The measured total AC losses of the YBCO and Cu coils as a function of the coil current  $I_{rms}$  at various frequencies from 60 Hz (bottom curve) up to 1000 Hz (upper curve). The losses of Cu coil were measured with DC current.

An initial improvement of this situation could be made by using  $B_r$  for a circular current loop, which can be readily expressed, in complete elliptical integrals. One would then integrate the expected critical current across the tape due to this field approximation.

The observed behavior of  $B_r$  and its nonuniformity demonstrate the need for new procedures to determine ac losses other than simple extrapolation from short sample data.

To determine the coil inductance,  $L$ , we recorded the coil voltage,  $V$ , while applying triangular transport current waves with the amplitude of 50 A at frequencies of 50, 100, and 200mHz (Fig. 6). With  $V = L dI/dt$ , the shape of the curves shows that  $L$  depends on the current at low current values, ranging from  $\sim 7 \mu\text{H}$  at  $I = 0$  to  $\sim 5 \mu\text{H}$  with increasing currents. At higher currents,  $L$  is current independent which independence tends to shift to higher current levels as  $dI/dt$  increases.

Loss measurements for the YBCO coil at frequencies from 60 to 1000 Hz are shown in Fig. 7. We also show the losses of the

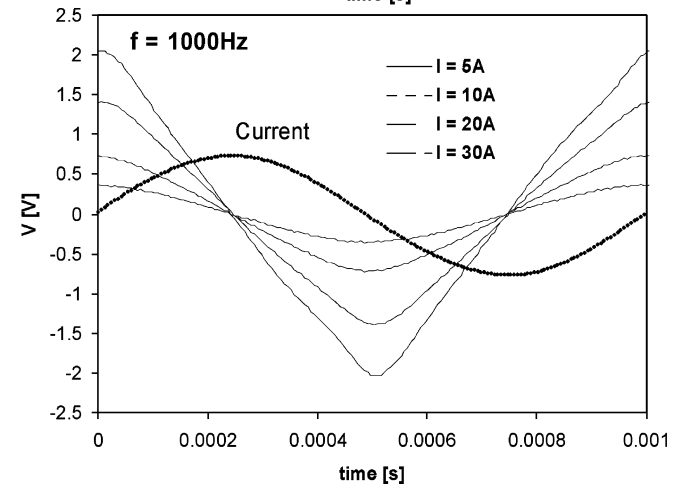
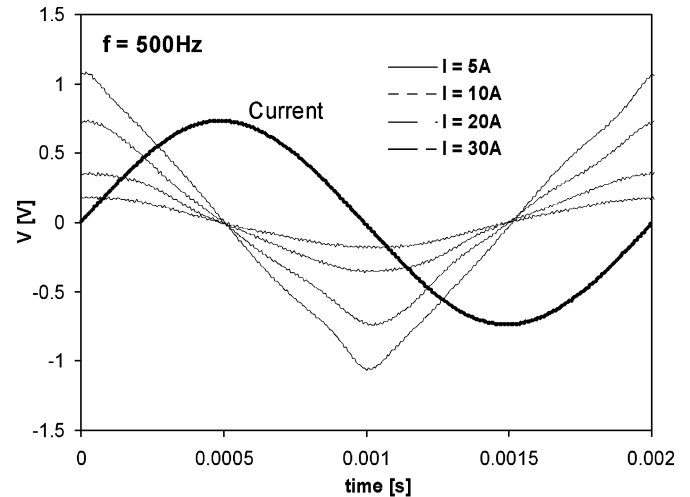


Fig. 8. Coil voltage  $V$  vs. time  $t$ , measured at 500 Hz and 1000 Hz at various current (rms values).

Cu coil with a DC current. There is little difference in losses of the Cu coil between the DC and AC 100 Hz currents. The total losses of both coils increase proportional to  $I^n$ , where  $n \cong 1.7$  at a frequency of 60 Hz and  $n \cong 1.9$  at 1000 Hz.

The losses of the copper coil are proportional to  $I^2$  as predicted by theory. However, considerable heating of the Cu coil was observed at larger currents as deduced from the I-V curve, 8.9 K at  $I = 100 \text{ A}$ .

At 60 Hz, the losses in the YBCO coil are nearly 2 orders of magnitude lower than those in the Cu coil. With increasing frequency, the YBCO coil losses increase and approach the Cu coil losses, but they are still smaller at 1000 Hz. The main components of loss in the YBCO are the hysteresis and self-field losses.

Of particular interest are the nonsinusoidal voltages measured at higher currents, as seen in Fig. 8. The heating of the YBCO coil was monitored by a copper-constantan thermocouple installed in the winding and it was negligible. At 1000 Hz and with an  $I_{peak}$  of 50 A, the temperature increase was below 0.2 K.

#### IV. CONCLUSIONS

In summary, we measured the AC losses in a small YBCO 3 pancake coil and compared it with a similar coil fabricated in the

same fashion using plain copper tape. Due to the magnetization currents, the YBCO coil inductance depends on the coil current. At 60 Hz, the losses of the YBCO coil were nearly two orders of magnitude lower than those in the Cu coil. With increasing frequency, this difference becomes smaller, but the YBCO coil still exhibited lower losses at 1000 Hz. The radial magnetic field component showed that the current distribution in the tape is not uniform. This indicates a need for loss calculation, which is suitable for inhomogeneous fields, and the need for a more ac-tolerant architecture of YBCO conductor.

#### REFERENCES

- [1] P. N. Barnes, G. L. Rhoads, J. C. Tolliver, M. D. Sumption, and K. W. Schmaeman, "Compact, lightweight superconducting power generator," *IEEE Trans. Magn.*, vol. 41, pp. 268–273, 2005.
- [2] K. Higashikawa, T. Nakamura, and T. Hoshino, "Anisotropic distributions of current density and electric field in Bi-2223/Ag coil with consideration of multifilamentary structure," *Phys. C*, vol. 419, pp. 129–140, 2005.
- [3] J. Pitel and P. Kovac, "Influence of external magnetic fields on critical currents of solenoids wound with anisotropic HTS tapes-theoretical analysis," *Supercond. Sci. Technol.*, vol. 10, pp. 7–16, 1997.
- [4] J. Kvitkovic and M. Polak, "Current-voltage characteristics of Bi-2223/Ag multifilamentary tapes exposed to inhomogeneous magnetic fields," *Phys. C*, vol. 401, pp. 146–149, 2004.
- [5] U. Schoop *et al.*, "Annual DOE Peer Review" Washington, DC, July 24, 2004 [Online]. Available: <http://www.energetics.com/supercon04.html>
- [6] A. O. Ijaduola, J. R. Thompson, A. Goyal, C. L. H. Thieme, and K. Marken, to be published.
- [7] E. H. Brandt and M. Indenbom, "Type II-superconductors strip with current in a perpendicular magnetic field," *Phys. Rev. B*, vol. 48, pp. 12 893–12 906, 1993.
- [8] N. Amemiya, T. Nishioka, Z. Jiang, and K. Yasuda, "Influence of film width and magnetic field orientation on AC loss in YBCO thin film," *Supercond. Sci. Technol.*, vol. 17, pp. 485–492, 2004.
- [9] W. J. Carr and C. E. Oberly, "Filamentary YBCO conductors for AC applications," *IEEE Trans. Appl. Supercond.*, vol. 9, pp. 1475–1478, 1999.
- [10] C. B. Cobb, P. N. Barnes, T. J. Haugan, J. Tolliver, E. Lee, M. Sumption, E. Collings, and C. E. Oberly, "Hysteresis loss reduction in striated YBCO," *Phys. C*, vol. 382, pp. 52–56, 2002.
- [11] M. D. Sumption, E. W. Collings, and P. N. Barnes, "AC loss in striped (filamentary) YBCO coated conductors leading to designs for high frequencies and field sweep amplitudes," *Supercond. Sci. Technol.*, vol. 18, pp. 122–134, 2005.
- [12] O. Tsukamoto, "AC losses in a type II superconductor strip with inhomogeneous critical current distribution," *Supercond. Sci. Technol.*, vol. 18, pp. 596–605, 2005.
- [13] P. N. Barnes, M. D. Sumption, and G. L. Rhoads, "Review of high power density superconducting generators: Present state and prospects for incorporating YBCO windings," *Cryogenics*, accepted for publication.