

REPORT DOCUMENTATION PAGE					Form Approved OMB No. 0704-0188	
The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.						
PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.						
1. REPORT DATE (DD-MM-YYYY) 30/11/2010		2. REPORT TYPE Final Performance Report			3. DATES COVERED (From - To) 30/09/2009 to 30/11/2010	
4. TITLE AND SUBTITLE Tensor Impedance Surfaces THIS PROJECT IS DEVELOPED MATERIALS THAT HAVE TENSOR ELECTROMAGNEETIC SURFACE IMPEDANCE PROPERTIES					5a. CONTRACT NUMBER FA9550-09-C-0198	
					5b. GRANT NUMBER	
					5c. PROGRAM ELEMENT NUMBER	
					5d. PROJECT NUMBER	
6. AUTHOR(S) DR. ADOUR KABAKIAN					5e. TASK NUMBER	
					5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) HUGHES RESEARCH LABS					8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) AFOSR / RSE 875 North Randolph Street, Suit 325 Room 3112 Arlington, Virginia 22203-1768					10. SPONSOR/MONITOR'S ACRONYM(S) AFOSR / RSE	
					11. SPONSOR/MONITOR'S REPORT NUMBER(S) AFRL-OSR-VA-TR-2012-0770	
12. DISTRIBUTION/AVAILABILITY STATEMENT Distribution A						
13. SUPPLEMENTARY NOTES						
14. ABSTRACT We have investigated and determined how the tensor properties of an impedance surface can be shaped to control and steer surface waves in a very general way, all the while preserving phase information. Two findings made this possible. First, it was discovered through eigenvalue analysis that a TM or TE surface bound wave tends to favor strongly propagation along one of the principal axes of its tensor impedance matrix. This is illustrated by the series of simulations shown in Figure 1 for the case of a TM wave, which favors propagation along the shorter principal axis.						
15. SUBJECT TERMS Standard terms apply						
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON Arje Nachman RSE (Program Manager)	
a. REPORT U	b. ABSTRACT U	c. THIS PAGE U			19b. TELEPHONE NUMBER (Include area code) 703.696.8427	

Reset

SUPPLEMENTAL REPORT

To: technicalreports@afosr.af.mil

Subject: Annual Progress Statement to Dr. Arje Nachman

Contract/Grant Title: Tensor Impedance Surfaces

Contract/Grant #: FA9550-09-C-0198

Reporting Period: Sep 30, 2009 to Nov 30, 2010

We have investigated and determined how the tensor properties of an impedance surface can be shaped to control and steer surface waves in a very general way, all the while preserving phase information. Two findings made this possible. First, it was discovered through eigenvalue analysis that a TM or TE surface bound wave tends to favor strongly propagation along one of the principal axes of its tensor impedance matrix. This is illustrated by the series of simulations shown in Figure 1 for the case of a TM wave, which favors propagation along the shorter principal axis. Figure 1b shows the propagation pattern that a small dipole array creates on a scalar impedance surface (isotropic). When the impedance is made anisotropic, with the shorter principal axis pointing in the propagation direction, energy propagates mostly in that direction and remains strongly confined to a beam shape, as shown in Figure 1a. But when the shorter axis is rotated to be perpendicular to the propagation direction, energy instead spreads out in the transverse direction, as shown in Figure 1c.

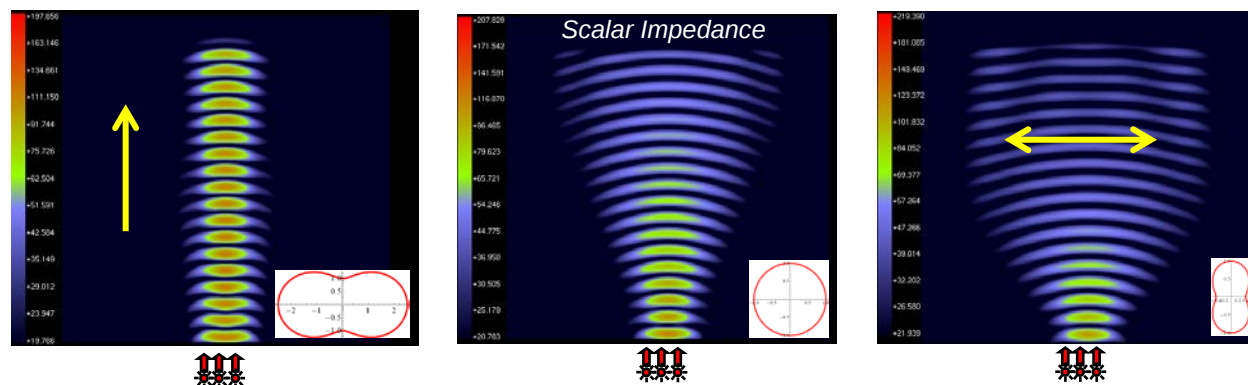


Figure 1: Tensor properties of impedance surface determine the wave propagation pattern.

(a) TM propagation along short principal axis of tensor impedance matrix. Energy remains focused like a beam along short axis direction.

(b) TM propagation for scalar impedance matrix.

(c) TM propagation along long principal axis of tensor impedance matrix. Energy spreads out in short axis direction.

We naturally attempted to exploit this property to steer a surface wave into an arbitrary direction. We hypothesized that by smoothly rotating the principal axis as we sweep across the surface (illustrated in Figure 2a), the mode corresponding to the new direction gets excited to divert energy towards this new direction. While energy does propagate in the intended direction, this approach alone is insufficient to rotate the wavefront towards the intended propagation direction, as shown by the simulation result in Figure 2b.

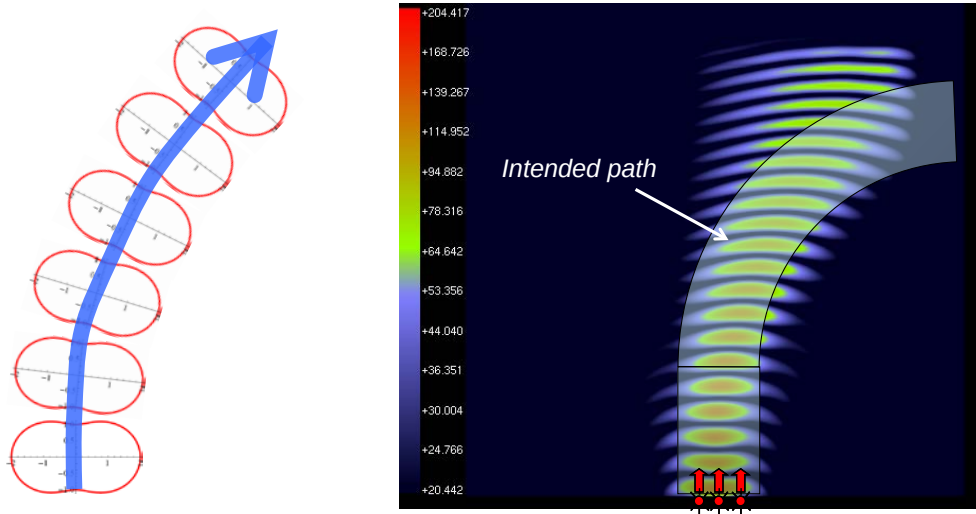


Figure 2: Rotating the principal axis of the tensor impedance matrix excites the propagating mode in that direction, but the wavefront does not rotate in that direction.

The second key discovery was that if in addition we adjusted the local propagation speed through impedance grading along the wavefront, we could make the wavefront turn in any direction. The grading for the principal axis impedance X_R in the propagation direction is shaped such that the electrical path remains constant along a turning wavefront, even though the physical propagation distance is a function of the radius of curvature. Using the fact that surface propagation speed scales with $(1 + X^2)^{-1/2}$, the impedance grading function takes on the form shown in Figure 3.

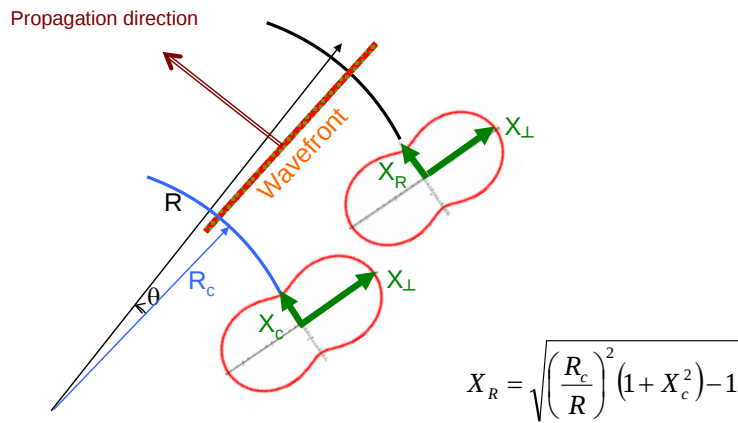


Figure 3: Wavefront (phasefront) is maintained by keeping constant the electrical path length at different radii.

As a demonstration of the high degree of propagation control these two methods afford together, a tensor surface impedance function was derived to make the wavefront launched by a dipole array follow a circular path. Note that confinement of energy to the circular path is achieved **solely** by impedance grading and principal axis rotation, and that no total internal reflection mechanism is used as with surface waveguides which are built as impedance channels.

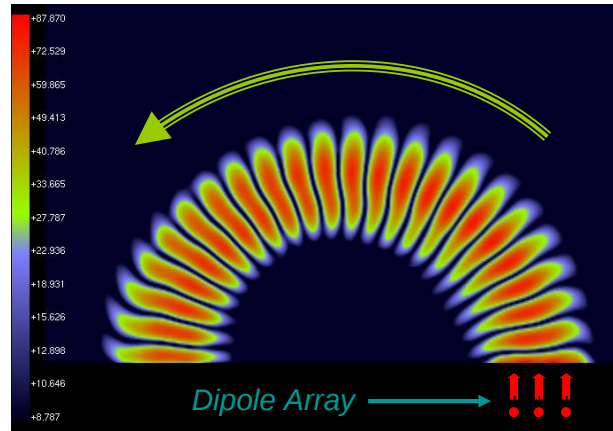


Figure 4: Full propagation control is achieved by combining principal axis rotation with effective impedance grading to maintain constant phase.

This new surface propagation control method opens a wide variety of applications that we have started exploring. It has been used, for instance, to improve the performance of previously reported surface impedance waveguides, by reducing leakage from and maintaining phase in curved sections, as shown in Figure 5. Other applications include designing surface lensing structures for antenna and communications applications, for which we have already very encouraging preliminary results, as shown by the surface impedans lens shown in Figure 6, which converts a point source into a surface plane wave.

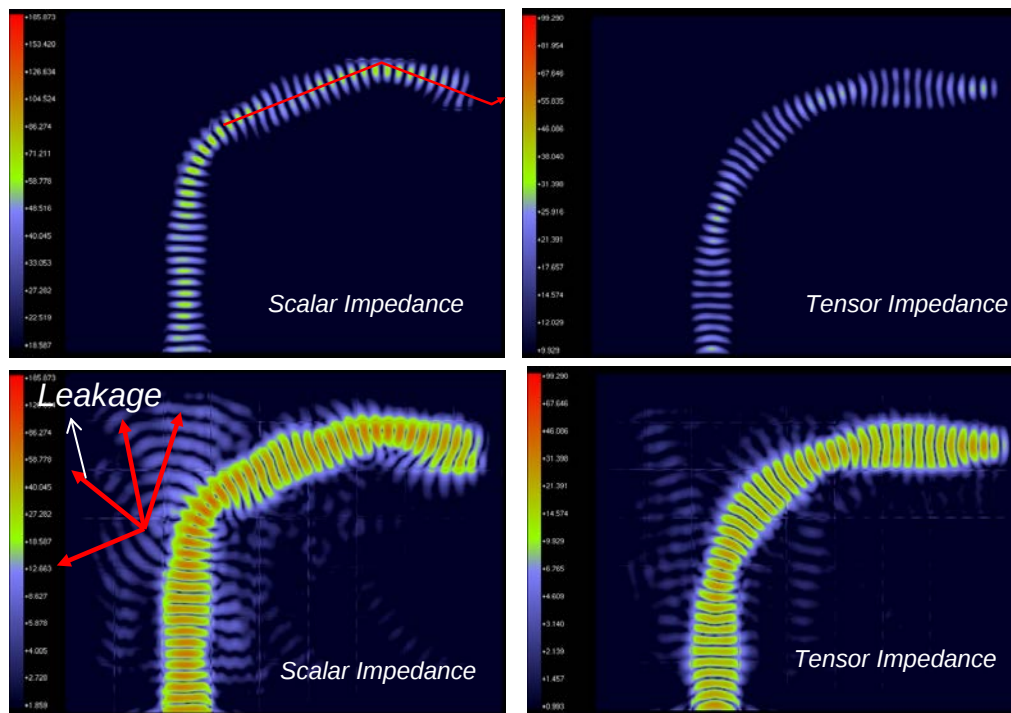


Figure 5: Improved surface waveguide performance through the use of tensor impedance.

We will continue investigating the use of tensor impedance surfaces for propagation and radiation control. We will also study issues related to building such surfaces, including curvature effects, unit cell layout methods, and unit cell performance.

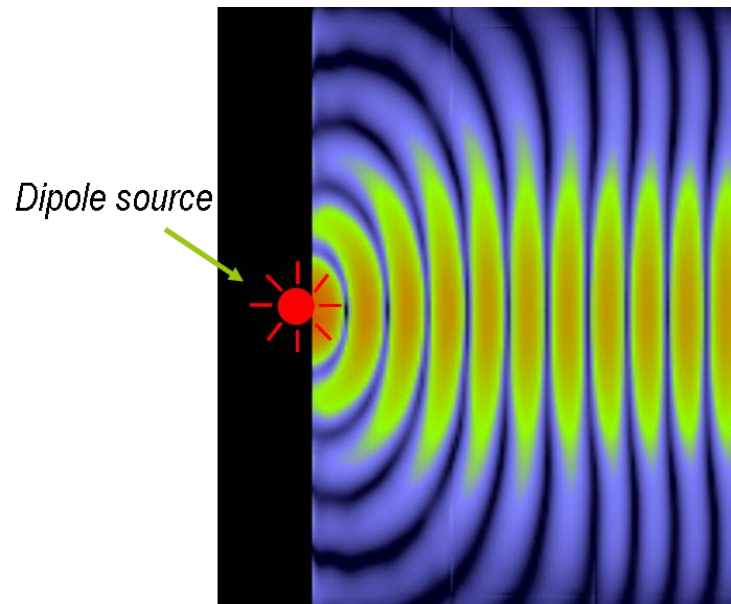


Figure 6: A lensing tensor impedance surface converts a dipole point source to a surface plane wave.