

Chaotic Motions in the Real Fuzzy Electronic Circuits

Shih-Yu Li^{a,b,*}, Cheng-Hsiung Yang^c, Chin-Teng Lin^{b,d}, Li-Wei Ko^{a,b} and

Tien-Ting Chiu^e

^aDepartment of Biological Science and Technology, National Chiao Tung University,
Hsinchu, Taiwan, Republic of China

^bBrain Research Center, National Chiao Tung University, Hsinchu, Taiwan,
Republic of China

^cDepartment of Automatic Control, National Taiwan University of Science and
Technology, Taipei City, Taiwan, Republic of China

^dInstitute of Electrical Control Engineering, National Chiao Tung University, Hsinchu,
Taiwan, Republic of China

^eDepartment of Industrial and Systems Engineering, Chung Yuan Christian University,
Chung-Li, Taiwan, Republic of China

Total number of pages : 19

PACS : 05.45.Xt; 05.45.Pq; 05.45.Gg; 05.45.Vx

Keywords : Chaos, Fuzzy Electronic Circuits (FEC), Nonlinear Analysis, Fuzzy
Logic System

Postal address: **Shih-Yu Li**

Department of Biological Science and Technology, National
Chiao Tung University, 1001 Ta Hsueh Road, Hsinchu 300,
Taiwan, Republic of China

FAX : 886-3-5720634

Electronic Address : agenghost@gmail.com

Telephone number : 886-3-5712121#54452 (Shih-Yu Li)

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 30 DEC 2012		2. REPORT TYPE		3. DATES COVERED 00-00-2012 to 00-00-2012	
4. TITLE AND SUBTITLE Chaotic Motions in the Real Fuzzy Electronic Circuits				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Chiao Tung University, Department of Biological Science and Technology, Hsinchu, Taiwan, Republic of China, ,				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES Preprint, Abstract and Applied Analysis, Accepted 30 December 2012, Government or Federal Purpose Rights License					
14. ABSTRACT In this paper, Fuzzy Electronic Circuit (FEC) is firstly introduced, which is implementing Takagi-Sugeno (T-S) fuzzy chaotic systems on electronic circuit. In the research field of secure communications, the original source should be blended with other complex signals. Chaotic signals are one of the good sources to be applied to encrypt high confidential signals, because of its high complexity, sensitiveness of initial conditions and unpredictability. Consequently, generating chaotic signals on electronic circuit to produce real electrical signals applied to secure communications are an exceeding important issue. However, nonlinear systems are always composed of many complex equations and are hard to realize on electronic circuits. Takagi-Sugeno (T-S) fuzzy model is a powerful tool, which is described by fuzzy IF-THEN rules to express the local dynamics of each fuzzy rule by a linear system model. Accordingly, in this paper, we produce the chaotic signals via electronic circuits through T-S fuzzy model and the numerical simulation results provided by MATLAB are also proposed for comparison. T-S fuzzy chaotic Lorenz and Chen-Lee systems are used for examples and are given to demonstrate the effectiveness of the proposed electronic circuit.					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 20	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

Abstract

In this paper, Fuzzy Electronic Circuit (FEC) is firstly introduced, which is implementing Takagi-Sugeno (T-S) fuzzy chaotic systems on electronic circuit. In the research field of secure communications, the original source should be blended with other complex signals. Chaotic signals are one of the good sources to be applied to encrypt high confidential signals, because of its high complexity, sensitiveness of initial conditions and unpredictability. Consequently, generating chaotic signals on electronic circuit to produce real electrical signals applied to secure communications are an exceeding important issue. However, nonlinear systems are always composed of many complex equations and are hard to realize on electronic circuits. Takagi-Sugeno (T-S) fuzzy model is a powerful tool, which is described by fuzzy IF-THEN rules to express the local dynamics of each fuzzy rule by a linear system model. Accordingly, in this paper, we produce the chaotic signals via electronic circuits through T-S fuzzy model and the numerical simulation results provided by MATLAB are also proposed for comparison. T-S fuzzy chaotic Lorenz and Chen-Lee systems are used for examples and are given to demonstrate the effectiveness of the proposed electronic circuit.

1. Introduction

Nonlinear dynamics, commonly called the chaos theory, changes the scientific way of looking at the dynamics of natural and social systems, which has been intensively studied over the past several decades [1-10]. The phenomenon of chaos has attracted widespread attention amongst mathematicians, physicists, engineers and has also been extensively studied in many fields, such as chemical reactions [11-12], biological systems [13-14], information processing [15-16], secure communications [17-20] and the rest.

The mathematical meteorologist E.N. Lorenz who discovered chaos in a simple system of three autonomous ordinary differential equations in order to describe the simplified Rayleigh – Benard problem [21] in 1963 is the most popular system for studying [22-26]. Chen and Lee reported a new chaotic system [27] in 2004, which is now called the Chen-Lee system [28]. The chaotic Chen-Lee system was developed based on Euler equations for the motion of rigid body. It was proved that this system is the governing set of equations for gyro motion with feedback control. Recently, studies were conducted on this system to explore the dynamic behavior of this system, including fractional order behavior, the generation of hyperchaos and perturbation analysis, control and anti-control of chaos, synchronization, etc. [29-30].

Since the fuzzy set theory [31] and fuzzy logic [32] were initiated by Zadeh in 1965 and 1973, fuzzy logic has received much attention as a powerful tool for the nonlinear field. Among various kinds of fuzzy methods, Takagi-Sugeno fuzzy system is widely accepted as a tool for design and analysis of fuzzy control system [33]. The T-S fuzzy model, proposes a successful method to deal with certain complex nonlinear systems via some local linear subsystems. There are plenty of researches using the Takagi-Sugeno (T-S) fuzzy model to represent typical chaotic models and then apply some effective fuzzy techniques [34-42]. However, there are still no real experimental models in electronic circuit for Takagi-Sugeno (T-S) fuzzy-based chaotic systems. In this article, we carry out the powerful tool, Takagi-Sugeno (T-S) fuzzy model, in electronic circuit and show good agreement between computer simulations in MATLAB and experimental results in our circuits.

The layout of the rest of the paper is as follows. In Section 2, Takagi-Sugeno fuzzy model is introduced. In Section 3, experimental results and configurations in electronic circuits for T-S fuzzy chaotic Lorenz and Chen-Lee systems are presented. In Section 4, conclusions are given.

2. Takagi-Sugeno fuzzy model

In system analysis and design, it is important to select an appropriate model representing a real system. As an expression model of a real plant, we use the fuzzy implications and the fuzzy reasoning method suggested by Takagi and Sugeno. The Takagi-Sugeno (T-S) fuzzy model is described by fuzzy IF-THEN rules which represent local linear input-output relations of a nonlinear system. The main feature of the T-S fuzzy model is to express the local dynamics of each fuzzy rule by a linear system model. The overall fuzzy model of the system is achieved by fuzzy blending of the linear system models. Consider a continuous-time nonlinear dynamic system as follows:

Rule i:

$$\begin{aligned} \text{IF } x_1(t) \text{ is } M_{i1} \dots \text{and } x_n(t) \text{ is } M_{in} \\ \text{THEN } \dot{x}(t) = A_i x(t) + B_i u(t), \end{aligned} \quad (2-1)$$

where

$$x(t) = [x_1(t), x_2(t), \dots, x_n(t)]^T,$$

$$u(t) = [u_1(t), u_2(t), \dots, u_n(t)]^T,$$

$i = 1, 2, \dots, r$ (r is the number of IF-THEN rules), M_{ij} are fuzzy sets, and $x(t) = A_i x(t) + B_i u(t)$ is the output from the i th IF-THEN rule. Given a pair of $(x(t), u(t))$, the final output of the fuzzy system is inferred as follows:

$$\dot{x} = \frac{\sum_{i=1}^r \omega_i(x(t)) \{A_i x(t) + B_i u(t)\}}{\sum_{i=1}^r \omega_i(x(t))}, \quad (2-2)$$

where

$$\omega_i(x(t)) = \prod_{j=1}^n M_{ij}(x(t)) \quad (2-3)$$

For all t , and $M_{ij}(x(t))$ is the grade of membership $x_j(t)$ of in M_{ij} .

The open-loop system of (2-2) is

$$\dot{x} = \frac{\sum_{i=1}^r \omega_i(x(t)) A_i x(t)}{\sum_{i=1}^r \omega_i(x(t))} \quad (2-4)$$

where it is assumed that

$$\sum_{i=1}^r \omega_i(x(t)) > 0$$

$$\omega_i(x(t)) \geq 0, i = 1, 2, \dots, r.$$

By introducing $h_i(x(t)) = \omega_i(x(t)) / \sum_{i=1}^r \omega_i(x(t))$ instead of $\omega_i(x(t))$, (2-2) and (2-4)

can be rewritten as:

$$\dot{x} = \sum_{i=1}^r h_i(x(t)) \{A_i x(t) + B_i u(t)\}, \quad (2-5)$$

$$\dot{x} = \sum_{i=1}^r h_i(x(t)) A_i x(t), \quad (2-6)$$

Note that

$$\sum_{i=1}^r h_i(x(t)) = 1,$$

$$h_i(x(t)) \geq 0, i = 1, 2, \dots, r.$$

for all t . $h_i(x(t))$ can be regarded as the normalized weight of the IF-THEN rules.

3. Implementation of T-S fuzzy systems on electronic circuit

This section shows the electronic circuit Implementations of the T-S fuzzy model of classical Lorenz system and Chen-Lee system. The experimental results are going to be compared with the simulation results given by MATLAB.

3.1 Fuzzy modeling of Lorenz system

For Lorenz system [21]:

$$\begin{cases} \dot{x}_1 = a(x_2 - x_1) \\ \dot{x}_2 = cx_1 - x_1x_3 - x_2 \\ \dot{x}_3 = x_1x_2 - bx_3 \end{cases} \quad (3-1)$$

where a, b, c are the parameters. When $a=10, b=8/3, c=28$ and initial states is $(-0.1, 0.2, 0.3)$, the dynamic behavior is chaotic. Assume that $x_1 \in [-d, d]$ and $d > 0$, then

Lorenz system can be exactly represented by T-S fuzzy model as following [43]:

$$\text{Rule 1: IF } x \text{ is } M_1, \text{ THEN } \dot{X}(t) = A_1 X(t), \quad (3-2)$$

$$\text{Rule 2: IF } x \text{ is } M_2, \text{ THEN } \dot{X}(t) = A_2 X(t). \quad (3-3)$$

where

$$X = [x_1, x_2, x_3]^T,$$

$$A_1 = \begin{bmatrix} -a & a & 0 \\ c & -1 & -d \\ 0 & d & -b \end{bmatrix}, \quad A_2 = \begin{bmatrix} -a & a & 0 \\ c & -1 & d \\ 0 & -d & -b \end{bmatrix},$$

$$M_1(x) = \frac{1}{2} \left(1 + \frac{x_1}{d}\right), \quad M_2(x) = \frac{1}{2} \left(1 - \frac{x_1}{d}\right),$$

Choosing $d=30$, M_1 and M_2 are fuzzy sets of Lorenz system. Here, we call (3-2) the first liner subsystem under the fuzzy rule and (3-3) the second liner subsystem under the fuzzy rule. The final output of the fuzzy Lorenz system is inferred as follows:

$$\begin{aligned} \dot{X}(t) &= \sum_{i=1}^2 h_i A_i X(t) \\ &= \begin{bmatrix} h_1 \\ h_1 \\ h_1 \end{bmatrix}^T \begin{bmatrix} a(x_2 - x_1) \\ cx_1 - dx_3 - x_2 \\ dx_2 - bx_3 \end{bmatrix} + \begin{bmatrix} h_2 \\ h_2 \\ h_2 \end{bmatrix}^T \begin{bmatrix} a(x_2 - x_1) \\ cx_1 + dx_3 - x_2 \\ -dx_2 - bx_3 \end{bmatrix} \end{aligned} \quad (3-4)$$

where

$$h_1 = \frac{M_1}{M_1 + M_2}, \quad h_2 = \frac{M_2}{M_1 + M_2}$$

The configuration of electronic circuit in T-S fuzzy chaotic Lorenz system is shown in Fig.1 and the chaotic behavior in circuit and MATLAB are shown in Fig.2 and 3. It can be find out that the experimental result in our circuit is actually effective. It means that the nonlinear chaotic systems can be represented by real operations in electronic circuits, not just existing in simulation results.

3.2 Fuzzy modeling of Chen-Lee system

For Chen-Lee system:

$$\begin{cases} \dot{y}_1 = -y_2 y_3 + a_1 y_1 \\ \dot{y}_2 = y_1 y_3 + b_1 y_2 \\ \dot{y}_3 = y_1 y_2 / 3 + c_1 y_3 \end{cases} \quad (3-5)$$

where a_1, b_1, c are the parameters. When $a_1=5, b_1=-10, c_1=-38$ and initial states is $(0.2, 0.2, 0.2)$, the dynamic behavior is chaotic. Assume that $y_1 \in [-d_1, d_1], y_2 \in [-e_1, e_1]$ and $d_1 > 0, e_1 > 0$, then Chen-Lee system can be exactly represented by T-S fuzzy model as following:

Rule 1: IF y_1 is P_1 and IF y_2 is Q_1 , THEN:

$$\dot{Y}(t) = B_1 Y(t), \quad (3-6)$$

Rule 2: IF y_1 is P_1 and IF y_2 is Q_2 , THEN

$$\dot{Y}(t) = B_2 Y(t). \quad (3-7)$$

Rule 3: IF y_1 is P_2 and IF y_2 is Q_1 , THEN

$$\dot{Y}(t) = B_3 Y(t). \quad (3-8)$$

Rule 4: IF y_1 is P_2 and IF y_2 is Q_2 , THEN

$$\dot{Y}(t) = B_4 Y(t). \quad (3-9)$$

Where

$$Y = [y_1, y_2, y_3]^T,$$

$$B_1 = \begin{bmatrix} a & 0 & -e \\ 0 & b & d \\ 0 & \frac{1}{3}d & c \end{bmatrix}, \quad B_2 = \begin{bmatrix} a & 0 & e \\ 0 & b & d \\ 0 & \frac{1}{3}d & c \end{bmatrix},$$

$$B_3 = \begin{bmatrix} a & 0 & -e \\ 0 & b & -d \\ 0 & -\frac{1}{3}d & c \end{bmatrix}, \quad B_4 = \begin{bmatrix} a & 0 & e \\ 0 & b & -d \\ 0 & -\frac{1}{3}d & c \end{bmatrix},$$

$$P_1(y) = \frac{1}{2}(1 + \frac{y_1}{d_1}), \quad P_2(y) = \frac{1}{2}(1 - \frac{y_1}{d_1}),$$

$$Q_1(y) = \frac{1}{2}(1 + \frac{y_2}{e_1}), \quad Q_2(y) = \frac{1}{2}(1 - \frac{y_2}{e_1}),$$

Choose $d_1=40$ and $e_1=30$. N_1 and N_2 are fuzzy sets of Chen-Lee system. Here, we call (3-6) the first liner subsystem under the fuzzy rule and (3-7) the second liner subsystem under the fuzzy rule. The final output of the fuzzy Chen-Lee system is inferred as follows:

$$\dot{Z}(t) = \sum_{i=1}^2 I_i B_i Z(t) \quad (3-8)$$

$$\begin{aligned}
&= \begin{bmatrix} I_1 \\ I_1 \\ I_1 \end{bmatrix}^T \begin{bmatrix} -e_1 y_3 + a_1 y_1 \\ d_1 y_3 + b_1 y_2 \\ d_1 y_2/3 + c_1 y_3 \end{bmatrix} + \begin{bmatrix} I_2 \\ I_2 \\ I_2 \end{bmatrix}^T \begin{bmatrix} e_1 y_3 + a_1 y_1 \\ d_1 y_3 + b_1 y_2 \\ d_1 y_2/3 + c_1 y_3 \end{bmatrix} + \begin{bmatrix} I_3 \\ I_3 \\ I_3 \end{bmatrix}^T \begin{bmatrix} -e_1 y_3 + a_1 y_1 \\ -d_1 y_3 + b_1 y_2 \\ -d_1 y_2/3 + c_1 y_3 \end{bmatrix} \\
&\quad + \begin{bmatrix} I_4 \\ I_4 \\ I_4 \end{bmatrix}^T \begin{bmatrix} e_1 y_3 + a_1 y_1 \\ -d_1 y_3 + b_1 y_2 \\ -d_1 y_2/3 + c_1 y_3 \end{bmatrix}
\end{aligned}$$

where

$$\begin{aligned}
I_1 &= \frac{P_1 \times Q_1}{P_1 + P_2 + Q_1 + Q_2}, \quad I_2 = \frac{P_1 \times Q_2}{P_1 + P_2 + Q_1 + Q_2} \\
I_3 &= \frac{P_2 \times Q_1}{P_1 + P_2 + Q_1 + Q_2}, \quad I_4 = \frac{P_2 \times Q_2}{P_1 + P_2 + Q_1 + Q_2}
\end{aligned}$$

The configuration of electronic circuit in T-S fuzzy chaotic Chen-Lee system is shown in Fig.4 and the chaotic behavior in circuit and MATLAB are shown in Figs.5 and 6. This experimental result in T-S fuzzy chaotic Chen-Lee system is exactly effective as well.

Two illustrations given in sections 3.1 and 3.2 all show the agreement between our experimental and MATLAB simulation results. It means the T-S fuzzy model would no longer to be just a mathematical tools, it can be applied to electronic circuits for various kinds of applications in practice.

4. Conclusions

The implementations of Takagi-Sugeno (T-S) fuzzy chaotic systems on electronic circuits are proposed in this paper. We construct the powerful tool, Takagi-Sugeno (T-S) fuzzy model, on electronic circuit and show good agreement between computer simulations in MATLAB and experimental results in our circuits. Through our effort, the powerful Takagi-Sugeno (T-S) method is no more than just a numerical strategies, it can be applied to electronic circuits for various kinds of applications in practice. Implementations of electronic circuits for Takagi-Sugeno

(T-S) fuzzy chaotic systems are only the beginning for secure communication and other kinds of applications, this paper also create both opportunities and challenges. Implementations of novel synchronization or control approaches on electronic circuits in nonlinear research field would be definitely our future directions to achieve.

Acknowledgment

This work was supported in part by the UST-UCSD International Center of Excellence in Advanced Bio-engineering sponsored by the Taiwan National Science Council I-RiCE Program under Grant Number: NSC-101-2911-I-009-101. This work was also supported in part by the Aiming for the Top University Plan of National Chiao Tung University, the Ministry of Education, Taiwan, under Contract 101W963, and supported in part by the Army Research Laboratory and was accomplished under Cooperative Agreement Number W911NF-10-2-0022.

References

1. S. Y. Li, C. H. Yang, S. A. Chen, L. W. Ko and C. T. Lin, "Fuzzy Adaptive Synchronization of Time-Reversed Chaotic Systems via a New Adaptive Control Strategy", *Information Sciences*, vol. 222, no. 10, pp. 486–500, 2013.
2. A. Mamandi, M. H. Kargarnovin and S. Farsi, "Dynamic analysis of a simply supported beam resting on a nonlinear elastic foundation under compressive axial load using nonlinear normal modes techniques under three-to-one internal resonance condition", *Nonlinear Dynamics*, vol. 70, no. 2, pp. 1147–1172, 2012.
3. S. Y. Li and Z. M. Ge, "Generating Tri-Chaos Attractors with Three Positive Lyapunov Exponents in New Four Order System via Linear Coupling", *Nonlinear Dynamics*, vol. 69, no. 3, pp. 805–816, 2012.
4. C. H. Yang, T. W. Chen, S. Y. Li, C. M. Chang and Z. M. Ge "Chaos generalized synchronization of an inertial tachometer with new Mathieu-Van der Pol systems as functional system by GYC partial region stability theory", *Communications in Nonlinear Science and Numerical Simulation*, vol. 17, no. 3, pp. 1355–1371, 2012.
5. M. S. H. Chowdhury, I. Hashim, S. Momani, and M. M. Rahman, "Application of Multistage Homotopy Perturbation Method to the Chaotic Genesio System," *Abstract and Applied Analysis*, vol. 2012, Article ID 974293, 10 pages, 2012. doi:10.1155/2012/974293.
6. Y. Horikawa and H. Kitajima, "Quasiperiodic and exponential transient phase waves and their bifurcations in a ring of unidirectionally coupled parametric

- oscillators”, *Nonlinear Dynamics*, vol. 70, no. 2, pp. 1079-1094, 2012.
7. A. Freihat and S. Momani, “Adaptation of Differential Transform Method for the Numeric-Analytic Solution of Fractional-Order Rössler Chaotic and Hyperchaotic Systems,” *Abstract and Applied Analysis*, vol. 2012, Article ID 934219, 13 pages, 2012. doi:10.1155/2012/934219.
 8. Z. M. Ge and S. Y. Li, “Chaos Generalized Synchronization of New Chaotic Systems by GYC Partial Region Stability Theory”, *Applied Mathematical Modelling*, vol. 35, no. 1, pp. 5245–5264, 2011.
 9. Z. M. Ge and S. Y. Li, “Chaos Control of New Mathieu-Van der Pol Systems with New Mathieu -Duffing Systems as Functional System by GYC Partial Region Stability Theory”, *Nonlinear Analysis: Theory, Methods, and Applications*, vol. 71, no. 9, pp. 4047–4059, 2009.
 10. C. Yin, S. M. Zhong and W. F. Chen, “Design of sliding mode controller for a class of fractional-order chaotic systems”, *Communications in Nonlinear Science and Numerical Simulation*, vol. 17, no. 1, pp. 356–366, 2012.
 11. J. Zhao, “Adaptive Q–S synchronization between coupled chaotic systems with stochastic perturbation and delay”, *Applied Mathematical Modelling*, vol. 36, no. 7, pp. 3312–3319, 2012.
 12. M. Villegas, F. Augustin, A. Gilg, A. Hmadi and U. Wever, “Application of the Polynomial Chaos Expansion to the simulation of chemical reactors with uncertainties”, *Mathematics and Computers in Simulation*, vol. 82, no. 5, pp. 805–817, 2012.
 13. M. F. Pérez-Polo, M. Pérez-Molina, “Saddle-focus bifurcation and chaotic behavior of a continuous stirred tank reactor using PI control”, *Chemical Engineering Science*, vol. 74, no. 28, pp. 79–92, 2012.
 14. J. Jiao and L. Chen, “The genic mutation on dynamics of a predator-prey system with impulsive effect”, *Nonlinear Dynamics*, vol. 70, no. 1, pp. 141-153, 2012.
 15. T. Wang, N. Jia and K. Wang, “A novel GCM chaotic neural network for information processing”, *Communications in Nonlinear Science and Numerical Simulation*, vol. 17, no. 2, pp. 4846–4855, 2012.
 16. N. X. Quyen, V. V. Yem, and T. M. Hoang, “A Chaotic Pulse-Time Modulation Method for Digital Communication,” *Abstract and Applied Analysis*, vol. 2012, Article ID 835304, 15 pages, 2012. doi:10.1155/2012/835304.
 17. T. Wang, N. Jia and K. Wang, “A novel GCM chaotic neural network for information processing”, *Communications in Nonlinear Science and Numerical Simulation*, vol. 17, no. 12, pp. 4846–4855, 2012.
 18. S. Wang and H. Yao, “The Effect of Control Strength on Lag Synchronization of Nonlinear Coupled Complex Networks,” *Abstract and Applied Analysis*, vol.

- 2012, Article ID 810364, 11 pages, 2012. doi:10.1155/2012/810364.
19. M. M. Juan L., M. G. Rafael, A. L. Ricardo and A. I. Carlos, "A chaotic system in synchronization and secure communications", *Communications in Nonlinear Science and Numerical Simulation*, vol. 17, no. 4, pp. 1706–1713, 2012.
 20. Y. Y. Hou, H. C. Chen, J. F. Chang, J. J. Yan and T. L. Liao, "Design and implementation of the Sprott chaotic secure digital communication systems", *Applied Mathematics and Computation*, vol. 218, no. 24, pp. 11799–11805, 2012.
 21. E. N. Lorenz, "Deterministic non-periodic flows", *Journal of The Atmospheric Science*, vol. 20, no. 2, pp. 130–141, 1963.
 22. S. Li, Y. Li, B. Liu and T. Murray, "Model-free control of Lorenz chaos using an approximate optimal control strategy", *Communications in Nonlinear Science and Numerical Simulation*, vol. 17, no. 12, pp. 4891–4900, 2012.
 23. A. M. A. El-Sayed, E. Ahmed, and H. A. A. El-Saka, "Dynamic Properties of the Fractional-Order Logistic Equation of Complex Variables," *Abstract and Applied Analysis*, vol. 2012, Article ID 251715, 12 pages, 2012. doi:10.1155/2012/251715.
 24. S. Li, Y. M. Li, B. Liu, T. Murray, "Model-free control of Lorenz chaos using an approximate optimal control strategy", *Communications in Nonlinear Science and Numerical Simulation*, vol. 17, no. 12, pp. 4891–4900, 2012.
 25. Q. Bi and Z. Zhang, "Bursting phenomena as well as the bifurcation mechanism in controlled Lorenz oscillator with two time scales", *Physics Letters A*, vol. 375, no. 8, pp. 1183–1190, 2011.
 26. F. Oumlzkaynak and A. B.Oumlzer, "A method for designing strong S-Boxes based on chaotic Lorenz system", *Physics Letters A*, vol. 374, no. 36, pp. 3733–3738, 2010.
 27. S. Y. Li and Z. M. Ge, "Generalized synchronization of chaotic systems with different orders by fuzzy logic constant controller", *Expert Systems with Applications*, vol. 37, no. 3, pp. 1357–1370, 2011.
 28. H. K. Chen and C. I. Lee, "Anti-control of chaos in rigid body motion", *Chaos Solitons Fractals*, vol. 21, no. 4, pp. 957–965, 2004.
 29. L. M. Tam and W. M. SiTou, "Parametric study of the fractional order Chen–Lee System", *Chaos Solitons Fractals*, vol. 37, no. 3, pp. 817–826, 2008.
 30. L. M. Tam, J. H. Chen and H. K. Chen, "Generation of hyperchaos from the Chen-Lee system via sinusoidal perturbation", *Chaos Solitons Fractals*, vol. 38, no. 3, pp. 826–839, 2008.
 31. J. H. Chen, "Controlling chaos and chaotification in the Chen-Lee system by multiple time delays", *Chaos Solitons Fractals*, vol. 36, no. 4, pp. 843–852,

- 2008.
32. L. A. Zadeh, "Fuzzy Sets", *Information and Control*, vol. 8, no. 3, pp. 338–353 1965.
 33. L. A. Zadeh, "Fuzzy logic", *IEEE Computer*, vol. 21, no. 4, pp. 83–93, 1988.
 34. T. Takagi and M. Sugeno, "Fuzzy identification of systems and its applications", *IEEE Transactions on Systems, Man, and Cybernetics, Part B: Cybernetics*, vol. 15, no. 1, pp. 116-132, 1985.
 35. N. Zimic and M. Mraz, "Decomposition of a complex fuzzy controller for the truck-and-trailer reverse parking problem", *Mathematical and Computer Modelling*, vol. 43, no. 5-6, pp. 632-645, 2006.
 36. Y. W. Wang, Z. H. Guan and H. O. Wang, "LMI-based fuzzy stability and synchronization of Chen's system", *Physics Letters A*, vol. 320, no. 2-3, pp. 154–159, 2003.
 37. S. Y. Li, "Chaos control of new Mathieu–van der Pol systems by fuzzy logic constant controllers", *Chaos Solitons Fractals*, vol. 26, no. 3, pp. 835–843, 2005.
 38. Z. M. Ge and S. Y. Li "Fuzzy Modeling and Synchronization of Chaotic Quantum Cellular Neural Networks Nano System via A Novel Fuzzy Model and Its Implementation on Electronic Circuits", *Journal of Computational and Theoretical Nanoscience*, vol. 7, no. 11, pp. 1–10, 2010.
 39. C. J. Lin and Y. J. Xu, "A hybrid evolutionary learning algorithm for TSK-type fuzzy model design", *Mathematical and Computer Modelling*, vol. 43, no. 5-6, pp. 563–581, 2006.
 40. S. Sook Jin and Y. H. Lee, "Fuzzy Stability of a Functional Equation Deriving from Quadratic and Additive Mappings," *Abstract and Applied Analysis*, vol. 2011, Article ID 534120, 15 pages, 2011. doi:10.1155/2011/534120.
 41. S. Y. Li and Z. M. Ge, "Fuzzy Modeling and Synchronization of Two Totally Different Chaotic Systems via Novel Fuzzy Model", *IEEE Transactions on Systems Man and Cybernetics Part B- Cybernetics*, vol. 41, no. 4, pp. 1015-1026, 2011.
 42. M. Şengönül and Z. Zararsız, "Some Additions to the Fuzzy Convergent and Fuzzy Bounded Sequence Spaces of Fuzzy Numbers," *Abstract and Applied Analysis*, vol. 2011, Article ID 837584, 12 pages, 2011. doi:10.1155/2011/837584
 43. N. H. Tran, A. Ravoof, T. Nguyen and K. Tran, "Modelling of Type I fracture network: Objective function formulation by fuzzy sensitivity analysis", *Mathematical and Computer Modelling*, vol. 49, no. 7-8, pp. 1283-1287, 2000.

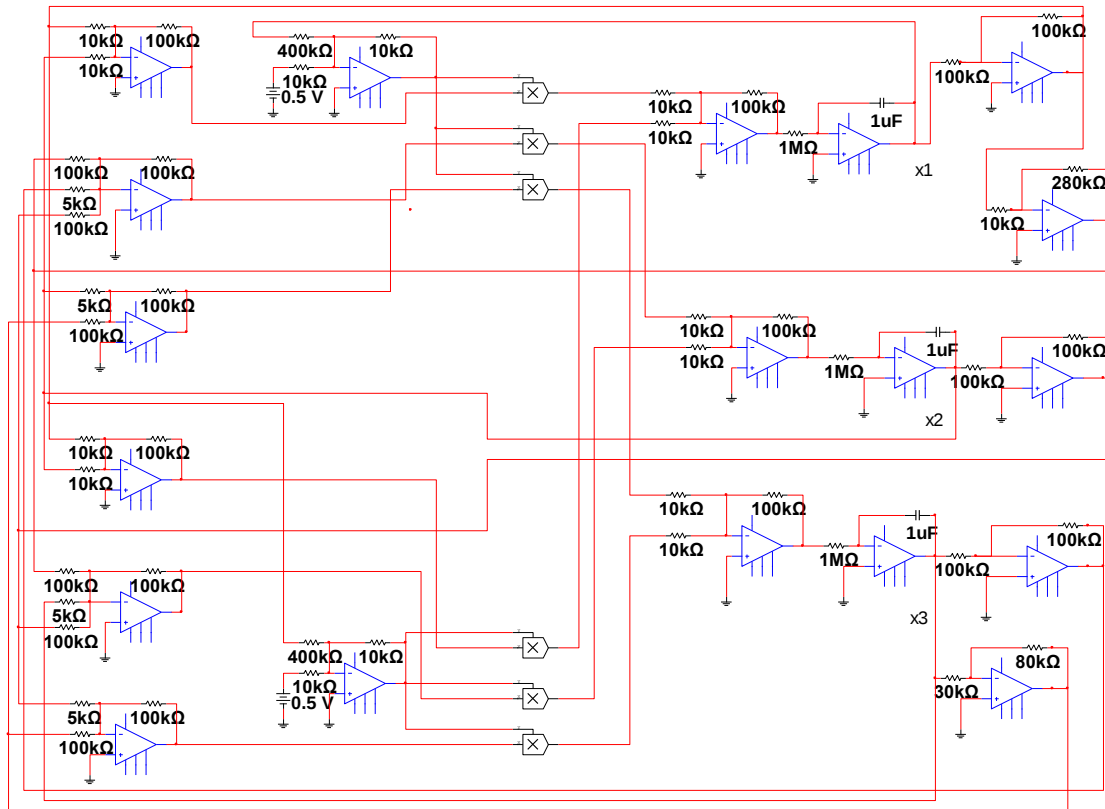
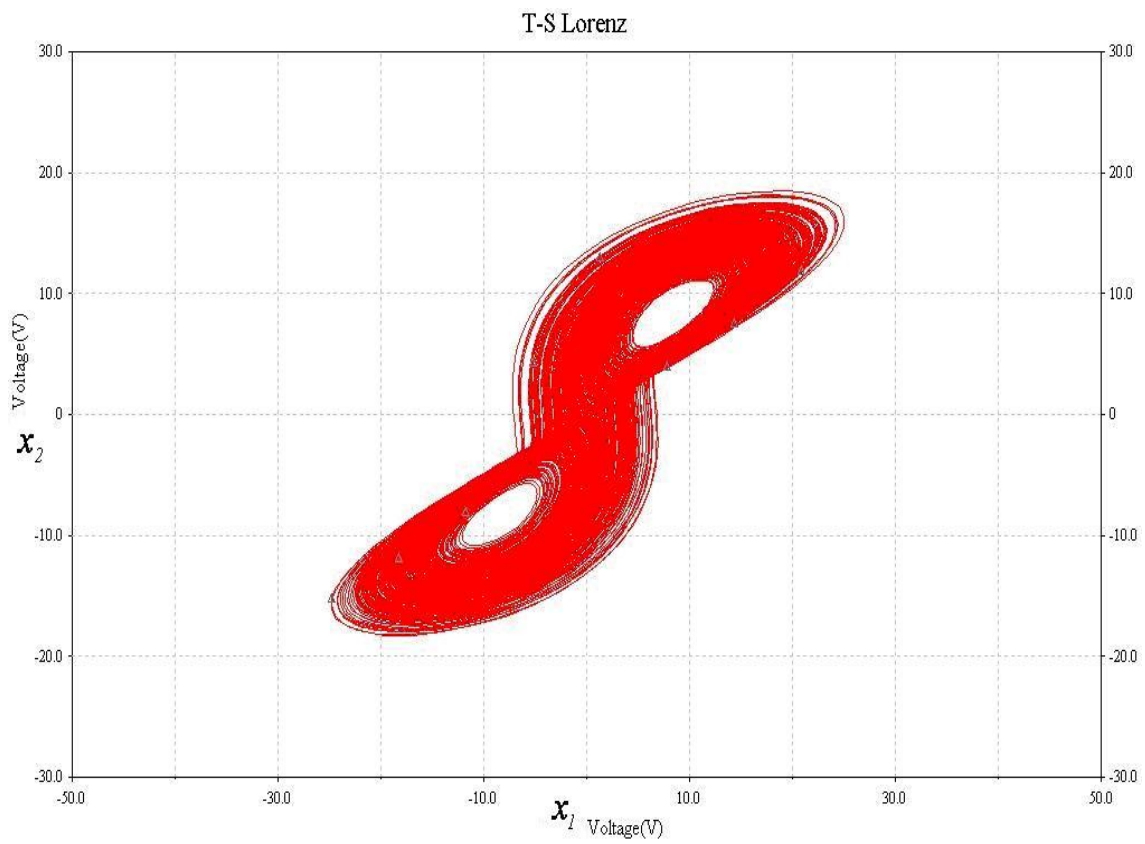


Fig.1 The fuzzy electronic circuit for chaotic Lorenz system.



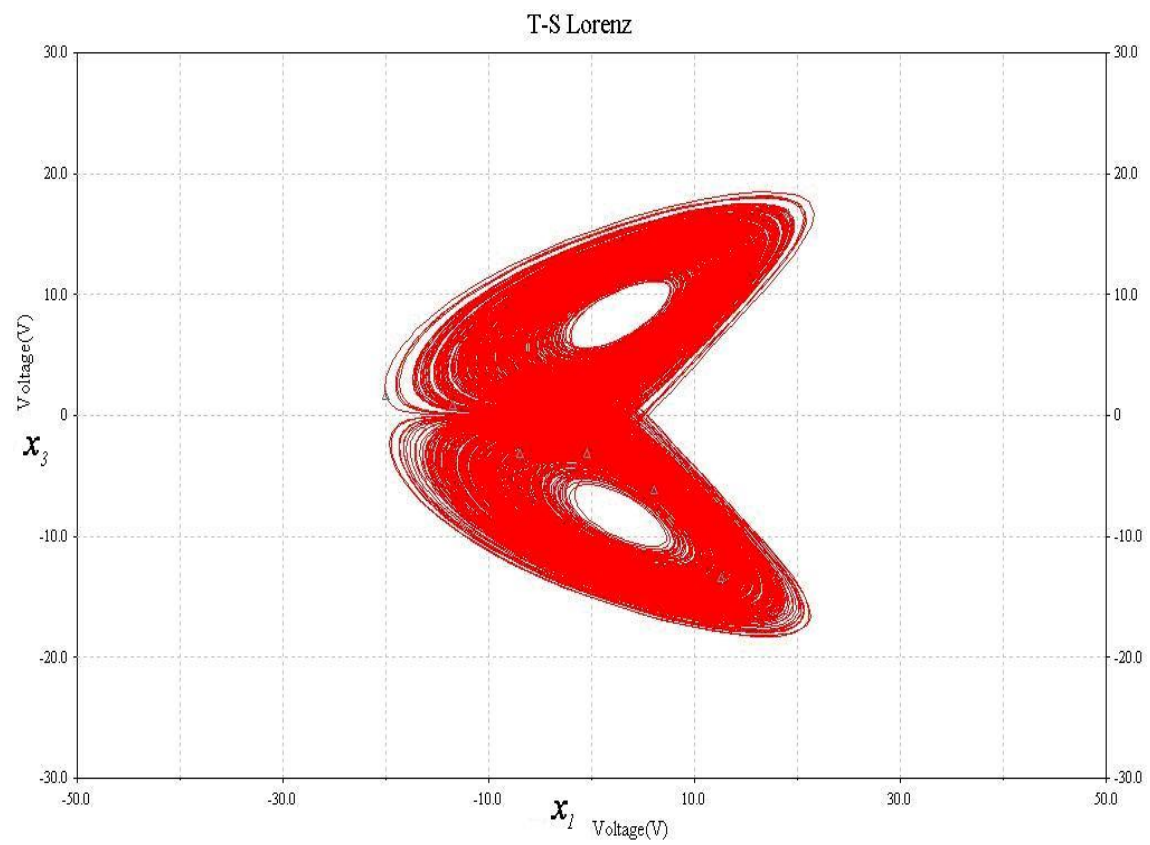
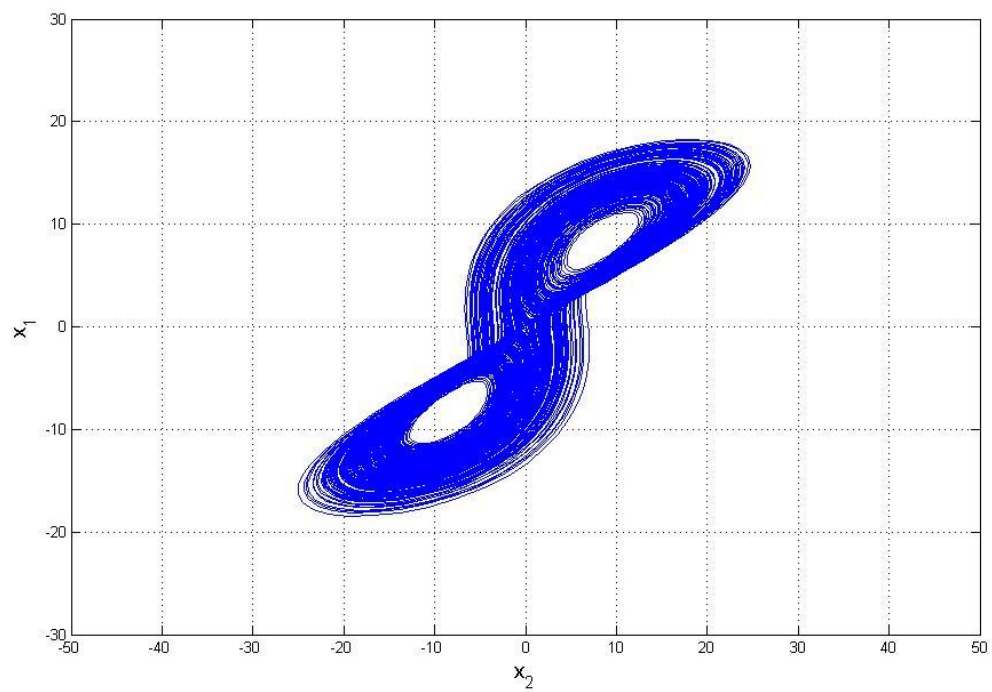


Fig.2 Projection of phase portraits outputs in fuzzy electronic circuit for Lorenz system.



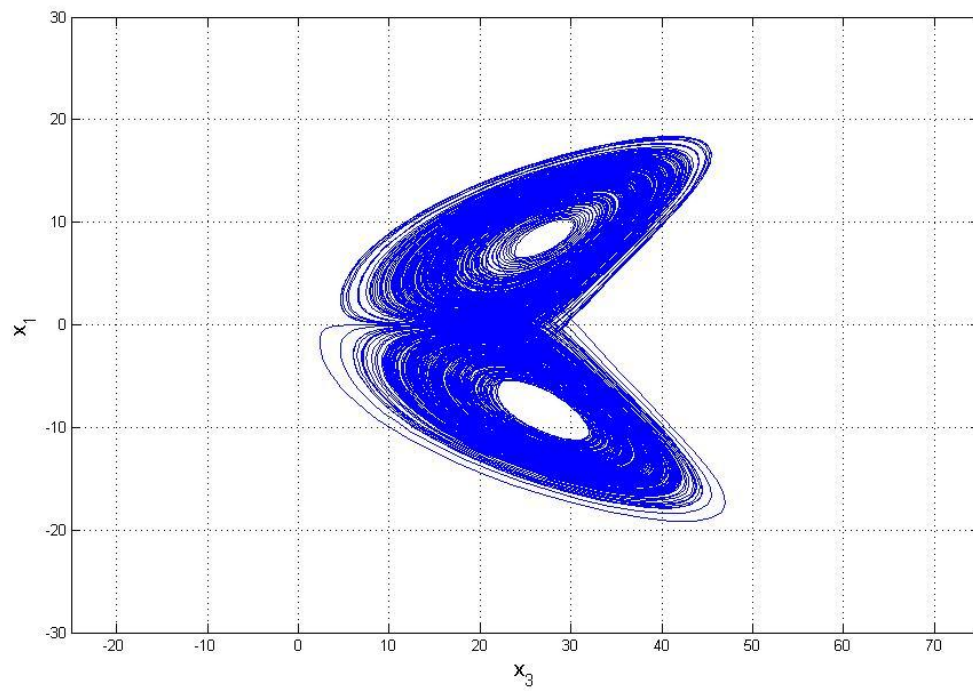


Fig. 3 Projection of phase portraits in MATLAB for fuzzy chaotic Lorenz system.

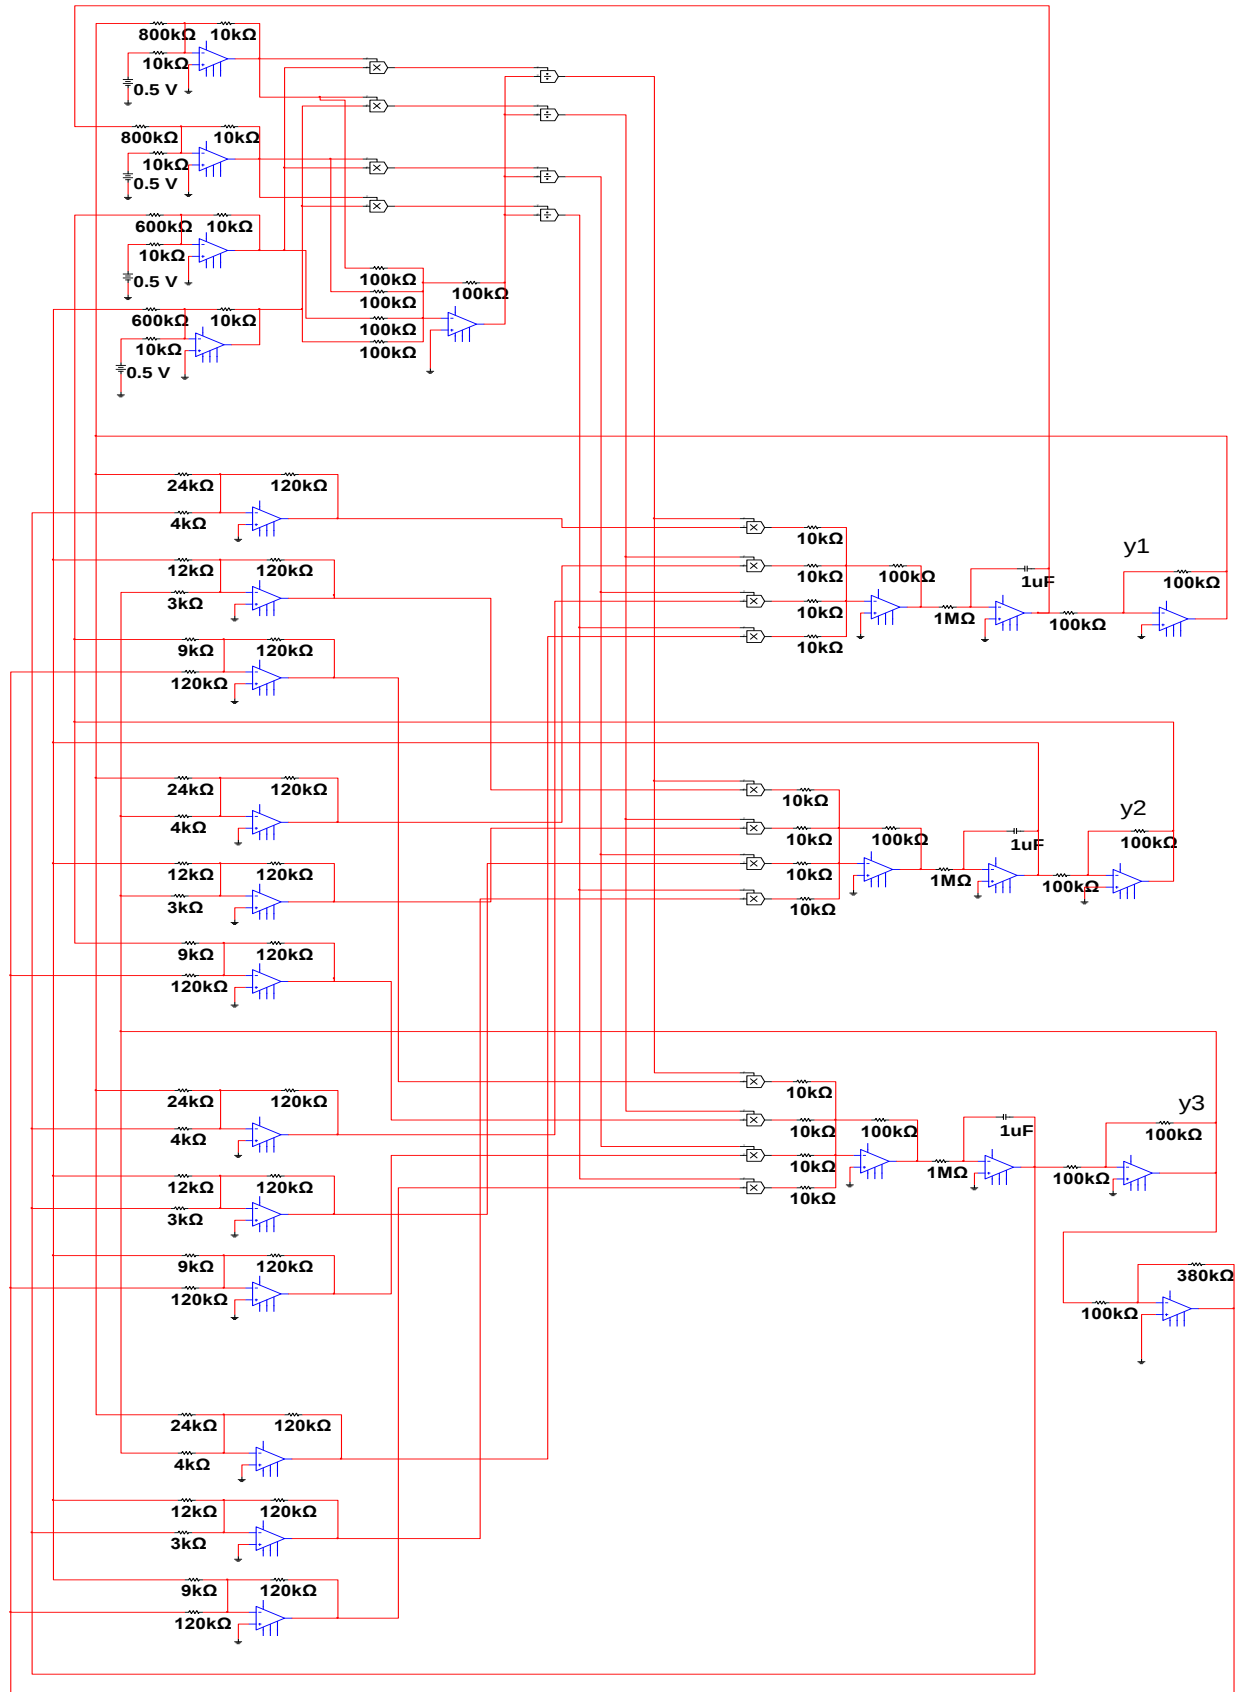
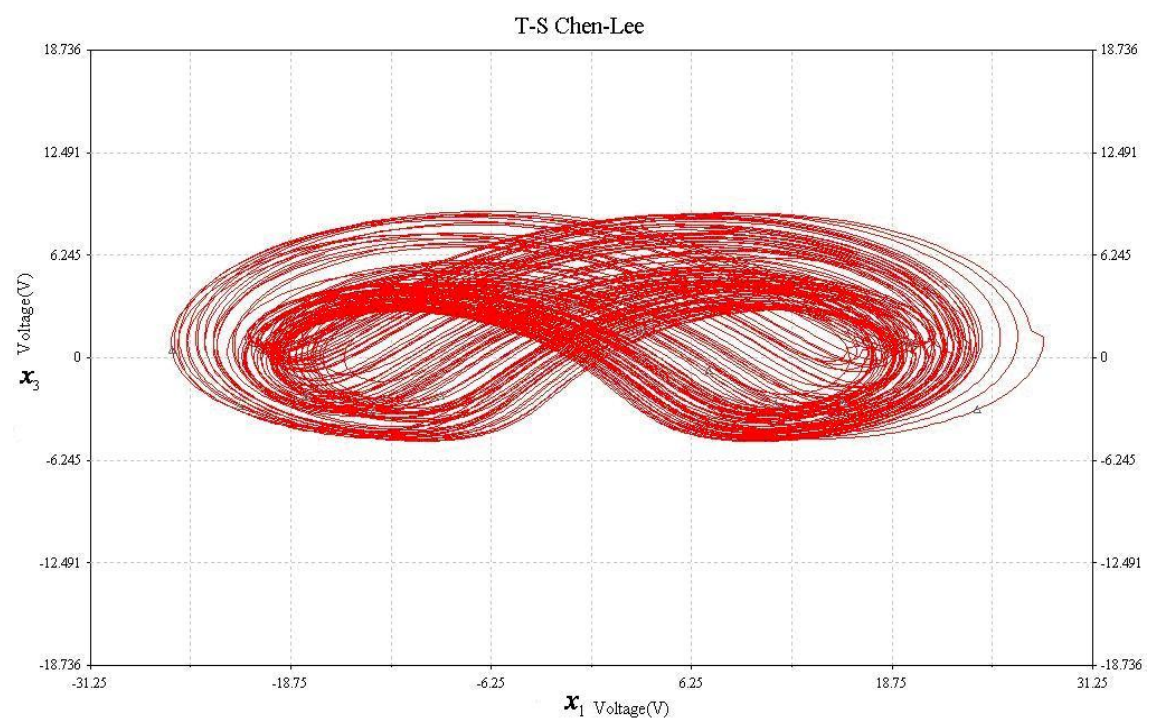
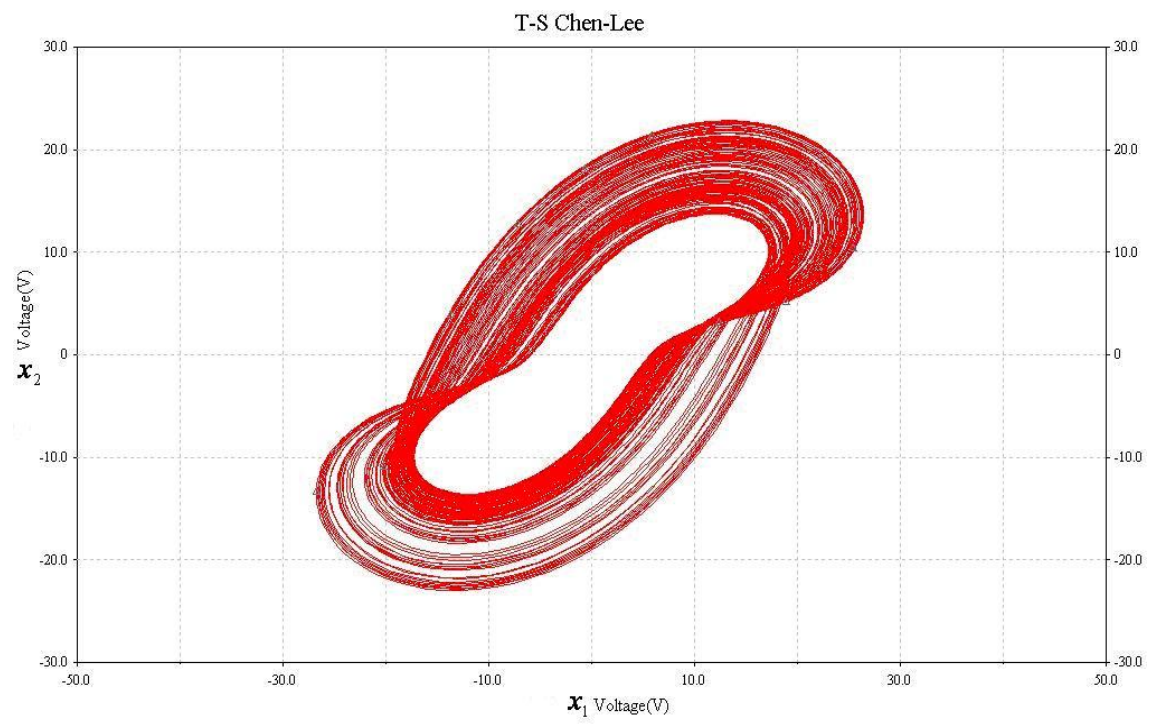


Fig. 4 The fuzzy electronic circuit for chaotic Chen-Lee system.



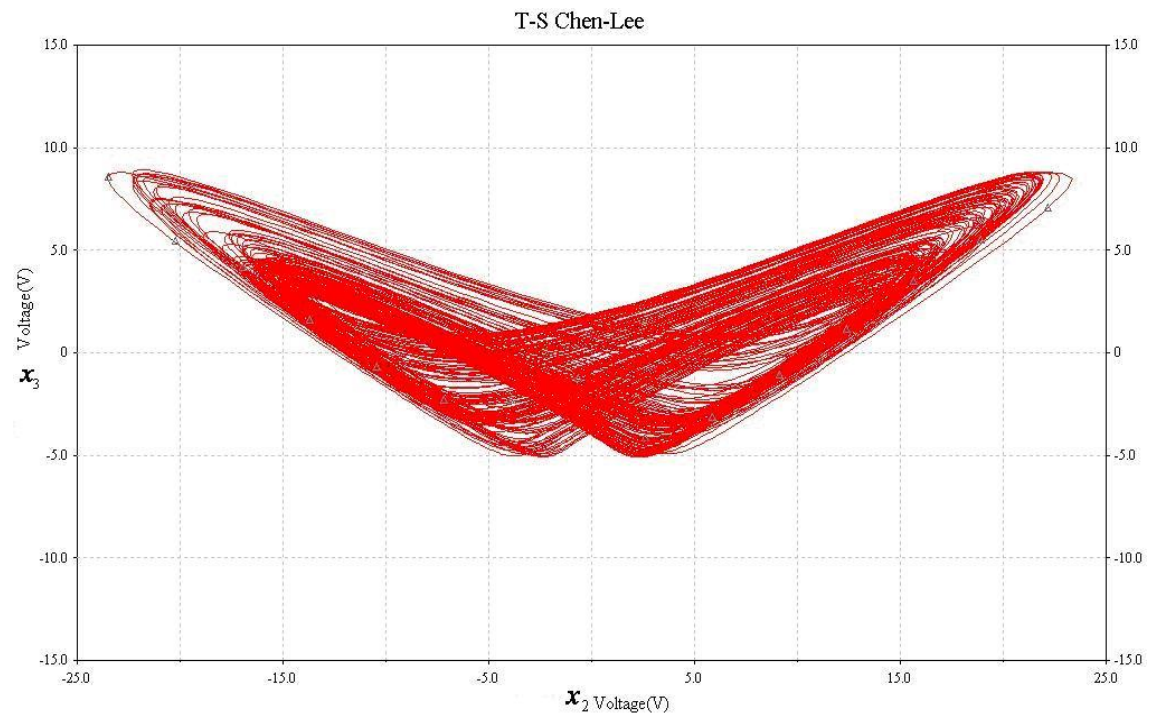
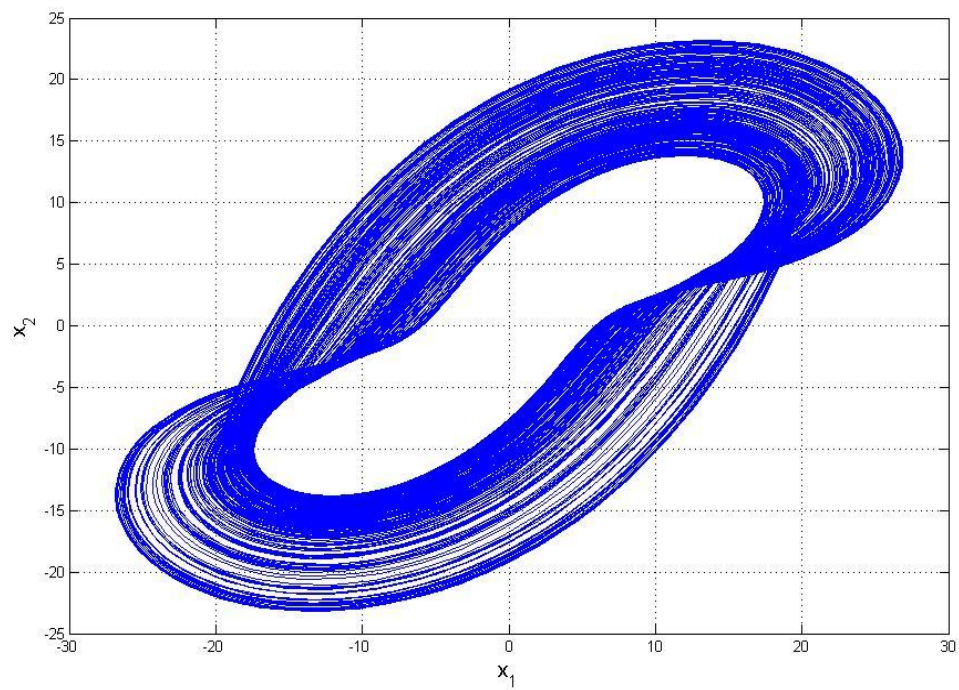


Fig. 5 Projection of phase portraits outputs in fuzzy electronic circuit for Chen-Lee system.



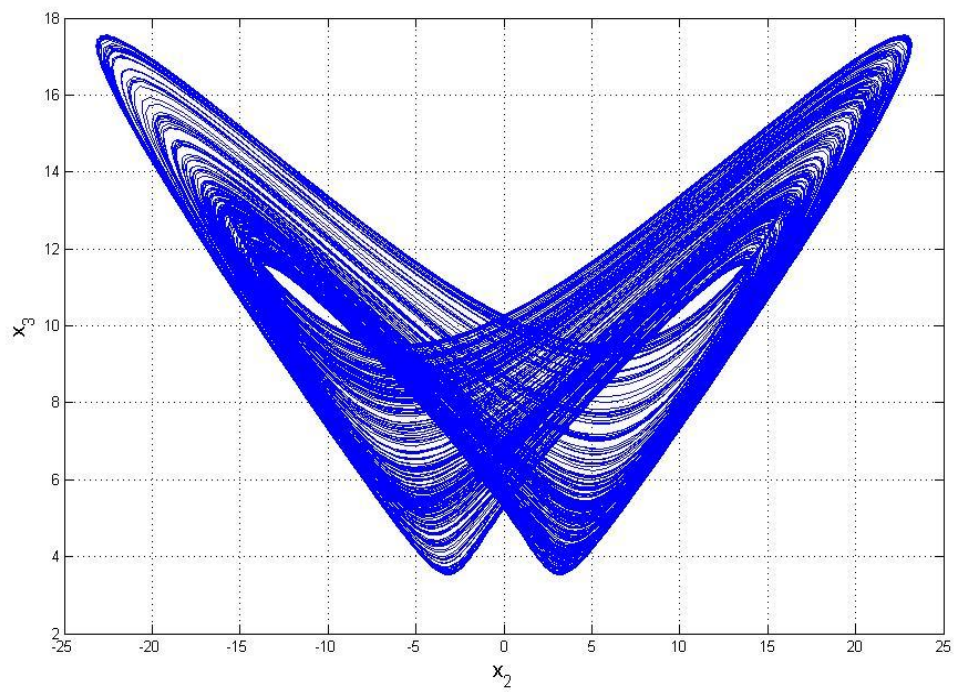
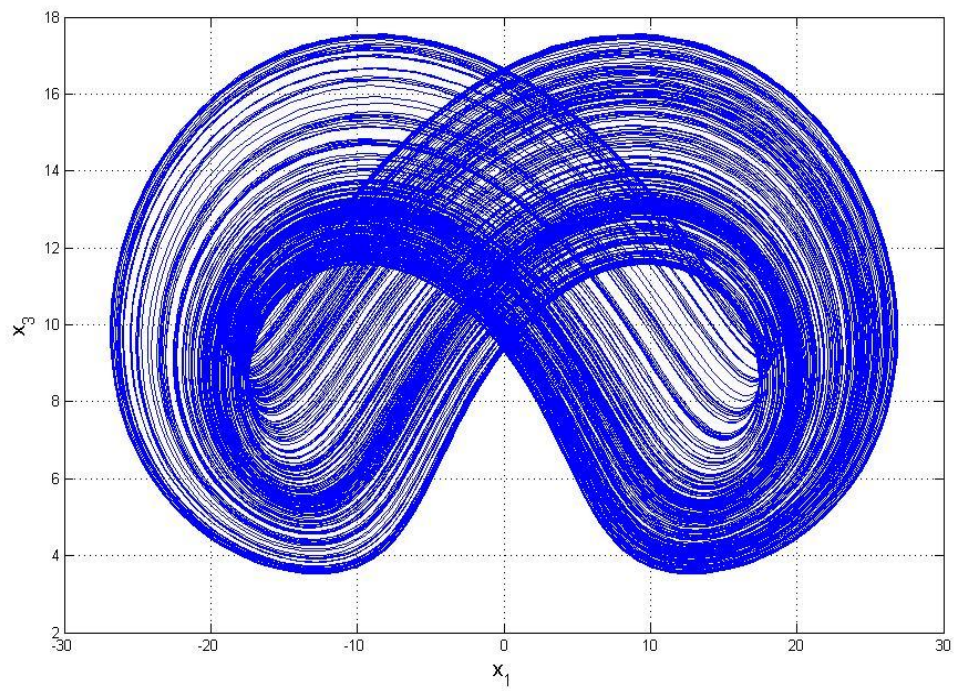


Fig.6 Projection of phase portraits in MATLAB for fuzzy chaotic Chen-Lee system