

DROOP COMPENSATED PULSE FORMING NETWORK DRIVEN PULSED TRANSFORMER DESIGN*

P.M. Ranon, R.L. Schlicher, J.P. O'Loughlin, D.J. Hall**,
M.L. Weyn, P.R. Pelletier, J.D. Sidler, W.L. Baker
WL/AWPB (AFSC), Kirtland Air Force Base, New Mexico 87117

M.C. Scott
Maxwell Laboratories Inc., Albuquerque, NM 87117

*This work was sponsored by WL/AWP (AFSC), Kirtland AFB, NM.

**Presently with Westinghouse R & D Center, Pittsburgh, PA.

ABSTRACT

Pulse transformers are often used in pulsed power for high voltage generation. Unfortunately, due to their transfer characteristics, transformers degrade the input pulse (i.e. limit the risetime, droop exponentially, etc). For low impedance (less than a few tens of Ohms) and long output pulse (on the order of a few microseconds) applications, it is extremely difficult, if not impossible, to use pulse transformers. We describe in this paper pulse forming networks (PFNs) which are droop compensated to make the output pulse square for the duration of the input pulse. Using this technique, one can design a PFN which can deliver constant power to a wide range of loads (with the proper transformer load combinations) [1].

THEORY

The authors have shown in an earlier paper [2] that in order to obtain a flat output pulse from a transformer, the necessary primary current should be as shown in Figure 1, and is expressed as

$$i_1(t) = [(L_2/M)I_2 + (R/M)I_2 t]u(t) \quad (1)$$

where:

- $i_1(t)$ -- transformer primary current
- I_2 -- magnitude of the secondary current
- L_1 -- primary self inductance
- L_2 -- secondary self inductance
- M -- mutual inductance = $k(L_1 L_2)^{1/2}$
- R -- load resistance
- $u(t)$ -- unit step function

By the usual Fourier transform and network theory, the necessary PFN values can then be expressed mathematically as [2,3,4,5,6]

$$L_{\text{odd}} = \frac{1}{4+2(RT/L_2)} \quad (2a)$$

$$C_{\text{odd}} = \frac{4+2(RT/L_2)}{n^2 \pi^2} \text{ (charged)} \quad (2b)$$

$$L_{\text{even}} = \frac{1}{(2RT/L_2)} \quad (2c)$$

$$C_{\text{even}} = \frac{(2RT/L_2)}{n^2 \pi^2} \text{ (uncharged)} \quad (2d)$$

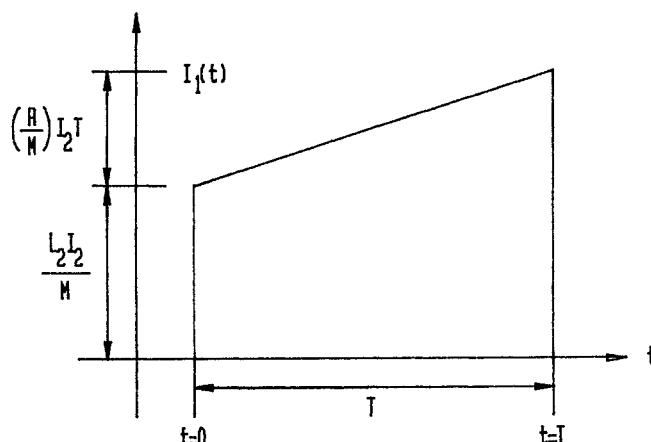


Figure 1. Required Transformer Input

where

- T -- pulse duration
- n -- integer representing the harmonics

Such a PFN is shown schematically in Figure 2. It was also shown that unlike normal PFNs, the DCPFNs can be made to deliver constant power pulses to a wide range of loads provided that the dimensionless droop parameter term, $2RT/L_2$, remained the same (i.e. matched by the transformer-load combinations). The direct consequence of which is that DCPFNs can be made into Constant Power Sources with the proper transformer load combinations.

DESIGN

For each typical PFN, load impedance (Z) and pulse duration (τ) are specified. However, an added scaling parameter is necessary for the DCPFN. This is the secondary self inductance of the transformer.

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE JUN 1989		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE Droop Compensated Pulse Forming Network Driven Pulsed Transformer Design				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) WL/AWPB (AFSC), Kirtland Air Force Base, New Mexico 87117				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES See also ADM002371. 2013 IEEE Pulsed Power Conference, Digest of Technical Papers 1976-2013, and Abstracts of the 2013 IEEE International Conference on Plasma Science. Held in San Francisco, CA on 16-21 June 2013. U.S. Government or Federal Purpose Rights License.					
14. ABSTRACT Pulse transformers are often used in pulsed power for high voltage generation. Unfortunately, due to their transfer characteristics, transformers degrade the input pulse (i.e. limit the risetime, droop exponentially, etc). For low impedance (less than a few tens of Ohms) and long output pulse (on the order of a few microseconds) applications, it is extremely difficult, if not impossible, to use pulse transformers. We describe in this paper pulse forming networks (PFNs) which are droop compensated to make the output pulse square for the duration of the input pulse. Using this technique, one can design a PFN which can deliver constant power to a wide range of loads (with the proper transformer load combinations) [1].					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 3	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

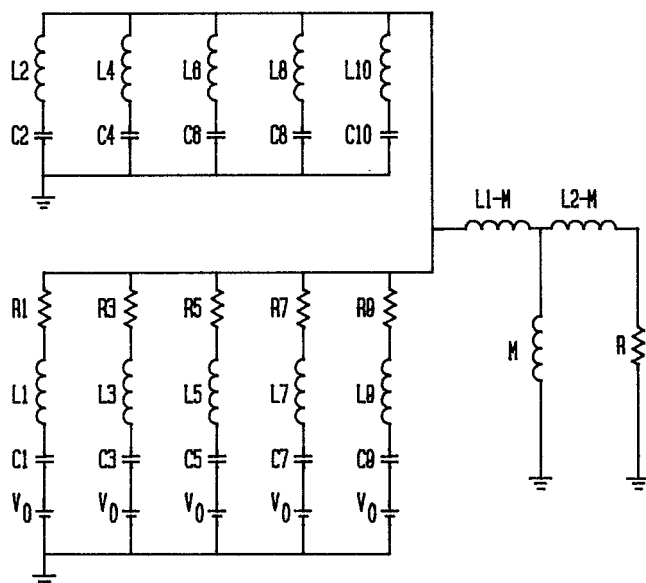


Figure 2. DCPFN Driven Pulsed Transformer

Example of the DCPFN

Suppose it is desirable to generate 100GW pulses for 2.5 μ s, with loads ranging from 1.6 Ohms to 10 Ohms. It is possible to do so by having the proper pulse transformer, described in Table 1, or any of the transformer load combinations tabulated in Table 2 [1,2] which utilize the DCPFN values of Table 3. The simulated output for the case of the 10 Ohm load (1MV, 100GW) is shown in Figure 3 [7]. As described earlier, this 100GW pulse can be delivered to any of the transformer load combinations of Table 2.

Efficiency Considerations

A price is paid for the versatility of DCPFNs however, since the DCPFN efficiency

$$\eta = \frac{4}{4+2(RT/L_2)} * 100\%, \quad (3)$$

is decreased by the droop parameter term. Normalized coefficients of the DCPFN for efficiencies ranging from 50% to 100% in increments of 10% were derived and tabulated in Table 4. The DCPFN would make an excellent laboratory developmental device since it affords the versatility of being able to drive a wide range of loads with a single pulse forming network.

CONCLUSION

We have shown that constant power, long output pulses can be generated for a wide range of loads from a DCPFN. We have also presented the normalized coefficients for a Type C DCPFN for efficiencies ranging from 50% to 100%, which may be converted to the other types of PFNs via network transformations [3].

Table 1
Pulse Transformer Parameters

Primary Winding		
Inner Radius	26.58	cm
Thickness	0.3175	cm
Width	105.0	cm
Inductance	219.2	nH
Secondary Winding		
Number of Turns	10	turns
Inner Radius	25.00	cm
Thickness	0.0508	cm
Pitch	0.1575	cm
Width	100.0	cm
Inductance	20.76	μ H
Coupling		
Coefficient	0.9641	
Mutual Inductance	2.056	μ H

Table 2
Possible Transformer-Load Combinations

Turns Ratio	Secondary Inductance	Coupling Coefficient	Load Resistance
1:10	20.76 μ H	0.9641	10.0 Ω
1:9	16.76 μ H	0.9663	8.1 Ω
1:8	13.20 μ H	0.9685	6.4 Ω
1:7	10.08 μ H	0.9703	4.9 Ω
1:6	7.38 μ H	0.9726	3.6 Ω
1:5	5.11 μ H	0.9748	2.5 Ω
1:4	3.26 μ H	0.9771	1.6 Ω

Table 3
100 GW/250 KJ DCPFN Parameters (+/- 100 KV CHARGE)

Component	Scaled Values
C1	16.23 μ F
L1	39.00 nH
C2	1.53 μ H
L2	103.80 nH
C3	1.80 μ F
L3	39.00 nH
C4	380.00 nF
L4	103.80 nH
C5	650.00 nF
L5	39.00 nH
C6	170.00 nF
L6	103.80 nH
C7	332.50 nF
L7	39.00 nH
C8	95.00 nF
L8	103.80 nF
C9	200.00 nF
L9	39.00 nH
C10	60.00 nF
L10	103.80 nH

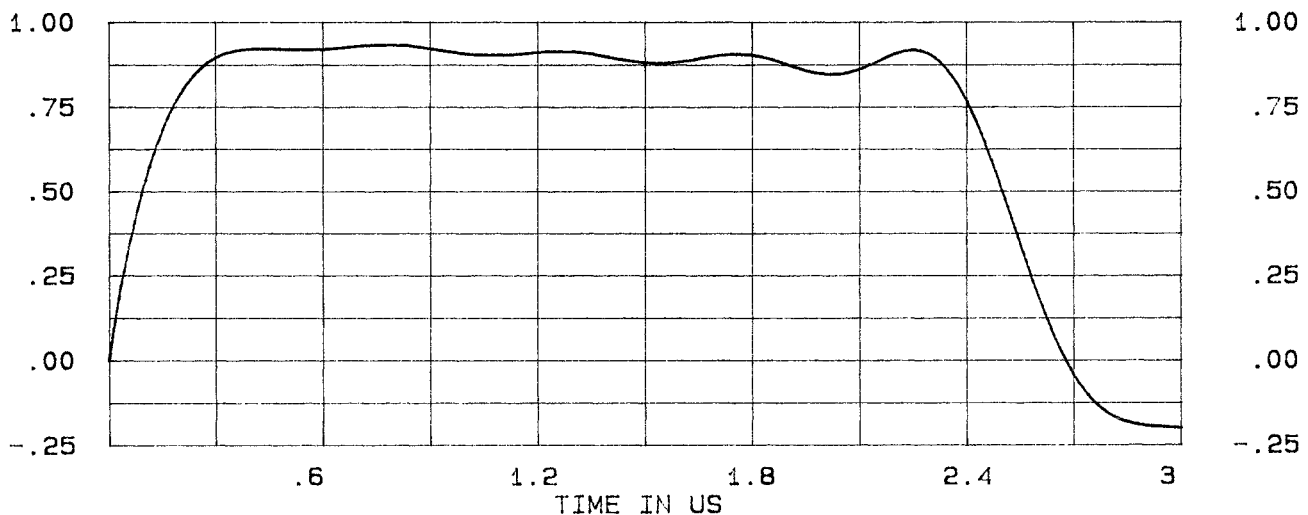


Figure 3. 100 GW, 0.25 MJ Pulse

Table 4
Normalized Droop Compensated Pulse Forming Network Coefficients

Components	Efficiency Values					
	50%	60%	70%	80%	90%	100%
C1	810.6E-3	675.5E-3	579.0E-3	506.6E-3	450.3E-3	405.3E-3
L1	125.0E-3	150.0E-3	175.0E-3	200.0E-3	225.0E-3	250.0E-3
C2	101.3E-3	675.5E-4	434.2E-4	253.3E-4	112.6E-4	NA
L2	250.0E-3	375.0E-3	583.3E-3	100.0E-2	225.0E-2	NA
C3	900.6E-4	750.5E-4	643.3E-4	562.9E-4	500.4E-4	450.3E-4
L3	125.0E-3	150.0E-3	175.0E-3	200.0E-3	225.0E-3	250.0E-3
C4	253.3E-4	168.9E-4	108.6E-4	633.3E-5	281.4E-5	NA
L4	250.0E-3	375.0E-3	583.3E-3	100.0E-2	225.0E-2	NA
C5	324.2E-4	270.2E-4	231.6E-4	202.6E-4	180.1E-4	162.1E-4
L5	125.0E-3	150.0E-3	175.0E-3	200.0E-3	225.0E-3	250.0E-3
C6	112.6E-4	750.5E-5	482.5E-5	281.4E-5	125.1E-5	NA
L6	250.0E-3	375.0E-3	583.3E-3	100.0E-2	225.0E-2	NA
C7	165.4E-4	137.9E-4	118.2E-4	103.4E-4	919.0E-5	827.1E-5
L7	125.0E-3	150.0E-3	175.0E-3	200.0E-3	225.0E-3	250.0E-3
C8	633.3E-5	422.2E-5	271.4E-5	158.3E-5	704.0E-6	NA
L8	250.0E-3	375.0E-3	583.3E-3	100.0E-2	225.0E-2	NA

REFERENCES

- [1]. P.M. Ranon, "Synthesis of Pulse Forming Networks for Generating Flat Top, Constant Power Pulses into Variable Resistive Loads From Pulsed Transformers," U.S. Patent Pending (USAF Disclosure No. 18299).
- [2]. P.M. Ranon, et al., "Synthesis of Droop Compensated Pulse Forming Networks for Generating Flat Top, High Energy Pulses into Variable Loads From Pulsed Transformers," Proceedings of the Eighteenth (18th) Power Modulator Symposium, (Hilton Head Island, SC), June 20-22, 1988, pp. 54--61.
- [3]. G.N. Glasoe and J.V. Lebacqz, Pulse Generators (MIT Radiation Laboratory Series No. 5), McGraw-Hill Book Company, Inc., New York, 1948.
- [4]. D.G. Ball and T.R. Burkes, "PFN Design For Time-varying Load," Proceedings of the Twelfth (12th) Pulse Power Modulator Symposium, February 1976, Buffalo, NY, pp. 156--162.
- [5]. R.M. Roark, et al, "Pulse Forming Networks with Time-Varying or Nonlinear Resistive Loads," Proceedings of the Thirteenth (13th) Pulse Power Modulator Symposium, June 1978, Buffalo, NY, pp. 46--51.
- [6]. E. Kreyszig, Advanced Engineering Mathematics, Fourth Edition, John Wiley & Sons, Inc., New York, 1979.
- [7]. MICRO-CAP II, Spectrum Software, 1021 S. Wolfe Rd., Sunnyvale, CA.