

UNCLASSIFIED

Defense Technical Information Center
Compilation Part Notice

ADP011794

TITLE: Ridged Waveguide Bandpass Filter for Terahertz Applications

DISTRIBUTION: Approved for public release, distribution unlimited

This paper is part of the following report:

TITLE: International Conference on Terahertz Electronics [8th], Held in Darmstadt, Germany on 28-29 September 2000

To order the complete compilation report, use: ADA398789

The component part is provided here to allow users access to individually authored sections of proceedings, annals, symposia, etc. However, the component should be considered within the context of the overall compilation report and not as a stand-alone technical report.

The following component part numbers comprise the compilation report:

ADP011730 thru ADP011799

UNCLASSIFIED

Ridged Waveguide Bandpass Filter for Terahertz Applications

George Goussetis and Djuradj Budimir

Abstract – In this paper a CAD procedure for the design of ridged waveguide E-plane filters for THz applications is presented. The transverse resonance technique has been applied for the rigorous analysis of modal propagation in ridged waveguide. Mode matching method has then been used to derive scattering parameters for the discontinuities involved in a ridged waveguide filter. In order to exhibit the performance of the developed CAD, three bandpass filters at 0.270, 0.550 and 1.340 THz have been designed, simulated and presented.

I. INTRODUCTION

The cross-sectional shape of the ridge waveguide is shown in Fig. 1. Firstly proposed in [1], ridge waveguide propagation has been rigorously studied in [2], [3] and is well known to combine the advantages of lower cutoff frequency of the dominant mode, wider bandwidth free from higher modes and low characteristic impedance. Furthermore, the guided wavelength as well as the characteristic impedance in ridged waveguide propagation varies with the ridges height. Therefore, with no particular constructing difficulty, this type of waveguide permits altered propagation characteristics.

Due to these properties, it is believed that the use of sections of ridged waveguide as resonators in an all-metal E-plane filter may optimize its performance in terms of second passband attenuation; all the waveguide sections will be resonant at a single fundamental frequency, but not simultaneously resonant at any higher frequencies, due to different guide wavelengths in the different filter sections [4]. In order to analyze the proposed filter (Fig. 2), a rigorous analysis of the ridged waveguide propagation is necessary, that can calculate the cutoff frequency as well as the field distribution of each mode. Mode-matching technique will then be applied in order to study the ridged waveguide to metal insert discontinuity.

The generalized transverse resonance method, as described in [3] is appropriate for such demands.

II. THEORY

The analysis of the electromagnetic propagation in a ridged waveguide is based on the generalized transverse resonance technique and implementation of field matching. Since the cross-sectional distribution of the field is independent of the frequency [5], we may analyse the field distribution for a waveguide mode at its cutoff frequency, assuming standing waves along the transverse




Fig. 1: Cross-section of a ridged waveguide

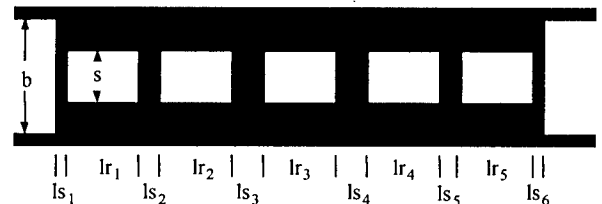
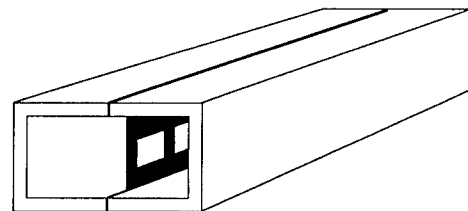


Fig. 2: Ridged waveguide bandpass filter

coordinates and no propagation along the longitudinal axis (transverse resonance). The concept of field matching lies into theoretical division of the cross section under consideration into discrete regions where it will be easy to formulate the x - and y -dependence of the fields. The interface relation (continuity of tangential fields) is then applied. Due to the x -symmetry of the structure, the analysis can be carried out assuming only half of the structure's cross-section. In order to account for all possible cases, along the symmetry plane we should consider both an electric and a magnetic wall [2]. Odd modes however have been proven to be sufficient for the characterisation of the discontinuities under consideration[3].

The authors are with the Wireless Communications Research Group, University of Westminster, London W1M 6JS, UK

Mode Matching Method makes use of the orthogonality of the modal solution of the field distribution.

Tangential fields, expressed in terms of vector potentials [5] are matched in their common surface and using the orthogonality properties, the generalised scattering matrix can be obtained. Even though transmission matrix representation will lead to an easier formulation for the characterisation of cascaded discontinuities, this procedure is potentially unstable due to exponentials with positive arguments. Therefore the scattering matrix representation is used throughout [7].

The design procedure is based on the method proposed by Rhodes [4, 8]. Once the prototype filter has been chosen, the equivalent K-inverter representation with half waveguide wavelength resonators is easily obtained according to [9]. Using the expressions given by Levy [10], the equivalent K value for each septum discontinuity can be obtained from its scattering matrix. Hence the lengths of the metal septa are determined. The resonator lengths are then calculated as half the guide wavelength adding or subtracting the necessary electrical length in order to ensure the K-inverter behaviour of the septa [10].

III. RESULTS

In order to demonstrate the performance of the presented CAD, three ridged waveguide filters have been designed. 20 TE and 20 TM modes were used for the design of each one, which lasted less than one minute on a Pentium Pro with 96MB RAM.

IV. CONCLUSION

An efficient CAD procedure for the design of ridged waveguide filters for THz applications has been presented. The efficiency of the procedure has been exhibited by designing three filters at 270, 550 and 1340 GHz.



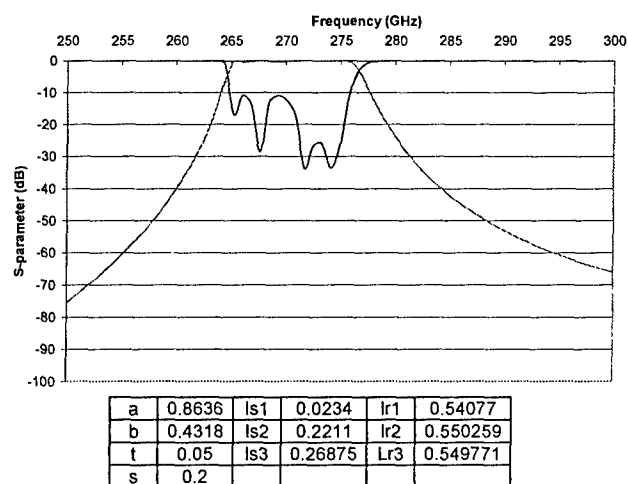


Fig. 3: Dimensions and performance of 270GHz bandpass filter

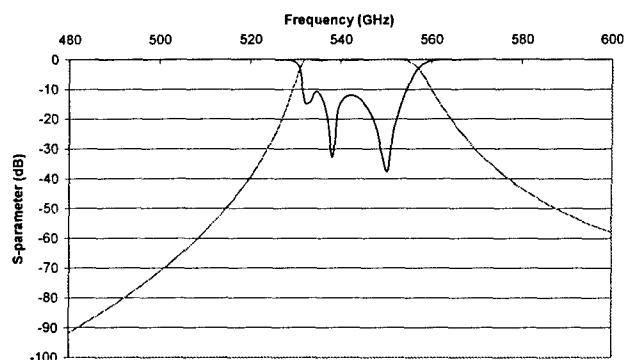

a	0.4	ls1	0.01	lr1	0.2655
b	0.399	ls2	0.0951	lr2	0.275
t	0.005	ls3	0.121	lr2	0.275
s	0.07				

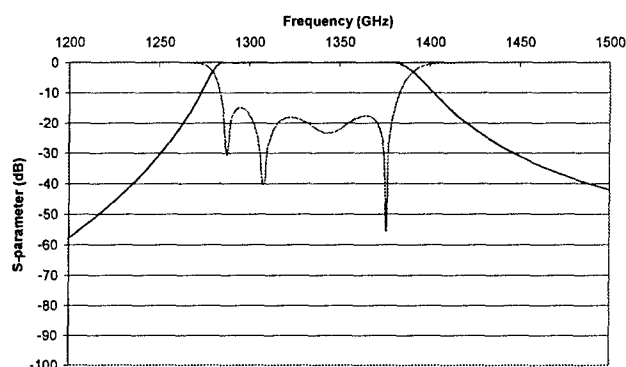

a	0.15	ls1	0.0014	lr1	0.11
b	0.07	ls2	0.0185	lr2	0.1219
t	0.001	ls3	0.0250	lr2	0.1219
s	0.03				

Fig. 4: Dimensions and performance of 550 and 1340 GHz ridged waveguide bandpass filters

Acknowledgement

This work was supported by the Engineering and Physical Sciences Research Council by means of a research grant (GR/K58634), UK

References

1. S. B Cohn., "Properties of Ridge Wave Guide", Proc IRE, Vol 35, August 1947, pp.783-788
2. J.P. Montgomery, "On the complete eigenvalue solution of ridged waveguide", IEEE Trans. Microwave Theory and Techniques, MTT-19, 457-555 (1971)
3. J. Bornemann, "Comparison between different formulations of the Transverse Resonance Field-Matching Technique for the three-dimensional analysis of metal-finned waveguide resonators", International Journal of Numerical Networks, Devices and Fields, Vol. 4, 63-73 (1991)
4. D. Budimir, Generalized Filter Design by Computer Optimization, Artech House, 1998
5. W. J. Getsinger, "Ridge Waveguide Field Description and Application to Directional Couplers", IRE Trans. On Microwave Theory and Techniques, MTT-10, p. 42-50 (1962)

6. R. E Collin., Field Theory of Guided Waves, IEEE Press, 1990
7. Uher, Bornemann, Rosenberg, "Waveguide Components for Antenna Feed Systems: Theory and CAD", Artech House, 1993
8. J.D. Rhodes, "Microwave circuit realizations", in *Microwave Solid State Devices and Applications*, D.V. Morgan and M.J. Howes, Eds. England: Peregrinus, 1980, pp.49-57
9. G. Matthaci, L. Young, E.M.T. Jones, Microwave Filters, Impedance Matching Networks and Coupling Structures, Artech House, Dedham, MA 1980
10. R. Levy, "The Generalized Design Technique for Practical Distributed Reciprocal Ladder Networks", IEEE Transactions Microwave Theory and Techniques, vol. MTT-21, pp. 1-15, 1987