

UNCLASSIFIED

AD 273 536

*Reproduced
by the*

**ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA**



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

273 536

273 536

ARF

ARTHUR RESEARCH FOUNDATION OF ILLINOIS INSTITUTE OF TECHNOLOGY

CHITRUGH B
AS AD NC

TECHNOLOGY CENTER

ARF Project No. E154

SELF ORGANIZING NETWORKS

Annual Report

62-2-60

ARMOUR RESEARCH FOUNDATION
of
Illinois Institute of Technology
Technology Center
Chicago 16, Illinois

ARF Project No. E154

SELF ORGANIZING NETWORKS

ANNUAL REPORT

February 15, 1961 - February 14, 1962

Contract No. Nonr-3392(00)

NR 048-165

for

Department of the Navy
Office of Naval Research
Washington 25, D. C.

ADAPTIVE LOGICAL NETWORKS
EMPLOYING OPTICAL TECHNIQUES

I. INTRODUCTION

This report describes the initial phases of a program directed toward the realization of complex adaptive logical networks by optical means. The logical networks with which the research is concerned are comprised of threshold devices in various configurations. The general hypothesis which underlies the program is that networks of threshold devices can be designed which will be capable of useful application to pattern recognition problems of several types, provided that we can discover simple, inexpensive means for their manufacture. Still another notion which we accept is that effective solutions to such problems will be found not in terms of networks of fixed behavior, but in terms of networks whose parameters can be easily altered by suitable "action principles" or adaptive strategies.

This point of view is by no means unique to or original with the Armour Research Foundation, and is perhaps best represented by the work of Rosenblatt on the Perceptron. What characterizes our work is the particular interest in optical means for the realization of such networks and in the theoretical problems associated with the discovery of adaptive strategies within a framework constrained by the properties of the optical structures.

While the program has been aimed at problems of both a theoretical and "hardware" nature, the major effort during the initial phase has been directed at the realization of a simple optical device for adaptive pattern

recognition. This report will therefore be confined entirely to a discussion of this aspect of the program and will reference theoretical results only when necessary to explain some aspect of the design.

II. AN OPTICAL THRESHOLD OPERATOR

We define a picture P as a two dimensional array consisting of N finite-area elements each of which has an optical transmission from the two-valued field consisting of t^0 and t^1 . The values t^0 and t^1 correspond to the values 0 and 1 in the usual binary field, or the values opaque and clear from the subjective visual field. Note that if we place such a picture in the path of a uniform, collimated beam of light, the total flux passing through the picture may be computed as follows:

$$F(P) = f \sum_i^N t_i, \quad (1)$$


where $F(P)$ is the total flux passing through the picture, f the flux incident on each element of the picture, and t_i the transmission of the i th picture element according to some arbitrary labeling of the elements of the set P . If we place a second picture W in the optical path and designate the optical transmission of its constituent elements as w_i , where the w_i are in the range $0 \leq w_i \leq 1$ and the i th element of W has incident upon it the flux transmitted by the i th element of P , we may compute the total flux passing through P and W as:

$$F(P, W) = f \sum_i^N w_i t_i. \quad (2)$$

If further we arrange to collect the total flux passing through P and W and cause it to impinge on a flux sensitive photodetector, we may obtain an electrical signal proportional to $\sum_i^N w_i t_i$. This electrical signal can be compared with a threshold value, say Θ , and a two valued indication, say y established which depends on the sign of $\left[\sum_i^N w_i t_i - \Theta \right]$. We note that such an apparatus may be interpreted as a threshold operator having a number of inputs equal to the number of elements of resolution in the picture P and having weights confined to the range of $0 \leq w_i \leq 1$. The "threshold operator" notion is one of central importance in much of the work on pattern recognition and is an operation, the properties of which are becoming increasingly well known. For the sake of those who may not be familiar with this notion, however, or prefer a different language, Fig. 1 has been included to define the threshold operator as a formal operator on a binary array.

Because of the fact that the power of a threshold device having only positive weighting values is very much smaller than one having both positive and negative weights (in terms of the number of different functions of which it is capable), we should like to remove the restriction on weighting values which confine them to the positive range. This restriction may be removed by either of two techniques which may be implemented as follows. In the first implementation, we arrange for the weighting transparency, W , to have two elements of resolution for each element of resolution in the original picture P, say w_{1i} and w_{2i} corresponding to the element i in the picture P. We then employ some technique (for example, a transforming bundle of optical fibers) to cause the flux from the set of elements $w_1 = \{w_{11}, w_{12}, \dots, w_{1i}, \dots, w_{1n}\}$ to impinge on one photodetector and the flux from the set $w_2 = \{w_{21}, w_{22}, \dots, w_{2i}, \dots, w_{2n}\}$ to impinge on a second photodetector.

ARMOUR RESEARCH FOUNDATION OF ILLINOIS INSTITUTE OF TECHNOLOGY

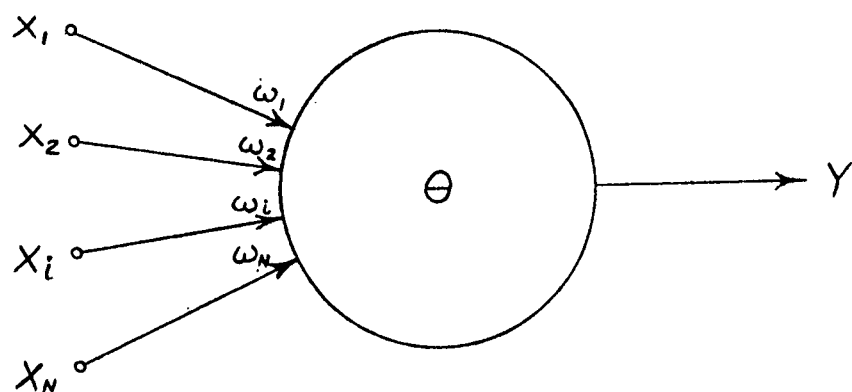

$$Y = 1 \quad \text{IF} \left(\sum_i^N \omega_i X_i - \theta \right) > 0$$

$$Y = 0 \quad \text{IF} \left(\sum_i^N \omega_i X_i - \theta \right) \leq 0$$

$$X_i = 0, 1$$

$$Y = 0, 1$$

$$-1 < \omega_i < +1$$

FIG. 1 -- THRESHOLD OPERATOR

If E_1 is the electrical output of the first photodetector and E_2 the output of the second detector we see that the quantity $(E_1 - E_2)$ is obtained as follows:

$$(E_1 - E_2) = kf \sum_i^N w_{1i} t_i - kf \sum_i^N w_{2i} t_i = kf \sum_i^N (w_{1i} - w_{2i}) t_i, \quad (3)$$

where k is proportional to the detector sensitivity.

Thus the quantity playing the role of the weight in the threshold operator formulation of the above device is $w_i = (w_{1i} - w_{2i})$. Clearly w_i can now take on values from the range $-1 \leq w_i \leq +1$.

Note that we eliminate the requirement for the transforming bundle of optical fibers if we employ instead a replica of P and duplicate systems to obtain the quantities E_1 and E_2 . Note further that if we add to both copies of the picture P (and in fact to both copies of every picture which will be an input to the device) a region in which the transmission is always t^1 (for example a clear border), and designate the transmission of the weighting transparencies in the corresponding "border" areas as Θ_1 , and Θ_2 , then the quantity $E_1 - E_2$ will be modified as follows:

$$(E_1 - E_2) = k \left[\sum_i^N (w_{1i} - w_{2i}) t_i - A t^1 (\Theta_2 - \Theta_1) \right], \quad (4)$$

where A refers to the area of the "border" region of P relative to the area of an element of resolution.

Making the obvious substitutions above, and adding a subscript j to indicate the identity of the j th picture, eg. the picture P_j having elements with transmissions t_{ij} , we see that

$$\text{Sign} \left[E_{1j} - E_{2j} \right] = \text{Sign} \left[\sum_i^N w_i t_{ij} - \Theta \right]. \quad (5)$$

ARMOUR RESEARCH FOUNDATION OF ILLINOIS INSTITUTE OF TECHNOLOGY

Having indicated how the structure described above provides a realization of a threshold operator with optical input, we pose two additional questions. First, "Can we elaborate the above structure so as to provide networks of threshold operators rather than single operators the logical potential of which is so extremely limited?", and second, "Can we discover convenient means whereby the structure, either in its original form or in an elaborated form, can be rendered adaptive?". It is primarily the second question with which this report will deal. Further consideration of the elaboration of the structure must await developments in the theory of such adaptive networks as well as the quantitative results of the effort to render the single operator adaptive.

III. ADAPTIVE TECHNIQUES FOR OPTICAL THRESHOLD DEVICES

The work of Rosenblatt, Joseph, Widrow, Stafford, and others, has demonstrated the fact that a number of adaptive strategies exist which will cause a single threshold device to converge to any desired behavior within its structural limitations. Most of the adaptive strategies are of the error-correcting variety, i.e. a sequence of samples from the set of all inputs is presented to the threshold device, the threshold device is caused to evaluate each input (assign it a name) based on the existing weight and threshold values, and the device is modified if and only if the device response (the assigned name) is not in accord with the "desired" response. Clearly in this case "error" simply means that the device response to a particular input picture is not what we should like it to be. It can be readily demonstrated that a strategy which calls for a positive increment in all weights whose increased value would have "tended toward" the correct response, together

with a negative increment in those weights whose decrease will "tend toward" a correct response, is an effective strategy. By "effective strategy" we mean one which will result in a finite number of errors for any initial values of the weights. While the fact that such a strategy will converge is an interesting result, the strategy is not one that can be considered for any practical optical device since the absolute value of the weights required may be extremely large. A more practical formulation of a strategy is one in which each "increase" takes the weight some fraction of the way from its present value to a "maximum" value, and each "decrease" takes it some fraction of the way toward a "minimum" value, eg.

$$\begin{aligned}\Delta w_i \text{ (increase)} &= \alpha \left[w_{\max} - w_i(t) \right] \\ \Delta w_i \text{ (decrease)} &= \alpha \left[w_{\min} - w_i(t) \right]\end{aligned}\tag{6}$$

Such a strategy has also been described as having "decay" since we may think of the change in weight as being comprised of two parts, a fixed increment equal to $\pm \alpha$ and a "decay" equal to $\alpha w_i(t)$. While such a strategy can be shown to converge in the same sense that the fixed increment strategy will converge, it will not do so for all functions if we additionally require that the quantity $\left| \left[\sum_i^N w_i t_{ji} - \Theta \right] \right|$ be greater than some positive quantity for all j . Such a requirement corresponds to the demand that the response be unambiguous since, if we had no such requirement, we might regard as acceptable a set of weights which for some inputs yielded values of the quantity $\left[\sum_i^N w_i t_{ji} - \Theta \right]$ the sign of which could be altered by arbitrarily small changes in Θ . Let us refer to the modified strategy as described in equation 6 as an "exponential" strategy. The term "exponential" is used to suggest the way in which the weighting values approach their limiting value as a result of a sequence of equal-sign changes.

ARMOUR RESEARCH FOUNDATION OF ILLINOIS INSTITUTE OF TECHNOLOGY

The particular approach to an adaptive optical structure which is being investigated at the present time leads to a strategy of the "exponential" variety. The problem of adaption in the context of the optical scheme previously discussed is that of finding a scheme to generate the weighting transparencies appropriate to a specified behavior of the device. The approach being pursued can be most easily explained with the aid of Fig. 2. Figure 2 also serves as a diagrammatic representation of the experimental apparatus with which this technique is being evaluated. Before attempting to describe Fig. 2, however, we should discuss the general properties of the material being utilized as the weighting transparency. This material is known as a photochromic or phototropic material and has the property that its transmission in a portion of the visible spectrum may be reversibly altered by exposure to relatively high intensity radiation in other portions of the spectrum. The National Cash Register Company has been extremely active in the development of these materials and has supplied the films or transparencies used in the equipment to be described. To be more specific relative to the properties of the films, Fig. 3, curve A, shows the transmission of a sample of a particular film supplied by NCR in its "clear" state, while curve B shows its transmission after it has been exposed to high intensity radiation confined to the blue end of the spectrum (in fact essentially a white source passed through the filter of Fig. 4, curve B).

After subsequent illumination with high intensity "yellow" light, eg. a white source passed through the filter of Fig. 4, curve Y, the transmission of the photochromic again becomes that of Fig. 3, curve A. Thus we see that if we "read" the condition of the photochromic film by means of a low intensity source operating over the spectrum defined by the filter indicated

ARMOUR RESEARCH FOUNDATION OF ILLINOIS INSTITUTE OF TECHNOLOGY

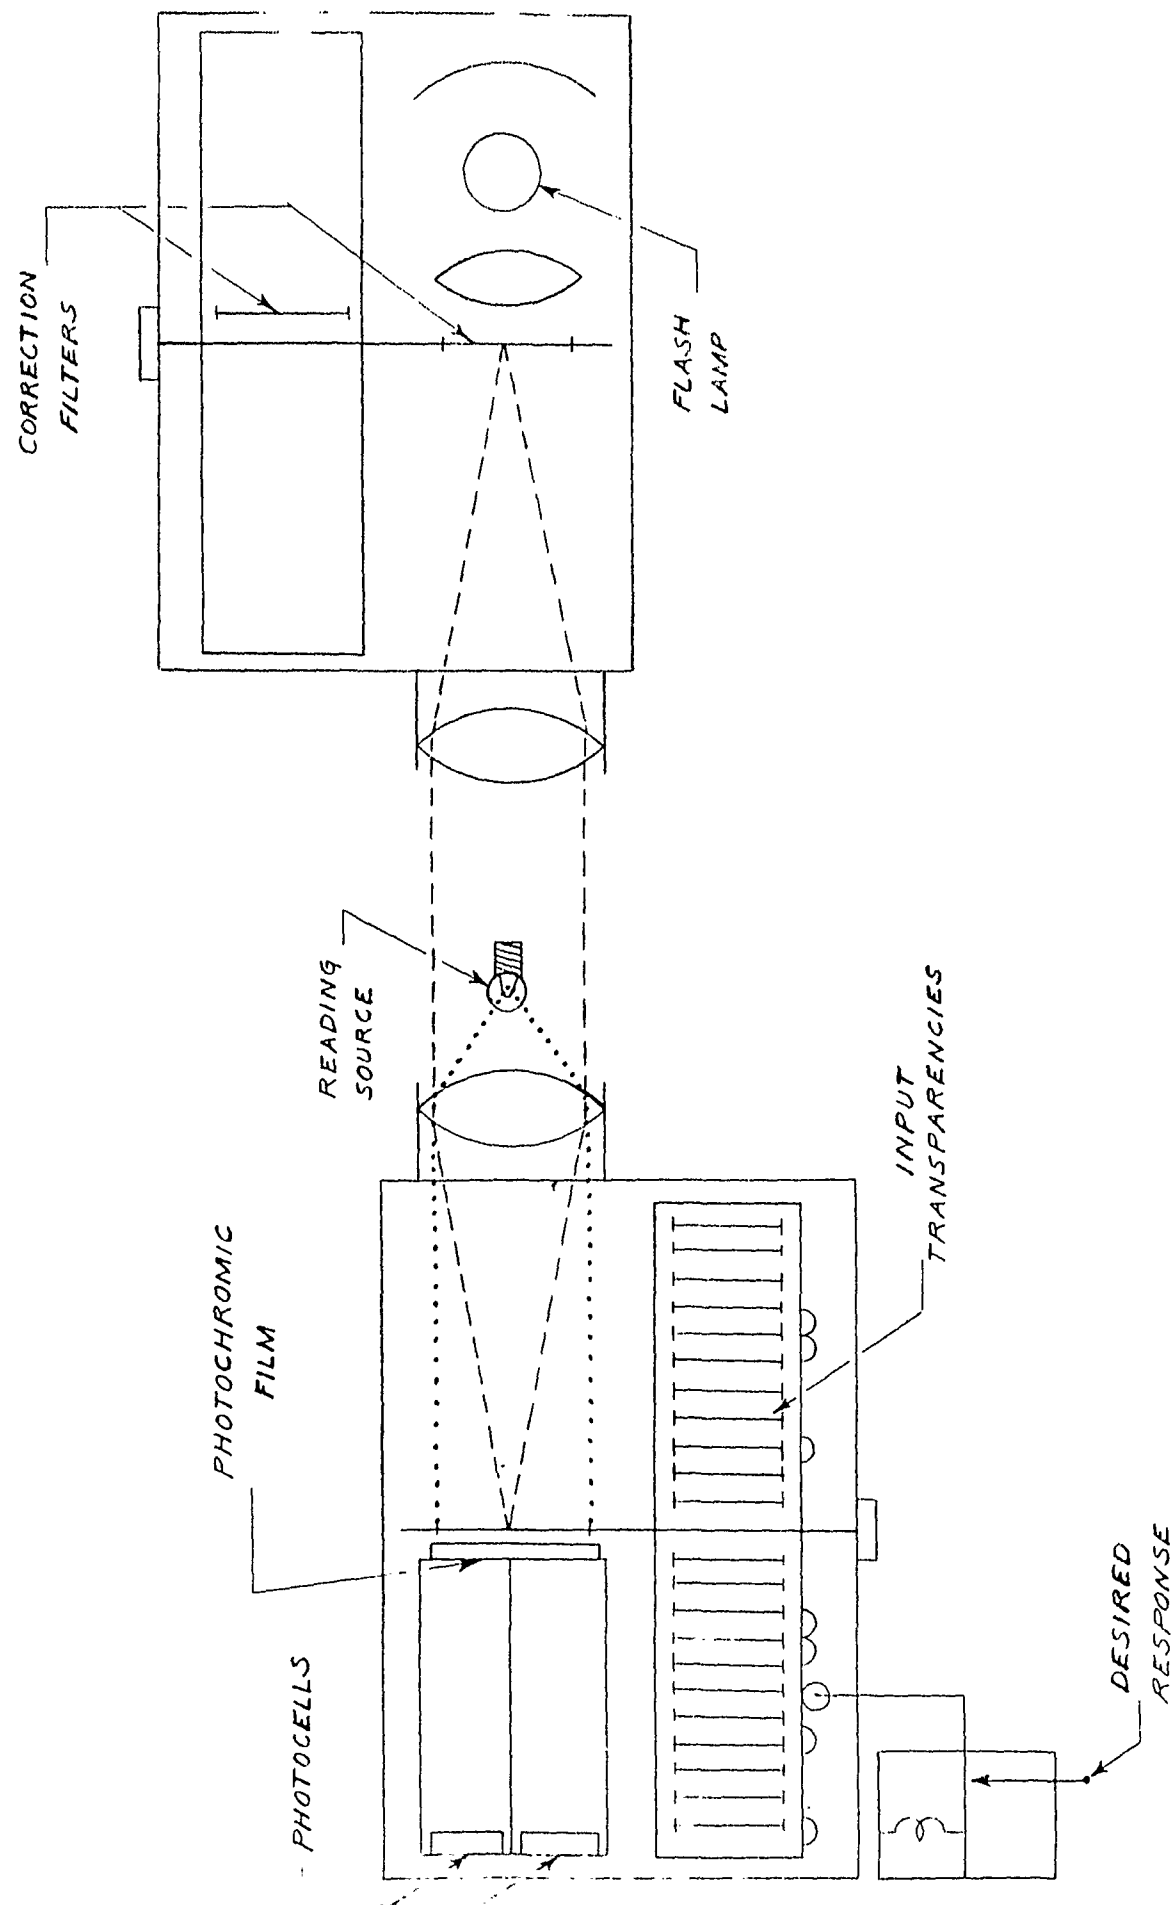


FIG. 2 -- SCHEMATIC REPRESENTATION OF EXPERIMENTAL APPARATUS

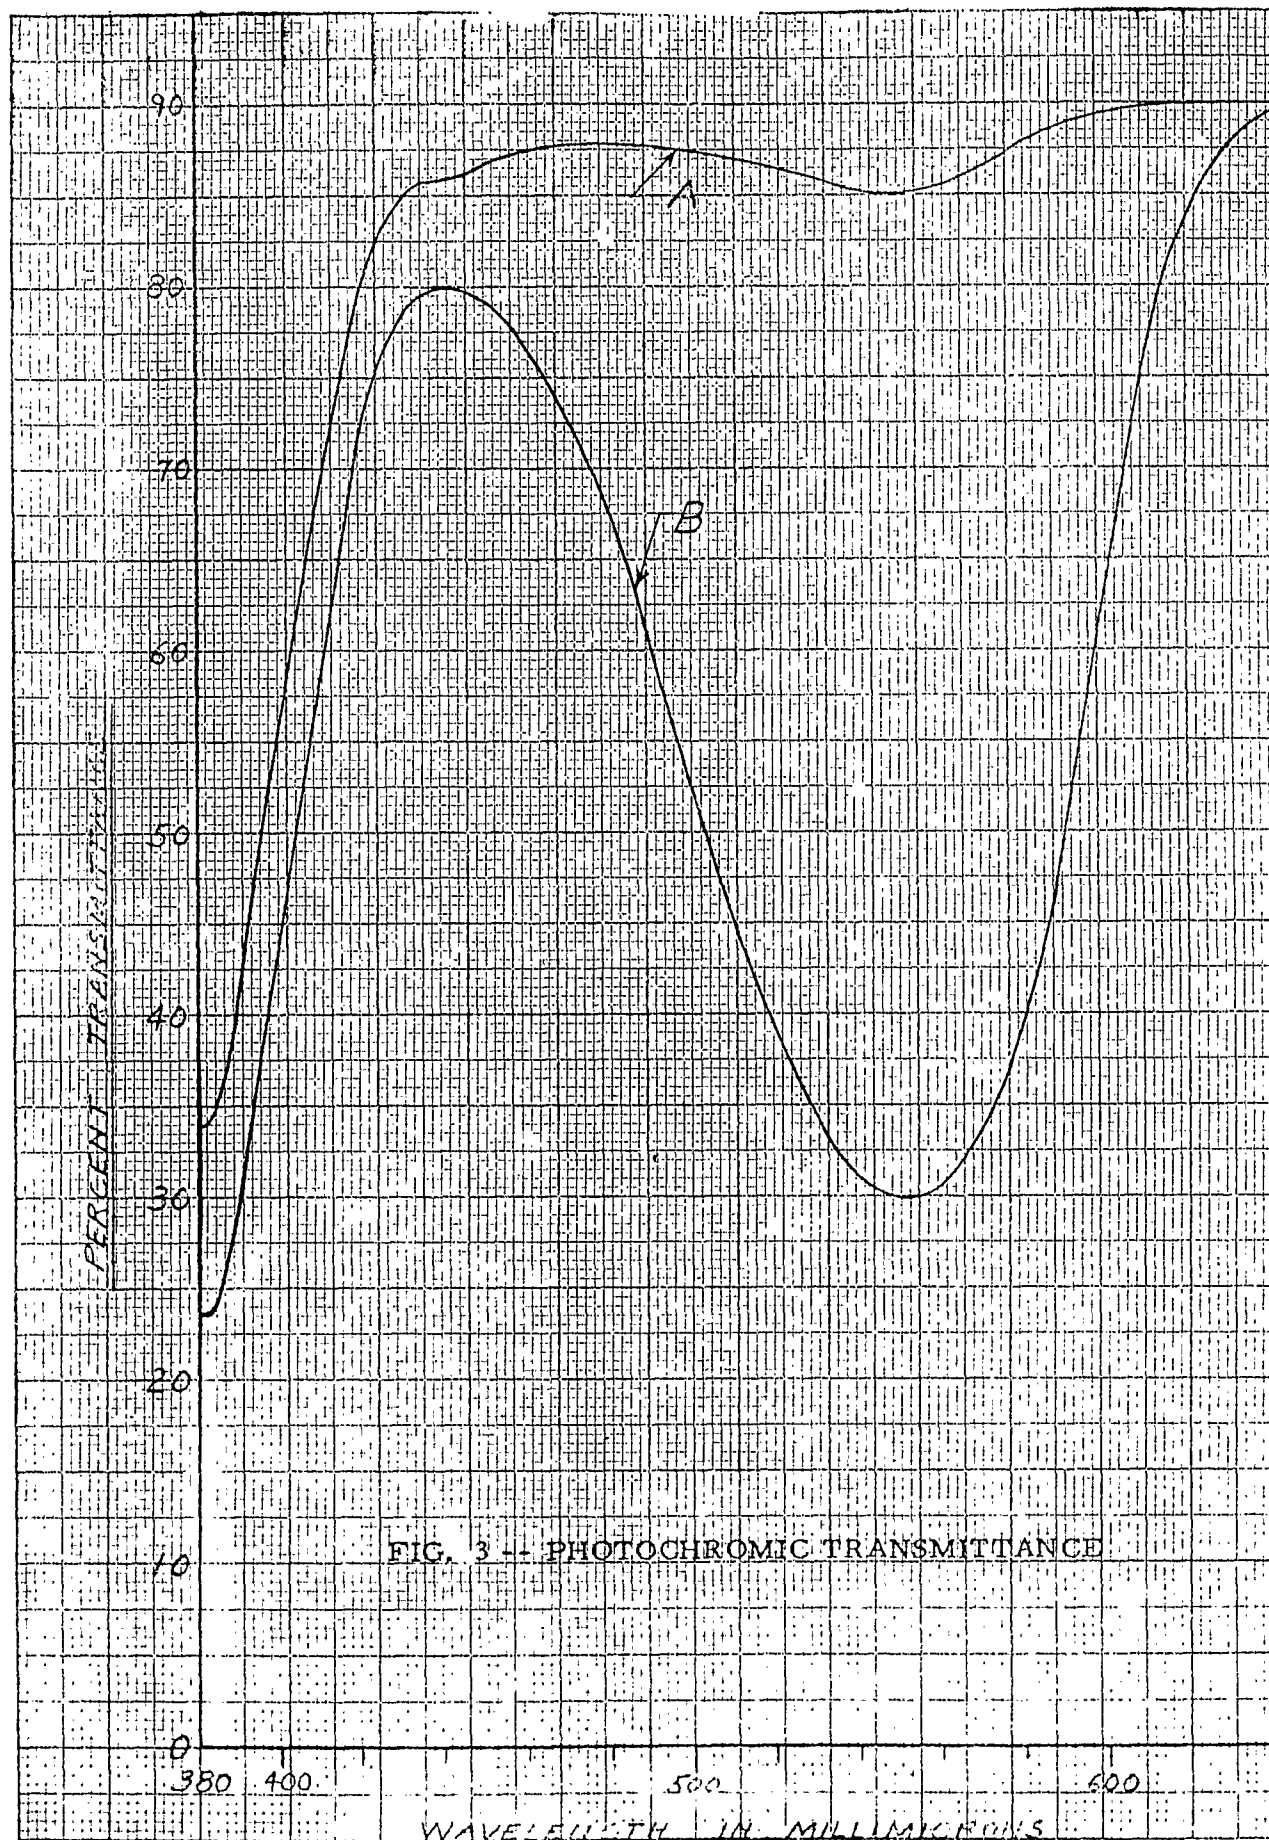


FIG. 3 -- PHOTOCHROMIC TRANSMITTANCE



FIG. 1 - COATING AND ERASING FILM TRANSMITTANCE

as curve A in Fig. 5, the observed transmission can be anywhere from roughly 0.3 to roughly 0.8, depending on the previous history of the exposure of the transparency to blue and/or yellow radiation. It should also be remarked that although the material is relatively stable (in the dark at room temperature it will decay toward an equilibrium with a time constant of the order of hours), we are to some extent faced with a kind of macroscopic uncertainty principle. If we should like to determine the state of the photochromic by measuring its transmission, the measuring process itself alters the transmission we seek to measure. The saving feature is found however in the energies required. The energy required to "read" the film is so small compared to that required to "write" or "erase" the film that the reading energy may for all intents and purposes be ignored.

Returning now to Fig. 2, we note that the input transparency (actually a 35 mm slide) is introduced into the optical path from the slide magazine of a modified commercial slide projector with automatic slide changing features. The picture consists of two side by side versions of the same pattern plus a "border" region. The "desired" response corresponding to each input picture is sensed by means of a mechanical switching arrangement actuated by the slide magazine. After a transparency has been inserted the reading source, which is placed at the focus of the projection lens associated with the lefthand projector of Fig. 2, is turned on. The reading source illuminates the input transparency and the photochromic weighting transparency with a uniform collimated beam. The flux through each of the two halves of the transparency is collected separately and caused to impinge on the two photodetectors. The two detectors (actually photoresistors) are wired into a bridge circuit so that the direction of bridge unbalance indicates the sign of

ARMOUR RESEARCH FOUNDATION OF ILLINOIS INSTITUTE OF TECHNOLOGY

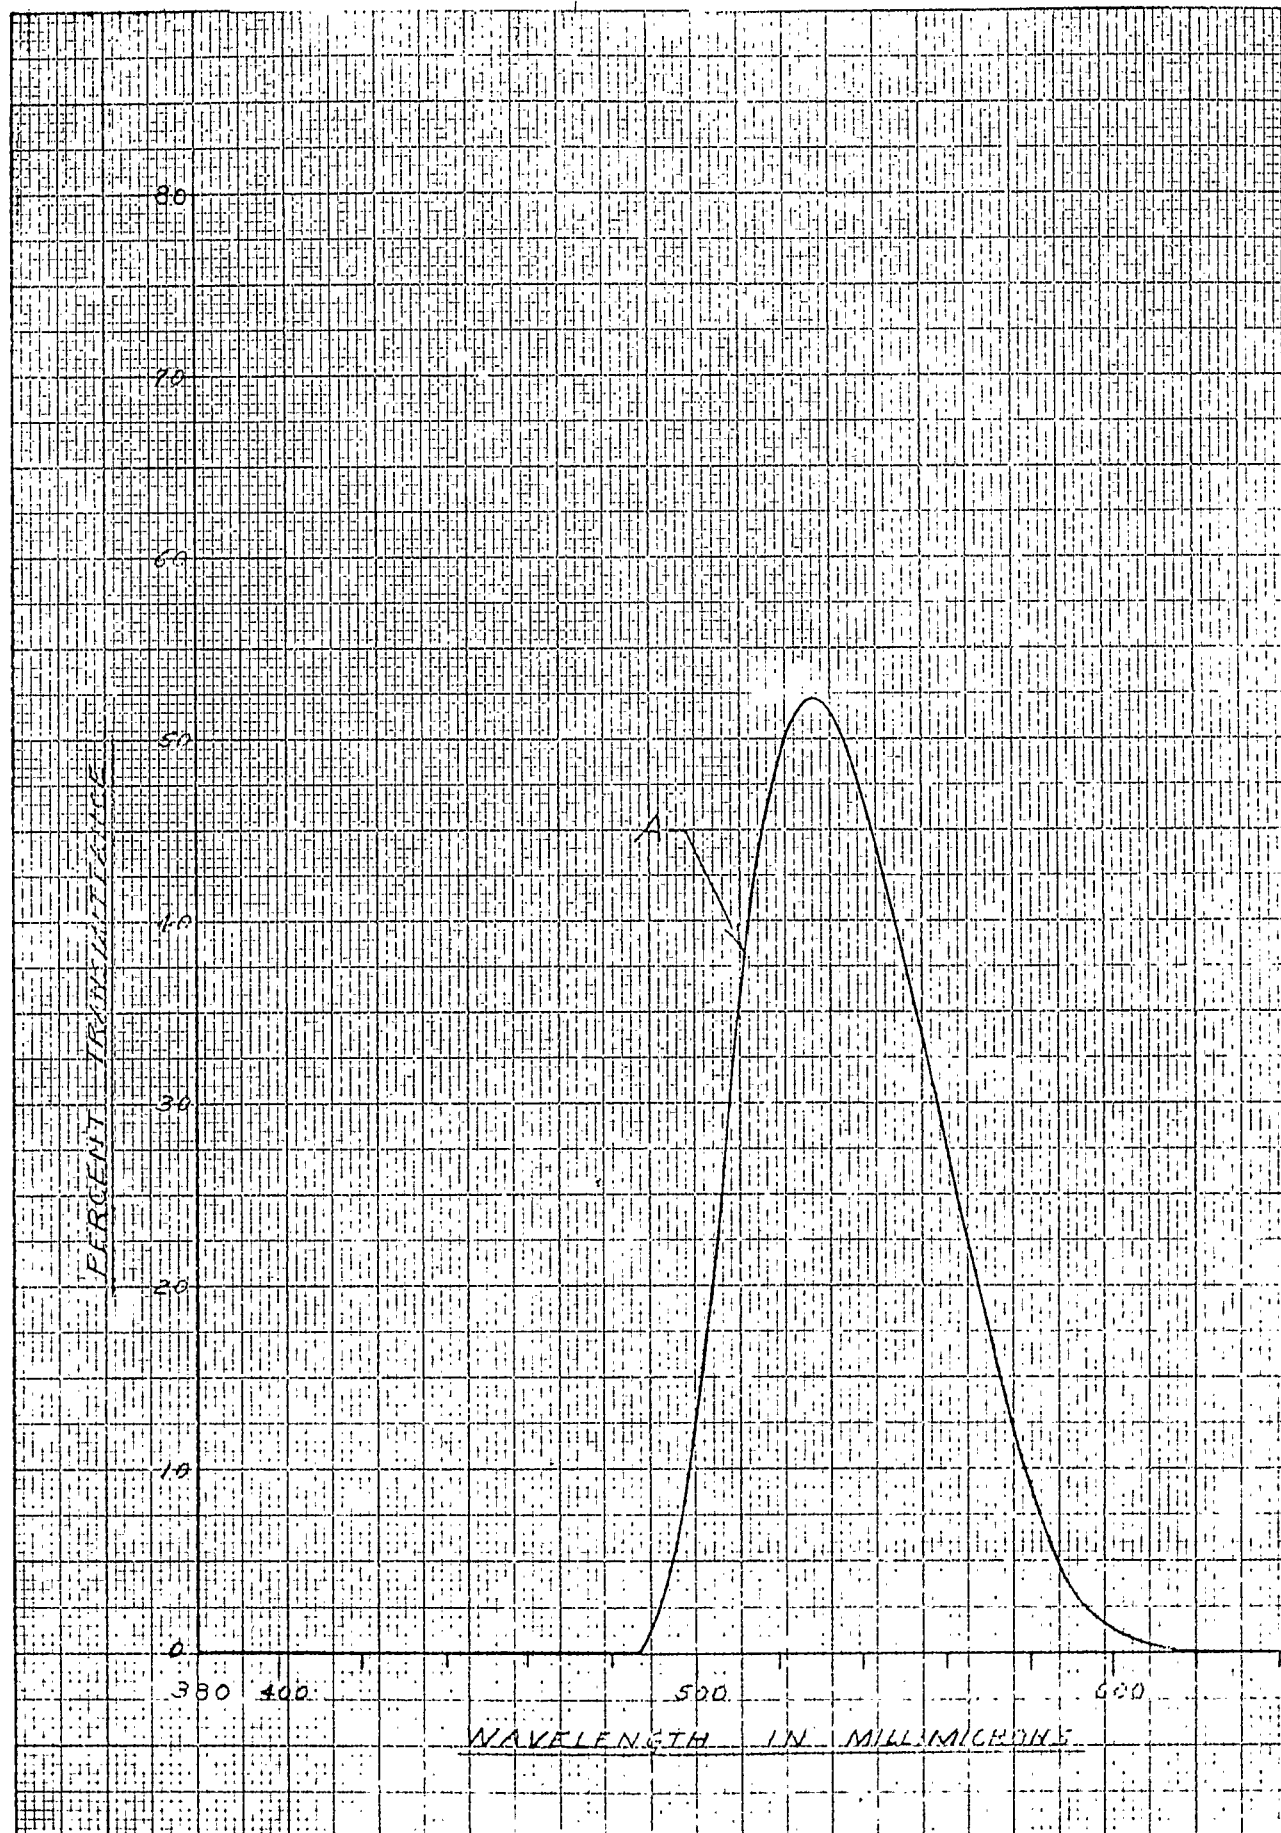


FIG. 5 -- READING FILTER TRANSMITTANCE
- 13 -

$\left[\sum_i^N w_i t_i - \Theta \right]$. If the sign of $\left[\sum_i^N w_i t_i - \Theta \right]$ is in accord with the desired response, as indicated by the mechanical sensing finger, the picture or transparency is withdrawn and the next transparency inserted. If however the response is in "error", the high energy gas discharge lamp located in the right hand projector is fired before the transparency is withdrawn. The right hand projector slide magazine contains two filter arrangements, one of which is inserted in the projector prior to the firing of the high energy source. The selection of the filter actually inserted in each instance is based on the nature of the "desired" response. The filter arrangements each consist of two, side-by-side filters, one "blue" (having the character indicated in Fig. 5, curve B), and one "yellow" (having the character indicated in Fig. 5, curve Y). The two filters are different in that they are mirror images of one another. Whichever filter arrangement is in the projector is imaged by the pair of projection lenses onto the photochromic film (through the input transparency) so that the right-hand picture is flooded with blue light and the left-hand picture with yellow light (or the reverse) whenever an "error" is committed by the device. It can be demonstrated that this structure implements an adaptive strategy of the "exponential", error-correcting variety discussed earlier. The device is designed so that it will automatically and repeatedly sequence through the set of input pictures until it has gone through the entire set once without error, at which point it terminates the experiment.


IV. EXPERIMENTAL RESULTS

Unfortunately no experimental results of any interest have as yet been obtained. One of the major problems associated with the design described above was due to the fact that the high intensity flash from the

gas discharge lamp is also incident on the photodetectors. Although the photodetector output is not significant at the time at which the flash lamp is ignited, all detectors investigated suffered in some way from the exposure to such high energy flashes, so that it was found necessary to add a shutter to protect the detectors. The particular shutter design created still other problems as a result of the vibration it introduced in the equipment. Still another problem resulted from our inability to obtain photodetectors which were sufficiently well matched over the necessary dynamic range of incident "reading" illumination. For the above reasons, among others, a portion of the optical system has been redesigned to employ a single detector and a chopper. In this design the single detector views the right and left half fields alternately. Also the present chopper design eliminates the need for a separate shutter to protect the detector from the high intensity flash. It is anticipated that the improved instrumentation will provide experimental results more nearly in accord with the results of the computer simulation experiments on which the design has been based.

Respectfully submitted,

ARMOUR RESEARCH FOUNDATION
of Illinois Institute of Technology



Scott H. Cameron, Senior Engineer

APPROVED:



V. H. Disney, Director
Electronics Research

ARMOUR RESEARCH FOUNDATION OF ILLINOIS INSTITUTE OF TECHNOLOGY

DISTRIBUTION LIST

Assistant Sec. of Def. for Res. and Eng. Information Office Library Branch Pentagon Building Washington 25, D. C.	2	Bureau of Naval Weapons Department of the Navy Washington 25, D. C. ATTN RAAV Avionics Division
Armed Services Technical Information Agency Arlington Hall Station Arlington 12, Virginia	10	Bureau of Naval Weapons Department of the Navy Washington 25, D. C. ATTN RMWC Missile Weapons Control Division
Chief of Naval Research Department of the Navy Washington 25, D. C. ATTN Code 437, Information Systems Branch	2	Bureau of Ships Department of the Navy Washington 25, D. C. ATTN Communications Branch Code 686
Chief of Naval Operations OP-07T-12 Navy Department Washington 25, D. C.		Naval Ordnance Laboratory White Oaks Silver Springs 19, Maryland ATTN Technical Library
Director, Naval Research Laboratory Technical Information Officer Code 2000 Washington 25, D. C.	6	David Taylor Model Basin Washington 7, D. C. ATTN Technical Library
Commanding Officer, Office of Naval Research Navy No. 100, Fleet Post Office New York, New York	10	Naval Electronics Laboratory San Diego 52, California ATTN Technical Library
Commanding Officer, ONR Branch Office 346 Broadway New York 13, New York		University of Illinois Control Systems Laboratory Urbana, Illinois ATTN D. Alpert
Commanding Officer, ONR Branch Office 495 Summer Street Boston 10, Massachusetts		University of Illinois Digital Computer Laboratory Urbana, Illinois ATTN Dr. J. E. Robertson
Office of Technical Services Technical Reports Section Department of Commerce Washington 25, D. C.		Air Force Cambridge Research Center Laurence C. Hanscom Field Bedford, Massachusetts ATTN Electronics Research Directorate Library
Bureau of Ships Department of the Navy Washington 25, D. C. ATTN Code 671 NTDS		Technical Information Officer US Army Signal Research and Development Laboratory Fort Monmouth, New Jersey ATTN Data Equipment Branch

National Security Agency
Fort Geo. G. Meade, Maryland
ATTN Howard Campaigne

U. S. Naval Weapons Laboratory
Dahlgren, Virginia
ATTN Head, Computation Division
G. H. Gleissner

National Bureau of Standards
Washington 25, D. C.
ATTN Dr. S. N. Alexander

Aberdeen Proving Ground, BRL
Aberdeen Proving Ground, Maryland
ATTN J. H. Giese, Chief
Computation Laboratory

Commanding Officer
ONR Branch Office
John Crerar Library Bldg.
86 East Randolph Street
Chicago 1, Illinois

Commanding Officer
ONR Branch Office
1030 E. Green Street
Pasadena, California

Commanding Officer
ONR Branch Office
1000 Geary Street
San Francisco 9, California

National Bureau of Standards
Washington 25, D. C.
ATTN Mr. R. D. Elbourn

Syracuse University
Electrical Engineering Dept.
Syracuse 10, New York
ATTN Dr. Stanford Goldman

New York University
Washington Square
New York 3, New York
ATTN Dr. H. Kallmann

Office of Naval Research
Washington 25, D. C.
ATTN Code 455

3

Cornell University
Department of Psychology
Ithaca, New York
ATTN Dr. Frank Rosenblatt

Lockheed Missiles and Space Division
3251 Hanover Street
Palo Alto, California
ATTN D. G. Willis

Communications Sciences Laboratory
University of Michigan
180 Frieze Building
Ann Arbor, Michigan
ATTN Gordon E. Peterson

University of Michigan
Ann Arbor, Michigan
ATTN Department of Psychology
Prof. Arthur Melton

University of Michigan
Ann Arbor, Michigan
ATTN Department of Philosophy
Prof. A. W. Burks

Massachusetts Inst. of Technology
Lincoln Laboratory
Lexington 73, Massachusetts
ATTN Mr. Bert F. Green, Jr.
Room C-345

Massachusetts Inst. of Technology
Research Lab. for Electronics
Cambridge, Massachusetts
ATTN Dr. Marvin Minsky

Stanford University
Stanford, California
ATTN Electronics Laboratory
Prof. John G. Linvill

University of Illinois
Urbana, Illinois
ATTN Electrical Engrg. Dept.
Prof. H. von Foerster

University of California - LA
Los Angeles 24, California
ATTN Dept. of Engineering
Prof. Gerald Estrin

Massachusetts Institute of Technology
Research Laboratory of Electronics
Cambridge, Massachusetts
ATTN Prof. W. McCulloch

Naval Research Laboratory
Washington 25, D. C.
ATTN Security Systems, Code 5266
Mr. G. Abraham

Air Force Office of Scientific
Research
Washington 25, D. C.
ATTN Dr. Vahe E. Amassian

Zator Company
140 1/2 Mount Auburn
Cambridge 38, Massachusetts
ATTN R. J. Solomonoff

Telecomputing Corporation
12838 Saticoy Street
North Hollywood, California
ATTN Data Instruments Division
Mr. N. F. Marti

NASA
Goddard Space Flight Center
Washington 25, D. C.
ATTN Arthur Shapiro

Cornell University
Department of Mathematics
Ithaca, New York
ATTN Prof. Mark Kac

Cornell University
Department of Psychology
Ithaca, New York
ATTN Prof. Robert B. MacLeod

Cornell University
Department of Psychology
Ithaca, New York
ATTN Prof. James J. Gibson

Dr. A. M. Uttley
National Physical Laboratory
Teddington, Middlesex
England

Operations Research, Inc.
8605 Cameron Street
Silver Spring, Maryland
ATTN Dr. George Yntema

Swarthmore College
Swarthmore, Pennsylvania
ATTN Dept. of Electrical Engrg.
Prof. Carl Barus

University of Pennsylvania
Department of Psychology
Philadelphia, Pennsylvania
ATTN Dr. Jacob Beck

Diamond Ordnance Fuze Laboratory
Connecticut Ave. and Van Ness St.
Washington 25, D. C.
ORDTL-012, E. W. Channel

Harvard University
Cambridge, Massachusetts
ATTN School of Applied Science
Dean Harvey Brook

U. S. Naval Training Device Center
Port Washington
Long Island, New York
ATTN S. Domeshek, Code 3144

Office of Naval Research
Washington 25, D. C.
ATTN Code 454, Dr. R. Trumbull

Wright Air Development Division
Electronic Technology Laboratory
Wright Patterson Air Force Base
Ohio
ATTN WWRNEB Computer and
Bionics Branch

Laboratory for Electronics, Inc.
1079 Commonwealth Ave.
Boston 15, Massachusetts
ATTN Dr. H. Fuller

Stanford Research Institute
Computer Laboratory
Menlo Park, California
ATTN H. D. Crane

The Rand Corp.
1700 Main St.
Santa Monica, California
ATTN Numerical Analysis Dept.
Willis H. Ware

Zator Co.
140 1/2 Mt. Auburn Street
Cambridge 38, Mass.
ATTN Calvin N. Mooers

Massachusetts Institute of Technology
Cambridge 39, Mass.
ATTN Prof. John McCarthy,
26-007B

Office of Naval Research
Washington 25, D. C.
ATTN Code 430

Carnegie Institute of Technology
Pittsburgh, Pennsylvania
ATTN Director, Computation Cntr.
Alan J. Perlis

Rome Air Development Center, RCOR
DCS/Operations, USAF
Griffiss Air Force Base, New York
ATTN Irving J. Gabelman

Air Force Office of Scientific Res.
Washington 25, D. C.
ATTN Dr. Harold Wooster

Hunter College
New York 21, New York
ATTN Dean Mina Rees

Radio Corporation of America, 127-327
Missile and Surface Radar Division
Moorestown, New Jersey
ATTN Joseph E. Karroll

Radio Corporation of America
Moorestown, New Jersey
ATTN Missile and Surface Radar Div.
Sidney Kaplan

Stanford Research Institute
Menlo Park, California
ATTN Dr. Charles Rosen
Applied Physics Group

Aeronutronics Division
Ford Motor Company
Ford Road, Newport Beach, California
ATTN C. L. Wanlass

University of California
Department of Mathematics
Berkeley, California
ATTN Prof. H. J. Bremermann

National Bureau of Standards
Washington 25, D. C.
ATTN Miss Ida Rhodes
120 Far West

Northeastern University
360 Huntington Avenue
Boston, Massachusetts
ATTN Prof. L. O. Dolansky

IBM Corporation
Military Products Division
Owego, New York
ATTN Dr. S. Winkler

Air Force Research Division, ARDC
Computer and Mathematical Sciences
Laboratory, ARCRC
L. G. Hanscom Field, CRBB
Bedford, Massachusetts
ATTN Dr. H. H. Zschirnt

Research Air Development Center
Griffiss Air Force Base, New York
ATTN RCWID, Capt. B. J. Long

Armour Research Foundation
10 West 35th Street
Chicago 16, Illinois
ATTN Mr. Scott Cameron
E. E. Research Dept.

Office of Chief Signal Officer
Department of the Army
Washington, D. C.
ATTN R and D Division SIGRO-6D
Mr. L. H. Geiger

Carnegie Institute of Technology
Graduate School of Industrial Admin.
Pittsburgh 13, Pennsylvania
ATTN Dr. Allen Newell

Cornell University
Cognitive Systems Research Program
Cornell Computing Center
Ithaca, New York
ATTN Prof. H. D. Block

Mr. R. A. Fairthorne
Ministry of Supply
Royal Aircraft Establishment
South Farnborough
Hants, England

Harvard Computation Laboratory
Harvard University
Cambridge, Massachusetts
ATTN Dr. Anthony Oettinger

IBM Research
Yorktown Heights, New York
ATTN Hans Peter Luhn

Library of Congress
Washington 25, D. C.
ATTN Mendell S. Thompson

National Biomedical Research
Foundation, Inc.
8600 16th St., Suite 310
Silver Spring, Maryland
ATTN Dr. R. S. Ledley

National Bureau of Standards
Washington 25, D. C.
ATTN Mrs. Ethel Marden

National Bureau of Standards
Washington 25, D. C.
ATTN Mrs. Frances Neeland

Department of Commerce
U. S. Patent Office
Washington 25, D. C.
ATTN Mr. Herbert R. Koller

Purdue University
School of Electrical Engineering
Lafayette, Indiana
ATTN Dr. Julius Tou

Thompson Ramo Woolridge, Inc.
8433 Fallbrook Avenue
Canoga Park, California
ATTN D. R. Swanson

Rand Corporation
1700 Main Street
Santa Monica, California
ATTN Library

National Security Agency
Deputy Chief, Office of Central Ref.
Fort Meade, Maryland
ATTN Dr. J. Albert Sanford

University of Chicago
Committee on Mathematical Biology
Chicago, Illinois
ATTN Prof. H. D. Landahl

University of Pennsylvania
Moore School of Electrical Engrg.
200 South 33rd Street
Philadelphia 4, Pennsylvania
ATTN Miss Anna Louise Campion

Varo Manufacturing Company
2201 Walnut Street
Garland, Texas
ATTN Fred P. Granger, Jr.

Mr. John F. Kullgren
Department of the Army
Room 2C521 Pentagon
Washington, D. C.

Mr. Robert Samson
Directorate of Intelligence and
Electronic Warfare
Griffiss Air Force Base
Rome, New York

Mr. Gregg McClurg
Army Research Office OCR and D
Department of the Army
Code 189
Arlington Hall
Arlington, Virginia

Data Processing Systems Staff
Department of State
Washington 25, D. C.
ATTN F. P. Diblasi

Mr. Bernard M. Fry, Deputy Head
Office of Science Information
Service
National Science Foundation
1951 Constitution Avenue, N. W.
Washington 25, D. C.

I. A. Warheit
International Business Machines Corp.
1737 L Street, N. W.
Washington, D. C.

Hebrew University
Department of Mathematics
Jerusalem, Israel
ATTN Harry Kesten

Applied Physics Laboratory
Johns Hopkins University
8621 Georgia Avenue
Silver Spring, Maryland
ATTN Supervisor of Technical
Reports

Navy Department
Washington, D. C.
ATTN Cdr. J. C. Busby, Code W3
Chief, Bureau of Supplies
and Accounts

Bendix Products Division
Bendix Aviation Corporation
South Bend 20, Indiana
ATTN E. H. Crisler

Stanford Research Institute
Documents Center Bldg. 302
Menlo Park, California
ATTN Acquisitions

Officer in Charge
U. S. Naval Photographic
Interpretation Center
4301 Suitland Road
Suitland, Maryland
ATTN Mr. J. Pickup

Dr. Noah S. Prywes
Moore School of Engineering
University of Pennsylvania
Philadelphia 4, Pennsylvania

National Security Agency
Fort George G. Meade, Maryland
ATTN REMP-2, R. Wigington

Peter H. Greene
Committee on Mathematical Biology
University of Chicago
Chicago, Illinois

Federal Aviation Agency
Bureau of Research and Development
Washington 25, D. C.
ATTN RD-375, Mr. Harry Hayman

Cornell Aeronautical Laboratory, Inc.
P. O. Box 235
Buffalo 21, New York
ATTN Systems Requirements Dept.
A. E. Murray

National Aeronautics and Space
Administration
Theoretical Division
8719 Colesville Road
Silver Spring, Maryland
ATTN Mr. Albert Arking

Mr. Donald F. Wilson
Code 5144
Naval Research Laboratory
Washington 25, D. C.

Navy Management Office
Data Processing Systems Division
Department of the Navy
Washington 25, D. C.
ATTN Mr. J. Smith

Lincoln Laboratory
Massachusetts Institute of Technology
Lexington 73, Massachusetts
ATTN Library

Electronics Research Laboratory
University of California
Berkeley 4, California
ATTN Director

Institute for Defense Analysis
Communications Research Division
Von Neumann Hall
Princeton, New Jersey