


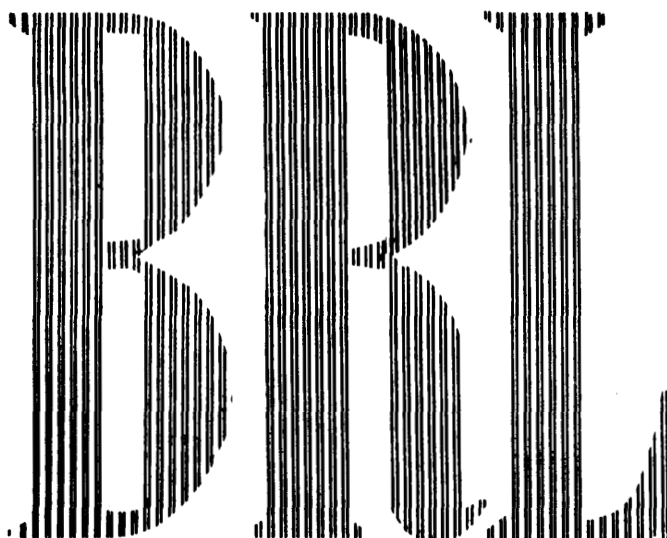

REPORT NO. 1106  
AUGUST 1960

PHOTOGRAMMETRIC EVALUATION OF AIRCRAFT  
GUN FIRINGS AT HIGH ALTITUDES

CONTAINED IN

Myron W. Lawrence

Department of the Army Project No. 5B03-06-011  
Ordnance Management Structure Code No. 5210.11.143  
BALLISTIC RESEARCH LABORATORIES

ABERDEEN PROVING GROUND, MARYLAND

**ASTIA AVAILABILITY NOTICE**

Qualified requestors may obtain copies of this report from ASTIA.

BALLISTIC RESEARCH LABORATORIES

REPORT NO. 1106

AUGUST 1960

PHOTOGRAMMETRIC EVALUATION OF AIRCRAFT  
GUN FIRINGS AT HIGH ALTITUDES

Myron W. Lawrence

PROPERTY OF U. S. ARMY  
SERIAL NO. 21003  
REC'D, APR, 1961, 21003

Ballistic Measurements Laboratory

Department of the Army Project No. 5B03-06-011  
Ordnance Management Structure Code 5210.11.143  
(Ordnance Research and Development Project No. TB3-0538)

ABERDEEN PROVING GROUND, MARYLAND

## TABLE OF CONTENTS

|                                                                     | Page |
|---------------------------------------------------------------------|------|
| ABSTRACT. . . . .                                                   | 3    |
| INTRODUCTION. . . . .                                               | 5    |
| CALIBRATION PIT . . . . .                                           | 10   |
| RC-7 CAMERA . . . . .<br>(Airborne Photogrammetric Camera)          | 30   |
| ASKANIA CAMERAS . . . . .<br>(Ground Based Photogrammetric Cameras) | 46   |
| VELOCITY CAMERAS. . . . .                                           | 64   |
| CONCLUSIONS . . . . .                                               | 97   |
| ACKNOWLEDGMENTS . . . . .                                           | 100  |
| REFERENCES. . . . .                                                 | 101  |
| DISTRIBUTION LIST . . . . .                                         | 143  |

BALLISTIC RESEARCH LABORATORIES

REPORT NO. 1106

MWLawrence/sec  
Aberdeen Proving Ground, Md.  
August 1960

PHOTOGRAMMETRIC EVALUATION OF AIRCRAFT  
GUN FIRINGS AT HIGH ALTITUDES

ABSTRACT

This report describes methods of measurement and reduction of data on aircraft gun firings at high altitudes.

These methods were applied to records obtained by airborne and ground based photogrammetric cameras for the purpose of determining:

- (a) the spatial orientation of the gun at the moment of firing,
- (b) the spatial coordinates and velocity of the aircraft at the time of firing,
- (c) the muzzle velocity and the spatial coordinates of the point of burst of the projectile.

Results of several rounds are tabulated and numerical examples of each type of computation are included in this report.

A detailed description of the instrumentation is contained in BRL Report No. 1105, "Instrumentation for Acquisition of Ballistic Data on Full-Scale Aircraft Gun Firings", by Donald F. Menne, August 1960.

## 1. INTRODUCTION

1.1 In January 1954, the Ballistic Research Laboratories were assigned responsibility for developing instrumentation, methods of observation, and data reduction procedures for the acquisition of ballistic data on aircraft gun firings at high altitudes. This assignment comprising the full scale phase of project "Crosswind" was discussed in an earlier report.<sup>(1)</sup>

The Ballistic Research Laboratories were responsible for the first group of firings. Range support and additional personnel were provided by the Air Force Armament Center (AFAC), Eglin Air Force Base, Florida. The field observations during the initial phase of this program were conducted at Eglin Air Force Base (EAFB) between February and June 1958. The data reductions were carried out by BRL at the Aberdeen Proving Ground, Maryland. The BRL survey group departed EAFB in March 1958, and the remaining BRL personnel in May 1958. Upon completion of this initial phase, all instrumentation and data were turned over to AFAC.

1.2 The quantities to be determined, their respective accuracies and method of observation, as set forth in Reference (1) were as follows:

(a) Spatial coordinates of the aircraft at the instant the gun is fired and of the burst of the projectile to a relative accuracy of  $\pm 2$  ft. (mean error), by ground based phototheodolites

(b) Velocity of the aircraft to  $\pm 2$  ft/sec<sup>\*</sup>, by ground based phototheodolites

(c) Orientation of the gun line in space to  $\pm 1$  mil, by airborne photogrammetric camera

(d) Muzzle velocity of the projectile to  $\pm 2$  ft/sec, by velocity cameras, as well as by electronic projectile velocity meter (PVM)

(e) Time of emergence of the projectile from the muzzle to  $\pm 0.001$  sec, by electronic method

(f) Time of burst of the projectile to  $\pm 0.001$  sec, by electronic method

---

<sup>\*</sup> This value replaces the original requirement of 1 ft/sec by mutual agreement between BRL & AFAC.

(g) Meteorological data including:

- (1) Air density to  $\pm 0.1\%$
- (2) Wind velocity to  $\pm 5$  ft/sec.
- (3) Air temperature to  $\pm 1^{\circ}\text{F}$

This report will be concerned only with items (a) through (c), and with (d) insofar as the optical method is concerned. Table 27 lists a summary of results of these items together with results as obtained by electronic methods. Item (g) which was the responsibility of AFAC is only included insofar as these data are used to compute refraction corrections.

1.3 An F-89C aircraft (Fig. 1), modified to carry the required instrumentation (Fig. 2), was used. All missions were flown at 30,000 feet, where 20mm M97 rounds using gun M-24 were fired. All firings were made approximately vertically downward.

1.4 This report deals with a group of 15 rounds fired at EAFB. In the case of some firings it was impossible to obtain all the desired quantities because of failures of one type or another. However, all data that could be reduced for these rounds have been included.

Throughout this report the rounds are designated by date, mission, pass and round number. For example, 11 April M1/P3-2 refers to the 2nd round fired during the 3rd pass over the range for the 1st mission flown on the 11th of April. If only one round was fired during any one pass the round number was omitted.

1.5 Measurements of plate and film coordinates were made on a precision Mann Comparator where readings to the nearest micron were taken. In the case of the airborne camera (Wild RC-7) plates and velocity camera film, three settings were made on each point measured. In the case of the ground based phototheodolite (Askania) plates, three settings were made on each star break resulting in twelve settings for each star. Three settings were made on each survey flash image and twelve settings on the burst image. In all cases, six settings were made on each fiducial mark, three before and three after the plate or film was measured.


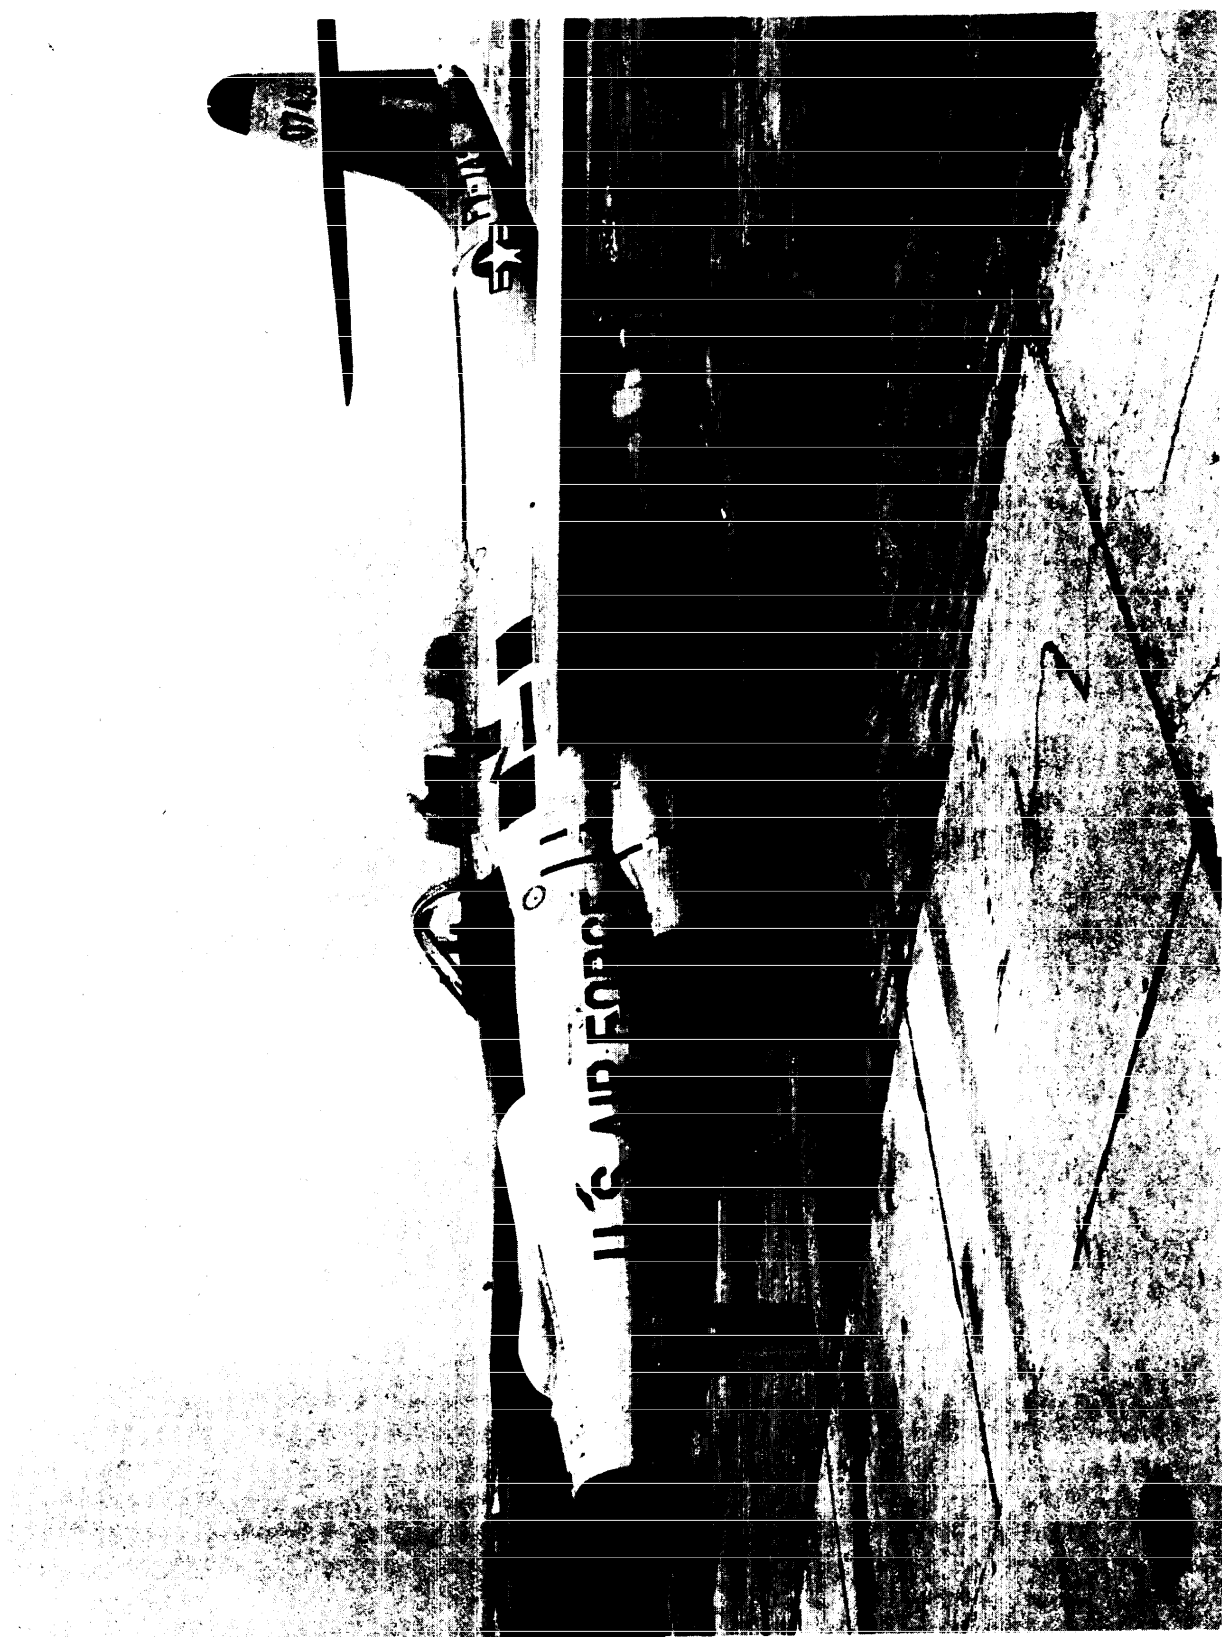


Fig. 1 F-89 Aircraft

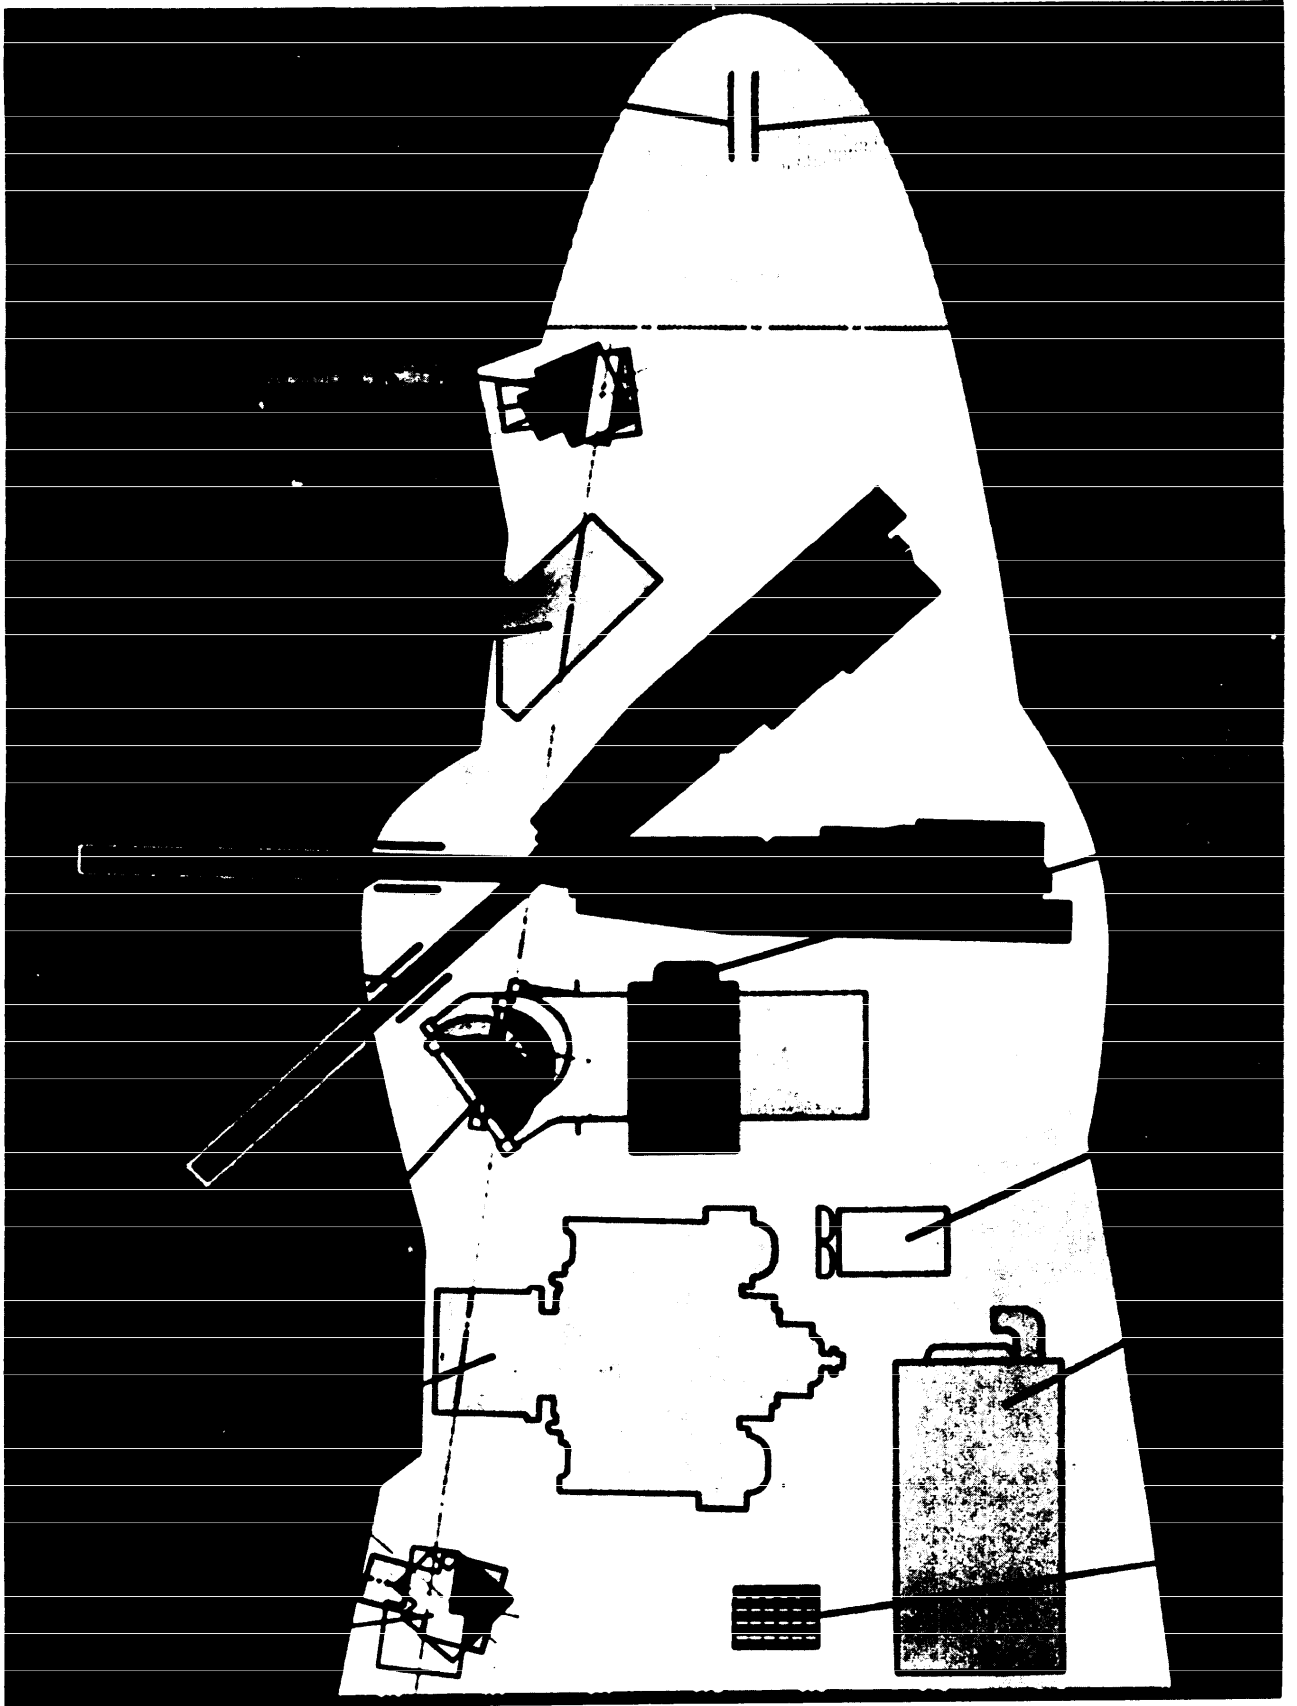

1.6 The ORDVAC and EDVAC high speed electronic computers were available for the computation of star positions, range and calibration pit control point coordinates and the reduction of camera orientations and gun directions.

1.7 BRL Report No. 1105, "Instrumentation for Acquisition of Ballistic Data on Full-Scale Aircraft Gun Firings"<sup>(2)</sup> gives a detailed description of the instrumentation system.

## 2. CALIBRATION PIT

### 2.1 Function and Description

The basic function of the calibration pit was to determine the direction of the gun relative to the RC-7 camera and the orientations of the velocity cameras, by means of calibration targets, photographed from the stationary aircraft.

The calibration pit (Fig. 3), was constructed of reinforced concrete, approximately 23 feet square and 13 feet deep. At the top and flush with the natural ground surface a cantilever type beam, 2 feet wide and extending 7 feet over the pit, was constructed on which the front wheel of the aircraft could be placed. This allowed positioning of the RC-7, the velocity cameras and the gun over the pit.

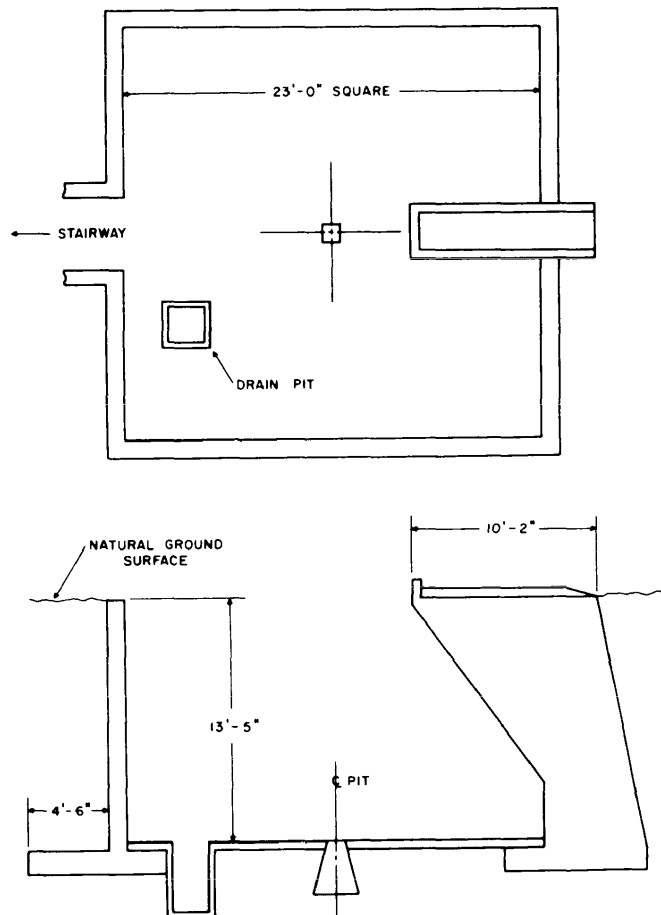


FIG 3 - CALIBRATION PIT

To provide the targets or control points necessary to determine the RC-7 camera orientation 25 steel balls, each .06 inches in diameter and painted white, were attached to an invar bar system (Fig. 4). This system, mounted to an isolated pier in the center of the bottom of the calibration pit, consisted of eight separate invar bars radiating from the center toward the four walls of the pit. Two control points (Nos. 26 and 27) were mounted on a rod which was temporarily inserted into the gun barrel to define its center line during the calibration. Control point No. 25 was used to determine the camera orientations for velocity cameras Nos. 1 and 4. Control point No. 27 was used to determine the camera orientations for velocity cameras Nos. 2 and 3.

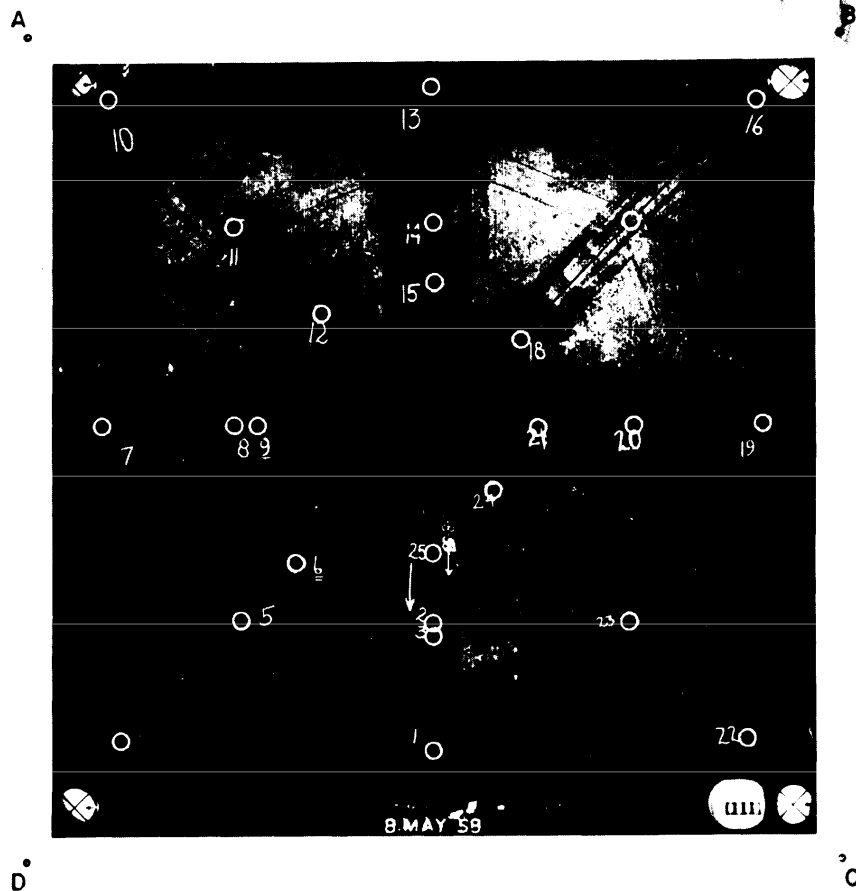


Fig. 4 RC-7 Photograph of Calibration Pit

At the top of each corner of the pit, permanent type self-centering bolts were embedded in the concrete, thus allowing the positions of Wild T-2 theodolites to be recovered in all three coordinates. A calibrated invar bar 10.5 feet long which could be used to determine the scale of the control points system was attached to one wall of the pit. (Scale was actually determined by taping the distance between two self-centering bolts and checked by the invar bar).

Except for the glossy white target balls, which were illuminated by 16 evenly spaced 500 watt photo-flood type bulbs, the calibration pit and invar bar system were painted a dull non-reflecting black.

## 2.2 Pit Calibrations

As a result of numerous pit calibrations, a procedure for observing the pit control points was established.

(a) Periodically, a complete pit calibration was made in which all 25 control points and stations A, B, C and D were observed. Coordinates determined from this survey were used to determine the RC-7 camera orientation. During this calibration, a Wild T-2 theodolite was set up at each corner (A, B, C, D) of the pit. A quadrilateral was thereby formed from which pointings were made to and from each theodolite position. To determine the XY-coordinates of the 25 control points, this quadrilateral (Fig. 5) was adjusted and served as a basic net from which all control points were cut in by intersection. Because of the steep vertical angles encountered in the pit, only the six control points, Nos. 7, 8, 9, 19, 20 and 21 were observed from all four stations. Control points Nos. 10 through 18 were observed from stations D and C, and control points Nos. 1 through 6 and 22 through 25 were observed from stations A and B. (Fig. 4). The Z coordinates were determined by differential leveling.

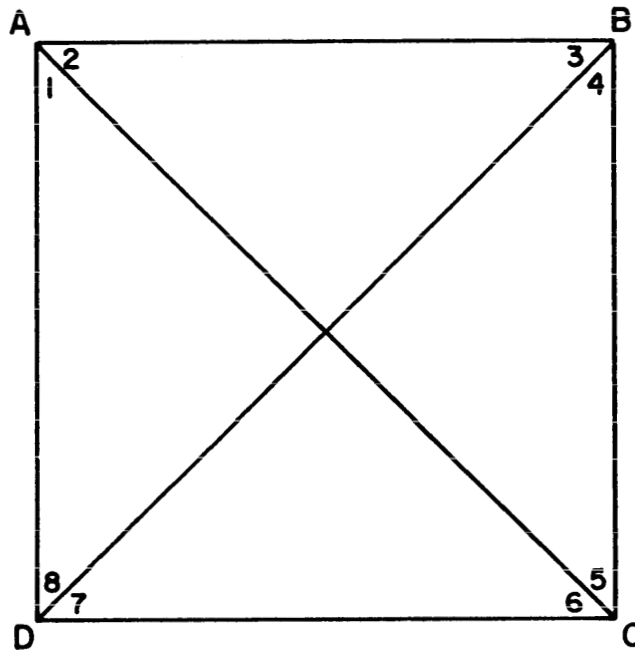


FIG. 5 - CALIBRATION PIT QUADRILATERAL

(b) A check was made on the relative positions of the control points before each night's missions. Six points, Nos. 9, 15, 17, 19, 23 and 25 were chosen for this purpose. The Z coordinates were checked by vertical angles turned from station D and XY coordinates by intersection from stations A and D. Any changes in their relative positions large enough to affect the camera orientations would require a new pit calibration.

During the times the check survey was made, the aircraft was positioned over the pit, control points Nos. 26 and 27 were observed and velocity and RC-7 camera photographs were taken. The relations among velocity cameras, RC-7 camera, and the gun could in this way be established.

### 2.3 Stability of the Control Points

The stability of the control points depends on the stability of the invar bar system and the concrete pit itself. (See Table 1 which shows the XYZ coordinates of 6 of the 25 control points as obtained from different pit calibrations.)

Pit calibrations made during the summer of 1957 showed that the invar bar system was stable and that most of the changes in the coordinates of the control points were due to deflections or changes in the walls of the pit. These changes would affect the quadrilateral or basic net from which the coordinates of the control points were determined (See Tables 2, 3, 4 and note the changes in the adjusted angles, the four coordinates and the six lengths of the quadrilateral.) Changes due to the instability of the quadrilateral would not affect camera orientations or the direction of the gun; as long as the relative difference in the coordinates of the control points remained the same, the relations among velocity cameras, RC-7 camera and the direction of the gun can be determined.

### 2.4 Accuracy of the Control Points

The accuracy with which the positions of the control points could be determined depended on (a) the length measurements (scale), (b) the differential levels or vertical angles, and (c) the horizontal angles to the stations and control points.

#### (a) Scale

Scale would affect the absolute accuracy but was important only for points Nos. 25 and 27. As these two points were indirectly used to determine the projectile velocity, a true distance between them was necessary. Since only directions were required for the RC-7 camera and the gun, any scale could have been used.

Scale comparisons made on the 10.5 foot invar bar showed errors to be less than 0.2mm. Assuming an error of approximately 0.2mm for the distance between points Nos. 25 and 27, and taking 0.004 seconds as the

average time required for the projectile to travel a distance equal to the distance between the two points, an error for the projectile velocity of 0.05 meters per second would result. The effect of scale errors of the calibration pit on the projectile velocity was, therefore, negligible.

(b) Differential levels and vertical angles.

To determine the elevations of the control points, two Wild N-2 instruments were set up in the bottom of the pit at opposite corners, because the minimum focal distance of the instruments would not accommodate all the points from one set-up. Elevations of the control points that could be observed from both set-ups agreed to within 0.2mm. Checks on the elevations made by changing the instrument heights and re-running the points were within 0.2mm.

Vertical angles to the control points (see 2.2(b)), which were used to check the Z coordinates, could easily be turned to within 5 seconds or arc. The maximum oblique distance from an instrument to a control point, station D to point 16 was approximately 9.6 m. The Z coordinates of the control points, as determined by vertical angles, should therefore be good to 0.2mm. (See Table 5 which is a tabulation of Z coordinates as obtained from several calibrations). The two calibrations of 28 February 1958, Nos. 07 and 08, were made approximately 5 hours apart. Calibration Nos. 05, 19, 22, 24, and 36 were complete pit calibrations, the Z coordinates of which were obtained by differential levels, whereas all others were obtained by vertical angles. It is noted that the differences in coordinates on the 07 and 08 runs were within 0.2mm, and also that runs 05 and 09 determined by levels and vertical angles were in good agreement. In fact all runs from 28 February to 11 March would indicate that the Z coordinates of the control points not only were stable but also were within the expected limits of accuracy. Calibrations run from 21 March to 5 June were fair but showed a certain amount of relaxation in attitude towards accuracy on the part of the observer. These results could only be attributed to coarse errors in the observations or incorrect instrument heights. The permanent

type self-centering bolts provided a means of not only positioning the theodolite but also of establishing the same instrument heights for all calibrations. Some of the calibrations, for example calibration No. 15, (see Table 5) seemed to be consistently off by approximately 2.5mm. This discrepancy could be the result of not setting the instrument to the correct height, since careful set-ups should position the instrument in height to about 0.1mm. Inasmuch as the pit control points would directly affect the camera calibrations, maximum care in establishing coordinates of the control points should be exercised.

The two control points on the gun rod also afforded a check on the accuracy that could be expected from a calibration. These two points, Nos. 26 and 27, used to define the gun center line, were surveyed in by observing horizontal angles from Stations A and D and vertical angles from Station D. In this way the XYZ coordinates of the two control points could be computed. Once the coordinates were known, the required direction of the gun could be determined and the measured distance between the two control points used as a check. This distance, measured by taping to be 0.8522 m, remained sufficiently constant. Table 6 is a tabulation of this distance computed from the XYZ coordinates of the two points. The results between 11 February and 21 May compared favorably with the measured distance. The sudden breakdown of this agreement, as shown by results between 22 May and 4 June, could be attributed to several factors, one being careless field observations, another being a movement by the aircraft or the gun during the time points Nos. 26 and 27 were being observed. An adjustment of calibrations made between 11 February and 21 May resulted in a mean error for an individual distance measurement of  $\pm 0.18\text{mm}$ . Therefore, the mean error of the coordinates of a single point would be:

$$\pm \frac{0.18}{\sqrt{2}} = \pm 0.13\text{mm}$$

This was somewhat better than the accuracy obtained for the 25 control points in the pit and was probably due to the smaller vertical angles encountered when observing points Nos. 26 and 27. The vertical angles to points Nos. 26 and 27 were approximately  $+1^{\circ} 40'$  and  $-9^{\circ} 50'$  whereas vertical angles to the control points in the pit ranged from  $-45^{\circ} 50'$  for point No. 25 to  $-29^{\circ} 10'$  for point No. 17. These large vertical angles, unless corrected for by bubble readings or by carefully leveling the horizontal axis of the instrument, would affect the horizontal directions to the points. During the calibration the leveling method was used.

(c) Horizontal angles

A method for determining the XY coordinates and mean errors of the pit control points by the method of least squares will be shown in a following example. Part A is the adjustment of the quadrilateral ABCD, Part B the adjustment of the four directions to one of the six over-determined control points (see Tables 7, 8 and 9, which give the results of Parts A and B for pit calibrations run on 3 March, 22 April and 6 May respectively).


The 3 March calibration (Table 7), shows an approximate uncertainty in the control point coordinates of 0.16mm which is within the limits of accuracy expected from a calibration. The 22 April calibration (Table 8), which is a good quadrilateral as indicated by a mean error of  $\pm 0.90''$  for the quadrilateral adjustment, breaks down to  $\pm 0.66$ mm because of the coarse errors made when observing the control points. The  $\pm 1.01$ mm uncertainty of the control point coordinates for the 6 May calibration, (Table 9), was due not only to careless quadrilateral observations (mean error for a single angle of  $\pm 3.98''$ ), but probably also to careless observations made on the control points.

Actually the coordinates of the six over-determined control points were taken as averages of the coordinates as obtained from each of the six baselines, and not by a least squares adjustment of the four directions. Little difference existed between the two methods, and either one produced

results comparable in reliability to the coordinates of the other 19 control points (see Table 10 which is a tabulation of results obtained by the two methods). Thus the difference between the two methods for the 3 March calibration is negligible. The quadrilateral for the 22 April calibration is good, but coarse errors were made when observing the control points. The observations for the 6 May quadrilateral are affected by coarse errors leading to wrong control point coordinates.

Part A: Quadrilateral Adjustment (3 March Quadrilateral)

(a) The following figure shows the angles of the quadrilateral as observed in the field.

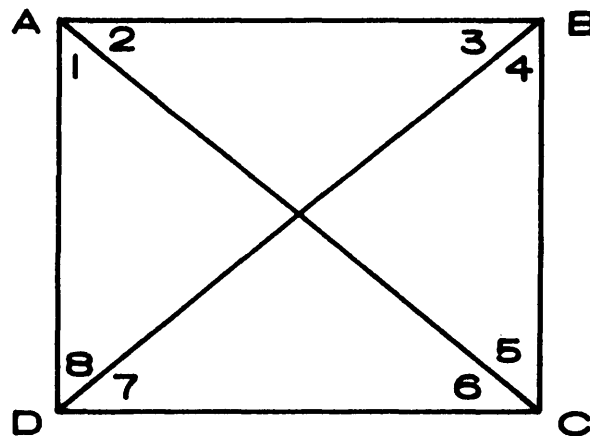

|     | Observed Angles | $v$ 's<br>from (e) | Adjusted Angles |
|-----|-----------------|--------------------|-----------------|
| (1) | 42° 14' 47.4    | -0.84              | 42° 14' 46.56   |
| (2) | 47 32 06.2      | -0.35              | 47 32 05.85     |
| (3) | 47 39 41.7      | -0.79              | 47 39 40.91     |
| (4) | 42 26 57.8      | -0.57              | 42 26 57.23     |
| (5) | 42 21 17.1      | -1.09              | 42 21 16.01     |
| (6) | 47 25 05.3      | -0.60              | 47 25 04.70     |
| (7) | 47 46 43.1      | -1.04              | 47 46 42.06     |
| (8) | 42 33 27.0      | -0.32              | 42 33 26.68     |

NOTE: To satisfy the condition that the sum of the angles of a triangle must equal  $180^\circ$ ,  $v_4$  and  $v_8$  were changed by one unit in the second decimal place. This difference was due to rounding.

(b) For the adjustment of the quadrilateral, 3 angle equations and 1 side equation must be satisfied.

### Angle Equations

Denoting the corrections for  $\angle 1, \angle 2 \dots \angle 8$  by  $v_1, v_2 \dots v_8$ , the 3 angle conditioned equations for

$$\Delta ABC: (2) + (3) + (4) + (5) = 180^\circ 00' 02.8''$$

$$\Delta DAB: (8) + (1) + (2) + (3) = 180 00 02.3$$

$$\Delta DCB: (7) + (4) + (5) + (6) = 180 00 03.3$$

are

$$1. \quad v_2 + v_3 + v_4 + v_5 = -2.8''$$

$$2. \quad v_8 + v_1 + v_2 + v_3 = -2.3''$$

①

$$3. \quad v_7 + v_4 + v_5 + v_6 = -3.3''$$

### Side Equation

The logarithmic form of the side equation in terms of the corrections is:

$$-d_1 v_1 + d_2 v_2 - \dots + d_8 v_8 - \log \sin O_1 + \log \sin O_2 - \dots + \log \sin O_8 = 0$$

or

$$-d_1 v_1 + d_2 v_2 - \dots + d_8 v_8 = \theta$$

where,  $O_1, O_2$  etc. are the observed values of the angles,  $d_1, d_2$  etc. are the tabular differences for 1" for the log sines of  $O_1, O_2$ , etc. and  $\theta$  is the amount by which the observed values fail to satisfy the side equation.

Taking the unit as the 6th place of logarithms and arranging in tabular form,

| Angle    | + log sin    | d    | Angle    | - log sin   | d    |
|----------|--------------|------|----------|-------------|------|
| 8        | 9.83015851   | 2.29 | 1        | 9.82757706  | 2.32 |
| 6        | 9.86706149   | 1.93 | 7        | 9.86955680  | 1.91 |
| 4        | 9.82926432   | 2.30 | 5        | 9.82847878  | 2.31 |
| 2        | 9.86787422   | 1.93 | 3        | 9.86875001  | 1.92 |
| $\Sigma$ | 39.39435854  |      | $\Sigma$ | 39.39436265 |      |
|          | 39.394362265 |      |          |             |      |
| 4.11 = 0 |              |      |          |             |      |

and the conditional side equation is

$$-2.32v_1 + 1.93v_2 - 1.92v_3 + 2.30v_4 - 2.31v_5 + 1.93v_6 - 1.91v_7 + 2.29v_8 = 4.11 \quad (2)$$

(c) Correlate Equations

Tabulating the conditional equations (1) and (2) in vertical columns,

| v | k <sub>1</sub> | k <sub>2</sub> | k <sub>3</sub> | k <sub>4</sub> |
|---|----------------|----------------|----------------|----------------|
| 1 |                | 1              |                | -2.32          |
| 2 | 1              | 1              |                | 1.93           |
| 3 | 1              | 1              |                | -1.92          |
| 4 | 1              |                | 1              | 2.30           |
| 5 | 1              |                | 1              | -2.31          |
| 6 |                |                | 1              | 1.93           |
| 7 |                |                | 1              | -1.91          |
| 8 |                | 1              |                | 2.29           |

(d) and forming the normal equations in the usual manner

|   | k <sub>1</sub> | k <sub>2</sub> | k <sub>3</sub> | k <sub>4</sub> | Absolute Column |
|---|----------------|----------------|----------------|----------------|-----------------|
| 1 | 4              | 2              | 2              | 0              | = -2.8          |
| 2 | 2              | 4              | 0              | -.02           | = -2.3          |
| 3 | 2              | 0              | 4              | +.01           | = -3.3          |
| 4 | 0              | -.02           | +.01           | +36.0369       | = +4.11         |

whereby the roots of the normal equations are

$$\begin{aligned}k_1 &= .11396002 \\k_2 &= -.82514245 \\k_3 &= -.57458775 \\k_4 &= -.00028490\end{aligned}$$

(e) Substituting these k's back into (c) the correlate equations, the v's are

$$\begin{aligned}v_1 &= -.839 \\v_2 &= -.354 \\v_3 &= -.793 \\v_4 &= -.563 \\v_5 &= -1.088 \\v_6 &= -.605 \\v_7 &= -1.042 \\v_8 &= -.313\end{aligned}$$

where:

$$m.e. = \pm \sqrt{\frac{\sum [vv]}{n-u}} = \pm 1.06''$$

n = number measurements = 8

u = number of unknowns required  
for unique solution = 4

which when added to the observed angles result in the final adjusted values (see (a)).

#### COMPUTATION OF QUADRILATERAL ABCD

Using adjusted angles of quadrilateral ABCD and assuming

|                        |                   |
|------------------------|-------------------|
| Coordinates of Sta. D, | X = 100.0000 m    |
|                        | Y = 100.0000 m    |
| Azimuth D → C          | = 270° 00' 00.00" |
| Length CD (measured)   | = 6.5977 m        |

the lengths and azimuths between quadrilateral stations ABC and D and the XY coordinates of the four stations are

| Station | Length<br>(Meters) | Azimuth |    |         |
|---------|--------------------|---------|----|---------|
|         |                    | °       | '  | "       |
| AD      | 7.22566            | 359     | 39 | 51.26   |
| BA      | 6.61130            | 89      | 52 | 58.85   |
| CB      | 7.23910            | 179     | 46 | 20.71   |
| DC      | 6.59770*           | 270     | 00 | 00.00** |
| AC      | 9.81318            | 317     | 25 | 04.70   |
| DB      | 9.77521            | 222     | 13 | 17.94   |


| Station | X<br>(Meters) | Y<br>(Meters) |
|---------|---------------|---------------|
|         |               |               |
| A       | 92.7745       | 100.0423      |
| B       | 92.7610       | 93.4310       |
| C       | 100.0000      | 93.4023       |
| D       | 100.0000**    | 100.0000**    |

\* measured

\*\* assumed

Part B: Adjustment of the four directions to a control point.

As an example control point No. 9 of 3rd March quadrilateral will be adjusted.

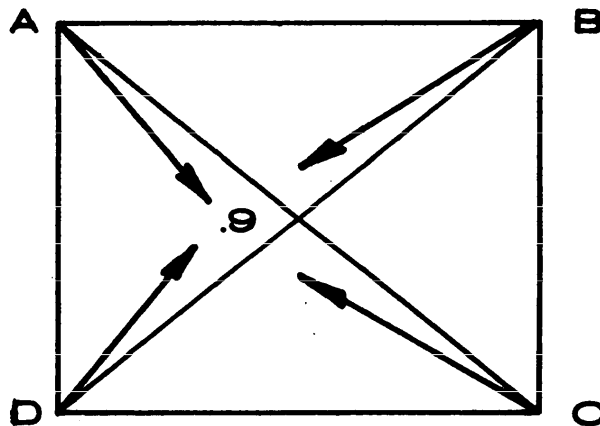

Because of the errors in directions A-9, B-9, C-9 and D-9, these 4 lines will not intersect at a common point and must therefore be adjusted. An adjustment will be made so that the sum of the squares of the corrections to these 4 directions will be a minimum. The corrections contributed by these 4 corrected directions to the XY coordinates of the control point will also be computed.

The formulas used in this adjustment are similar to the ones developed in Reference (3).

Let

$x, y$  = true coordinates

$(x), (y)$  = approximate coordinates (any reasonable value may be chosen; however, the better the approximations are the less will be the number of iterations required. The iterations should be repeated until the  $v$ 's become stabilized)

$\Delta x, \Delta y$  = corrections to the assumed coordinates

then

$x = (x) + \Delta x$

$y = (y) + \Delta y$

Let

$\phi$  = adjusted direction

$(\phi)$  = approximate direction

$\alpha$  = measured direction

$v$  = correction to measured direction

then

$\phi = \alpha + v$

Using the classical formula

$$\phi = (\phi) \frac{-\sin(\phi)\rho}{S^0} \Delta x + \frac{\cos(\phi)\rho}{S^0} \Delta y$$

where  $S^0$  = distance from the station to the control point before adjustment,

and letting

$$a = \frac{-\sin(\phi)}{S^0} \rho \quad \text{and} \quad b = \frac{\cos(\phi)}{S^0} \rho$$

then

$$\phi = (\phi) + a\Delta X + b\Delta Y$$

$$\alpha + v = (\phi) + a\Delta X + b\Delta Y$$

Let

$$l = \alpha - (\phi)$$

then

$$v = a\Delta X + b\Delta Y - l,$$

This expression is the observation equation for a direction.

# ADJUSTMENT OF CONTROL POINT NO. 9 (3 MARCH QUADRILATERAL)

## Station A

| Observed Angle  | Adjusted AZ or<br>Back AZ |     | Azimuth        |
|-----------------|---------------------------|-----|----------------|
| BA9 63° 43' 29" | AB 269° 52' 58.85         | A-9 | 333° 36' 27.85 |
| CA9 16 11 23    | AC 317 25 04.70           | A-9 | 333 36 27.70   |
| DA9 26 03 25    | AD 359 39 51.26           | A-9 | 333 36 26.26   |
|                 | Mean                      | A-9 | 333° 36' 27.27 |

## Station B

|                 |                  |     |               |
|-----------------|------------------|-----|---------------|
| AB9 36° 47' 15" | BA 89° 52' 58.85 | B-9 | 53° 05' 43.85 |
| CB9 53 19 25    | BC 359 46 20.71  | B-9 | 53 05 45.71   |
| DB9 10 52 27    | BD 42 13 17.94   | B-9 | 53 05 44.94   |
|                 | Mean             | B-9 | 53° 05' 44.83 |

## Station C

|                 |                   |     |                |
|-----------------|-------------------|-----|----------------|
| BC9 53° 02' 51" | CB 179° 46' 20.71 | C-9 | 126° 43' 29.71 |
| AC9 -10 41 34   | CA 137 25 04.70   | C-9 | 126 43 30.70   |
| DC9 36 43 31    | CD 90 00 00.00    | C-9 | 126 43 31.00   |
|                 | Mean              | C-9 | 126° 43' 30.47 |

## Station D

|                 |                   |     |                |
|-----------------|-------------------|-----|----------------|
| AD9 26° 06' 59" | DA 179° 39' 51.26 | D-9 | 205° 46' 50.26 |
| BD9 16 26 28    | DB 222 13 17.94   | D-9 | 205 46 49.94   |
| CD9 64 13 11    | DC 270 00 00.00   | D-9 | 205 46 49.00   |
|                 | Mean              | D-9 | 205° 46' 49.73 |

$$(x_a) = 96.38152 \text{ m}$$

$$(y_a) = 98.25239 \text{ m}$$

are approximate coordinates, computed from baseline AB

$$\frac{\Delta y}{\Delta x} = \frac{1.789950}{3.60706} = .49623516$$

$$(\phi) = 360^\circ - \tan^{-1} \frac{\Delta y}{\Delta x} = 333^\circ 36' 27''.99 \quad \begin{array}{l} \cos(\phi) \quad .89577209 \\ \sin(\phi) \quad -.44451362 \end{array}$$

$$s = 4026.76 \text{ mm}$$

$$\alpha = 333^\circ 36' 27''.27$$

$$v_A = 22.77 \Delta x + 45.88 \Delta y + 0.72$$

$$\frac{\Delta y}{\Delta x} = \frac{4.821336}{3.620559} = 1.33165514$$

$$(\phi) = \tan^{-1} \frac{\Delta y}{\Delta x} = 53^\circ 05' 43''.65 \quad \begin{array}{l} \cos(\phi) \quad .60048361 \\ \sin(\phi) \quad .79963706 \end{array}$$

$$s = 6029.41 \text{ mm}$$

$$\alpha = 53^\circ 05' 44''.83$$

$$v_B = -27.36 \Delta x + 20.54 \Delta y - 1.18$$

$$\frac{\Delta y}{\Delta x} = \frac{4.850090}{3.618480} = 1.34036667$$

$$(\phi) = 180^\circ - \tan^{-1} \frac{\Delta y}{\Delta x} = 126^\circ 43' 31''.13 \quad \begin{array}{l} \cos(\phi) \quad -.59797932 \\ \sin(\phi) \quad .80151153 \end{array}$$

$$s = 6051.18 \text{ mm}$$

$$\alpha = 126^\circ 43' 30''.47$$

$$v_C = -27.32 \Delta x - 20.38 \Delta y + 0.66$$

$$\frac{\Delta y}{\Delta x} = \frac{1.747610}{3.61848} = .48296799$$

$$(\phi) = 180^\circ - \tan^{-1} \frac{\Delta y}{\Delta x} = 205^\circ 46' 44''.60 \quad \begin{array}{l} \cos(\phi) \quad -.90047781 \\ \sin(\phi) \quad -.43490196 \end{array}$$

$$s = 4018.40 \text{ mm}$$

$$\alpha = 205^\circ 46' 49''.73$$

$$v_D = 22.32 \Delta x - 46.22 \Delta y - 5.13$$

### Observation Equations

$$\begin{aligned}
 22.77 \Delta x + 45.88 \Delta y + 0.72 &= v_A = -0.6187 \\
 -27.36 \Delta x + 20.54 \Delta y - 1.18 &= v_B = -3.0385 \\
 -27.32 \Delta x - 20.38 \Delta y + 0.66 &= v_C = 0.6778 \\
 22.32 \Delta x - 46.22 \Delta y - 5.13 &= v_D = -2.2638
 \end{aligned}$$

$$\sum [vv] = 15.1995$$

### Normal Equations

| $\Delta x$ | $\Delta y$ | $-l$         |                        |
|------------|------------|--------------|------------------------|
| 2511.61    | 7.86       | - 83.8536    |                        |
|            | 5078.50    | 232.4542     |                        |
|            | (- .02)    | ( .2624)     |                        |
|            |            | 28.6633      |                        |
|            |            | (- 2.7996)   |                        |
|            | 5078.48    | 232.7166     | $\Delta y = -.04582mm$ |
|            |            | 25.8637      |                        |
|            |            | - 10.6640    |                        |
|            |            | ( 15.1997) = | $\sum [vv]$            |

| $\Delta y$ | $\Delta x$ | $-l$         |                        |
|------------|------------|--------------|------------------------|
| 5078.50    | 7.86       | 232.4542     |                        |
|            | 2511.61    | - 83.8536    |                        |
|            | (- .01)    | (- .3598)    |                        |
|            |            | 28.6633      |                        |
|            |            | (- 10.6399)  |                        |
|            | 2511.60    | - 84.2134    | $\Delta x = +.03353mm$ |
|            |            | 18.0234      |                        |
|            |            | 2.8236       |                        |
|            |            | ( 15.1998) = | $\sum [vv]$            |

$$\text{m.e.} = \pm \sqrt{\frac{\sum [vv]}{n-u}} = \pm 2.76$$

$$\text{m.e. } \Delta x = \frac{\pm 2.76}{\sqrt{2511.60}} = \pm .0551\text{mm}; \quad X = (x) + \Delta x = 96.38155 \text{ m}$$


$$\text{m.e. } \Delta y = \frac{\pm 2.76}{\sqrt{5078.48}} = \pm .0387\text{mm}; \quad Y = (y) + \Delta y = 98.25234 \text{ m}$$

A complete tabulation of results is given in Tables 7 to 10.

### Summary

The frequency of pit calibrations depends on whether or not the relative changes in the positions of the control points are large enough to affect the camera orientations. However, the care with which a pit calibration is made is the controlling factor. Table 11 shows the results of RC-7 camera orientations using coordinates of a recent pit calibration (6 May) as opposed to a pit calibration made several months earlier (3 March). It is noted that the smaller mean errors for the RC-7 camera orientation result when using the coordinates obtained from the older calibration ( $4.9 < 8.7$  and  $5.9 < 8.4$ ). The residual errors for each control point are plotted in Fig. 6 for the 7 May orientations. The solid and broken arrows indicate the errors in the plate measurements resulting from the errors in the 3 March and 6 May pit calibrations.

Results of numerous pit calibrations indicated that the positions of the 25 control points could be determined within 0.2mm, with a somewhat better value for the two points used to establish the gun center-line. Quadrilateral observations with mean errors of a single angle less than 2 seconds of arc and control point observations with mean errors of a single direction less than 5 seconds of arc will assure this 0.2mm accuracy. A normal amount of care while making the field observations will produce results within these limits. It is important that both the quadrilateral and control point observations are within these limits since a relaxation of either one directly affects the final control point coordinates.

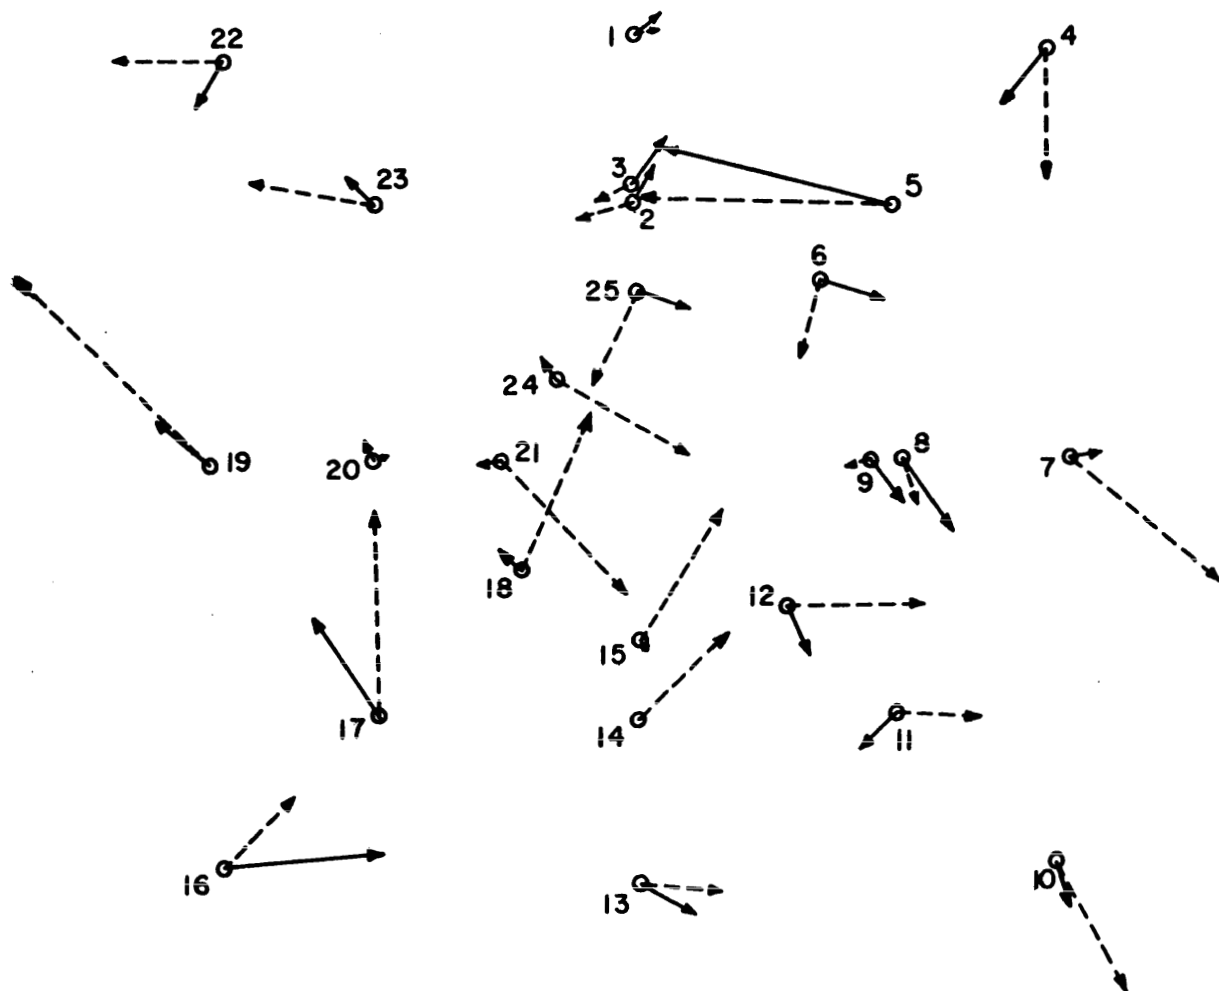

— 7 MAY MISSION USING 3 MARCH PIT CALIBRATION  
 --- 7 MAY MISSION USING 6 MAY PIT CALIBRATION

0 2 4 6 8 10  
 SCALE: MICRONS

FIG. 6-RESIDUAL ERRORS OF RC-7 ORIENTATIONS OVER CALIBRATION PIT

### 3. RC-7 CAMERA (Airborne Photogrammetric Camera)

#### 3.1 Description and Function

The Wild RC-7 aerial camera (Fig. 7), an automatic plate changing type camera designed principally for mapping purposes, was used to determine the direction in which the gun was pointing at the moment it was fired. Two interchangeable types of cones were available, a  $60^\circ$  cone (Aviotar f/4.2 to f/16) with a focal length of 170mm, and a  $90^\circ$  cone (Aviogon f/5.6 to f/16) with a focal length of 100mm. The plate size is 15 x 15cm with a field of  $14 \times 14$ cm. All missions were run using the wide angle Aviogon at f/5.6 and with a shutter speed of approximately 1/100 second. The emulsion type used was Eastman Kodak spectroscopic 103F. A specially designed lens was temporarily attached to the RC-7 camera to accommodate the short distances encountered when photographing the control points in the calibration pit. Distortion corrections for this lens were taken into account for the RC-7 camera pit orientations.

During the calibration, when the aircraft was positioned over the calibration pit, a gun rod was temporarily inserted into the gun barrel and its direction was then determined by theodolite observations on the two control points mounted on the axis of the rod. During this time the RC-7 camera orientation was determined by photographing the 25 control points in the calibration pit (Fig. 4). The relation between the direction of the gun and the orientation of RC-7 camera obtained in the calibration, is assumed to remain constant during a mission. The direction of the gun at the moment of firing can then be determined from the orientation of the camera obtained from the photographed range control points (Fig. 8).

#### 3.2 Comparator Code

All RC-7 plate measurements were corrected by a code, referred to as Comparator code, which was programmed for the ORDVAC computer. Included in this code are means to

- (a) correct any systematic comparator errors

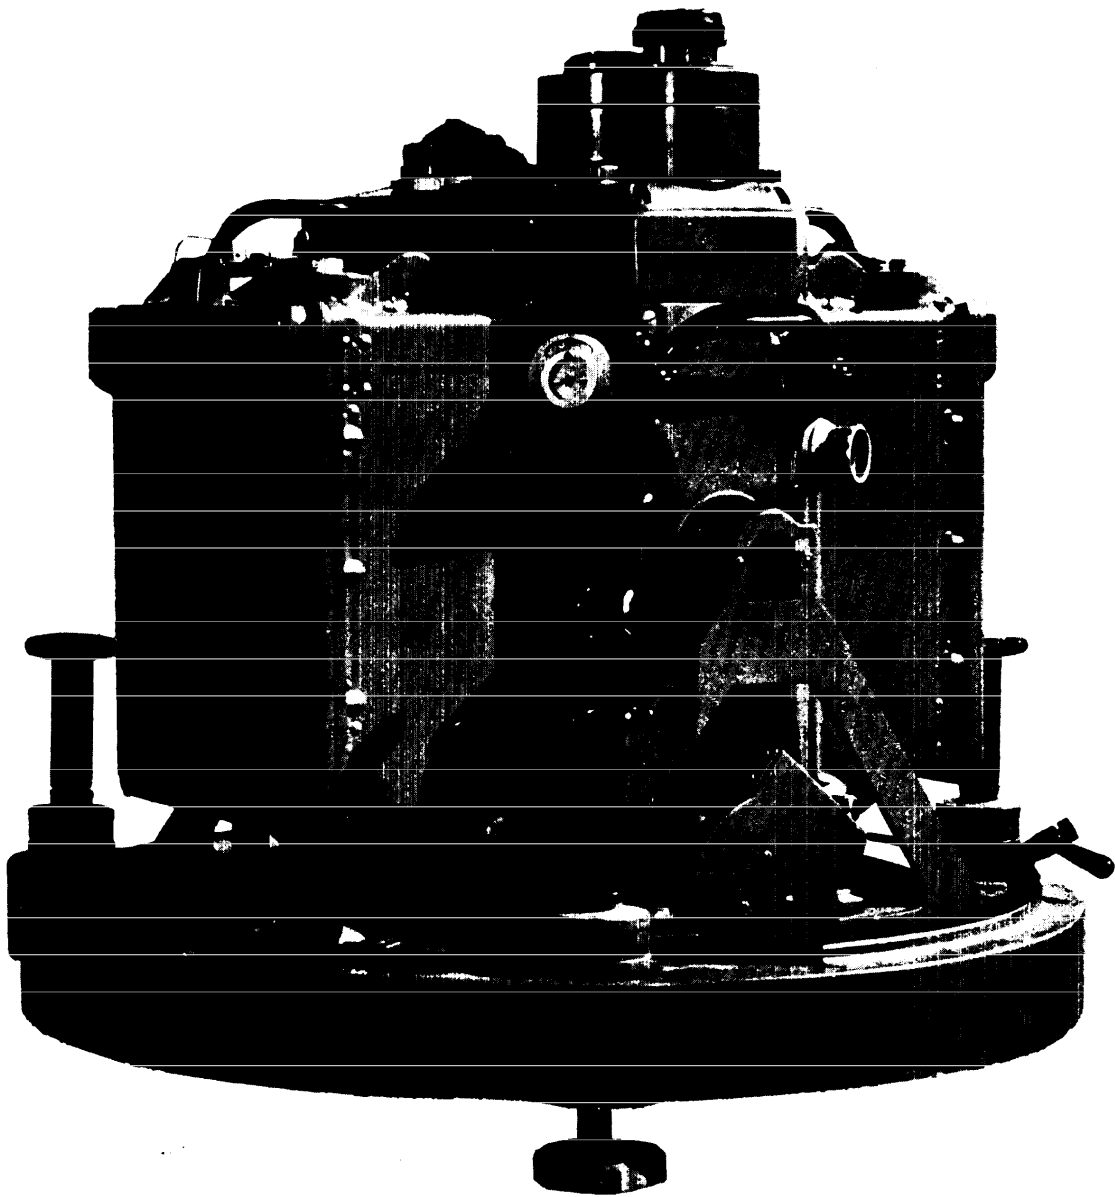


Fig. 7 RC-7 Aerial Camera

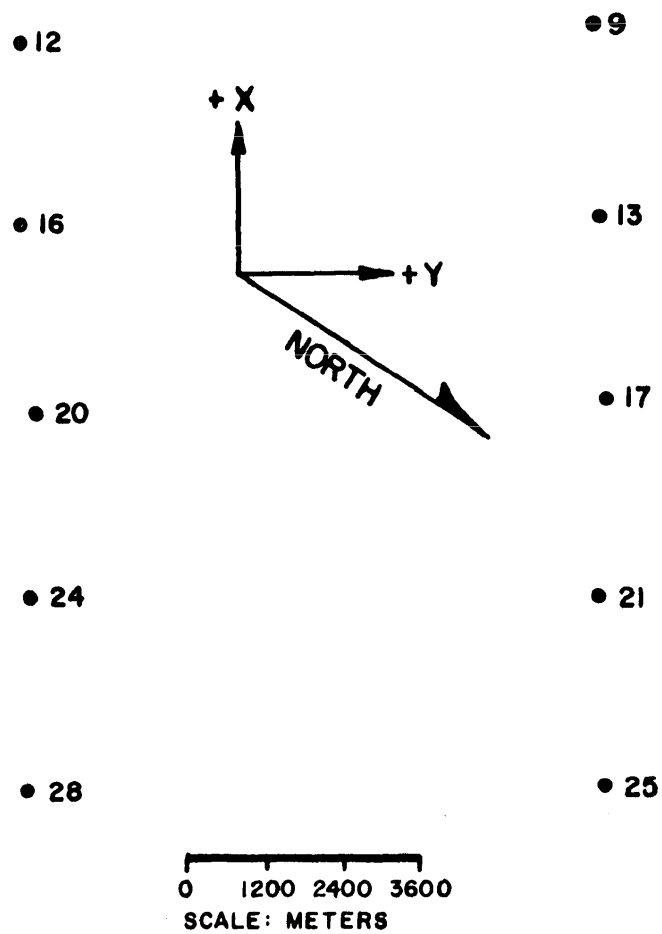


FIG. 8-RANGE CONTROL POINTS

(b) form arithmetic averages for multiple settings and if desired compute weight factors from the random discrepancies present in each set of measurements.

(c) reduce all plate measurements to an origin as defined by the intersection of two lines joining the two pairs of opposite fiducial marks.

(d) rotate the comparator system until it is parallel to any chosen set of fiducial marks.

(e) shift, if  $x_p$  and  $y_p$  are known, the origin to the principal point.

(f) apply lens distortion corrections.

The distortion curve used for RC-7 reductions over the range is

$$\Delta = + .00020072353r - .022916862r^3 - 17.634933r^5 + 2320.3473r^7$$

Distortion is positive from the center of the plate outward.

Table 12 gives a tabulation of the comparator code input and output values for the RC-7 camera over the range for 21 March M2/P1.

### 3.3 RC-7 Camera Orientation Reductions

RC-7 camera orientation reductions were made using equal weights for both the plate measurements and the control points. Equal weighting is justified if we assume the mean error of a single plate measurement to be  $\pm 5.0$  microns and the positions of the control points in the calibration pit and range known to  $\pm 0.25$ mm and  $\pm 50.0$ cm respectively. The following tabulation (Tables 13 and 14) gives the output from the camera orientation codes of the RC-7 camera over the calibration pit and the Range. These results show the residuals of the plate measurements and control points as obtained by equal weighting.

#### 3.3.1 RC-7 Camera Orientation Elements

The analytical treatment of the orientation of a photogrammetric camera which has been applied in the present report is given in detail in an earlier report.<sup>(4)</sup>

The orientation parameters  $\alpha$ ,  $\omega$ ,  $\kappa$ , obtained from the RC-7 camera records in flights over the Range, are required to determine the gun direction. These orientation elements may be determined by enforcing and computing different combinations of the remaining six elements of orientation. It is necessary, if vertical photography is being reduced, to enforce  $Z_0$ , if  $c$  is to be computed. If  $x_p$  and  $y_p$  are to be computed,  $X_0$  and  $Y_0$ , respectively, must be enforced.

RC-7 camera orientations over the range were first determined by enforcing  $c$ ,  $x_p$ , and  $y_p$  and computing  $\alpha$ ,  $\omega$ ,  $\kappa$ ,  $X_0$ ,  $Y_0$  and  $Z_0$  (for results of these orientations see Table 15). Later, when the Askania reductions were made, a systematic discrepancy was noted between the position of the RC-7 camera as determined by the above described method, and the position of the RC-7 camera as determined by the two ground-based Askania cameras, which triangulate the RC-7 position using stars as control points. A discussion of this discrepancy is given in section 3.4 of this report. Because the three elements of interior orientation of the Askania cameras are determined simultaneously with the triangulation results, it was decided that the RC-7 camera orientations should be determined by enforcing the three coordinates  $X_0$ ,  $Y_0$ ,  $Z_0$  as triangulated by the two Askania cameras. Thus the remaining six elements  $c$ ,  $x_p$ ,  $y_p$ ,  $\alpha$ ,  $\omega$  and  $\kappa$  were computed (Table 16).

Little difference exists between the final values of  $\alpha$ ,  $\omega$ ,  $\kappa$ , in Tables 15 and 16, regardless of what orientation elements are enforced or computed and either set of results could be used to satisfy the requirements for the gun direction. Table 17 is a tabulation of RC-7 orientation results over the calibration pit.

3.3.2 The orientation elements of the RC-7 camera comprise the elements of interior and of exterior orientation.

(a) The three elements of interior orientation are

$c$ , the principal distance of the RC-7 camera, taken as the value given by the manufacturer.

$x_p$  and  $y_p$ , the coordinates of the principal point, taken as the intersection of the two lines between opposite pairs of fiducial marks, consequently  $x_p = 0$  and  $y_p = 0$ .

The elements of interior orientation should be determined by making an RC-7 cone calibration, taking star photographs. Such calibrations were not made for this project. Possible errors thus introduced into the elements of exterior orientation are discussed later in this report.

(b) The six elements of exterior orientation are

$\alpha, \omega, \kappa$ , the three rotational elements which must be computed.

$X_o, Y_o, Z_o$ , the coordinates of the camera center of projection.

### 3.4 RC-7 and Askania Comparisons

The three orientation elements ( $X_o, Y_o, Z_o$ ) for the RC-7 camera can be determined by two independent methods

- (1) Method of resection, by use of the RC-7 camera<sup>(4,5)</sup>
- (2) Method of triangulation, by use of the two Askania phototheodolites<sup>(6)</sup>

The two methods should produce compatible results. Table 18 is a tabulation of results from several missions showing differences obtained by the two methods. The two values tabulated in columns (1) and (2) are the differences in the  $X_o$  and  $Y_o$  coordinates. The four values tabulated in columns (3), (4), (5) and (6) are differences in height. Column (3) shows the difference between the two methods before refraction corrections are made, column (4) shows the refraction correction, to be applied to the ground-based Askania cameras, column (5) shows the average refraction correction, to be applied to the airborne RC-7 camera, and column (6) shows the remaining difference in height as obtained by the two methods.

These differences could be attributed to:

- (1) Errors in the absolute positions of the two Askania cameras.
- (2) Errors in the absolute positions of the range targets, which were used to establish the RC-7 camera orientations.
- (3) Errors in the plate measurements. Check runs (Table 18), were made by remeasuring the Askania and RC-7 camera plates and computing the XYZ coordinates from this new set of plate measurements. The differences between the two sets of results, which are due to errors in the plate measurements, indicate the reproducibility of the Askania and RC-7 comparisons. These results indicate that the errors in measuring the Askania and RC-7 camera plates produce differences in the X and Y coordinates of approximately two meters and differences in the Z coordinates of approximately one meter, corresponding to residuals in terms of the plate measurements of seven microns.

Table 15 is a tabulation of RC-7 camera orientation results for runs taken over the Range. These results were obtained by enforcing elements  $c$ ,  $x_p$ ,  $y_p$  and computing elements  $\alpha$ ,  $\omega$ ,  $\kappa$ ,  $X_o$ ,  $Y_o$ ,  $Z_o$ . The average mean error of the plate measurements for the RC-7 camera over the Range is approximately  $\pm 2.1$  microns. The mean errors for the  $X_o$ ,  $Y_o$  and  $Z_o$  orientation elements are seen to be well within the 2.0 and 1.0 m differences that were obtained by the check runs.

(4) Errors in the interior elements of orientation of the RC-7 camera Reference (5). These are to be expected because the RC-7 camera was not calibrated.

(a) Errors in the values of  $x_p$  and  $y_p$  directly affect  $X_o$  and  $Y_o$ . An average error in  $X_o$  and  $Y_o$  of approximately 5.0 m (Table 18), would be explained by an error in  $x_p$  and  $y_p$  of 50 microns.

The actual differences between  $\Delta X$  and  $\Delta Y$  values, as can be seen from Table 18, have a range of approximately 12 m. This range of values is probably due to different positions occupied by the RC-7 plates when

pressed onto the frame of the lens cone. This lack of exact positioning seems to be demonstrated by missions flown on the 10th and 11th of April (Table 18), when two consecutive photographs were taken during one pass. Disregarding the errors involved in the plate measurements, the differences between the  $\Delta X$ 's and  $\Delta Y$ 's, regardless of their numerical values should agree, because only another RC-7 plate was introduced into the system. The fact that they disagree by amounts up to 5.0 m can only be explained by the failure of the plates to occupy identical positions when pressed onto the frame of the lens cone.

(b) Errors in the focal length of the RC-7 camera directly affect  $Z_o$ . Final differences between the two methods are tabulated in column (6) of Table 18. These differences are nearly constant, amounting to approximately three meters.

### 3.5 Refraction

Refraction corrections were made using formulas based on the assumption of a flat earth and NACA standard-atmosphere data. The formulas used are<sup>(7)</sup>

$$R. E. = \alpha_o \cot E_o \left\{ 1 + \frac{RT_o}{Y} \left[ \left( 1 + \frac{L}{T_o} Y \right)^{-\frac{1}{LR}} - 1 \right] \right\}$$

$$R. E.' = \alpha_o \cot E_o \left\{ \frac{RT_o}{Y} - \left( 1 + \frac{L}{T_o} Y \right)^{-\frac{1}{LR}} - 1 \left[ 1 + \frac{RT_o}{Y} \left( 1 + \frac{L}{T_o} Y \right) \right] \right\}$$

where

- RE = refraction error in radians for the ground station
- RE' = refraction error in radians for the air station
- $\alpha_o$  = .0002762
- $E_o$  = observed elevation angle
- R = 29.2745m/ $^{\circ}$ C
- $T_o$  = 288.16 $^{\circ}$  K
- Y = vertical distance between ground and air stations in meters
- L = - .0065 $^{\circ}$  C/m

Refraction corrections should be applied simultaneously with the triangulation computations. The corresponding rigorous treatment is developed in another report.<sup>(8)</sup> The presented results differ insignificantly from the rigorous approach.

In the case of the Askania results the lack of intersection between corresponding rays includes refraction influences. These discrepancies were adjusted by a least squares solution as though they were caused only by measuring errors. The refraction corrections were then computed for each of the two Askantias; designated P1 C and P1 D, in columns (1) and (2), Table 19. The difference between the two heights (column (3)) indicates that a bias was introduced by this approximation method. A mean value (column (4)) was used as the correction to be applied to the triangulated heights.

In the case of the RC-7 camera, a refractive height correction was computed as an average value obtained for the different range targets from several missions.

### 3.6 Reduction of Gun Direction

The direction of the gun axis at the moment the gun is fired was determined by the following method, which was coded for the ORDVAC\*.

(a) The orientation of the RC-7 camera over the calibration pit is determined using an arbitrary +X direction for the plate coordinates system (3.2(d)). The same +X direction must be chosen for RC-7 plates taken over the range. This is necessary since any difference with respect to the orientation of the plate coordinate system during the process of measuring the plates would lead to a difference in the orientation element  $\kappa$ , and influence the gun direction.

---

\* As input, the coordinate differences of the two control points on the gun rod and the elements of orientation from the RC-7 camera reductions, as obtained over the calibration pit and range, were used.

(b) From the results of the calibration pit survey, the differences in the XYZ coordinates of the two control points simulating the gun axis are computed (Fig. 9) where O and R are the upper and lower control points respectively.

$$\begin{aligned}(X)_R &= (X_R - X_O) \\(Y)_R &= (Y_R - Y_O) \\(Z)_R &= (Z_R - Z_O)\end{aligned}\tag{1}$$

(c) Shifting the direction of the gun parallel to itself, into the center of projection of the RC-7 camera as obtained over the calibration pit, a set of pseudo plate coordinates  $x_g$  and  $y_g$  are computed by means of formula (12) of Reference (8).

(2)

(d) The orientation of the RC-7 camera over the range is determined using the same X direction for the plate coordinate system as described in 3.6(a).

(e) Using the set of pseudo plate coordinates  $x_g$  and  $y_g$  from 3.6(c) and the RC-7 camera orientation over the range from 3.6(d) standard coordinates  $\xi$  and  $\eta$  are computed by means of formula (11) of Reference (8) and Fig. 9, this report.

(3)

(f) From the computed values of  $\xi$  and  $\eta$  the direction of the gun over the range is determined by the following formulas:

$$\tan A = \frac{\eta}{\xi}\tag{4}$$

$$\tan v = \frac{\sqrt{\xi^2 + \eta^2}}{r}\tag{5}$$

or

$$\tan \alpha = \frac{\xi}{r} = \tan v \cos A\tag{6}$$

$$\tan \omega = \frac{\eta}{(\xi^2 + \eta^2)^{1/2}} = \tan A \sin \alpha\tag{7}$$

where  $r = +1$  or  $-1$ , depending on geometry.

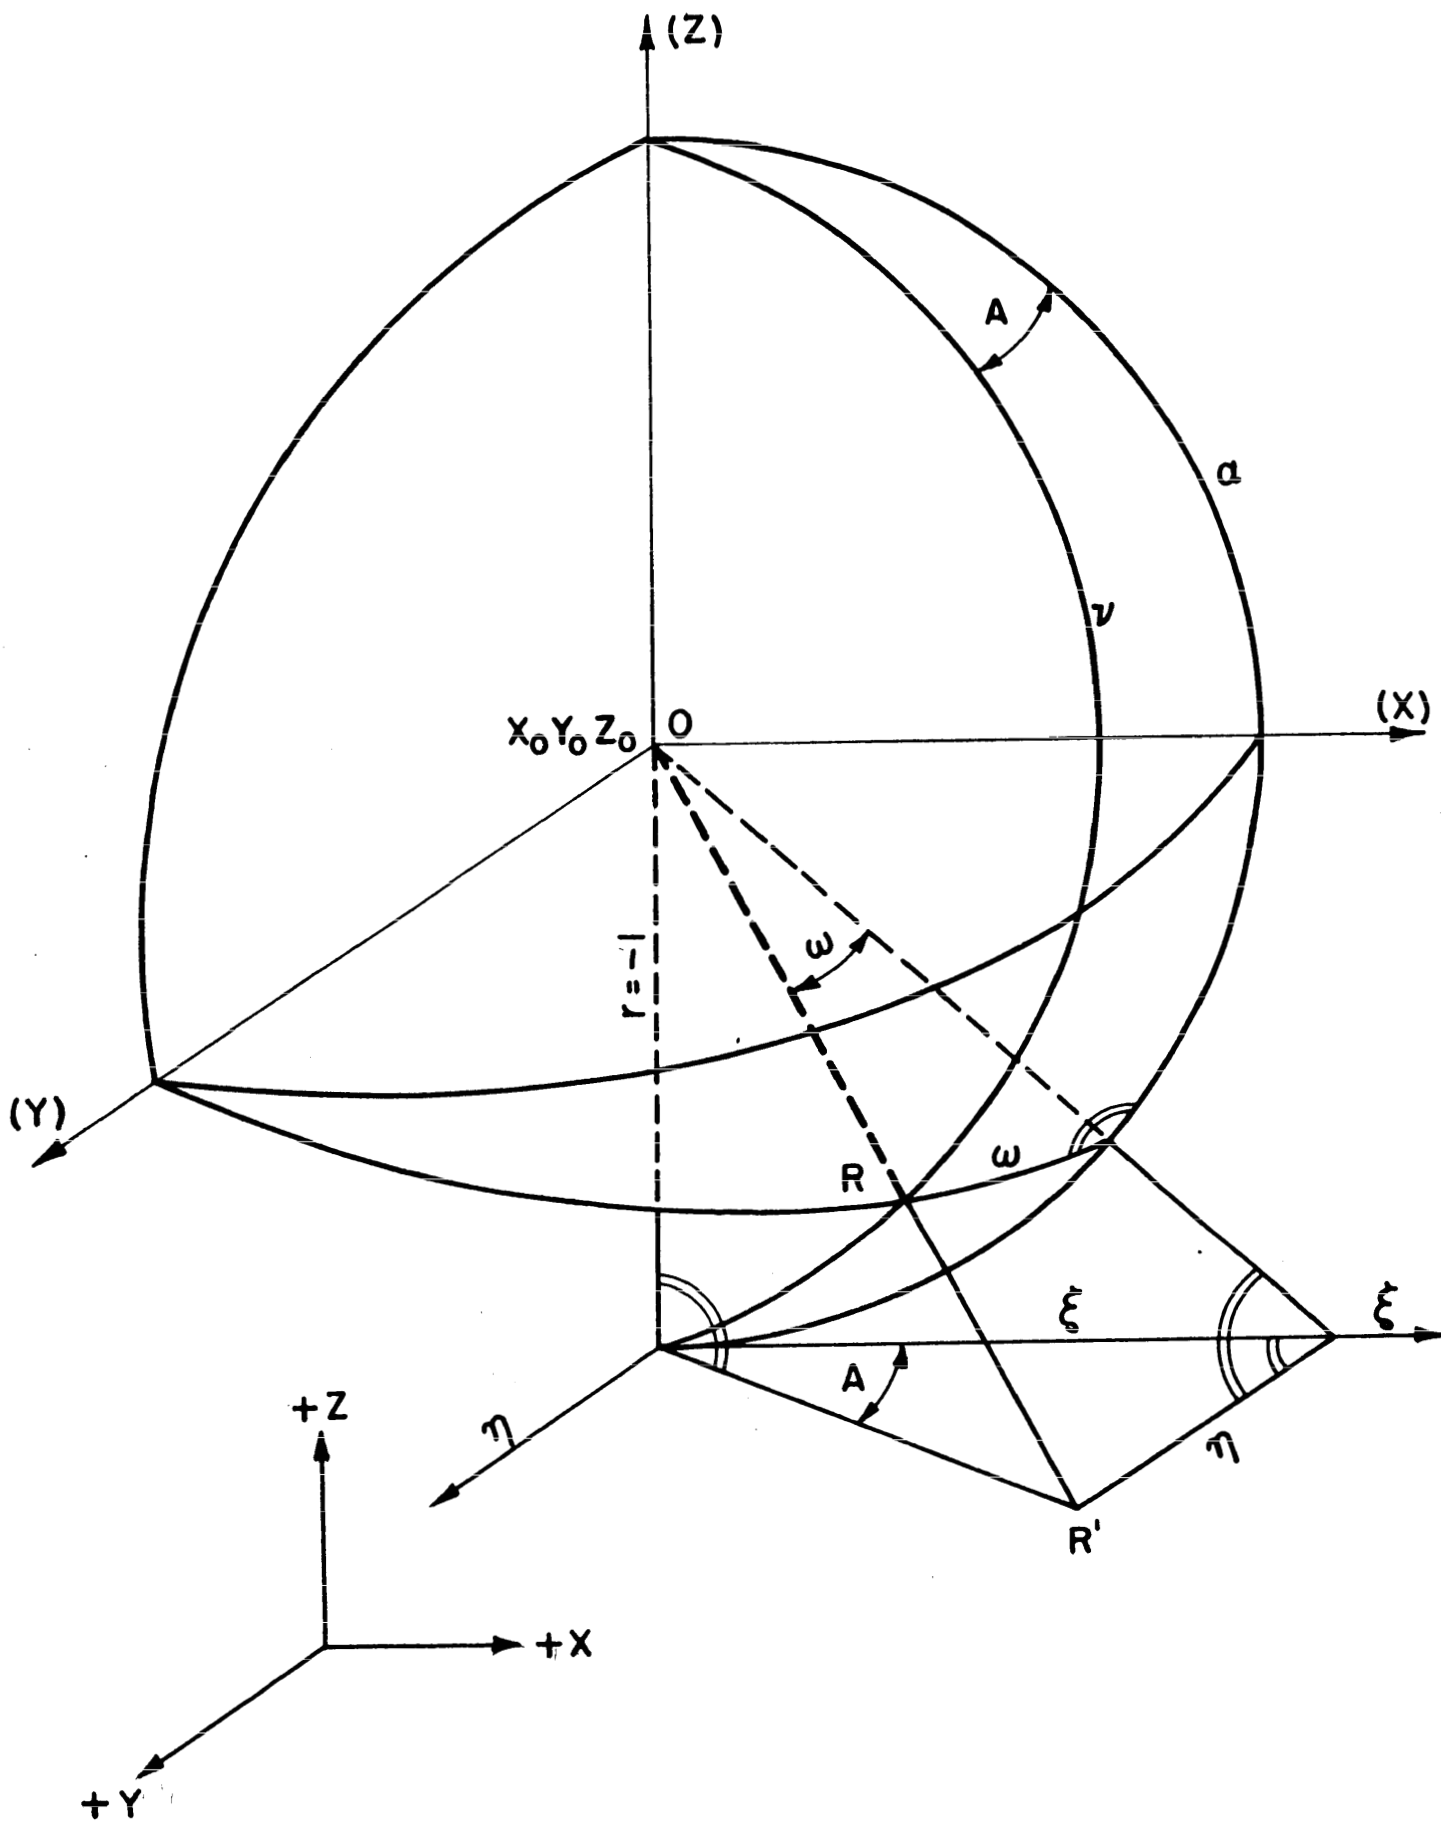


FIG. 9

3.7 An example of the computations, determining the gun direction for the 21 March M1/P2 firing follows:

(a) The orientation elements for the RC-7 camera over the calibration pit are (Table 17)

$$\begin{aligned}c &= .10055 \text{ m} \\x_p &= 0 \text{ m} \\y_p &= 0 \text{ m} \\\alpha &= 198.051 \text{ grads} \\\omega &= -.045 \text{ grads} \\\kappa &= -49.439 \text{ grads}\end{aligned}$$

(b) Using formula (1) and referring to Table 6

$$\begin{aligned}(X)_R &= +.0178 \text{ m} \\(Y)_R &= -.0007 \text{ m} \\(Z)_R &= -.8521 \text{ m}\end{aligned}$$

(c) From formulas (12) and (13) of reference (8) the pseudo plate coordinates are

$$\begin{aligned}x_g &= \frac{c [(X)_R A_1 + (Y)_R B_1 + (Z)_R C_1]}{q} + x_p = -.0007058 \\y_g &= \frac{c [(X)_R A_2 + (Y)_R B_2 + (Z)_R C_2]}{q} + y_p = +.0006774\end{aligned}$$

where  $q = (X)_R D + (Y)_R E + (Z)_R F = +.85224589$ ,

and

$$\begin{aligned}A_1 &= -\cos \alpha \cos \kappa + \sin \alpha \sin \omega \sin \kappa = +.7129913 \\B_1 &= -\cos \omega \sin \kappa = +.7008482 \\C_1 &= \sin \alpha \cos \kappa + \cos \alpha \sin \omega \sin \kappa = +.0213392 \\A_2 &= -\cos \alpha \sin \kappa - \sin \alpha \sin \omega \cos \kappa = -.7005044 \\B_2 &= \cos \omega \cos \kappa = +.7133103 \\C_2 &= \sin \alpha \sin \kappa - \cos \alpha \sin \omega \cos \kappa = +.0219570 \\D &= \sin \alpha \cos \omega = +.0306100 \\E &= \sin \omega = -.0007069 \\F &= \cos \alpha \cos \omega = -.9995312\end{aligned}$$

where A, to F are essentially direction cosines.

(d) The orientation elements for the RC-7 camera over the range are (Table 16)

$$\begin{aligned}c &= .100594 \text{ m} \\x_p &= - .000100 \text{ m} \\y_p &= + .000097 \text{ m} \\\alpha &= 197.819 \text{ grads} \\\omega &= - .159 \text{ grads} \\\kappa &= - 53.159 \text{ grads}\end{aligned}$$

(e) From formulas (11) and (13) of reference (8) the standard coordinates of  $\xi$  and  $\eta$  corresponding to the range coordinate system are

$$\begin{aligned}\xi &= \frac{r [(x_g - x_p)A_1 + (y_g - y_p)A_2 + cD]}{Q} = + .0259460 \\\eta &= \frac{r [(x_g - x_p)B_1 + (y_g - y_p)B_2 + cE]}{Q} = - .0030904\end{aligned}$$

where  $Q = (x_g - x_p)C_1 + (y_g - y_p)C_2 + cF = -.10056317$  and  $r = -1$ , and from 3.7(c)

$$\begin{array}{lll}A_1 = + .6708327 & A_2 = - .7408173 & D = + .0342523 \\B_1 = + .7413074 & B_2 = + .6711610 & E = - .0024976 \\C_1 = + .0211385 & C_2 = - .0270670 & F = - .9994101\end{array}$$

(f) Using the computed values of  $\xi$  and  $\eta$ , the direction of the gun at the moment of firing, referred to the range coordinate system, is given by (3.6(f))

$$\begin{aligned}\tan A &= - .1191089 \\A &= + 392.453 \text{ grads} \\\tan v &= - .0261294 \\v &= + 198.337 \text{ grads}\end{aligned}$$

or

$$\tan \alpha = - .0259460$$

$$\alpha = + 198.349 \quad \text{grads}$$

$$\tan \omega = - .0030894$$

$$\omega = + 399.803 \quad \text{grads}$$

The results of the hand computed example above may differ slightly from the results obtained from the electronic computer because of the smaller number of digits carried. The results of all firings are shown in Table 20 and also in Table 27.

### 3.8 Accuracy of Gun Center Line at the Moment of Firing

Factors affecting the accuracy with which the gun direction at the moment of firing can be determined are

- (a) maintaining relationship between gun barrel and RC-7 camera
- (b) measuring direction of gun over calibration pit
- (c) determining the direction of RC-7 over the calibration pit
- (d) determining the direction of RC-7 over the range

(a) A post-calibration was attempted for the purpose of determining any relative differences between the gun center line and RC-7 camera before and after a mission. However, because of movements in the aircraft probably due to heat caused by its operation, pointings with the T-2 theodolites could not be made on the gun rod. If a check on this relationship is desired, the theodolites could be replaced by phototheodolites, for example the Wild Phototheodolite, which is a combination of a T-2 theodolite and camera carrier. Records could then be obtained by exposures taken simultaneously with the phototheodolites and the RC-7 camera.

(b) The error in the direction of the gun over the calibration pit is a result of errors in the X and Y coordinates of control points Nos. 26 and 27, which in turn are due to errors in the horizontal angles turned from stations A and D.

According to the method in 2.4(c) part B, a set of observational equations and corresponding normal equations can be established for the intersection of points Nos. 26 and 27.

The diagonal terms of the inverse of the resulting normal equation system, denoted by  $Q_x$  and  $Q_y$  give the weighting factors for the x and y coordinates, and their mean errors are obtained by

$$m_x = m \sqrt{Q_x}$$

$$m_y = m \sqrt{Q_y}$$

where m denotes the mean error of a single observation of unit weight

Applying this method to the intersection of point No. 26, we have

| Coordinates                        | X     | Y     |
|------------------------------------|-------|-------|
| Station A                          | 92.8  | 100.0 |
| Station D                          | 100.0 | 100.0 |
| Approx. values for<br>Point No. 26 | 97.4  | 96.7  |

The observational equations are

- (1)  $21,250 \Delta X + 29,600 \Delta Y = l_1$
- (2)  $38,600 \Delta X - 30,400 \Delta Y = l_2$

and the inverse of the corresponding normal equations is

$$\begin{vmatrix} Q_x & Q_{xy} \\ Q_{xy} & Q_y \end{vmatrix} = \begin{vmatrix} .56279 \times 10^{-9} & .17021 \times 10^{-9} \\ .17021 \times 10^{-9} & .60693 \times 10^{-9} \end{vmatrix}$$

Consequently

$$m_x = \pm 0.047 \text{ mm}$$

$$m_y = \pm 0.049 \text{ mm}$$

where m was assumed to be  $\pm 2''$  of arc.

Control point No. 27 is approximately below point No. 26; therefore, the mean errors for control points Nos. 26 and 27 will be the same. Combining the mean errors of control points Nos. 26 and 27, the mean error of the direction of the gun in the X direction is

$$\frac{(\overline{m}_{X26}^2 + \overline{m}_{X27}^2)^{1/2}}{d} \rho'' = \frac{.066}{852} \rho'' = 16''$$

and in the Y direction

$$\frac{(\overline{m}_{Y26}^2 + \overline{m}_{Y27}^2)^{1/2}}{d} \rho'' = \frac{.069}{852} \rho'' = 17''$$

where  $d = 0.852$  meters, the distance between control points Nos. 26 and 27.

(c) The average error in the direction of the RC-7 camera over the calibration pit is (Table 17)

$$\begin{aligned} \alpha &= .008^g = 26'', \text{ in the X direction} \\ \omega &= .006^g = 19'', \text{ in the Y direction} \end{aligned}$$

(d) The average error in the direction of the RC-7 camera over the range is (Table 16)

$$\begin{aligned} \alpha &= .005^g = 16'', \text{ in the X direction} \\ \omega &= .005^g = 16'', \text{ in the Y direction} \end{aligned}$$

Combining the errors due to (b), (c) and (d) the error of the gun center line in the X and Y direction is expressed with sufficient accuracy by

$$\begin{aligned} \text{error } X_{\text{dir}} &= \left[ (16)^2 + (26)^2 + (16)^2 \right]^{1/2} = 34'' \\ \text{error } Y_{\text{dir}} &= \left[ (17)^2 + (19)^2 + (16)^2 \right]^{1/2} = 30'' \end{aligned}$$

which is well within the limits set by the requirement of 1 mil (202.5").

#### 4. ASKANIA CAMERAS (Ground Based Photogrammetric Cameras)

##### 4.1 Description and Function

The Askania camera (Fig. 10), a phototheodolite designed primarily for the determination of trajectories, was used to determine the following quantities:

- (1) Space coordinates of the aircraft at the moment of firing
- (2) Space coordinates of the burst of the projectile
- (3) Velocity of the aircraft

Two phototheodolites, at stations Pi C and Pi D, were used.

The Askania camera is equipped with a  $24^{\circ}$  cone, relative aperture variable from  $f/5.5$  to  $f/64$ , a focal length of approximately 370mm and a plate size of 13 x 18cm. All missions were run using an aperture of  $f/5.5$  and Eastman Kodak 103F emulsion.

##### 4.2 Coordinates of the Askania Cameras

The geographic positions of the two Askania cameras and the Range lights serving as control points for the RC-7 camera, were determined by survey ties from United States Coast and Geodetic Survey triangulation stations. When reduced to a rectangular coordinate system the Askania camera stations and the Range lights are compatible. However, because of the possible systematic orientation error in the U.S.C. and G.S. triangulation stations, the flashes as triangulated by the ground based Askania cameras and the results obtained by the RC-7 camera may not be compatible. A suggested solution is to use three ground based cameras following the method of reduction as outlined in reference (9).

##### 4.3 Coordinate Transformation

An XYZ rectangular coordinate system, using Range station MID as the origin, was set up for the Range target lights and the two Askania cameras as follows<sup>(10)</sup>:

+ X, increasing in the direction of flight, at an angle of  $56^{\circ} 56' 41''$  measured clockwise from the south

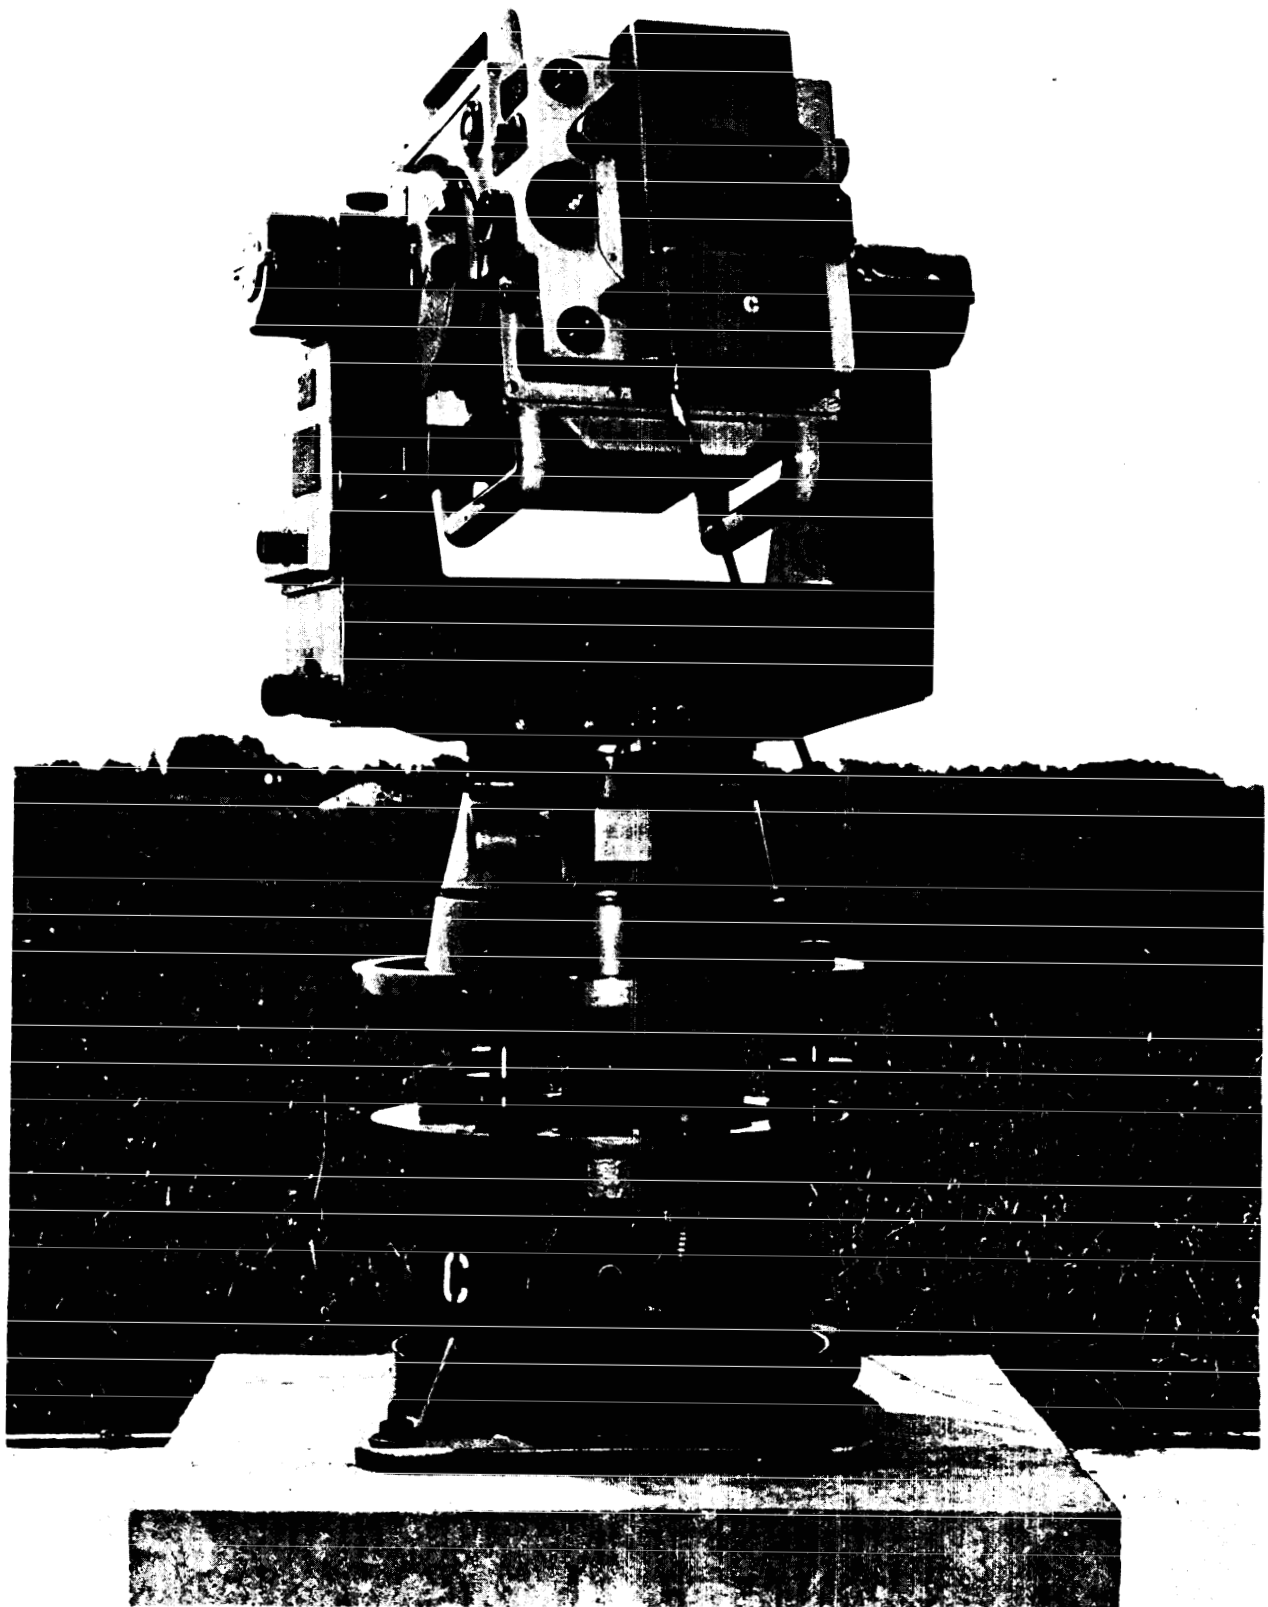


Fig. 10 Askania Phototheodolite

+ Y,  $90^\circ$  clockwise from + X

+ Z, measured positive upwards from a plane tangent to the reference ellipsoid at station MID

The values to be used in connection with Reference (10) are

$$\begin{aligned}H_o &= 0 \\ \phi_o &= 30^\circ 35' 01.732'' \\ \lambda_o &= (\lambda_g) = 86^\circ 39' 59.275'' \\ \alpha &= 59^\circ 24' 58.268'' \\ \beta &= 56^\circ 56' 41'' \\ \gamma &= 0 \\ a &= 6,378,206.4 \text{ m} \\ b &= 6,356,583.8 \text{ m}\end{aligned}$$

A tabulation of input ( $\phi$ ,  $\lambda$ ,  $H$ ) and output (XYZ) is given in Tables 21 and 22.

#### 4.4 Askania Camera Orientations.<sup>(4)</sup>

The absolute orientations of the Askania cameras were obtained by using stars as control points (Fig. 11).

These control points are given in the form of Standard Coordinates ( $\xi$   $\eta$ ), which are obtained from their apparent positions (RA,  $\delta$ ) at the mean time of the observation by the equations on page 15, Reference (9):

$$\begin{aligned}+ \xi \text{ (north)} &= - \tan z_r \cos A \\ + \eta \text{ (east)} &= - \tan z_r \sin A \\ + Z &= + 1.0 \text{ (unit)}\end{aligned}$$

where, from the astronomical triangle,

$$\begin{aligned}\cos z &= \sin \delta \sin \phi + \cos \delta \cos \phi \cos t \\ \sin z \cos A &= - \sin \delta \cos \phi + \cos \delta \sin \phi \cos t \\ \sin z \sin A &= \cos \delta \sin t\end{aligned}$$

$z$  = zenith distance of the star

$\phi$  = geographic latitude of the camera station

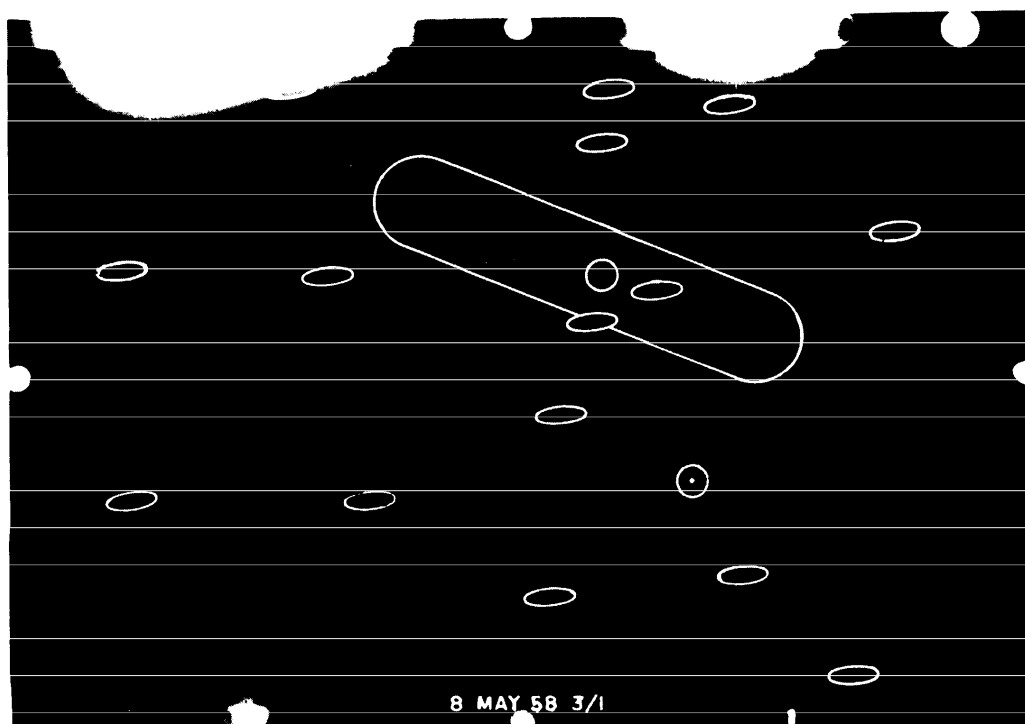
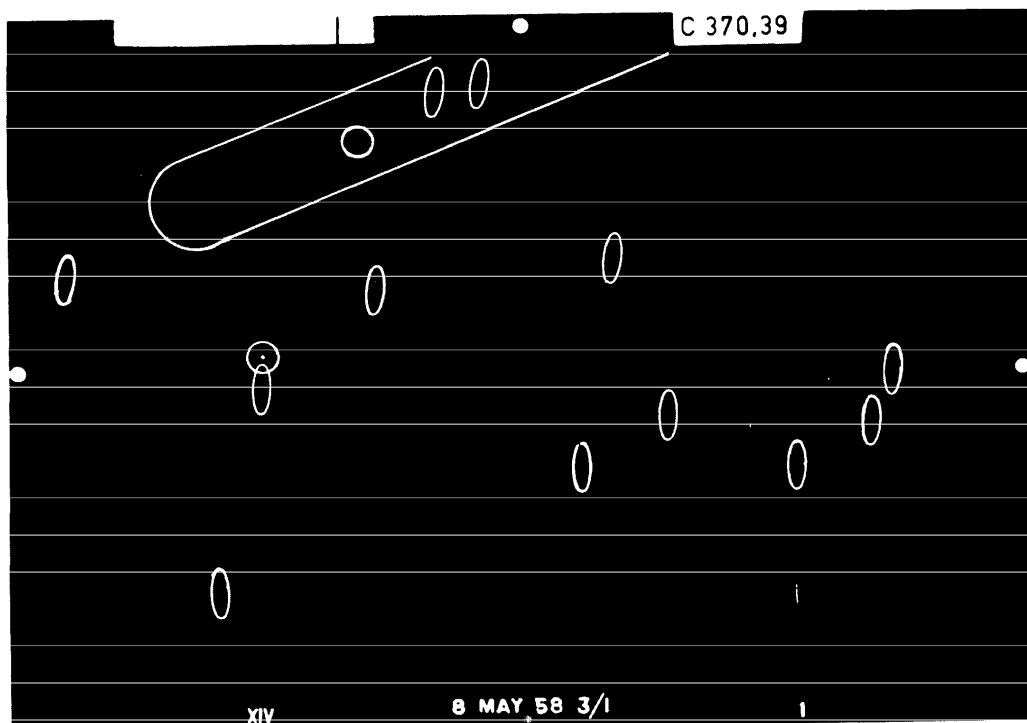


Fig. 11 Pi C and Pi D Askania Camera Exposures Taken on 8 May M3/P1

The stars are marked by oval shaped circles, the flashes emitted from the aircraft during the mission by the large oval shaped figure, and the projectile burst is marked by a small circle. The small circle inside the large oval shaped figure contains the RC-7 flash that occurs near the time at which the gun was fired.

$\delta$  = declination of the star  
 $t$  = hour angle of the star  
 $A$  = azimuth of the star, measured clockwise  
 from south

and subscript  $r$  indicates that the zenith distance has been corrected for astronomical refraction.

The nine orientation elements of each Askania camera are similar to the ones described under the RC-7 camera orientation elements, the three coordinates of the Askania camera center of projection ( $X_0 Y_0 Z_0$ ) are the center of the unit sphere and the remaining six orientation elements ( $\alpha, \omega, \kappa, c, x_p, y_p$ ) are computed.

The number of absolute control points (stars) required for a unique solution is three, however, in most cases from 8 to 15 stars were chosen. Tables 23 and 24 give tabulations of the number of stars used, the six computed orientation elements and the corresponding mean errors for the Askania camera orientation reductions.

#### 4.5 Triangulation of Flashes and Burst

(a) The two Askania cameras were located at the ends of an 11-km baseline which was approximately perpendicular to the direction of flight of the aircraft. The cameras were pointed approximately 30 degrees down-range from each other and at elevation angles of approximately 56 degrees. As the aircraft flew between the two Askanias, a pre-established sequence of flashes was emitted consisting of 10 pre-survey flashes (Nos. 1 to 10), an RC-7 flash (No. 11), a reset flash (No. 12) and 10 post-survey flashes (Nos. 13 to 22). The 10 post-survey flashes served as the pre-survey flashes for the next round fired.

The flashes and burst were observed by photoelectric cells and recorded on the ground against a time base. In most cases flash No. 11 was the first flash to be picked up. Table 25 gives a tabulation of actual times referred to an arbitrary zero time.

Because of the extreme brightness of the burst, a large image appeared on the plate. In order to increase the accuracy of identifying the center of the burst a diffraction effect was produced by placing a fine mesh screen in front of the Askania lens. Accurate settings could then be made by using the resulting cross-shaped pattern (Fig. 11).

(b) A computed example of the triangulation of the RC-7 flash from Pi C and Pi D Askania cameras for 7 May M1/P1 follows.

The absolute orientation of each camera is obtained from stars photographed on the same plate with the flash points (Fig. 11). The direction of each individual flash point can therefore be determined and triangulation can proceed according to the methods outlined in Reference (6).

The length of the base line (about 11,000 m) necessitates the use of either a spherical or ellipsoidal rectangular system when triangulating the flashes since the absolute orientation of each camera refers to the local zenith. Both of these methods are somewhat longer than the simpler solution in the Cartesian system used later for the velocity cameras. It is, however, possible to apply a transformation to the constants  $A_1, B_1, C_1, A_2, B_2, C_2, D_1, E_1, F_1$  which will enable the triangulation to be carried out in the Cartesian system.

In Appendix C Reference (11), it is pointed out that the nine constants derived from the orientation are actually the direction cosines of one orthogonal system with respect to another. More precisely, these are the direction cosines of the  $l_x - x_p, l_y - y_p$  coordinate system with respect to an XYZ system in which the X-axis is positive toward the north, the Y-axis is positive toward the east and the Z-axis is positive in the direction away from the center of the earth. It is therefore possible to make a transformation of the coordinates of one camera to a system parallel with the system of the second camera.

A local Cartesian system was set up, see (4.3), in which the coordinates of the flash point are to be expressed. Hence, a transformation may be set up for each station by which the orientation elements of the two Askantias are reduced to the local Cartesian system. This transformation may be conveniently written by means of the method outlined in Sec. 6 of Reference (11).

The data for the Askaniya stations and the origin, which are used in the computation are as follows:

| Station MID)             | Origin           | P1 C             | P1 D             |
|--------------------------|------------------|------------------|------------------|
| $\phi$ 30° 35' 01.732 N  | 30° 35' 00.502 N | 30° 37' 19.432 W | 30° 37' 57.288 N |
| $\lambda$ 86 39 59.275 W | 86 37 19.432 W   | 86 41 02.675 W   |                  |

Using the notation on p. 27 of Reference (11), we have the following 3 x 3 matrices:

$$\Psi = \begin{bmatrix} \cos \phi_0 & 0 & -\sin \phi_0 \\ 0 & 1 & 0 \\ \sin \phi_0 & 0 & \cos \phi_0 \end{bmatrix} = \begin{bmatrix} .86088579 & 0 & -.50879824 \\ 0 & 1 & 0 \\ .50879824 & 0 & .86088579 \end{bmatrix}$$

$$U_1 = \begin{bmatrix} 1 & 0 & 0 \\ 0 & .99999970 & .00078214 \\ 0 & .00078214 & .99999970 \end{bmatrix} = U_1^T = \begin{bmatrix} 1 & 0 & 0 \\ 0 & .99999995 & -.00030737 \\ 0 & .00030737 & .99999995 \end{bmatrix}$$

$$\Delta_1 = \begin{bmatrix} 0 & -\sin \phi_1 & \cos \phi_1 \\ 0 & 1 & 0 \\ \sin \phi_1 & 0 & \cos \phi_1 \end{bmatrix} = \begin{bmatrix} 0 & -.50879824 & .86088579 \\ 0 & 1 & 0 \\ .50879824 & 0 & .86088579 \end{bmatrix}$$

where  $\Delta_1 = \lambda_0 - \lambda_1$

$$\Delta_1 C = 0^\circ 02' 39.843 \quad \Delta_1 D = -(0^\circ 01' 03.400)$$

$$\hat{\psi}_1 = \begin{matrix} & \text{P1 C} & \\ \begin{bmatrix} .86118468 & 0 & -.50829218 \\ 0 & 1 & 0 \\ .50829218 & 0 & .86118468 \end{bmatrix} & & \begin{matrix} \text{P1 D} \\ \begin{bmatrix} .86045243 & 0 & -.50953077 \\ 0 & 1 & 0 \\ .50953077 & 0 & .86045243 \end{bmatrix} \end{matrix} \end{matrix}$$

If  $\Gamma_1 = \psi_0 \Omega_1 \hat{\psi}_1^T$ , we have:

$$\Gamma_1 = \begin{matrix} & \text{P1 C} & \\ \begin{bmatrix} .99999974 & .00039795 & -.00058761 \\ -.00039756 & .99999970 & .00067357 \\ .00058787 & -.00067333 & .99999960 \end{bmatrix} & & \begin{matrix} \text{P1 D} \\ \begin{bmatrix} .99999961 & -.00015639 & .00085114 \\ .00015661 & .99999995 & -.00026448 \\ -.00085110 & .00026461 & .99999959 \end{bmatrix} \end{matrix} \end{matrix}$$

Let A be the transformation due to the rotation of the XY-plane in azimuth. Then

$$A = \begin{bmatrix} \cos A & \sin A & 0 \\ -\sin A & \cos A & 0 \\ 0 & 0 & 1 \end{bmatrix} = \begin{bmatrix} -.54544791 & -.83814472 & 0 \\ .83814472 & -.54544791 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

And finally the complete transformation  $A \Gamma_1$  is:

$$\begin{matrix} & \text{P1 C} & \\ \begin{bmatrix} -.54511456 & -.83836153 & -.00024404 \\ .83836135 & -.54511421 & -.00085990 \\ .00058787 & -.00067333 & .99999960 \end{bmatrix} & & \begin{matrix} \text{P1 D} \\ \begin{bmatrix} -.54517896 & -.83805938 & -.00024258 \\ .83805897 & -.54557896 & .00085764 \\ -.00085110 & .00026461 & .99999959 \end{bmatrix} \end{matrix} \end{matrix}$$

The following values of  $\alpha$ ,  $\omega$ ,  $\kappa$ ,  $c$ ,  $x_p$ ,  $y_p$  were derived from the orientations of the 2 cameras (Tables 23 and 24):

|          | P1 C                                                   | P1 D                                                  |
|----------|--------------------------------------------------------|-------------------------------------------------------|
| $\alpha$ | $24.373781 \text{ grad } 21^\circ 56' 11.05''$         | $-41.756238 \text{ grad } -37^\circ 34' 50.21''$      |
| $\omega$ | $-35.260531 \text{ " } -31 \text{ } 44 \text{ } 04.12$ | $4.9600658 \text{ " } 4 \text{ } 27 \text{ } 50.61$   |
| $\kappa$ | $-57.607548 \text{ " } -51 \text{ } 50 \text{ } 48.46$ | $194.39737 \text{ " } 174 \text{ } 57 \text{ } 27.48$ |
| $c$      | $.37050712 \text{ m}$                                  | $.37035596 \text{ m}$                                 |
| $x_p$    | $.16663650 \text{ "}$                                  | $.07960646 \text{ "}$                                 |
| $y_p$    | $.19518634 \text{ "}$                                  | $.09748358 \text{ "}$                                 |

It is now convenient to write the constants  $A_1, B_1, C_1, A_2, B_2, C_2, D_1, E_1, F_1$  in the form of a  $3 \times 3$  matrix as follows:

$$\begin{bmatrix} A_1 & A_2 & D_1 \\ B_1 & B_2 & E_1 \\ C_1 & C_2 & F_1 \end{bmatrix}$$

For the two stations, these constants computed by means of formulas (9), p. 11 of Reference (12) are

| P1 C                                                                                                                                          | P1 D                                                                                                                                            |
|-----------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| $\begin{bmatrix} -.41852302 & .85081668 & .31772545 \\ .66879650 & .52540705 & -.52598353 \\ .61445075 & .00764255 & .78891816 \end{bmatrix}$ | $\begin{bmatrix} .78525690 & -.11693962 & -.60802691 \\ -.08762571 & -.99310808 & .07783372 \\ .61293828 & .00784068 & .79009189 \end{bmatrix}$ |

The direction cosines or above constants are now referred to the local coordinate system by multiplying the above matrices by the appropriate  $A'$  matrix. The resulting sets of constants are

| P1 C                                                                                                                                           | P1 D                                                                                                                                          |
|------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| $\begin{bmatrix} -.23270022 & -.90427548 & .26757506 \\ -.71597237 & .42687840 & .55241144 \\ .61375415 & .00778894 & .78945879 \end{bmatrix}$ | $\begin{bmatrix} -.35513278 & .89608144 & .26630575 \\ .70642401 & .44382330 & -.55134923 \\ .61224651 & .00767742 & .79062965 \end{bmatrix}$ |

A convenient check on the numerical work is furnished by the relations associated with the direction cosines of three mutually perpendicular lines. Thus, the sums of the squares of the elements in any row or column must be equal to one, and the sums of the products of the corresponding elements of any two rows or columns must be equal to zero.

The direction of the ray from the camera to a flash point may be found using formulas (11) of Reference (12) to compute the standard coordinates

$$\xi = \frac{u}{w}$$

$$\eta = \frac{v}{w}$$

The azimuth angle K, measured from the positive X-axis in a clockwise direction is given by

$$\tan K = \frac{\eta}{\xi}$$

The elevation angle  $\epsilon$ , is given by

$$\cot \epsilon = \sqrt{\xi^2 + \eta^2}$$

For the RC-7 flash we have the following values:

|                | Pi C           | Pi D            |
|----------------|----------------|-----------------|
| $l_x$          | .206052        | .094452         |
| $l_y$          | .163614        | .115106         |
| u              | .11457501      | .10914691       |
| v              | .16297441      | -.18588699      |
| w              | .31644561      | .30203883       |
| x              | .36206857      | .36136715       |
| y              | .51501555      | -.61544070      |
| tan K          | 1.42242545     | -1.70308981     |
| cot $\epsilon$ | .62955116      | .71369004       |
| K              | 54° 53' 30".63 | -59° 34' 47".65 |
| $\epsilon$     | 57° 48' 26".95 | 54° 29' 05".74  |

The XYZ coordinates of the two stations are

|   | Pi C       | Pi D       |
|---|------------|------------|
| X | -1535.0080 | -1533.7141 |
| Y | -5452.0527 | 5452.1625  |
| Z | 54.8438    | 40.1300    |

The azimuth angle of the base line is 89° 59' 35".52

The adjustment and triangulation is made, following the method outlined in Sec. 1, of Reference (6).  $\alpha_a$  is the angle at Pi C and  $\alpha_b$  at Pi D. The values of a and b are .00134937 and 10904.2153 meters respectively. Hence, we have the values

$$\begin{aligned}
\alpha_a &= 89^\circ 59' 35.52'' - K_c = 35^\circ 06' 04.89'' \\
\alpha_b &= 90^\circ 00' 24.48'' + K_D = 30^\circ 25' 36.83'' \\
\epsilon_a &= 57' 48'' 26.95'' \\
\epsilon_b &= 54' 29'' 05.74'' \\
\alpha_a + \alpha_b &= 65^\circ 31' 41.72'' \\
d &= \sin \alpha_b \tan \epsilon_a - \sin \alpha_a \tan \epsilon_b + a \sin (\alpha_a + \alpha_b)
\end{aligned}$$

$$\begin{aligned}
\sin \alpha_a &= .57502464 & \cos \alpha_a &= .81814 \\
\sin \alpha_b &= .50643861 & \cos \alpha_b &= .86228 \\
\sin (\alpha_a + \alpha_b) &= .91016567 & \cos (\alpha_a + \alpha_b) &= .41424 \\
\tan \epsilon_a &= 1.58843328 & \cos^2 \epsilon_a &= .28384 \\
\tan \epsilon_b &= 1.40116849 & \cos^2 \epsilon_b &= .33747 \\
d &= -.00003431
\end{aligned}$$

The coefficients of the condition equation are

$$\begin{aligned}
a_1 &= -1.1469 \\
a_2 &= 1.3691 \\
a_3 &= 1.7842 \\
a_4 &= -1.7039
\end{aligned}$$

Then  $[aa] = 9.2765$ ,  $K = 1.0738$  and the corrections to be applied to the measured angles are

$$\begin{aligned}
v_{\alpha_a} &= -0.87'' \\
v_{\alpha_b} &= 1.04'' \\
v_{\epsilon_a} &= 1.36'' \\
v_{\epsilon_b} &= -1.30''
\end{aligned}$$

Adding these corrections, result in

$$\begin{aligned}\alpha_a + v_{\alpha_a} &= 35^{\circ} 06' 04''.02 \\ \alpha_b + v_{\alpha_b} &= 30 \quad 25 \quad 37.87 \\ \epsilon_a + v_{\epsilon_a} &= 57 \quad 48 \quad 28.35 \\ \epsilon_b + v_{\epsilon_b} &= 54 \quad 29 \quad 04.44 \\ \alpha_a + \alpha_b &= 65 \quad 31 \quad 41.89\end{aligned}$$

The functions of the angles needed to compute the coordinates of the flash point are

$$\begin{aligned}\sin \alpha_a &= .57502120 \\ \sin \alpha_b &= .50644296 \\ \sin (\alpha_a + \alpha_b) &= .91016601 \\ \tan \epsilon_a &= 1.58845650 \\ \tan \epsilon_b &= 1.40114981\end{aligned}$$

Then

$$\begin{aligned}\frac{b \sin \alpha_b}{\sin (\alpha_a + \alpha_b)} &= 6067.4240 \\ \frac{b \sin \alpha_a}{\sin (\alpha_a + \alpha_b)} &= 6889.0234\end{aligned}$$

and

$$\begin{aligned}Z_a &= 9692.6829 \\ Z_b &= 9692.6838\end{aligned}$$

The corrected azimuth angles measured from the + X axis are

$$\begin{array}{cc} \text{P1 C} & \text{P1 D} \\ 54^{\circ} 53' 31''.50 & -59^{\circ} 34' 46''.61 \end{array}$$

For Pi C:

$$X = \frac{b \sin \alpha_b}{\sin (\alpha_a + \alpha_b)} \cos K + X_c$$

$$Y = \frac{b \sin \alpha_b}{\sin (\alpha_a + \alpha_b)} \sin K + Y_c$$

and for Pi D:

$$X = \frac{b \sin \alpha_a}{\sin (\alpha_a + \alpha_b)} \cos K + X_D$$

$$Y = \frac{b \sin \alpha_a}{\sin (\alpha_a + \alpha_b)} \sin K + Y_D$$

and

|         | Pi C       | Pi D       |
|---------|------------|------------|
| sin K = | .81807026  | -.86233356 |
| cos K = | .57511829  | .50634062  |
| X =     | 1954.4785  | 1954.4783  |
| Y =     | - 488.4736 | - 488.4736 |

Averaging the results from Stations Pi C and Pi D, the coordinates of the RC-7 flash point are

$$\begin{aligned} X &= 1954.478 \text{ m} \\ Y &= - 488.47 \text{ m} \\ Z &= 9692.683 \text{ m} \end{aligned}$$

Table 26 is a tabulation of XYZ coordinates resulting from triangulations by the two Askania cameras. The Z coordinates are not corrected for refraction. The space coordinates of the aircraft, at moment of firing and of the burst, after being corrected for refraction are shown in Table 27. The check-runs for 21 March M1/P2 and 10 April M3/P1-1 and M3/P1-2 are also tabulated in Table 26. A comparison between the original reductions and the check run reductions are an indication of differences to be expected from the two sets of independent plate measurements.

#### 4.6 Space Coordinates of Aircraft at Time of Firing

A sample calculation for 7 May M1/P1 follows:

|                                                      | (Meters) |          |          |
|------------------------------------------------------|----------|----------|----------|
|                                                      | X        | Y        | Z        |
| 1. RC-7 flash                                        | 1954.478 | -488.474 | 9692.683 |
| 2. Askantias (Height of Instruments)                 |          |          | 1.00     |
| 3. Refraction Correction (Table 20)                  |          | -        | 1.42     |
| 4. Aircraft Velocity correction                      | .957     |          |          |
| 5. Position of RC-7 Flash at Time Gun Fired          | 1955.435 | -488.474 | 9692.263 |
| 6. Distance between RC-7 Flash and End of Gun Barrel | -.38     | 00       | -.81     |
| 7. Position of End of Gun Barrel when Gun Fired      | 1955.055 | -488.474 | 9691.453 |

The space coordinates of the RC-7 flash were obtained from the Askania cameras (Table 26). The aircraft velocity correction in X was computed from the time difference between the RC-7 flash and the gun firing (Table 25), and the average velocity of the aircraft. Corrections in the Y and Z directions were so small as to be negligible.

#### 4.7 Space Coordinates of Burst

A sample calculation for 7 May M1/P1 follows:

|                                         | (Meters) |          |          |
|-----------------------------------------|----------|----------|----------|
|                                         | X        | Y        | Z        |
| 1. Burst without refraction corrections | 2424.414 | -600.480 | 8043.853 |
| 2. Refraction correction                |          |          | - 1.28   |
| 3. Burst                                | 2424.414 | -600.480 | 8042.573 |

The space coordinates of the burst were obtained from the Askania cameras (Table 26) and the refraction correction from 3.5.

#### 4.8 Velocity of Aircraft

Since the time was not picked up until the first RC-7 flash occurred, the average velocity of the aircraft at any particular firing was computed from the reset and post-survey flashes following this event. Thus, the average velocity of the aircraft is determined from the survey flashes that occur up to approximately 3 seconds after the gun is fired. In view of the fact that the differences in times between the post-survey flashes are practically constant (0.5 sec.), and only the time between the reset and first post-survey flash differs from this 0.5 second value, the velocity of the aircraft was taken as the average of the velocities between the reset and post-survey flashes. A test calculation was made whereby the velocity was computed by weighting the velocities between flashes to the differences in times between the flashes. The results of the two methods agreed to within 1cm/sec., thus eliminating the need of any weighting.

A sample calculation is given of the aircraft velocity for 11 April M1/P3-1. From Tables 25 and 26 the  $\Delta X$ ,  $\Delta Y$ ,  $\Delta Z$  values between the reset flash and post-survey flash No. 10 are

| $\Delta X$ | $\Delta Y$ | $\Delta Z$ | Distance | $\Delta t$ | Velocity<br>(meters/sec.) |
|------------|------------|------------|----------|------------|---------------------------|
| 347.9599   | 16.3584    | 1.3968     | 348.3470 | 1.65023    | 211.0900                  |
| 105.7541   | 5.1530     | .4025      | 105.8803 | .50062     | 211.4984                  |
| 105.7038   | 5.4964     | -.2347     | 105.8469 | .49998     | 211.7022                  |
| 105.5532   | 5.1004     | -.1884     | 105.6765 | .49993     | 211.3826                  |
| 105.9001   | 5.3265     | -.6714     | 106.0361 | .50002     | 212.0637                  |
| 105.6869   | 5.5317     | -.3608     | 105.8322 | .50005     | 211.6432                  |
| 105.8262   | 5.4877     | -.1786     | 105.9685 | .49998     | 211.9456                  |
| 105.6437   | 5.4823     | -1.1120    | 105.7917 | .49997     | 211.5961                  |
| 106.0994   | 5.6466     | -.8026     | 106.2526 | .50001     | 212.5009                  |
| 105.7137   | 5.5490     | -.5486     | 105.8607 | .50000     | 211.7213                  |

Mean Velocity = 211.7144

(entered in Table 27)

A bias or constant error in settings made on the survey flashes will not affect the value of the aircraft velocity. The similarity in appearance of the photographed flashes result in very accurately measured distances, within approximately 5 microns on the plate. With a picture scale of 1:27,000, this is equivalent to 0.135 m in the air. Dividing this distance by the average difference in time between the flashes of 0.5 seconds, the aircraft velocity is determined to approximately 0.27 m/sec. If the aircraft is not accelerating or decelerating during these times a better velocity value is obtained by averaging. Because the aircraft velocity may not be constant its velocity should be determined with the help of the pre- and post-survey flashes. The requirement of aircraft velocity to  $\pm 2.0$  ft/sec. appears to have been satisfied.

#### 4.9 Accuracy of Askania Results

The following tabulation is a sample of mean errors in the XYZ coordinates of the RC-7 flashes as triangulated by the Askania cameras. An example of the computations is also given.

| Date  | Mission/<br>Pass | Point<br>Triangulated | m.e.<br>(microns) | m.e. X     | m.e. Y<br>(meters) | m.e. Z     |
|-------|------------------|-----------------------|-------------------|------------|--------------------|------------|
| 7 May | M1/P1            | RC-7 Flash            | $\pm 2.8$         | $\pm .073$ | $\pm .072$         | $\pm .125$ |
| 7 May | M1/P2            | RC-7 Flash            | $\pm 8.2$         | $\pm .209$ | $\pm .203$         | $\pm .359$ |
| 7 May | M1/P4            | RC-7 Flash            | $\pm 4.5$         | $\pm .116$ | $\pm .112$         | $\pm .202$ |

A Sample Calculation of Mean Errors in the Position of the RC-7 Flash for 7 May M1/P1 follows.

Coordinates of flash point from triangulation (4.5 (B)):

$$\begin{aligned} X &= 1954.4784 \\ Y &= -488.4736 \\ Z &= 9692.6834 \end{aligned}$$

Coordinates of Cameras:

|     |            |            |
|-----|------------|------------|
|     | P1 C       | P1 D       |
| X = | -1535.0080 | -1533.7141 |
| Y = | -5452.0527 | -5452.1625 |
| Z = | 54.8438    | 40.1300    |

Observation Equations (see coefficients of  $\Delta x$ ,  $\Delta y$ ,  $\Delta z$  in Formulas 48, Reference (12))

| $\Delta x$   | $\Delta y$   | $\Delta z$   | $-\Delta l$ |
|--------------|--------------|--------------|-------------|
| .0000118585  | .0000254378  | -.0000173942 | .00000234   |
| .0000289422  | -.0000155616 | .0000024645  | .00000119   |
| .0000114464  | -.0000227961 | -.0000181662 | -.00000129  |
| -.0000276427 | -.0000147086 | .0000009370  | .00000122   |

Normal Equations:

| $\Delta x$                  | $\Delta y$                  | $\Delta z$                  | L                            |
|-----------------------------|-----------------------------|-----------------------------|------------------------------|
| $1873.4189 \times 10^{-12}$ | $-3.0806 \times 10^{-12}$   | $-511.4360 \times 10^{-12}$ | $-.13700158 \times 10^{-10}$ |
|                             | $1625.2502 \times 10^{-12}$ | $-3.7821 \times 10^{-12}$   | $-.52468625 \times 10^{-10}$ |
|                             |                             | $639.5207 \times 10^{-12}$  | $.19057645 \times 10^{-10}$  |

Inverse of Normal Equations:

|                     |                     |                      |
|---------------------|---------------------|----------------------|
| $68288 \times 10^4$ | $256 \times 10^4$   | $54613 \times 10^4$  |
| $256 \times 10^4$   | $61531 \times 10^4$ | $569 \times 10^4$    |
| $54613 \times 10^4$ | $569 \times 10^4$   | $200045 \times 10^4$ |

$$\Delta_X = -.0009$$

$$\Delta_Y = .0322$$

$$\Delta_Z = -.0303$$

Then, substituting in the observation equations:

$$v'_X = -.00000100$$

$$v'_Y = -.00000164$$

$$v''_X = .00000110$$

$$v''_Y = -.00000170$$

$$\text{and } m = \pm .00000280 = \pm 2.8 \text{ microns}$$

The weighting coefficients from the inverse are

$$\sqrt{q_x} = 26137$$

$$\sqrt{q_y} = 25599$$

$$\sqrt{q_z} = 44726$$

and

$$m_x = \pm .0732 \text{ m}$$

$$m_y = \pm .0717 \text{ m}$$

$$m_z = \pm .1252 \text{ m}$$

Since the geometry of the flashes in relation to the Askania cameras, and the mean errors of the plate measurements for all missions are practically the same, the requirement of determining the space position of the aircraft at the moment of firing and the space position of the burst to  $\pm 2.0$  ft. are satisfied.

## 5. VELOCITY CAMERAS

### 5.1 Projectile Velocity Determination

Four 35mm Robot type cameras (Fig. 12) were used to determine the muzzle velocity of the projectile. These velocity cameras were positioned (Figs. 13 and 14) fore and aft in the nose of the aircraft so as to form two baselines, each approximately 2.5 meters in length. The first pair, cameras Nos. 2 and 3 were so oriented that a picture of the projectile would be taken at time  $t_1$ , soon after leaving the end of the gun barrel. The second pair, cameras Nos. 1 and 4, were so oriented that a second exposure would be taken at time  $t_2$ , a fraction of a second later. The position of the projectile from each set of cameras can be computed<sup>(6)</sup> and since the elapsed time ( $t_2 - t_1$ ) between the exposures can be measured, the velocity of the projectile near the muzzle of the gun can be determined. Scale for the velocity camera system was essentially determined from the coordinates of the control points which were used in establishing the orientations of the velocity cameras. The baseline distances between the four velocity cameras were determined by direct measurements. These distances do not enforce the scale of the velocity camera system but were used to establish the  $X_o$   $Y_o$   $Z_o$  positions of the four cameras. Small deviations of the  $X_o$   $Y_o$   $Z_o$  positions from their true values were compensated for by specific camera orientation parameters  $\alpha$ ,  $\omega$ , and  $\kappa$ .

Two exposures are taken by each camera (Fig. 15). The first exposure was taken over the calibration pit where the relative orientations of the cameras were determined by the use of control points. The second exposure was taken over the range soon after the gun was fired. The small circles (Fig. 15) show the fiducial marks, control points and the projectile that were measured on the 35mm velocity camera film.

### 5.2 Relative Stability of Velocity Cameras

A total of five 35mm Robot type cameras were mounted in the aircraft on an invar system. Camera No. 5 was used to check the stability of the system by photographing a cross mark positioned in a collimated light

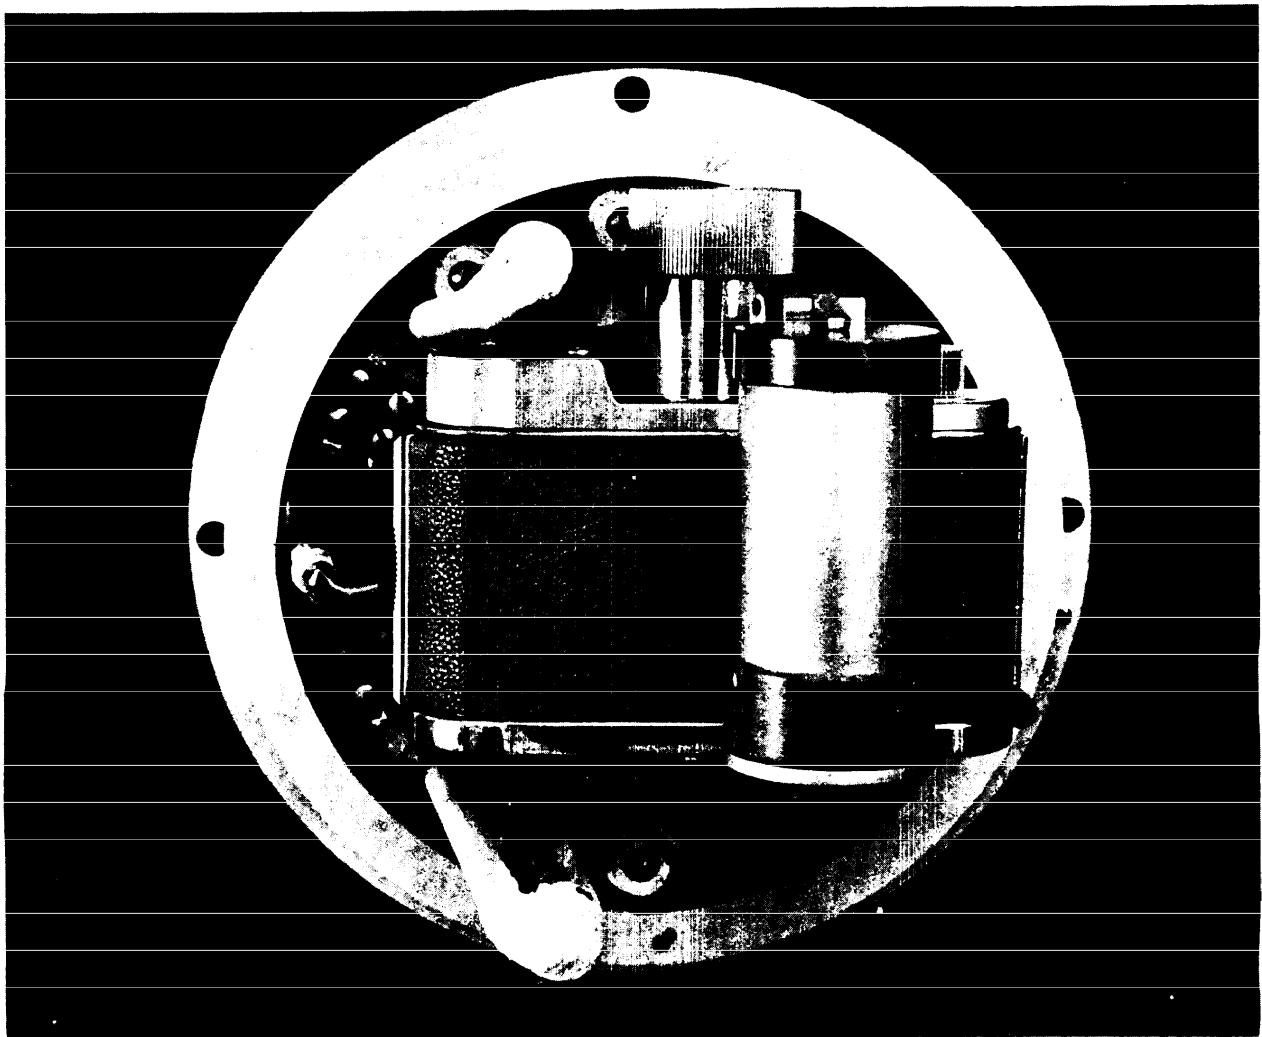


Fig. 12 Front and Rear View of a Velocity Camera



Fig. 13 Forward Velocity Camera Installation, Rear Velocity Camera and RC-7 Camera Installation

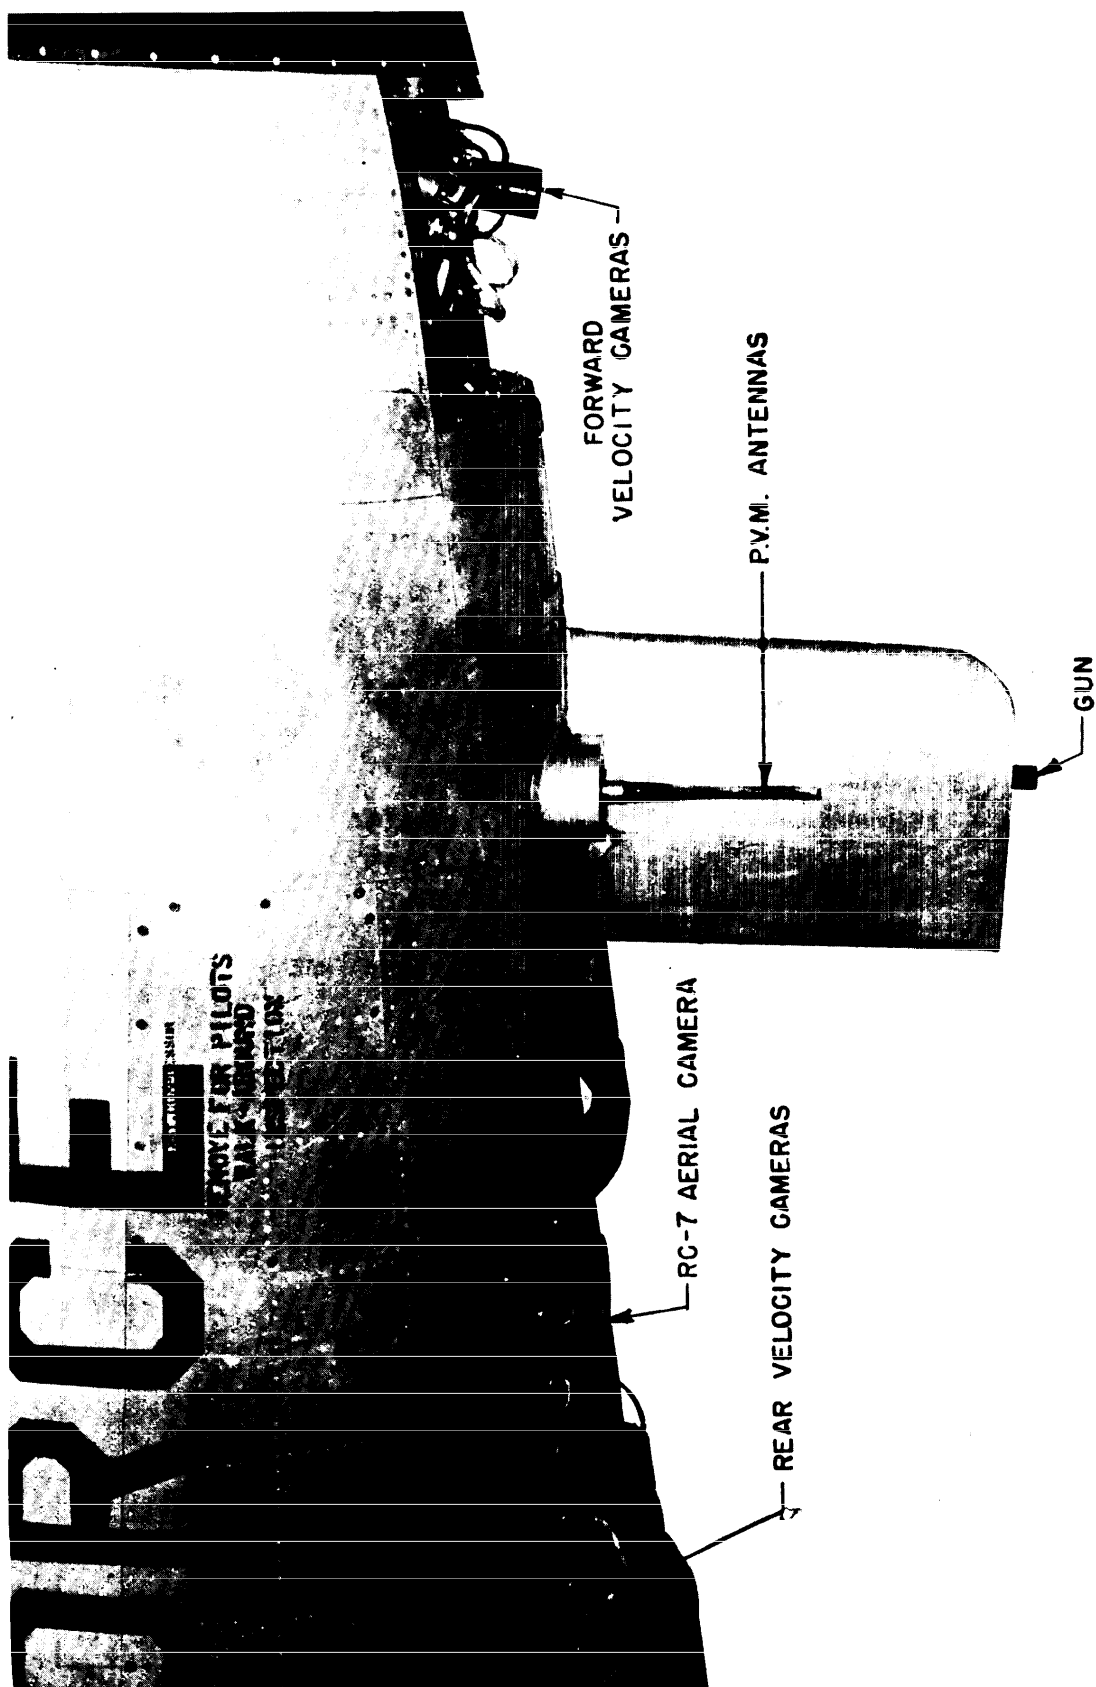


Fig. 14 F-89 Nose Installation

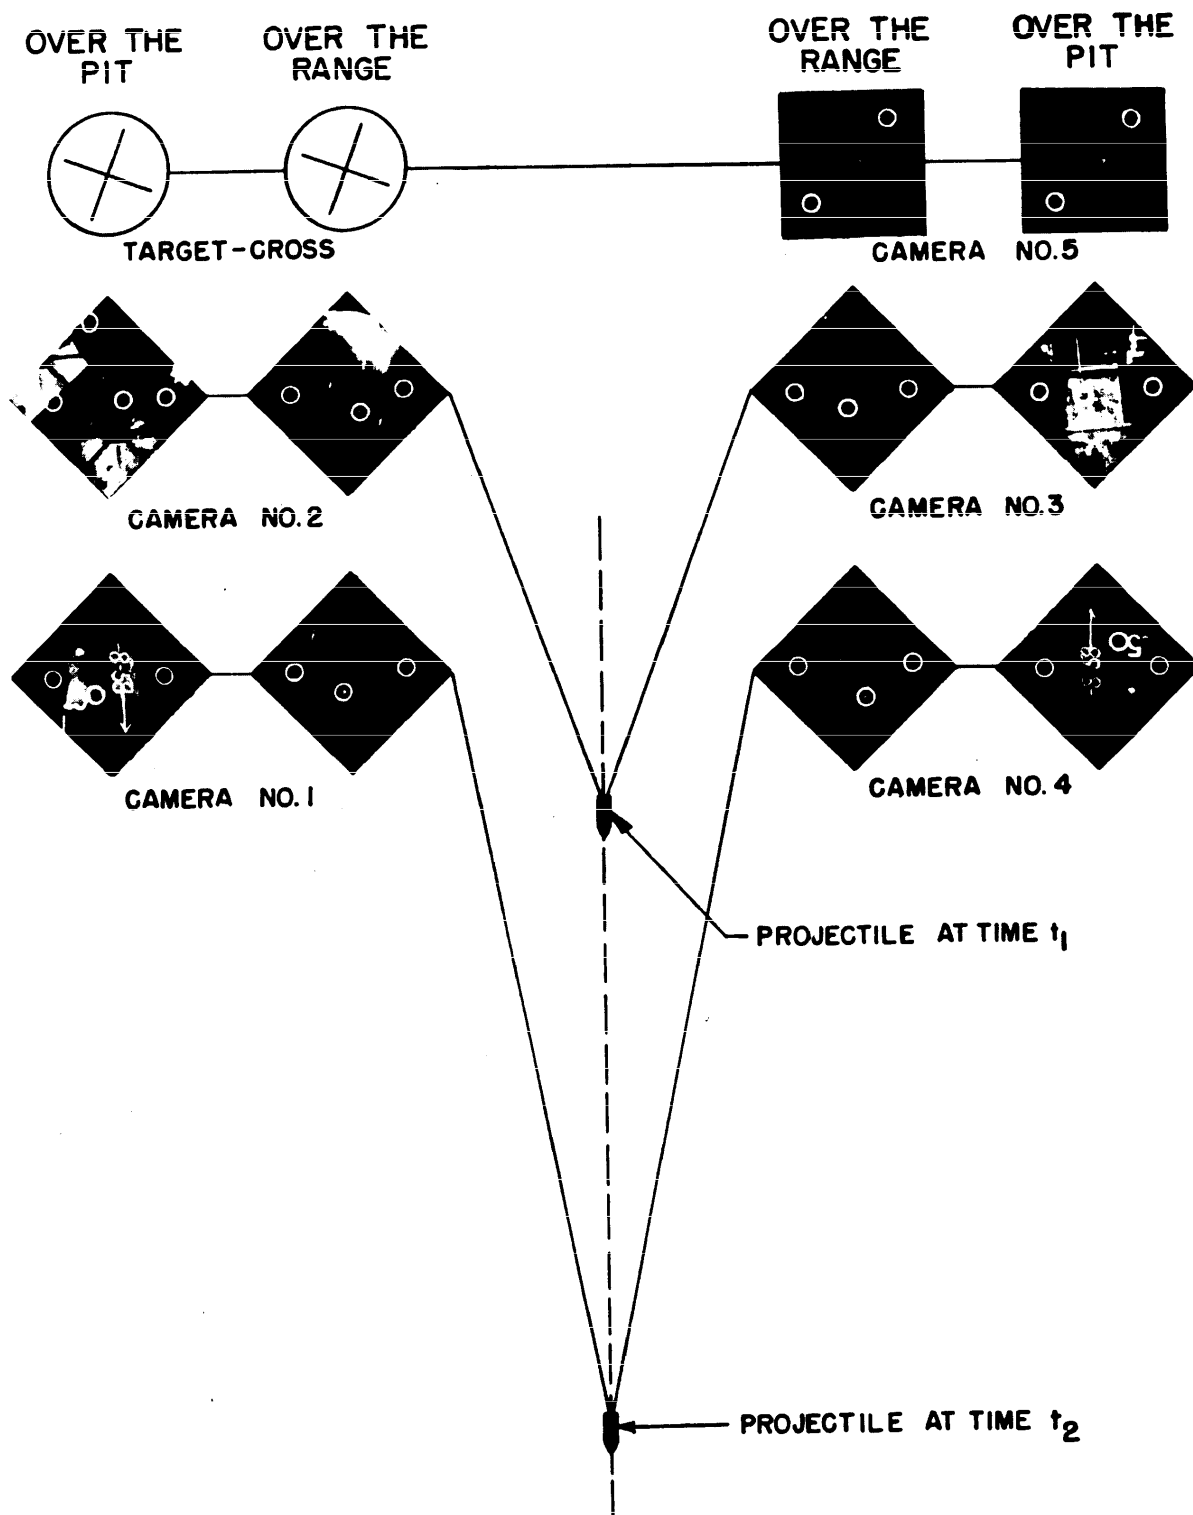


FIG. 15 - VELOCITY CAMERA EXPOSURES OVER CALIBRATION PIT AND RANGE

source. Any rotation in cameras Nos. 3 and 4 relative to cameras Nos. 1 and 2 (Fig. 16) will result in a change of position of the image of the cross relative to the fiducial marks in the two exposures made with camera No. 5.

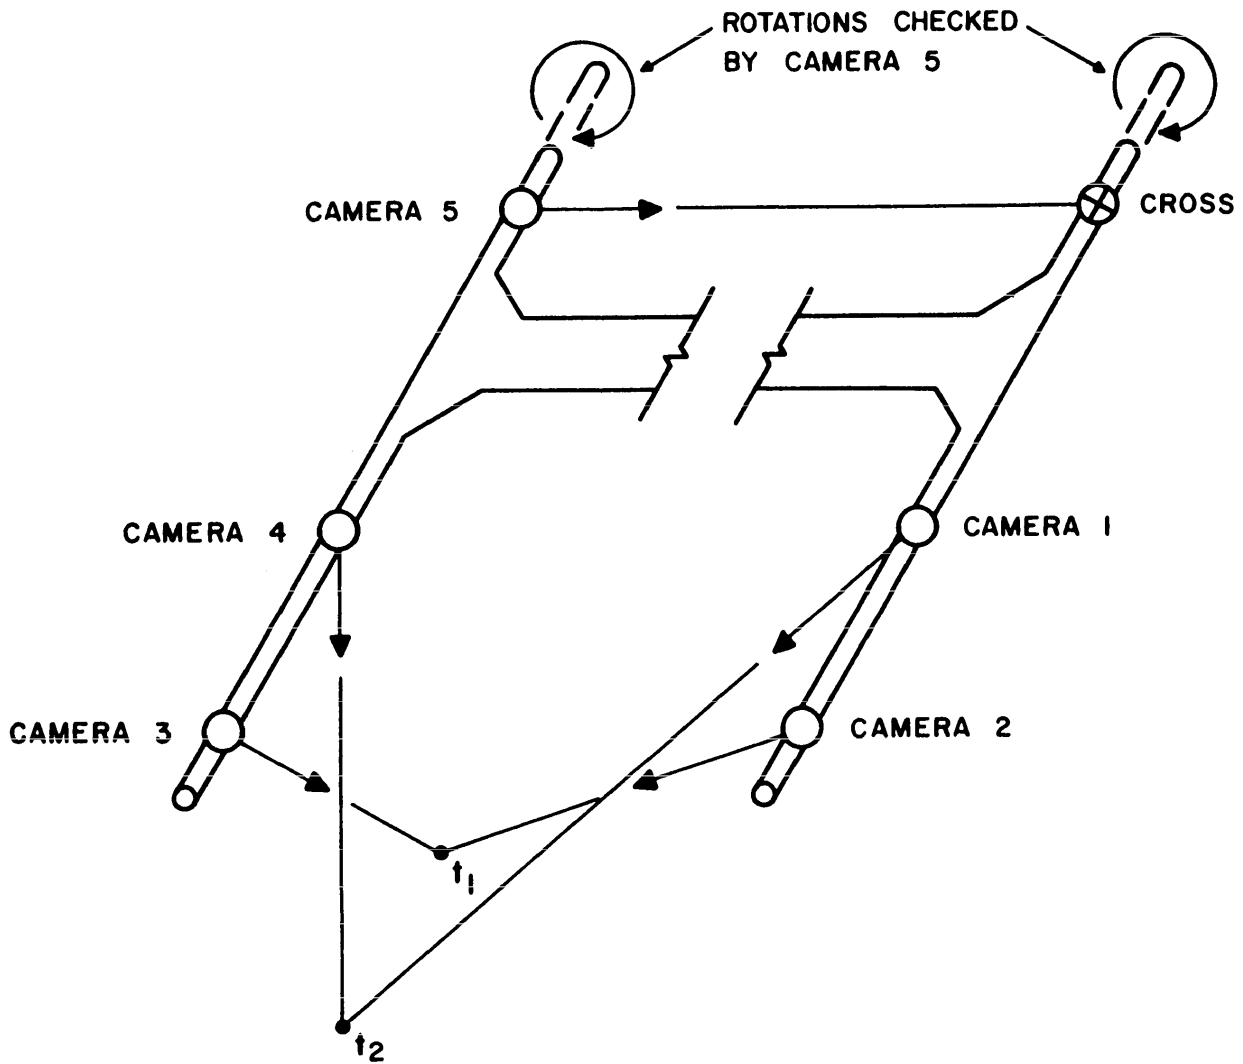


**FIG. 16 - SCHEMATIC OF VELOCITY CAMERAS**

THE SYSTEM PROVIDES FOR A STABILITY CHECK BETWEEN CONDITIONS AT TIMES OF CALIBRATION AND FIRING.

As an example of the method used to compute the relative stability of the velocity camera system, computations for 7 May M1/P1 follow.

CAMERA NO. 5

Film measurements while over the calibration pit:

|                                  | $l_x$ (meters) | $l_y$   |
|----------------------------------|----------------|---------|
| Fiducial Mark No. 1, denoted 001 | .037956        | .023865 |
| Target Cross, denoted 002        | .046259        | .017328 |
| Fiducial Mark No. 2, denoted 003 | .051158        | .010684 |

Film measurements for 7 May M1/P1 firing:

|                                  |         |         |
|----------------------------------|---------|---------|
| Fiducial Mark No. 1, denoted 101 | .061536 | .024516 |
| Target Cross, denoted 102        | .069838 | .017996 |
| Fiducial Mark No. 2, denoted 103 | .074735 | .011368 |

|                                            | $\Delta l_x$ | $\Delta l_y$ | Distance |
|--------------------------------------------|--------------|--------------|----------|
| 003 - 001                                  | .013202      | -.013181     | .0186556 |
| 103 - 101                                  | .013199      | -.013148     | .0186302 |
| Scale factor = $\frac{.0186556}{.0186302}$ | = 1.001363   |              |          |

During Calibration

|                         | $l_x$ (meters) | $l_y$     | Distance |
|-------------------------|----------------|-----------|----------|
| $\frac{003 + 001}{2} =$ | .044557        | .017274   |          |
| 002 =                   | .046259        | .017328   |          |
| difference =            | - .001702      | - .000054 | .0017029 |

During Mission

|                         |           |           |          |
|-------------------------|-----------|-----------|----------|
| $\frac{103 + 101}{2} =$ | .068135   | .017942   |          |
| 102 =                   | .069838   | .017996   |          |
| difference =            | - .001703 | - .000054 | .0017039 |

$.0017039 \times \text{scale factor} = .0017062$   
 distance during calibration =  $\frac{.0017029}{}$   
 difference =  $.0000033$   
 = 3.3 microns

focal length of camera No. 5 = 152, 000 microns

amount system moved in seconds of arc =  $\frac{3.3 \times 206,265}{152,000} = 4.5''$

Distance between Target Cross and Camera No. 5 is approximately 2.3 m.

Amount moved in millimeters =  $\frac{3.3 \times 2,300}{152,000} = .050$

Summary of stability checks:

| <u>Mission</u> | <u>Amount of Movement</u> |          |
|----------------|---------------------------|----------|
| 7 May M1/P1    | 4.5                       | .050mm   |
| 7 May M1/P2    | - 5.7                     | - .064mm |
| 7 May M1/P4    | - 6.2                     | - .069mm |
| 7 May M1/P5    | - 5.8                     | - .065mm |
| 8 May M3/P2    | - 4.3                     | - .048mm |

The above results indicate that the camera orientations as obtained during the calibrations are little affected by any distortion of the invar system.

### 5.3 Calibration of Velocity Cameras

Because of the lack of any control points for the velocity camera orientations at the time of airborne firing, the following method was used.

Before a mission the camera orientations were determined from photographs taken over the calibration pit and were assumed to remain relatively fixed to each other until after the gun was fired.

The film measurements of the projectile from the photographs taken in the air were then evaluated in terms of the calibration parameters observed over the calibration pit. This was accomplished by computing the difference between fiducial marks and projectile from the photograph taken during the firing, applying a scale factor correction for film shrinkage and thus

interpolating the rays of the projectile into the calibration records. Using these reduced projectile film measurements, the coordinates of the projectile were determined.

The positions of the projectile at times  $t_1$  and  $t_2$  are in the calibration pit coordinate system. However, this is of no consequence since only a difference in coordinates of the projectile is required for a velocity computation.

An example of computing the reduced projectile film measurements for Camera No. 1 taken 7 May M1/P1 follows. To simplify the computation, the film when measured on a comparator is lined up so that the x-axis of the comparator will run through both fiducial marks.

7 May M1/P1 Camera No. 1

Film measurements while over the calibration pit:

|                           | $l_x$ (meters) | $l_y$          |
|---------------------------|----------------|----------------|
| Fiducial No. 1 called 001 | .281414        | .300000        |
| Fiducial No. 2 called 003 | <u>.300001</u> | <u>.300000</u> |
| difference                | .018587        | .000000        |

distance between fiducial marks: .018587

Film measurements for 7 May M1/P1 firing:

|                                | $l_x$ (meters) | $l_y$          |
|--------------------------------|----------------|----------------|
| Fiducial mark No. 1 called 101 | .281450        | .300000        |
| Fiducial mark No. 2 called 103 | <u>.300000</u> | <u>.300000</u> |
| difference                     | .018550        | .000000        |

distance between fiducial marks: .018550

$$\text{Scale factor} = \frac{.018587}{.018550} = 1.001995$$

The projectile film measurement from 7 May M1/P1 firing is denoted as 102, and computed projectile measurement reduced to film taken over the calibration pit is denoted as 102'. The film measurements are

|            | $\frac{l_x}{x}$ (meters)                      | $\frac{l_y}{y}$        |
|------------|-----------------------------------------------|------------------------|
| 102        | .289299                                       | .303506                |
| 101        | <u>.281450</u>                                | <u>.300000</u>         |
|            | $\Delta l_x = .007849$                        | $\Delta l_y = .003506$ |
|            | $(\Delta l_x)(\text{scale factor}) = .007865$ |                        |
|            | $(\Delta l_y)(\text{scale factor}) = .003513$ |                        |
| 001        | .281414                                       | .300000                |
| correction | <u>.007865</u>                                | <u>.003513</u>         |
| 102        | .289279                                       | .303513                |

The absolute control points, one situated at the bottom of the calibration pit and the other one on the gun rod, were so arranged that they would be approximately in the same relative position with respect to the velocity cameras at the time of the calibration as the projectile was during the mission. If the control points and the projectile were exactly in the same relative position, any camera orientation obtained from the control points when used to triangulate the position of the projectile would produce coordinates for the projectile equal to the original coordinates of the control points. Inasmuch as the relative position of the control points and projectile are approximately the same, small biases in the individual camera orientation parameters have negligible effects on the position computations of the projectile.

#### 5.4 Scale Factor

A scale factor was used in all velocity camera reductions. It was assumed that the difference in the distances between fiducial marks as measured during the calibration and mission was due to temperature changes in the camera and of the film. It is important to normalize this distance since all velocity camera photographs of the projectile were reduced after being projected onto the photograph taken during the calibration.

## 5.5 Camera Orientation Elements

The camera orientation elements for each velocity camera are  $\alpha, \omega, \kappa$ ,  $X_O, Y_O, Z_O, c, x_p, y_p$ . Six of these nine orientation elements are either known or can be adequately assumed for the velocity cameras, or can be determined by independent measurements.

The three elements of interior orientation  $c, x_p$  and  $y_p$  are

$c$ , the principal distance or focal lengths of the cameras which was given, and

$x_p$  and  $y_p$ , the coordinates of the principal point were assumed to be zero.

The six elements of exterior orientation are  $X_O, Y_O, Z_O$  and  $\alpha, \omega, \kappa$ .

$X_O, Y_O, Z_O$ , the coordinates of the center of projection for each velocity camera were determined by the following method. Distances were measured between the centers of projection of the RC-7 camera and the velocity cameras. The coordinates of the velocity cameras for each calibration could then be determined by algebraically adding these distances to the coordinates of the RC-7 camera as determined over the calibration pit.

$\alpha, \omega, \kappa$ , the three rotational orientation elements, remain to be determined to complete the required nine camera orientation elements.

## 5.6 Methods of Determining the Velocity Camera Orientations

The number of absolute control points necessary for a unique solution, to determine the orientation elements of a single camera is  $n$ , where

$$2n = u$$

$n$  = number of absolute control points

$u$  = number of unknowns

with

$$u = 3 \text{ (the three rotational elements } \alpha, \omega, \kappa \text{ )}$$

$$n = 1 \frac{1}{2}$$

Only one absolute control point is available by which the velocity camera orientations can be determined, point No. 25 for cameras Nos. 1 and 4 and point No. 27 for cameras Nos. 2 and 3. It was therefore necessary to make use of relative control points applying the method of double point resection in space or to reduce the number of unknowns ( $u$ ) by obtaining a value for one of the three rotational elements by some other means.

In the case of cameras Nos. 2 and 3, the value of  $\kappa$  was determined by direct measurement on the film. Since the tilt angle  $\omega$  is small, the value for  $\kappa$  obtained in this manner is sufficiently accurate. Thus the minimum number of absolute control points will now be reduced to one. In this manner all camera orientations for velocity cameras No. 2 or No. 3 were made, following the methods outlined in Reference (4).

In the case of cameras Nos. 1 and 4 it was possible to make use of relative control points. Relative control points are points common to both cameras but whose coordinates are not known. It was not possible to make use of relative control points for cameras Nos. 2 or 3 because no common area was photographed.

All camera orientations for cameras Nos. 1 and 4 were made following the method as outlined in Reference (8) which determined the orientations of the two cameras simultaneously with the coordinates of the relative control points. The six unknowns to be determined for the two cameras are the three rotational angles  $\alpha'$ ,  $\omega'$ , and  $\kappa'$  for camera No. 1 and  $\alpha''$ ,  $\omega''$ , and  $\kappa''$  for camera No. 4. Each point gives rise to 4 equations. Using the absolute control point No. 25 and 3 relative control points, 16 equations for the 15 unknowns of the solution are obtained, constituting a slight over-determination which acted as a check against coarse errors.

#### 5.7 Number of Cameras Required for a Projectile Velocity Determination

It is preferred that all four velocity camera orientations be known in which case the XYZ coordinates of the projectile for times  $t_1$  and  $t_2$  were obtained by triangulation. However, in some cases because of poor quality

images of the projectile, camera malfunction, etc., only three or less of the four camera records were available. Muzzle velocity reductions were not made when less than three camera orientations were available or when camera No. 1 or No. 4 were missing. Any approximate method of solving the position of the projectile when camera No. 1 or No. 4 is missing could be critical because of the weak geometry inherent in the measuring set-up.

#### 5.8 Projectile Determination when Two Camera Orientations are Known

When the projectile is at time  $t_1$  and both camera No. 2 and No. 3 orientations are known, or at time  $t_2$  when both camera No. 1 and No. 4 orientations are known, the projectile position is determined by the methods outlined in Reference (6). For an example of this method see 5.10.

#### 5.9 Projectile Determination when either Camera No. 2 or No. 3 is Missing

When the camera orientation for either camera No. 2 or No. 3 was missing a close approximation to the position of the projectile was obtained by the intersection of the line extending through the gun barrel axis and the projection of the ray from one of the cameras to the projectile onto the plane containing the gun barrel axis and the center of projection of that camera. Thus the position of the projectile at time  $t_1$  was determined by the intersection of the two corresponding lines. For an example of this method see 5.11.

#### 5.10 Computations of the Coordinates of the Projectile by Triangulation from Two Known Camera Orientations

In this example the orientations of cameras Nos. 1 and 4 were determined by using one absolute and three relative control points. This example is for 7 May M1/P1.

The approximation values for  $\alpha$ ,  $\omega$ ,  $\kappa$ , were taken from a similar solution for another date. It would have been possible to use approximation values obtained from the geometry of the physical set-up of the cameras in which case several iterations would be required before the corrections to the approximations remained sufficiently unchanged. In this example no iterations were required.

The values for the center of projection of the velocity cameras were determined as follows:

The RC-7 camera center of projection values as determined over the calibration pit for the 7 May M1/P1 are (Table 15)

$$X_o = 96.4368 \text{ m} \quad Y_o = 96.7051 \text{ m} \quad Z_o = 5.6684 \text{ m}$$

The measured distances between the RC-7 and velocity cameras Nos. 1 and 4 are

|              |                      |                      |                      |
|--------------|----------------------|----------------------|----------------------|
| Camera No. 1 | $\Delta X = 1.8054$  | $\Delta Y = -0.1100$ | $\Delta Z = 0.1968$  |
| Camera No. 4 | $\Delta X = -0.5135$ | $\Delta Y = -0.0900$ | $\Delta Z = -0.0117$ |

Applying these distances to the RC-7 values the centers of projection for the two velocity cameras are

|              |                 |                 |                |
|--------------|-----------------|-----------------|----------------|
| Camera No. 1 | $X_o = 98.2422$ | $Y_o = 96.5951$ | $Z_o = 5.8652$ |
| Camera No. 4 | $X_o = 95.9233$ | $Y_o = 96.6151$ | $Z_o = 5.6567$ |

The approximation values, coordinates of the cameras and elements of inner orientations are as follows:

|            | Camera No. 1               | Camera No. 4               |
|------------|----------------------------|----------------------------|
| $\alpha^o$ | $= 188^o 51' 32.98''$      | $= 163^o 33' 14.83''$      |
| $\omega^o$ | $= 00 32 26.87$            | $= 00 07 33.53$            |
| $\kappa^o$ | $= 88 25 10.77$            | $= 272 28 02.68$           |
| $X_o$      | $= 98.2416 \text{ meters}$ | $= 95.9227 \text{ meters}$ |
| $Y_o$      | $= 96.5960$                | $= 96.6160$                |
| $Z_o$      | $= 5.8652$                 | $= 5.6567$                 |
| $c$        | $= .152$                   | $= .152$                   |
| $x_p$      | $= .290708$                | $= .390665$                |
| $y_p$      | $= .300000$                | $= .400000$                |

The coordinates of the absolute control point are (see Point No. 25, Table 1)

$$\begin{aligned} X &= 97.5122 \\ Y &= 96.7380 \\ Z &= 0.6968 \end{aligned}$$

The plate measurements for the control points, both absolute and relative are

|                 | <u>Camera No. 1</u> |         | <u>Camera No. 4</u> |         |
|-----------------|---------------------|---------|---------------------|---------|
|                 | $l_x$               | $l_y$   | $l_x$               | $l_y$   |
| abs. pt. No. 25 | .287590             | .302364 | .394455             | .396618 |
| rel. pt. No. 4  | .291942             | .304349 | .390202             | .395147 |
| rel. pt. No. 5  | .291666             | .294791 | .389879             | .404392 |
| rel. pt. No. 6  | .292120             | .309032 | .390337             | .390668 |

The direction cosines from formulas (13) of Reference (8) are

|                                                                        | <u>Camera No. 1</u> | <u>Camera No. 4</u> |
|------------------------------------------------------------------------|---------------------|---------------------|
| $A_1 = -\cos \alpha \cos \kappa + \sin \alpha \sin \omega \sin \kappa$ | .02579661           | .04066790           |
| $B_1 = -\cos \omega \sin \kappa$                                       | -.99957511          | .99907045           |
| $C_1 = \sin \alpha \cos \kappa + \cos \alpha \sin \omega \sin \kappa$  | -.01356968          | .01429505           |
| $A_2 = -\cos \alpha \sin \kappa - \sin \alpha \sin \omega \cos \kappa$ | .98773415           | -.95887158          |
| $B_2 = \cos \omega \cos \kappa$                                        | .02757744           | .04305104           |
| $C_2 = \sin \alpha \sin \kappa - \cos \alpha \sin \omega \cos \kappa$  | -.15369038          | -.28293786          |
| $D = \sin \alpha \cos \omega$                                          | -.15399929          | .28310886           |
| $E = \sin \omega$                                                      | .00943855           | .00219877           |
| $F = \cos \alpha \cos \omega$                                          | -.98802587          | -.95908526          |

The approximation values for the three relative points, computed by formulas (56) and (57) of Reference (8) are

| <u>Point No.</u> | <u>X</u> | <u>Y</u> | <u>Z</u> |
|------------------|----------|----------|----------|
| 4                | 97.5806  | 96.6048  | +0.6366  |
| 5                | 97.2454  | 96.6065  | +0.6452  |
| 6                | 97.7442  | 96.6029  | +0.6413  |

The coefficients of the observation equations are given by formulas (40) and (41) of Reference (8). The observation equations are

OBSERVATION EQUATIONS

| Pt. No. | $\frac{\partial F}{\partial X} \Delta X_4$ | $+$ | $\frac{\partial F}{\partial Y} \Delta Y_4$ | $+$ | $\frac{\partial F}{\partial Z} \Delta Z_4$ | $+$ | $\frac{\partial F}{\partial X} \Delta X_5$ | $+$ | $\frac{\partial F}{\partial Y} \Delta Y_5$ | $+$ | $\frac{\partial F}{\partial Z} \Delta Z_5$ | $+$ | $\frac{\partial F}{\partial X} \Delta X_6$ | $+$ | $\frac{\partial F}{\partial Y} \Delta Y_6$ | $+$ | $\frac{\partial F}{\partial Z} \Delta Z_6$ |
|---------|--------------------------------------------|-----|--------------------------------------------|-----|--------------------------------------------|-----|--------------------------------------------|-----|--------------------------------------------|-----|--------------------------------------------|-----|--------------------------------------------|-----|--------------------------------------------|-----|--------------------------------------------|
| 25      | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |
| 25      | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |
| 25      | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |
| 25      | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |
| 4       | +0.0078                                    |     | -.02884                                    |     | -.00015                                    |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |
| 4       | +0.028626                                  |     | +0.00079                                   |     | -.00362                                    |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |
| 4       | +0.00119                                   |     | +0.02874                                   |     | +0.00033                                   |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |
| 4       | -.02732                                    |     | +0.00124                                   |     | -.00902                                    |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |
| 5       | 0                                          |     | 0                                          |     | 0                                          |     | +0.00077                                   |     | -.02861                                    |     | -.00021                                    |     | 0                                          |     | 0                                          |     | 0                                          |
| 5       | 0                                          |     | 0                                          |     | 0                                          |     | +0.02812                                   |     | +0.00080                                   |     | -.00537                                    |     | 0                                          |     | 0                                          |     | 0                                          |
| 5       | 0                                          |     | 0                                          |     | 0                                          |     | +0.00124                                   |     | +0.02931                                   |     | +0.00028                                   |     | 0                                          |     | 0                                          |     | 0                                          |
| 5       | 0                                          |     | 0                                          |     | 0                                          |     | -.02837                                    |     | +0.00126                                   |     | -.00749                                    |     | 0                                          |     | 0                                          |     | 0                                          |
| 6       | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | +0.00079                                   |     | -.02901                                    |     | -.00012                                    |
| 6       | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | +0.02893                                   |     | +0.00078                                   |     | -.00276                                    |
| 6       | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | +0.00118                                   |     | +0.02851                                   |     | +0.00036                                   |
| 6       | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | 0                                          |     | -.02687                                    |     | +0.00123                                   |     | -.00976                                    |

## OBSERVATIONS EQUATIONS

| Pt. No. | $+\frac{\partial F}{\partial \alpha}, \Delta \alpha'$ | $+\frac{\partial F}{\partial \omega}, \Delta \omega'$ | $+\frac{\partial F}{\partial \kappa}, \Delta \kappa'$ | $+\frac{\partial F}{\partial \alpha}, \Delta \alpha''$ | $+\frac{\partial F}{\partial \omega}, \Delta \omega''$ | $+\frac{\partial F}{\partial \kappa}, \Delta \kappa''$ | $-\Delta l = 0$ |
|---------|-------------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------|--------------------------------------------------------|--------------------------------------------------------|--------------------------------------------------------|-----------------|
| 25      | +0.00413                                              | +1.15199                                              | -0.00225                                              | 0                                                      | 0                                                      | 0                                                      | +0.00045269 = 0 |
| 25      | +1.15194                                              | -0.00423                                              | -0.00267                                              | 0                                                      | 0                                                      | 0                                                      | -0.00011533 = 0 |
| 25      | 0                                                     | 0                                                     | 0                                                     | +0.00663                                               | -1.15193                                               | +0.00335                                               | +0.00038921 = 0 |
| 25      | 0                                                     | 0                                                     | 0                                                     | -1.15193                                               | -0.00647                                               | +0.00340                                               | +0.00002716 = 0 |
| 4       | +0.00419                                              | +1.15195                                              | -0.00434                                              | 0                                                      | 0                                                      | 0                                                      | +0.00004097 = 0 |
| 4       | +1.15207                                              | -0.00416                                              | +0.00127                                              | 0                                                      | 0                                                      | 0                                                      | -0.00001034 = 0 |
| 4       | 0                                                     | 0                                                     | 0                                                     | +0.00654                                               | -1.15186                                               | +0.00487                                               | +0.00004145 = 0 |
| 4       | 0                                                     | 0                                                     | 0                                                     | -1.15201                                               | -0.00656                                               | -0.00042                                               | -0.00001447 = 0 |
| 5       | +0.00421                                              | +1.15195                                              | +0.00521                                              | 0                                                      | 0                                                      | 0                                                      | +0.00000717 = 0 |
| 5       | +1.15212                                              | -0.00423                                              | +0.00097                                              | 0                                                      | 0                                                      | 0                                                      | +0.00000043 = 0 |
| 5       | 0                                                     | 0                                                     | 0                                                     | +0.00656                                               | -1.15186                                               | -0.00440                                               | +0.00000954 = 0 |
| 5       | 0                                                     | 0                                                     | 0                                                     | -1.15199                                               | -0.00652                                               | -0.00078                                               | +0.00000448 = 0 |
| 6       | +0.00419                                              | +1.15195                                              | -0.00903                                              | 0                                                      | 0                                                      | 0                                                      | +0.00004596 = 0 |
| 6       | +1.15249                                              | -0.00412                                              | +0.00146                                              | 0                                                      | 0                                                      | 0                                                      | -0.00000196 = 0 |
| 6       | 0                                                     | 0                                                     | 0                                                     | +0.00654                                               | -1.15186                                               | +0.00935                                               | +0.00004739 = 0 |
| 6       | 0                                                     | 0                                                     | 0                                                     | -1.15243                                               | -0.00659                                               | -0.00028                                               | -0.00001482 = 0 |

The solution of the normal equations formed from these observation equations yielded the following values:

$$\begin{aligned}
 \Delta X_4 &= -0.0022 \\
 \Delta Y_4 &= -0.0142 \\
 \Delta Z_4 &= +0.0046 \\
 \Delta X_5 &= -0.0018 \\
 \Delta Y_5 &= -0.0165 \\
 \Delta Z_5 &= +0.0071 \\
 \Delta X_6 &= -0.0026 \\
 \Delta Y_6 &= -0.0132 \\
 \Delta Z_6 &= +0.0052 \\
 \Delta \alpha' &= +0.0006131 \text{ rad.} = +02' 06''.47 \\
 \Delta \omega' &= -0.00304264 \text{ rad.} = -10' 27.59'' \\
 \Delta \kappa' &= -0.00347670 \text{ rad.} = -11' 57.12'' \\
 \Delta \alpha'' &= +0.00006063 \text{ rad.} = +00' 12.51'' \\
 \Delta \omega'' &= -0.00279898 \text{ rad.} = -09' 37.33'' \\
 \Delta \kappa'' &= -0.01068718 \text{ rad.} = -36' 44.39''
 \end{aligned}$$

Due to the relatively small  $\Delta$  corrections, one iteration cycle was considered sufficient.

Adding these values to the approximation values, the following elements for the relative orientation are

|                            | Camera No. 1            | Camera No. 4            |
|----------------------------|-------------------------|-------------------------|
| $\alpha^0 + \Delta \alpha$ | $188^\circ 53' 39.45''$ | $163^\circ 33' 27.34''$ |
| $\omega^0 + \Delta \omega$ | $00' 21' 59.28''$       | $-00' 02' 03.80''$      |
| $\kappa^0 + \Delta \kappa$ | $88' 13' 13.65''$       | $271' 51' 18.31''$      |
| $c$                        | .152                    | .152                    |
| $x_p$                      | .290708                 | .390665                 |
| $y_p$                      | .300000                 | .400000                 |

Using this relative orientation and the measured coordinates of the projectile the azimuth and depression angles of the projectile at each of the two cameras was computed. Introducing the standard coordinates of the projectile, the coordinates at unit distance from the point of projection are

$$\xi = \frac{(-1)u}{w}$$

$$\eta = \frac{(-1)v}{w}$$

From the relative orientation by means of formulas (9), Reference (12) the constants are

|                | <u>Camera No. 1</u> | <u>Camera No. 4</u> |
|----------------|---------------------|---------------------|
| A <sub>1</sub> | .02969203           | .03121765           |
| B <sub>1</sub> | -.99949726          | .99947572           |
| C <sub>1</sub> | -.01111736          | .00858750           |
| A <sub>2</sub> | .98752949           | -.95859658          |
| B <sub>2</sub> | .03105323           | .03237169           |
| C <sub>2</sub> | -.15434116          | -.28292167          |
| D              | -.15460880          | .28305133           |
| E              | .00639601           | -.00060020          |
| F              | -.98795506          | -.95910458          |

The quantities u, v and w are computed by means of formulas (11), Reference (12) making use of the plate measurements of the projectile:

|                | <u>Camera No. 1</u> | <u>Camera No. 4</u> |
|----------------|---------------------|---------------------|
| l <sub>x</sub> | .289279             | .392547             |
| l <sub>y</sub> | .303513             | .404200             |
| u              | -.02005874          | .03907040           |
| v              | .00248158           | .00191169           |
| w              | -.15069795          | -.14695248          |

From these values, the standard coordinates of the projectiles are

|        | <u>Camera No. 1</u> | <u>Camera No. 4</u> |
|--------|---------------------|---------------------|
| $\xi$  | -.13320758          | .26576969           |
| $\eta$ | .01665319           | .01310419           |


Then, the azimuth angle K (measured from +X clockwise) is  $\tan^{-1} \eta/\xi$  and the depression angle  $\epsilon$ , is  $\cot^{-1} \sqrt{\xi^2 + \eta^2}$ . Their values are as follows:

|                 | Camera No. 1              | Camera No. 4             |
|-----------------|---------------------------|--------------------------|
| $\tan K$        | -.12501681                | .04930658                |
| $K$             | $172^{\circ} 52' 26''.53$ | $2^{\circ} 49' 21''.98$  |
| $\cot \epsilon$ | .13424451                 | .26609256                |
| $\epsilon$      | $82^{\circ} 21' 14''.64$  | $75^{\circ} 05' 57''.47$ |

The intersection of these 2 rays is found by a least squares adjustment as outlined in Reference (6). From the XYZ coordinates of the cameras, the azimuth of the base line is determined. It is  $179^{\circ} 30' 21''.06$  and the angles between the ray and the base line at each of the cameras is as follows:

$$\begin{aligned} \text{At camera No. 1:} \quad & 179^{\circ} 30' 21''.06 - K = 6^{\circ} 37' 54''.53 \\ \text{At camera No. 4:} \quad & 00 \ 29 \ 38.94 + K = 3 \ 19 \ 00.92 \end{aligned}$$

From the following diagram, it can be seen that  $\alpha_a$  is the angle at camera No. 4 and  $\alpha_b$  at camera No. 1.

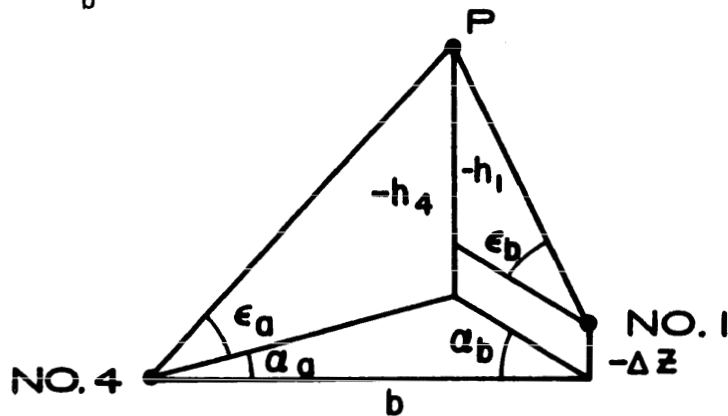

Hence

$$\begin{aligned} \alpha_a &= 3^{\circ} 19' 00''.92 \\ \epsilon_a &= 75 \ 05 \ 57.47 \\ \alpha_b &= 6 \ 37 \ 54.53 \\ \epsilon_b &= 82 \ 21 \ 14.64 \\ \alpha_a + \alpha_b &= 9 \ 56 \ 55.45 \end{aligned}$$

|                              |               |                              |            |
|------------------------------|---------------|------------------------------|------------|
| $\sin \alpha_a$              | $= .05785888$ | $\cos \alpha_a$              | $= .99832$ |
| $\sin \alpha_b$              | $= .11548871$ | $\cos \alpha_b$              | $= .99331$ |
| $\sin (\alpha_a + \alpha_b)$ | $= .17276698$ | $\cos (\alpha_a + \alpha_b)$ | $= .98496$ |
| $\tan \epsilon_a$            | $= 3.7580908$ | $\cos \epsilon_a$            | $= .25742$ |
| $\tan \epsilon_b$            | $= 7.4490928$ | $\cos \epsilon_b$            | $= .13305$ |
| $a$                          | $= .08990944$ |                              |            |

and from p. 8 Reference (6)

$$d = \sin \alpha_b \tan \epsilon_a - \sin \alpha_a \tan \epsilon_b + a \sin (\alpha_a + \alpha_b)$$

$$d = .01855427 \quad d' = \frac{a}{\rho} \cdot d = (206265)(.01855427)$$

The coefficients of the condition equation (3) p. 8 Reference (6) are

$$a_1 = - [\cos \alpha_a \tan \epsilon_b - a \cos (\alpha_a + \alpha_b)] = -7.3480$$

$$a_2 = [\cos \alpha_b \tan \epsilon_a + a \cos (\alpha_a + \alpha_b)] = 3.8215$$

$$a_3 = \sin \alpha_b \sec^2 \epsilon_a = 1.7430$$

$$a_4 = - \sin \alpha_a \sec^2 \epsilon_b = -3.2689$$

and equation (3) becomes

$$-7.3480 v\alpha_a + 3.8215 v\alpha_b + 1.7430 v\epsilon_a - 3.2689 v\epsilon_b + 3827.0965 = 0$$

The corrections  $v\alpha_a$ ,  $v\alpha_b$ ,  $v\epsilon_a$ ,  $v\epsilon_b$ , are computed by means of equations (5) Reference (6) where  $K = - \frac{d'}{[aa]}$

$$K = -39.7957, \text{ where } [aa] = 82.2580$$

$$a_1 K = v\alpha_a = 5' 41.61''$$

$$a_2 K = v\alpha_b = -2' 57.66''$$

$$a_3 K = v\epsilon_a = -1' 21.03''$$

$$a_4 K = v\epsilon_b = 2' 31.97''$$

Formulas (5) p. 10 Reference (6)

Adding these corrections to the angles:

$$\alpha_a + v\alpha_a = 3^\circ 24' 42.53''$$

$$\alpha_b + v\alpha_b = 6 \quad 34 \quad 56.87$$

$$\epsilon_a + v\epsilon_a = 75 \quad 04 \quad 36.44$$

$$\epsilon_b + v\epsilon_b = 82 \quad 23 \quad 46.61$$

$$\text{and } \alpha_a + v\alpha_a + \alpha_b + v\alpha_b = 9^\circ 53' 34.19''$$

From the formulas on p. 7 Reference (6) and the figure, it follows that

$$Z = - \frac{b \sin \alpha_b \tan \epsilon_a}{\sin (\alpha_a + \alpha_b)} + Z_4 = - \frac{b \sin \alpha_a \tan \epsilon_b}{\sin (\alpha_a + \alpha_b)} + Z_1$$

where  $b = 2.3190 \text{ m}$

and

$$\begin{aligned} \sin \alpha_a &= .05951221 & Z_4 &= 5.6567 \\ \sin \alpha_b &= .11463311 & Z_1 &= 5.8652 \\ \tan \epsilon_a &= 3.7521585 \\ \tan \epsilon_b &= 7.4909419 \\ \sin (\alpha_a + \alpha_b) &= .17354982 \end{aligned}$$

Hence

$$\begin{aligned} Z_a &= -0.0905 \\ Z_b &= -0.0916 \end{aligned}$$

To find the X and Y coordinates of the projectile, the corrected base line angles are converted back into azimuth angles:

| <u>Camera No. 1</u>     | <u>Camera No. 2</u>   |
|-------------------------|-----------------------|
| $172^\circ 55' 24.19''$ | $2^\circ 55' 03.59''$ |

Then for Camera No. 1:

$$X = \frac{b \sin \alpha_a}{\sin (\alpha_a + \alpha_b)} \cos K + X_1$$

$$Y = \frac{b \sin \alpha_a}{\sin (\alpha_a + \alpha_b)} \sin K + Y_1$$

and similarly, for Camera No. 4:

$$X = \frac{b \sin \alpha_b}{\sin (\alpha_a + \alpha_b)} \cos K + X_4$$

$$Y = \frac{b \sin \alpha_b}{\sin (\alpha_a + \alpha_b)} \sin K + Y_4$$

where

$$\frac{b \sin \alpha_b}{\sin (\alpha_a + \alpha_b)} = 0.7952$$

$$\frac{b \sin \alpha_a}{\sin (\alpha_a + \alpha_b)} = 1.5317$$

Then

$$\sin K_1 = .12319643$$

$$\cos K_1 = -.99238230$$

$$\sin K_4 = .05090084$$

$$\cos K_4 = .99873712$$

$$X_1 = 98.2422$$

$$Y_1 = 96.5951$$

$$X_4 = 95.9233$$

$$Y_4 = 96.6151$$

with the result that

$$X_a = 97.4531 \text{ m} \qquad X_b = 97.4531 \text{ m}$$

$$Y_a = 96.6931 \text{ m} \qquad Y_b = 96.6931 \text{ m}$$

### 5.11 Computations of the Coordinates of the Projectile When One of the Two-Camera Orientations is Missing

In this example the orientation of camera No. 3 was missing. It was possible however to determine an approximation to the coordinates of the projectile by using the methods outlined under 5.9. The following example is for 7 May M1/P1.

The coordinates of points Nos. 26 and 27, which simulate the gun axis, and of camera No. 2 are

|                | <u>X</u> | <u>Y</u> | <u>Z</u> |
|----------------|----------|----------|----------|
| Camera No. 2   | 98.2645  | 96.7760  | 5.8525   |
| Control Pt. 26 | 97.3642  | 96.6982  | 5.0360   |
| Control Pt. 27 | 97.3795  | 96.7016  | 4.1840   |

The equation of a plane containing these three points is

$$.06906X - .77955Y - .00187Z + 68.6665 = 0 \quad (1)$$

The equation of a line through points Nos. 26 and 27 in the two point form is

$$\frac{X - 97.3642}{0.0153} = \frac{Y - 96.6982}{0.0034} = \frac{Z - 5.0360}{-0.8526} \quad (2)$$

The direction of the ray from the camera to the projectile was determined from the camera data. Since there is only one control point it was necessary to find the value of  $\kappa$  by direct measurement on the film.  $\kappa$  was found to be 54.7 grad.

From the single camera orientation program, the values of  $\alpha$  and  $\omega$  were

$$\begin{aligned} \alpha &= 231.04310 \text{ grad} &= 207^{\circ} 56' 19.64'' \\ \omega &= -.00288388 \text{ grad} &= -00^{\circ} 00' 09.34'' \end{aligned}$$

where

$$\begin{aligned}\kappa &= 54.7 \text{ grad} = 49^{\circ} 13' 48.00'' \\ c &= .050 \\ x_p &= .047612 \\ y_p &= .075485\end{aligned}$$

Knowing the coordinates of two points on the ray to the projectile,

the equation of a plane containing these two points and being perpendicular to the plane defined by equation (1) may be written. These two equations define a line which is the projection of the ray on the plane containing

the camera and the two points on the line through the gun. The intersection of the two lines will give the coordinates of the projectile. Knowing the coordinates of one point on the ray, i.e., the coordinates of the camera

and taking an arbitrary value of  $Z$ , by means of formulas (11) and (12) of Reference (10) the coordinates of another point on this ray may be found. From the orientations, the constants of formulas (9), Reference (12) are

$$\begin{aligned}A_1 &= .57692936 \\ B_1 &= -.75733708 \\ C_1 &= -.30592981 \\ A_2 &= .66905456 \\ B_2 &= .65302415 \\ C_2 &= -.35485976 \\ D_1 &= -.46852801 \\ E_1 &= -.00004528 \\ F_1 &= -.88344864\end{aligned}$$

The plate measurements of the projectile are

$$\begin{aligned}l_x &= .050649 \\ l_y &= .075683\end{aligned}$$

Then, from formulas (11) of Reference (12)

$$\begin{aligned}u &= -.02154179 \\ v &= -.00217300 \\ w &= -.04517180\end{aligned}$$

Letting  $Z = 3$ , from formulas (12) of Reference (12)  
 $(z) = 3 - 5.8525 = -2.8525$  and

$$X = \frac{(Z)u}{w} + X_0 = 96.9042$$

$$Y = \frac{(Z)v}{w} + Y_0 = 96.6388$$

Combining the coordinates of the two points on the ray and the condition of perpendicularity to the plane defined by equation (1) the equation of the plane through the ray is

$$2.22341X + 0.19953Y - 1.069908Z - 231.53072 = 0 \quad (3)$$

eliminating  $Y$  from the equations (1) and (3)

$$2.24109X - 1.07038Z = 213.95516$$

and from (2)

$$.8520X + 0.0153Z = 83.03135$$

$$X = 97.3827$$

$$Z = 4.0063$$

Then from (2)

$$Y = 96.7023$$

As a check, these coordinates were substituted in all three equations and the equations were satisfied within the limits of the accuracy of the computations.

#### 5.12 Computations of the Projectile Velocity. (7 May M1/P1)

Coordinates of projectile at time  $t_2$ , computed from cameras Nos. 1 and 4 are

$$X = 97.4531$$

$$Y = 96.6931$$

$$Z = -0.0910$$

Coordinates of projectile at  $t_1$ , computed from camera No. 2 (camera No. 3 missing) are

$$\begin{aligned} X &= 97.3827 \\ Y &= 96.7023 \\ Z &= 4.0063 \end{aligned}$$

The distance between the projectile time at  $t_1$  and  $t_2$  is

$$\sqrt{\Delta X^2 + \Delta Y^2 + \Delta Z^2} = 4.0979 \text{ m}$$

The projectile velocity will then be

$$\frac{4.0979}{.004194} = 977.1 \text{ m/sec.} = 3205 \text{ ft/sec.}$$

A tabulation (Table 28) of all projectile velocities that could be reduced by the velocity cameras is listed. Also listed are the values obtained by the PVM system.

### 5.13 Discussion of Projectile Velocity Results

During the planning stages of the project it was decided that projectile velocities would be determined by the electronic PVM method and checked by an optical method (Velocity Cameras).

It is believed that results obtained optically, while having a larger spread are closer to the true projectile velocity, whereas results by the electronic method are in themselves more consistent, but possess a constant or bias error. This conclusion was based on tests of the PVM system made at the Aberdeen Proving Ground. In these tests, comparisons between an optical and PVM system were made using a ground-based optical system which was accurately controlled. The results of 20 simultaneous observations showed a 4 ft/sec  $\pm$  1 ft/sec smaller velocity for the PVM system over the 2580 to 2640 ft/sec velocity range.

During the four airborne observations at EAFB a comparison of the two systems resulted in a 17.5 ft/sec  $\pm$  3.5 ft/sec smaller velocity for the PVM system in the 3050 to 3200 ft/sec range. It should be noted that this result was obtained from a small sample.

PVM projectile velocity data were transmitted by radio to the ground stations where they were recorded. In cases where the aircraft was not vertically above the recording stations at the moment of firing, a data error could exist due to a secondary Doppler effect resulting from motion of the aircraft. However, because of the relatively small aircraft velocity, this error proved to be negligible.

Assuming the PVM method to be good except for a constant error, the mean error of a single determination by the optical method may be computed.

| Date      | Difference<br>(Opt.-PVM) | Difference $\epsilon$<br>(Opt.-PVM)<br>(17.5 bias removed) |
|-----------|--------------------------|------------------------------------------------------------|
| 7 May 1/1 | + 16 ft/sec              | -1.5 ft/sec                                                |
| 7 May 1/2 | + 10                     | -7.5                                                       |
| 7 May 1/5 | + 27                     | +9.5                                                       |
| 8 May 3/2 | + 17                     | -0.5                                                       |

$$\text{Mean} = +17.5 \text{ ft/sec} \pm 3.5 \text{ ft/sec}$$

The mean error of a single difference is approximately  $\pm 2 \text{ m/sec}$ , which, using an average time of .0042 seconds between times  $t_1$  and  $t_2$ , amounts to an error in distance of 8mm.

In regard to the optical method, three factors that could contribute to this 8mm value are

(1) An incorrect time difference  $\Delta t$  between the two micro-flashes of approximately 9 micro-seconds, the approximate projectile velocity being 950m/sec.

Checks made at Aberdeen Proving Ground, Maryland showed  $\Delta t$  to be accurate to  $1.2 \pm 0.5$  micro-seconds.

(2) Incorrect velocity camera orientations.

The reliability of the camera orientations is assured by the small mean errors of the control point plate measurements which, for most reductions, were less than 5 microns.

(3) Film measurements of the projectile.

An error of 8mm in the distance which the projectile travels between time  $t_1$  and  $t_2$  could, because of the geometry of the velocity camera system, be attributed to errors of approximately 7.5mm from camera No. 1 and No. 4 and approximately 2.5mm from cameras No. 2 and No. 3.

The errors in the projectile plate measurements that result in the 7.5mm and 2.5mm values may be computed from Fig. 17. Cameras Nos 2 and 4 are not shown and the dimensions listed are approximate values.

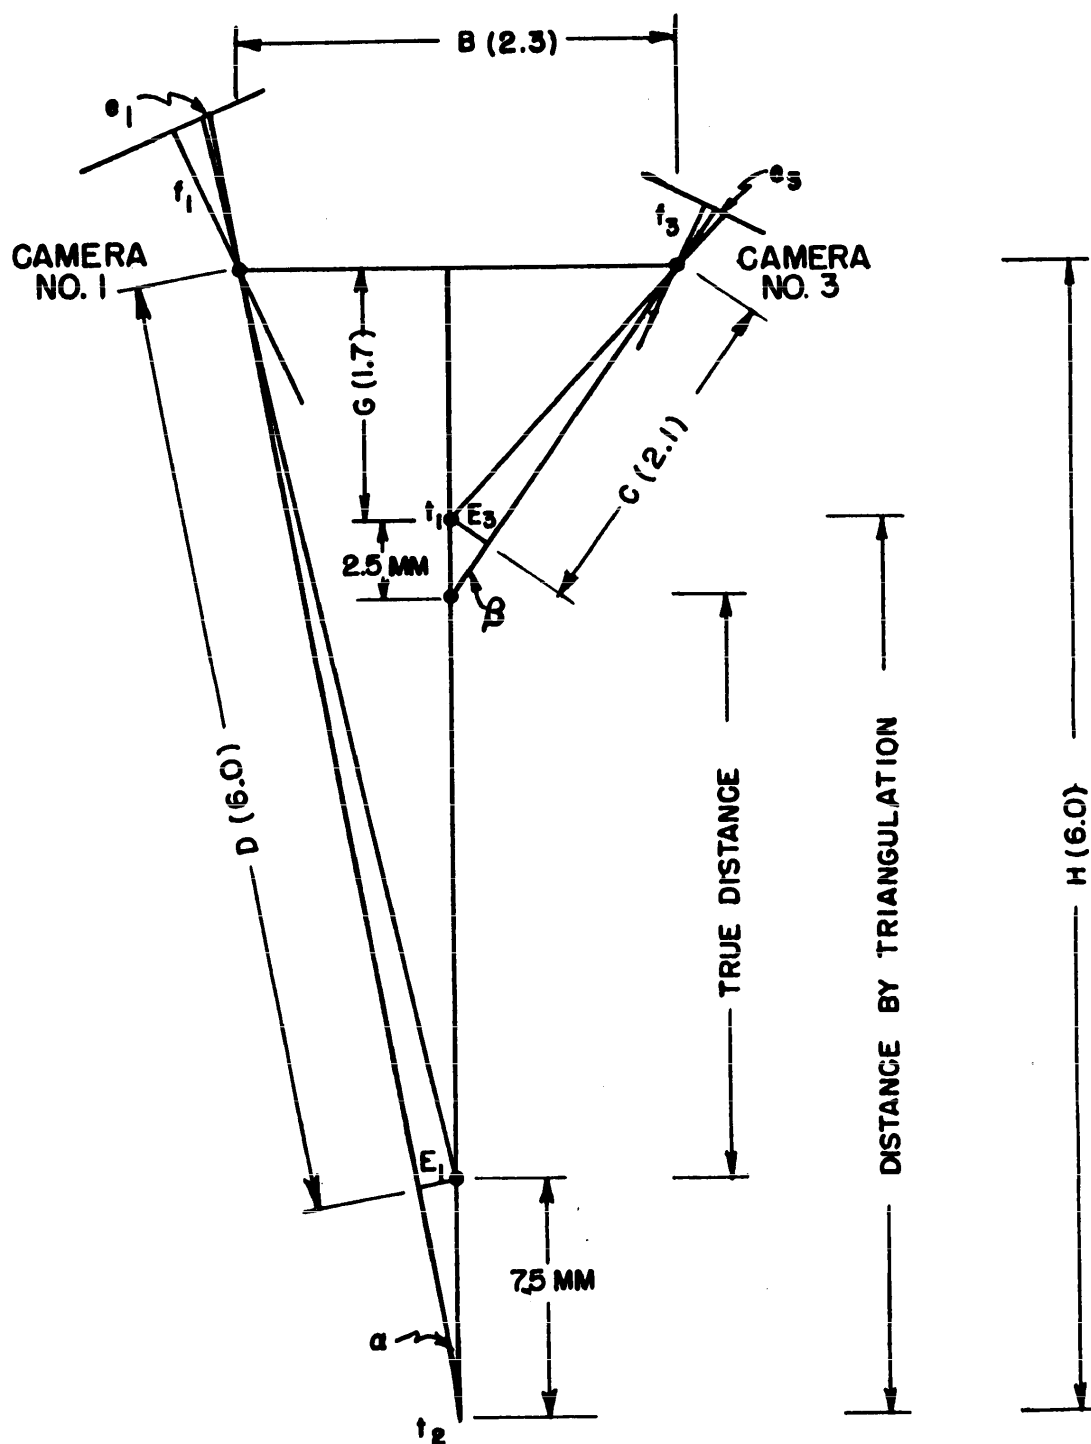


FIG. 17- ERRORS IN PROJECTILE VELOCITY INDUCED BY IDENTIFICATION ERRORS IN PROJECTILE FILM MEASUREMENTS

$$\tan \alpha = \frac{B/2}{H} = \frac{E_1}{7.5\text{mm}}$$

$$E_1 = \frac{7.5(B/2)}{H} = \frac{7.5 \times \frac{2.3}{2}}{6} = 1.44\text{mm}$$

$$\frac{e_1}{f_1} = \frac{E_1}{D}$$

$$e_1 = \frac{f_1 E_1}{D} = \frac{152,000 \times 1.44}{6000} = \underline{\underline{36 \text{ microns}}}$$

$$\tan \beta = \frac{B/2}{G} = \frac{E_3}{2.5\text{mm}}$$

$$E_3 = \frac{3(B/2)}{G} = \frac{2.5 \times \frac{2.3}{2}}{1.7} = 1.69\text{mm}$$

$$\frac{e_3}{f_3} = \frac{E_3}{C}$$

$$e_3 = \frac{f_3 E_3}{C} = \frac{50,000 \times 1.69}{2100} = \underline{\underline{40 \text{ microns}}}$$

The above computations indicate that an error of 8 millimeters in the distance the projectile travels from times  $t_1$  to  $t_2$  could be the result of film measuring errors ( $e_1$  and  $e_3$ ) between 35 and 40 microns on the projectile image.

$e_1$  and  $e_3$  are not setting or measuring errors but are identification errors. Repeatability of settings made on the projectile image was within 10 microns. The size of the projectile image varies from approximately 600 to 1000 microns in diameter, and in some cases appears elliptically shaped. The possibility of a bias in the identification should not be ignored. Again it is noted that this 35 to 40 micron error was based on a very small sample of four measurements.

#### 5.14 Final Projectile Velocities

If the results as determined by the four velocity cameras are used and the PVM values are considered good except for the 17.5 ft/sec bias, the final projectile velocities are tabulated in Table 29.

The projectile velocity determinations in common for the optical and electronic methods comprised too small a sample of measurements to determine with sufficient accuracy the difference between these methods. It is therefore doubtful that the projectile velocity was determined to  $\pm 2$  ft/sec.

If the bias due to the PVM method is to be determined by comparisons with airborne velocity cameras a large number of measurements should be made. In this way identification errors made when measuring the projectile image on the film may be averaged out. Also, to simplify the camera orientation reductions, at least three absolute control points should be photographed from all four velocity cameras.

However, a better method of obtaining the projectile velocities would be either to determine the PVM bias by comparisons made on the ground with a controlled optical system, or to determine and eliminate the cause of bias in the PVM system.

## CONCLUSIONS

### Calibration Pit

1. To check the relative positions of the twenty-five control points in the calibration pit, six widely separated control points should be observed before each RC-7 camera exposure over the calibration pit is made.

2. Unless the check survey on the six control points indicates a change in their relative positions a complete pit calibration on all twenty-five control points is not necessary.

3. Directions to the four stations of the quadrilateral and to the two control points simulating the center line of the gun barrel can be made to within 2 seconds of arc, and directions to the twenty-five pit control points can be made to within 5 seconds of arc. This would insure a sufficiently accurate determination of the relation between the gun and the RC-7 camera.

### RC-7 Camera

1. Periodic cone calibrations would make it possible to observe any changes of metric significance in this basic measuring instrument.

The RC-7 cone should be calibrated by taking star exposures at the beginning of each group of firings. The calibrated focal length and distortion curve thus determined would then be used in camera orientation reductions over the range.

Lens distortion corrections should be determined simultaneously with the RC-7 camera orientation reductions for all plates taken over the calibration pit.

2. Until the problem is solved of maintaining with sufficient accuracy the interior orientation of the RC-7 the elements  $X_o, Y_o, Z_o$  for the RC-7 camera orientations over the range should be enforced from the position of the RC-7 camera as triangulated by the Askania cameras.

3. Results from this group of firings indicate that the requirement of determining the direction of the gun during the time of firings to within 1 mil was satisfied.

#### Askania Cameras

1. Since a systematic error in the orientation of the U.S.C. and G.S. Triangulation Net may exist, the flashes as triangulated by the two ground based Askania cameras will not necessarily be compatible with the range control points or the RC-7 camera results, as determined from these range control points (page 11, Reference (9)). A rigorous method is suggested whereby the flashes can be triangulated by using three ground based cameras following the method outlined in Reference (9). The computed coordinates of the flashes and the RC-7 camera results will then be reduced to the same local coordinate system.

2. The requirements of determining the relative space coordinates of the aircraft and the burst to  $\pm 2.0$  feet and the velocity of the aircraft to  $\pm 2.0$  ft/sec have been satisfied.

#### Velocity Cameras

1. The constant differences between the Projectile Velocity Meter (PVM) and velocity camera systems, if determined from airborne firings, should be based on a large number of comparisons. This constant difference could be much more readily obtained by ground-based comparisons where the optical method can be very accurately controlled. In either case the cause of a PVM bias should be understood and removed if possible.

2. The camera orientations of each of the four velocity cameras should be determined from at least three absolute control points.

3. Scale for the velocity cameras is the result of the computed coordinates of control points No. 27 on the gun rod and No. 25 in the pit. This scale will be adequately determined if directions to these points are known within five seconds of arc.

4. Results from camera No. 5 indicated that the stability of the invar bar system was greater than required.

5. It is doubtful that the requirement of determining the projectile velocity to  $\pm 2.0$  ft/sec for this small sample of rounds was completely satisfied. However, a sample of approximately 15 rounds, obtained with suitable calibration, would be sufficient to meet this requirement.

*Myron W. Lawrence*

MYRON W. LAWRENCE

#### ACKNOWLEDGMENTS

The author desires to acknowledge his indebtedness to those who have assisted in the field observations and the data reductions, especially to

Miss Laura Ewalt for identifying the stars that were measured on the Askania plates, computing the coordinates of the flashes and the projectile from the Askania and velocity cameras, and for some of the hand computed examples contained in this report,

Miss Mary Alice Lookenott for the large amount of card punching and checking that was required for the different codes, programmed on the electronic computers,

Mr. James Lindenmuth for help in the field observations in establishing calibration pit coordinates and stability tests carried out in 1957 and again during the initial phase or the 1958 firings, and for help in the hand computing that was required to check the quadrilateral adjustment and pit coordinate codes, and

Mr. Frank DuBois and Mr. Jack Stratton for help in the calibration pit field observations made during the initial phase of the 1958 firings and the plate measuring and auxiliary computations required in the reductions of these firings.

## REFERENCES

1. Reuyl, D. "Ballistic Measurements of Aircraft Gun Firings at High Altitudes", Ballistic Research Laboratories Memorandum Report No. 921, August 1955.
2. Menne, D. F. "Instrumentations for Acquisition of Ballistic Data on Full Scale Aircraft Gun Firings", Ballistic Research Laboratories Report No. 1105.
3. Jordan-Eggert "Handbuch der Vermessungskunde", Ester Band, J. B. Metzlersche Verlagsbuchhandlung, 1935.
4. Schmid, H. H. "An Analytical Treatment of the Orientation of a Photogrammetric Camera", Ballistic Research Laboratories Report No. 880, October 1953.
5. Schmid, H. H. "Determination of Spatial Position and Attitude of a Bombing Aircraft by an Airborne Photogrammetric Camera", Ballistic Research Laboratories Memorandum Report No. 787, May 1954.
6. Schmid, H. H. "Spatial Triangulation by Least Squares Adjustment of Conditioned Observations", Ballistic Research Laboratories Report No. 752, March 1951.
7. Hanson, F. S. "Atmospheric Refraction Errors for Optical Instrumentation", Technical Memorandum No. 104, White Sands Proving Ground, Las Cruces, New Mexico, October 1953.
8. Schmid, H. H. "A General Analytical Solution to the Problem of Photogrammetry", Ballistic Research Laboratories Report No. 1065, July 1959.
9. Schmid, H. H. "Spatial Triangulation by Means of Photogrammetry", Ballistic Research Laboratories Report No. 784, October 1951.
10. Schmid, H. H. "Some Remarks on the Problem of Transforming Geodetic Ellipsoidal Coordinates into Cartesian Coordinates with the Help of Reduced Latitude", Ordnance Computer Report, Ballistic Research Laboratories, Vol. 6, No. 2, April 1959.
11. Brown, D. C. "Adjustment and Triangulation of Fixed Camera Observations", Ballistic Research Laboratories Report No. 960, October 1955.
12. Schmid, H. H. "An Analytical Treatment of the Problem of Triangulation by Stereophotogrammetry", Ballistic Research Laboratories Report No. 961, October 1955.

TABLE 1

XYZ COORDINATES FROM DIFFERENT PIT CALIBRATIONS  
(Meters)

| Date of Calibration | Cal. No. | Control Point Number |         |         |         |         |         |         |
|---------------------|----------|----------------------|---------|---------|---------|---------|---------|---------|
|                     |          |                      | 9       | 15      | 17      | 19      | 23      | 25      |
| 28 Feb 1958         | 07       | X                    | 96.3812 | 95.1599 | 94.6696 | 96.3590 | 98.0693 | 97.5126 |
|                     |          | Y                    | 98.2522 | 96.7266 | 95.0419 | 93.9083 | 95.0255 | 96.7381 |
|                     |          | Z                    | .8625   | .8627   | .8646   | .8628   | .8625   | .6976   |
| 28 Feb 1958         | 08       | X                    | 96.3815 | 95.1600 | 94.6696 | 96.3587 | 98.0692 | 97.5127 |
|                     |          | Y                    | 98.2522 | 96.7266 | 95.0421 | 93.9085 | 95.0255 | 96.7381 |
|                     |          | Z                    | .8627   | .8625   | .8647   | .8628   | .8624   | .6975   |
| 3 Mar 1958          | 05       | X                    | 96.3815 | 95.1600 | 94.6696 | 96.3590 | 98.0696 | 97.5131 |
|                     |          | Y                    | 98.2523 | 96.7268 | 95.0422 | 93.9085 | 95.0256 | 96.7381 |
|                     |          | Z                    | .8626   | .8625   | .8645   | .8627   | .8624   | .6975   |
| 3 Mar 1958          | 09       | X                    | 96.3813 | 95.1600 | 94.6697 | 96.3590 | 98.0692 | 97.5126 |
|                     |          | Y                    | 98.2523 | 96.7268 | 95.0422 | 93.9087 | 95.0257 | 96.7383 |
|                     |          | Z                    | .8625   | .8625   | .8645   | .8626   | .8624   | .6975   |
| 4 Mar 1958          | 10       | X                    | 96.3813 | 95.1599 | 94.6697 | 96.3591 | 98.0693 | 97.5126 |
|                     |          | Y                    | 98.2523 | 96.7268 | 95.0421 | 93.9086 | 95.0258 | 96.7382 |
|                     |          | Z                    | .8627   | .8625   | .8645   | .8628   | .8625   | .6975   |
| 10 Mar 1958         | 11       | X                    | 96.3814 | 95.1599 | 94.6696 | 96.3589 | 98.0692 | 97.5126 |
|                     |          | Y                    | 98.2523 | 96.7269 | 95.0422 | 93.9089 | 95.0258 | 96.7383 |
|                     |          | Z                    | .8625   | .8623   | .8644   | .8626   | .8622   | .6973   |
| 11 Mar 1958         | 12       | X                    | 96.3812 | 95.1597 | 94.6696 | 96.3590 | 98.0692 | 97.5125 |
|                     |          | Y                    | 98.2524 | 96.7270 | 95.0423 | 93.9086 | 95.0259 | 96.7384 |
|                     |          | Z                    | .8627   | .8625   | .8643   | .8626   | .8626   | .6975   |
| 21 Mar 1958         | 13       | X                    | 96.3812 | 95.1597 | 94.6694 | 96.3587 | 98.0691 | 97.5124 |
|                     |          | Y                    | 98.2524 | 96.7272 | 95.0423 | 93.9086 | 95.0256 | 96.7382 |
|                     |          | Z                    | .8621   | .8621   | .8639   | .8619   | .8619   | .6971   |
| 21 Mar 1958         | 14       | X                    |         |         |         |         |         | 97.5124 |
|                     |          | Y                    |         |         |         |         |         | 96.7384 |
|                     |          | Z                    |         |         |         |         |         | .6968   |
| 28 Mar 1958         | 15       | X                    | 96.3809 | 95.1597 | 94.6693 | 96.3586 | 98.0691 | 97.5123 |
|                     |          | Y                    | 98.2521 | 96.7268 | 95.0420 | 93.9085 | 95.0254 | 96.7381 |
|                     |          | Z                    | .8600   | .8602   | .8620   | .8603   | .8600   | .6951   |
| 2 Apr 1958          | 16       | X                    | 96.3809 | 95.1597 | 94.6695 | 96.3589 | 98.0691 | 97.5125 |
|                     |          | Y                    | 98.2522 | 96.7267 | 95.0421 | 93.9084 | 95.0255 | 96.7380 |
|                     |          | Z                    | .8621   | .8623   | .8642   | .8623   | .8638   | .6973   |

TABLE 1 (continued)

XYZ COORDINATES FROM DIFFERENT PIT CALIBRATIONS

(Meters)

| Date of Calibration | Cal. No. | Control Point Number |         |         |         |         |         |         |
|---------------------|----------|----------------------|---------|---------|---------|---------|---------|---------|
|                     |          |                      | 9       | 15      | 17      | 19      | 23      | 25      |
| 2 Apr 1958          | 17       | X                    | 96.3810 | 95.1598 | 94.6697 | 96.3590 | 98.0690 | 97.5124 |
|                     |          | Y                    | 98.2522 | 96.7268 | 95.0423 | 93.9089 | 95.0258 | 96.7382 |
|                     |          | Z                    | .8621   | .8623   | .8643   | .8627   | .8624   | .6975   |
| 10 Apr 1958         | 18       | X                    | 96.3807 | 95.1598 | 94.6693 | 96.3587 | 98.0689 | 97.5122 |
|                     |          | Y                    | 98.2522 | 96.7269 | 95.0421 | 93.9085 | 95.0255 | 96.7381 |
|                     |          | Z                    | .8629   | .8632   | .8648   | .8633   | .8631   | .6981   |
| 10 Apr 1958         | 19       | X                    | 96.3817 | 95.1601 | 94.6699 | 96.3593 | 98.0692 | 97.5126 |
|                     |          | Y                    | 98.2522 | 96.7272 | 95.0427 | 93.9087 | 95.0254 | 96.7377 |
|                     |          | Z                    | .8625   | .8622   | .8644   | .8627   | .8624   | .6979   |
| 11 Apr 1958         | 20       | X                    | 96.3805 | 95.1596 | 94.6693 | 96.3587 | 98.0688 | 97.5121 |
|                     |          | Y                    | 98.2521 | 96.7267 | 95.0421 | 93.9088 | 95.0257 | 96.7381 |
|                     |          | Z                    | .8629   | .8632   | .8664   | .8635   | .8630   | .6981   |
| 17 Apr 1958         | 21       | X                    | 96.3810 | 95.1598 | 94.6696 | 96.3589 | 98.0690 | 97.5123 |
|                     |          | Y                    | 98.2522 | 96.7268 | 95.0423 | 93.9090 | 95.0260 | 96.7383 |
|                     |          | Z                    | .8631   | .8632   | .8651   | .8634   | .8634   | .6984   |
| 22 Apr 1958         | 22       | X                    | 96.3816 | 95.1605 | 94.6703 | 96.3594 | 98.0690 | 97.5124 |
|                     |          | Y                    | 98.2519 | 96.7272 | 95.0427 | 93.9088 | 95.0254 | 96.7376 |
|                     |          | Z                    | .8622   | .8622   | .8641   | .8623   | .8619   | .6972   |
| 22 Apr 1958         | 23       | X                    | 96.3804 | 95.1591 | 94.6689 | 96.3585 | 98.0686 | 97.5119 |
|                     |          | Y                    | 98.2517 | 96.7261 | 95.0412 | 93.9079 | 95.0251 | 96.7375 |
|                     |          | Z                    | .8624   | .8625   | .8645   | .8629   | .8627   | .6975   |
| 6 May 1958          | 24       | X                    | 96.3822 | 95.1601 | 94.6694 | 96.3594 | 98.0695 | 97.5132 |
|                     |          | Y                    | 98.2523 | 96.7277 | 95.0431 | 93.9087 | 95.0249 | 96.7372 |
|                     |          | Z                    | .8622   | .8617   | .8633   | .8621   | .8623   | .6974   |
| 6 May 1958          | 25       | X                    | 96.3804 | 95.1595 | 94.6693 | 96.3585 | 98.0687 | 97.5120 |
|                     |          | Y                    | 98.2524 | 96.7273 | 95.0430 | 93.9089 | 95.0256 | 96.7382 |
|                     |          | Z                    | .8610   | .8618   | .8640   | .8620   | .8614   | .6965   |
| 7 May 1958          | 26       | X                    | 96.3812 | 95.1597 | 94.6694 | 96.3590 | 98.0690 | 97.5122 |
|                     |          | Y                    | 98.2522 | 96.7268 | 95.0422 | 93.9088 | 95.0258 | 96.7380 |
|                     |          | Z                    | .8616   | .8617   | .8637   | .8621   | .8619   | .6968   |
| 8 May 1958          | 27       | X                    | 96.3808 | 95.1595 | 94.6692 | 96.3586 | 98.0687 | 97.5120 |
|                     |          | Y                    | 98.2522 | 96.7268 | 95.0422 | 93.9089 | 95.0257 | 96.7380 |
|                     |          | Z                    | .8611   | .8614   | .8634   | .8617   | .8615   | .6964   |

TABLE 1 (continued)

XYZ COORDINATES FROM DIFFERENT PIT CALIBRATIONS  
(Meters)

| Date of<br>Calibration | Cal.<br>No. | Control Point Number |         |         |         |         |         |         |
|------------------------|-------------|----------------------|---------|---------|---------|---------|---------|---------|
|                        |             |                      | 9       | 15      | 17      | 19      | 23      | 25      |
| 15 May 1958            | 28          | X                    | 96.3810 | 95.1596 | 94.6695 | 96.3589 | 98.0689 | 97.5123 |
|                        |             | Y                    | 98.2523 | 96.7269 | 95.0426 | 93.9090 | 95.0259 | 96.7382 |
|                        |             | Z                    | .8617   | .8616   | .8638   | .8620   | .8622   | .6972   |
| 21 May 1958            | 29          | X                    | 96.3812 | 95.1595 | 94.6694 | 96.3587 | 98.0690 | 97.5124 |
|                        |             | Y                    | 98.2521 | 96.7268 | 95.0420 | 93.9084 | 95.0252 | 96.7379 |
|                        |             | Z                    | .8616   | .8614   | .8635   | .8616   | .8627   | .6966   |
| 22 May 1958            | 30          | X                    | 96.3808 | 95.1595 | 94.6693 | 96.3588 | 98.0686 | 97.5120 |
|                        |             | Y                    | 98.2519 | 96.7266 | 95.0422 | 93.9085 | 95.0256 | 96.7378 |
|                        |             | Z                    | .8610   | .8610   | .8631   | .8612   | .8614   | .6962   |
| 23 May 1958            | 31          | X                    | 96.3807 | 95.1596 | 94.6692 | 96.3587 | 98.0686 | 97.5121 |
|                        |             | Y                    | 98.2524 | 96.7270 | 95.0426 | 93.9093 | 95.0261 | 96.7383 |
|                        |             | Z                    | .8612   | .8613   | .8635   | .8620   | .8619   | .6968   |
| 26 May 1958            | 32          | X                    | 96.3809 | 95.1597 | 94.6695 | 96.3589 | 98.0689 | 97.5124 |
|                        |             | Y                    | 98.2521 | 96.7266 | 95.0421 | 93.9086 | 95.0257 | 96.7380 |
|                        |             | Z                    | .8612   | .8612   | .8633   | .8614   | .8616   | .6968   |
| 27 May 1958            | 33          | X                    | 96.3807 | 95.1595 | 94.6693 | 96.3587 | 98.0686 | 97.5120 |
|                        |             | Y                    | 98.2520 | 96.7265 | 95.0420 | 93.9085 | 95.0257 | 96.7378 |
|                        |             | Z                    | .8624   | .8622   | .8647   | .8634   | .8635   | .6981   |
| 2 Jun 1958             | 34          | X                    | 96.3809 | 95.1594 | 94.6691 | 96.3585 | 98.0685 | 97.5120 |
|                        |             | Y                    | 98.2520 | 96.7267 | 95.0421 | 93.9089 | 95.0256 | 96.7379 |
|                        |             | Z                    | .8629   | .8624   | .8644   | .8630   | .8631   | .6980   |
| 4 Jun 1958             | 35          | X                    | 96.3812 | 95.1597 | 94.6695 | 96.3600 | 98.0688 | 97.5123 |
|                        |             | Y                    | 98.2519 | 96.7266 | 95.0421 | 93.9067 | 95.0256 | 96.7377 |
|                        |             | Z                    | .8624   | .8623   | .8642   | .8622   | .8628   | .6978   |
| 5 Jun 1958             | 36          | X                    | 96.3816 | 95.1604 | 94.6699 | 96.3592 | 98.0690 | 97.5125 |
|                        |             | Y                    | 98.2520 | 96.7272 | 95.0427 | 93.9089 | 95.0257 | 96.7378 |
|                        |             | Z                    | .8622   | .8621   | .8643   | .8624   | .8624   | .6976   |
| 5 Jun 1958             | 37          | X                    | 96.3804 | 95.1591 | 94.6689 | 96.3582 | 98.0683 | 97.5116 |
|                        |             | Y                    | 98.2525 | 96.7271 | 95.0427 | 93.9089 | 95.0258 | 96.7381 |
|                        |             | Z                    | .8614   | .8615   | .8640   | .8618   | .8616   | .6968   |

TABLE 2

QUADRILATERAL ANGLES  
SHOWING ADJUSTED ANGLES AND CORRECTIONS TO OBSERVED ANGLES

| Date        | Cal.<br>No. | Angle<br>1 | Angle<br>2 | Angle<br>3 | Angle<br>4 | Angle<br>5 | Angle<br>6 | Angle<br>7 | Angle<br>8 | Mean<br>Error<br>Single<br>Angle |
|-------------|-------------|------------|------------|------------|------------|------------|------------|------------|------------|----------------------------------|
|             |             | 42° 14'    | 47° 31'    | 47° 39'    | 42° 26'    | 42° 21'    | 47° 24'    | 47° 46'    | 42° 33'    |                                  |
|             |             | 51.27      | 56.68      | 48.84      | 64.16      | 10.32      | 69.98      | 35.54      | 23.21      |                                  |
| 9 Feb 1958  | 01          |            |            |            |            |            |            |            |            | 1.62                             |
|             |             | -.33       | -1.52      | .04        | -.84       | 1.02       | -1.22      | .34        | -2.19      |                                  |
|             |             | 46.56      | 65.85      | 40.91      | 57.23      | 16.01      | 64.70      | 42.06      | 26.68      |                                  |
| 3 Mar 1958  | 05          |            |            |            |            |            |            |            |            | 1.06                             |
|             |             | -.84       | -.35       | -.79       | -.57       | -1.09      | -.60       | -1.04      | -.32       |                                  |
|             |             | 50.88      | 68.51      | 33.87      | 55.24      | 22.38      | 65.26      | 37.12      | 26.74      |                                  |
| 10 Apr 1958 | 19          |            |            |            |            |            |            |            |            | 2.66                             |
|             |             | .88        | 1.51       | .37        | -1.76      | -3.12      | -1.24      | -2.38      | 2.24       |                                  |
|             |             | 46.71      | 74.22      | 30.04      | 47.28      | 28.46      | 65.97      | 38.29      | 29.03      |                                  |
| 22 Apr 1958 | 22          |            |            |            |            |            |            |            |            | .90                              |
|             |             | -.79       | -.28       | -.96       | -.22       | -1.04      | -.03       | -.71       | .03        |                                  |
|             |             | 51.45      | 70.87      | 27.51      | 55.67      | 25.95      | 59.12      | 39.26      | 30.17      |                                  |
| 6 May 1958  | 24          |            |            |            |            |            |            |            |            | 3.98                             |
|             |             | .95        | .37        | -1.49      | -3.33      | -5.55      | -.88       | -2.74      | 3.17       |                                  |
|             |             | 49.15      | 75.78      | 26.09      | 48.48      | 29.65      | 63.53      | 38.34      | 28.98      |                                  |
| 5 Jun 1958  | 36          |            |            |            |            |            |            |            |            | 3.11                             |
|             |             | .15        | -2.22      | -2.91      | -3.02      | -3.85      | .03        | -.66       | .98        |                                  |

TABLE 3

ADJUSTED COORDINATES OF QUADRILATERAL STATIONS

| <u>Date</u> | <u>Cal.<br/>No.</u> | <u>Sta. A</u> | <u>Sta. B</u> | <u>Sta. C</u> | <u>Sta. D(enforced)</u> |
|-------------|---------------------|---------------|---------------|---------------|-------------------------|
| 9 Feb 1958  | 01                  | X 92.7745     | X 92.7614     | X 100.0000    | X 100.0000              |
|             |                     | Y 100.0420    | Y 93.4311     | Y 93.4023     | Y 100.0000              |
| 3 Mar 1958  | 05                  | X 92.7745     | X 92.7610     | X 100.0000    | X 100.0000              |
|             |                     | Y 100.0423    | Y 93.4310     | Y 93.4023     | Y 100.0000              |
| 10 Apr 1958 | 19                  | X 92.7746     | X 92.7610     | X 100.0000    | X 100.0000              |
|             |                     | Y 100.0422    | Y 93.4308     | Y 93.4023     | Y 100.0000              |
| 22 Apr 1958 | 22                  | X 92.7744     | X 92.7607     | X 100.0000    | X 100.0000              |
|             |                     | Y 100.0423    | Y 93.4306     | Y 93.4023     | Y 100.0000              |
| 6 May 1958  | 24                  | X 92.7748     | X 92.7610     | X 100.0000    | X 100.0000              |
|             |                     | Y 100.0424    | Y 93.4309     | Y 93.4023     | Y 100.0000              |
| 5 Jun 1958  | 36                  | X 92.7746     | X 92.7607     | X 100.0000    | X 100.0000              |
|             |                     | Y 100.0423    | Y 93.4306     | Y 93.4023     | Y 100.0000              |

TABLE 4

ADJUSTED LENGTHS BETWEEN QUADRILATERAL STATIONS  
(Meters)

| Date        | Cal.<br>No. | A-B     | B-C     | C-D*    | D-A     | A-C     | B-D     |
|-------------|-------------|---------|---------|---------|---------|---------|---------|
| 9 Feb 1958  | 01          | 6.61094 | 7.23862 | 6.59770 | 7.22565 | 9.81294 | 9.77485 |
| 3 Mar 1958  | 05          | 6.61130 | 7.23910 | 6.59770 | 7.22566 | 9.81318 | 9.77521 |
| 10 Apr 1958 | 19          | 6.61137 | 7.23902 | 6.59770 | 7.22552 | 9.81296 | 9.77531 |
| 22 Apr 1958 | 22          | 6.61173 | 7.23936 | 6.59770 | 7.22570 | 9.81318 | 9.77573 |
| 6 May 1958  | 24          | 6.61148 | 7.23907 | 6.59770 | 7.22530 | 9.81293 | 9.77529 |
| 5 Jun 1958  | 36          | 6.61169 | 7.23931 | 6.59770 | 7.22553 | 9.81305 | 9.77567 |

---

\* C-D enforced

TABLE 5

ADJUSTED Z COORDINATES  
(Meters)

| Date of Calibration | Cal. No. | 9     | 15    | 17    | 19    | 23    | 25    |
|---------------------|----------|-------|-------|-------|-------|-------|-------|
| 28 Feb 1958         | 07       | .8625 | .8627 | .8646 | .8628 | .8625 | .6976 |
| 28 Feb 1958         | 08       | .8627 | .8625 | .8647 | .8628 | .8624 | .6975 |
| 3 Mar 1958          | 05       | .8626 | .8625 | .8645 | .8627 | .8624 | .6975 |
| 3 Mar 1958          | 09       | .8625 | .8625 | .8645 | .8626 | .8624 | .6975 |
| 4 Mar 1958          | 10       | .8627 | .8625 | .8645 | .8628 | .8625 | .6975 |
| 10 Mar 1958         | 11       | .8625 | .8623 | .8644 | .8626 | .8622 | .6973 |
| 11 Mar 1958         | 12       | .8627 | .8625 | .8643 | .8626 | .8626 | .6975 |
| 21 Mar 1958         | 13       | .8621 | .8621 | .8639 | .8619 | .8619 | .6971 |
| 21 Mar 1958         | 14       |       |       |       |       |       | .6968 |
| 28 Mar 1958         | 15       | .8600 | .8602 | .8620 | .8603 | .8600 | .6951 |
| 2 Apr 1958          | 16       | .8621 | .8623 | .8642 | .8623 | .8638 | .6973 |
| 7 Apr 1958          | 17       | .8621 | .8623 | .8643 | .8627 | .8624 | .6975 |
| 10 Apr 1958         | 18       | .8629 | .8632 | .8648 | .8633 | .8631 | .6981 |
| 10 Apr 1958         | 19       | .8625 | .8622 | .8644 | .8627 | .8624 | .6979 |
| 11 Apr 1958         | 20       | .8629 | .8632 | .8664 | .8635 | .8630 | .6981 |
| 17 Apr 1958         | 21       | .8631 | .8632 | .8651 | .8634 | .8634 | .6984 |
| 22 Apr 1958         | 22       | .8622 | .8622 | .8641 | .8623 | .8619 | .6972 |
| 22 Apr 1958         | 23       | .8624 | .8625 | .8645 | .8629 | .8627 | .6975 |
| 6 May 1958          | 24       | .8622 | .8617 | .8633 | .8621 | .8623 | .6974 |
| 6 May 1958          | 25       | .8610 | .8618 | .8640 | .8620 | .8614 | .6965 |
| 7 May 1958          | 26       | .8616 | .8617 | .8637 | .8621 | .8619 | .6968 |
| 8 May 1958          | 27       | .8611 | .8614 | .8634 | .8617 | .8615 | .6964 |
| 15 May 1958         | 28       | .8617 | .8616 | .8638 | .8620 | .8622 | .6972 |

TABLE 5 (continued)

| Date of<br>Calibration | Cal.<br>No. | <u>ADJUSTED Z COORDINATES</u><br>(Meters) |       |       |       |       |       |
|------------------------|-------------|-------------------------------------------|-------|-------|-------|-------|-------|
|                        |             | 9                                         | 15    | 17    | 19    | 23    | 25    |
| 21 May 1958            | 29          | .8616                                     | .8614 | .8635 | .8616 | .8627 | .6966 |
| 22 May 1958            | 30          | .8610                                     | .8610 | .8631 | .8612 | .8614 | .6962 |
| 23 May 1958            | 31          | .8612                                     | .8613 | .8635 | .8620 | .8619 | .6968 |
| 26 May 1958            | 32          | .8612                                     | .8612 | .8633 | .8614 | .8616 | .6968 |
| 27 May 1958            | 33          | .8624                                     | .8622 | .8647 | .8634 | .8635 | .6981 |
| 2 Jun 1958             | 34          | .8629                                     | .8624 | .8644 | .8630 | .8631 | .6980 |
| 4 Jun 1958             | 35          | .8624                                     | .8623 | .8642 | .8622 | .8628 | .6978 |
| 5 Jun 1958             | 36          | .8622                                     | .8621 | .8643 | .8624 | .8624 | .6976 |
| 5 Jun 1958             | 37          | .8614                                     | .8615 | .8640 | .8618 | .8616 | .6968 |

TABLE 6

COMPUTED DISTANCE BETWEEN CONTROL POINTS ON GUN ROD  
(11 Feb to 21 May Runs)

| Date        | Cal.<br>No. | Pt. 26      | Pt. 27      | $\Delta X$               | Dist.<br>Meters | v<br>mm | vv    |
|-------------|-------------|-------------|-------------|--------------------------|-----------------|---------|-------|
|             |             | X<br>Y<br>Z | X<br>Y<br>Z | $\Delta Y$<br>$\Delta Z$ |                 |         |       |
| 11 Feb 1958 | 02          | 97.3123     | 97.3258     | .0135                    | .8522           | .04     | .0016 |
|             |             | 96.6148     | 96.6174     | .0026                    |                 |         |       |
|             |             | 5.0124      | 4.1603      | -.8521                   |                 |         |       |
| 13 Feb 1958 | 03          | 97.3373     | 97.3545     | .0172                    | .8522           | .04     | .0016 |
|             |             | 96.6000     | 96.6023     | .0023                    |                 |         |       |
|             |             | 5.0304      | 4.1784      | -.8520                   |                 |         |       |
| 20 Feb 1958 | 04          | 97.3464     | 97.3636     | .0172                    | .8521           | .14     | .0196 |
|             |             | 96.7039     | 96.7069     | .0030                    |                 |         |       |
|             |             | 5.0387      | 4.1868      | -.8519                   |                 |         |       |
| 20 Feb 1958 | 06          | 97.3464     | 97.3636     | .0172                    | .8521           | .14     | .0196 |
|             |             | 96.7039     | 96.7069     | .0030                    |                 |         |       |
|             |             | 5.0387      | 4.1868      | -.8519                   |                 |         |       |
| 28 Feb 1958 | 07          | 97.3212     | 97.3370     | .0158                    | .8522           | .04     | .0016 |
|             |             | 96.7851     | 96.7890     | .0039                    |                 |         |       |
|             |             | 5.0213      | 4.1692      | -.8521                   |                 |         |       |
| 28 Feb 1958 | 08          | 97.3855     | 97.4021     | .0166                    | .8522           | .04     | .0016 |
|             |             | 96.7554     | 96.7588     | .0034                    |                 |         |       |
|             |             | 5.0282      | 4.1762      | -.8520                   |                 |         |       |
| 3 Mar 1958  | 09          | 97.3370     | 97.3535     | .0165                    | .8519           | .34     | .1156 |
|             |             | 96.7143     | 96.7185     | .0042                    |                 |         |       |
|             |             | 5.0326      | 4.1809      | -.8517                   |                 |         |       |
| 4 Mar 1958  | 10          | 97.3668     | 97.3844     | .0176                    | .8522           | .04     | .0016 |
|             |             | 96.6877     | 96.6913     | .0036                    |                 |         |       |
|             |             | 5.0431      | 4.1911      | -.8520                   |                 |         |       |
| 10 Mar 1958 | 11          | 97.3689     | 97.3838     | .0149                    | .8522           | .04     | .0016 |
|             |             | 96.7415     | 96.7433     | .0018                    |                 |         |       |
|             |             | 5.0250      | 4.1729      | -.8521                   |                 |         |       |
| 11 Mar 1958 | 12          | 97.3446     | 97.3614     | .0168                    | .8522           | .04     | .0016 |
|             |             | 96.7514     | 96.7530     | .0016                    |                 |         |       |
|             |             | 5.0444      | 4.1924      | -.8520                   |                 |         |       |

TABLE 6 (continued)

COMPUTED DISTANCE BETWEEN CONTROL POINTS ON GUN ROD  
(11 Feb to 21 May Runs)

| Date                           | Cal.<br>No. | Pt. 26      | Pt. 27      | $\Delta X$               | Dist.<br>Meters | v<br>mm | vv    |
|--------------------------------|-------------|-------------|-------------|--------------------------|-----------------|---------|-------|
|                                |             | X<br>Y<br>Z | X<br>Y<br>Z | $\Delta Y$<br>$\Delta Z$ |                 |         |       |
| 21 Mar 1958                    | 13          | 97.3659     | 97.3837     | .0178                    | .8523           | -.06    | .0036 |
|                                |             | 96.6885     | 96.6878     | -.0007                   |                 |         |       |
|                                |             | 5.0372      | 4.1851      | -.8521                   |                 |         |       |
| 21 Mar 1958<br>(recalibration) | 14          | 97.3651     | 97.3825     | .0174                    | .8524           | -.16    | .0256 |
|                                |             | 96.6994     | 96.6987     | -.0007                   |                 |         |       |
|                                |             | 5.0356      | 4.1834      | -.8522                   |                 |         |       |
| 28 Mar 1958                    | 15          | 97.3725     | 97.3890     | .0165                    | .8523           | -.06    | .0036 |
|                                |             | 96.6807     | 96.6844     | .0037                    |                 |         |       |
|                                |             | 5.0438      | 4.1917      | -.8521                   |                 |         |       |
| 2 Apr 1958                     | 16          | 97.3574     | 97.3738     | .0164                    | .8522           | .04     | .0016 |
|                                |             | 96.7266     | 96.7314     | .0048                    |                 |         |       |
|                                |             | 5.0420      | 4.1900      | -.8520                   |                 |         |       |
| 7 Apr 1958                     | 17          | 97.3702     | 97.3875     | .0173                    | .8523           | -.06    | .0036 |
|                                |             | 96.6695     | 96.6740     | .0045                    |                 |         |       |
|                                |             | 5.0416      | 4.1895      | -.8521                   |                 |         |       |
| 10 Apr 1958                    | 18          | 97.3819     | 97.3973     | .0154                    | .8524           | -.16    | .0256 |
|                                |             | 96.7150     | 96.7190     | .0040                    |                 |         |       |
|                                |             | 5.0381      | 4.1858      | -.8523                   |                 |         |       |
| 11 Apr 1958                    | 20          | 97.3627     | 97.3983     | .0356                    | .8529           | -.66    | .4356 |
|                                |             | 96.7056     | 96.6954     | -.0102                   |                 |         |       |
|                                |             | 5.0429      | 4.1908      | -.8521                   |                 |         |       |
| 17 Apr 1958                    | 21          | 97.3710     | 97.3867     | .0157                    | .8523           | -.06    | .0036 |
|                                |             | 96.6874     | 96.6902     | .0028                    |                 |         |       |
|                                |             | 5.0359      | 4.1837      | -.8522                   |                 |         |       |
| 22 Apr 1958                    | 23          | 97.3508     | 97.3657     | .0149                    | .8522           | .04     | .0016 |
|                                |             | 96.6783     | 96.6808     | .0025                    |                 |         |       |
|                                |             | 5.0296      | 4.1775      | -.8521                   |                 |         |       |
| 6 May 1958                     | 25          | 97.3693     | 97.3832     | .0139                    | .8521           | .14     | .0196 |
|                                |             | 96.7135     | 96.7179     | .0044                    |                 |         |       |
|                                |             | 5.0147      | 4.1627      | -.8520                   |                 |         |       |
| 7 May 1958                     | 26          | 97.3642     | 97.3795     | .0153                    | .8521           | .14     | .0196 |
|                                |             | 96.6982     | 96.7016     | .0034                    |                 |         |       |
|                                |             | 5.0360      | 4.1840      | -.8520                   |                 |         |       |

TABLE 6 (continued)

COMPUTED DISTANCE BETWEEN CONTROL POINTS ON GUN ROD  
(11 Feb to 21 May Runs)

| Date                                 | Cal.<br>No. | Pt. 26                       | Pt. 27                       | $\Delta X$               | Dist.<br>Meters | V<br>mm | VV    |
|--------------------------------------|-------------|------------------------------|------------------------------|--------------------------|-----------------|---------|-------|
|                                      |             | X<br>Y<br>Z                  | X<br>Y<br>Z                  | $\Delta Y$<br>$\Delta Z$ |                 |         |       |
| 8 May 1958                           | 27          | 97.3414<br>96.7118<br>5.0270 | 97.3560<br>96.7140<br>4.1748 | .0146<br>.0022<br>-.8522 | .8523           | -.06    | .0036 |
| 15 May 1958                          | 28          | 97.3828<br>96.7827<br>5.0304 | 97.3982<br>96.7852<br>4.1783 | .0154<br>.0025<br>-.8521 | .8522           | .04     | .0016 |
| 21 May 1958                          | 29          | 97.3548<br>96.6718<br>5.0298 | 97.3699<br>96.6730<br>4.1776 | .0151<br>.0012<br>-.8522 | .8523           | -.06    | .0036 |
| Average = .85224 m.e. = $\pm$ 0.18mm |             |                              |                              |                          |                 |         |       |

COMPUTED DISTANCE BETWEEN CONTROL POINTS ON GUN ROD  
(22 May to 5 June Runs)

| Date        | Cal.<br>No. | Pt. 26                       | Pt. 27                       | $\Delta X$               | Dist.<br>Meters | V<br>mm | VV      |
|-------------|-------------|------------------------------|------------------------------|--------------------------|-----------------|---------|---------|
|             |             | X<br>Y<br>Z                  | X<br>Y<br>Z                  | $\Delta Y$<br>$\Delta Z$ |                 |         |         |
| 22 May 1958 | 30          | 97.3570<br>96.6485<br>5.0245 | 97.3716<br>96.6497<br>4.1735 | .0146<br>.0012<br>-.8510 | .8511           | -3.07   | 9.4249  |
| 23 May 1958 | 31          | 97.3693<br>96.7041<br>5.0218 | 97.3835<br>96.7066<br>4.1766 | .0142<br>.0025<br>-.8452 | .8453           | 2.73    | 7.4529  |
| 26 May 1958 | 32          | 97.3521<br>96.6834<br>5.0187 | 97.3667<br>96.6860<br>4.1759 | .0146<br>.0026<br>-.8428 | .8427           | 5.13    | 26.3169 |
| 27 May 1958 | 33          | 97.3674<br>96.7330<br>5.0304 | 97.3816<br>96.7359<br>4.1788 | .0142<br>.0029<br>-.8516 | .8517           | -3.67   | 13.4689 |

TABLE 6 (continued)

COMPUTED DISTANCE BETWEEN CONTROL POINTS ON GUN ROD  
(22 May to 5 June Runs)

| Date                                  | Cal.<br>No. | Pt. 26  | Pt. 27  | $\Delta X$ | Dist.<br>Meters | v<br>mm | vv      |
|---------------------------------------|-------------|---------|---------|------------|-----------------|---------|---------|
|                                       |             | X       | X       | $\Delta Y$ |                 |         |         |
|                                       |             | Y       | Y       | $\Delta Z$ |                 |         |         |
|                                       |             | Z       | Z       |            |                 |         |         |
| 2 Jun 1958                            | 34          | 97.3725 | 97.3891 | .0166      | .8511           | -3.07   | 9.4249  |
|                                       |             | 96.6409 | 96.6455 | .0046      |                 |         |         |
|                                       |             | 5.0332  | 4.1823  | -.8509     |                 |         |         |
| 4 Jun 1958                            | 35          | 97.3612 | 97.3770 | .0158      | .8432           | 4.83    | 23.3289 |
|                                       |             | 96.6928 | 96.6956 | .0028      |                 |         |         |
|                                       |             | 5.0329  | 4.1898  | -.8431     |                 |         |         |
| 5 Jun 1958                            | 37          | 97.3582 | 97.3728 | .0146      | .8509           | -2.87   | 8.2369  |
|                                       |             | 96.7313 | 96.7353 | .0040      |                 |         |         |
|                                       |             | 5.0328  | 4.1820  | -.8508     |                 |         |         |
| Average = .84803 m.e. = $\pm 4.03$ mm |             |         |         |            |                 |         |         |

TABLE 7

MEAN ERRORS OF CONTROL POINTS  
FROM 3 MARCH PIT CALIBRATION

| Control Point | m.e. single direction<br>(sec's of arc) | m.e. $\Delta X$<br>(mm) | m.e. $\Delta Y$<br>(mm) |
|---------------|-----------------------------------------|-------------------------|-------------------------|
| 7             | $\pm 7.13$                              | $\pm .1951$             | $\pm .0868$             |
| 8             | $\pm 1.43$                              | $\pm .0297$             | $\pm .0135$             |
| 9             | $\pm 2.76$                              | $\pm .0551$             | $\pm .0387$             |
| 19            | $\pm 8.63$                              | $\pm .2335$             | $\pm .1054$             |
| 20            | $\pm 8.38$                              | $\pm .1730$             | $\pm .1148$             |
| 21            | $\pm 8.06$                              | $\pm .1479$             | $\pm .1228$             |
| Average       | $\pm 6.06$                              | $\pm .1390$             | $\pm .0803$             |

Approximate uncertainty in control point positions: =

$$\sqrt{\frac{.1390^2}{2} + \frac{.0803^2}{2}} = .1605_{\text{mm}}$$

TABLE 8

MEAN ERRORS OF CONTROL POINTS  
FROM 22 APRIL PIT CALIBRATION

| Control Point | m.e. single direction<br>(sec's of arc) | m.e. $\Delta x$<br>(mm) | m.e. $\Delta y$<br>(mm) |
|---------------|-----------------------------------------|-------------------------|-------------------------|
| 7             | $\pm 12.73$                             | $\pm .3481$             | $\pm .1550$             |
| 8             | $\pm 20.32$                             | $\pm .4210$             | $\pm .2774$             |
| 9             | $\pm 18.53$                             | $\pm .3697$             | $\pm .2600$             |
| 19            | $\pm 36.49$                             | $\pm .9872$             | $\pm .4460$             |
| 20            | $\pm 33.71$                             | $\pm .6959$             | $\pm .4618$             |
| 21            | $\pm 31.32$                             | $\pm .5745$             | $\pm .4771$             |
| Average       | $\pm 25.52$                             | $\pm .5661$             | $\pm .3462$             |

Approximate uncertainty in control point positions: =

$$\sqrt{\frac{.5661^2}{2} + \frac{.3462^2}{2}} = .6636\text{mm}$$

TABLE 9

MEAN ERRORS OF CONTROL POINTS  
FROM 6 MAY PIT CALIBRATION

| Control Point | m.e. single direction<br>(sec's of arc) | m.e. $\Delta X$<br>(mm) | m.e. $\Delta Y$<br>(mm) |
|---------------|-----------------------------------------|-------------------------|-------------------------|
| 7             | $\pm 26.52$                             | $\pm .7250$             | $\pm .3227$             |
| 8             | $\pm 34.08$                             | $\pm .7059$             | $\pm .4651$             |
| 9             | $\pm 34.52$                             | $\pm .6888$             | $\pm .4844$             |
| 19            | $\pm 47.30$                             | $\pm 1.2795$            | $\pm .5778$             |
| 20            | $\pm 45.47$                             | $\pm .9389$             | $\pm .6230$             |
| 21            | $\pm 44.66$                             | $\pm .8193$             | $\pm .6803$             |
| Average       | $\pm 38.76$                             | $\pm .8596$             | $\pm .5256$             |

Approximate uncertainty in control point positions: =

$$\sqrt{\frac{.8596^2}{2} + \frac{.5256^2}{2}} = 1.0076\text{mm}$$

TABLE 10

RESULTS OF TWO METHODS OF REDUCING  
PIT CONTROL POINT COORDINATES

| Pt.<br>No.                          | I*       |          | II*      |          | III*       |            |
|-------------------------------------|----------|----------|----------|----------|------------|------------|
|                                     | X        | Y        | X        | Y        | $\Delta X$ | $\Delta Y$ |
| METERS                              |          |          |          |          |            |            |
| <u>3 March Quadrilateral 1.06"</u>  |          |          |          |          |            |            |
| 7                                   | 96.40427 | 96.57193 | 96.40434 | 99.57197 | -.00007    | -.00004    |
| 8                                   | 96.38496 | 98.45211 | 96.38493 | 98.45212 | .00003     | -.00001    |
| 9                                   | 96.38155 | 98.25234 | 96.38151 | 98.25234 | .00004     | .00000     |
| 19                                  | 96.35897 | 93.90848 | 96.35900 | 93.90853 | -.00003    | -.00005    |
| 20                                  | 96.37503 | 95.00592 | 96.37497 | 95.00590 | .00006     | .00002     |
| 21                                  | 96.39222 | 95.81815 | 96.39208 | 95.81801 | .00014     | .00014     |
| Average =                           |          |          |          |          | .00005     |            |
| <u>22 April Quadrilateral 0.90"</u> |          |          |          |          |            |            |
| 7                                   | 96.40391 | 99.57160 | 96.40386 | 99.57170 | .00005     | -.00010    |
| 8                                   | 96.38472 | 98.45165 | 96.38498 | 98.45162 | -.00026    | .00003     |
| 9                                   | 96.38129 | 98.25198 | 96.38157 | 98.25192 | -.00028    | .00006     |
| 19                                  | 96.35900 | 93.90888 | 96.35938 | 93.90881 | -.00038    | .00007     |
| 20                                  | 96.37502 | 95.00617 | 96.37448 | 95.00619 | .00054     | -.00002    |
| 21                                  | 96.39207 | 95.81824 | 96.39117 | 95.81852 | .00090     | -.00028    |
| Average =                           |          |          |          |          | .00025     |            |
| <u>6 May Quadrilateral 3.98"</u>    |          |          |          |          |            |            |
| 7                                   | 96.40452 | 99.57210 | 96.40414 | 99.57208 | .00038     | .00002     |
| 8                                   | 96.38502 | 98.45214 | 96.38555 | 98.45218 | -.00053    | -.00004    |
| 9                                   | 96.38155 | 98.25230 | 96.38219 | 98.25234 | -.00064    | -.00004    |
| 19                                  | 96.35886 | 93.90869 | 96.35938 | 93.90873 | -.00052    | -.00004    |
| 20                                  | 96.37520 | 95.00597 | 96.37444 | 95.00597 | +.00076    | .00000     |
| 21                                  | 96.39231 | 95.81814 | 96.39090 | 95.81803 | .00141     | .00011     |
| Average =                           |          |          |          |          | .00037     |            |

\* I - Final XY coordinates of Control Points by Least Squares Adjustment

II - Final XY coordinates of Control Points by Averaging the 6 sets of Coordinates as obtained from the 6 Baselines.

III - Difference between the 2 methods.

TABLE 11

COMPARISONS OF TWO SETS OF RC-7 CAMERA ORIENTATIONS  
OVER CALIBRATION PIT  
(enforcing  $c$ ,  $x_p$  and  $y_p$ )

| Cal.<br>No. | Date Control<br>Pts. Surveyed | Date of<br>Mission | m.e.* | $\alpha$<br>m.e. $\alpha$<br>← | $\omega$<br>m.e. $\omega$<br>grads | $\kappa$<br>m.e. $\kappa$<br>→ | $X_o$<br>m.e. $X_o$<br>← | $Y_o$<br>m.e. $Y_o$<br>meters | $Z_o$<br>m.e. $Z_o$<br>→ |
|-------------|-------------------------------|--------------------|-------|--------------------------------|------------------------------------|--------------------------------|--------------------------|-------------------------------|--------------------------|
| SET 1       |                               |                    |       |                                |                                    |                                |                          |                               |                          |
| 05          | 3 March                       | 7 May              | 4.9   | 198.226<br>.0065               | .224<br>.0052                      | -49.480<br>.0018               | 96.437<br>.0005          | 96.705<br>.0004               | 5.668<br>.0010           |
| 24          | 6 May                         | 7 May              | 8.7   | 198.215<br>.0115               | .235<br>.0092                      | -49.465<br>.0032               | 96.436<br>.0009          | 96.704<br>.0008               | 5.668<br>.0017           |
| SET 2       |                               |                    |       |                                |                                    |                                |                          |                               |                          |
| 05          | 3 March                       | 8 May              | 5.9   | 198.277<br>.0077               | .206<br>.0063                      | -49.395<br>.0021               | 96.413<br>.0006          | 96.720<br>.0005               | 5.661<br>.0012           |
| 24          | 6 May                         | 8 May              | 8.4   | 198.226<br>.0110               | .216<br>.0089                      | -49.380<br>.0030               | 96.412<br>.0009          | 96.720<br>.0008               | 5.661<br>.0016           |

\* Mean error in microns of a single plate measurement of unit weight

TABLE 12

COMPARATOR CODE

(RC-7 Camera over the range for 21 March M2/P1)

|                      | INPUT*        |               | OUTPUT**      |     |               |     |
|----------------------|---------------|---------------|---------------|-----|---------------|-----|
|                      | $\frac{1}{x}$ | $\frac{1}{y}$ | $\frac{1}{x}$ |     | $\frac{1}{y}$ |     |
|                      | (meters)      |               | (meters)      |     |               |     |
| <u>Fiducial Mark</u> |               |               |               |     |               |     |
| 100                  | .128831       | .115985       |               |     |               |     |
| 200                  | .259609       | .245193       |               |     |               |     |
| 300                  | .258816       | .115225       |               |     |               |     |
| 400                  | .129619       | .245968       |               |     |               |     |
| <u>Control Point</u> |               |               |               |     |               |     |
| 9                    | .253860       | .225482       | .73968716     | -01 | -.99804294    | -02 |
| 24                   | .146768       | .141619       | -.61147444    | -01 | .56284817     | -02 |
| 21                   | .158575       | .238320       | .15213875     | -01 | .66116460     | -01 |
| 12                   | .240821       | .130847       | -.18129943    | -02 | -.68133299    | -01 |
| 13                   | .223125       | .230030       | .55307777     | -01 | .14855680     | -01 |
| 16                   | .211016       | .133103       | -.21431156    | -01 | -.45587507    | -01 |
| 17                   | .192655       | .235042       | .37155506     | -01 | .39837333     | -01 |

\* Original plate measurements as given by comparator; multiple settings were made, however only averages are shown here.

\*\* Reduced or final plate measurements; these values are fed into the camera orientation code.

TABLE 13

RC-7 ORIENTATION OVER THE CALIBRATION PIT  
(enforcing  $c$ ,  $x_p$  &  $y_p$ )

Showing residuals in the plate measurements and control points

Calibration Date 21 March

| Control<br>Point No. | Residual in the<br>Plate Measurement<br>(microns) |          | Residual in the Control Points<br>(millimeters) |       |       |
|----------------------|---------------------------------------------------|----------|-------------------------------------------------|-------|-------|
|                      | $\ell_x$                                          | $\ell_y$ | X                                               | Y     | Z     |
| 1                    | -2.1                                              | -2.5     | -.014                                           | .159  | -.008 |
| 2                    | 0.7                                               | -2.3     | -.100                                           | .054  | -.034 |
| 3                    | -1.4                                              | -1.2     | .008                                            | .088  | .003  |
| 4                    | 1.3                                               | -0.2     | -.051                                           | -.038 | -.050 |
| 5                    | -0.5                                              | 0.4      | .028                                            | .003  | .011  |
| 6                    | 0.6                                               | -0.2     | -.025                                           | -.012 | -.009 |
| 7                    | 0.6                                               | 2.2      | .054                                            | -.095 | -.057 |
| 8                    | -0.4                                              | 1.5      | .065                                            | -.036 | -.014 |
| 9                    | 1.6                                               | 0.6      | -.035                                           | -.075 | -.024 |
| 10                   | -0.2                                              | -2.7     | -.086                                           | .099  | .106  |
| 11                   | -1.3                                              | 0.8      | .071                                            | .017  | -.019 |
| 12                   | -0.2                                              | 1.8      | .067                                            | -.054 | -.025 |
| 13                   | 0.8                                               | -2.1     | -.099                                           | .042  | .060  |
| 14                   | -0.3                                              | 0.7      | .033                                            | -.013 | -.012 |
| 15                   | 1.7                                               | -0.4     | -.072                                           | -.044 | .019  |
| 16                   | -3.3                                              | 0.3      | .123                                            | .099  | -.125 |
| 17                   | 1.7                                               | 2.1      | .009                                            | -.126 | .040  |
| 18                   | 0.8                                               | 0.4      | -.014                                           | -.038 | .008  |
| 19                   | -0.1                                              | -2.7     | -.085                                           | .095  | -.054 |
| 20                   | 2.1                                               | 0.0      | -.074                                           | -.070 | .026  |
| 21                   | -0.2                                              | -0.5     | -.011                                           | .022  | -.004 |
| 22                   | 1.7                                               | 1.9      | .002                                            | -.125 | .071  |
| 23                   | 0.3                                               | 2.9      | .087                                            | -.110 | .068  |
| 24                   | -0.5                                              | 0.3      | .029                                            | .005  | .002  |
| 25                   | -3.7                                              | -0.9     | .099                                            | .163  | .022  |

TABLE 14

RC-7 ORIENTATION OVER THE RANGE  
 (enforcing  $X_o, Y_o, Z_o$ )

Showing residuals in the plate measurements and control points

Date: 21 Mar M2/P1

| Control<br>Point No. | Residual in the<br>Plate Measurement<br>(microns) |          | Residual in the Control Points<br>(meters) |      |      |
|----------------------|---------------------------------------------------|----------|--------------------------------------------|------|------|
|                      | $\ell_x$                                          | $\ell_y$ | X                                          | Y    | Z    |
| 9                    | -1.2                                              | 1.2      | .16                                        | .02  | .10  |
| 12                   | -2.7                                              | -1.5     | .05                                        | .29  | .09  |
| 13                   | -0.3                                              | -1.0     | -.06                                       | .08  | .03  |
| 16                   | 2.3                                               | -1.1     | -.22                                       | -.11 | -.01 |
| 17                   | 0.4                                               | 0.8      | .03                                        | -.08 | -.04 |
| 21                   | -0.3                                              | 1.3      | .12                                        | -.05 | -.07 |
| 24                   | 1.7                                               | 0.3      | -.08                                       | -.14 | .09  |

TABLE 15

CAMERA ORIENTATION RESULTS OF RC-7 OVER RANGE  
(enforcing  $c$ ,  $x_p$  &  $y_p$  \*\*)

| Miss. No. | Date   | Miss./Pass/Rd. | Points*** | ****<br>m.e. | <u>METERS</u>       |                     |                     |                               | <u>GRADS</u>                  |                               |
|-----------|--------|----------------|-----------|--------------|---------------------|---------------------|---------------------|-------------------------------|-------------------------------|-------------------------------|
|           |        |                |           |              | $X_o$<br>m.e. $X_o$ | $Y_o$<br>m.e. $Y_o$ | $Z_o$<br>m.e. $Z_o$ | $\alpha_g$<br>m.e. $\alpha_g$ | $\omega_g$<br>m.e. $\omega_g$ | $\kappa_g$<br>m.e. $\kappa_g$ |
| 1         | 21 Mar | 1/2            | 4         | 1.1          | 1851.960<br>.568    | -613.408<br>.615    | 9599.050<br>.150    | 197.820<br>.0034              | -.160<br>.0033                | -53.159<br>.0009              |
| 2         | 21 Mar | 1/2*           | 4         | 1.5          | 1853.062<br>.779    | -613.545<br>.843    | 9599.283<br>.206    | 197.821<br>.0047              | -.161<br>.0046                | -53.156<br>.0012              |
| 3         | 21 Mar | 2/1            | 7         | 2.4          | 2055.657<br>.729    | -495.023<br>.866    | 9482.221<br>.240    | 197.755<br>.0043              | .279<br>.0047                 | -57.310<br>.0014              |
| 4         | 28 Mar | 2/2            | 6         | 2.8          | 1766.157<br>.936    | -204.972<br>1.061   | 9589.176<br>.312    | 196.129<br>.0054              | 2.246<br>.0057                | -55.583<br>.0017              |
| 5         | 10 Apr | 3/1-1          | 4         | 1.0          | 1779.470<br>.515    | -687.188<br>.559    | 9660.671<br>.138    | 197.532<br>.0031              | -1.933<br>.0030               | -53.280<br>.0008              |
| 6         | 10 Apr | 3/1-1*         | 5         | 1.6          | 1780.491<br>.774    | -690.363<br>.874    | 9660.614<br>.206    | 197.536<br>.0047              | -1.918<br>.0047               | -53.279<br>.0012              |
| 7         | 10 Apr | 3/1-2          | 6         | 2.4          | 3546.846<br>.820    | -778.052<br>.914    | 9663.365<br>.271    | 197.916<br>.0046              | .660<br>.0049                 | -52.597<br>.0016              |
| 8         | 10 Apr | 3/1-2*         | 6         | 1.1          | 3548.360<br>.368    | -777.666<br>.410    | 9663.799<br>.122    | 197.918<br>.0021              | .657<br>.0022                 | -52.601<br>.0007              |
| 9         | 11 Apr | 1/2-1          | 6         | 2.6          | 2240.064<br>.840    | -273.456<br>.956    | 9546.289<br>.264    | 197.641<br>.0049              | 2.951<br>.0052                | -53.364<br>.0015              |
| 10        | 11 Apr | 1/2-2          | 6         | 1.5          | 3608.286<br>.476    | -351.200<br>.568    | 9561.168<br>.152    | 197.708<br>.0028              | 1.243<br>.0031                | -52.739<br>.0009              |
| 11        | 11 Apr | 1/3-1          | 7         | 2.2          | 1819.064<br>.686    | -549.332<br>.814    | 9639.000<br>.232    | 197.836<br>.0040              | .396<br>.0044                 | -53.886<br>.0013              |

TABLE 15 (continued)

CAMERA ORIENTATION RESULTS OF RC-7 OVER RANGE  
(enforcing  $c$ ,  $x_p$  &  $y_p$  \*\*)

| Miss. No.       | Date   | Miss./Pass/Rd. | Points*** | ****<br>m.e. | <u>METERS</u>       |                     |                     | <u>GRADS</u>                  |                               |                               |
|-----------------|--------|----------------|-----------|--------------|---------------------|---------------------|---------------------|-------------------------------|-------------------------------|-------------------------------|
|                 |        |                |           |              | $X_o$<br>m.e. $X_o$ | $Y_o$<br>m.e. $Y_o$ | $Z_o$<br>m.e. $Z_o$ | $\alpha_g$<br>m.e. $\alpha_g$ | $\omega_g$<br>m.e. $\omega_g$ | $\kappa_g$<br>m.e. $\kappa_g$ |
| 12              | 11 Apr | 1/3-2          | 7         | 1.8          | 3288.796<br>.557    | -619.851<br>.671    | 9635.572<br>.177    | 198.587<br>.0032              | - .115<br>.0036               | -53.407<br>.0010              |
| 13              | 7 May  | 1/1            | 5         | 1.8          | 1957.487<br>.696    | -488.366<br>.869    | 9686.621<br>.228    | 197.257<br>.0040              | -2.991<br>.0048               | -56.811<br>.0012              |
| 14              | 7 May  | 1/2            | 5         | 2.7          | 1747.189<br>1.028   | -212.970<br>1.242   | 9533.794<br>.314    | 196.997<br>.0061              | 1.714<br>.0068                | -57.526<br>.0018              |
| 15              | 7 May  | 1/4            | 5         | 2.9          | 1791.185<br>1.121   | -390.422<br>1.374   | 9617.879<br>.353    | 196.726<br>.0066              | .734<br>.0075                 | -58.140<br>.0020              |
| 16              | 8 May  | 3/1            | 6         | 3.4          | 1808.929<br>1.285   | -448.490<br>1.522   | 9699.414<br>.448    | 197.091<br>.0076              | 2.771<br>.0080                | -50.466<br>.0023              |
| 17              | 8 May  | 3/2            | 4         | 2.8          | 1829.620<br>1.446   | -645.439<br>1.556   | 9685.137<br>.379    | 197.640<br>.0087              | 1.313<br>.0084                | -51.552<br>.0022              |
| Avg. m.e. = 2.1 |        |                |           |              | .801                | .924                | .246                | .0047                         | .0050                         | .0014                         |

\* Check Run

\*\*  $c = .10055$ ,  $x_p = y_p = 0$ 

\*\*\* number of control points measured

\*\*\*\* mean error in microns of a single measurement of unit weight

TABLE 16

CAMERA ORIENTATION RESULTS OF RC-7 OVER RANGE  
(enforcing  $X_0, Y_0, Z_0$  from Askania Results)

| Date     | Miles./Pass/Rd. | Points | $\theta$ | METERS   |          |          | GRADS                         |                               |                               | $c, x_p, y_p$ in METERS<br>m.e. in microns |                     |                     |  |
|----------|-----------------|--------|----------|----------|----------|----------|-------------------------------|-------------------------------|-------------------------------|--------------------------------------------|---------------------|---------------------|--|
|          |                 |        |          | $X_0$    | $Y_0$    | $Z_0$    | $\alpha_g$<br>m.e. $\alpha_g$ | $\omega_g$<br>m.e. $\omega_g$ | $\kappa_g$<br>m.e. $\kappa_g$ | c<br>m.e. c                                | $x_p$<br>m.e. $x_p$ | $y_p$<br>m.e. $y_p$ |  |
| 1 21 Mar | 1/2             | 4      | .2       | 1838.414 | -614.452 | 9602.599 | 197.819<br>.0005              | -.159<br>.0005                | -53.159<br>.0001              | .100594<br>.3                              | -.000100<br>1.0     | .000097<br>1.0      |  |
| 2 21 Mar | 2/1             | 7      | 2.6      | 2047.767 | -499.042 | 9486.338 | 197.754<br>.0047              | .280<br>.0052                 | -57.309<br>.0015              | .100598<br>2.7                             | -.000082<br>9.2     | .000038<br>9.4      |  |
| 3 21 Mar | 1/2*            | 4      | 2.2      | 1838.358 | -614.480 | 9602.246 | 197.819<br>.0067              | -.161<br>.0066                | -53.156<br>.0017              | .100588<br>3.2                             | -.000108<br>12.4    | .000106<br>12.1     |  |
| 4 28 Mar | 2/2             | 6      | 3.5      | 1761.247 | -206.600 | 9593.317 | 196.125<br>.0066              | 2.246<br>.0071                | -55.583<br>.0021              | .100599<br>3.7                             | -.000039<br>13.2    | .000023<br>12.8     |  |
| 5 10 Apr | 3/1-1           | 4      | .9       | 1773.690 | -688.397 | 9664.376 | 197.530<br>.0028              | -1.933<br>.0027               | -53.278<br>.0007              | .100591<br>1.5                             | -.000048<br>5.1     | .000033<br>4.9      |  |
| 6 10 Apr | 3/1-2           | 6      | 2.4      | 3544.589 | -782.672 | 9668.232 | 197.914<br>.0045              | .660<br>.0048                 | -52.596<br>.0015              | .100602<br>2.8                             | -.000048<br>8.9     | -.000018<br>8.8     |  |
| 7 10 Apr | 3/1-1*          | 5      | .9       | 1773.823 | -688.470 | 9664.254 | 197.536<br>.0028              | -1.919<br>.0028               | -53.278<br>.0007              | .100592<br>1.5                             | -.000031<br>5.2     | .000062<br>5.0      |  |
| 8 10 Apr | 3/1-2*          | 6      | 1.4      | 3544.336 | -782.942 | 9667.929 | 197.916<br>.0026              | .658<br>.0028                 | -52.600<br>.0009              | .100596<br>1.7                             | -.000065<br>5.2     | -.000082<br>5.2     |  |
| 9 11 Apr | 1/2-1           | 6      | 3.0      | 2236.449 | -275.771 | 9550.742 | 197.638<br>.0056              | 2.952<br>.0061                | -53.364<br>.0018              | .100601<br>3.2                             | -.000037<br>11.2    | .000010<br>10.9     |  |

TABLE 16 (continued)

CAMERA ORIENTATION RESULTS OF RC-7 OVER RANGE  
(enforcing  $X_0$   $Y_0$   $Z_0$  from Askania Results)

|                 | Date   | Miss./Pass/Rd. | Points** | m.e.*** | METERS   |          |          | GRADS                         |                               |                               | c, $x_p$ , $y_p$ in METERS<br>m.e. in microns |                     |                     |
|-----------------|--------|----------------|----------|---------|----------|----------|----------|-------------------------------|-------------------------------|-------------------------------|-----------------------------------------------|---------------------|---------------------|
|                 |        |                |          |         | $X_0$    | $Y_0$    | $Z_0$    | $\alpha_g$<br>m.e. $\alpha_g$ | $\omega_g$<br>m.e. $\omega_g$ | $\kappa_g$<br>m.e. $\kappa_g$ | c<br>m.e. c                                   | $x_p$<br>m.e. $x_p$ | $y_p$<br>m.e. $y_p$ |
| 10              | 11 Apr | 1/2-2          | 6        | 1.7     | 3600.896 | -357.400 | 9566.298 | 197.706<br>.0030              | 1.244<br>.0035                | -52.739<br>.0010              | .100610<br>1.9                                | -.000096<br>6.2     | .000010<br>6.2      |
| 11              | 11 Apr | 1/3-1          | 7        | 2.1     | 1815.220 | -552.959 | 9643.207 | 197.836<br>.0040              | .396<br>.0043                 | -53.886<br>.0013              | .100596<br>2.3                                | -.000053<br>7.6     | .000004<br>8.0      |
| 12              | 11 Apr | 1/3-2          | 7        | 2.0     | 3283.635 | -626.962 | 9640.157 | 198.586<br>.0036              | -.114<br>.0041                | -53.406<br>.0011              | .100599<br>2.1                                | -.000089<br>7.1     | -.000011<br>7.4     |
| 13              | 7 May  | 1/1            | 5        | 2.0     | 1953.168 | -488.474 | 9692.633 | 197.255<br>.0042              | -2.993<br>.0051               | -56.810<br>.0013              | .100615<br>2.9                                | -.000029<br>8.6     | .000026<br>8.8      |
| 14              | 7 May  | 1/2            | 5        | 3.1     | 1744.571 | -217.855 | 9539.128 | 196.995<br>.0070              | 1.715<br>.0077                | -57.526<br>.0021              | .100611<br>3.6                                | -.000051<br>13.1    | -.000012<br>14.3    |
| 15              | 7 May  | 1/4            | 5        | 3.5     | 1786.280 | -395.136 | 9622.045 | 196.724<br>.0080              | .734<br>.0090                 | -58.140<br>.0024              | .100598<br>4.3                                | -.000067<br>15.3    | .000007<br>16.2     |
| 16              | 8 May  | 3/1            | 6        | 3.2     | 1803.757 | -461.058 | 9702.347 | 197.085<br>.0071              | 2.766<br>.0081                | -50.465<br>.0023              | .100596<br>4.1                                | -.000127<br>13.7    | -.000066<br>14.6    |
| 17              | 8 May  | 3/2            | 4        | 2.4     | 1826.179 | -646.738 | 9690.270 | 197.640<br>.0074              | 1.314<br>.0072                | -51.553<br>.0019              | .100606<br>3.4                                | -.000031<br>13.6    | .000017<br>13.4     |
| Avg. m.e. = 2.2 |        |                |          |         |          |          |          | .0048                         | .0052                         | .0014                         | 2.6                                           | 9.2                 | 9.4                 |

\* Check Run

\*\* Number of control points measured

\*\*\* m.e. in microns of a single measurement of unit weight

TABLE 17

CAMERA ORIENTATION RESULTS OF RC-7 OVER CALIBRATION PIT  
 (enforcing  $c$ ,  $x_p$  &  $y_p$  \*\*)

| Date             | Points*** | ****<br>m.e. | METERS              |                     |                     | GRADS                         |                               |                               |
|------------------|-----------|--------------|---------------------|---------------------|---------------------|-------------------------------|-------------------------------|-------------------------------|
|                  |           |              | $X_o$<br>m.e. $X_o$ | $Y_o$<br>m.e. $Y_o$ | $Z_o$<br>m.e. $Z_o$ | $\alpha_g$<br>m.e. $\alpha_g$ | $\omega_g$<br>m.e. $\omega_g$ | $\kappa_g$<br>m.e. $\kappa_g$ |
| 21 Mar           | 25        | 2.6          | 96.435<br>.0003     | 96.710<br>.0002     | 5.666<br>.0005      | 198.051<br>.0034              | - .045<br>.0028               | -49.439<br>.0009              |
| 21 Mar*          | 23        | 2.4          | 96.435<br>.0004     | 96.710<br>.0003     | 5.665<br>.0006      | 198.054<br>.0047              | - .039<br>.0032               | -49.442<br>.0010              |
| 28 May           | 24        | 2.7          | 96.443<br>.0003     | 96.691<br>.0003     | 5.677<br>.0005      | 198.129<br>.0036              | .279<br>.0035                 | -49.318<br>.0010              |
| 10 Apr           | 22        | 6.3          | 96.452<br>.0011     | 96.719<br>.0007     | 5.668<br>.0017      | 198.202<br>.0138              | .311<br>.0085                 | -49.683<br>.0027              |
| 10 Apr*          | 22        | 7.1          | 96.452<br>.0013     | 96.719<br>.0008     | 5.667<br>.0019      | 198.205<br>.0155              | .312<br>.0096                 | -49.685<br>.0031              |
| 11 Apr           | 22        | 6.3          | 96.453<br>.0009     | 96.701<br>.0007     | 5.672<br>.0014      | 198.178<br>.0114              | .324<br>.0084                 | -49.298<br>.0026              |
| 7 May            | 25        | 4.9          | 96.437<br>.0005     | 96.705<br>.0004     | 5.668<br>.0010      | 198.226<br>.0065              | .224<br>.0052                 | -49.480<br>.0018              |
| 8 May            | 25        | 5.9          | 96.413<br>.0006     | 96.720<br>.0005     | 5.661<br>.0012      | 198.277<br>.0077              | .206<br>.0063                 | -49.395<br>.0021              |
| Avg. m. e. = 4.8 |           |              | .0007               | .0005               | .0011               | .0083                         | .0059                         | .0019                         |

\* CHECK RUN

\*\*  $c = .10055$ ,  $x_p = y_p = 0$ 

\*\*\* number of control points measured

\*\*\*\* mean error in microns of a single measurement of unit weight

TABLE 18

COMPARISONS BETWEEN ASKANIA AND RC-7 CAMERA SYSTEMS  
(enforcing  $c$ ,  $x_p$  &  $y_p$  in RC-7 camera orientations)

Askania minus RC-7 Values (meters)

| Miss No. | Miss/Pass Round | (1) $\Delta x$ | (2) $\Delta y$ | (3) $\Delta z$ before refraction | (4) Askania refraction | (5) Average RC-7 refraction | (6) $\Delta z$ Final value |
|----------|-----------------|----------------|----------------|----------------------------------|------------------------|-----------------------------|----------------------------|
| 1        | 21 Mar 1/2      | -13.54         | - 1.04         | 4.55                             | -1.40                  | 1.00                        | 2.15                       |
| 2        | 21 Mar 2/1      | - 7.89         | - 4.02         | 5.12                             | -1.40                  | "                           | 2.72                       |
| 3        | 21 Mar 1/2*     | -14.70         | - .93          | 3.96                             | -1.40                  | "                           | 1.56                       |
| 4        | 28 Mar 2/2      | - 4.91         | - 1.63         | 5.14                             | -1.39                  | "                           | 2.75                       |
| 5        | 10 Apr 3/1-1    | - 5.78         | - 1.21         | 4.70                             | -1.41                  | "                           | 2.29                       |
| 6        | 10 Apr 3/1-2    | - 2.26         | - 4.62         | 5.87                             | -1.57                  | "                           | 3.30                       |
| 7        | 10 Apr 3/1-1*   | - 6.67         | + 1.89         | 4.64                             | -1.41                  | "                           | 2.23                       |
| 8        | 10 Apr 3/1-2*   | - 4.02         | - 5.28         | 5.13                             | -1.57                  | "                           | 2.56                       |
| 9        | 11 Apr 1/2-1    | - 3.62         | - 2.32         | 5.45                             | -1.39                  | "                           | 3.06                       |
| 10       | 11 Apr 1/2-2    | - 7.39         | - 6.20         | 6.13                             | -1.55                  | "                           | 3.58                       |
| 11       | 11 Apr 1/3-1    | - 3.84         | - 3.63         | 5.21                             | -1.41                  | "                           | 2.80                       |
| 12       | 11 Apr 1/3-2    | - 5.16         | - 7.11         | 5.58                             | -1.53                  | "                           | 3.05                       |
| 13       | 7 May 1/1       | - 4.32         | - .11          | 7.01                             | -1.42                  | "                           | 4.59                       |
| 14       | 7 May 1/2       | - 2.62         | - 4.88         | 6.33                             | -1.38                  | "                           | 3.95                       |
| 15       | 7 May 1/4       | - 4.90         | - 4.71         | 5.16                             | -1.40                  | "                           | 2.76                       |
| 16       | 8 May 3/1       | - 5.17         | -12.57         | 3.93                             | -1.41                  | "                           | 1.52                       |
| 17       | 8 May 3/2       | - 3.44         | - 1.30         | 6.13                             | -1.42                  | "                           | 3.71                       |

\*Check runs

TABLE 19

REFRACTION CORRECTIONS FROM ASKANIA CAMERAS TO RC-7 CAMERA

| Miss.<br>No. | Mission |        | Refraction Corrections (meters) |                     |                   |             |
|--------------|---------|--------|---------------------------------|---------------------|-------------------|-------------|
|              |         |        | Pi C to RC-7<br>(1)             | Pi D to RC-7<br>(2) | Difference<br>(3) | Mean<br>(4) |
| 1            | 21 Mar  | 1/2    | -1.33                           | -1.47               | .14               | -1.40       |
| 2            | 21 Mar  | 2/1    | -1.34                           | -1.45               | .11               | -1.40       |
| 3            | 21 Mar  | 1/2*   | -1.33                           | -1.47               | .14               | -1.40       |
| 4            | 28 Mar  | 2/2    | -1.37                           | -1.41               | .04               | -1.39       |
| 5            | 10 Apr  | 3/1-1  | -1.33                           | -1.49               | .16               | -1.41       |
| 6            | 10 Apr  | 3/1-2  | -1.48                           | -1.66               | .18               | -1.57       |
| 7            | 10 Apr  | 3/1-1* | -1.33                           | -1.49               | .16               | -1.41       |
| 8            | 10 Apr  | 3/1-2* | -1.48                           | -1.66               | .18               | -1.57       |
| 9            | 11 Apr  | 1/2-1  | -1.39                           | -1.39               | .00               | -1.39       |
| 10           | 11 Apr  | 1/2-2  | -1.51                           | -1.59               | .08               | -1.55       |
| 11           | 11 Apr  | 1/3-1  | -1.34                           | -1.47               | .13               | -1.41       |
| 12           | 11 Apr  | 1/3-2  | -1.46                           | -1.60               | .14               | -1.53       |
| 13           | 7 May   | 1/1    | -1.37                           | -1.48               | .11               | -1.42       |
| 14           | 7 May   | 1/2    | -1.36                           | -1.41               | .05               | -1.38       |
| 15           | 7 May   | 1/4    | -1.35                           | -1.44               | .09               | -1.40       |
| 16           | 8 May   | 3/1    | -1.36                           | -1.46               | .10               | -1.41       |
| 17           | 8 May   | 3/2    | -1.34                           | -1.49               | .15               | -1.42       |

\* Check Runs

TABLE 20

DIRECTION OF GUN OVER THE RANGE  
AT THE MOMENT THE GUN WAS FIRED

| Date      | Mission | Pass | Round | GRADS   |          |          |          |
|-----------|---------|------|-------|---------|----------|----------|----------|
|           |         |      |       | A       | $\gamma$ | $\alpha$ | $\omega$ |
| 21 Mar 58 | 1       | 2    | 1     | 392.452 | 198.337  | 198.349  | 399.803  |
| 21 Mar 58 | 1       | 2    | 1*    | 392.205 | 198.325  | 198.338  | 399.795  |
| 21 Mar 58 | 2       | 1    | 1     | 8.352   | 198.302  | 198.316  | .222     |
| 28 Mar 58 | 2       | 2    | 1     | 37.623  | 196.067  | 196.733  | 2.190    |
| 10 Apr 58 | 3       | 1    | 1     | 348.102 | 197.289  | 198.140  | 398.027  |
| 10 Apr 58 | 3       | 1    | 1*    | 348.048 | 197.281  | 198.137  | 398.020  |
| 10 Apr 58 | 3       | 1    | 2     | 26.733  | 198.410  | 198.548  | .648     |
| 10 Apr 58 | 3       | 1    | 2*    | 26.550  | 198.398  | 198.535  | .649     |
| 11 Apr 58 | 1       | 2    | 1     | 33.910  | 196.187  | 196.714  | 1.936    |
| 11 Apr 58 | 1       | 2    | 2     | 4.845   | 196.758  | 196.767  | .246     |
| 11 Apr 58 | 1       | 3    | 1     | 387.775 | 196.842  | 196.900  | 399.398  |
| 11 Apr 58 | 1       | 3    | 2     | 372.214 | 197.406  | 197.649  | 398.904  |
| 7 May 58  | 1       | 1    | 1     | 343.204 | 196.676  | 197.912  | 397.413  |
| 7 May 58  | 1       | 2    | 1     | 39.296  | 197.070  | 197.610  | 1.695    |
| 7 May 58  | 1       | 4    | 1     | 16.491  | 197.231  | 197.323  | .709     |
| 8 May 58  | 3       | 1    | 1     | 56.150  | 196.385  | 197.701  | 2.790    |
| 8 May 58  | 3       | 2    | 1     | 39.594  | 197.859  | 198.260  | 1.247    |

\* Check Run

TABLE 21

GEOGRAPHIC POSITIONS OF EGLIN AFB RANGE LIGHTS

| Point No. | $\phi$          | $\lambda$       | H<br>(meters) |
|-----------|-----------------|-----------------|---------------|
| P1 C      | 30° 33' 00".502 | 86° 37' 19".432 | 57.362        |
| P1 D      | 30 37 57.288    | 86 41 02.675    | 42.654        |
| MID       | 30 35 01.732    | 86 39 59.275    | 52.6          |
| Coupland  | 30 35 29.220    | 86 39 10.464    | 67.132        |
| 9         | 30 34 50.65184  | 86 45 29.13569  | 54.589        |
| 12        | 30 30 44.55020  | 86 42 16.67930  | 35.826        |
| 13        | 30 35 44.44512  | 86 43 54.97437  | 57.994        |
| 16        | 30 31 33.41819  | 86 40 44.46125  | 38.555        |
| 17        | 30 36 38.08818  | 86 42 24.62201  | 52.734        |
| 20        | 30 32 35.78161  | 86 39 13.30891  | 48.590        |
| 21        | 30 37 30.49215  | 86 40 42.14681  | 47.789        |
| 24        | 30 33 24.86331  | 86 37 38.03528  | 53.409        |
| 25        | 30 38 26.67464  | 86 39 08.93853  | 39.923        |
| 28        | 30 34 18.27018  | 86 36 01.58315  | 53.995        |

TABLE 22

REDUCED COORDINATES OF EGLIN AFB RANGE LIGHTS

| Point No. | X          | <u>Meters</u> |         |
|-----------|------------|---------------|---------|
|           |            | Y             | Z       |
| P1 C      | -1535.0080 | -5452.0527    | 54.8438 |
| P1 D      | -1533.7141 | 5452.1625     | 40.1300 |
| MID       | 0.0000     | 0.0000        | 52.600  |
| Coupland  | -1551.7021 | 0.2159        | 66.9430 |
| 9         | 7550.7517  | 4511.0490     | 48.5297 |
| 12        | 7390.1380  | 4638.9399     | 29.8382 |
| 13        | 4544.5022  | 4528.9747     | 54.7692 |
| 16        | 4508.6016  | -4719.4158    | 35.2021 |
| 17        | 1626.1132  | 4599.2995     | 50.8666 |
| 20        | 1424.5047  | -4435.2196    | 46.8823 |
| 21        | -1541.7195 | 4462.3607     | 46.0349 |
| 24        | -1528.2878 | -4552.8420    | 51.5990 |
| 25        | -4565.8482 | 4558.5497     | 36.6468 |
| 28        | -4579.7276 | -4575.0096    | 50.7122 |

TABLE 23

P1 C - ASKANIA CAMERA ORIENTATIONS\*\*  
(enforcing  $X_0$   $Y_0$   $Z_0$ )

| Date   | Mission Pass | No. of Stars | m.e. Single Plate Meas. (microns) | $\alpha_g$<br>m.e. $\alpha_g$ | $\omega_g$<br>m.e. $\omega_g$ | $\kappa_g$<br>m.e. $\kappa_g$ | c<br>m.e. of c   | $x_p$<br>m.e. $x_p$ | $y_p$<br>m.e. of $y_p$ |
|--------|--------------|--------------|-----------------------------------|-------------------------------|-------------------------------|-------------------------------|------------------|---------------------|------------------------|
| 21 Mar | M1/P2        | 11           | 5.01                              | 23.590<br>.035                | -30.677<br>.018               | -55.864<br>.016               | .370482<br>10.34 | .167405<br>163.68   | .190811<br>129.36      |
| 21 Mar | M1/P2*       | 12           | 3.25                              | 23.626<br>.022                | -30.675<br>.011               | -56.173<br>.010               | .370475<br>6.68  | .164595<br>102.968  | .190592<br>82.292      |
| 21 Mar | M2/P1        | 15           | 5.18                              | 23.618<br>.017                | -30.547<br>.017               | -55.394<br>.008               | .370521<br>9.24  | .183943<br>108.98   | .193334<br>78.08       |
| 28 Mar | M2/P2        | 17           | 5.77                              | 23.634<br>.019                | -30.569<br>.020               | -55.880<br>.009               | .370460<br>11.27 | .167160<br>132.14   | .190675<br>77.55       |
| 10 Apr | M3/P1        | 15           | 5.35                              | 19.416<br>.022                | -33.159<br>.028               | -64.670<br>.011               | .370511<br>10.93 | .168534<br>174.09   | .192291<br>95.36       |
| 10 Apr | M3/P1*       | 15           | 5.38                              | 19.421<br>.018                | -33.163<br>.026               | -64.337<br>.009               | .370506<br>10.78 | .164543<br>151.64   | .189922<br>94.12       |
| 11 Apr | M1/P2        | 12           | 4.08                              | 19.446<br>.024                | -33.334<br>.020               | -64.666<br>.012               | .370532<br>9.46  | .164670<br>149.30   | .190245<br>82.79       |
| 11 Apr | M1/P3        | 14           | 5.40                              | 19.525<br>.032                | -33.207<br>.023               | -64.098<br>.016               | .370555<br>10.57 | .164695<br>185.48   | .190420<br>102.47      |

TABLE 23 (continued)

P1 C - ASKANIA CAMERA ORIENTATIONS  
(enforcing  $X_0$   $Y_0$   $Z_0$ )

| Date  | Mission Pass | No. of Stars | m.e. Single Plate Meas. (microns) | $\alpha_g$<br>m.e. $\alpha_g$ | $\omega_g$<br>m.e. $\omega_g$ | $\kappa_g$<br>m.e. $\kappa_g$ | c<br>m.e. of c   | $x_p$<br>m.e. $x_p$ | $y_p$<br>m.e. of $y_p$ |
|-------|--------------|--------------|-----------------------------------|-------------------------------|-------------------------------|-------------------------------|------------------|---------------------|------------------------|
| 7 May | M1/P1        | 11           | 4.98                              | 24.374<br>.023                | -35.260<br>.028               | -57.608<br>.012               | .370507<br>11.57 | .166636<br>155.38   | .195186<br>122.67      |
| 7 May | M1/P2        | 6            | 9.80                              | 24.340<br>.061                | -35.245<br>.074               | -57.353<br>.032               | .370553<br>30.04 | .065545<br>448.78   | .093601<br>285.35      |
| 7 May | M1/P4        | 8            | 6.26                              | 24.406<br>.025                | -35.167<br>.028               | -56.008<br>.013               | .370541<br>14.17 | .064253<br>168.89   | .094892<br>120.94      |
| 8 May | M3/P1        | 14           | 4.41                              | 24.428<br>.027                | -35.263<br>.020               | -59.082<br>.014               | .370477<br>10.18 | .166574<br>139.67   | .189841<br>114.70      |
| 8 May | M3/P2        | 7            | 8.60                              | 24.296<br>.056                | -35.172<br>.046               | -57.133<br>.030               | .370493<br>24.22 | .062757<br>328.21   | .090008<br>214.04      |

\* Check Runs

\*\*  $x_p$  and  $y_p$  values are not reduced to a common zero.

c,  $x_p$  and  $y_p$  given in meters

m.e. of c,  $x_p$  and  $y_p$  given in microns

TABLE 24

P1 D - ASKANIA CAMERA ORIENTATIONS\*\*  
 (enforcing  $X_o$   $Y_o$   $Z_o$ )

| Date   | Mission<br>Pass | No. of<br>Stars | m.e. Single<br>Plate Meas.<br>(microns) | $\alpha_g$<br>m.e. $\alpha_g$ | $\omega_g$<br>m.e. $\omega_g$ | $\kappa_g$<br>m.e. $\kappa_g$ | c<br>m.e. of c   | $x_p$<br>m.e. $x_p$ | $y_p$<br>m.e. $y_p$ |
|--------|-----------------|-----------------|-----------------------------------------|-------------------------------|-------------------------------|-------------------------------|------------------|---------------------|---------------------|
| 21 Mar | M1/P2           | 10              | 4.73                                    | -37.355<br>.032               | 6.839<br>.028                 | 189.818<br>.004               | .370485<br>14.18 | .166764<br>183.80   | .191342<br>166.22   |
| 21 Mar | M1/P2*          | 11              | 4.72                                    | -37.375<br>.028               | 6.856<br>.027                 | 189.256<br>.004               | .370466<br>13.08 | .165564<br>164.79   | .189255<br>161.64   |
| 21 Mar | M2/P1           | 10              | 5.60                                    | -37.533<br>.033               | 6.914<br>.026                 | 190.216<br>.004               | .370340<br>14.42 | .184110<br>195.31   | .200593<br>147.74   |
| 28 Mar | M2/P2           | 11              | 5.04                                    | -37.583<br>.034               | 6.853<br>.022                 | 190.402<br>.004               | .370292<br>13.98 | .170035<br>202.21   | .193083<br>121.82   |
| 10 Apr | M3/P1           | 15              | 4.41                                    | -37.939<br>.023               | 2.328<br>.014                 | 195.917<br>.002               | .370330<br>9.95  | .166935<br>134.61   | .190575<br>80.93    |
| 10 Apr | M3/P1*          | 15              | 5.73                                    | -37.919<br>.030               | 2.310<br>.018                 | 195.839<br>.002               | .370343<br>12.87 | .165784<br>174.60   | .188454<br>105.10   |
| 11 Apr | M1/P2           | 11              | 5.22                                    | -37.968<br>.029               | 2.238<br>.021                 | 196.684<br>.002               | .370446<br>13.24 | .163428<br>166.82   | .191018<br>126.48   |
| 11 Apr | M1/P3           | 13              | 5.04                                    | -37.971<br>.025               | 2.326<br>.017                 | 195.587<br>.002               | .370336<br>10.44 | .165162<br>147.76   | .189635<br>98.88    |

TABLE 24 (continued)

P1 D -- ASKANIA CAMERA ORIENTATIONS\*\*  
(enforcing  $X_o Y_o Z_o$ )

| Date  | Mission<br>Pass | No. of<br>Stars | m.e. Single<br>Plate Meas.<br>(microns) | $\alpha_g$<br>m.e. $\alpha_g$ | $\omega_g$<br>m.e. $\omega_g$ | $\kappa_g$<br>m.e. $\kappa_g$ | c<br>m.e. of c   | $x_p$<br>m.e. $x_p$ | $y_p$<br>m.e. $y_p$ |
|-------|-----------------|-----------------|-----------------------------------------|-------------------------------|-------------------------------|-------------------------------|------------------|---------------------|---------------------|
| 7 May | M1/P1           | 7               | 6.63                                    | -41.756<br>.041               | 4.960<br>.028                 | 194.397<br>.004               | .370356<br>20.62 | .079606<br>232.21   | .097484<br>174.17   |
| 7 May | M1/P2           | 7               | 8.58                                    | -41.726<br>.051               | 4.970<br>.037                 | 194.898<br>.005               | .370350<br>25.39 | .063210<br>304.10   | .095390<br>205.30   |
| 7 May | M1/P4           | 7               | 8.51                                    | -41.810<br>.042               | 5.020<br>.034                 | 195.526<br>.005               | .370300<br>21.16 | .065602<br>244.59   | .094690<br>199.07   |
| 8 May | M3/P1           | 13              | 3.52                                    | -41.850<br>.016               | 5.022<br>.013                 | 192.753<br>.002               | .370343<br>7.46  | .164199<br>93.57    | .188992<br>72.30    |
| 8 May | M3/P2           | 7               | 7.22                                    | -41.775<br>.031               | 4.855<br>.028                 | 194.804<br>.004               | .370421<br>17.16 | .062010<br>182.65   | .088861<br>159.83   |

\* Check Runs

\*\*  $x_p$  and  $y_p$  values are not reduced to a common zero.c  $x_p y_p$  given in metersm.e. of c  $x_p$  and  $y_p$  given in microns

TABLE 25

RELATIVE TIMES OF EVENTS  
(SECONDS)

|                   | 21 Mar<br>M1/P2 | 21 Mar<br>M2/P1 | 28 Mar<br>M2/P2 | 10 Apr<br>M3/P1-R1 | 11 Apr<br>M1/P2-R1 | 11 Apr<br>M1/P3-R1 | 7 May<br>M1/P1 | 7 May<br>M1/P2 | 7 May<br>M1/P4 | 8 May<br>M3/P1 | 8 May<br>M3/P2 |
|-------------------|-----------------|-----------------|-----------------|--------------------|--------------------|--------------------|----------------|----------------|----------------|----------------|----------------|
| RC-7 Flash        | .013262         | -.038453        | -.137893        | -.007635           | .499257            | -.049790           | -.000217       | -.047842       | -.006869       | -.003320       | -.036495       |
| Gun Trigger Pulse | .014500         | -.037300        | -.135300        | -.005100           | .501050            | -.047750           | .001500        | -.047250       | -.171900       | -.002200       | -.035640       |
| Gun Fire          | .016600         | -.035200        | -.133200        | -.003000           | .503150            | -.045650           | .003600        | -.045150       | -              | -.000100       | -.033540       |
| Start of Doppler  | .019500         | -.032500        | -.130000        | .000120            | .506300            | -.042350           | .006900        | -.041800       | -              | .003350        | -.030160       |
| 1st Micro         | .019904         | -.031922        | -.130627        | .000044            | .506291            | -.042585           | .007910        | -.039558       | .002180        | .004570        | -.028076       |
| 2nd Micro         | .023506         | -.028261        | -.126950        | .003712            | .509974            | -.038912           | .012104        | -.035329       | .006421        | .008707        | -.023875       |
| Burst             | .875700         | .937420         | None            | None               | None               | None               | None           | None           | None           | None           | None           |
| Reset             | .1237           | .1254           | .1366           | .14706             | .13755             | .14681             | .15471         | .165230        | .177457        | .18774         | .189060        |

1.43001\*

|             |    |        |        |        |         |         |         |         |         |         |         |         |
|-------------|----|--------|--------|--------|---------|---------|---------|---------|---------|---------|---------|---------|
| Post Survey | 1  | 1.9760 | 1.7830 | 2.2740 | 2.31585 | 1.79888 | 1.79704 | 2.80550 | 2.81670 | 2.82743 | 1.82113 | 2.01340 |
|             | 2  | 2.4767 | 2.2838 | 2.7746 | 2.80697 | 2.29808 | 2.29766 | None    | -       | 3.32809 | 2.30644 | 2.83440 |
|             | 3  | 2.9767 | 2.7838 | 3.2746 | 3.30693 | 2.79807 | 2.79764 | -       | -       | 3.82808 | 2.83300 | 3.33482 |
|             | 4  | 3.4766 | 3.2838 | 3.7746 | 3.80700 | 3.29798 | 3.29757 | -       | -       | 4.32810 | 3.33254 | 3.83486 |
|             | 5  | 3.9766 | 3.7838 | 4.2746 | 4.30697 | 3.79801 | 3.79759 | -       | -       | 4.82802 | 3.83351 | 4.33476 |
|             | 6  | -      | -      | -      | 4.80701 | 4.29803 | 4.29764 | -       | -       | -       | 4.33353 | -       |
|             | 7  | -      | -      | -      | 5.30698 | 4.79801 | 4.79762 | -       | -       | -       | 4.83353 | -       |
|             | 8  | -      | -      | -      | 5.80696 | 5.29800 | 5.29759 | -       | -       | -       | -       | -       |
|             | 9  | -      | -      | -      | 6.30697 | 5.79798 | 5.79760 | -       | -       | -       | -       | -       |
|             | 10 | -      | -      | -      | None    | 6.29803 | 6.29760 | -       | -       | -       | -       | -       |

## SECOND ROUND

|                   |       |          |          |          |
|-------------------|-------|----------|----------|----------|
| RC-7 Flash        | Rd. 2 | 8.772934 | 6.949830 | 6.897346 |
| Gun Trigger Pulse |       | 8.776300 | 6.951600 | 6.899450 |
| Gun Fire          |       | 8.778400 | 6.953700 | 6.901550 |
| Start of Doppler  |       | 8.781600 | 6.956900 | 6.904950 |
| 1st Micro         |       | 8.779677 | 6.957083 | 6.904647 |
| 2nd Micro         |       | 8.784340 | 6.960735 | 6.908320 |
| Burst             |       | 9.735400 | None     | None     |
| Reset             |       | 7.64680  | 7.14775  | 7.14774  |

7.60790\*  
8.79746\*

|             |   |          |          |          |
|-------------|---|----------|----------|----------|
| Post Survey | 1 | 9.30636  | 9.30017  | 8.79701  |
|             | 2 | 9.81540  | 9.79809  | 9.29758  |
|             | 3 | 10.30689 | 10.29804 | 9.79765  |
|             | 4 | 10.80703 | 10.79803 | 10.29760 |
|             | 5 | 11.30705 | 11.29812 | 10.79761 |
|             | 6 | 11.80696 | 11.79808 | 11.29758 |

\*Extra Flashes

TABLE 26

ASKANIA RESULTS\*  
(meters)

| 21 March M1/P2<br>Coordinates |         |         |         | 21 March M1/P2 Check Run<br>Coordinates |         |         |  |
|-------------------------------|---------|---------|---------|-----------------------------------------|---------|---------|--|
|                               | X       | Y       | Z       | X                                       | Y       | Z       |  |
| Burst                         | 2033.94 | -636.44 | 8869.91 | 2033.89                                 | -636.56 | 8870.17 |  |
| Flash RC-7                    | 1839.72 | -614.45 | 9602.65 | 1839.67                                 | -614.48 | 9602.30 |  |
| Reset                         | 1888.94 | -615.67 | 9602.59 | 1888.77                                 | -615.74 | 9602.09 |  |
| Post Survey 1                 | 2285.41 | -627.84 | 9603.90 | 2285.06                                 | -627.70 | 9603.27 |  |
| 2                             | 2405.17 | -631.57 | 9604.53 | 2404.99                                 | -631.46 | 9604.16 |  |
| 3                             | 2524.74 | -635.37 | 9604.54 | 2524.63                                 | -635.18 | 9604.38 |  |
| 4                             | 2644.17 | -639.21 | 9604.84 | 2643.96                                 | -639.00 | 9604.29 |  |
| 5                             | 2763.43 | -643.19 | 9605.22 | 2763.31                                 | -643.03 | 9604.86 |  |

| 21 March M2/P1<br>Coordinates |         |         |         | 28 March M2/P2<br>Coordinates |         |         |  |
|-------------------------------|---------|---------|---------|-------------------------------|---------|---------|--|
|                               | X       | Y       | Z       | X                             | Y       | Z       |  |
| Burst                         | 2256.41 | -501.91 | 8654.97 | 1956.55                       | -204.68 | 8841.73 |  |
| Flash RC-7                    | 2049.08 | -499.04 | 9486.39 | 1762.56                       | -206.60 | 9593.37 |  |
| Reset                         | 2086.57 | -496.46 | 9485.81 | 1820.67                       | -209.56 | 9595.13 |  |
| Post Survey 1                 | 2474.62 | -476.87 | 9488.42 | 2274.57                       | -234.58 | 9609.97 |  |
| 2                             | 2591.60 | -470.84 | 9488.97 | 2380.01                       | -240.47 | 9613.38 |  |
| 3                             | 2708.69 | -464.94 | 9489.94 | 2485.50                       | -246.50 | 9617.18 |  |
| 4                             | 2825.53 | -459.38 | 9490.05 | 2590.52                       | -252.47 | 9620.51 |  |
| 5                             | 2942.65 | -453.54 | 9490.93 | 2695.82                       | -258.42 | 9624.11 |  |
|                               |         |         |         | 2800.82                       | -264.59 | 9627.60 |  |

| 10 Apr M3/P1 Rd. 1<br>Coordinates |         |         |         | 10 Apr M3/P1 Rd. 1 Check Run<br>Coordinates |         |         |  |
|-----------------------------------|---------|---------|---------|---------------------------------------------|---------|---------|--|
|                                   | X       | Y       | Z       | X                                           | Y       | Z       |  |
| 1st Burst                         | 1955.32 | -737.25 | 8864.11 | 1955.40                                     | -737.25 | 8864.14 |  |
| Flash RC-7                        | 1775.00 | -688.40 | 9664.42 | 1775.13                                     | -688.47 | 9664.30 |  |
| Reset                             | 1805.85 | -689.72 | 9664.29 | 1805.90                                     | -689.92 | 9664.33 |  |
| Post Survey 1                     | 2242.42 | -711.26 | 9667.10 | 2242.42                                     | -711.50 | 9667.15 |  |
| 2                                 | 2341.22 | -716.29 | 9667.40 | 2341.27                                     | -716.41 | 9667.40 |  |
| 3                                 | 2442.26 | -721.38 | 9668.32 | 2442.07                                     | -721.52 | 9667.81 |  |
| 4                                 | 2542.93 | -726.57 | 9668.19 | 2542.66                                     | -726.61 | 9668.13 |  |
| 5                                 | 2643.85 | -731.71 | 9668.57 | 2643.72                                     | -731.80 | 9668.58 |  |
| 6                                 | 2744.53 | -737.04 | 9668.72 | 2744.41                                     | -737.19 | 9668.44 |  |
| 7                                 | 2845.53 | -742.37 | 9668.62 | 2845.31                                     | -742.60 | 9668.42 |  |
| 8                                 | 2946.20 | -747.99 | 9668.40 | 2946.01                                     | -747.99 | 9668.22 |  |
| 9                                 | 3047.24 | -753.62 | 9668.00 | 3047.10                                     | -753.85 | 9667.99 |  |

TABLE 26 (continued)  
ASKANIA RESULTS\*  
(meters)

| 10 Apr M3/P1 Rd. 2<br>Coordinates |         |         |         | 10 Apr M3/P1 Rd. 2 Check Run<br>Coordinates |         |         |         |
|-----------------------------------|---------|---------|---------|---------------------------------------------|---------|---------|---------|
|                                   | X       | Y       | Z       |                                             | X       | Y       | Z       |
| 2nd Burst                         | 3720.04 | -801.11 | 8870.15 |                                             | 3719.78 | -801.22 | 8869.53 |
| Flash RC-7                        | 3545.90 | -782.67 | 9668.28 |                                             | 3545.65 | -782.94 | 9667.98 |
| Reset                             | 3317.84 | -769.14 | 9668.08 |                                             | 3318.93 | -770.52 | 9668.78 |
| Post Survey 1                     | 3653.06 | -788.92 | 9667.87 |                                             | 3653.02 | -789.27 | 9667.75 |
| 2                                 | 3755.88 | -795.26 | 9668.16 |                                             | 3755.80 | -795.46 | 9667.82 |
| 3                                 | 3855.50 | -801.56 | 9668.27 |                                             | 3855.42 | -801.73 | 9668.00 |
| 4                                 | 3956.13 | -807.81 | 9668.45 |                                             | 3956.18 | -808.00 | 9668.28 |

| 11 Apr M1/P2 Rd. 1<br>Coordinates |         |         |         | 11 Apr M1/P3 Rd. 1<br>Coordinates |         |         |         |
|-----------------------------------|---------|---------|---------|-----------------------------------|---------|---------|---------|
|                                   | X       | Y       | Z       |                                   | X       | Y       | Z       |
| 1st Burst                         | 2597.11 | -262.29 | 7947.88 |                                   | 2012.21 | -573.79 | 8807.13 |
| RC-7 Flash                        | 2237.76 | -275.77 | 9550.79 |                                   | 1816.53 | -552.96 | 9643.26 |
| Reset                             | 2161.39 | -271.75 | 9550.09 |                                   | 1858.13 | -554.75 | 9643.74 |
| Post Survey 1                     | 2434.38 | -286.08 | 9553.77 |                                   | 2206.09 | -571.11 | 9645.13 |
| 2                                 | 2512.07 | -290.32 | 9554.67 |                                   | 2311.84 | -576.26 | 9645.54 |
| 3                                 | 2617.54 | -296.25 | 9555.77 |                                   | 2417.55 | -581.76 | 9645.30 |
| 4                                 | 2723.28 | -302.42 | 9557.34 |                                   | 2523.10 | -586.86 | 9645.11 |
| 5                                 | 2828.87 | -308.78 | 9558.40 |                                   | 2629.00 | -592.18 | 9644.44 |
| 6                                 | 2934.50 | -315.01 | 9559.43 |                                   | 2734.69 | -597.72 | 9644.08 |
| 7                                 | 3040.27 | -321.34 | 9560.61 |                                   | 2840.51 | -603.20 | 9643.90 |
| 8                                 | 3146.14 | -327.96 | 9561.25 |                                   | 2946.16 | -608.68 | 9642.79 |
| 9                                 | 3252.07 | -334.68 | 9562.42 |                                   | 3052.26 | -614.33 | 9641.99 |
| 10                                | 3357.98 | -341.46 | 9563.49 |                                   | 3157.97 | -619.88 | 9641.44 |
| 11                                | 3463.95 | -348.32 | 9564.86 |                                   |         |         |         |

| 11 Apr M1/P2 Rd. 2<br>Coordinates |         |         |         | 11 Apr M1/P3 Rd. 2<br>Coordinates |                |         |         |
|-----------------------------------|---------|---------|---------|-----------------------------------|----------------|---------|---------|
|                                   | X       | Y       | Z       |                                   | X              | Y       | Z       |
| 2nd Burst                         | 3785.27 | -370.56 | 8789.41 |                                   | 3469.42        | -655.88 | 8820.55 |
| RC-7 Flash                        | 3602.21 | -357.40 | 9566.35 |                                   | 3284.94        | -626.96 | 9640.21 |
| Reset                             | 3644.18 | -360.20 | 9566.56 |                                   | 3338.14        | -630.01 | 9639.69 |
| Post Survey 1                     | 4100.21 | -391.41 | 9570.74 |                                   | NOT MEASURABLE |         |         |
| 2                                 |         |         |         |                                   | 3794.08        | -655.53 | 9634.50 |
| 3                                 |         |         |         |                                   | 3900.33        | -661.76 | 9633.14 |
| 4                                 |         |         |         |                                   | 4006.41        | -667.59 | 9631.45 |

TABLE 26 (continued)

ASKANIA RESULTS\*  
(meters)

| 7 May M1/P1 Rd. 1<br>Coordinates |         |         |         | 7 May M1/P2 Rd. 1<br>Coordinates |         |         |         |
|----------------------------------|---------|---------|---------|----------------------------------|---------|---------|---------|
|                                  | X       | Y       | Z       |                                  | X       | Y       | Z       |
| Burst                            | 2424.41 | -600.48 | 8043.85 |                                  | 2206.63 | -206.72 | 7948.65 |
| RC-7 Flash                       | 1954.48 | -488.47 | 9692.68 |                                  | 1745.88 | -217.86 | 9539.18 |
| Reset                            | 1993.77 | -488.12 | 9692.96 |                                  | 1798.58 | -216.81 | 9540.21 |
| Post Survey 1                    | 2658.53 | -480.31 | 9697.08 |                                  | 2450.35 | -203.08 | 9554.32 |

| 7 May M1/P4 Rd. 1<br>Coordinates |         |         |         |  |  |  |  |
|----------------------------------|---------|---------|---------|--|--|--|--|
|                                  | X       | Y       | Z       |  |  |  |  |
| Burst                            | 2259.18 | -403.84 | 8035.36 |  |  |  |  |
| RC-7 Flash                       | 1787.59 | -395.14 | 9622.09 |  |  |  |  |
| Reset                            | 1832.61 | -393.73 | 9623.03 |  |  |  |  |
| Post Survey 1                    | 2479.39 | -372.94 | 9639.60 |  |  |  |  |
| 2                                | 2601.78 | -369.01 | 9642.74 |  |  |  |  |
| 3                                | 2723.76 | -365.44 | 9646.26 |  |  |  |  |
| 4                                | 2846.22 | -361.70 | 9650.70 |  |  |  |  |
| 5                                | 2968.18 | -358.04 | 9654.19 |  |  |  |  |

| 8 May M3/P1 Rd. 1<br>Coordinates |              |         |         | 8 May M3/P2 Rd. 1<br>Coordinates |         |         |         |
|----------------------------------|--------------|---------|---------|----------------------------------|---------|---------|---------|
|                                  | X            | Y       | Z       |                                  | X       | Y       | Z       |
| Burst                            | 2226.01      | -429.83 | 8125.42 |                                  | 2247.74 | -642.51 | 8086.27 |
| RC-7 Flash                       | 1805.07      | -461.06 | 9702.40 |                                  | 1827.49 | -646.74 | 9690.31 |
| Reset                            | 1850.03      | -462.07 | 9702.76 |                                  | 1880.32 | -646.77 | 9690.66 |
| Post Survey 1                    | 2234.35      | -469.56 | 9709.15 |                                  | 2311.04 | -648.10 | 9693.02 |
| 2                                | NOT MEASURED |         |         |                                  | 2503.59 | -649.37 | 9693.55 |
| 3                                | 2472.83      | -475.09 | 9713.90 |                                  | 2621.73 | -650.31 | 9693.99 |
| 4                                | 2590.59      | -478.30 | 9716.21 |                                  | 2739.57 | -651.28 | 9693.91 |
| 5                                | 2708.44      | -481.70 | 9718.81 |                                  | 2857.89 | -652.84 | 9693.50 |
| 6                                | 2826.21      | -485.30 | 9721.42 |                                  |         |         |         |
| 7                                | 2944.04      | -489.20 | 9724.10 |                                  |         |         |         |

\* Z Coordinates not corrected for refraction

TABLE 27  
CROSSWIND RESULTS

- (a) SPACE COORDINATES OF AIRCRAFT AT TIME OF FIRING:
1. Firing - Coordinates listed are for the position of the end of the gun barrel in meters at time of firing
  2. Burst - Coordinates listed are for position of burst in meters
- (b) AVERAGE VELOCITY OF AIRCRAFT: given in meters/sec
- (c) ORIENTATION OF THE GUN CENTER LINE IN SPACE AT THE MOMENT OF FIRING
- (d) MUZZLE VELOCITY:
- Muzzle velocity of the projectile as obtained by optical and electronic methods, 17.5 ft/sec constant bias not applied to electronic method
- (e) TIME EMERGENCE OF PROJECTILE:
- Elapsed time in seconds between time gun fires and projectile emerges from barrel
- (f) TIME OF BURST OF PROJECTILE:
- Elapsed time in seconds between time gun fires and burst occurs

| Date      |                                   | (a)     |         |         | (b)    | (c)                 |                     | (d)             |        | (e)           | (f)          |
|-----------|-----------------------------------|---------|---------|---------|--------|---------------------|---------------------|-----------------|--------|---------------|--------------|
| Miss/Pass | Round                             | X<br>m  | Y       | Z       | m/sec  | $\alpha^g$<br>$A^g$ | $\omega^g$<br>$V^g$ | Optics<br>m/sec | Elect  | Emerge<br>sec | Burst<br>sec |
| 21 Mar    | 1                                 | 1840.14 | -614.45 | 9601.44 | 239.06 | 198.35              | 399.80              | None            | 970.79 | .002900       | .859100      |
| M1/P2     | 2                                 | 2033.94 | -636.44 | 8868.61 |        | 392.45              | 198.34              |                 |        |               |              |
| 21 Mar    | 1                                 | 2049.46 | -499.04 | 9485.18 | 234.26 | 198.32              | .222                | None            | 999.14 | .002700       | .972620      |
| M2/P1     | 2                                 | 2256.41 | -501.91 | 8653.69 |        | 8.35                | 198.30              |                 |        |               |              |
| 28 Mar    | 1                                 | 1763.17 | -206.60 | 9592.17 | 211.02 | 196.73              | 2.19                | None            | 986.94 | .003200       | None         |
| M2/P2     | 2                                 | 1956.55 | -204.68 | 8840.45 |        | 37.62               | 196.07              |                 |        |               |              |
| 10 Apr    | 1                                 | 1775.51 | -688.40 | 9663.20 | 201.66 | 198.14              | 398.03              | None            | 957.68 | .003120       | None         |
| M3/P1-1   | 2                                 | 1955.32 | -737.25 | 8862.82 |        | 348.10              | 197.29              |                 |        |               |              |
| 10 Apr    | 1                                 | 3546.62 | -782.67 | 9666.90 | 202.23 | 198.55              | .65                 | None            | 964.08 | .003200       | .957000      |
| M3/P1-2   | 2                                 | 3720.04 | -801.11 | 8868.69 |        | 26.73               | 198.41              |                 |        |               |              |
| 11 Apr    | 1                                 | 2238.20 | -275.77 | 9549.59 | 211.81 | 196.71              | 1.94                | None            | 956.16 | .003150       | None         |
| M1/P2-1   | 2                                 | 2597.11 | -262.29 | 7946.68 |        | 33.91               | 196.19              |                 |        |               |              |
| 11 Apr    | 1                                 | 3602.65 | -357.40 | 9564.99 | 212.30 | 196.77              | .25                 | None            | 955.55 | .003200       | None         |
| M1/P2-2   | 2                                 | 3785.27 | -370.56 | 8787.96 |        | 4.84                | 196.76              |                 |        |               |              |
| 11 Apr    | 1                                 | 1817.03 | -552.96 | 9642.04 | 211.71 | 196.90              | 399.40              | None            | 951.59 | .003300       | None         |
| M1/P3-1   | 2                                 | 2012.21 | -573.79 | 8805.85 |        | 387.78              | 196.84              |                 |        |               |              |
| 11 Apr    | 1                                 | 3285.46 | -626.96 | 9638.87 | 212.60 | 197.65              | 398.90              | None            | 938.18 | .003400       | None         |
| M1/P3-2   | 2                                 | 3469.42 | -655.88 | 8819.13 |        | 372.21              | 197.41              |                 |        |               |              |
| 7 May     | 1                                 | 1955.06 | -488.47 | 9691.45 | 250.80 | 197.91              | 397.41              | 977.09          | 972.01 | .003300       | None         |
| M1/P1     | 2                                 | 2424.41 | -600.48 | 8042.57 |        | 343.20              | 196.68              |                 |        |               |              |
| 7 May     | 1                                 | 1746.16 | -217.86 | 9537.99 | 245.58 | 197.61              | 1.70                | 957.68          | 954.64 | .003350       | None         |
| M1/P2     | 2                                 | 2206.63 | -206.72 | 7947.48 |        | 39.30               | 197.07              |                 |        |               |              |
| 7 May     | 1                                 | 1747.37 | -395.14 | 9620.88 | 244.49 | 197.32              | .71                 | 946.10          | None   | None          | None         |
| M1/P4     | 2                                 | 2259.18 | -403.84 | 8034.17 |        | 16.49               | 197.23              |                 |        |               |              |
| 7 May     | Missing flashes on Askania plates |         |         |         |        |                     |                     | 940.61          | 932.38 |               |              |
| M1/P5     |                                   |         |         |         |        |                     |                     |                 |        |               |              |
| 8 May     | 1                                 | 1805.45 | -461.06 | 9701.18 | 235.66 | 197.70              | 2.79                | None            | 966.22 | .003450       | None         |
| M3/P1     | 2                                 | 2226.01 | -429.83 | 8124.22 |        | 56.15               | 196.38              |                 |        |               |              |
| 8 May     | 1                                 | 1827.80 | -646.74 | 9689.09 | 235.78 | 198.26              | 1.25                | 961.95          | 956.77 | .003380       | None         |
| M3/P2     | 2                                 | 2247.74 | -642.51 | 8085.07 |        | 39.59               | 197.86              |                 |        |               |              |

TABLE 28

PROJECTILE VELOCITIES

(by Velocity Cameras and Corresponding P.V.M. Results)

|                               | 7 May    |          |          |          |  | 8 May    |
|-------------------------------|----------|----------|----------|----------|--|----------|
|                               | M1/P1    | M1/P2    | M1/P4    | M1/P5    |  | M3/P2    |
| Projectile @ $t_2$            |          |          |          |          |  |          |
| X                             | 97.4531  | 97.4585  | 97.4536  | 97.4626  |  | 97.4298  |
| Y                             | 96.6931  | 96.6921  | 96.6923  | 96.6908  |  | 96.7140  |
| Z                             | - .0910  | - .0536  | - .0142  | - .1343  |  | - .1588  |
| Projectile @ $t_1$            |          |          |          |          |  |          |
| X                             | 97.3827  | 97.3829  | 97.3829  | 97.3856  |  | 97.3608  |
| Y                             | 96.7023  | 96.7024  | 96.7024  | 96.7030  |  | 96.7006  |
| Z                             | 4.0063   | 3.9960   | 3.9973   | 3.8456   |  | 3.8822   |
| $\Delta X$                    | .0704    | .0756    | .0707    | .0770    |  | .0690    |
| $\Delta Y$                    | - .0092  | - .0103  | - .0101  | - .0122  |  | .0134    |
| $\Delta Z$                    | - 4.0973 | - 4.0496 | - 4.0115 | - 3.9799 |  | - 4.0410 |
| Distance                      | 4.0979   | 4.0503   | 4.0121   | 3.9807   |  | 4.0416   |
| Time (sec)                    | .004194  | .004229  | .004241  | .004232  |  | .004201  |
| Velocity meters/sec           | 977.1    | 957.7    | 946.1    | 940.6    |  | 962.0    |
| Velocity ft/sec               | 3205     | 3142     | 3140     | 3086     |  | 3156     |
| Electronic (P.V.M.<br>System) | 3189     | 3132     | None     | 3059     |  | 3139     |
| Diff. (ft/sec)                | 16       | 10       |          | 27       |  | 17       |

TABLE 29

| <u>Date</u>    | <u>PVM Value</u> | <u>Final Projectile Velocity ft/sec</u> |
|----------------|------------------|-----------------------------------------|
| 21 March 1/2   | 3185             | 3202                                    |
| 21 March 2/1   | 3278             | 3295                                    |
| 28 March 2/2   | 3238             | 3255                                    |
| 10 April 3/1-1 | 3142             | 3159                                    |
| 10 April 3/1-2 | 3163             | 3180                                    |
| 11 April 1/2-1 | 3137             | 3154                                    |
| 11 April 1/2-2 | 3135             | 3152                                    |
| 11 April 1/3-1 | 3122             | 3139                                    |
| 11 April 1/3-2 | 3078             | 3095                                    |
| 7 May 1/1      | 3189             | 3206                                    |
| 7 May 1/2      | 3132             | 3149                                    |
| 7 May 1/5      | 3059             | 3076                                    |
| 8 May 3/1      | 3170             | 3187                                    |
| 8 May 3/2      | 3139             | 3156                                    |

# DISTRIBUTION LIST

| <u>No. of<br/>Copies</u> | <u>Organization</u>                                                                                                                                                                                                         | <u>No. of<br/>Copies</u> | <u>Organization</u>                                                                                                                                                     |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                        | Chief of Ordnance<br>Department of the Army<br>Washington 25, D.C.<br>Attn: ORDTB - Bal Sec                                                                                                                                 | 3                        | Chief, Bureau of Naval Weapons<br>Department of the Navy<br>Washington 25, D.C.<br>Attn: DIS-33                                                                         |
| 2                        | Commanding Officer<br>Diamond Ordnance Fuze Laboratories<br>Washington 25, D.C.<br>Attn: ORDTL - 012<br>Mr. Francis E. Washer                                                                                               | 2                        | Commander<br>Naval Ordnance Laboratory<br>White Oak, Silver Spring 19<br>Maryland<br>Attn: Library                                                                      |
| 10                       | Commander<br>Armed Services Technical<br>Information Agency<br>Arlington Hall Station<br>Arlington 12, Virginia<br>Attn: TIPCR                                                                                              | 2                        | Commander<br>U.S. Naval Ordnance Test Station<br>China Lake, California<br>Attn: Technical Library<br><br>Of Interest to:<br><br>Mr. H.L. Newkirk<br>Dr. W.R. Haseltine |
| 10                       | Commander<br>British Army Staff<br>British Defence Staff (W)<br>3100 Massachusetts Avenue, N.W.<br>Washington 8, D.C.<br><br>Of Interest to:<br><br>Prof. E.H. Thompson<br>University College<br>London, W. C. 1<br>England | 2                        | Commander<br>U.S. Naval Weapons Laboratory<br>Dahlgren, Virginia<br><br>Of Interest to:<br><br>Dr. W.A. Kemper                                                          |
| 5                        | Canadian Army Staff<br>2450 Massachusetts Avenue<br>Washington 8, D.C.<br><br>Of Interest to:<br><br>National Research Council<br>of Canada<br>Ottawa 2, Ontario<br>Attn: Mr. T.J. Blachut<br>Mr. G.H. Schut                | 1                        | Commanding Officer<br>U.S. Naval Photographic<br>Interpretation Center<br>4301 Suitland Road<br>Washington 25, D.C.                                                     |
|                          |                                                                                                                                                                                                                             | 1                        | Hydrographer<br>U.S. Naval Hydrographic Office<br>Washington 25, D.C.                                                                                                   |
|                          |                                                                                                                                                                                                                             | 2                        | Commander<br>U.S. Naval Missile Center<br>Point Mugu, California                                                                                                        |

# DISTRIBUTION LIST

| <u>No. of<br/>Copies</u> | <u>Organization</u>                                                                                                                                   | <u>No. of<br/>Copies</u> | <u>Organization</u>                                                                                                                                                                                                                        |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                        | Director<br>U.S. Naval Research Laboratory<br>Washington 25, D.C.                                                                                     | 1                        | Commander<br>Rome Air Development Center<br>Griffiss Air Force Base<br>Rome, New York                                                                                                                                                      |
| 1                        | Commander<br>U.S. Naval Air Development Center<br>Johnsville, Pennsylvania                                                                            | 6                        | Commander<br>Wright Air Development Division<br>Wright-Patterson Air Force Base<br>Ohio<br>Attn: Aeronautical Research<br>Laboratory (1 cy)<br>WCLGH-4 (5 cys)                                                                             |
| 1                        | Commanding Officer<br>Naval Air Test Center<br>Patuxent River, Maryland                                                                               |                          |                                                                                                                                                                                                                                            |
| 1                        | Chief of Naval Operations<br>Department of the Navy<br>Washington 25, D.C.                                                                            | 3                        | Commanding Officer<br>Air Force Aeronautical Chart<br>Center<br>Washington 25, D.C.<br>Attn: Division of Photogrammetry                                                                                                                    |
| 1                        | Superintendent<br>U.S. Naval Observatory<br>34th and Massachusetts Avenue, N.W.<br>Washington 25, D.C.<br>Attn: Dr. William Markowitz                 | 1                        | Commander<br>U.S.A.F. Fighter Weapons School<br>Nellis Air Force Base, Nevada                                                                                                                                                              |
| 13                       | Commander<br>Air Proving Ground Center<br>Eglin Air Force Base, Florida<br>Attn: PGTRI (1 cy)<br>PGEES - Mr. W.A. Brown (2 cys)                       | 1                        | Commander<br>Aeronautical Chart and Information<br>Center<br>Air, Photographic and Charting<br>Service (MATS)<br>Second and Arsenal Streets<br>St. Louis 18, Missouri<br>Attn: Chief Photogrammetry,<br>Research Branch,<br>Mr. Edwin Roth |
| 1                        | Commander<br>Holloman Air Development Center,<br>SEB, FDL<br>Holloman Air Force Base, New Mexico                                                      |                          |                                                                                                                                                                                                                                            |
| 2                        | Commander<br>Air Force Missile Test Center<br>(AFMT Technical Library MU-135)<br>Patrick Air Force Base, Florida                                      | 1                        | Air Force Plant Representative<br>Office<br>Consolidated-Vultee Aircraft<br>Corporation<br>P.O. Box 371<br>Fort Worth, Texas                                                                                                               |
| 2                        | Commander<br>Air Force Cambridge Research<br>Center, ARDC<br>L.G. Hanscom Field<br>Bedford, Massachusetts<br>Attn: Geophysics Research<br>Directorate | 1                        | Air Force Plant Representative<br>General Electric Company<br>Room 327, Bldg. 22<br>1 River Road<br>Schenectady 5, New York                                                                                                                |

# DISTRIBUTION LIST

| <u>No. of<br/>Copies</u> | <u>Organization</u>                                                                                                                          | <u>No. of<br/>Copies</u> | <u>Organization</u>                                                                                                                                                                                                       |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                        | Air Force Plant Representative<br>Office<br>Lockheed Aircraft Corporation<br>Factory "A"<br>P.O. Box 551<br>Burbank, California              | 3                        | Commanding General<br>White Sands Missile Range<br>New Mexico<br>Attn: ORDBS-TS-TIB<br><br>Of Interest to:                                                                                                                |
| 1                        | Air Force Development Field<br>Representative<br>Massachusetts Institute of<br>Technology<br>68 Albany Street<br>Cambridge 39, Massachusetts |                          | Mr. Jed Durrenberger IRM                                                                                                                                                                                                  |
|                          |                                                                                                                                              | 5                        | Commanding General<br>Engineering Research and Development<br>Laboratories<br>U.S. Army<br>Fort Belvoir, Virginia<br>Attn: Mr. William C. Cude<br>Mr. D. Esten<br>Mr. Eldon Sewell<br>Mr. John T. Pennington<br>Mr. Matos |
| 1                        | Air Force Plant Representative<br>Office<br>The Martin Company<br>Baltimore, Maryland                                                        |                          |                                                                                                                                                                                                                           |
| 1                        | Air Force Plant Representative<br>Office<br>North American Aviation, Inc.<br>Los Angeles International Airport<br>Los Angeles 45, California | 1                        | Commanding Officer<br>Office of Ordnance Research<br>Box CM, Duke Station<br>Durham, North Carolina<br>Attn: Dr. Theodore W. Schmidt                                                                                      |
| 1                        | Air Force Plant Representative<br>Northrop Aircraft, Inc.<br>Department 3483<br>Hawthorne, California                                        | 4                        | Commanding Officer<br>Army Map Service<br>6500 Brooks Lane, N.W.<br>Washington 16, D.C.<br>Attn: Photogrammetric Division<br>Col. F.O. Diercks<br>Mr. A. Nowicki<br>Mr. J. Theis<br>Mr. Wm. M. Kaula                      |
| 1                        | Air Force Plant Representative<br>Office<br>Sperry Gyroscope Company<br>Great Neck, Long Island, New York                                    |                          |                                                                                                                                                                                                                           |
| 1                        | Commanding General<br>Army Rocket and Guided Missile<br>Agency<br>Redstone Arsenal, Alabama<br>Attn: Technical Library                       | 1                        | Commanding General<br>Ordnance Weapons Command<br>Rock Island, Illinois                                                                                                                                                   |
| 1                        | Commanding General<br>U.S. Army Signal Engineering<br>Laboratories<br>Fort Monmouth, New Jersey<br>Attn: Technical Documents Center          | 1                        | Jet Propulsion Laboratory<br>4800 Oak Grove Drive<br>Pasadena, California<br>Attn: Library                                                                                                                                |

# DISTRIBUTION LIST

| <u>No. of<br/>Copies</u> | <u>Organization</u>                                                                                                                                  | <u>No. of<br/>Copies</u> | <u>Organization</u>                                                                                                                                                                         |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                        | Director<br>National Aeronautics and Space<br>Administration<br>1520 H Street<br>Washington 25, D.C.<br>Attn: Dr. John O'Keefe                       | 4                        | Director<br>U.S. Coast and Geodetic Survey<br>Department of Commerce<br>Washington 25, D.C.<br>Attn: Commander L.W. Swanson<br>Mr. G.C. Tewinkel<br>Mr. Charles Whitten<br>Mr. L.G. Simmons |
| 1                        | Director<br>National Aeronautics and Space<br>Administration<br>Langley Research Center<br>Langley Field, Virginia<br>Attn: Mr. Richard M. Dickerson | 3                        | Director<br>U.S. Geological Survey<br>Washington 25, D.C.<br>Attn: Chief, Topographic Engineer<br>Mr. Russel K. Bean<br>Mr. R.E. Altenhofen                                                 |
| 1                        | NASA Goddard Space Center<br>Satellite Application Division<br>4555 Overlook Avenue, S.W.<br>Washington 25, D.C.<br>Attn: Dr. Nordberg               | 1                        | U.S. Atomic Energy Commission<br>Sandia Corporation<br>P.O. Box 5800<br>Albuquerque, New Mexico                                                                                             |
| 3                        | Director<br>George T. Marshall Research Center 1<br>Redstone Arsenal, Alabama<br>Attn: Dr. Ernst Stuhlinger<br>Dr. Hellmut Holzer<br>Dr. Burns       |                          | Director of Defense Research and<br>Engineering (OSD)<br>Director/Guided Missiles<br>The Pentagon<br>Washington 25, D.C.                                                                    |
| 1                        | National Academy of Science<br>Washington 25, D.C.<br>Attn: Dr. Pembroke J. Hart, Jr.                                                                | 2                        | A.C. Spark Plug Division<br>General Motors Corporation<br>1925 E. Kenilworth Place<br>Milwaukee 2, Wisconsin<br>Attn: Mr. H. Davis                                                          |
| 1                        | Director<br>National Bureau of Standards<br>Connecticut Avenue and Van Ness<br>Street, N.W.<br>Washington 25, D.C.<br>Attn: Dr. Irvine C. Gardner    | 1                        | Bausch and Lomb Optical Company<br>262 St. Paul Street<br>Rochester, New York<br>Attn: Mr. Heinz Gruner                                                                                     |
| 1                        | Director<br>National Science Foundation<br>Washington 25, D.C.<br>Attn: Technical Library                                                            |                          |                                                                                                                                                                                             |

# DISTRIBUTION LIST

| <u>No. of<br/>Copies</u> | <u>Organization</u>                                                                                                               | <u>No. of<br/>Copies</u> | <u>Organization</u>                                                                                                                                |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                        | Bendix Aviation Corporation<br>Computer Division<br>5630 Arbor Vitae Street<br>Los Angeles 45, California<br>Attn: V.A. van Praag | 1                        | RCA Service Company, Inc.<br>Patrick Air Force Base, Florida<br>Attn: RCA Data Reduction Group<br>Analysis Unit<br>Mr. Duane Brown                 |
| 1                        | Crosley Division<br>AVCO Manufacturing Corporation<br>2630 Glendale - Milford Road<br>Cincinnati 15, Ohio                         | 1                        | Ramo-Wooldridge Corporation<br>5730 Arbor Vitae Street<br>P.O. Box 45067 Airport Station<br>Los Angeles 45, California<br>Attn: Dr. E. Stern       |
| 1                        | The Emerson Electric Manufacturing<br>Company<br>8100 Florissant Avenue<br>St. Louis 21, Missouri<br>Attn: Mr. G. Hauser          | 1                        | Technical Operations, Inc.<br>South Avenue<br>Burlington, Massachusetts<br>Attn: Mr. Samuel S. Holland                                             |
| 1                        | General Mills, Inc.<br>1620 Central Avenue<br>Minneapolis 13, Minnesota                                                           | 1                        | Telecomputing Corporation<br>Engineering Services Division<br>Burbank, California                                                                  |
| 1                        | International Business Machine<br>Corporation<br>Endicott, New York<br>Attn: Mr. John V. Sharp                                    | 1                        | United Shoe Machinery Corporation<br>Balch Street<br>Beverly, Massachusetts<br>Attn: Mr. R.S. Parker                                               |
| 1                        | McDonnell Aircraft Corporation<br>P.O. Box 516<br>St. Louis 66, Missouri                                                          | 3                        | Wild Heerbrugg Instruments, Inc.<br>Main and Covert Streets<br>Port Washington, New York<br>Attn: Mr. K.E. Reynolds                                |
| 1                        | North American Aviation, Inc.<br>12214 Lakewood Boulevard<br>Downey, California<br>Attn: Mr. Jim Elms                             | 5                        | Zeiss - Aerotopograph<br>1308 Fort Hunt Road<br>Alexandria, Virginia<br>Attn: Mr. Marshall S. Wright                                               |
| 1                        | Philco Corporation<br>Western Development Laboratory<br>3875 Fabian Way<br>Palo Alto, California<br>Attn: Mr. Eric Besag          | 1                        | Mr. Robert Zurlinden<br>2118 - 37th Street, N.W.<br>Washington 7, D.C.                                                                             |
| 1                        | Photogrammetry, Inc.<br>922 Burlington Drive<br>Silver Spring, Maryland<br>Attn: Mr. Gomer T. McNeill                             | 1                        | Director<br>Astrophysical Observatory of the<br>Smithsonian Institute<br>60 Garden Street<br>Cambridge 38, Massachusetts<br>Attn: Dr. Fred Whipple |

# DISTRIBUTION LIST

| <u>No. of<br/>Copies</u> | <u>Organization</u>                                                                                                                                                                   | <u>No. of<br/>Copies</u> | <u>Organization</u>                                                                                                              |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| 1                        | Cornell University<br>School of Civil Engineering<br>Ithaca, New York<br>Attn: Prof. Arthur J. McNair<br>Center of Aerial<br>Photographic<br>Studies                                  | 1                        | Syracuse University<br>Department of Civil Engineering<br>Syracuse 10, New York<br>Attn: Photogrammetric Department              |
| 1                        | Lamont Geological Observatory<br>(Columbia University)<br>Palisades, New York<br>Attn: Dr. Maurice Ewing                                                                              | 1                        | University of Cincinnati Observatory<br>Cincinnati, Ohio<br>Attn: Dr. Paul Herget                                                |
| 1                        | Massachusetts Institute of<br>Technology<br>Department of Civil and Sanitary<br>Engineering<br>Director Photogrammetry Laboratory<br>Cambridge 39, Massachusetts<br>Attn: C.L. Miller | 2                        | University of Illinois<br>Department of Civil Engineering<br>Urbana, Illinois<br>Attn: Dr. H.M. Karana<br>Prof. Milton O. Schmid |
| 1                        | New Mexico State University<br>State College, New Mexico<br>Attn: Dr. George Gardiner                                                                                                 | 1                        | University of Pennsylvania<br>Computing Laboratory<br>Philadelphia, Pennsylvania<br>Attn: Mr. John B. Crozier                    |
| 2                        | Ohio State University<br>Mapping and Charting Research<br>Laboratory<br>Columbus, Ohio<br>Attn: Prof. Brandenberger<br>Prof. A.R. Robbins                                             | 1                        | University of Michigan<br>Ann Arbor, Michigan<br>Attn: Prof. Edward Young                                                        |
| 1                        | Princeton University<br>Department of Civil Engineering<br>Princeton, New Jersey<br>Attn: Prof. Sumner B. Irish                                                                       | 2                        | University of Texas<br>Defense Research Laboratory<br>P.O. Box 8029<br>University Station<br>Austin 12, Texas                    |
| 2                        | Syracuse University<br>L.C. Smith College of Engineering<br>Department of Civil Engineering<br>Syracuse 10, New York<br>Attn: Prof. Arthur Faulds<br>Prof. Paul G. Brennan            | 1                        | Mr. Frederick J. Doyle<br>Broadview Research Corporation<br>2139 Wisconsin Avenue, N.W.<br>Washington 7, D.C.                    |