

UNCLASSIFIED

AD NUMBER

AD824795

LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited. Document partially illegible.

FROM:

Distribution authorized to U.S. Gov't. agencies and their contractors; Critical Technology; DEC 1967. Other requests shall be referred to Air Force Technical Application Center, Washington, DC. Document partially illegible. This document contains export-controlled technical data.

AUTHORITY

usaf ltr, 28 feb 1972

THIS PAGE IS UNCLASSIFIED

AD824795

THE EFFECT OF THE NUMBER AND SPACING OF  
ELEMENTS ON THE EFFICIENCY OF LASA BEAMS

21 December 1967

Prepared For

AIR FORCE TECHNICAL APPLICATIONS CENTER  
Washington, D. C.

By

R. A. Hartenberger  
TELEDYNE, INC.

Under

Project VELA UNIFORM

Sponsored By

ADVANCED RESEARCH PROJECTS AGENCY  
Nuclear Test Detection Office  
ARPA Order No. 624

**STATEMENT #2 UNCLASSIFIED**

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of Chief AFTRC, Wash., D. C.



THE EFFECT OF THE NUMBER AND SPACING OF  
ELEMENTS ON THE EFFICIENCY OF LASA BEAMS

SEISMIC DATA LABORATORY REPORT NO. 203

AFTAC Project No.:	VELA T/6702
Project Title:	Seismic Data Laboratory
ARPA Order No.:	624
ARPA Program Code No.:	5810
Name of Contractor:	TELEDYNE INC.
Contract No.:	F 33657-67-C-1313
Date of Contract:	2 March 1967
Amount of Contract:	\$ 1,736,617
Contract Expiration Date:	1 March 1968
Project Manager:	William C. Dean (703) 836-7644

P. O. Box 334, Alexandria, Virginia

AVAILABILITY

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of Chief, AFTAC.

This research was supported by the Advanced Research Projects Agency, Nuclear Test Detection Office, under Project VELA-UNIFORM and accomplished under the technical direction of the Air Force Technical Applications Center under Contract F 33657-67-C-1313.

Neither the Advanced Research Projects Agency nor the Air Force Technical Applications Center will be responsible for information contained herein which may have been supplied by other organizations or contractors, and this document is subject to later revision as may be necessary.

## TABLE OF CONTENTS

	Page No.
ABSTRACT	1
INTRODUCTION	1
PROCEDURE	2
BEAMS	2
RESULTS	4
CONCLUSIONS	4
RECOMMENDATIONS	5
REFERENCES	5
TABLE	
FIGURES	

### LIST OF TABLES

	Table No.
Source Data	1

### LIST OF FIGURES

	Figure No.
LASA Configuration for N = 525	1
LASA Subarray Configuration for N = 17	2
LASA Subarray Configuration for N = 34	3
LASA Subarray Configuration for N = 51	4
LASA Subarray Configuration for N = 68	5
LASA Subarray Configuration for N = 119	6
LASA Configuration for N = 525	7
LASA Subarray Configuration for N = 525	8
Signal Loss by Beamforming LASA Recordings of the 19 March 1966 - Hokkaido Earthquake	9
RMS Noise Reduction by Beamforming LASA Recordings of the 19 March 1966 - Hokkaido Earthquake	10
S/N Improvement by Beamforming LASA Recordings of the 19 March 1966 - Hokkaido Earthquake	11
Average Signal Loss by Beamforming LASA Seismograms	12
Average RMS Noise Reduction by Beamforming LASA Seismograms	13
Average S/N Improvement by Beamforming LASA Seismograms	14
RMS Noise Levels on LASA Beams	15

## ABSTRACT

LASA short-period recordings of 8 teleseismic earthquakes were prefiltered and beamsteered on P-wave arrivals across the 200 km. aperture to establish the relationship between sensor spacing and beam efficiency in terms of noise reduction, signal loss, and S/N ratio improvement.

Results show that the combined effect of increasing the number of elements in a beam while simultaneously reducing inter-sensor spacing is to produce progressively less rms noise reduction and S/N gain relative to  $N^{1/2}$ .

The study further shows that beamforming each of the events in two ways, e.g., with 51 and 525 inputs, produces an average signal loss of ~4 db. Moreover, beaming the smaller number of traces reduces rms noise and improves S/N only about 1 db less than the 525-element beam. For the 51-element beam, the minimum sensor spacing was 6 km., the distance at which the short-period noise at LASA becomes incoherent.

## INTRODUCTION

This analysis was conducted in support of the VELA Seismological Center in an attempt to evaluate the effect of inter-sensor spacing on the efficiency of LASA beams. Specifically, we are interested in preserving the 200 km. aperture while determining the amount of signal loss, rms noise reduction, and signal-to-noise gain which is produced by beamforming various combinations of LASA traces. Our basic procedures include prefiltering, time-shifting, and summing.

The data are short-period recordings of P waves from eight teleseismic earthquakes which occurred during the period 21 November 1965 to 22 April 1966. These events, which represent a subset of those reported earlier by Chiburis and Hartenberger (1966), are described in Table 1. Source parameters were taken from P.D.E. cards published by the USC&GS.

## PROCEDURE

Each seismogram used in this study was detrended to remove the mean, demagnified to convert digital counts to equivalent earth motion at 1 cps, and prefiltered to the band 0.4 - 3.0 cps. In forming the beams, subarray data were time-shifted to the earliest arrival on the basis of apparent phase velocity and station-to-epicenter azimuth. Array data were shifted by applying travel-time differences corrected by observed average travel-time anomalies, for each epicentral area.

Signal amplitude is defined as half the maximum peak-to-trough amplitude occurring within an 8-second window. Noise amplitude is defined as the root-mean-square value obtained in a 50-second window ahead of the P arrival. Gains and losses, in decibels, are computed from the following formula:

$$\text{db} = 20 \log \left[ \frac{\text{value on beam output}}{\text{average input}} \right]$$

## BEAMS

Seismograms from one of the eight events, the 19 March 1966 Hokkaido earthquake, were beamformed six times. The beams were composed of 17, 34, 51, 68, 119, and 525 channels, corresponding to approximate minimum intersensor spacings,  $\Delta$ , of 12, 6, 6, 3, 3, and 0.5 kilometers. Figure 1 shows the 17 subarrays which contributed traces to the beams. The four subarrays comprising the "B" ring have been eliminated. Moreover, aside from the number of elements in the beams, all parameters for signal alignment were held constant, e.g., phase velocity, azimuth, travel-time differences, anomalies, and the time windows of the signal and the rms noise, were not changed. Figures 2 through 6 illustrate subarray configurations for the first five beams, while Figures 7 and 8 show array and subarray configurations for the beam containing all 525 inputs.

Recordings of each of the eight events shown in Table 1 were beamsteered twice by using 51 traces in the first beam and 525 channels in the second. In the case of the 51-element beam, three seismograms from each of the 17 subarrays were used (Figure 4). Minimum intersensor spacings for the 51 and 525-element beams were 6 kilometers and 0.5 kilometers, respectively. The amount of signal loss, rms noise reduction, and S/N produced by the events were averaged to obtain values which are discussed in the next section.

## RESULTS

Figures 9, 10, and 11 are plots of signal loss, rms noise reduction, and S/N gain, resulting from beamforming the Hokkaido event. Each figure shows gain or loss in decibels as a function of the number of beam inputs,  $N$ . As shown in Figure 9, the signal loss is 2 db for the 17-element beam, whereas the amount of signal loss for beams containing 34 or more traces is 3 db. This infers that imprecisions in beamforming the entire LASA are more significant than the inaccuracies resulting from time-shifting subarray data.

Figure 10, which shows rms noise reduction as a function of  $N$  for the Hokkaido event, illustrates that as  $N$  increases and  $\Delta$  decreases, the amount of noise reduction becomes less favorable relative to  $N^{\frac{1}{2}}$ . In fact, the advantage of the 525-element beam with respect to the much smaller 51-element beam is only 1 db. Moreover, the 119-trace beam performs equally as well as the largest beam.

S/N gain as a function of  $N$  for the Hokkaido earthquake is shown in Figure 11, in which the results reflect the combined effect of signal loss and noise reduction as discussed above; our interpretation need go no farther.

Figures 12 through 14 are plots of average values for signal loss, rms noise reduction, and S/N gain, as a function of  $N$ . We repeat that these values represent average results obtained from our set of eight events. The average signal loss shown in Figure 12 is about 4 db for both the 51-element and 525-element beams.

The average noise reduction produced by beamforming 51 channels, Figure 13, is very close to  $N^{\frac{1}{2}}$  and only 1 db less than that produced by the larger beam. Again we see that the combined effect of increasing  $N$  and simultaneously reducing  $\Delta$  to values less than 6 km. is to produce less noise cancellation relative to  $N^{\frac{1}{2}}$ . Previous work (Hartenberger and Shumway 1967) has shown that for spacing of 6 km. or more, the short-period noise at LASA is essentially incoherent.

As shown in Figure 14, S/N gain yielded by beaming 51 traces is only 1 db less than that produced by beamforming all 525 channels.

Figure 15 shows the rms noise level, in  $\mu\mu$ , as a function of event number. The solid dots represent values taken from outputs of 525-element beams, while the open circles are corresponding values for the smaller beam. The average noise level on the larger beam is 0.21  $\mu\mu$ , whereas the smaller beam average is 0.25  $\mu\mu$ .

## CONCLUSIONS

In an SDL study LASA prefiltered short-period recordings of 8 teleseismic events were beamsteered on the P arrival using a variable number of beam inputs. Our objective was to determine the efficiency of the beams with respect to the number of inputs and the spacing of sensors contributing to the beams. The following conclusions are based on that analysis:

1. The net effect of increasing the number of beam inputs while simultaneously decreasing sensor spacing is to produce progressively less rms noise reduction and S/N gain, relative to  $N^{1/2}$ .
2. Average signal loss amounts to 4 db. We attribute part of the loss (1 db?) to misalignment of P waves within sub-arrays. The remaining signal loss is due either to inaccurate array alignment or to differences in wave form across the LASA.
3. Beams composed of 51 traces reduce rms noise and improve S/N within 1 db of that produced by 525-element beams. The 51 elements were selected to have minimum sensor spacing greater than 6 km.

## RECOMMENDATIONS

In the study described above we discarded the "B" ring sub-arrays in determining the efficiency of LASA 51-element beams and thereby preserved the original 200 km. aperture. We are equally interested, however, in more efficient arrays requiring lower initial installation costs and less maintenance. Therefore, another analysis is suggested which should include the following:

1. The comparison of the results of this study with those produced by beamforming 51 traces recorded over the smaller area covered by the A, B, C, D and E subarrays (100 km. aperture). Moreover, we would further reduce the array size

by beaming 51 channels derived from the A, B, C and D sub-arrays (30 km. aperture) for an additional comparison.

2. Nine sensors comprising the B and D rings of each sub-array are being removed. This amounts to 189 sensors or 36% of the entire LASA. The effect of beaming outputs from the remaining 336 sensors (16/subarray) should be evaluated in the proposed study.

#### REFERENCES

Chiburis, E. F. and Hartenberger, R. A., 1966, "Signal-to-noise Ration Improvement by Time-Shifting and Summing LASA Seismograms", Report No. 164, Seismic Data Laboratory, Teledyne Incorporated, Alexandria, Virginia.

Hartenberger, R. A. and Shumway, R. H., 1967, "A Beamforming Study Using Outputs from the Extended E3 Subarray at the Montana LASA", Report No. 198, Seismic Data Laboratory, Teledyne Incorporated, Alexandria, Virginia.

EVENT NAME	DATE	ORIGIN TIME	LOCATION			DISTANCE		DEPTH IN KM	APPARENT VELOCITY	BACK AZIMUTH	CAL DATE	USC&GS m	NO. OF OUTPUTS USED
			LAT	LONG	DEG	KM							
KURILE	21 Nov 65	06:10:56.0	48.4N	154.7E	62.1	6902	33	16.6	311.9	11/21/65	4.7	525	
NO. COLOMBIA	21 Dec 65	12:25:43.0	06.9N	73.0W	48.8	5429	172	14.4	133.7	12/21/65	4.9	525	
ALASKA PENH.	30 Dec 65	03:02:59.0	54.1N	160.2W	34.5	3831	33	12.9	302.6	12/30/65	4.5	525	
SO. PERU	30 Dec 65	06:16:03.9	16.8S	71.2W	70.6	7854	118	18.2	144.4	12/30/65	5.7	525	
CHIAPAS, MEX.	22 Jan 66	07:36:49.3	17.4N	94.1W	30.9	3434	139	12.6	157.0	1/22/66	4.9	525	
HOKKAIDO	19 Mar 66	08:11:40.0	43.3N	145.8E	70.1	7794	11	18.1	312.4	3/19/65	5.6	525	
NO. COLOMBIA	21 Apr 66	08:18:23.9	06.9N	73.1W	48.8	5424	152	14.4	133.8	4/21/66	4.8	525	
KOOTAIK	22 Apr 66	10:15:51.0	56.9N	151.8W	29.5	3275	33	12.6	307.2	4/22/66	4.9	525	

Table 1. Source data

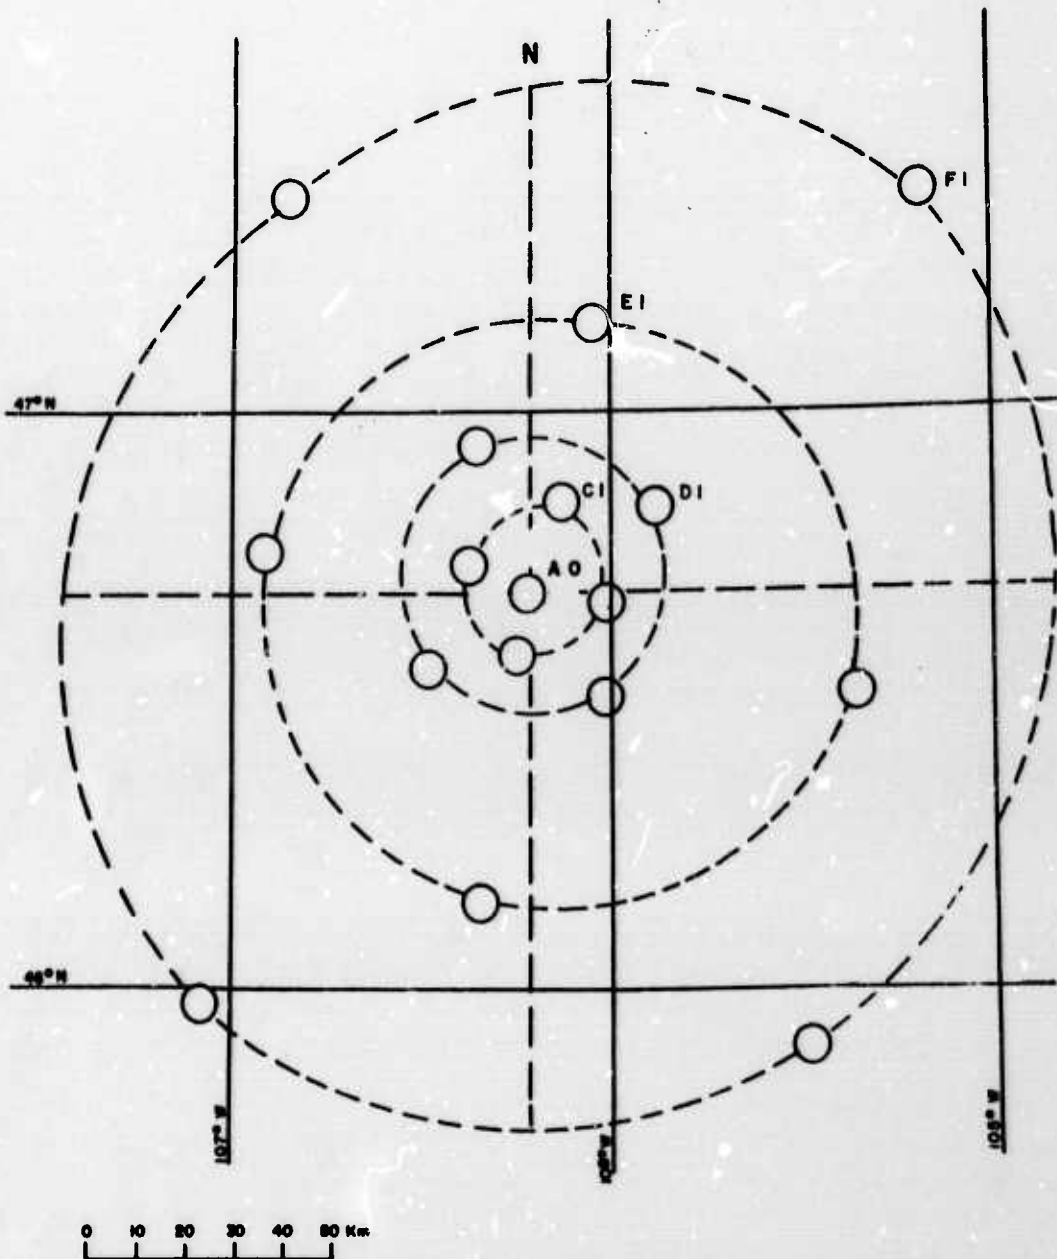


Figure 1. LASA Configuration for N #525

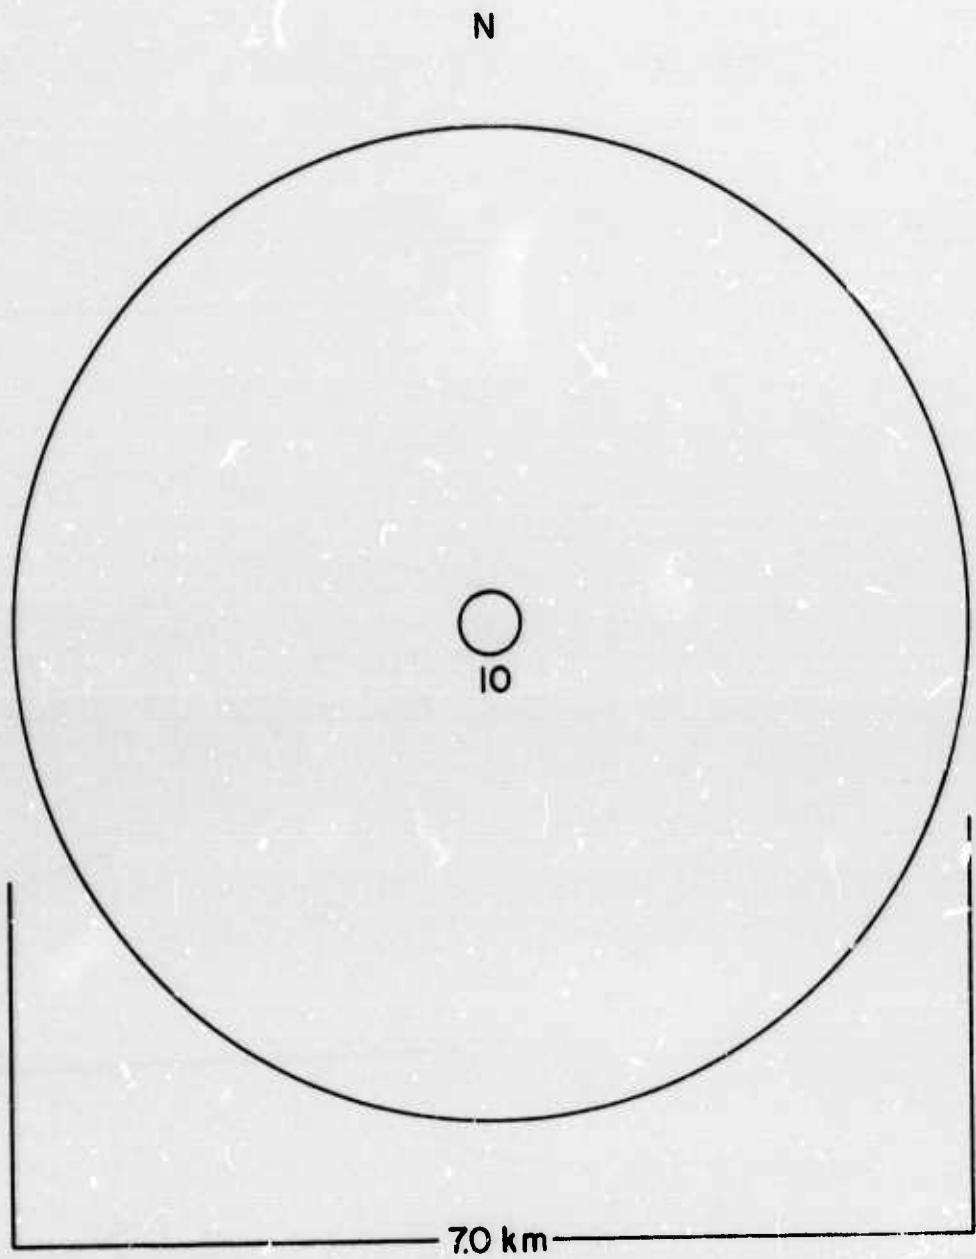


Figure 2. LASA Subarray Configuration for N=17

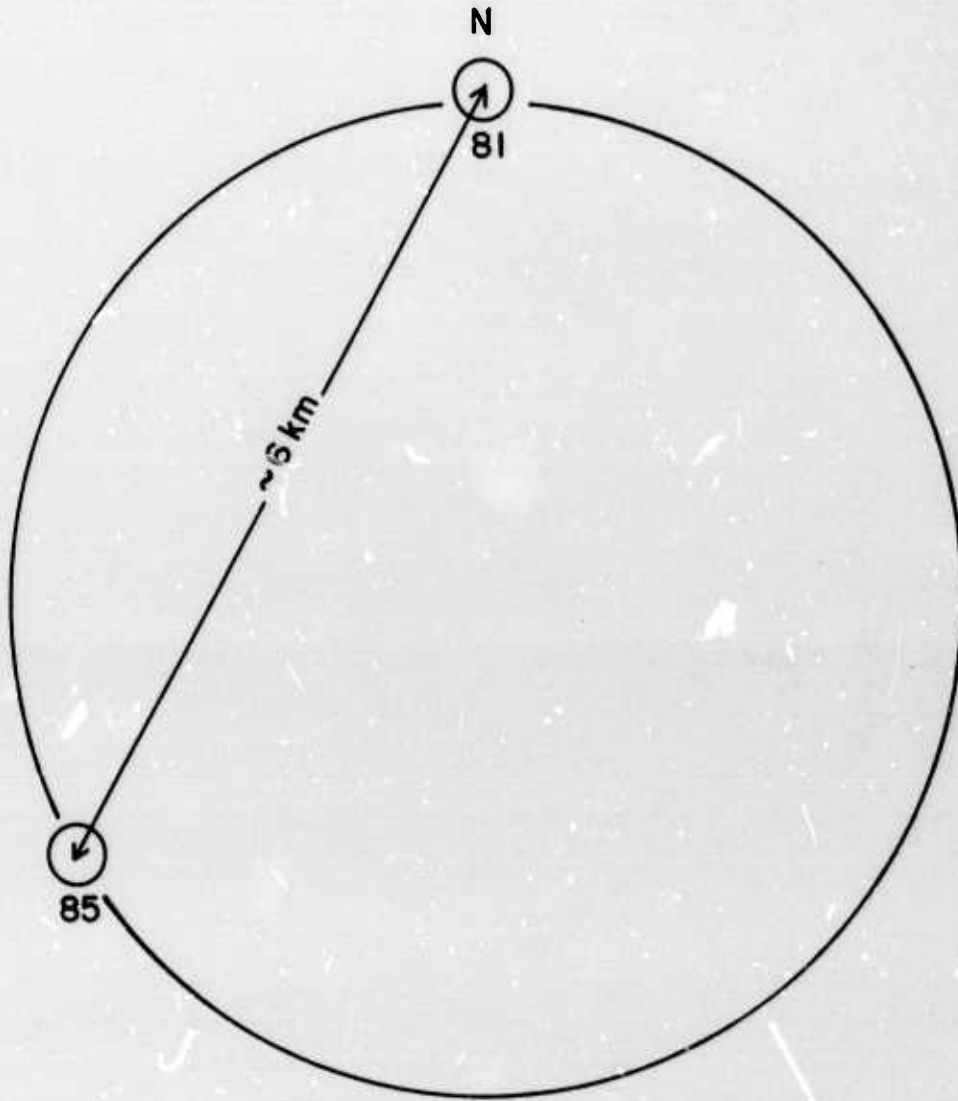


Figure 3. LASA Subarray Configuration for N=34

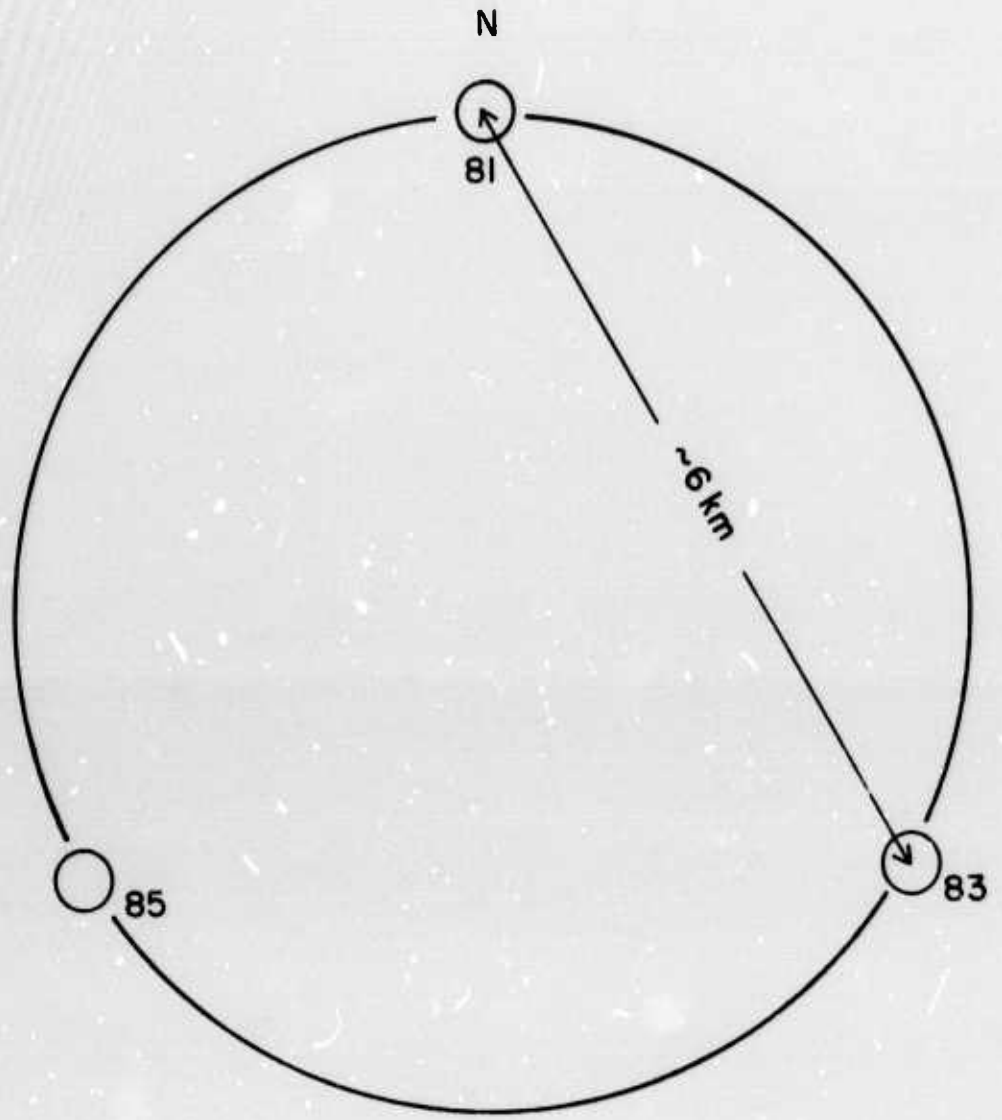


Figure 4. LASA Subarray Configuration for N=51

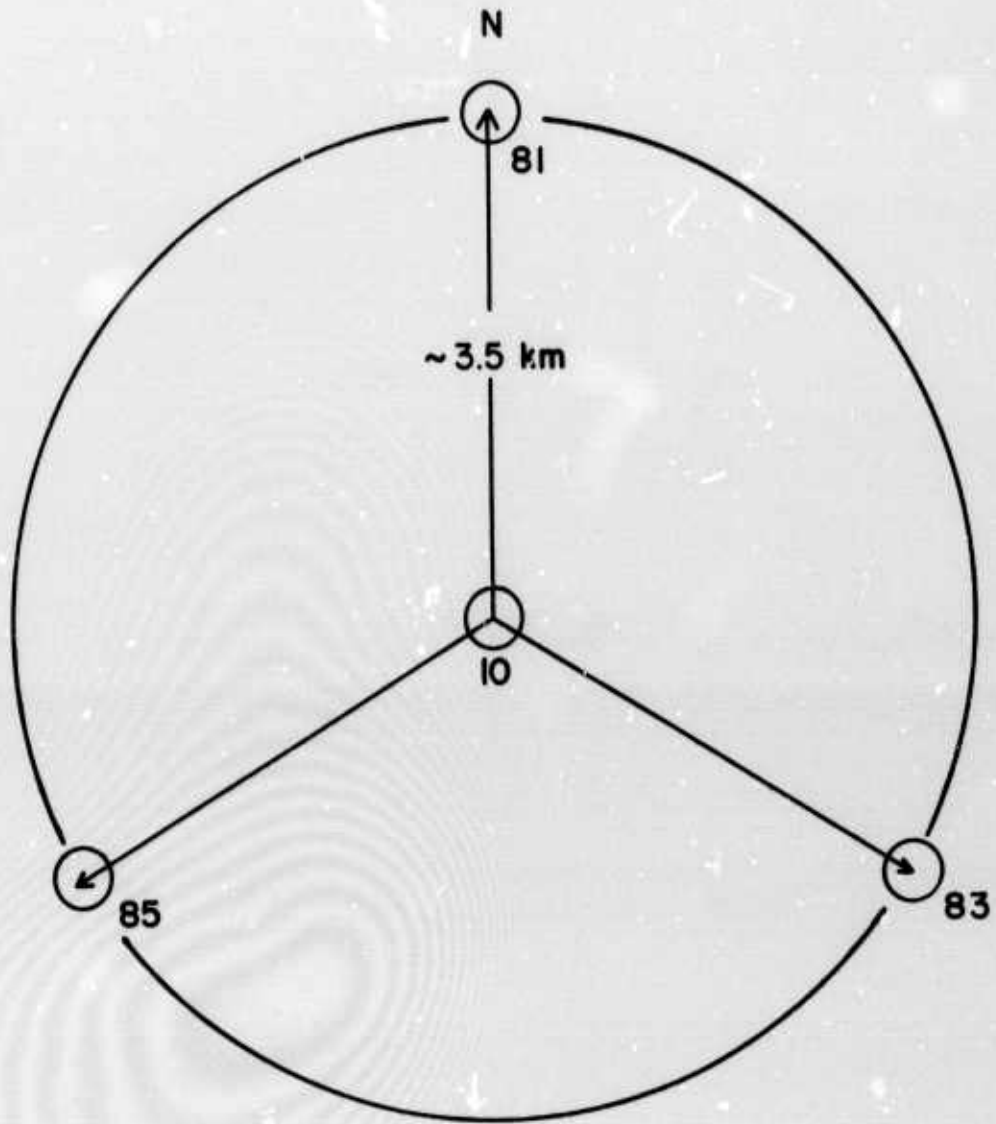


Figure 5. LASA Subarray Configuration for N=68

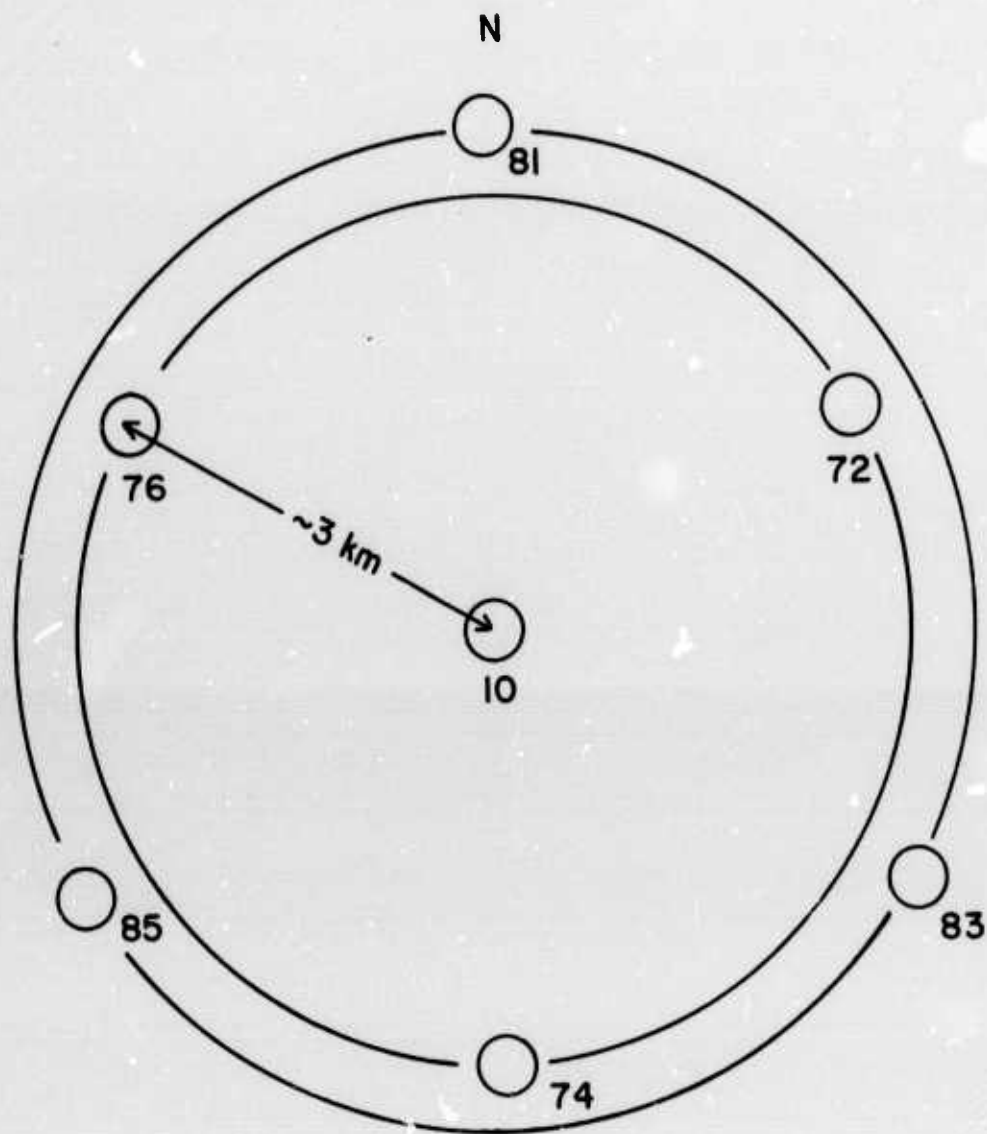


Figure 6. IASA Subarray Configuration for N=119

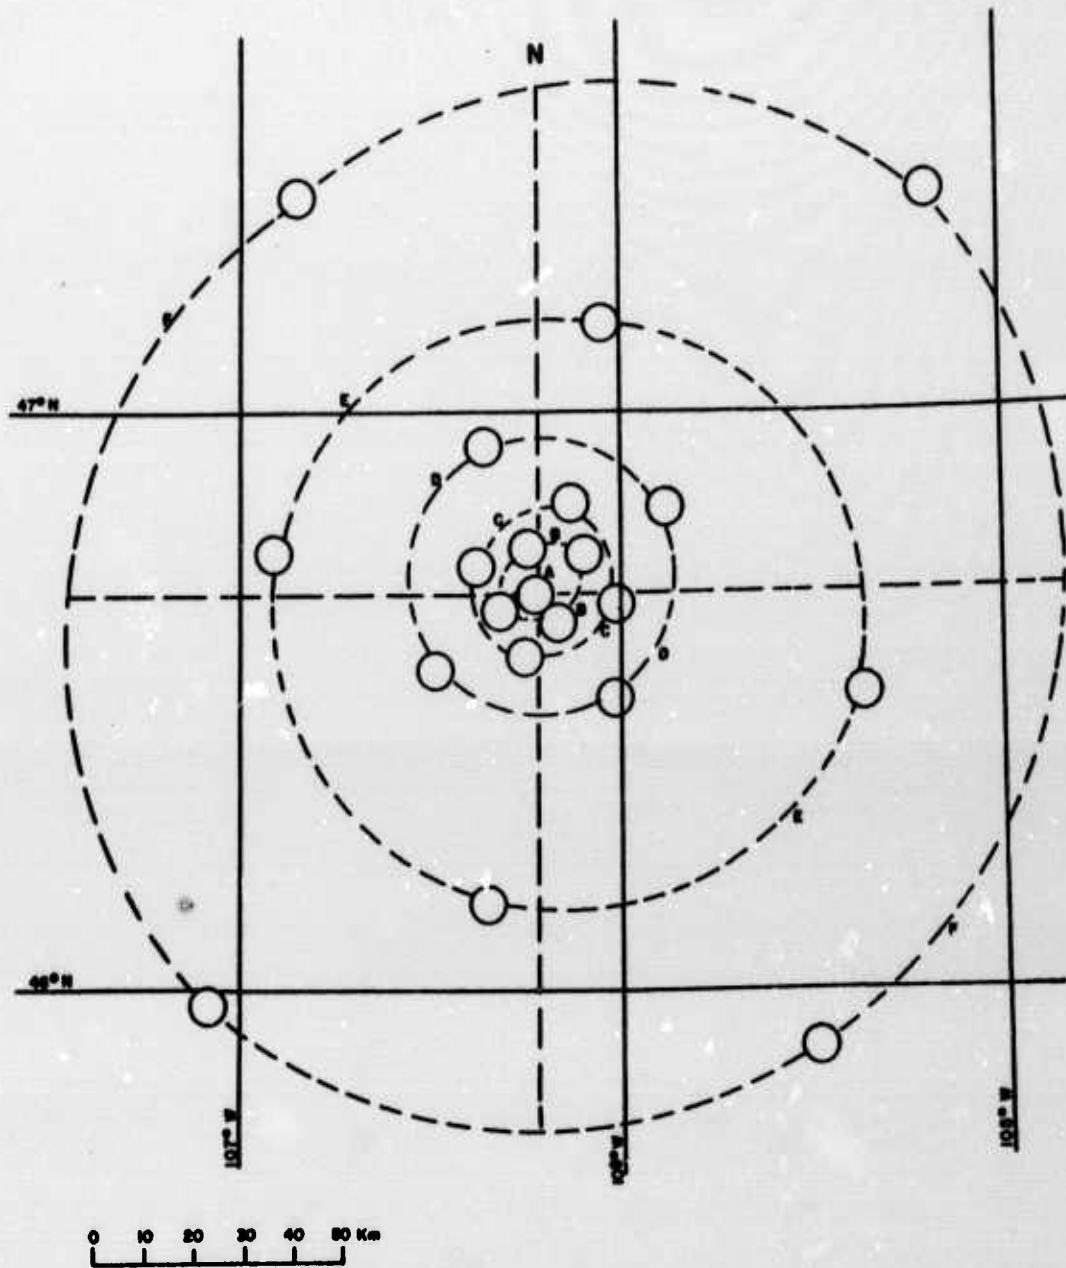


Figure 7. LASA Configuration for N=525

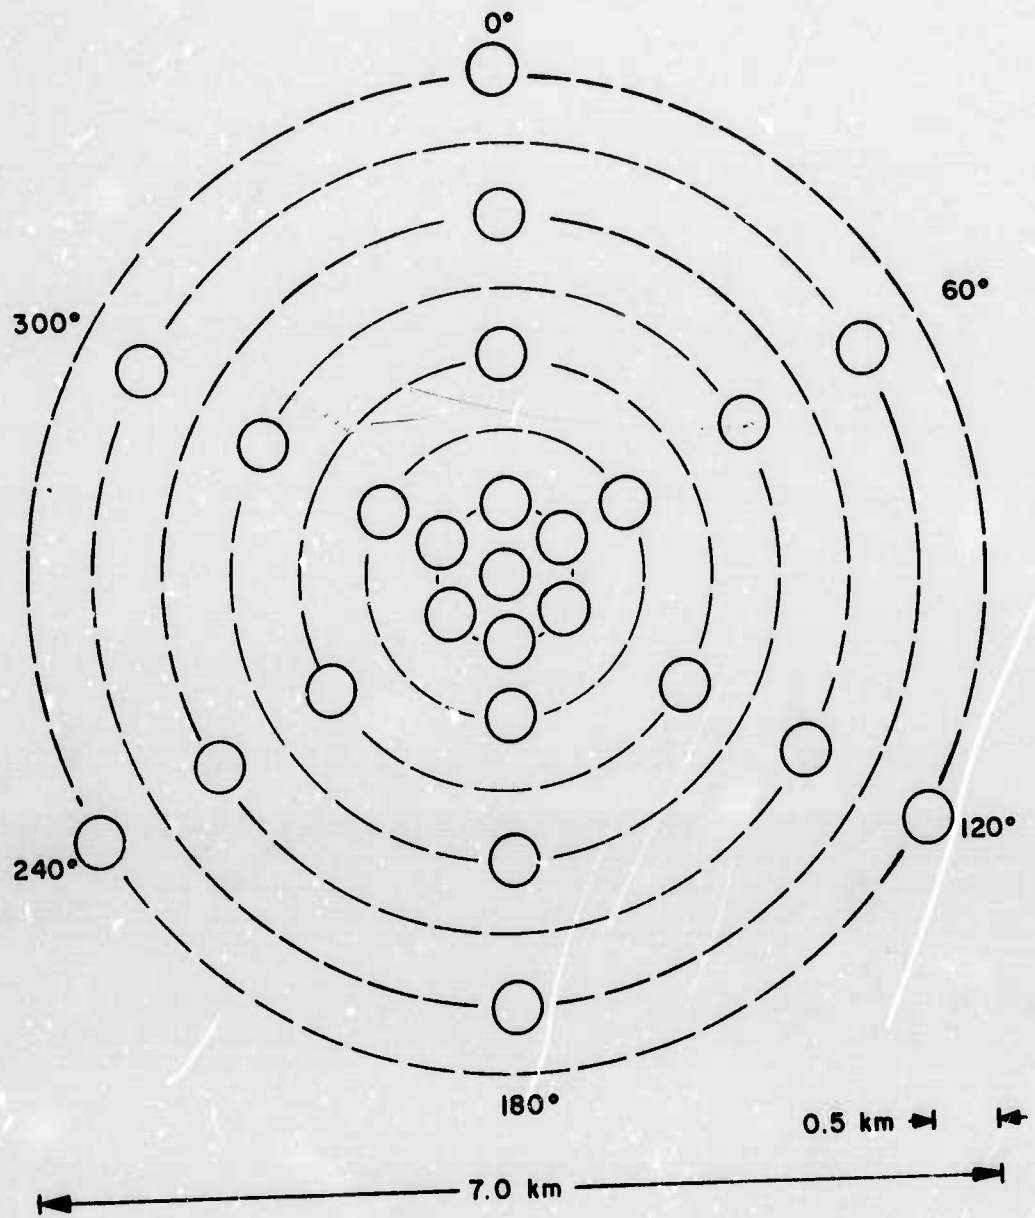


Figure 8. LASA Subarray Configuration for N=525



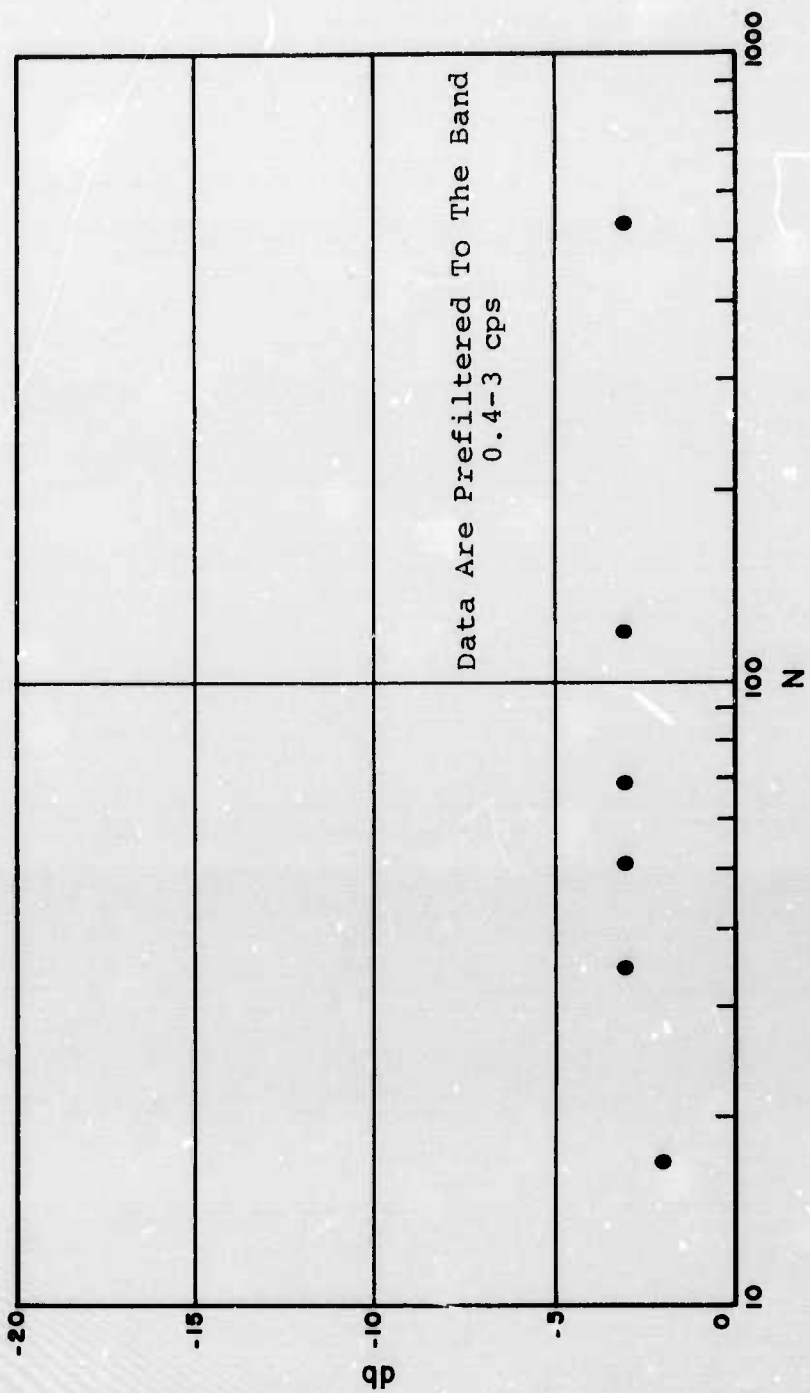


Figure 9. Signal Loss by Beamforming LASA Recordings Of The 19 March 1966 - Hokkaido Earthquake

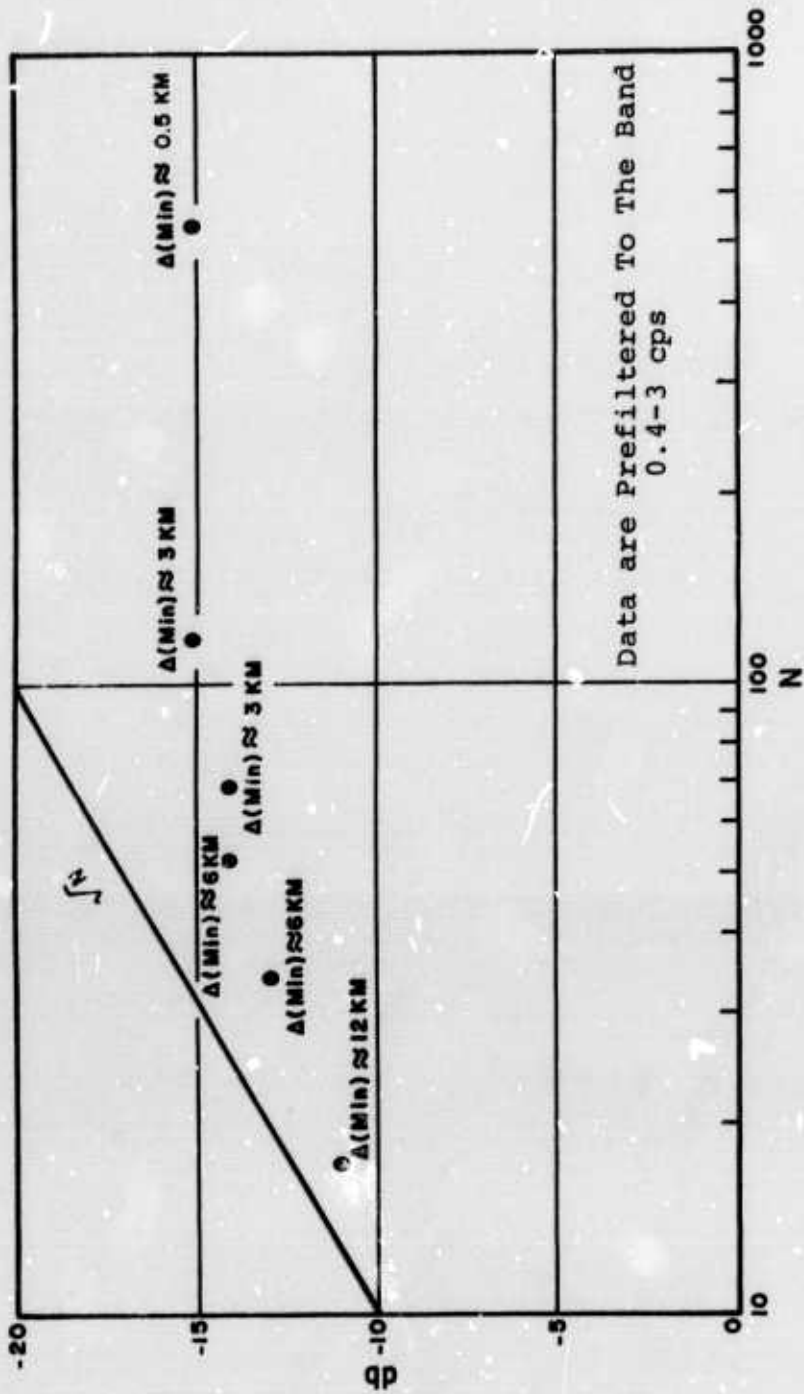

Data are Prefiltered To The Band  
0.4-3 cps

Figure 10. RMS Noise Reduction by Beamforming LASA  
Recordings of the 19 March 1966  
Hokkaido Earthquake

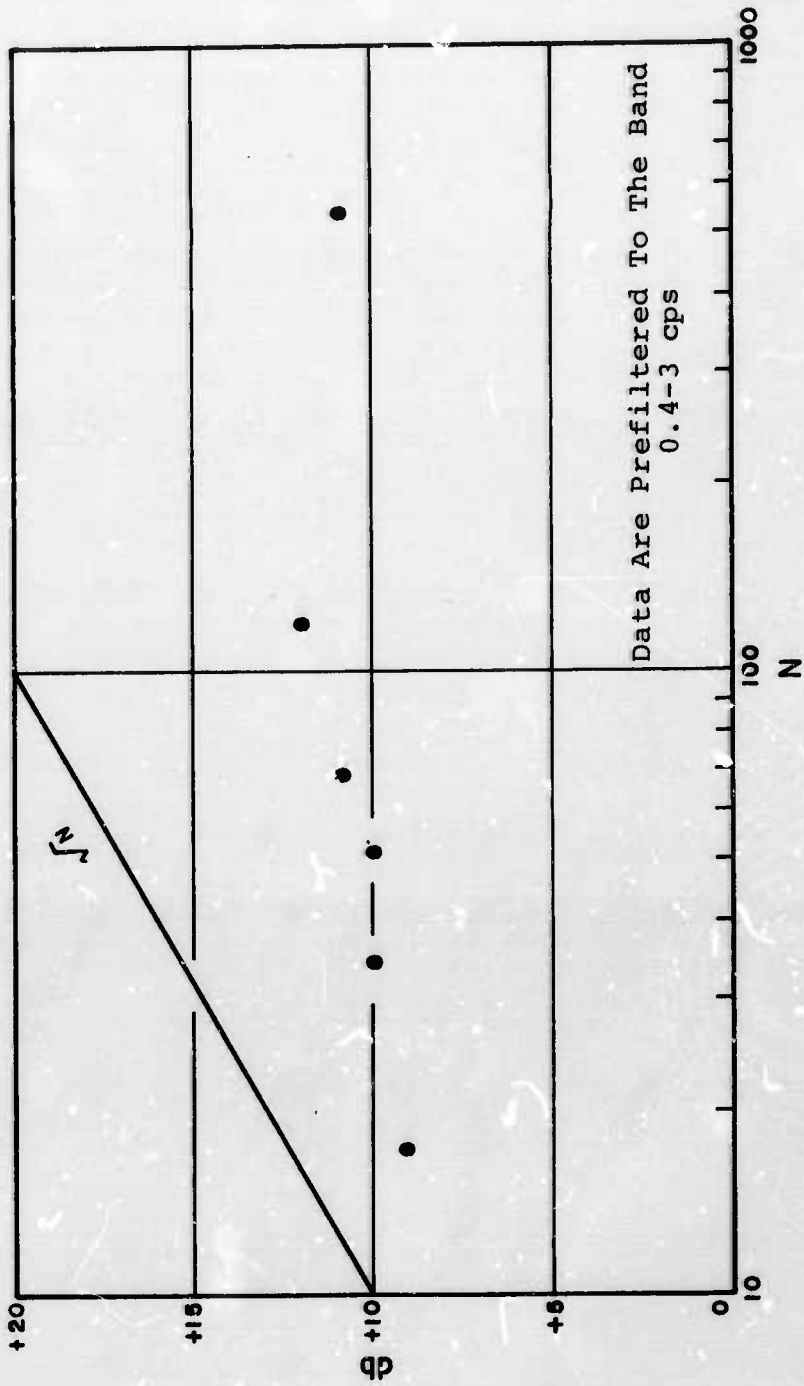

Data Are Prefiltered To The Band  
0.4-3 cps

Figure 11. S/N Improvement by Beamforming LASA Recordings of the 19 March 1966 Hokkaido Earthquake

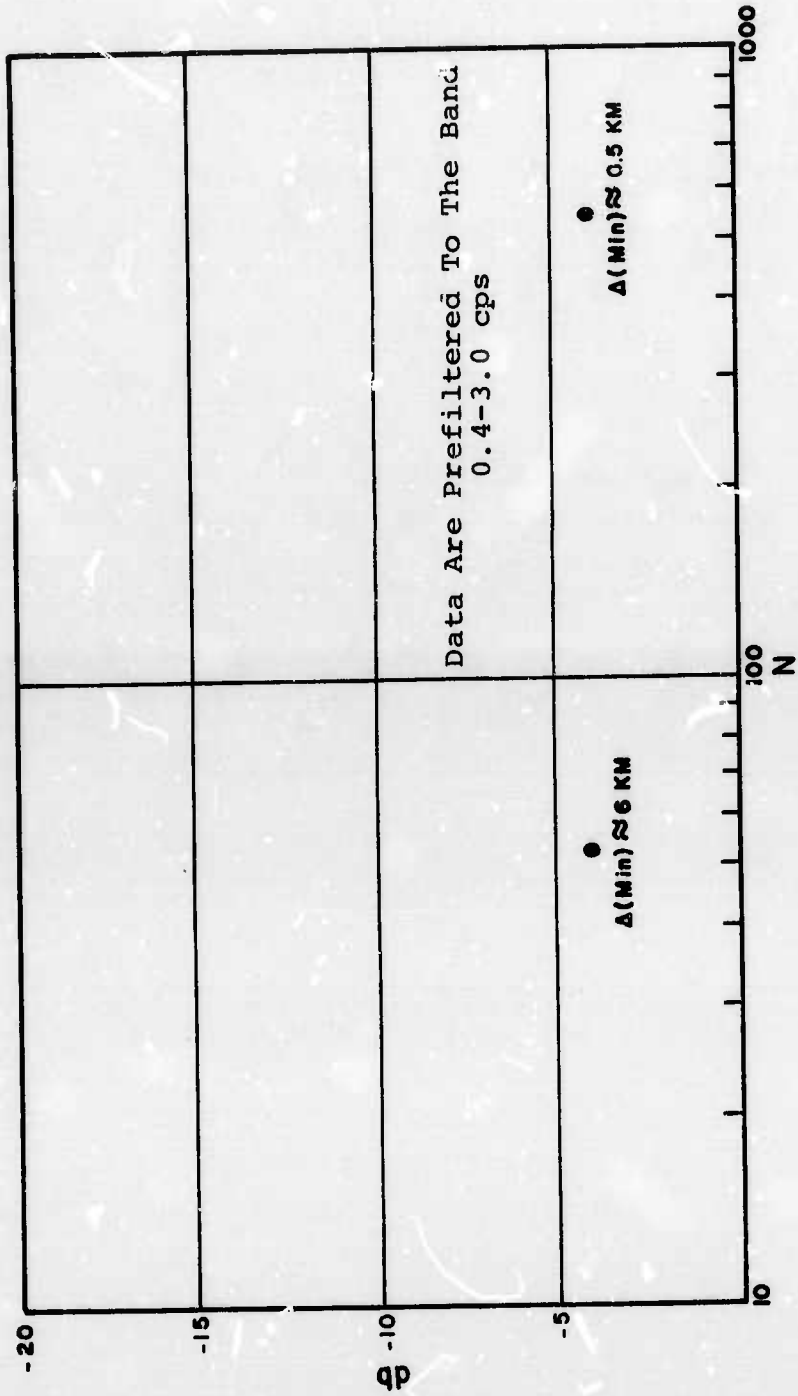


Figure 12. Average Signal Loss By Beamforming  
LASA Seismograms

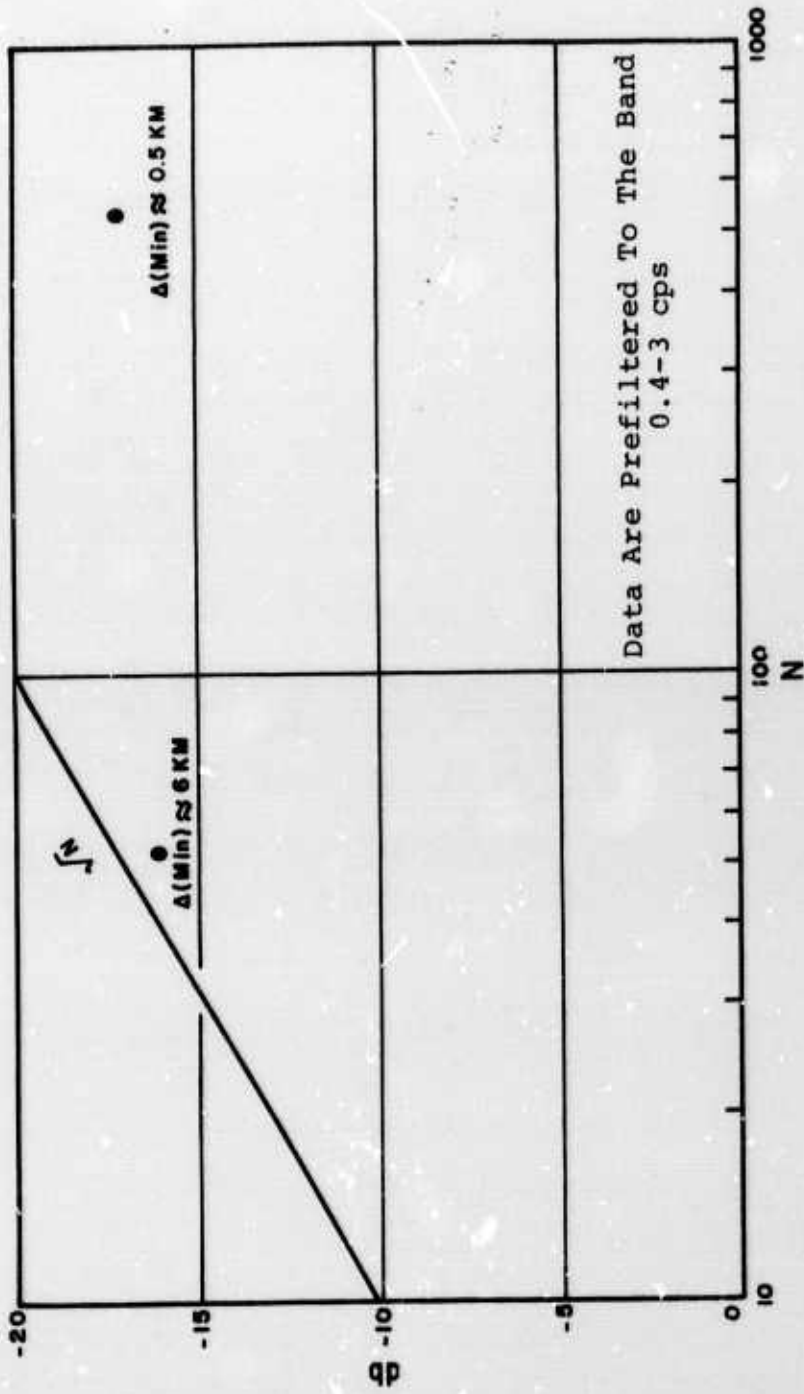


Figure 13. Average RMS Noise Reduction By Beamforming  
 LASA Seismograms

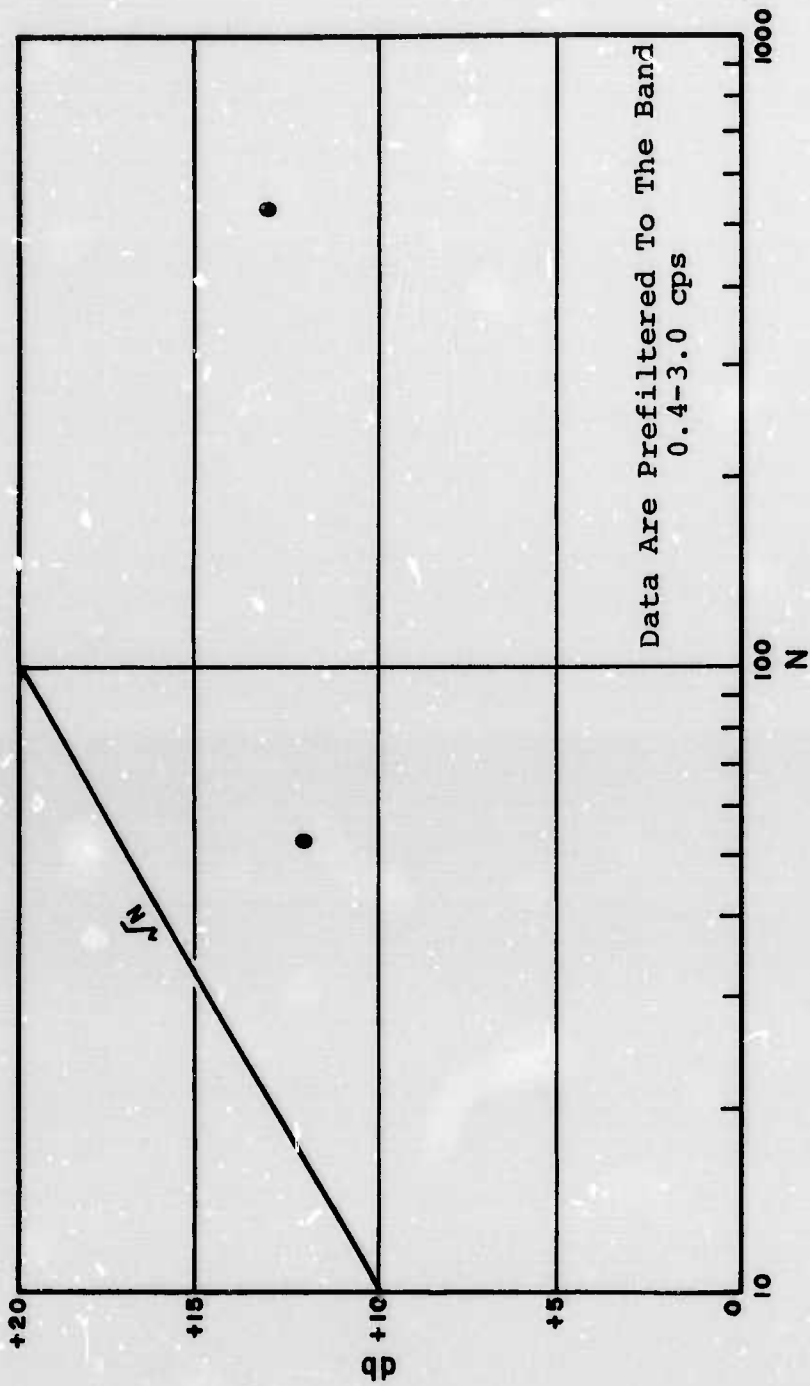


Figure 14. Average S/N Improvement by Beamforming  
LASA Seismograms

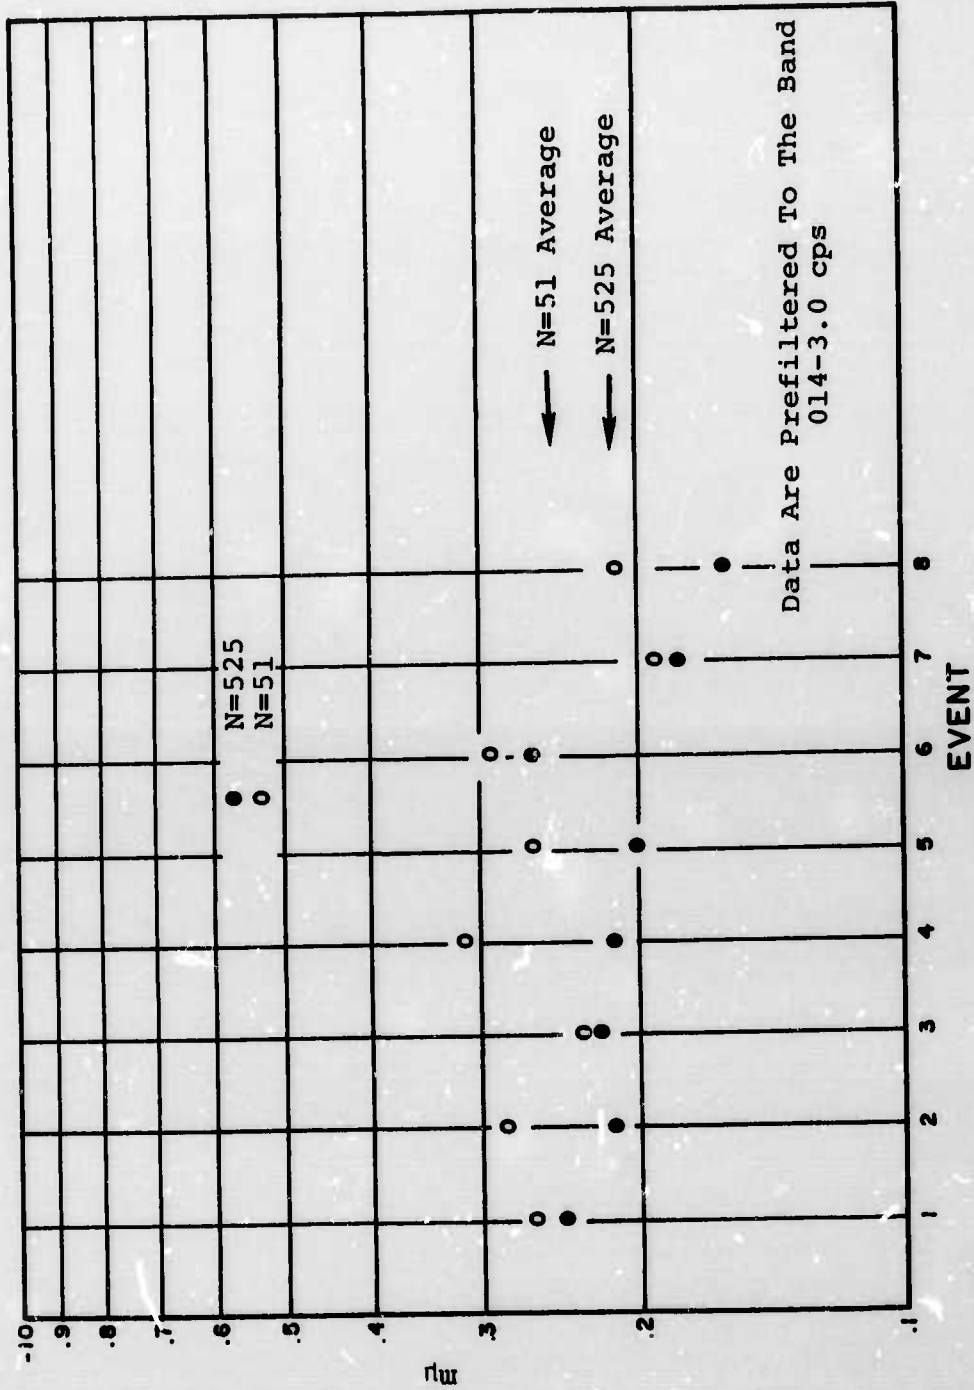


Figure 15. RMS Noise Levels on LASA Beams

DOCUMENT CONTROL DATA - R&D		
<i>(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)</i>		
1. ORIGINATING ACTIVITY (Corporate author) TELEDYNE INC. ALEXANDRIA, VIRGINIA		2a. REPORT SECURITY CLASSIFICATION Unclassified
		2b. GROUP ---
3. REPORT TITLE THE EFFECT OF THE NUMBER AND SPACING OF ELEMENTS ON THE EFFICIENCY OF LASA BEAMS		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Scientific		
5. AUTHOR(S) (Last name, first name, initial) Hartenberger, Royal A.		
6. REPORT DATE 21 December 1967	7a. TOTAL NO. OF PAGES 23	7b. NO. OF REFS 2
8a. CONTRACT OR GRANT NO. F 33657-67-C-1313	8b. ORIGINATOR'S REPORT NUMBER(S) 203	
8c. PROJECT NO. VELA T/6702		
8d. ARPA Order No. 624	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) ---	
8e. ARPA Program Code No. 5810		
10. AVAILABILITY/LIMITATION NOTICES This document is subject to special export controls and each trans- mittal to foreign governments of foreign national may be made only with prior approval of Chief, AFTAC.		
11. SUPPLEMENTARY NOTES ---	12. SPONSORING MILITARY ACTIVITY ADVANCED RESEARCH PROJECTS AGENCY Nuclear Test Detection Office Washington, D. C.	
13. ABSTRACT LASA short-period recordings of 8 teleseismic earthquakes were prefiltered and beamsteered on P-wave arrivals across the 200 km. aperture to establish the relationship between sensor spacing and beam efficiency in terms of noise reduction, sig- nal loss, and S/N ratio improvement.  Results show that the combined effect of increasing the number of elements in a beam while simultaneously reducing inter-sensor spacing is to produce progressively less rms noise reduction and S/N gain relative to <i>N<sup>2</sup> to the 1/2 power.</i>  The study further shows that beamforming each of the events in two ways, e.g., with 51 and 525 inputs, produces an average signal loss of ~4 db. Moreover, beaming the smaller number of traces reduces rms noise and improves S/N only about 1 db less than the 525-element beam. For the 51-element beam, the minimum sensor spacing was 6 km., the distance at which the short-period noise at LASA becomes incoherent.  <i>Approximately</i>		

14 KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
LASA Beam efficiency Array efficiency Signal rms noise Signal-to-noise ratio						

**INSTRUCTIONS**

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.
- 2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.
- 2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.
3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.
4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.
5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.
6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.
- 7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.
- 7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.
- 8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.
- 8b, c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.
- 9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.
- 9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).
10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through \_\_\_\_\_."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through \_\_\_\_\_."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through \_\_\_\_\_."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.