

UNCLASSIFIED

AD **259 904**

*Reproduced
by the*

ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

**BLANK PAGES
IN THIS
DOCUMENT
WERE NOT
FILMED**

CATALOGED BY ASTIA

259 904

BRL

MEMORANDUM REPORT NO. 1347
MAY 1961

A DOUBLE-CHARGE TECHNIQUE TO MEASURE
FACE-ON BLAST

W. Olson
J. Wenig

61-3-6
NOX



Department of the Army Project No. 503-04-002
Ordnance Management Structure Code No. 5010.11.815
BALLISTIC RESEARCH LABORATORIES



ABERDEEN PROVING GROUND, MARYLAND

104 500

ASTIA AVAILABILITY NOTICE

Qualified requestors may obtain copies of this report from ASTIA.

BALLISTIC RESEARCH LABORATORIES

MEMORANDUM REPORT NO. 1347

MAY 1961

A DOUBLE-CHARGE TECHNIQUE TO MEASURE
FACE-ON BLAST

W. Olson

J. Wenig

Terminal Ballistics Laboratory

Department of the Army Project No. 503-04-002
Ordnance Management Structure Code No. 5010.11.815

ABERDEEN PROVING GROUND, MARYLAND

TABLE OF CONTENTS

	Page
ABSTRACT.	3
INTRODUCTION.	5
PHYSICAL TEST SETUP	6
INSTRUMENTATION	6
EXPERIMENTAL PROCEDURE.	13
COMPUTATIONAL PROCEDURE	17
RESULTS AND DISCUSSION.	19
CONCLUSIONS	24
REFERENCES.	25
APPENDIX A.	27
APPENDIX B.	29
DISTRIBUTION LIST	35

BALLISTIC RESEARCH LABORATORIES

MEMORANDUM REPORT NO. 1347

WColson/JWenig/bjk
Aberdeen Proving Ground, Md.
May 1961

A DOUBLE CHARGE TECHNIQUE TO MEASURE
FACE-ON BLAST

ABSTRACT

This report presents measurements of air blast parameters at the midpoint of a line joining two equal weight explosive charges. The explosive used was 50/50 Pentolite with dual one or eight-pound spheres being detonated simultaneously. The pressure transducer employed was a BRL "pancake" pressure gage employing a synthetic piezoelectric ceramic as the sensing element. Pressure, impulse and duration measurements were obtained for scaled distances of 1.5 to 3.2 ft/lb^{1/3} for comparison with data derived by other techniques.

INTRODUCTION

In studying the response of targets^{1,2*} to the transient loads of air blast, two parameters of interest are the peak overpressure and positive impulse associated with the blast wave. Peak pressure and impulse usually are designated as either "side-on" or "face-on." Side-on (or hydrostatic) pressure and impulse can be measured by a transducer whose sensing element is parallel to the direction of propagation of the wave. Face on (or dynamic) pressure and impulse are usually measured by a sensing element which forms part of a large rigid surface situated normal to the incident blast wave.

Face-on blast experiments at the BRL consist primarily of measurements of pressure-time histories with piezoelectric gages flush-mounted in a large reflecting surface and subjected to air blast at normal incidence, or of measurements of impulse only with a mechanical gage consisting simply of a moveable plug mounted in the surface³.

Each of the above experimental methods can have limitations. In the case of flush-mounted gages, it is difficult to calibrate the gage directly. Calibrations are obtained indirectly by measurements of incident shock velocities. From these incident velocities, the incident pressure is determined from the Rankine-Hugoniot relationships. Then a theoretically determined ratio of incident to reflected shock pressures is applied⁴. Furthermore, at small distances from the explosive, shock loadings by the blast may exceed the mechanical performance capabilities of the gage and hence result in a distortion of the response. The mechanical or plug method can only be used to measure face-on impulse. The quantity which it measures may be positive impulse, total impulse, (i.e., positive less negative), or some intermediate value depending on the mass of the plug and the duration of the blast wave.

It has long been realized that the face-on reflection of a blast wave from a rigid surface can be simulated by the simultaneous detonation of two identical explosive charges. The plane lying midway between the charges can represent a rigid surface. In fact, a model often used to describe the

* Superscript numbers denote references listed at the end of the report.

reflection process is depicted in Figure 1, where a "virtual charge" replaces the reflecting surface⁵. It is the purpose of this report to discuss some results obtained with a piezoelectric gage placed at the geometric center of two identical explosive charges which were detonated simultaneously, and to compare these data with data from the other methods.

PHYSICAL TEST SETUP

A pre-calibrated side-on piezoelectric gage was placed at the midpoint of a line joining the centers of two equal weight explosive charges (Fig. 2). Pairs of one or eight-pound spherical charges of cast 50/50 Pentolite were used for the experiments. The charge pairs were simultaneously initiated by an electronic circuit which applied a 5000-volt pulse to the "Engineers Special" electric detonators centrally located in the explosive spheres (see Fig. 3).

INSTRUMENTATION

Simultaneity of detonation of the pairs of explosive charges was achieved by means of an electronic circuit described in detail in Appendix I. A separate identical power supply, of low impedance, was used for each charge. Both supplies were triggered simultaneously by a common input. The peak voltage output of each supply is approximately five kilovolts. The energy source is a four micro-farad capacitor switched by means of a hydrogen thyratron. The pair of pulsed supplies made simultaneous firing more certain by reducing the possibility of high voltage flash-over across the lead wires which might have occurred if series or parallel circuitry were employed.

High speed photographs were taken to check the simultaneity of initiation of two charges. A commercial electronic shutter based on the Faraday principle was used. The effective exposure time of the camera was somewhat less than one microsecond. Figures 4, 5, and 6 show the luminous expanding shock front from dual one-pound charges at approximately 10, 50, and 75 μ sec after initiation and indicate that simultaneity was achieved. A further check on simultaneity is obtained by observing the

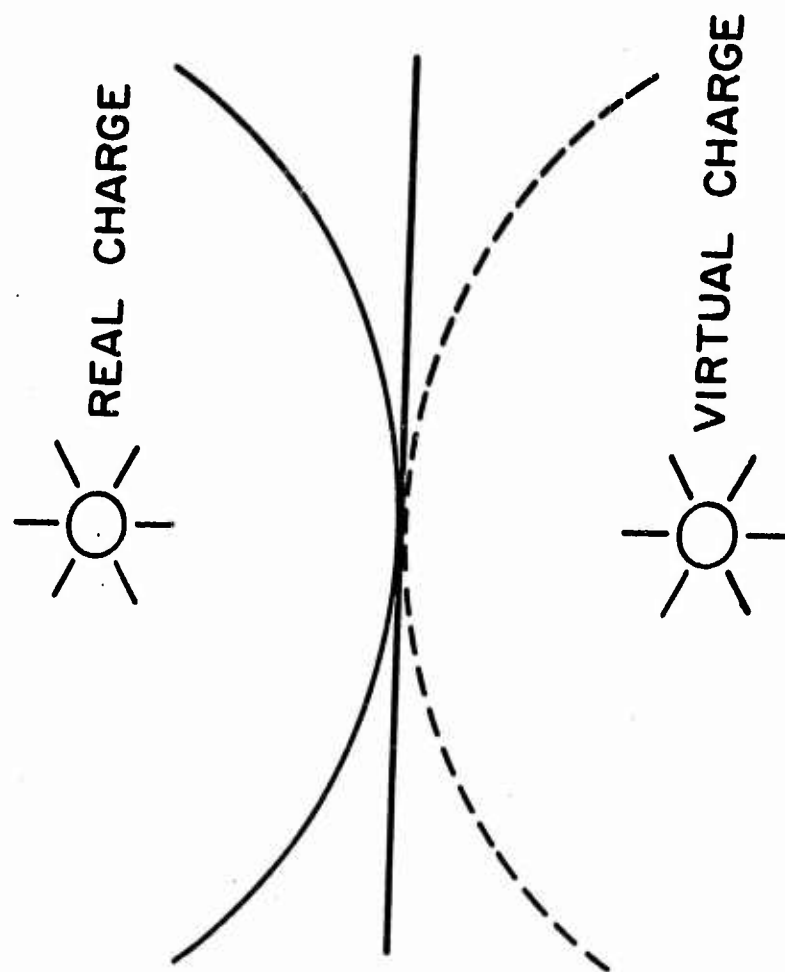


Figure 1



Figure 2



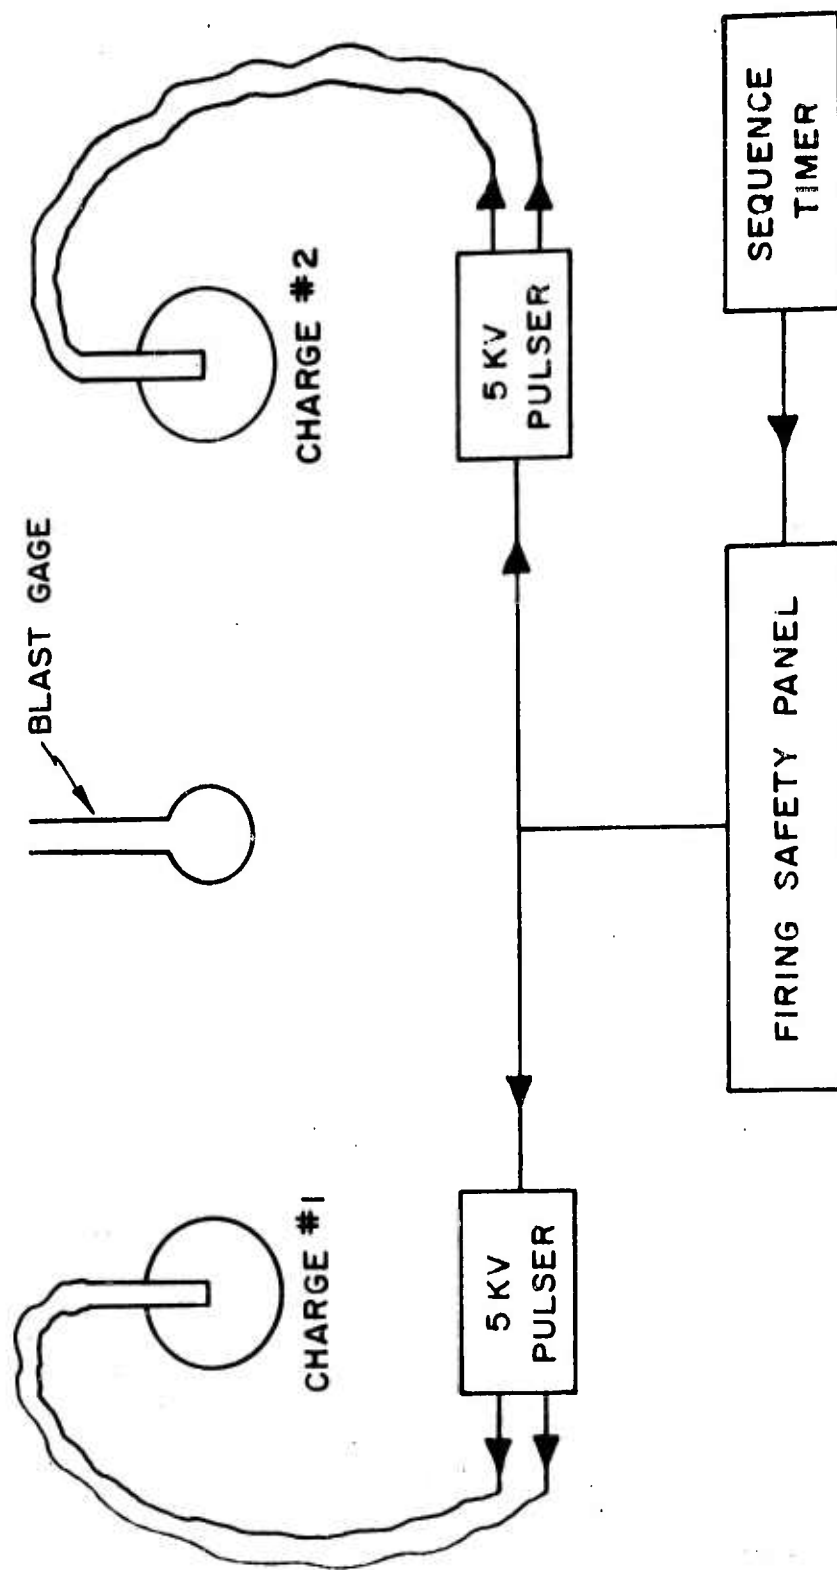


Figure 3



FIGURE 4

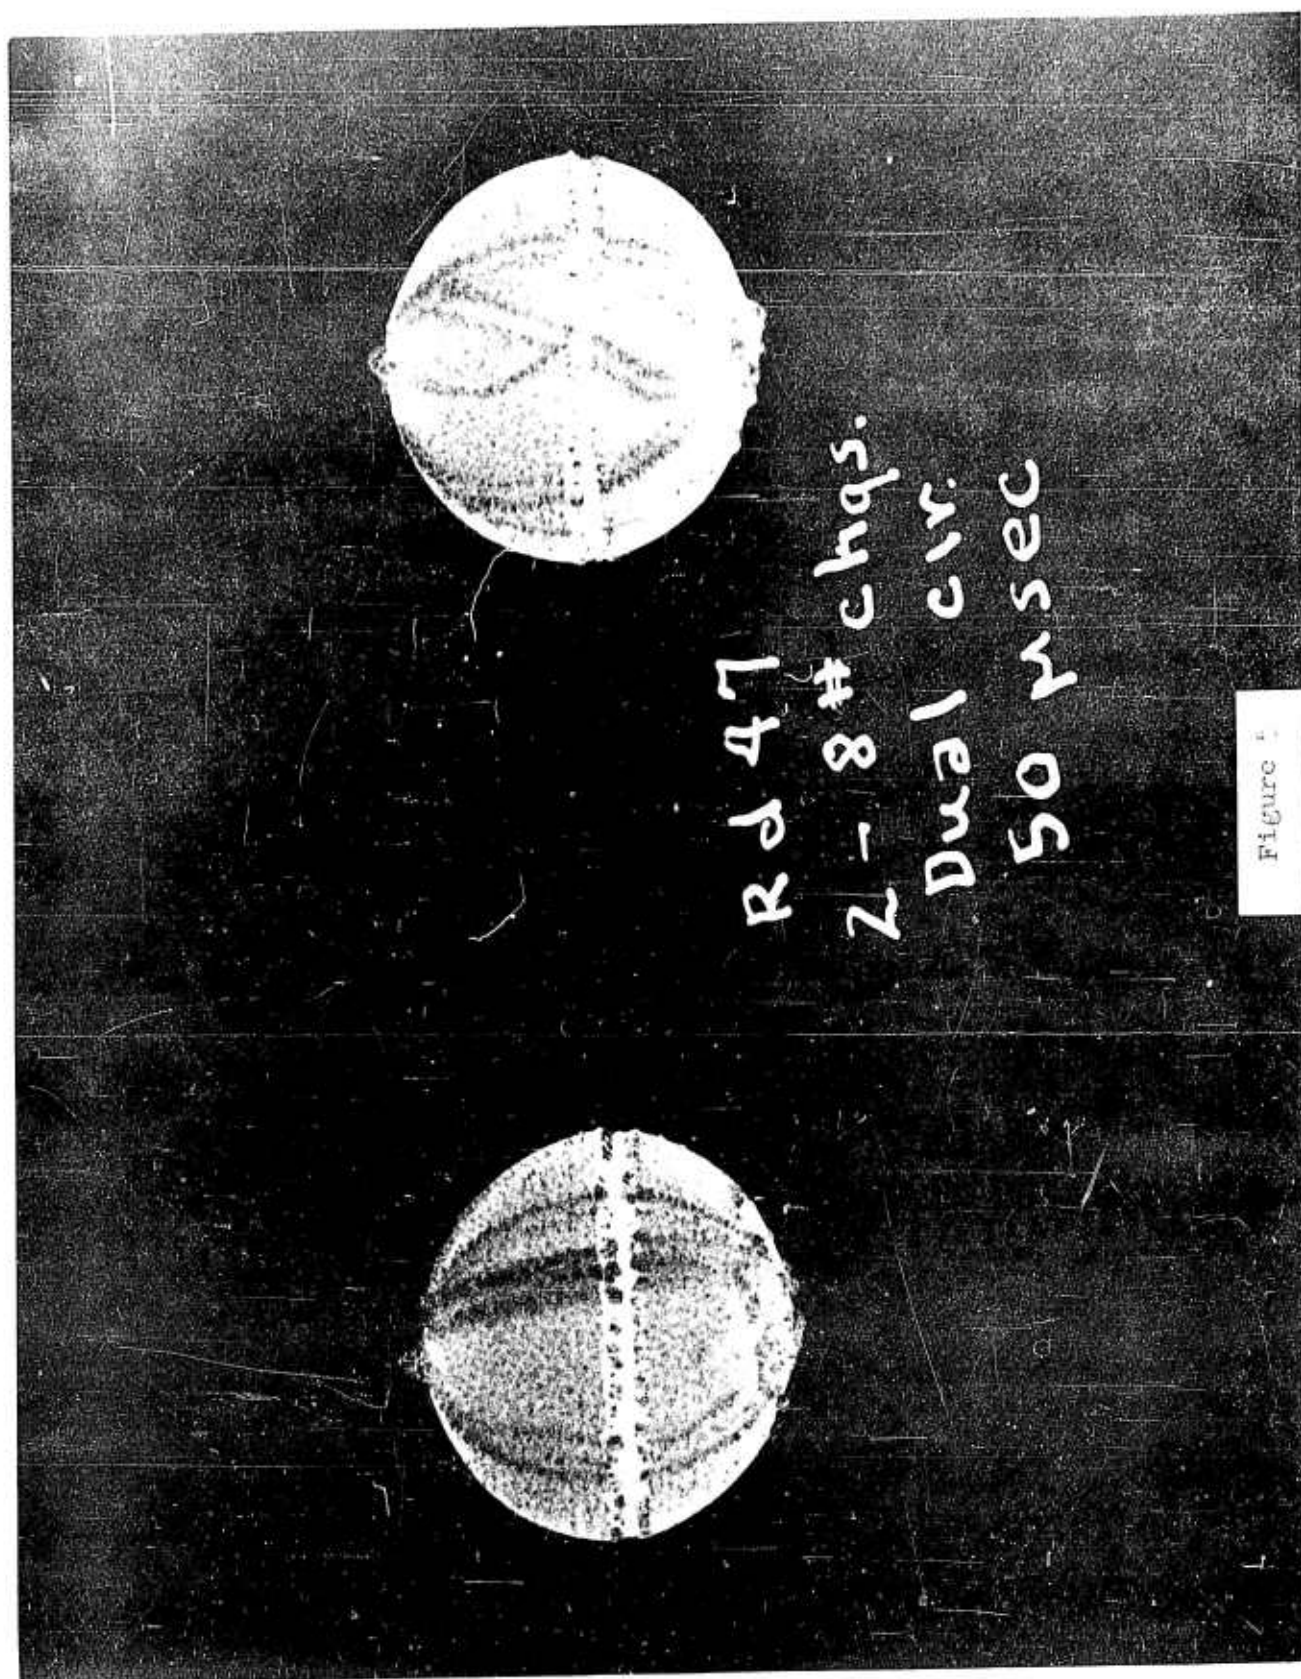

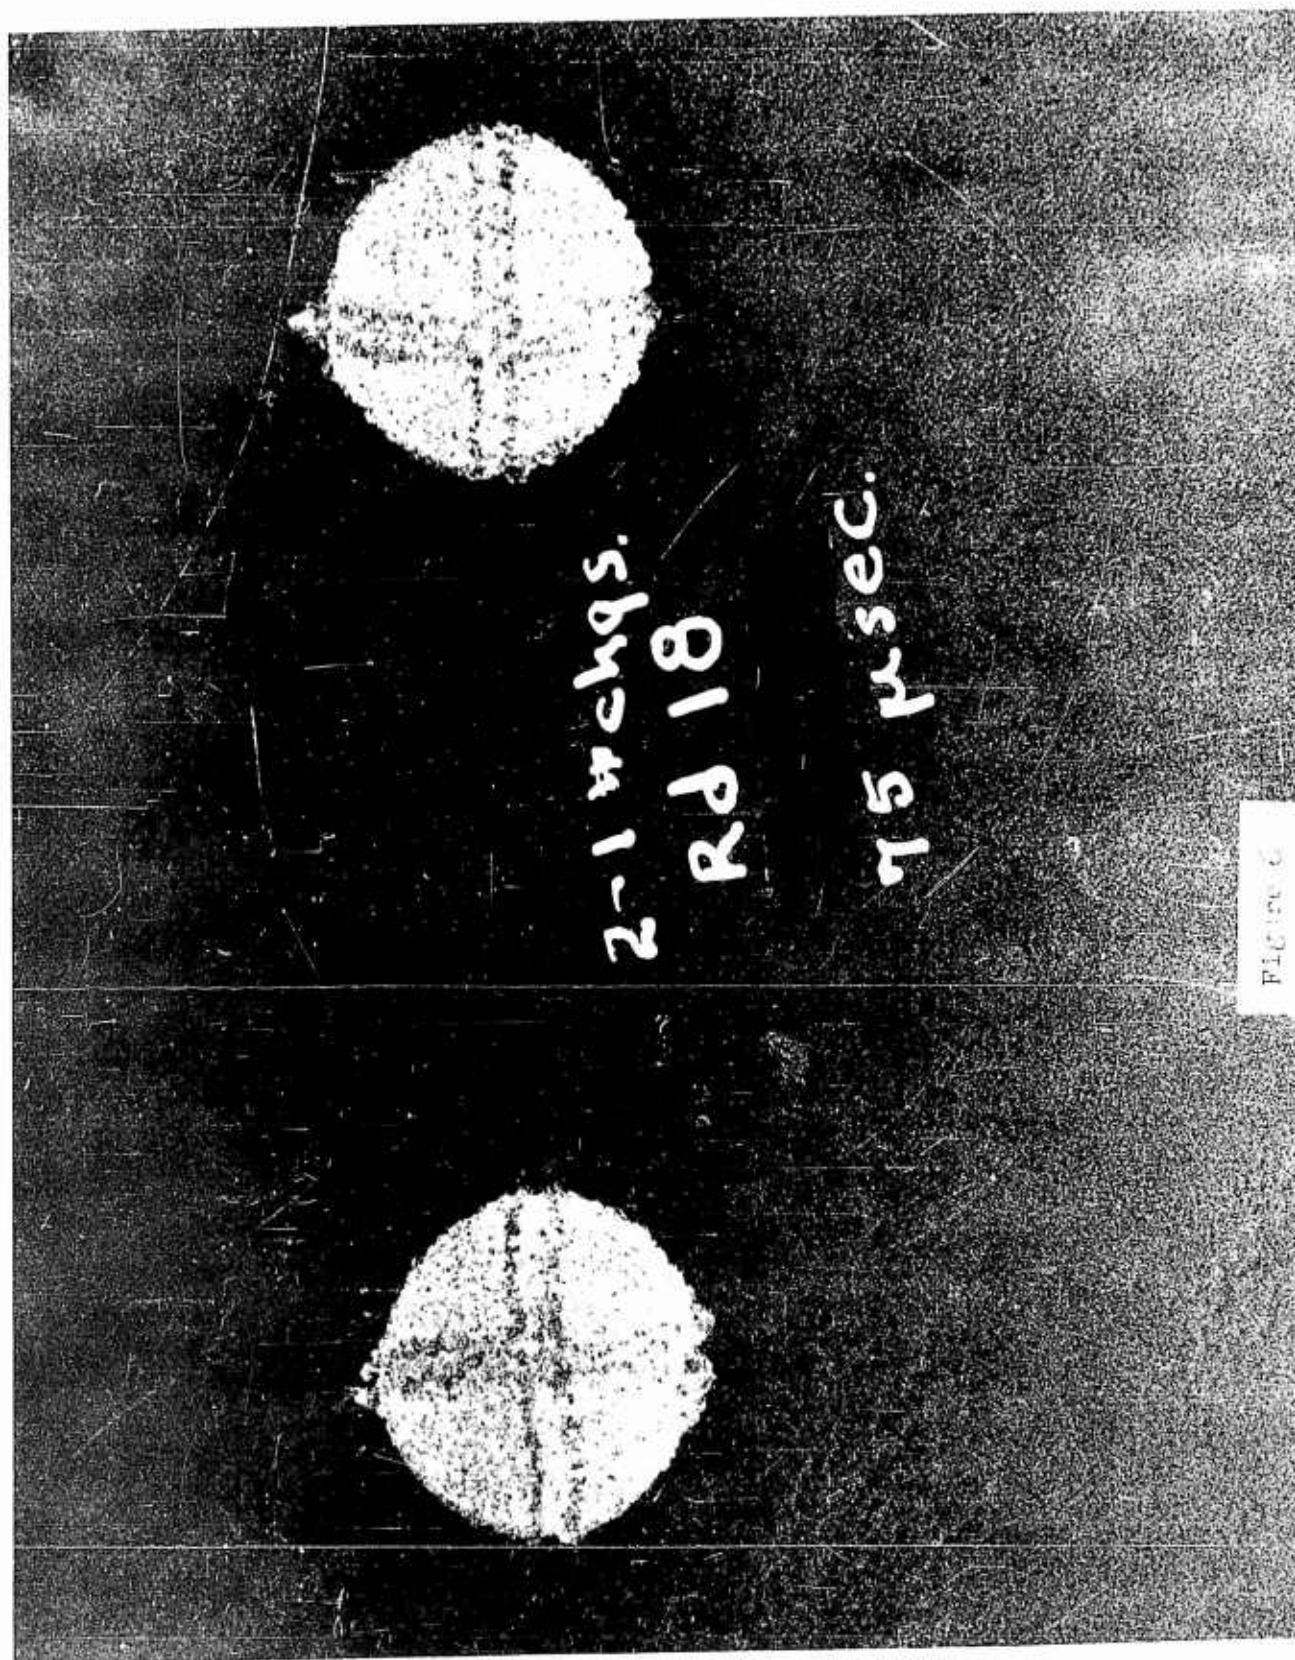


arrival of two shock envelopes at the gage as evidenced in Figures 7 and 8. Figure 9 is a schematic of the system used to photograph the shocks passing over the gage. An exploding wire⁶ served as the light source and a lens was used to concentrate the light.

EXPERIMENTAL PROCEDURE

Prior to using the gage for these experiments, it was pre-calibrated in the following manner. The test gage was bracketed by another pair of piezoelectric gages which were used to sense time of arrival of an air blast wave and from which could be determined an average velocity of the wave over the interval. This average velocity is equivalent to the instantaneous velocity at the midpoint of the interval. Peak pressure of the wave could then be inferred from the Rankine-Hugoniot equation which relates peak pressure with velocity. By comparing the oscillographic output waveform of the test gage to a series of known calibration steps, a gage constant for the gage can be obtained. The "gage-constant" or sensitivity of the gage used in this series of experiments was $24.4 \mu\text{C}$ coulombs per pound per square inch of impressed pressure.

Before firing, all Pentolite explosive charges were weighed, and although found to be very nearly equal to their nominal weights, were sorted in equal weight pairs. Each pair of charges was then suspended from an overhead cable (see Fig. 2) and guyed in position so that the pre-calibrated gage was positioned at the midpoint of the line joining the charge centers. The charges and gage were aligned by eye, and the distances from gage center to charge center measured by steel tape to an accuracy of ± 0.01 ft. The electrical detonators were positioned perpendicular to the ground plane and electrical leads were oriented to minimize the possibility of metal fragments from the detonators and lead wires from striking the gage. The signal generated by the gage was displayed and recorded via an amplifier and cathode-ray tube system and recorded by a General Radio streak camera (modified to produce film speeds of the order of two inches per millisecond).

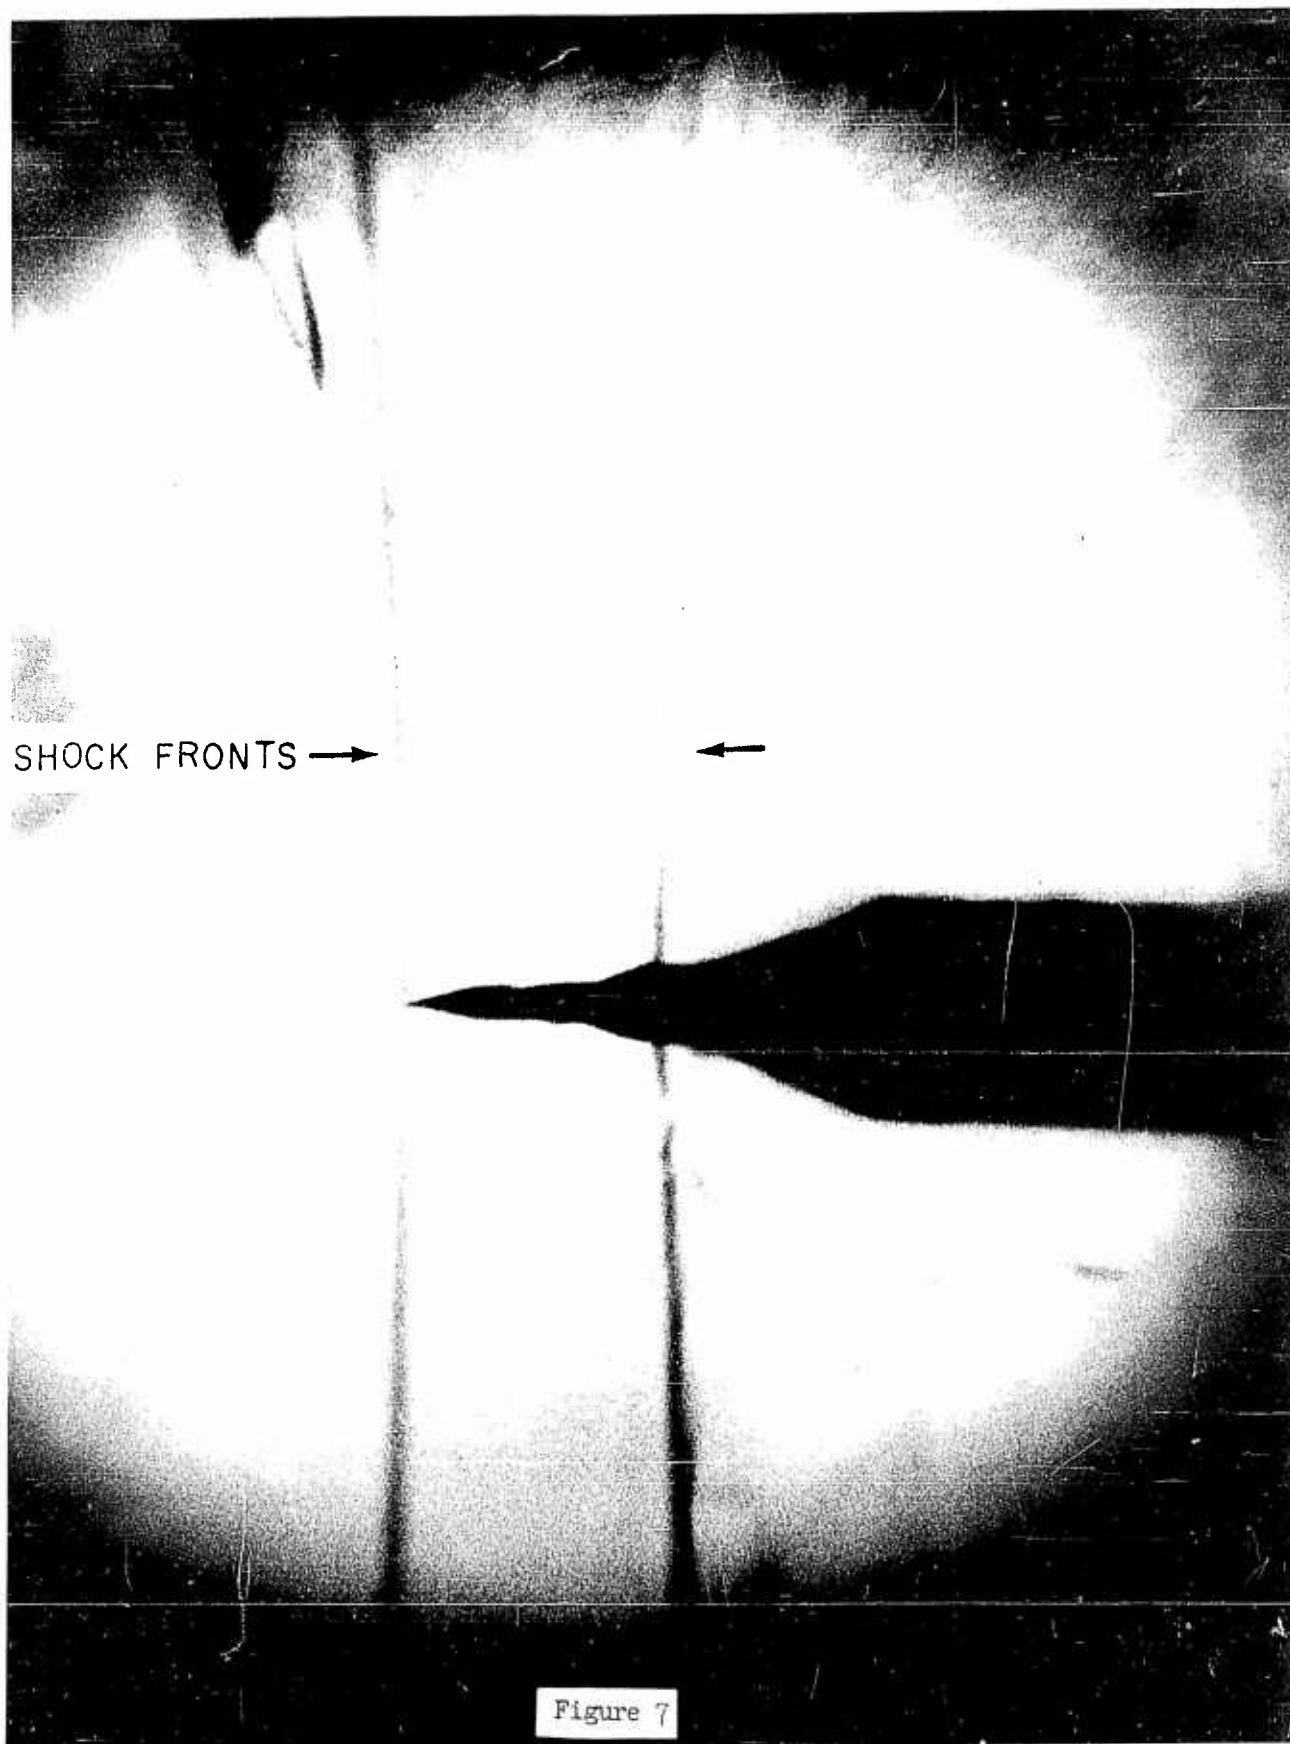

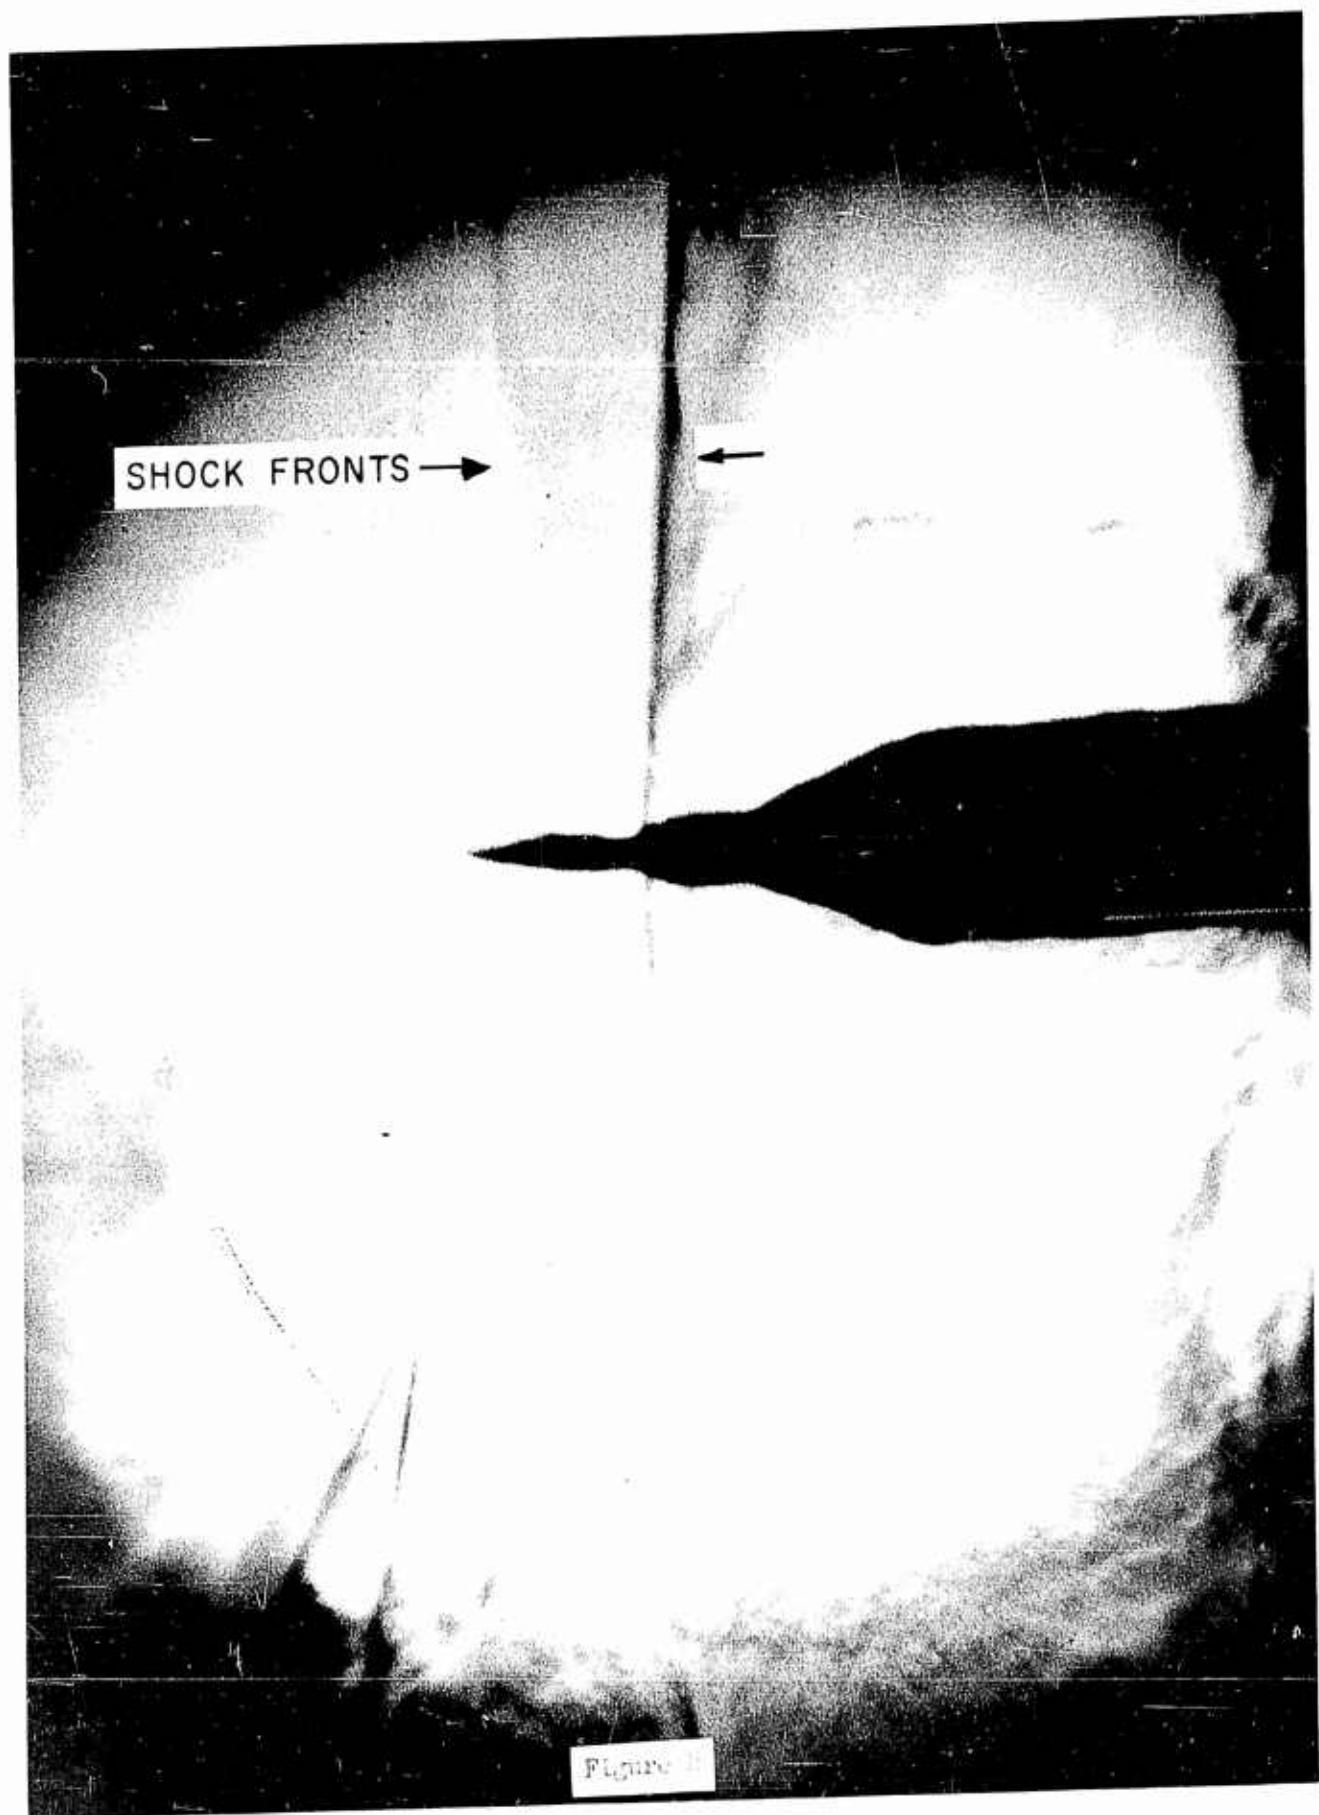


Figure 11

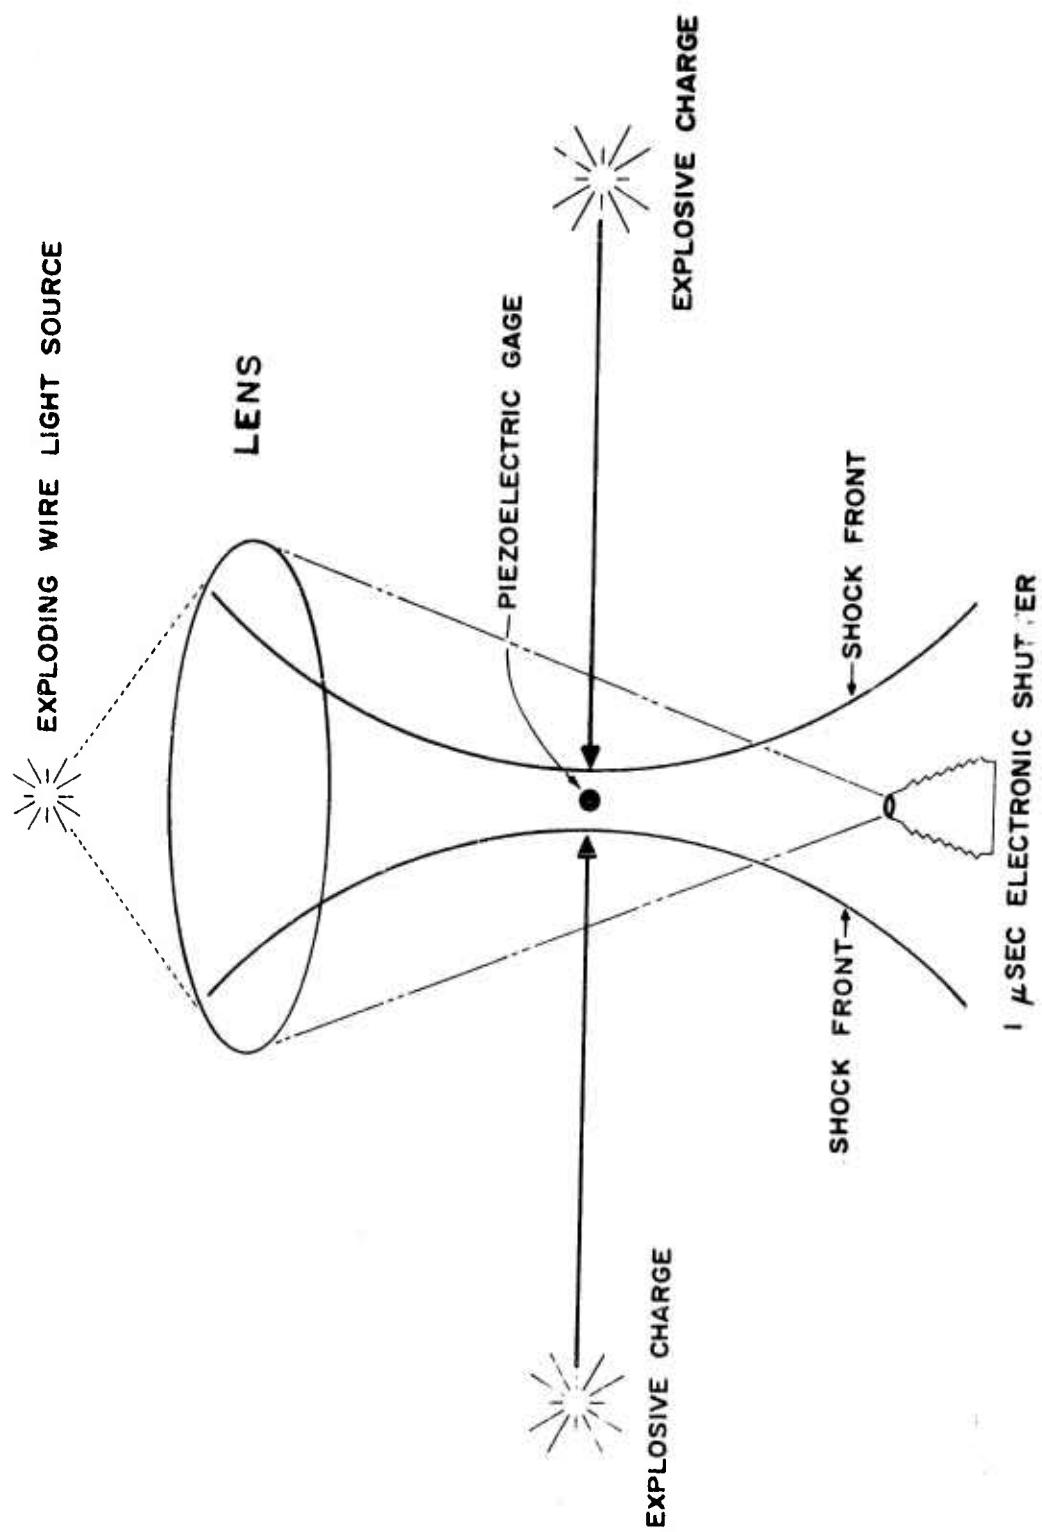


Figure 9

By this procedure, we obtained acceptable oscillograms at several scaled distances in to $1.5 \text{ ft/lb}^{1/3}$ from both charge weights used in these experiments. Figure 10 shows such an oscillogram recorded by detonation of a pair of one-pound charges at a scaled distance of $1.5 \text{ ft/lb}^{1/3}$. It indicates that acceptable pressure-time histories can be obtained at the limit of Hoffman & Mills⁷ data.

COMPUTATIONAL PROCEDURE

Fifteen pressure-time histories were obtained from one-pound charges at scaled distances of 3.32, 3.0, 2.3 and $1.5 \text{ ft/lb}^{1/3}$. In addition, two check rounds were fired using eight-pound charges at a scaled distance of 1.5. Peak overpressure, positive impulse, and positive duration were measured from these oscillograms.

With individual gage KA's (gage sensitivities) established, peak overpressure was calculated from

$$P = \frac{H}{S} \times \frac{Q}{KA}$$

where

P = peak overpressure, psi.

H = height of initial peak of pressure-time history on the film record.

S = voltage calibration step size on the record.

Q = calibration charge, $\mu\mu$ coulombs.

Heights H and S were measured by an arbitrary scale of the individual film records.

Positive impulse is defined as

$$I = \int_0^T p(t)dt$$

where $p(t)$ is the overpressure as a function of time t and T is the duration of the positive phase. Integrating numerically we obtain

$$I = \frac{M \times Q}{KA \times US}$$

ROUND 63

Z = 1.5

P = 3623 PSI

10⁻⁴ SEC

where I = positive reflected impulse, psi ms.

M = area under the positive phase of the pressure-time history.

U = time scale factor, scale units/ms.

The area under the positive phase of the pressure-time history was computed by the trapezoidal rule from ordinate measurements on film records at small equal intervals.

Positive duration is obtained directly from the pressure-time histories and is defined as the time from the onset of the blast wave until the peak overpressure first returns to zero and before the pressure enters its negative phase.

RESULTS AND DISCUSSION

Table I presents a resume of the data. Figure 11 indicates that the data of Table I are consistent with reflected pressure data from BRL Report No. 988⁷ and reflected pressures inferred from the velocity data of BRL 984^{*8}. The reflected impulse data are compared with data from BRL 988 and BRIM 1088 in Figure 12. It is apparent from these figures that the precision of our experiments is at least as good as the precision of the other methods. Our data were also consistent with and included in a compilation of experimental results from various sources in BRL 1092⁹.

Figure 13 displays a record at $Z = 3.32 \text{ ft/lb}^{1/3}$ from two blast waves which did not meet at the center of the gage. The initial portion of the pressure-time history shows the pressure imposed on the gage by a single charge. The pressure, 91.2 psi, agrees with incident pressures for this scaled distance inferred by other methods. A short time later the pressure is quickly modified to give a pressure which corresponds to the pressure at a short distance away from a reflecting surface. This pressure

* Reflected pressures were established from the incident pressures of BRL Report No. 984 by using the tables of pressure ratios, $P_{\text{reflected}}/P_{\text{incident}}$, of the reflected shock wave versus the pressure ratio $P_{\text{incident}}/P_{\text{atmospheric}}$ of the incident shock wave for normal reflections in air in Reference 10.

TABLE I
REFLECTED PRESSURE, SCALED REFLECTED IMPULSE, SCALED DURATION VS. SCALED DISTANCE

ROUND NO.	NOMINAL CHARGE WEIGHT, LBS.	NOMINAL SCALED DISTANCE, "Z" $Z = R/W^{1/3}$	ACTUAL REFLECTED PRESSURE, PSI	ACTUAL SCALED REFLECTED IMPULSE $I / W^{1/3}$	ACTUAL REFLECTED DURATION $(\Delta t)(MSEC.)/W^{1/3}$	SIDE-ON PRESSURE
48	8	1.5	3537	123.6	0.197	
56	8	1.5	3582	125.8	0.196	
63	1	1.5	3623	106.5	0.206	
26	1	2.3	1373	70.5	.301	
27	1	2.3	1579	90.9	.329	
28	1	2.3	1410	80.7	.332	
29	1	2.3	1461	80.7	.328	
70	1	3.00	599.6	55.8	.431	
12	1	3.32	418	47.4	.545	
13	1	3.32	423	42.9	.457	
14	1	3.32	390	38.4	.462	
18	1	3.32	367	41.6	.517	
19	1	3.32	368	38.0	.471	
20	1	3.32	390	43.4	.495	
* 9	1	3.32	405			91.2
** 7	1	3.32				92.1
** 8	1	3.32				93.7

* SHOCK WAVES DID NOT MEET DIRECTLY OVER THE GAGE, GIVING A "SIDE-ON" AND THEN A "FACE-ON" READING.
 ** ONE CHARGE OF THE MATCHED PAIR FAILED TO DETONATE, GIVING A "SIDE-ON" PRESSURE MEASUREMENT ONLY.

REFLECTED PRESSURE VS. SCALED DISTANCE

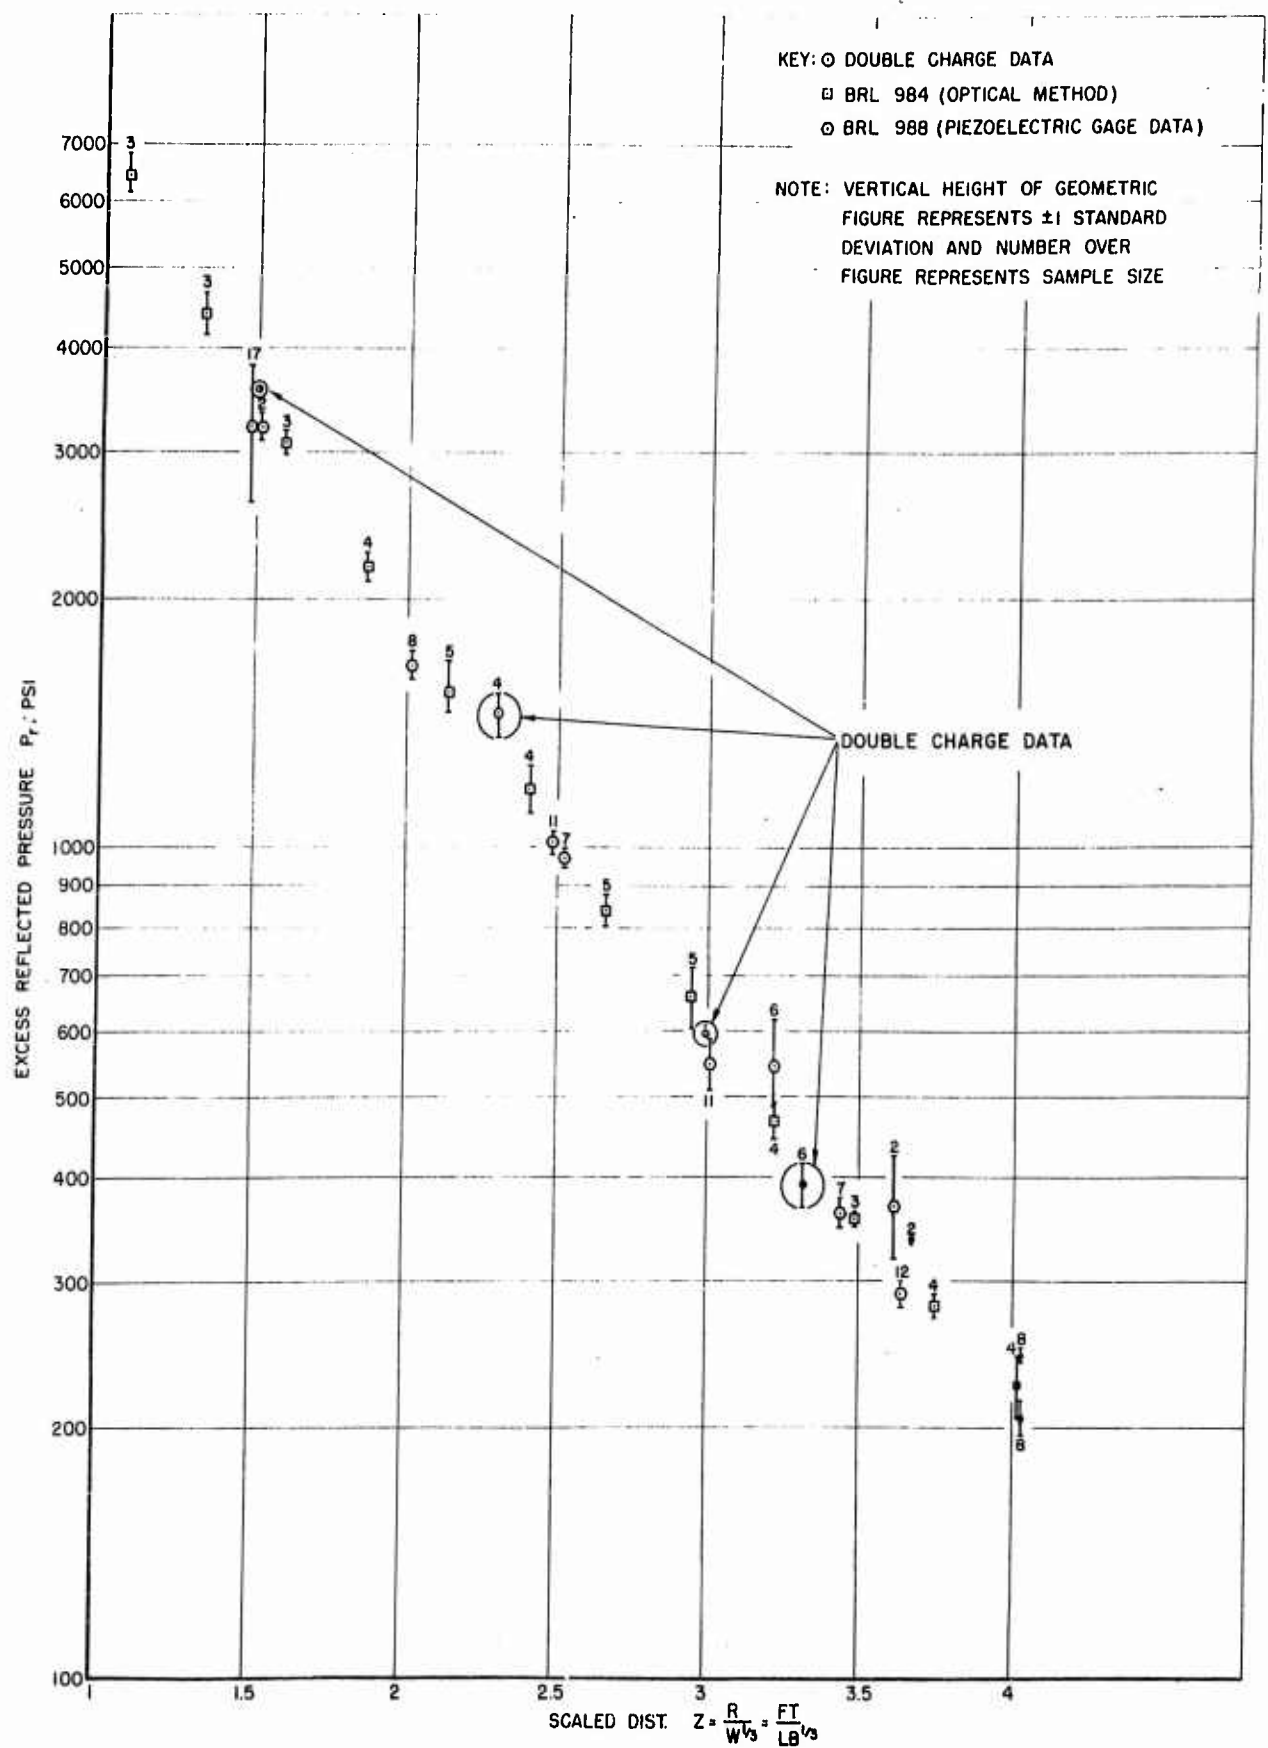


Figure 11

SCALED REFLECTED IMPULSE VS. SCALED DISTANCE

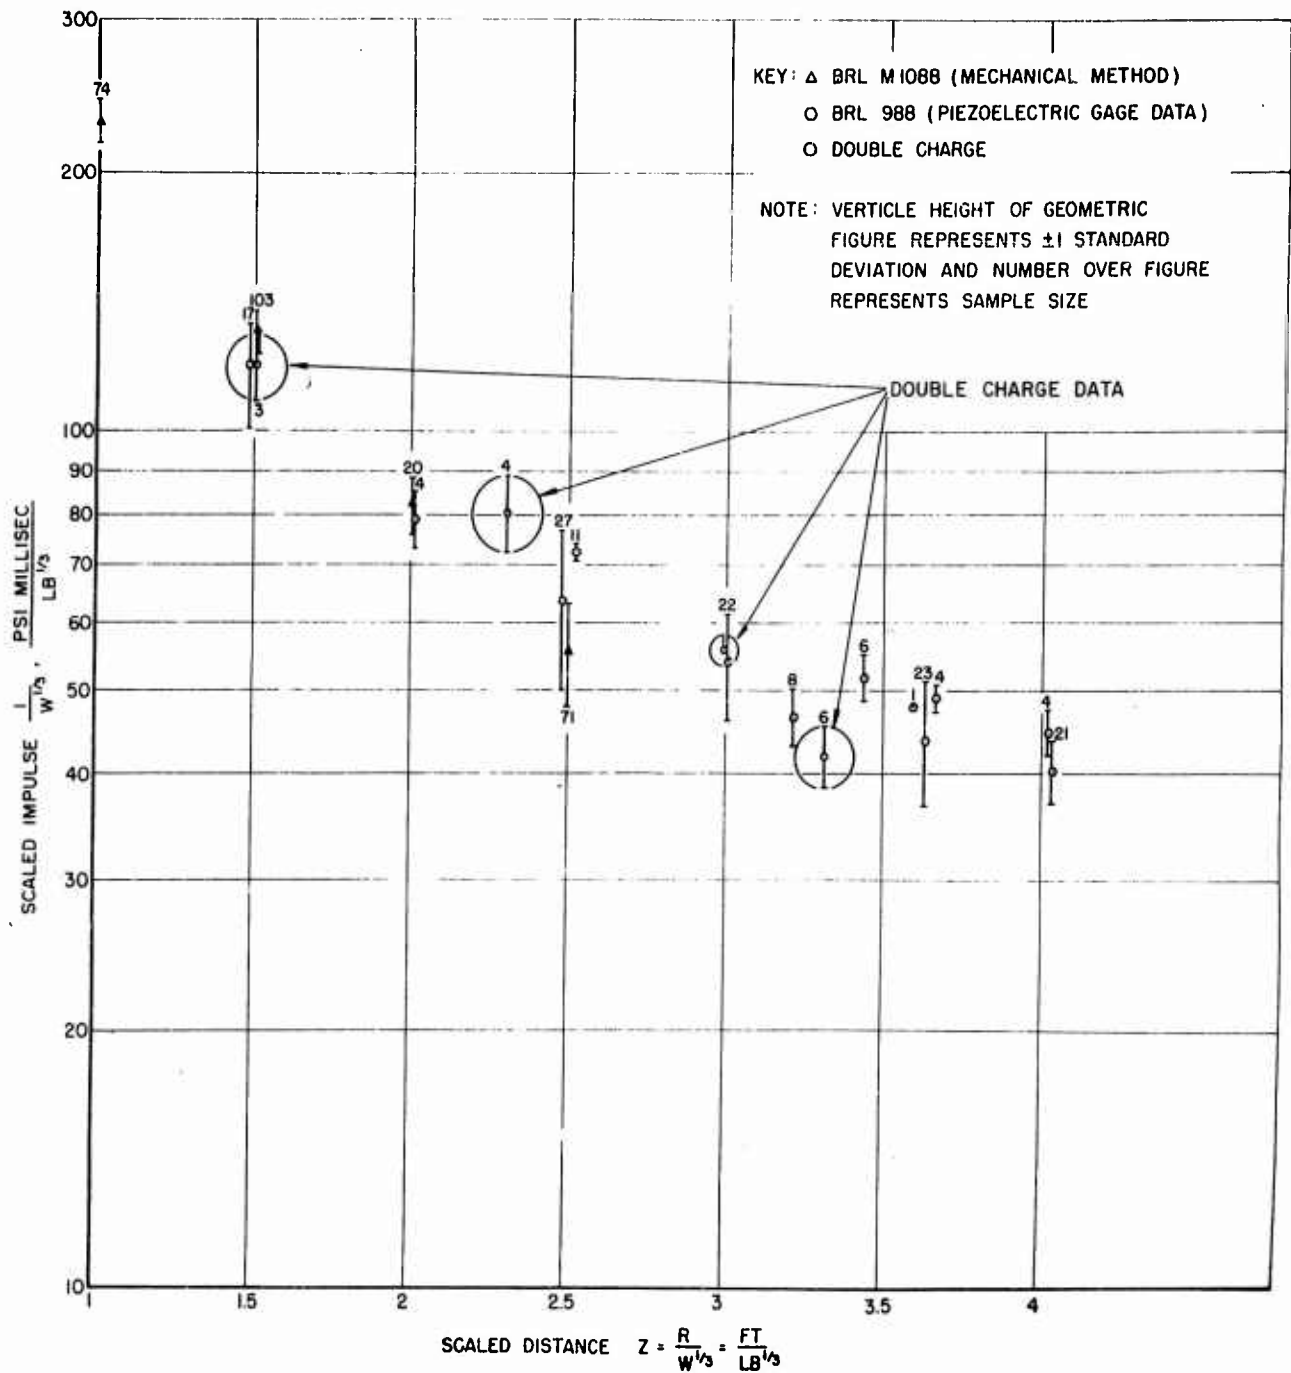


Figure 12

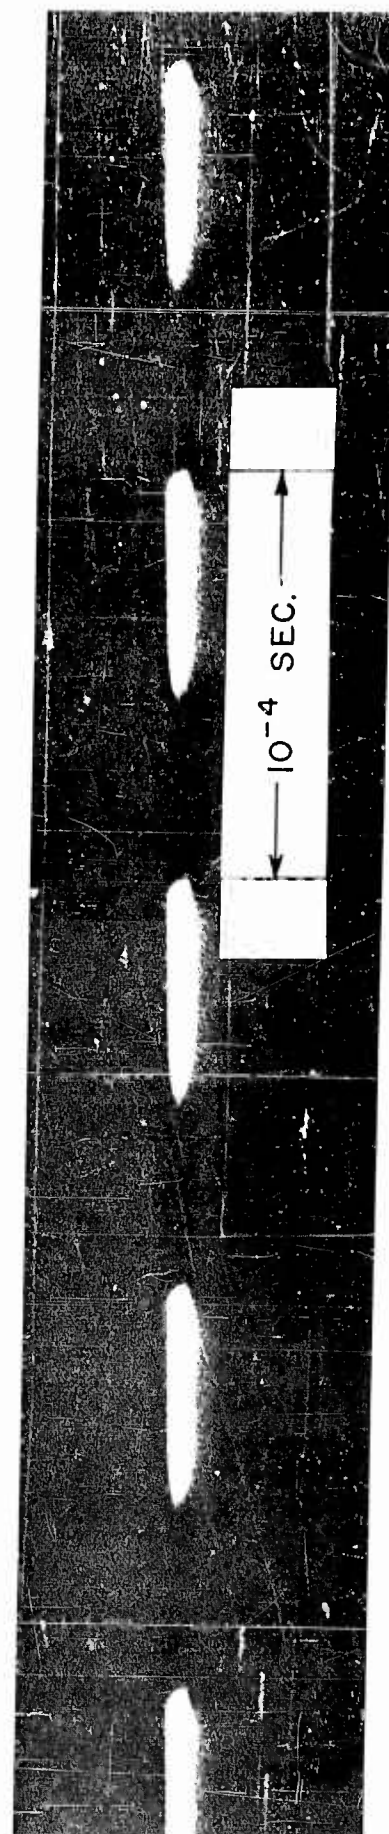


FIGURE 13

is approximately face-on pressure for this scaled distance. Rds 7 and 8 of Table I give predicted side-on pressure and impulse due to only one of the two matched pairs being detonated.

CONCLUSIONS

In this report, we have shown that we can obtain a satisfactory simulation of reflection of a blast wave from a rigid wall by simultaneous detonation of identical explosive charges. We have measured the pressure-time histories of the colliding waves using gages which were developed for side-on blast experiments, and have shown that these measurements agree with data obtained by other techniques. The data presented here constitute the first direct measurements with calibrated gages, of the pressure-time history of a face-on blast at scaled distances as small as $Z = 1.5 \text{ ft/lb}^{1/3}$.

W. Olson

W. OLSON

J. Wenig

J. WENIG

REFERENCES

1. Mills, S. and Locklin, R. "Dynamic Response of Thin Beams to Air Blast", BRL Report No. 787, September 1951, Unclassified.
2. Ballard, R., Hoffman, A., and Baker, W. "An Experimental Investigation of the Effects of Motion of A B-29 Horizontal Stabilizer on External Blast Damage", June 1956, Confidential.
3. (a) Johnson, O., Patterson, J., and Olson, W. "A Simple Mechanical Method for Measuring the Reflected Impulse of Air Blast Waves", BRL Memorandum Report No. 1088, July 1957, Unclassified.
(b) Olson, W., Patterson, J., and Williams, J. "The Effects of Atmospheric Pressure on the Reflected Impulse from Air Blast Waves", January 1960, Unclassified.
4. Lampson, C. W. "Résumé of the Theory of Plane Shock and Adiabatic Waves with Applications to the Theory of the Shock Tube", BRL TN No. 139, March 1950.
5. "Effect of Atomic Weapons", U. S. Government Printing Office, Washington, D. C.
6. Hinz, D., Wenig, J. "Backlighting the Shock Around a Moving Explosive Charge", BRL Memorandum Report No. 1110, October 1957.
7. Hoffman, A. J., Mills, S. N. "Air Blast Measurements About Explosive Charges at Side-on and Normal Incidence", BRL Report No. 988, July 1956.
8. Sultanoff, M., McVey, G. "Shock-Pressure at and Close to the Surface of Spherical Pentolite Charges Inferred from Optical Measurements", BRL Report No. 917, August 1954.
9. Goodman, H. J. "Compiled Free-Air Blast Data on Bare Spherical Pentolite", BRL Report No. 1092, February 1960.
10. Doering, W., and Burkhardt, G. "Contributions to the Theory of Detonation", (Translation from German prepared by Brown University), Technical Report No. F-TS-1227-1A (GDAMA 9-T-4b), Headquarters, Air Material Command, Wright-Patterson Air Force Base, Dayton, Ohio, May 1949.
11. Wenig, J. "A Pulse Amplifier for Use with Piezoelectric Velocity Gages", BRL TN No. 1138, July 1957.

APPENDIX A

Figure 3 is a block diagram of the field and recording setup. A safety firing panel applied a 135-volt positive pulse simultaneously to the grids of the type 5696 miniature thyratrons (see Fig. 14). The 400-volt output pulse of these tubes triggered the hydrogen thyratrons which supplied a 5 K.V. pulse to the explosive detonators and insured exact and simultaneous output to the explosive charges. The 5696 tubes were used in preference to the more conventional 2D21 tube since the former exhibit less delay and variation in firing time.¹¹ Although the 4C35 tube requires only a 100-volt trigger pulse to cause it to "strike", a 400-volt pulse was used. This combination of 135 volts applied to the 5696 tube biased at 15 volts, and 400 volts to the grid of the 4C35, insured exact and simultaneous output pulses to the explosive charges.

HIGH VOLTAGE PULSER 5KV

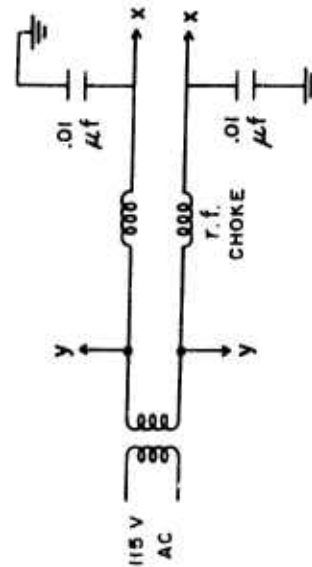
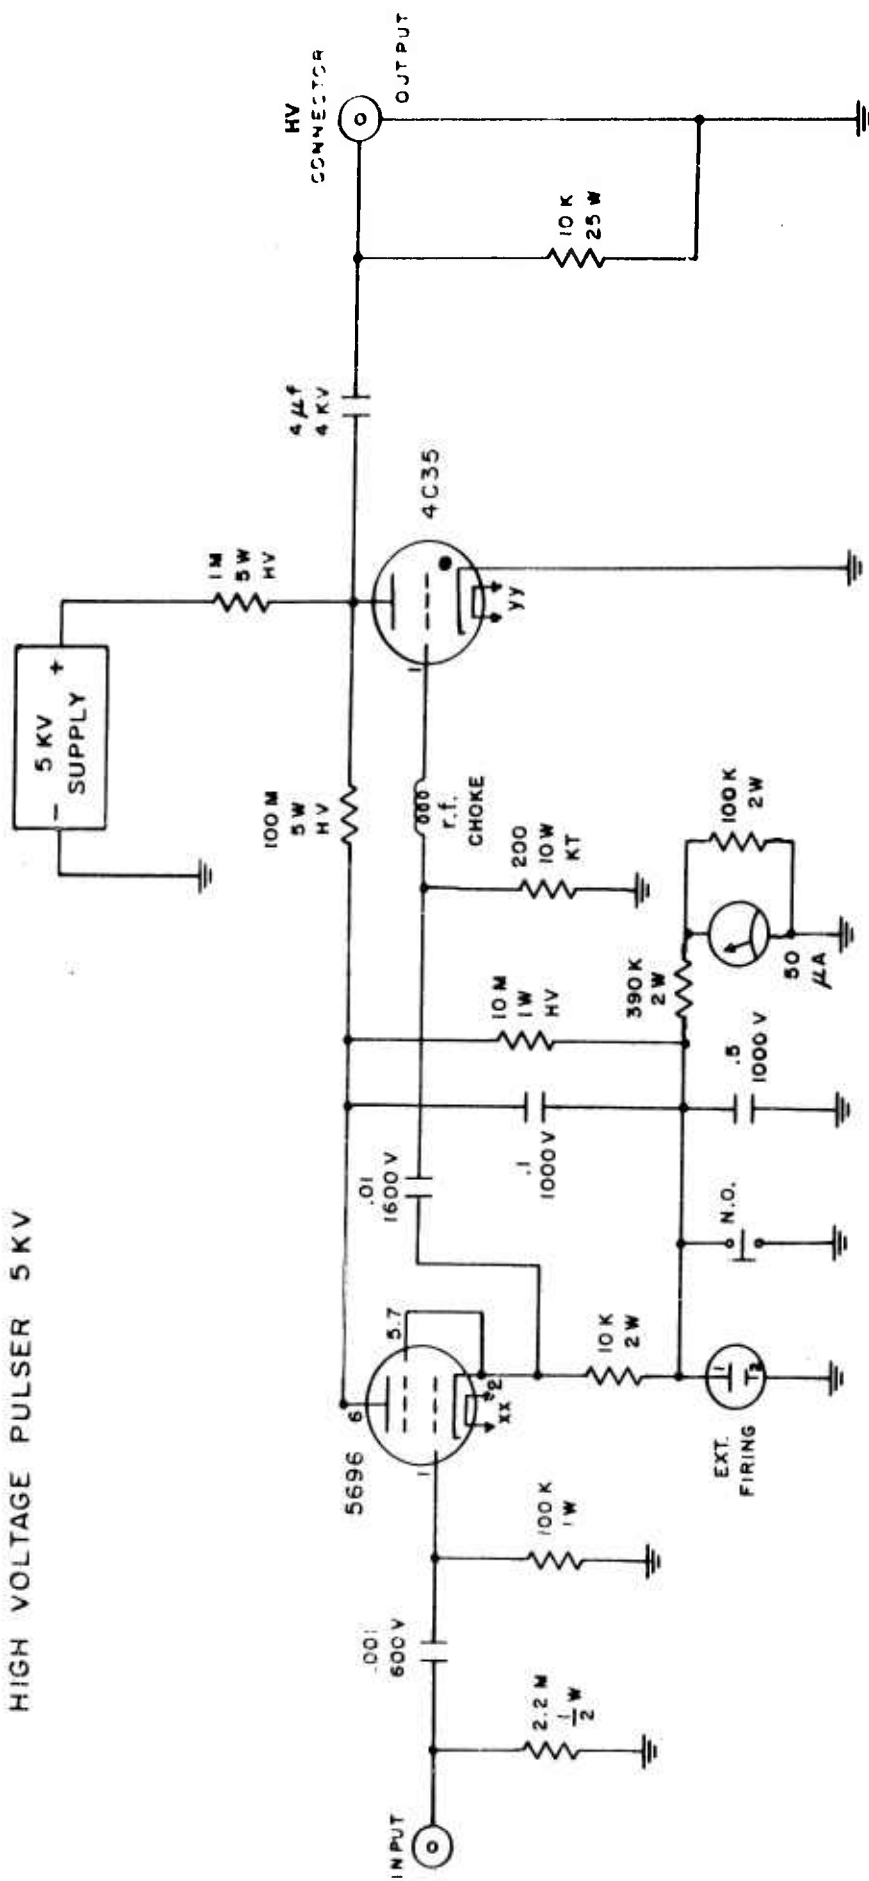


Figure 14

APPENDIX B

DESCRIPTION OF PIEZOELECTRIC GAGE

The blast gage used in these trials was of a type usually used to measure the side-on blast generated by small explosive charges. The gage head is in the form of a flat circular disc with beveled edges. It has an aspect ratio, or the ratio of width to thickness, of over ten to one so as to minimize perturbations of the shock it measured. The general construction of the gage is shown in Figures 15 through 17. The sensitive piezoelectric elements used were of lead metaniobate (obtained from the General Electric Corporation); Table II describes the physical properties of this material. For blast work, this material possesses some advantages. It has much higher sensitivity than quartz, or tourmaline. It has a very high Curie point (550°C), a very low acceleration response, and a low mechanical quality factor. A low mechanical quality factor, "Q", is desirable in a receiver transducer and helps to suppress spurious responses as well as providing more faithful reproduction of the impressed load. The sensing element consisted of a stack of two piezoelectric discs cemented together, with a silver tab between them. A small insulated wire was soldered to the silver tab and drawn through the gage housing and soldered to a coaxial connector at the stem end. Silicone vacuum grease was smeared around the stack and inside the gage housing so as to both weatherproof the gage and to provide good mechanical coupling between the lead metaniobate and the diaphragm. The diaphragm was then drawn tightly into place with screws.

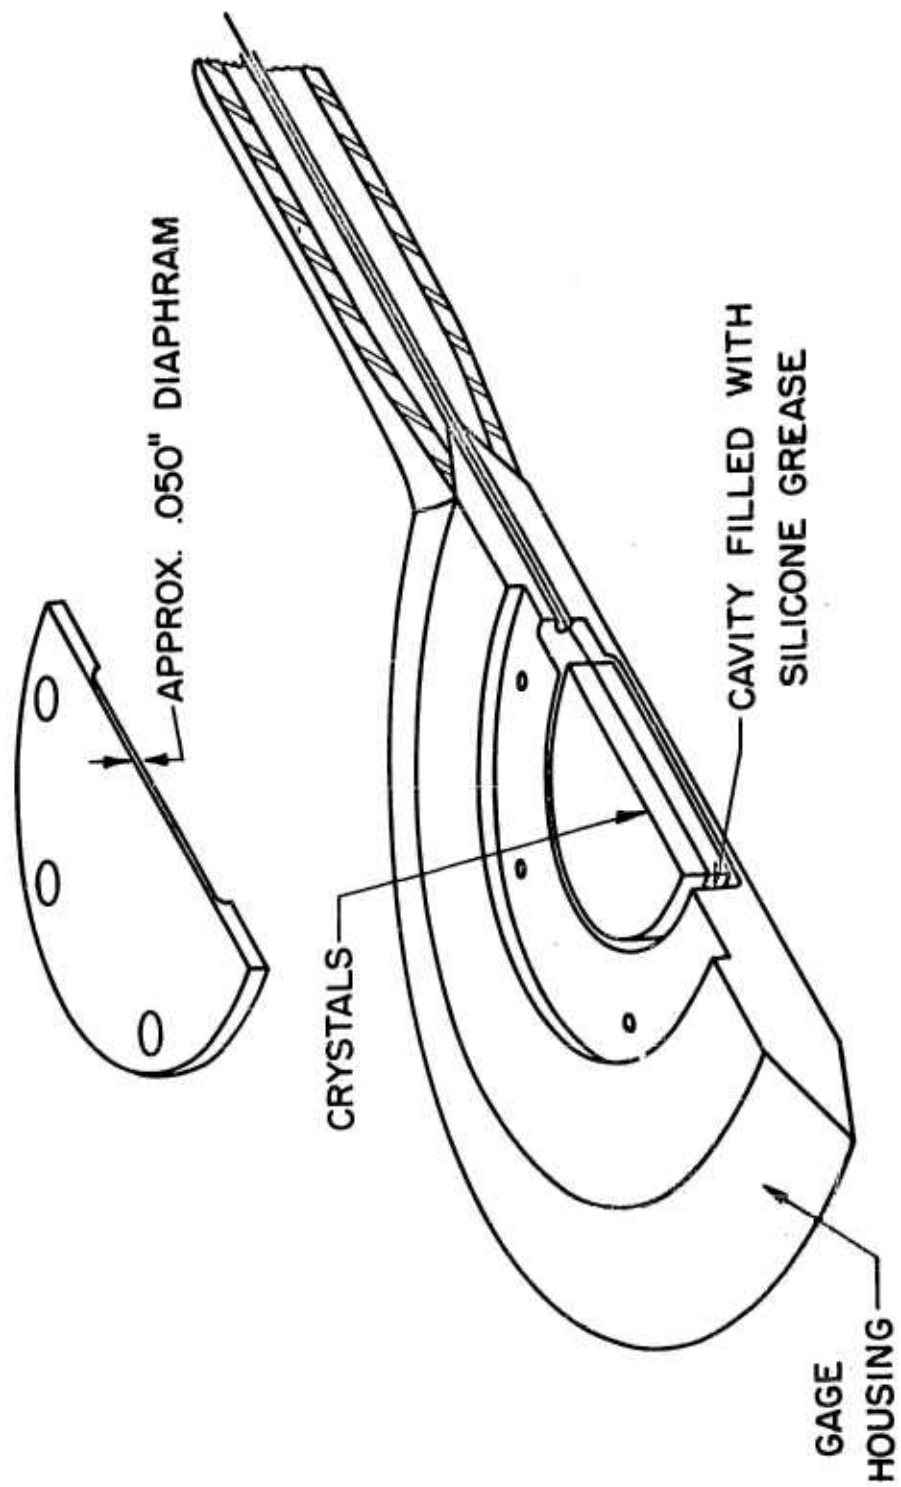


Figure 15

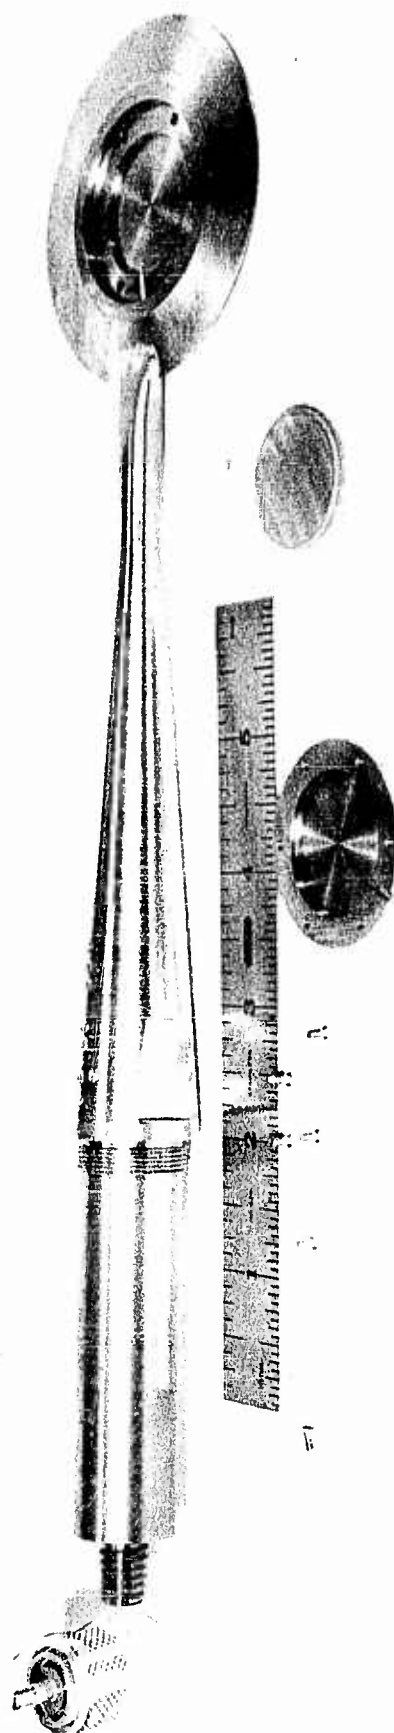


Figure 16

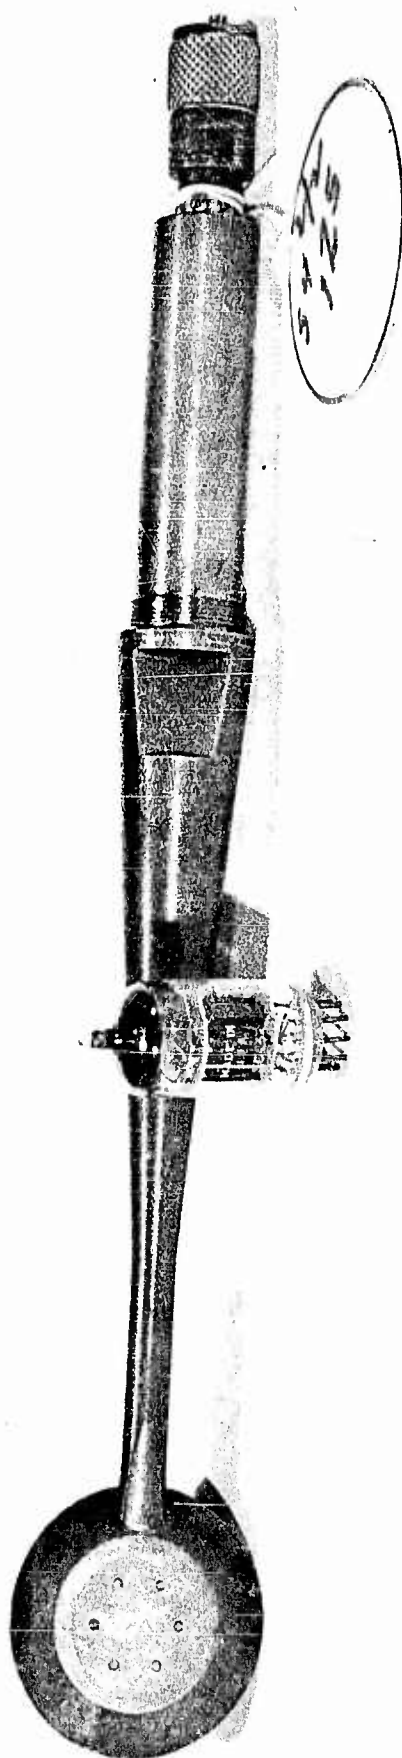


Figure 17

TABLE II

Physical Properties of Lead Metaniobate

Dielectric Constant at 1 KC	225
Dissipation Factor at 1 KC	1.0
Density	5.8 grams/cm ³
Poisson's Ratio	0.26
Young's Modulus	3.5 x 10 ¹¹ dynes/cm ²
* Curie Temperature	550°C minimum
Resistivity	7 x 10 ¹² ohm-cm
Piezoelectric Constant d ₃₃	60 x 10 ⁻¹² coulombs/Newton
Piezoelectric Constant g ₃₃	30 x 10 ⁻³ volmeters/Newton
* Mechanical Q (in radial mode)	11

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
1	Chief of Ordnance ATTN: ORDTB - Bal Sec Department of the Army Washington 25, D. C.	3	Chief, Bureau of Naval Weapons ATTN: DIS-33 Department of the Navy Washington 25, D. C.
1	Commanding Officer Diamond Ordnance Fuze Laboratories ATTN: Technical Information Office, Branch 012 Washington 25, D. C.	2	Commander Naval Ordnance Laboratory White Oak, Silver Spring 19, Maryland
10	Commander Armed Services Technical Information Agency ATTN: TIPCR Arlington Hall Station Arlington 12, Virginia	1	Commander Naval Ordnance Laboratory ATTN: Dr. H. A. Thomas Corona, California
10	Commander British Army Staff British Defence Staff (W) ATTN: Reports Officer 3100 Massachusetts Avenue, N.W. Washington 8, D. C.	1	Commander U. S. Naval Air Development Center Johnsville, Pennsylvania
	Of Interest to: Mr. G. Simm R.A.E.	2	Commander U. S. Naval Ordnance Test Station ATTN: Technical Library China Lake, California
4	Defence Research Member Canadian Joint Staff 2450 Massachusetts Avenue, N.W. Washington 8, D. C.	2	Commander U. S. Naval Weapons Laboratory Dahlgren, Virginia
1	Office of Technical Services Department of Commerce Washington 25, D. C.	5	Chief of Staff ATTN: AFDRT AFCOA AFORQ (Director/Operational Requirements) U. S. Air Force Washington 25, D. C.
1	Chief of Naval Operations ATTN: Op 376 - Dr. J. Steinhardt Department of the Navy Washington 25, D. C.	1	Director of Research & Development ATTN: AFDRT U. S. Air Force Washington 25, D. C.
		2	Commander Air Force Systems Command ATTN: SCRR 2 Andrews Air Force Base Washington 25, D. C.

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
1	Commander Arnold Engineering Development Center ATTN: AEOI Tullahoma, Tennessee	3	Commanding Officer Picatinny Arsenal ATTN: Feltman Research and Engineering Laboratories Dover, New Jersey
2	Commander Air Force Cambridge Research Lab. ATTN: CRRDM, Lt. G. Meltz L. G. Hanscom Field Bedford, Massachusetts	1	Commanding General Frankford Arsenal ATTN: Reports Group Philadelphia 37, Pennsylvania
3	Commander Air Proving Ground Center ATTN: PGTWR PGTRI PGTW Eglin Air Force Base, Florida	1	Army Research Office Arlington Hall Station Arlington, Virginia
2	Director Air University Library ATTN: AUL (3T-AUL-60-118) Maxwell Air Force Base, Alabama	1	Director, Operations Research Office Department of the Army 6935 Arlington Road Bethesda, Maryland Washington 14, D. C.
1	Commander Air Technical Intelligence Center ATTN: Associated Equipment Section, ATIC Wright-Patterson Air Force Base, Ohio	1	Director IDA/Weapon Systems Evaluation Group Room 1E880, The Pentagon Washington 25, D. C.
3	Commander Aeronautical Systems Division ATTN: WWAD WWY WWDS Wright-Patterson Air Force Base, Ohio	1	Director of Defense Research and Engineering (OSD) ATTN: Director/Ordnance Washington 25, D. C.
1	Director, Project RAND Department of the Air Force 1700 Main Street Santa Monica, California	4	U. S. Atomic Energy Commission Los Alamos Scientific Laboratory P.O. Box 1663 Los Alamos, New Mexico

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
3	U. S. Atomic Energy Commission University of California Lawrence Radiation Laboratory ATTN: Dr. Sidney Fernbach Dr. John Foster Mr. Bruce Crowley Technical Information Division P.O. Box 808 Livermore, California	1	Chance-Vought Aircraft Company ATTN: Dr. C. C. Wan P.O. Box 5907 Dallas, Texas
		1	Cornell Aeronautical Lab., Inc ATTN: Elma Evans, Librarian 4455 Genessee Street Buffalo 5, New York
1	Director National Aeronautics and Space Administration 1520 H Street Washington 25, D. C.	1	Douglas Aircraft Company Long Beach, California
		3	General Electric Research Lab. P.O. Box 1088 Schenectady, New York
1	Aerojet-General Corporation 6352 North Irwindale Road Azusa, California	1	Grumann Aircraft Engineering Corp. ATTN: Armament Group Bethpage, Long Island, New York
1	Armour Research Foundation ATTN: F. Porzel Illinois Institute of Technology Center Chicago 16, Illinois	1	Hughes Aircraft Company ATTN: Mr. Dana Johnson, Research and Development Laboratories Florence Avenue at Teale Street Culver City, California
1	Boeing Airplane Company ATTN: Mr. W. A. Pearce Wichita, Kansas	1	Lockheed Aircraft Corporation ATTN: Mr. R. A. Bailey Division Engineer Military Operations Research Division Burbank, California
1	Boeing Airplane Company ATTN: Mr. J. Christian - Armament Unit Seattle 14, Washington		
1	CONVAIR A Division of General Dynamics Corporation P.O. Box 1950 San Diego 12, California	1	The Martin Company ATTN: Mr. S. L. Rosing Mail No. 356 Middle River, Maryland Baltimore 3, Maryland
1	CONVAIR A Division of General Dynamics Corporation Fort Worth 1, Texas	1	Midwest Research Institute ATTN: B. L. Rhodes 425 Volker Boulevard Kansas City 10, Missouri

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
1	McDonnell Aircraft Corporation ATTN: Armament Group P.O. Box 516 St. Louis 3, Missouri	2	Massachusetts Institute of Technology ATTN: Dr. J. R. Ruetenik Dr. Emmett A. Witmer, Room 41-219 Cambridge 39, Massachusetts
3	North American Aviation, Inc. ATTN: Mr. D. H. Mason Mr. J. Ward Engineering Technical File 12214 Lakewood Boulevard Downey, California	1	Purdue University Director of Statistical Lab. ATTN: Dr. Kossach Lafayette, Indiana
1	Radioplane A Division of Northrop Aircraft, Incorporated P.O. Box 511 Van Nuys, California	1	Stanford Research Institute Menlo Park, California
2	The Rand Corporation ATTN: H. L. Brode F. R. Gilmore 2500 Colorado Avenue Santa Monica, California	1	University of Michigan Department of Physics ATTN: Dr. O. Laporte Ann Arbor, Michigan
2	Republic Aviation Corporation Farmingdale, Long Island, New York	1	University of Utah Institute of Rate Processes ATTN: M. A. Cook Salt Lake City, Utah
1	Applied Physics Laboratory The Johns Hopkins University 8621 Georgia Avenue Silver Spring, Maryland	1	Professor W. Bleakney Princeton University Palmer Physical Laboratory Princeton, New Jersey
1	California Institute of Technology ATTN: H. W. Leipmann Guggenheim Aeronautical Laboratory Pasadena, California	1	Dr. S. R. Brinkley Alcoa Building Pittsburgh 19, Pennsylvania
1	The Johns Hopkins University Institute for Cooperative Research 3506 Greenway Baltimore 18, Maryland	5	Mr. Benjamin Day 164 Cornell Quarters Ithaca, New York
1		1	Professor K. O. Friedrichs New York University Applied Mathematics Panel New York, New York

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>
1	Professor J. P. Hirschfelder University of Wisconsin Department of Chemistry Madison, Wisconsin
1	Dr. J. S. Rinehart Colorado School of Mines Golden, Colorado
1	Dr. E. Tapper Aurora College Aurora, Illinois

AD Ballistic Research Laboratories, APG A DOUBLE-CHARGE TECHNIQUE TO MEASURE FACE-ON BLAST W. Olson and J. Wenig UNCLASSIFIED Accession No. _____ Air blast - Test methods Pressure - measurement BRIM Report No. 1347 May 1961 DA Proj No. 503-04-002, QMSC No. 5010.11.815 UNCLASSIFIED Report This report presents measurements of air blast parameters at the midpoint of a line joining two equal weight explosive charges. The explosive used was 50/50 Pentolite with dual one or eight-pound spheres being detonated simultaneously. The pressure transducer employed was a BRL "pancake" pressure gage employing a synthetic piezoelectric ceramic as the sensing element. Pressure, impulse and duration measurements were obtained for scaled distances of 1.5 to 3.2 ft/lb^{1/3} for comparison with data derived by other techniques.	AD Ballistic Research Laboratories, APG A DOUBLE-CHARGE TECHNIQUE TO MEASURE FACE-ON BLAST W. Olson and J. Wenig UNCLASSIFIED Accession No. _____ Air blast - Test methods Pressure - measurement BRIM Report No. 1347 May 1961 DA Proj No. 503-04-002, QMSC No. 5010.11.815 UNCLASSIFIED Report This report presents measurements of air blast parameters at the midpoint of a line joining two equal weight explosive charges. The explosive used was 50/50 Pentolite with dual one or eight-pound spheres being detonated simultaneously. The pressure transducer employed was a BRL "pancake" pressure gage employing a synthetic piezoelectric ceramic as the sensing element. Pressure, impulse and duration measurements were obtained for scaled distances of 1.5 to 3.2 ft/lb^{1/3} for comparison with data derived by other techniques.
AD Ballistic Research Laboratories, APG A DOUBLE-CHARGE TECHNIQUE TO MEASURE FACE-ON BLAST W. Olson and J. Wenig UNCLASSIFIED Accession No. _____ Air blast - Test methods Pressure - measurement BRIM Report No. 1347 May 1961 DA Proj No. 503-04-002, QMSC No. 5010.11.815 UNCLASSIFIED Report This report presents measurements of air blast parameters at the midpoint of a line joining two equal weight explosive charges. The explosive used was 50/50 Pentolite with dual one or eight-pound spheres being detonated simultaneously. The pressure transducer employed was a BRL "pancake" pressure gage employing a synthetic piezoelectric ceramic as the sensing element. Pressure, impulse and duration measurements were obtained for scaled distances of 1.5 to 3.2 ft/lb^{1/3} for comparison with data derived by other techniques.	AD Ballistic Research Laboratories, APG A DOUBLE-CHARGE TECHNIQUE TO MEASURE FACE-ON BLAST W. Olson and J. Wenig UNCLASSIFIED Accession No. _____ Air blast - Test methods Pressure - measurement BRIM Report No. 1347 May 1961 DA Proj No. 503-04-002, QMSC No. 5010.11.815 UNCLASSIFIED Report This report presents measurements of air blast parameters at the midpoint of a line joining two equal weight explosive charges. The explosive used was 50/50 Pentolite with dual one or eight-pound spheres being detonated simultaneously. The pressure transducer employed was a BRL "pancake" pressure gage employing a synthetic piezoelectric ceramic as the sensing element. Pressure, impulse and duration measurements were obtained for scaled distances of 1.5 to 3.2 ft/lb^{1/3} for comparison with data derived by other techniques.

AD Ballistic Research Laboratories, APG Accession No. UNCLASSIFIED
A DOUBLE-CHARGE TECHNIQUE TO MEASURE FACE-ON BLAST Air blast - Test methods
W. Olson and J. Wenig Pressure - measurement
BRIM Report No. 1347 May 1961
DA Proj No. 503-04-002, OMSC No. 5010.11.815
UNCLASSIFIED Report

This report presents measurements of air blast parameters at the midpoint of a line joining two equal weight explosive charges. The explosive used was 50/50 Pentolite with dual one or eight-pound spheres being detonated simultaneously. The pressure transducer employed was a BRL "pancake" pressure gage employing a synthetic piezoelectric ceramic as the sensing element. Pressure, impulse and duration measurements were obtained for scaled distances of 1.5 to 3.2 ft/lb^{1/3} for comparison with data derived by other techniques.

AD Ballistic Research Laboratories, APG Accession No. UNCLASSIFIED
A DOUBLE-CHARGE TECHNIQUE TO MEASURE FACE-ON BLAST Air blast - Test methods
W. Olson and J. Wenig Pressure - measurement
BRIM Report No. 1347 May 1961
DA Proj No. 503-04-002, OMSC No. 5010.11.815
UNCLASSIFIED Report

This report presents measurements of air blast parameters at the midpoint of a line joining two equal weight explosive charges. The explosive used was 50/50 Pentolite with dual one or eight-pound spheres being detonated simultaneously. The pressure transducer employed was a BRL "pancake" pressure gage employing a synthetic piezoelectric ceramic as the sensing element. Pressure, impulse and duration measurements were obtained for scaled distances of 1.5 to 3.2 ft/lb^{1/3} for comparison with data derived by other techniques.

AD Ballistic Research Laboratories, APG Accession No. UNCLASSIFIED
A DOUBLE-CHARGE TECHNIQUE TO MEASURE FACE-ON BLAST Air blast - Test methods
W. Olson and J. Wenig Pressure - measurement
BRIM Report No. 1347 May 1961
DA Proj No. 503-04-002, OMSC No. 5010.11.815
UNCLASSIFIED Report

This report presents measurements of air blast parameters at the midpoint of a line joining two equal weight explosive charges. The explosive used was 50/50 Pentolite with dual one or eight-pound spheres being detonated simultaneously. The pressure transducer employed was a BRL "pancake" pressure gage employing a synthetic piezoelectric ceramic as the sensing element. Pressure, impulse and duration measurements were obtained for scaled distances of 1.5 to 3.2 ft/lb^{1/3} for comparison with data derived by other techniques.

AD Ballistic Research Laboratories, APG Accession No. UNCLASSIFIED
A DOUBLE-CHARGE TECHNIQUE TO MEASURE FACE-ON BLAST Air blast - Test methods
W. Olson and J. Wenig Pressure - measurement
BRIM Report No. 1347 May 1961
DA Proj No. 503-04-002, OMSC No. 5010.11.815
UNCLASSIFIED Report

This report presents measurements of air blast parameters at the midpoint of a line joining two equal weight explosive charges. The explosive used was 50/50 Pentolite with dual one or eight-pound spheres being detonated simultaneously. The pressure transducer employed was a BRL "pancake" pressure gage employing a synthetic piezoelectric ceramic as the sensing element. Pressure, impulse and duration measurements were obtained for scaled distances of 1.5 to 3.2 ft/lb^{1/3} for comparison with data derived by other techniques.